



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 21653-1 WLAN

Report Date – April 9, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature:

A handwritten signature in black ink, reading 'Albert J. Patapack'.

Name: Albert J. Patapack

Title: EMC Engineer

Date: April 9, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

Test Report Details	3
Applicable Standards	3
Summary of Testing.....	4
General and Special Conditions.....	4
Equipment and Cable Configurations	5
Measuring Equipment and Calibration Information	5
Description of WLAN Transmitter	5
Measurement Procedures and Data.....	6
Spectrum Bandwidth.....	6
Measurement Procedure.....	6
Measurement Results	6
PEAK OUTPUT POWER	13
Measurement Procedure.....	13
Measurement Results	13
Power Spectral Density	17
Measurement Procedure.....	17
Measurement Results	17
SPURIOUS RF CONDUCTED EMISSIONS	18
Measurement Procedure.....	18
Measurement Results	18
AC LINE CONDUCTED EMISSIONS	31
Measurement Procedure.....	31
Measurement Results	31

Note: Please refer to Exhibit 6A3 for Radiated Emissions data.

Test Report Details

Tests Performed By: Motorola Mobile Devices Business (MDb)
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDb FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
Mobile Devices Business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850, GSM 1900, EDGE, Bluetooth,
WLAN b/g

FCC ID : IHDT56JT1

Serial Numbers: 352482020000489, 352482020000539,
352482020000596, 352482020000562,
352482020000505

Testing Complete Date: March 13, 2008

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

 X Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI 63.4 2003

Summary of Testing

Test	Test Name	Pass/Fail
1	Spectrum Bandwidth	Pass
2	Spurious RF Conducted Emissions	Pass
3	Peak Power	Pass
4	Power Spectral Density	Pass
5	Conducted Spurious Emissions	Pass
6	AC Line Conducted Emissions	Pass

Test	Test Name	Results
1	Spectrum Bandwidth	See plots
2	Spurious RF Conducted Emissions	See plots
3	Peak Power	See plots
4	Power Spectral Density	See tables
5	Conducted Spurious Emissions	See plots
6	AC Line Conducted Emissions	See Plots

General and Special Conditions

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ES126	100226	6/11/2008
Agilent	MXA Signal Analyzer	N9020A	US46470586	12/10/2008
Attenuator	Weinschel	AS-6	7074	7/23/2008
Attenuator	Weinschel	AS-6	6677	6/21/2008
ETS	LISN	3810/2NM	62907	5/02/2008
ETS	LISN	3810/2NM	62912	5/02/2008

All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service. All equipment is on a one-year calibration cycle.

Description of WLAN Transmitter

The EUT offers WLAN as a feature. The WLAN is an 802.11 b/g transceiver and is designed to operate between 2400 and 2483 MHz. The WLAN antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a WLAN transmitter, it is designed operate with other WLAN devices as defined by the industrial standard. In this application, the device is battery operated.

The WLAN Antenna gain is -3.6dBi.

Measurement Procedures and Data

Spectrum Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:


1. RBW $\geq$ 100 kHz
2. VBW $\geq$ RBW
3. Sweep = auto
4. Detector function = peak
5. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 6 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 6 dB bandwidth of the emission. The same procedure was repeated for 20 dB bandwidth.

Measurement Results


See attached

802.11 b

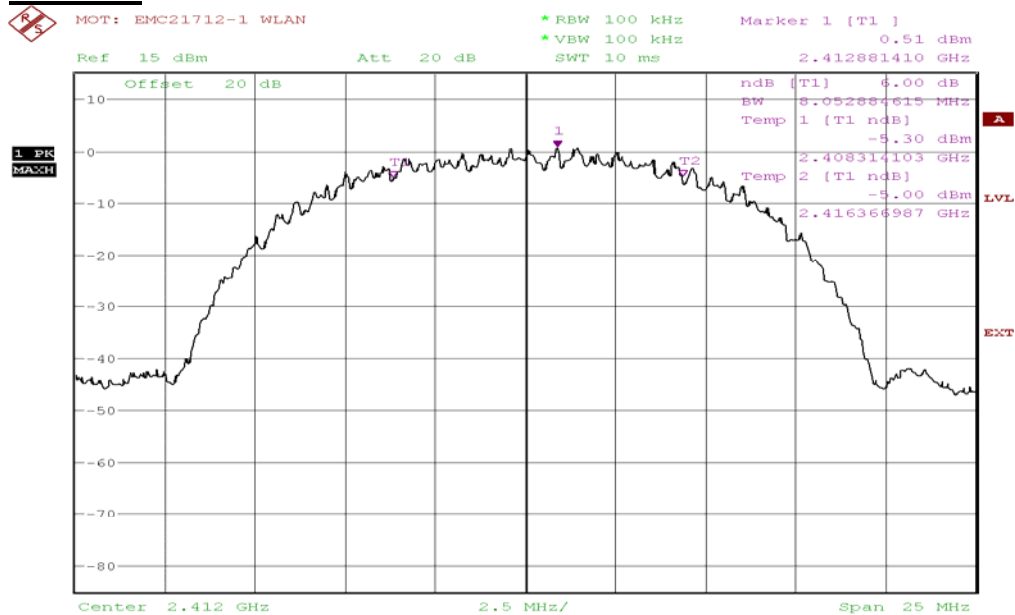


EMC 21712 WLAN
Date: 13.MAR.2008 09:09:02

6dB Bandwidth Channel 1 @ 11 Mbps, 16dBm

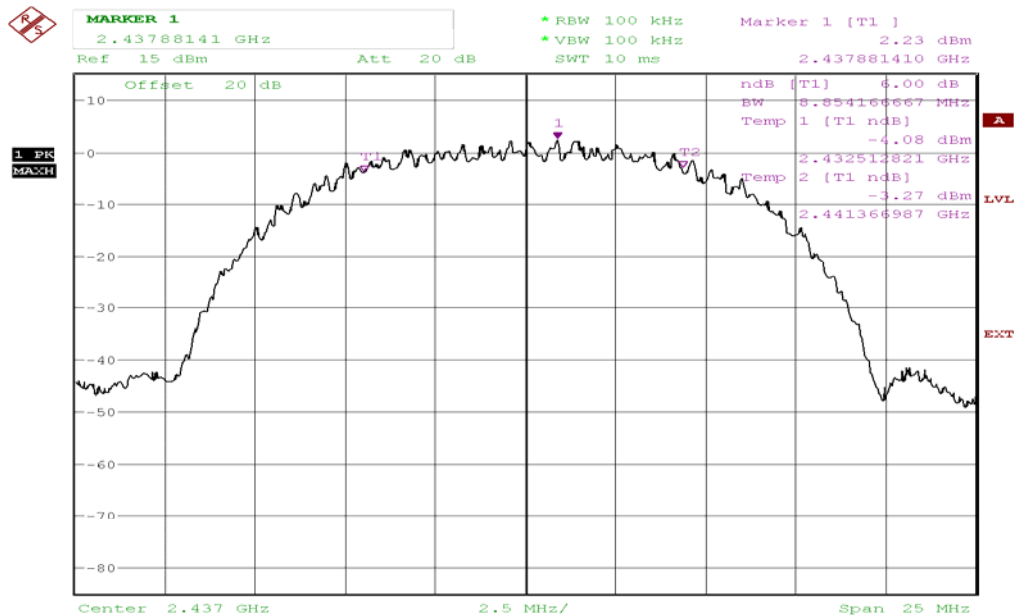


EMC 21712 WLAN
Date: 13.MAR.2008 09:15:17

6dB Bandwidth Channel 6 @ 11 Mbps, 16dBm

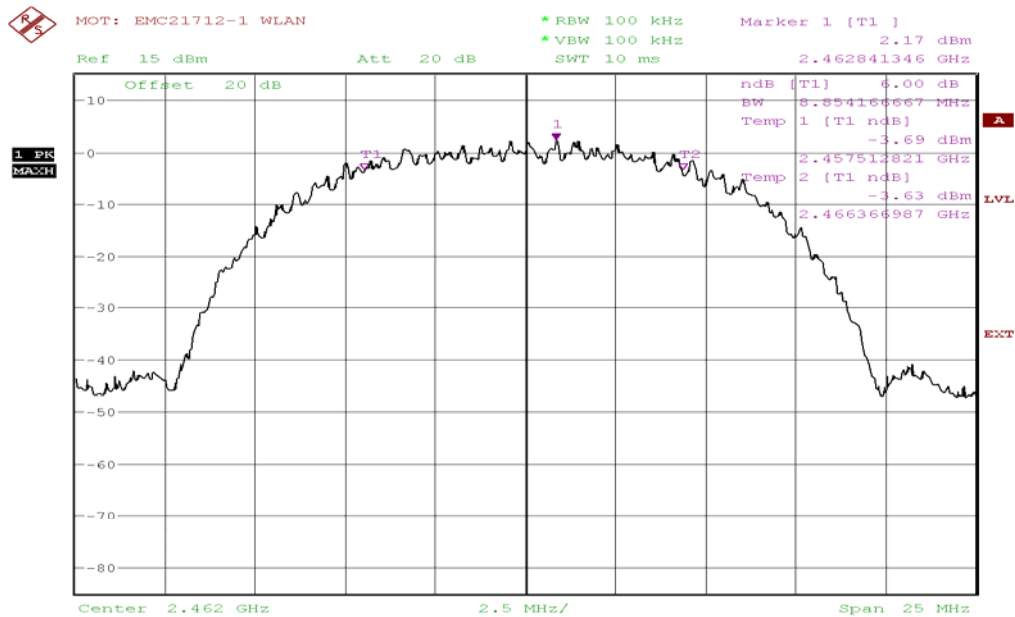


EMC 21712 WLAN
Date: 13.MAR.2008 09:21:23

6dB Bandwidth Channel 11 @ 11 Mbps, 16dBm

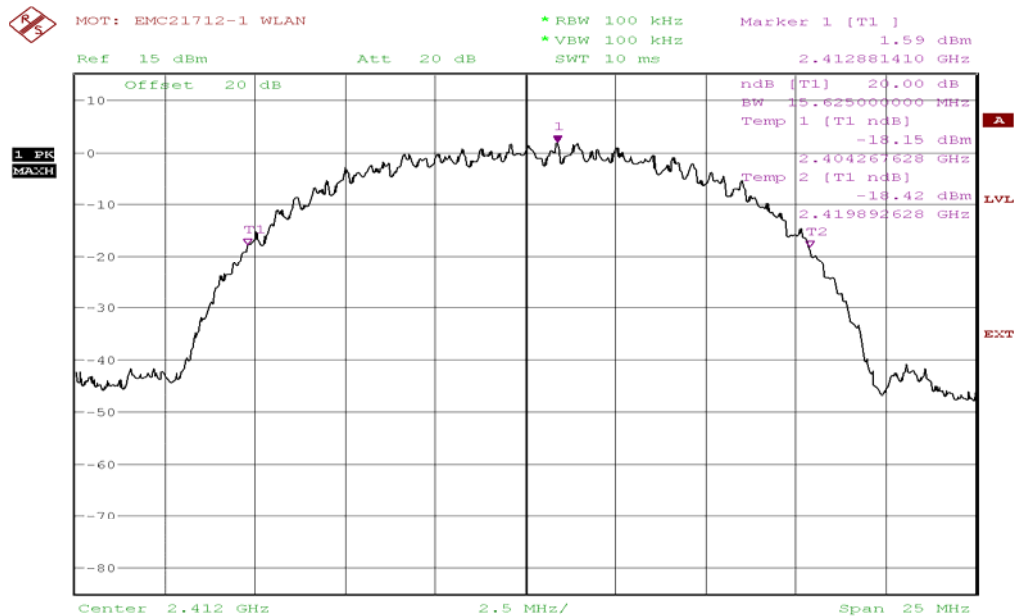


EMC 21712 WLAN
Date: 13.MAR.2008 09:42:37

20dB Bandwidth Channel 1 @ 11 Mbps, 16dBm

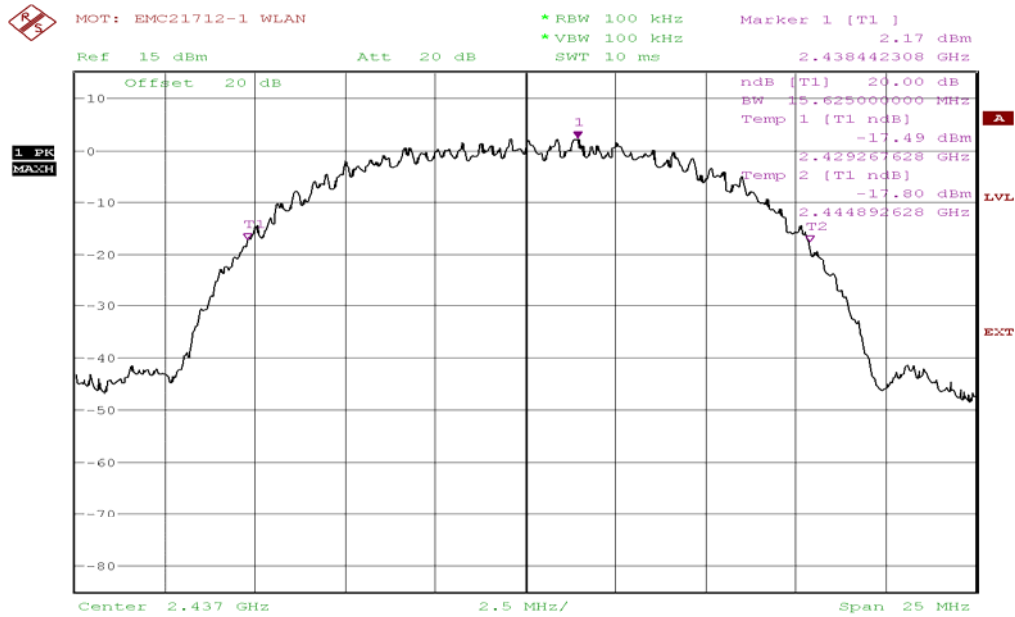

EMC 21712 WLAN
Date: 13.MAR.2008 09:47:00


20dB Bandwidth Channel 6 @ 11 Mbps, 16dBm

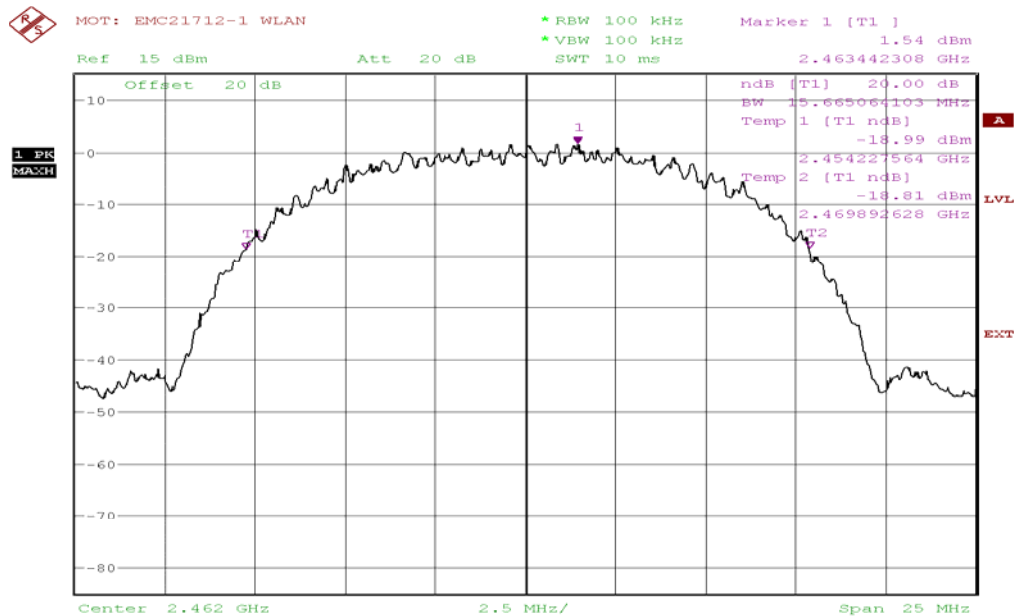

EMC 21712 WLAN
Date: 13.MAR.2008 09:54:07


20dB Bandwidth Channel 11 @ 11 Mbps, 16dBm

802.11 g

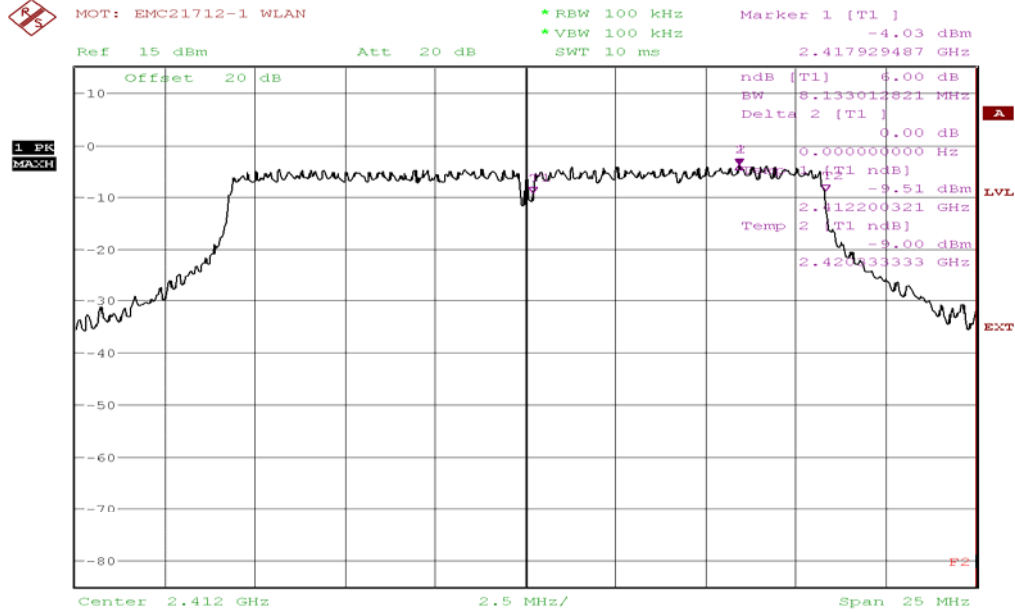


EMC 21712 WLAN
Date: 13.MAR.2008 10:16:07

6dB Bandwidth Channel 1 @ 6 Mbps, 15dBm

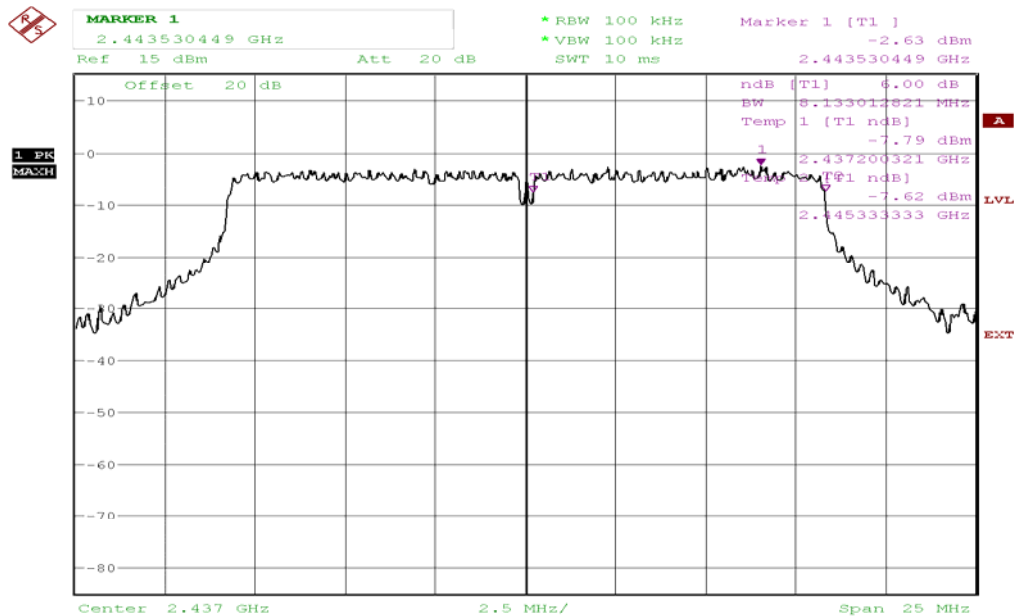


EMC 21712 WLAN
Date: 13.MAR.2008 10:28:32

6dB Bandwidth Channel 6 @ 6 Mbps, 15dBm

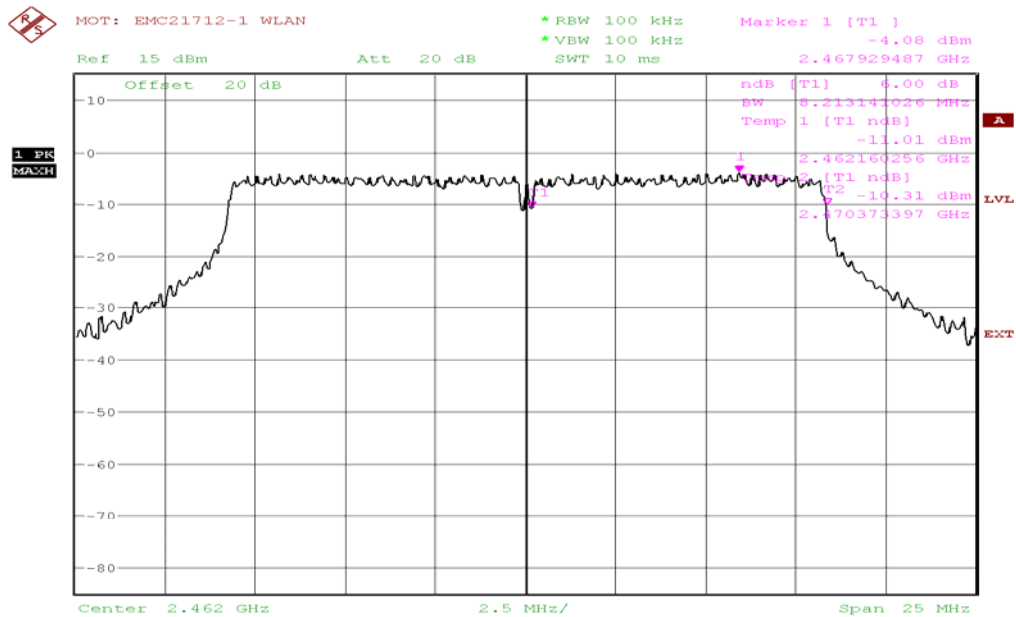


EMC 21712 WLAN
Date: 13.MAR.2008 12:07:08

6dB Bandwidth Channel 11 @ 6 Mbps, 15dBm

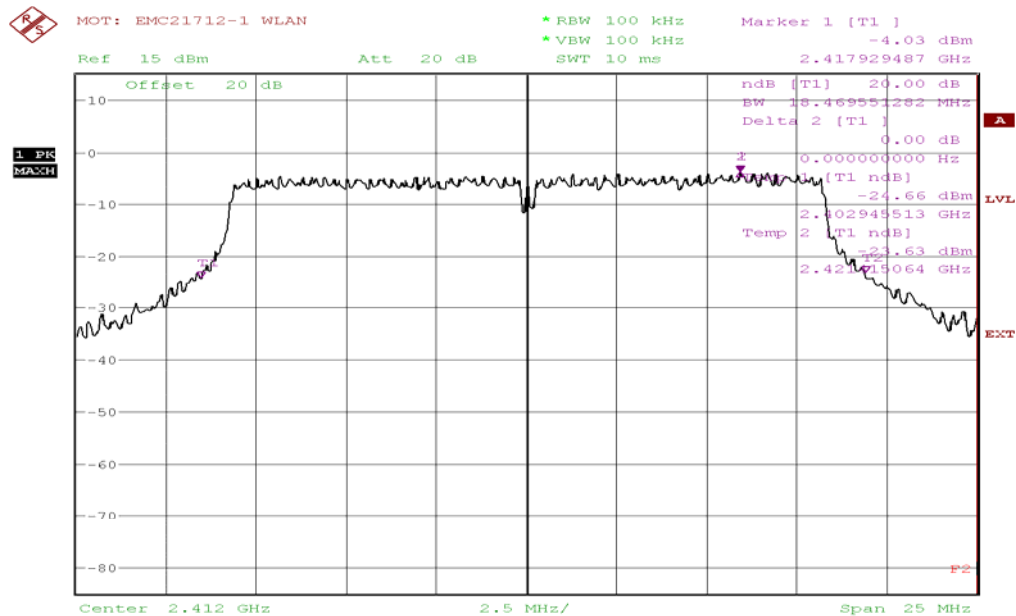


EMC 21712 WLAN
Date: 13.MAR.2008 10:15:03

20dB Bandwidth Channel 1 @ 6 Mbps, 15dBm

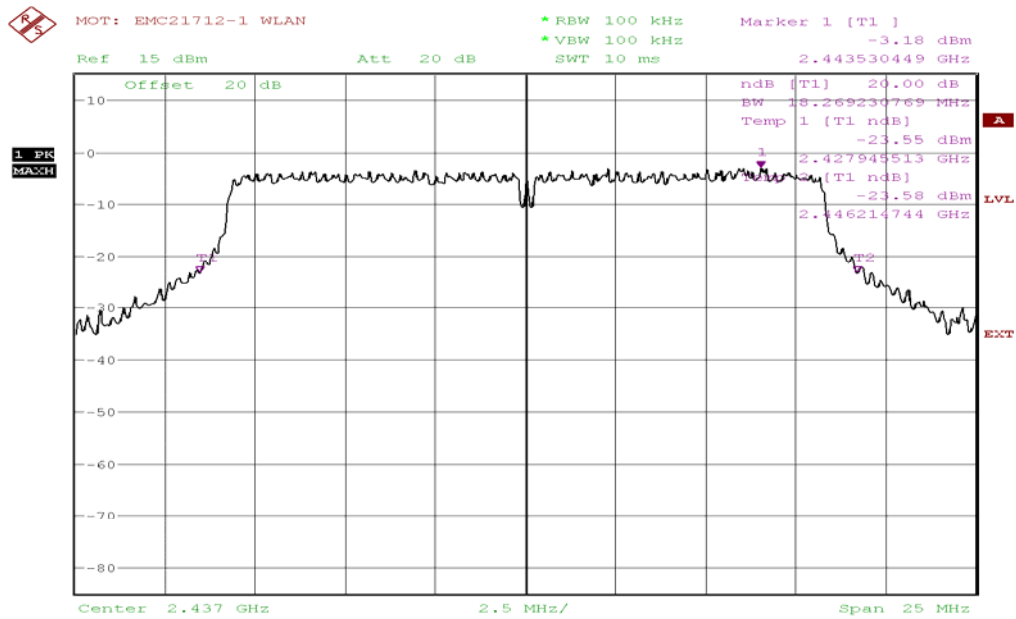

EMC 21712 WLAN
Date: 13.MAR.2008 12:00:25

20dB Bandwidth Channel 6 @ 6 Mbps, 15dBm

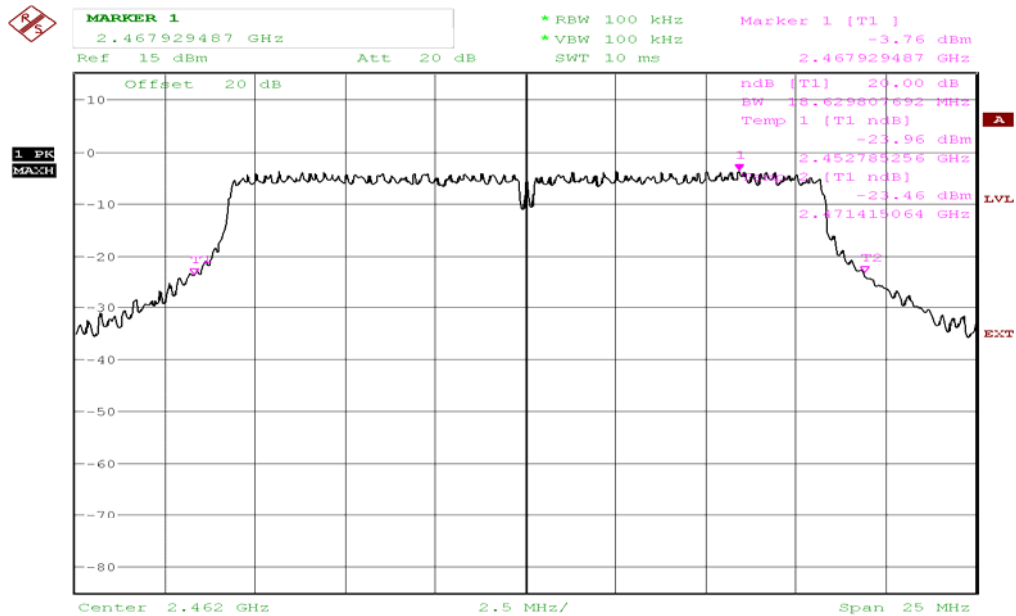

EMC 21712 WLAN
Date: 13.MAR.2008 12:05:33

20dB Bandwidth Channel 11 @ 6 Mbps, 15dBm

PEAK OUTPUT POWER

CFR 47 Part 15.247


Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached

802.11 b

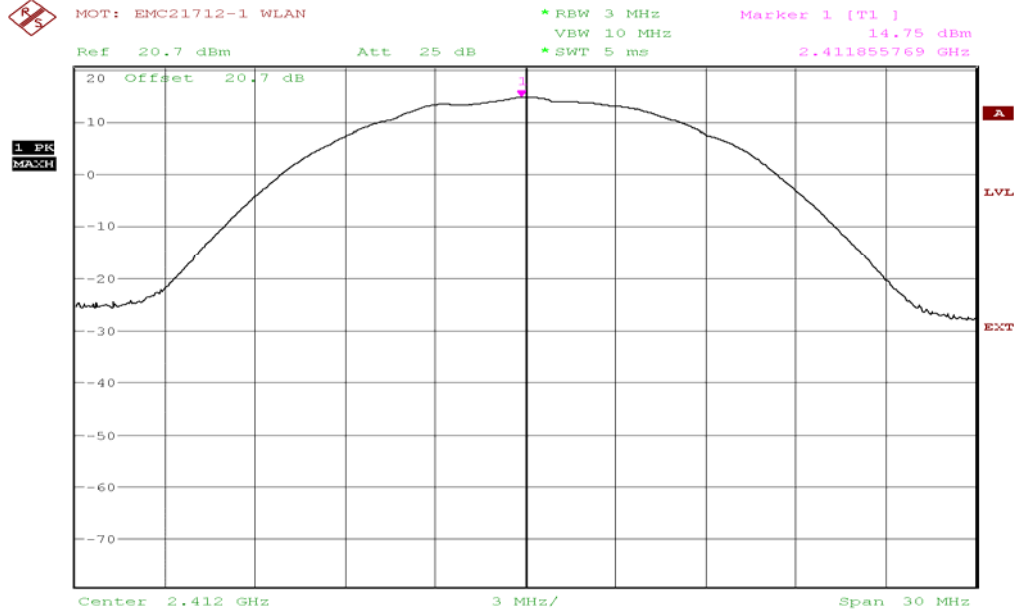


EMC 21712 WLAN
Date: 13.MAR.2008 13:23:50

Max. Power Channel 1 @ 11 Mbps

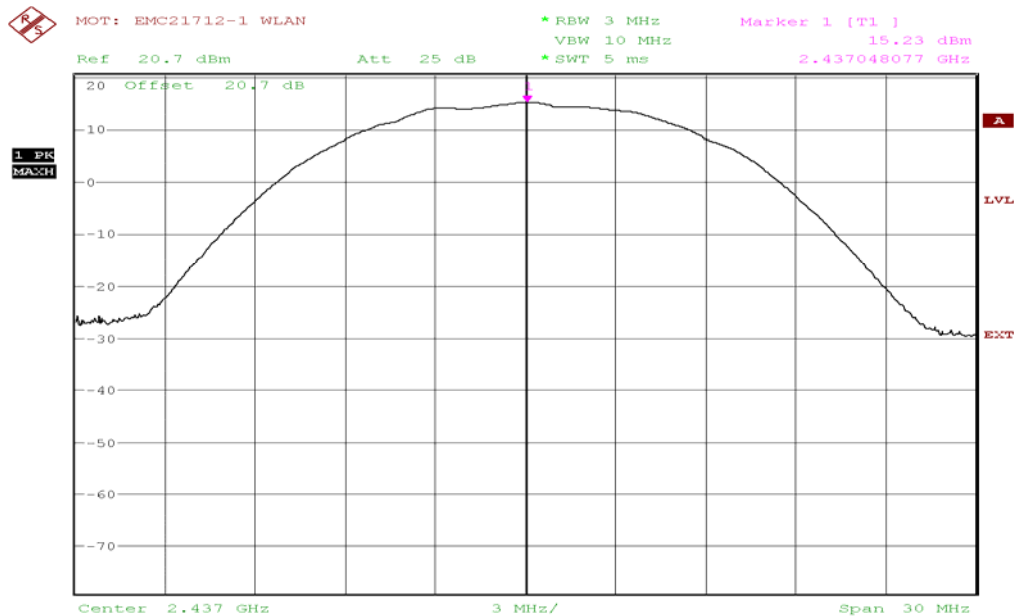

EMC 21712 WLAN
Date: 13.MAR.2008 13:26:55


Max. Power Channel 6 @ 11 Mbps

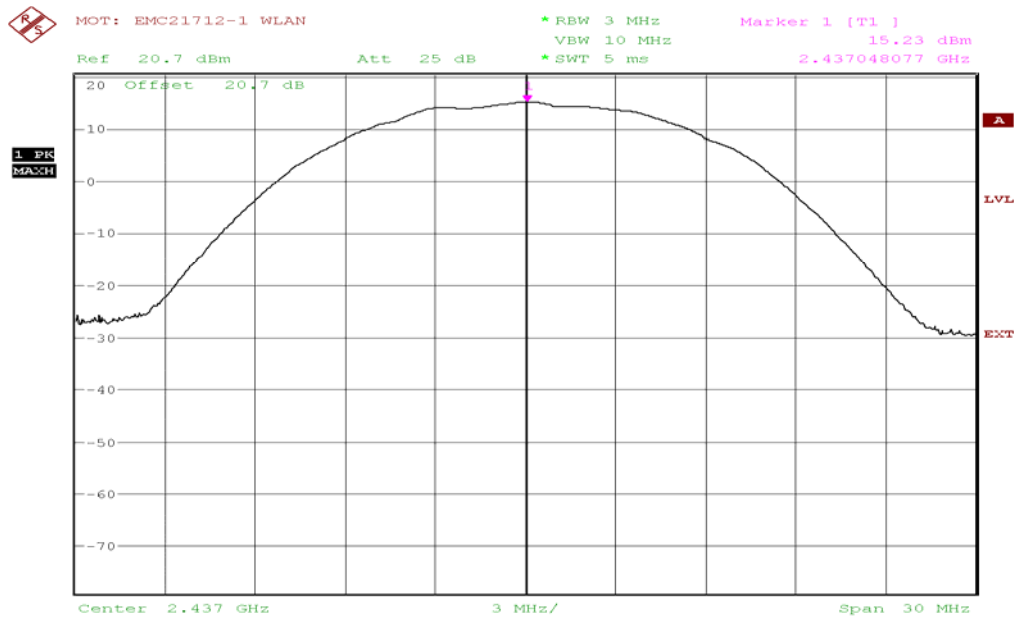

EMC 21712 WLAN
Date: 13.MAR.2008 13:26:55


Max. Power Channel 11 @ 11 Mbps

802.11 g

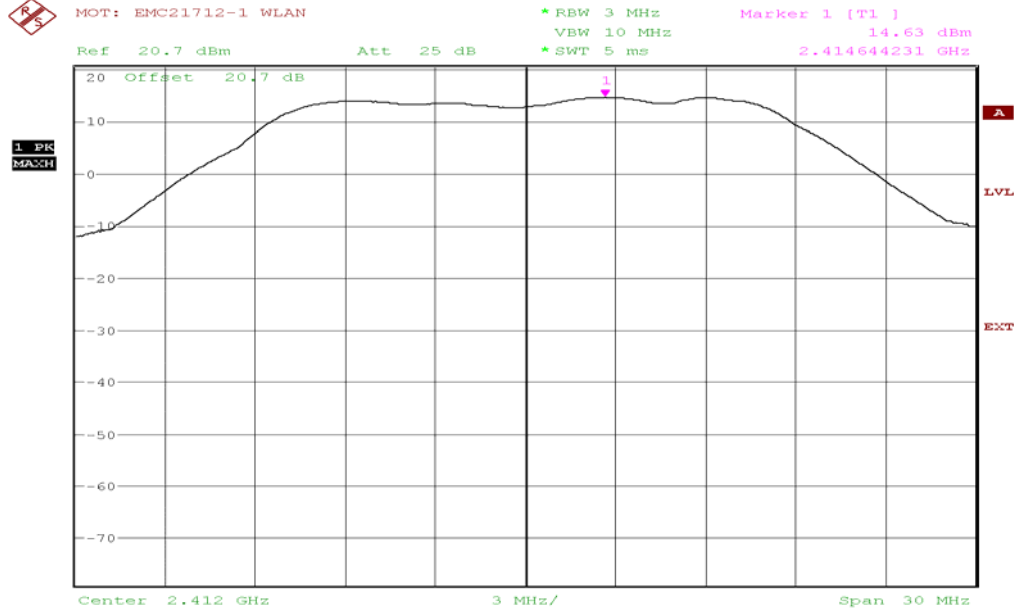


EMC 21712 WLAN
Date: 13.MAR.2008 13:33:27

Max. Power Channel 1 @ 6 Mbps

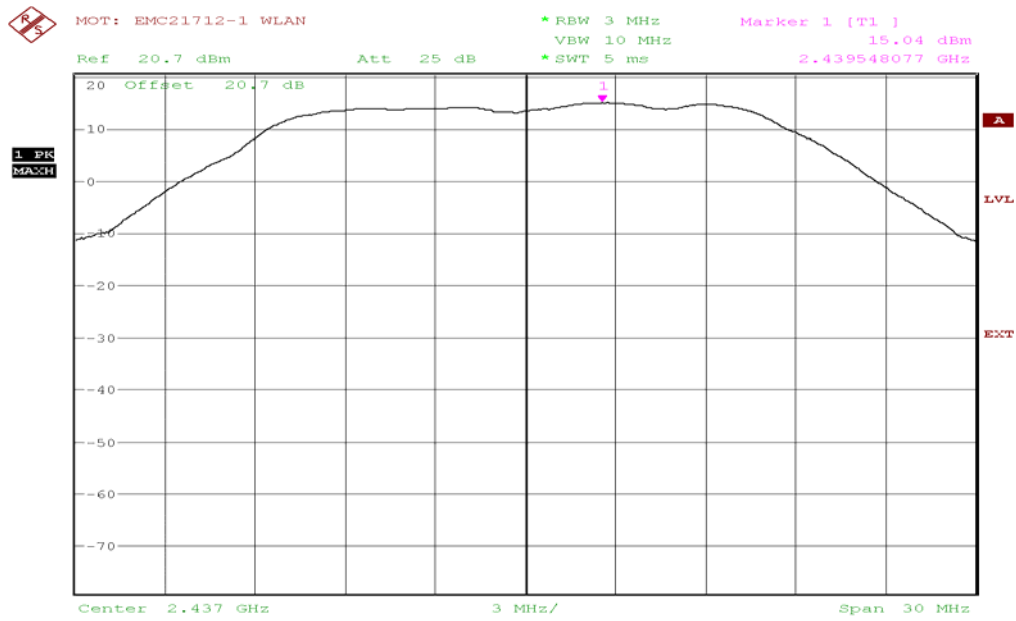

EMC 21712 WLAN
Date: 13.MAR.2008 13:38:50

Max. Power Channel 6 @ 6 Mbps

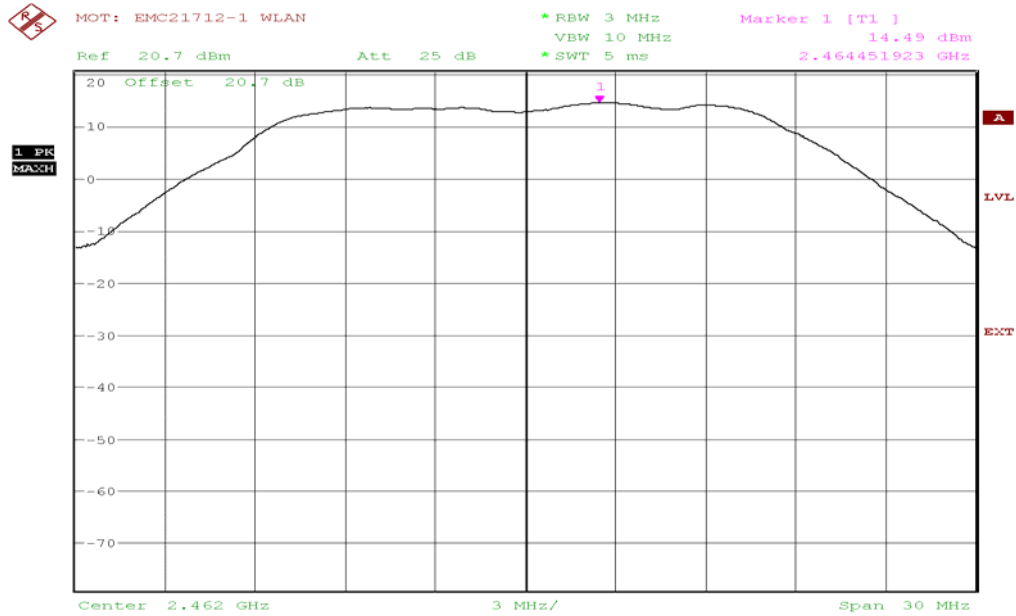

EMC 21712 WLAN
Date: 13.MAR.2008 13:42:00

Max. Power Channel 11 @ 6 Mbps

Power Spectral Density

CFR 47 Part 15.247 (d)

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The WLAN DSSS function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = 300kHz
2. VBW = 30kHz
3. RBW = 3kHz
4. Sweep = 50ms
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate.

Measurement Results

2412 MHz	2437MHz	2462MHz
-10.95dBm	-12.40dBm	-12.80dBm

802.11 b 11Mbps

2412 MHz	2437MHz	2462MHz
-14.91dBm	-14.69dBm	-13.58dBm

802.11 g 6Mbps

SPURIOUS RF CONDUCTED EMISSIONS

CFR 47 Part 15.247


Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

802.11 b @ 11Mbps

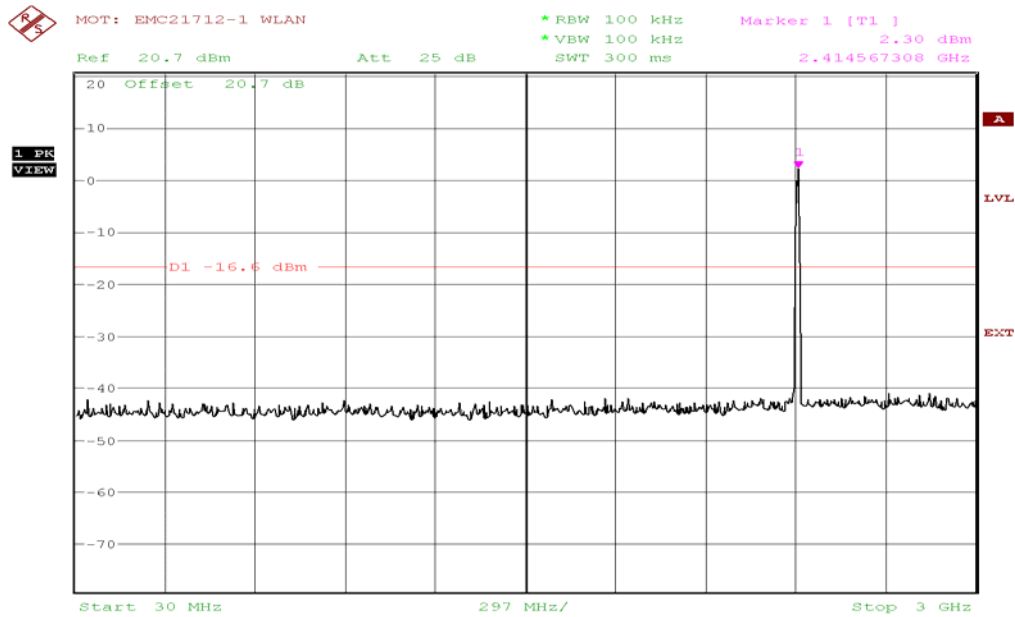


EMC 21712 WLAN
Date: 13.MAR.2008 14:49:48

Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

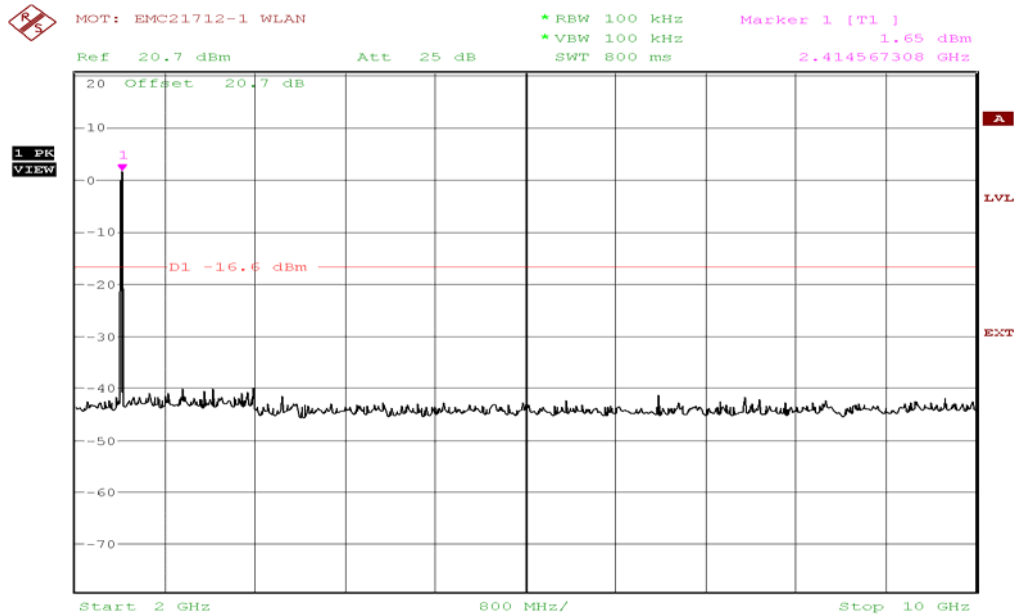


EMC 21712 WLAN
Date: 13.MAR.2008 14:48:27

Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

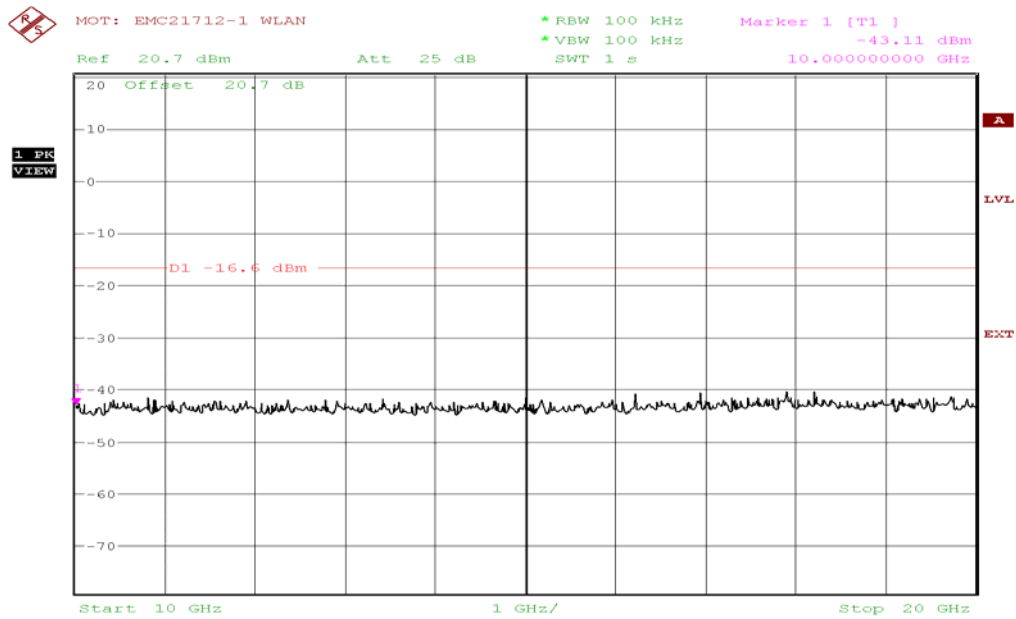


EMC 21712 WLAN
Date: 13.MAR.2008 14:51:07

Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

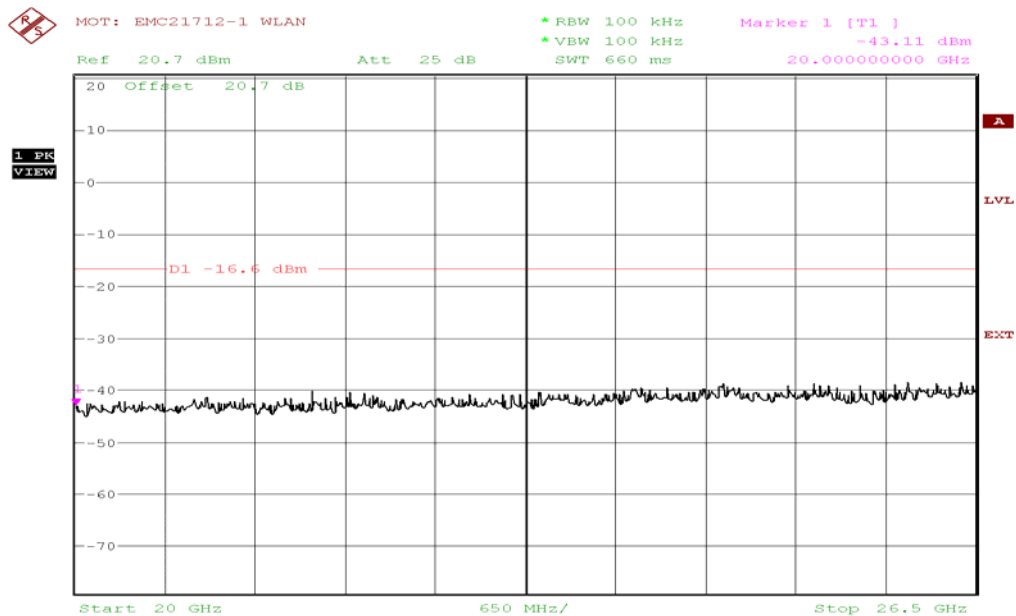


EMC 21712 WLAN
Date: 13.MAR.2008 14:52:08

Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

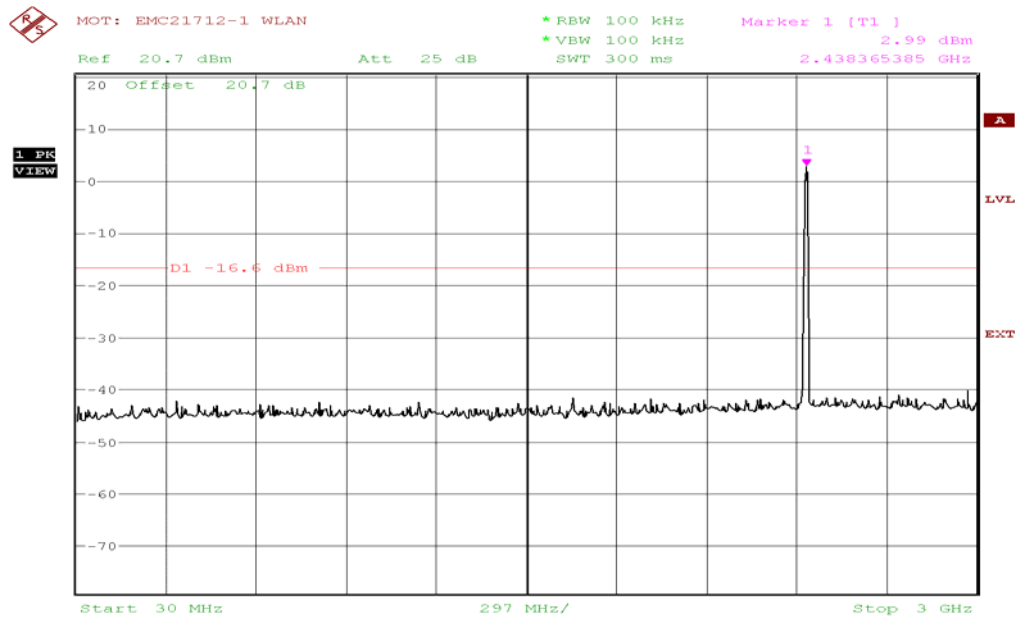


EMC 21712 WLAN
Date: 13.MAR.2008 14:55:51

Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

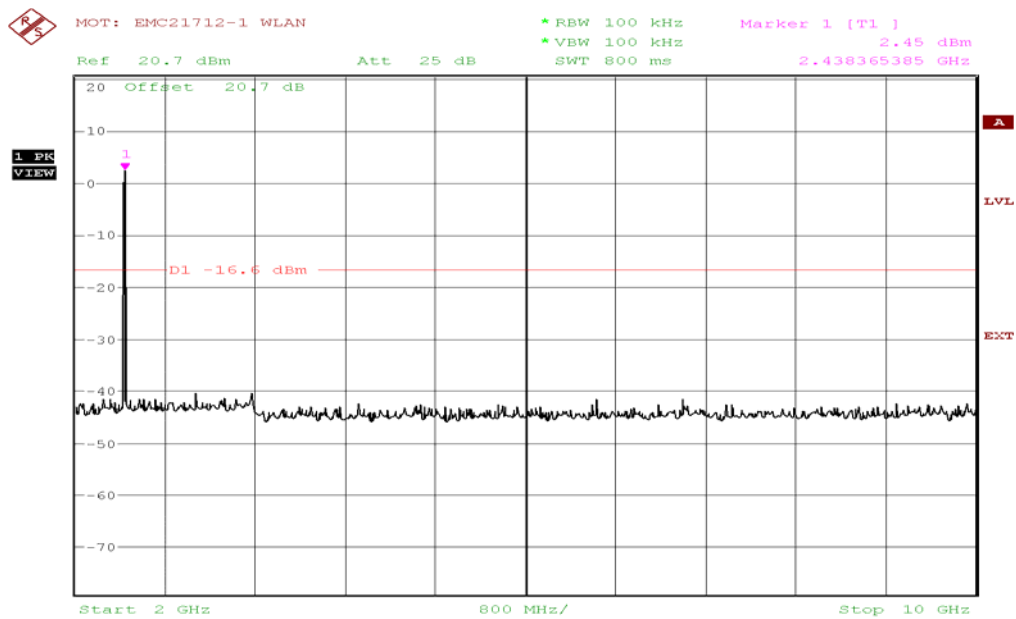


EMC 21712 WLAN
Date: 13.MAR.2008 14:57:04

Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

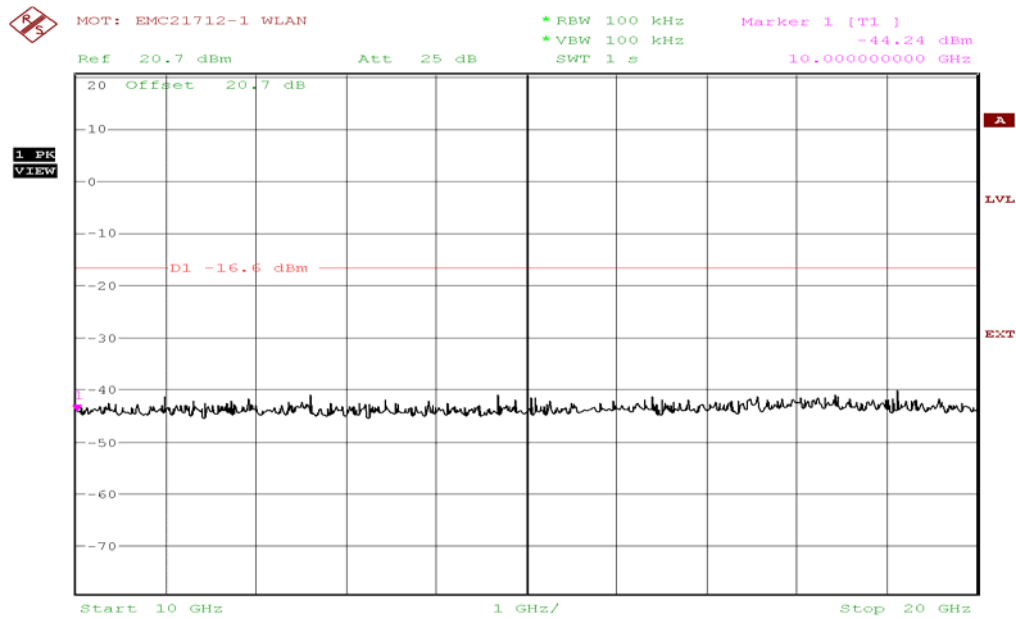


EMC 21712 WLAN
Date: 13.MAR.2008 14:58:22

Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

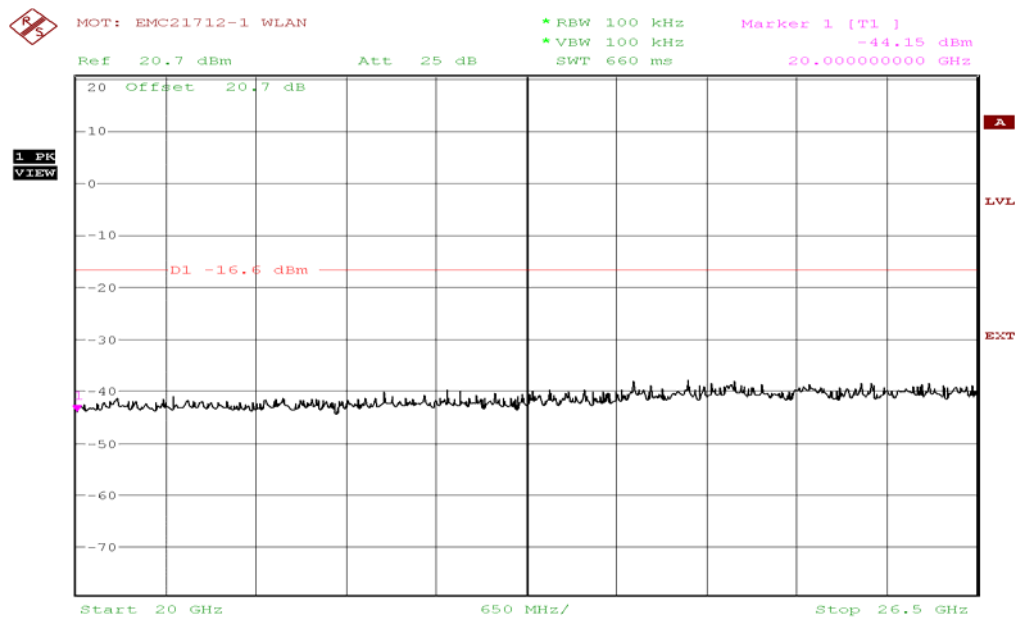


EMC 21712 WLAN
Date: 13.MAR.2008 14:59:30

Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

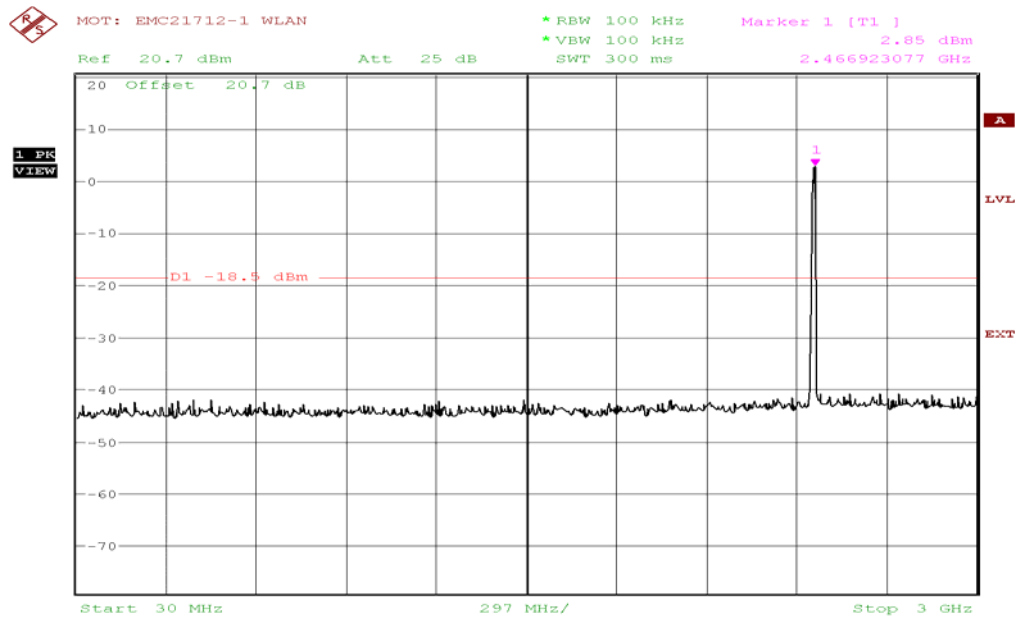


EMC 21712 WLAN
Date: 13.MAR.2008 15:02:35

Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

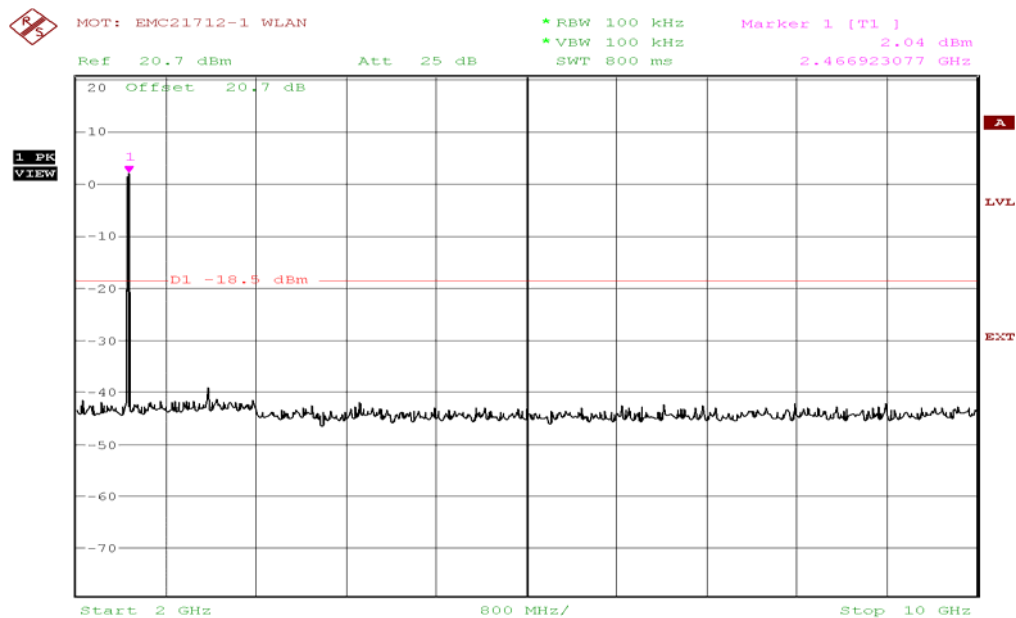


EMC 21712 WLAN
Date: 13.MAR.2008 15:03:28

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

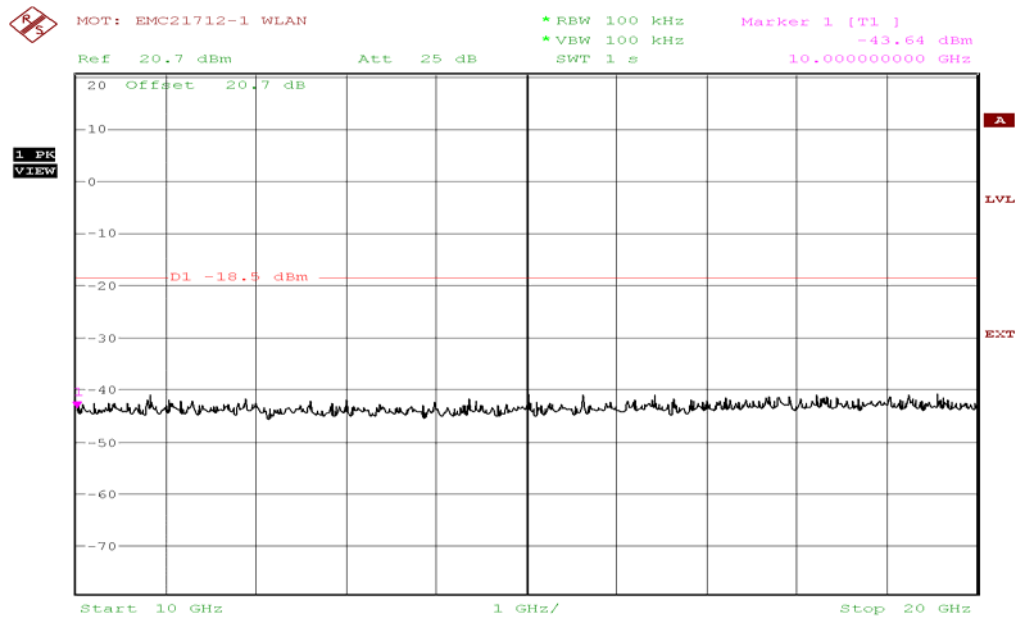

EMC 21712 WLAN
Date: 13.MAR.2008 15:04:31


Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

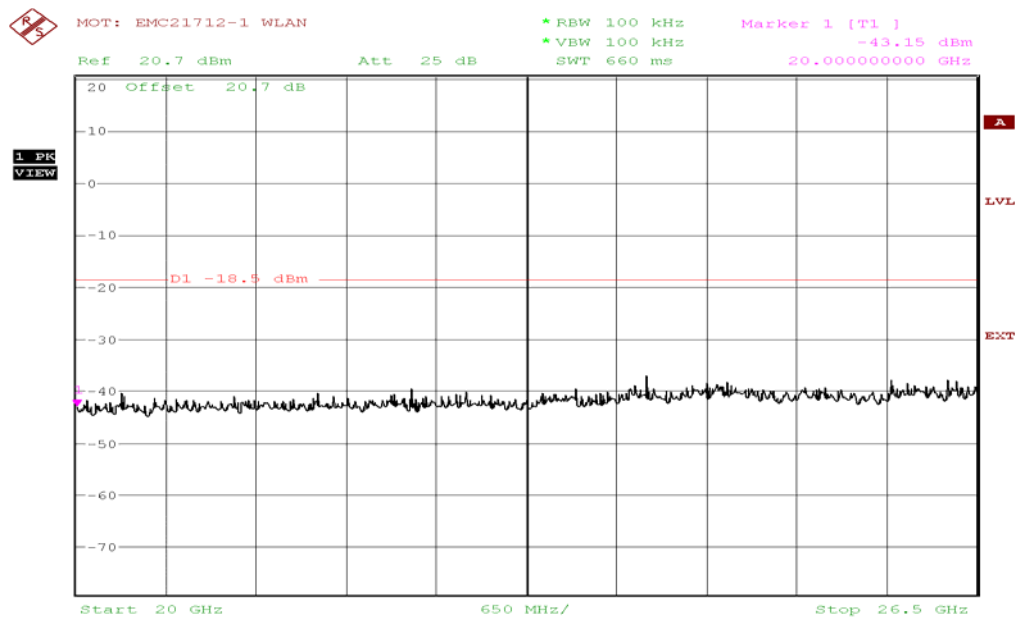

EMC 21712 WLAN
Date: 13.MAR.2008 15:05:42


Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)

802.11 g @ 6Mbps

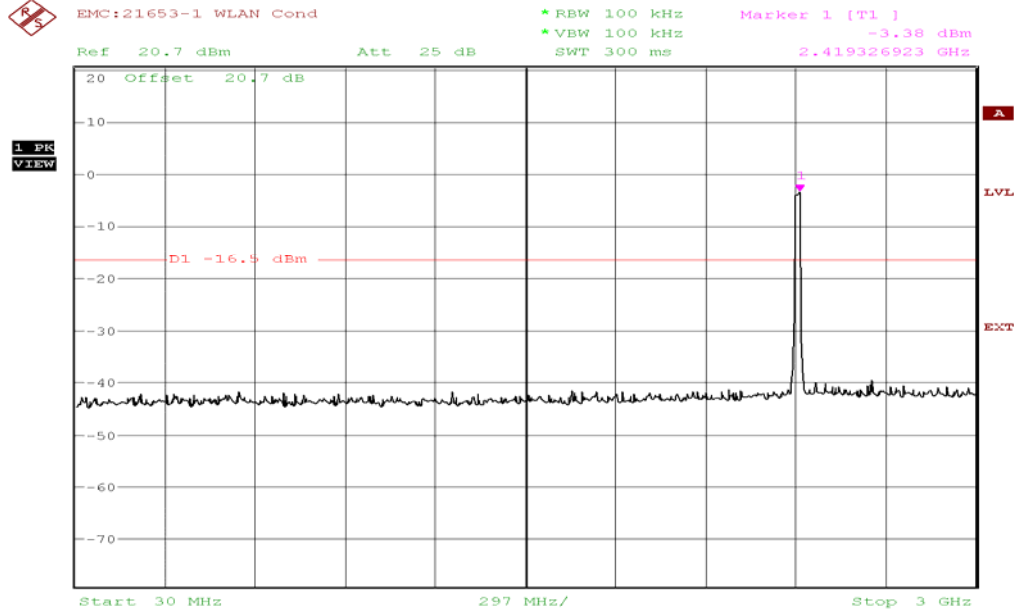


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 12:29:13

Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

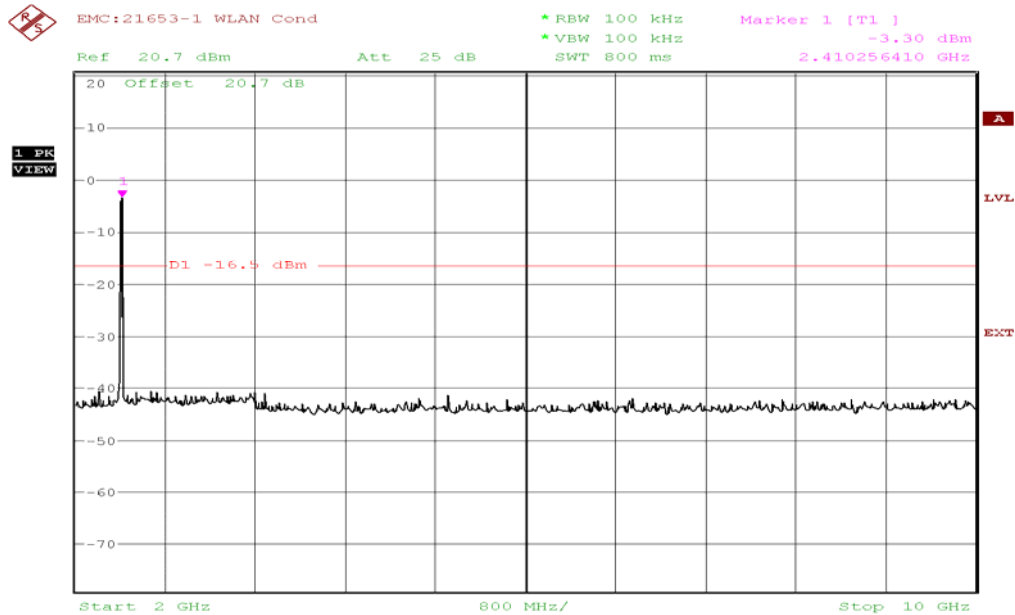


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 12:39:52

Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

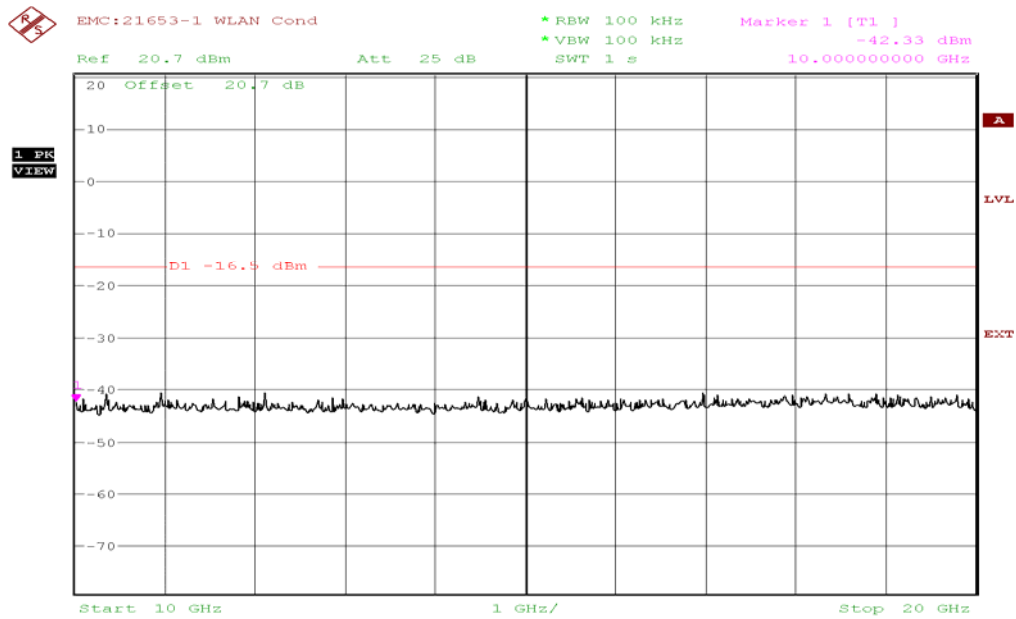


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 12:41:35

Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

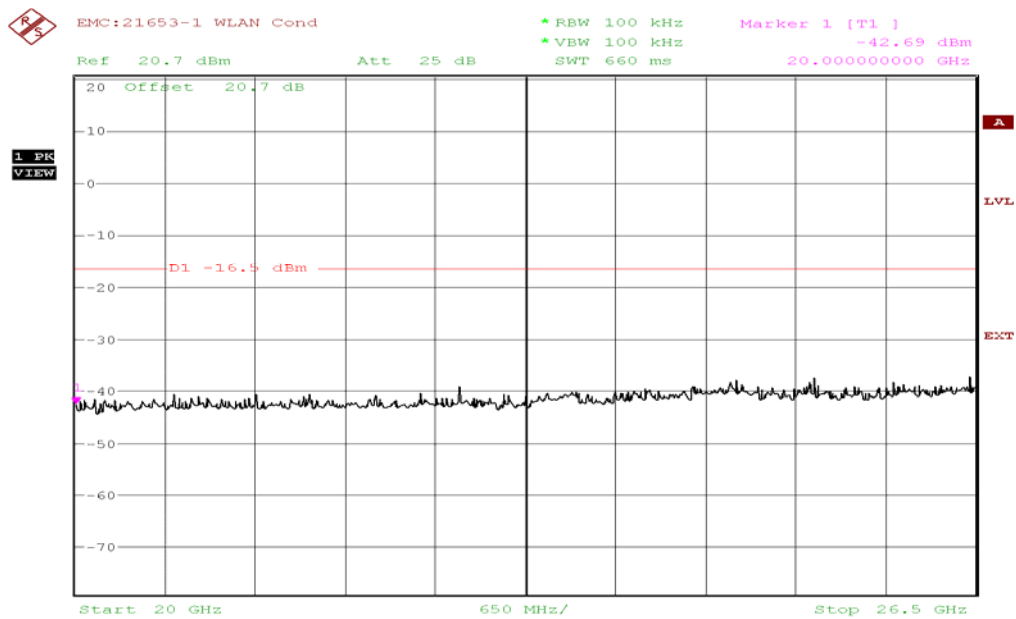


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 12:42:33

Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

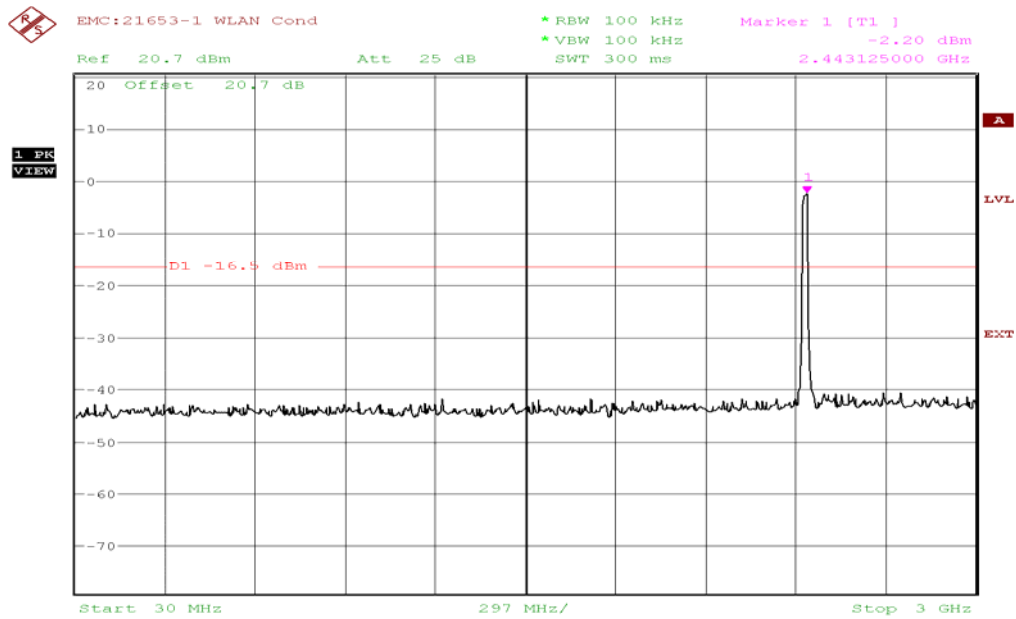


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 12:55:10

Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

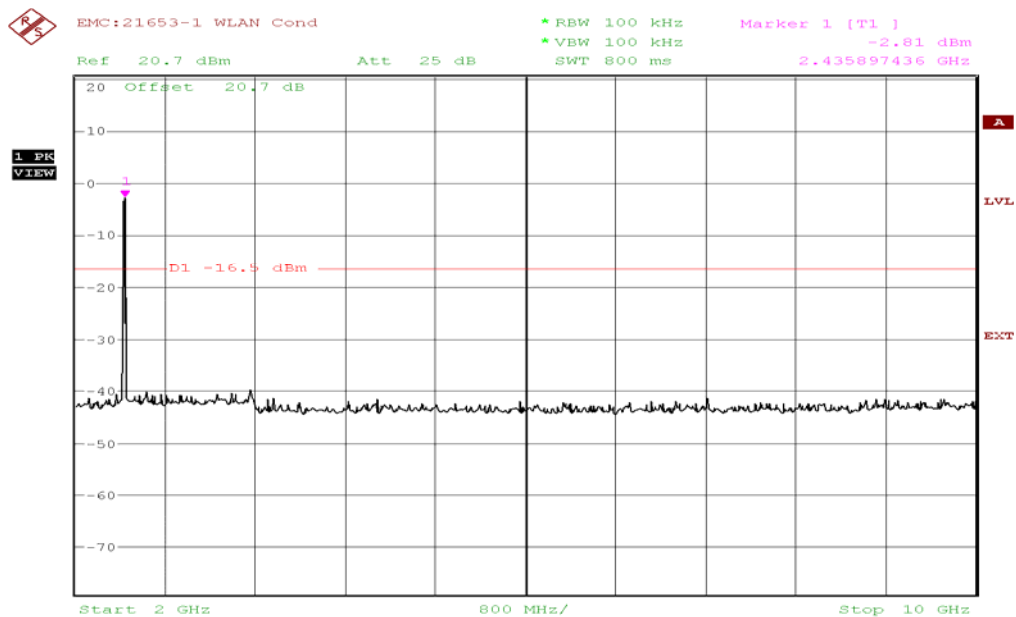


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:20:21

Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

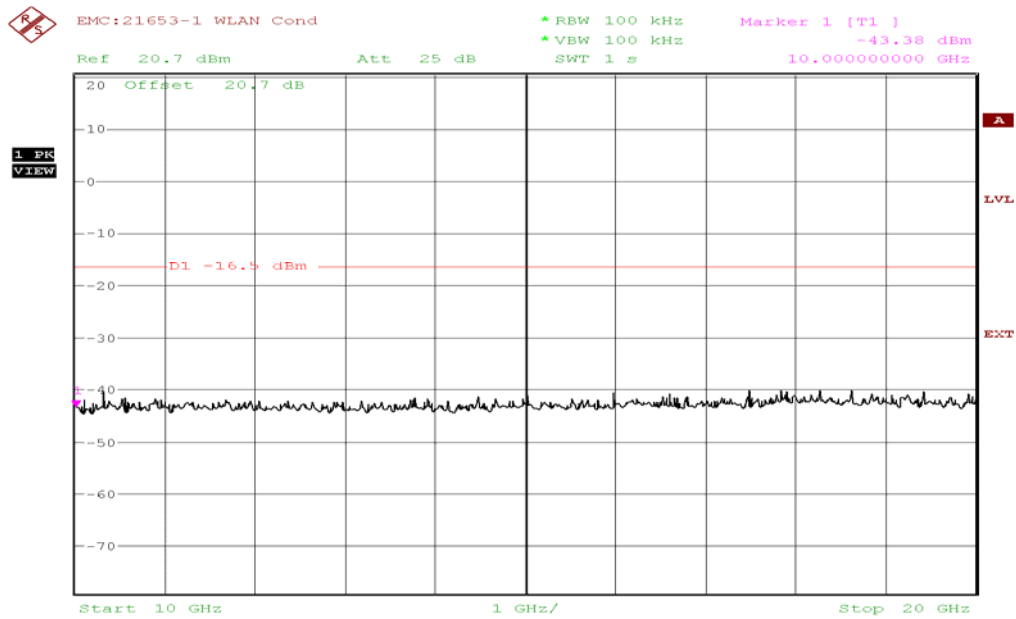


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:21:42

Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

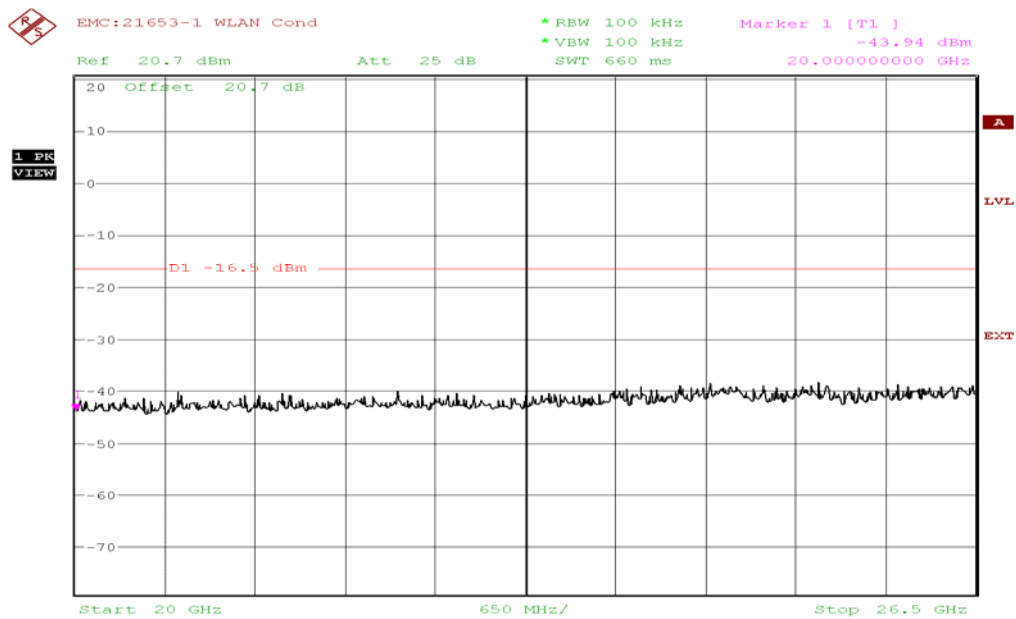


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:23:20

Conducted Spurious Emissions 20-26.5GHz (Mid Channel Enabled)

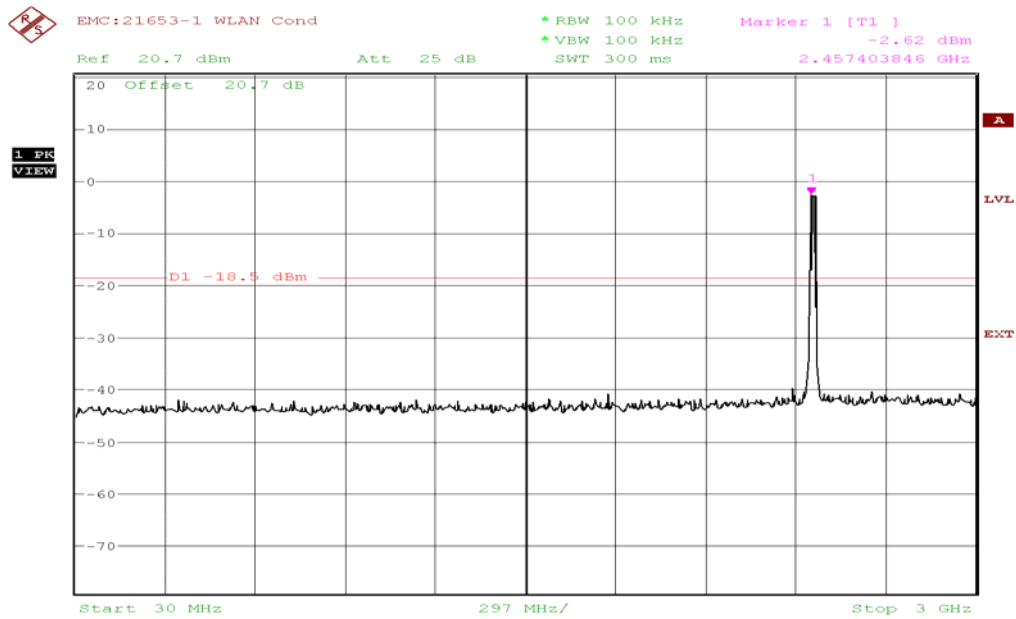


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:28:20

Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

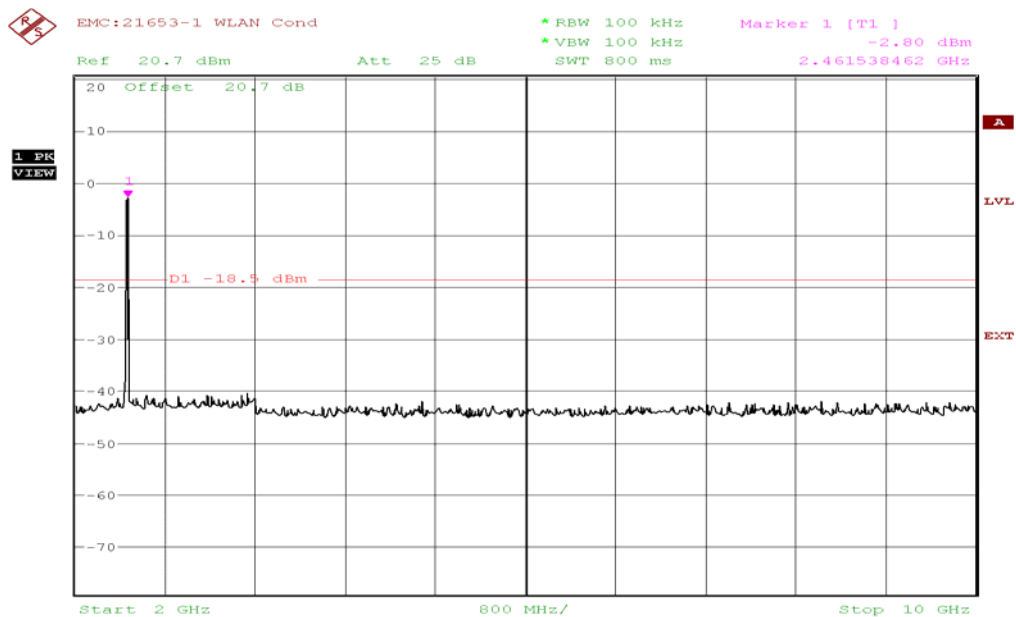


EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:31:01

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

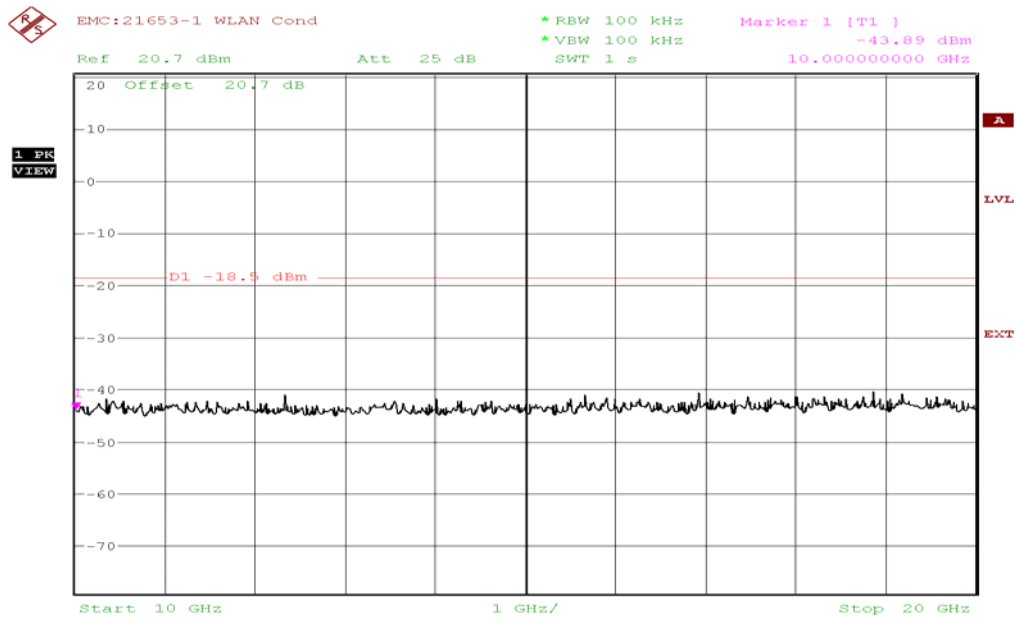

EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:31:56

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

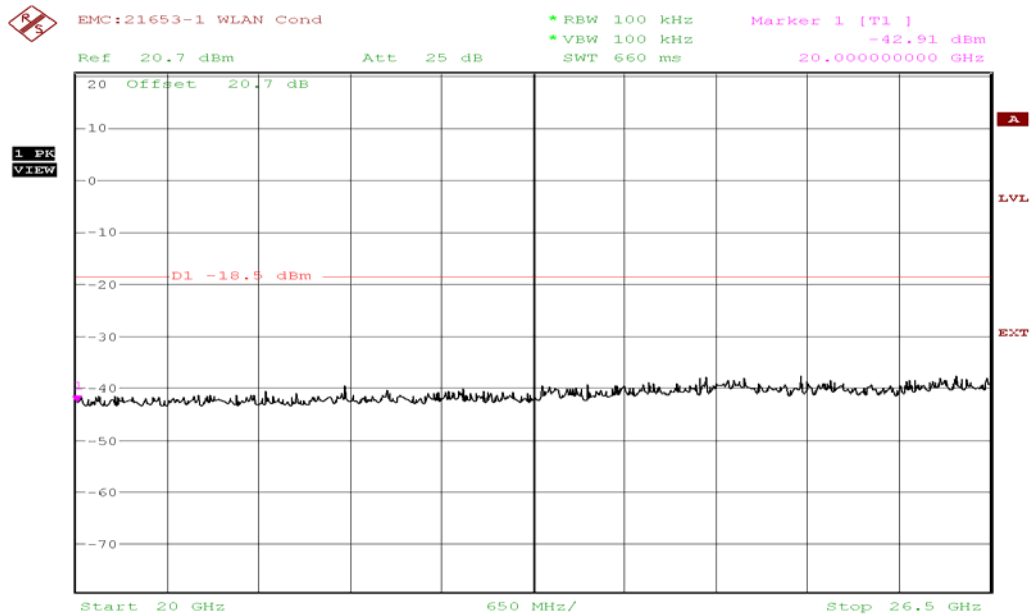

EMC: 21653-1 WLAN Cond
Date: 18.MAR.2008 13:33:08

Conducted Spurious Emissions 20-26.5GHz (High Channel Enabled)

AC LINE CONDUCTED EMISSIONS

CFR 47 Part 15.207

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Detectors – Quasi Peak and Average Detector.


Measurement Results

See attached:


802.11b @ 11Mbps

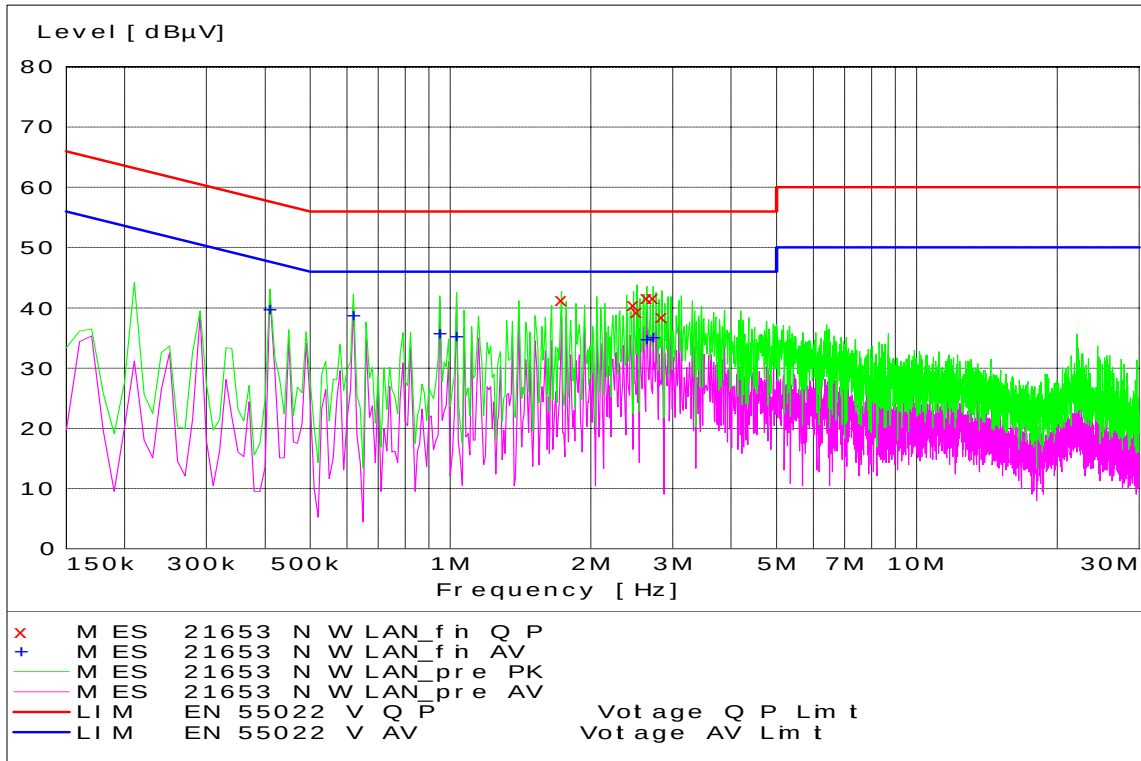


WLAN Channel 1 - Tx Mode - Neutral Coupling

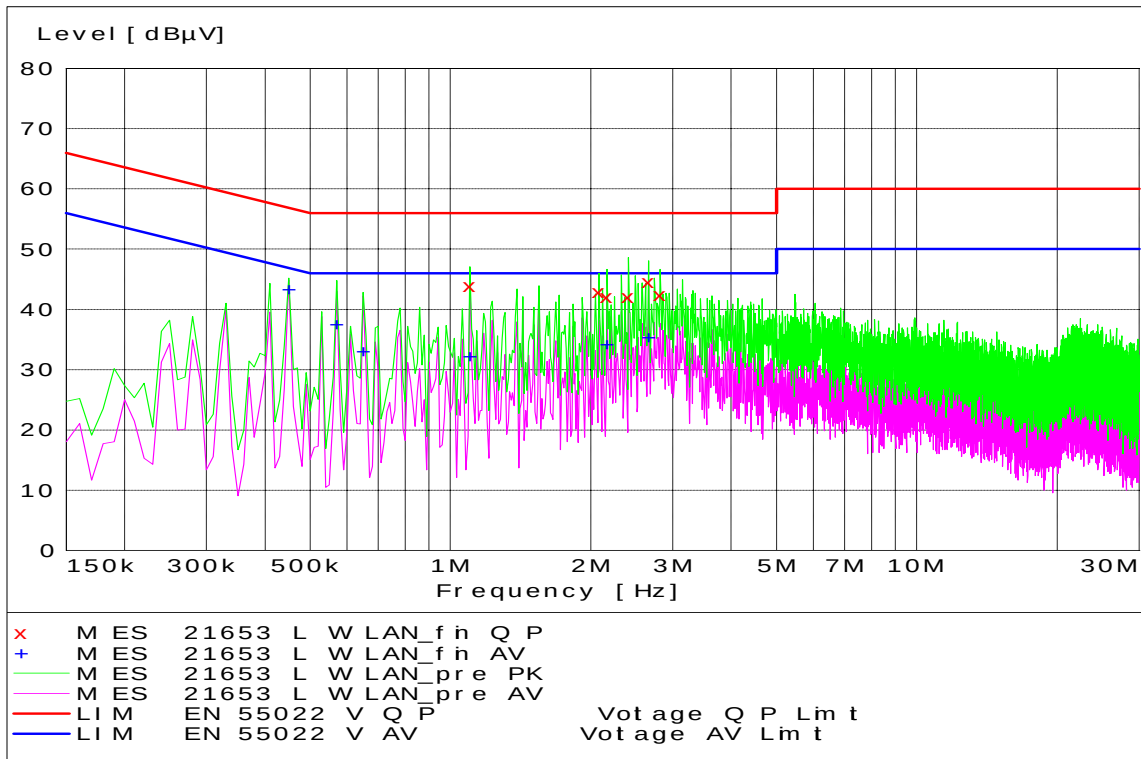


WLAN Channel 1 - Tx Mode – Line Coupling

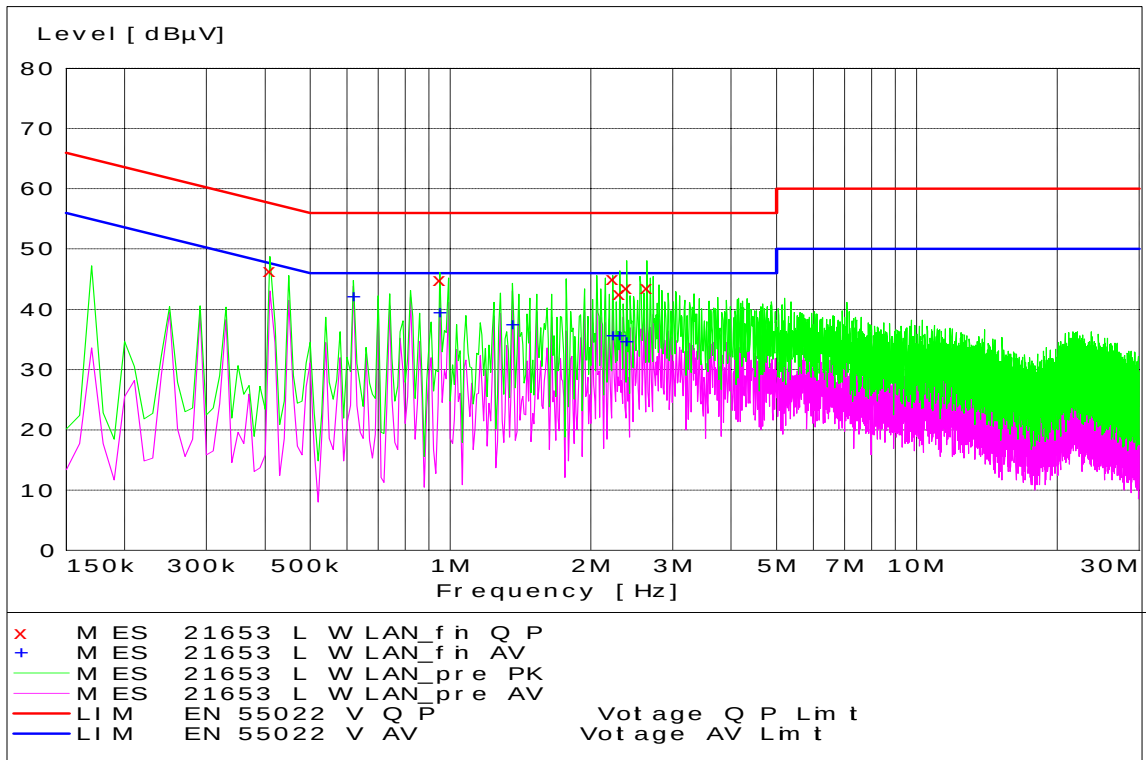


WLAN Channel 6 - Tx Mode - Line Coupling

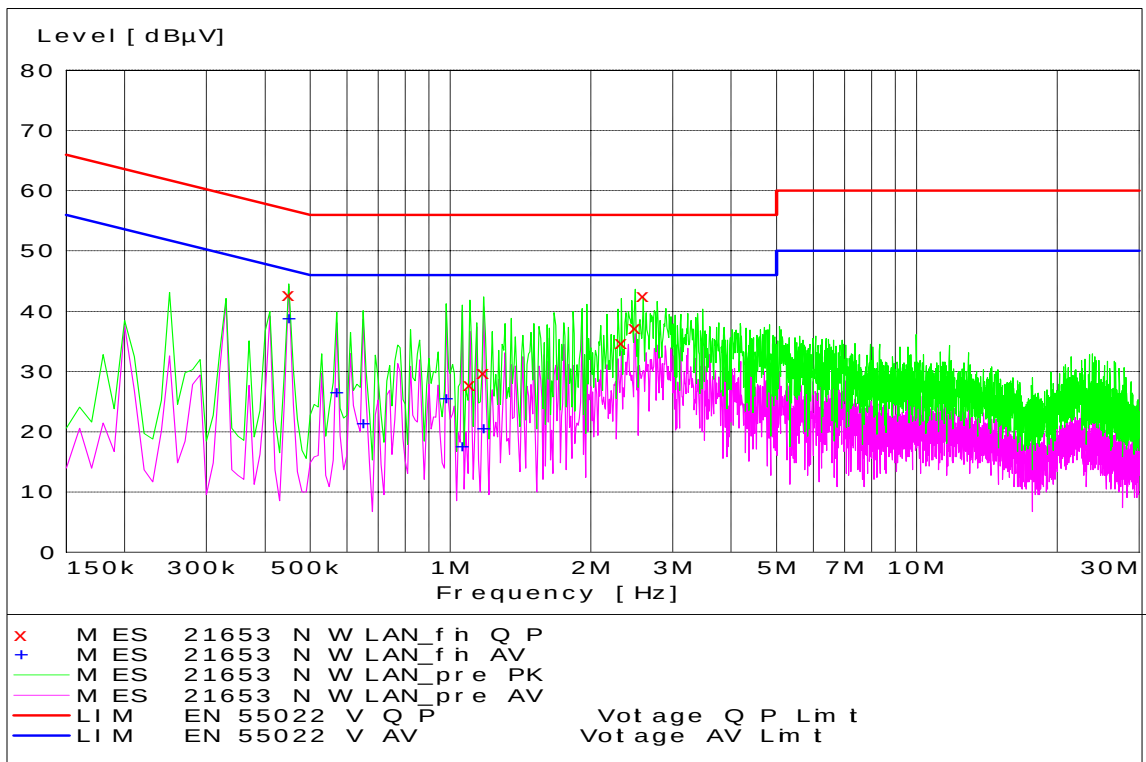

WLAN Channel 6 - Tx Mode - Neutral Coupling

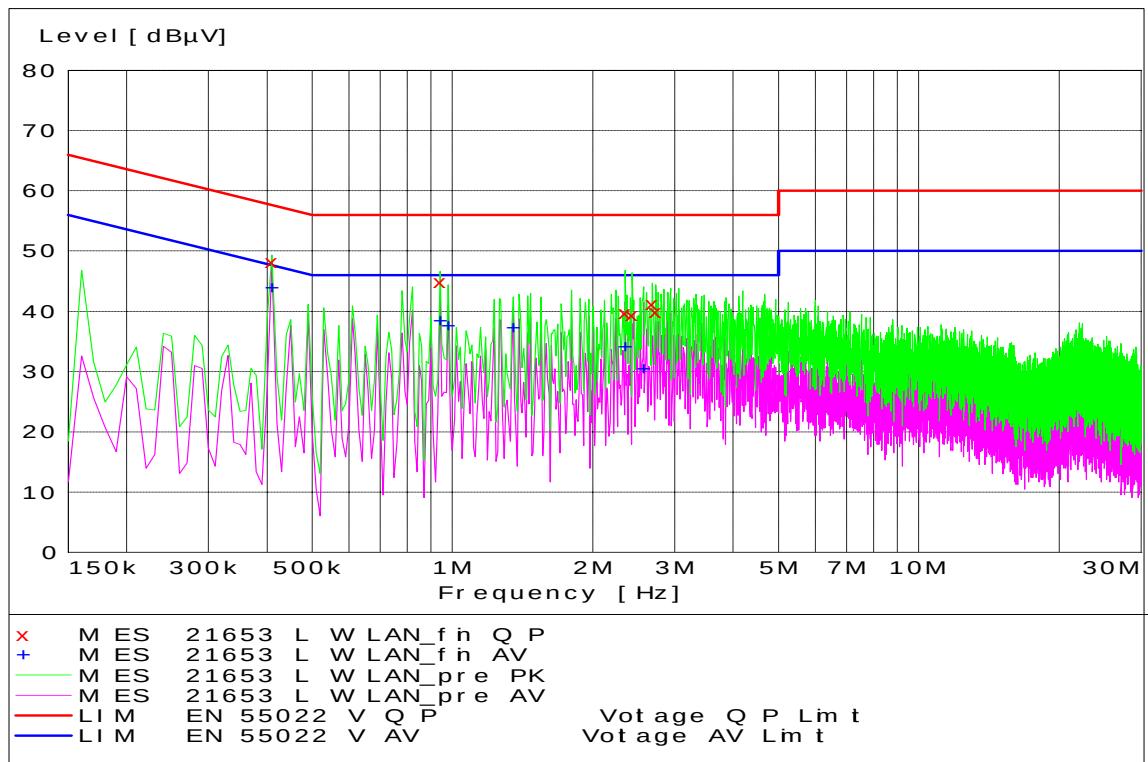


WLAN Channel 11 - Tx Mode - Line Coupling

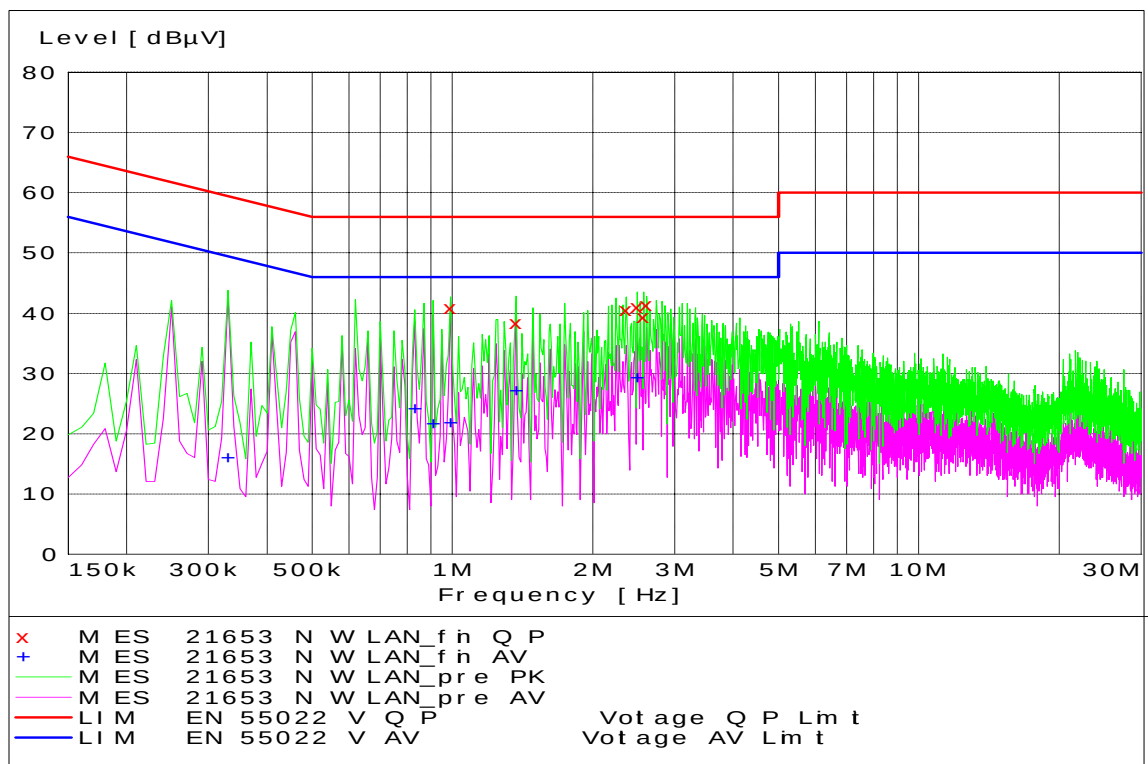


WLAN Channel 11 - Tx Mode - Neutral Coupling


802.11g @ 6Mbps

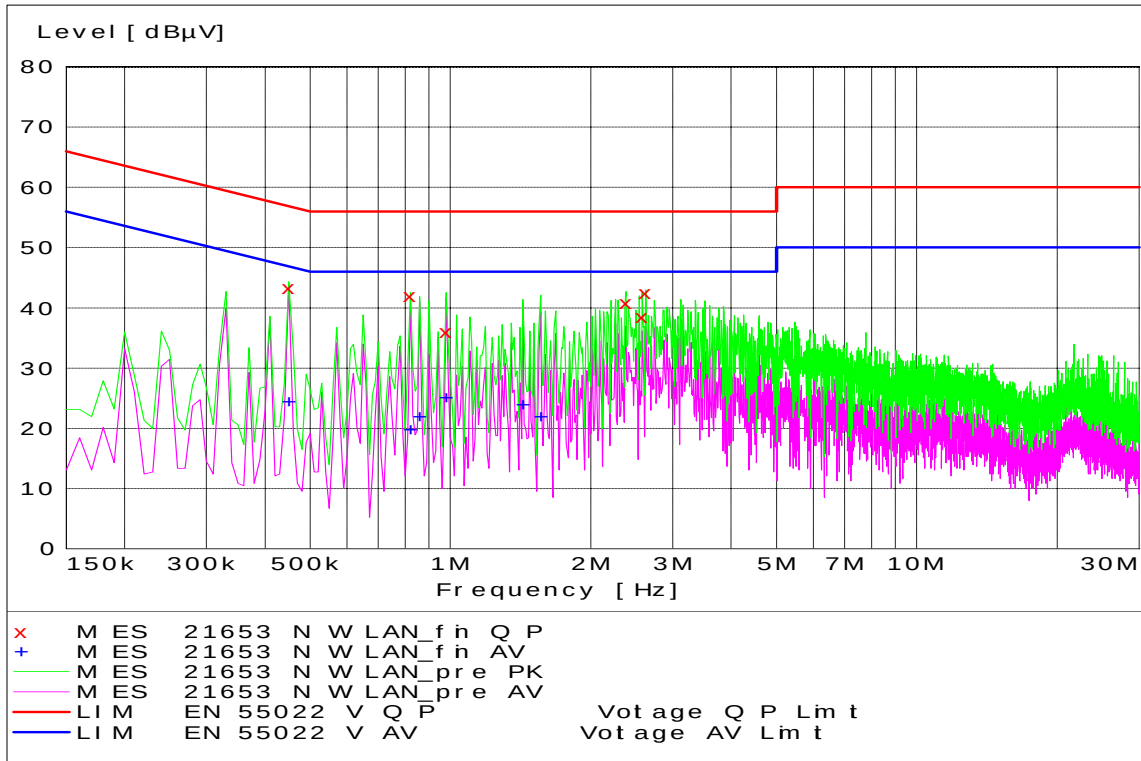


WLAN Channel 1 - Tx Mode - Neutral Coupling

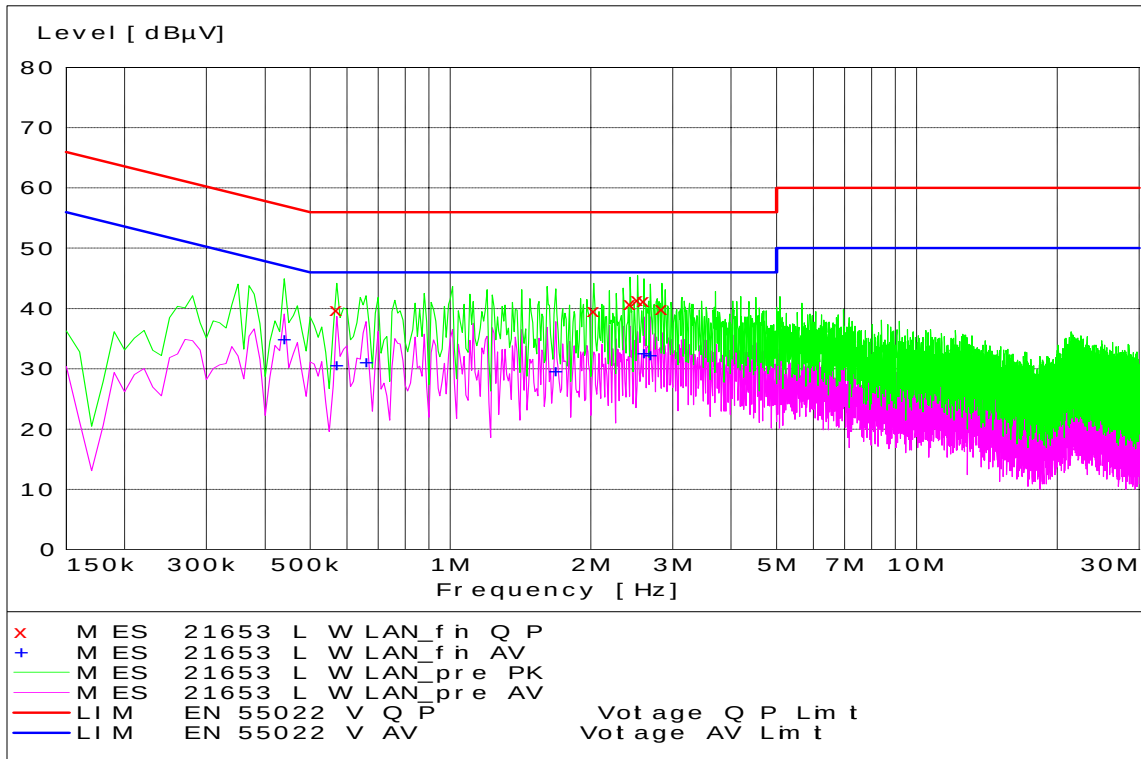


WLAN Channel 1 - Tx Mode – Line Coupling

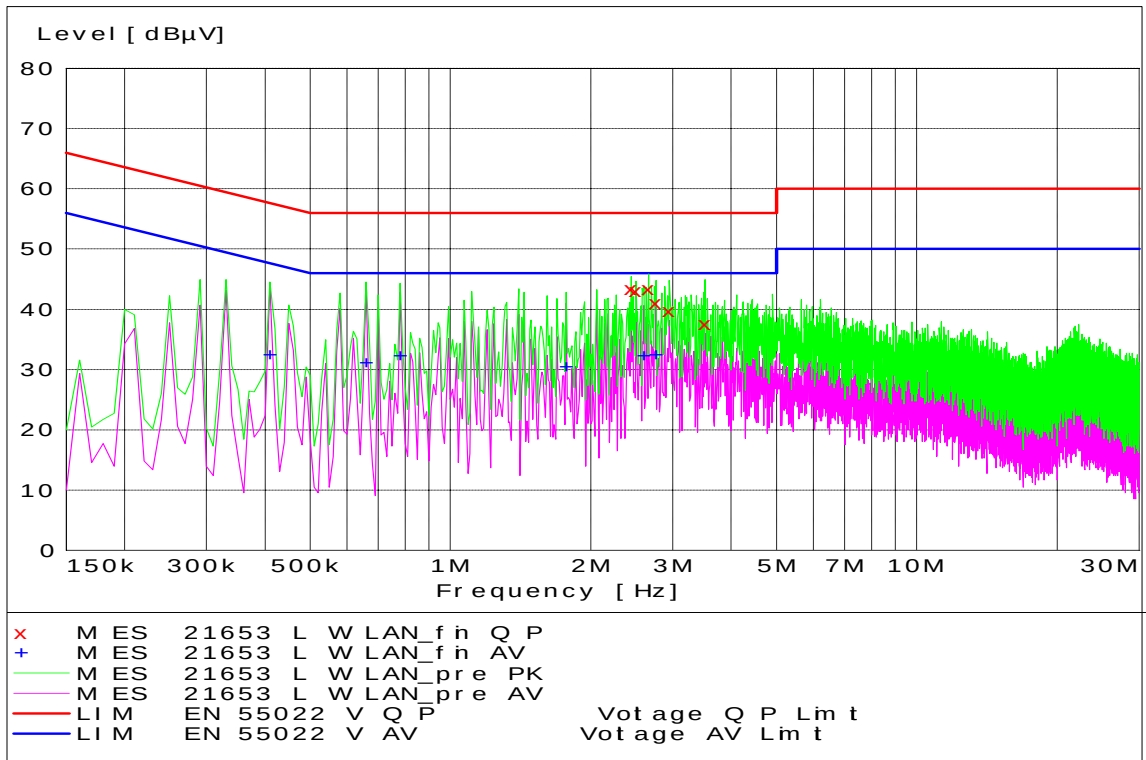


WLAN Channel 6 - Tx Mode - Line Coupling

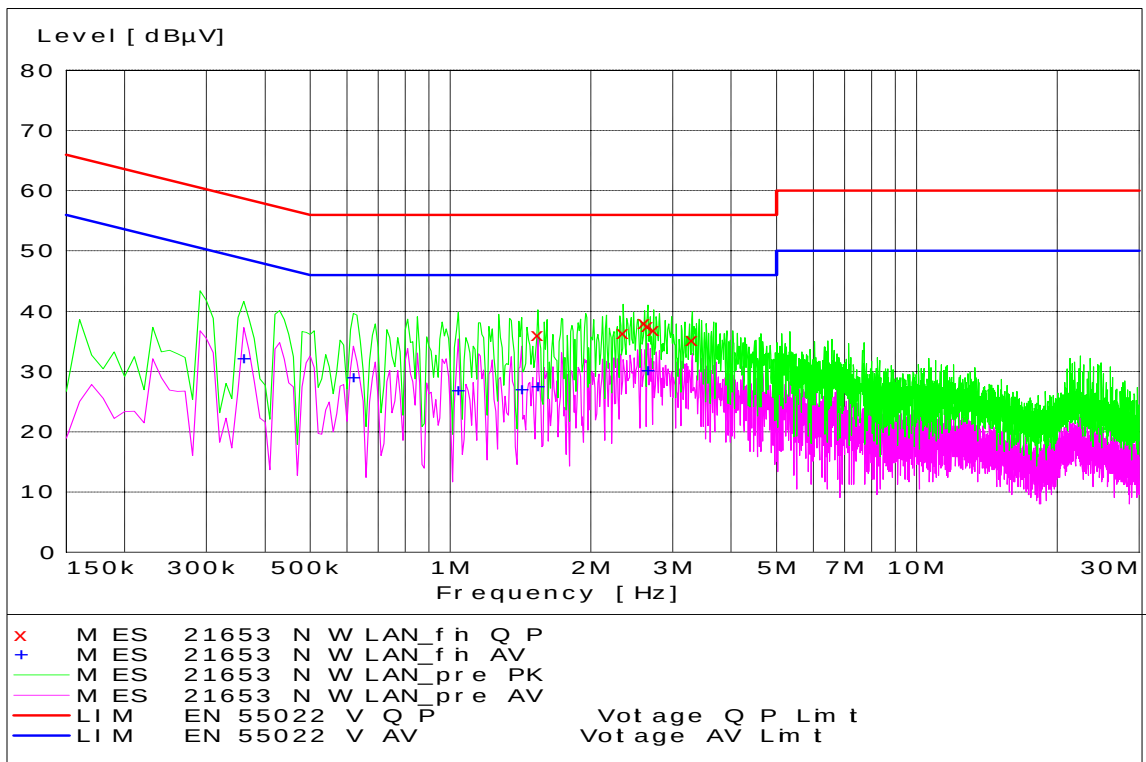

WLAN Channel 6 - Tx Mode - Neutral Coupling

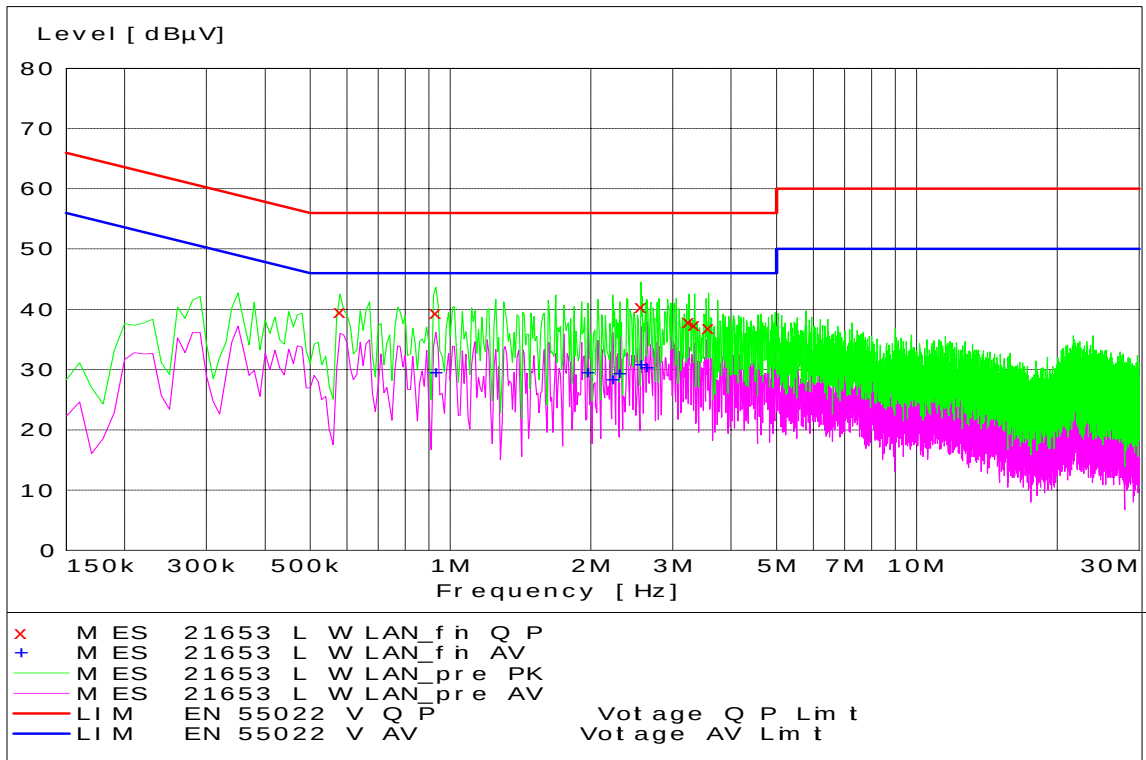

WLAN Channel 11 - Tx Mode - Line Coupling

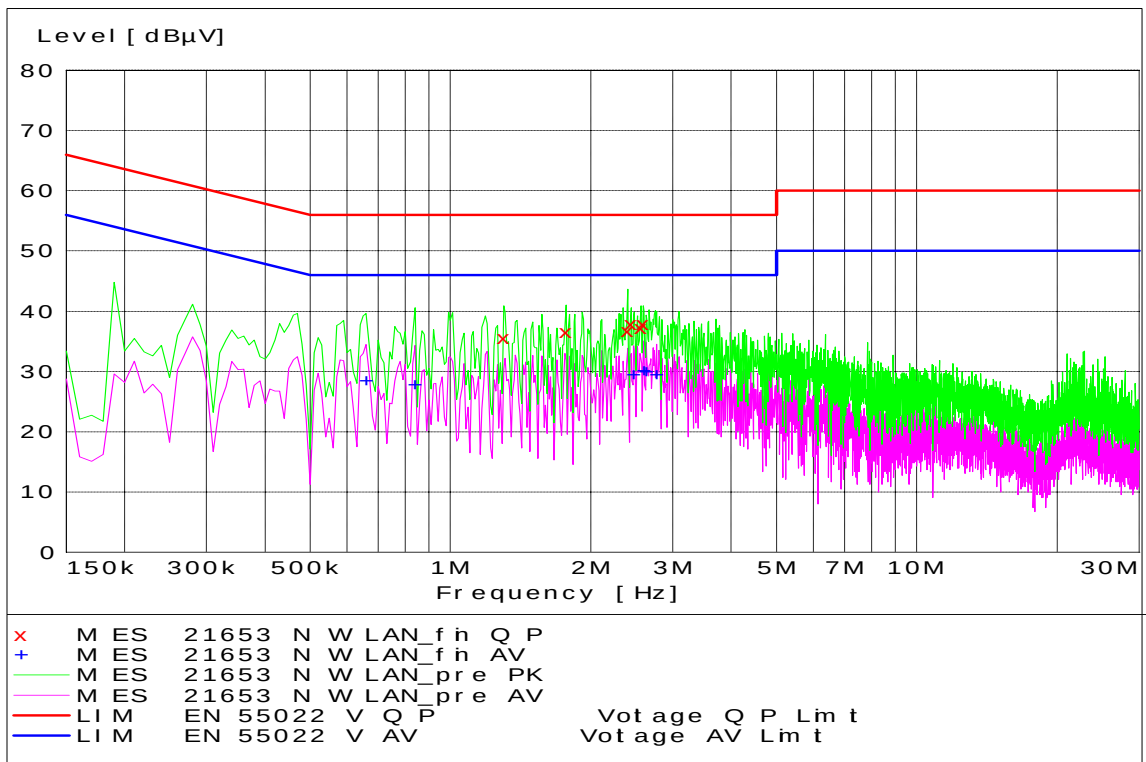

WLAN Channel 11 - Tx Mode - Neutral Coupling

End of Test Report