



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 22826-1 Supplement

Report Date – February 26, 2009

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature:

A handwritten signature in black ink, reading 'Albert J. Patapack'.

Name: Albert J. Patapack

Title: EMC Engineer

Date: February 26, 2009

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDb FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: 109O-1

Tests Requested By: Motorola Inc.
Mobile Devices business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 2100, GSM 900/1800/1900,
HSDPA 7.2 Mbps (Category 7/8), sGPS /aGPS ,
Bluetooth Class 1.5, Version 2.1+EDR

FCC ID : IHDT56KJ1

Serial Numbers: 356886010010470

Testing Complete Date: February 18, 2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 :

 X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003

Summary of Testing

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass
Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment List

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	2/28/2009
Rohde Schwarz	Receiver	ESI26	100001	6/03/2009
A.H. Systems	DRG Horn Antenna	SAS 200/571	365	12/23/2009
ETS	Log-Periodic Antenna	3148	1188	7/30/2009
ETS	Biconical Antenna	3110B	3370	7/29/2009
Attenuator	Weinschel	AS-6	6675	6/13/2009
Attenuator	Weinschel	AS-6	6677	6/17/2009
ETS	LISN	3810/2NM	00062907	12/10/2009
ETS	LISN	3810/2NM	00062912	12/10/2009
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service. All equipment is on a one-year calibration cycle.

The Dell M20 Laptop Computer, the Iomega Z250S Zip Drive and the Olympus D-600L Camera are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) - Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

Operating Mode – Rx Mode, Data Transfer Mode.

Note: Worst Case emissions reported.

30 MHz – 1000 MHz

Frequency MHz	Level dBμV/m	Measured dBμV	Transd dB	Cables dB	Limit dBμV/m	Margin dB	Height cm	Angle deg	Pol.
38.8	30.68	11.68	11	8.0	40	9.3	118	103	VERT
192.4	35.85	10.72	15.1	10.0	43.5	7.6	170	229	HORI
196.36	34.87	9.46	15.3	10.1	43.5	8.6	182	264	HORI
229.08	42.08	19.8	11.9	10.4	46	3.9	127	212	HORI
320.64	45.39	19.08	15.1	11.2	46	0.6	119	264	HORI
384.76	40.86	13.25	15.9	11.7	46	5.1	137	66	HORI
870.84	37.2	-0.46	23.2	14.4	46	8.8	332	36	HORI
907.76	38.3	-0.36	24.1	14.5	46	7.7	400	194	HORI

Above 1 GHz

Frequency MHz	Level dBμV/m	Measured dBμV	Transd dB	Gain dB	Limit dBμV/m	Margin dB	Height cm	Angle deg	Pol.
1064.0	38.82	32.42	23.6	17.2	54	15.2	150	339	VERT
1064.9	40.00	33.60	23.6	17.2	54	14	177	168	HORI
1065.5	40.3	33.90	23.6	17.2	54	13.7	220	324	VERT
1083.7	39.39	32.98	23.7	17.3	54	14.6	181	329	VERT
1106.6	38.62	32.18	23.7	17.3	54	15.4	335	98	VERT
1118.5	44.16	37.65	23.8	17.3	54	9.8	327	91	VERT
1122.5	43.00	36.47	23.8	17.3	54	11	179	335	VERT
1127.2	44.29	37.74	23.8	17.3	54	9.7	365	342	VERT
1130.3	44.80	38.23	23.8	17.2	54	9.2	365	336	VERT
1484.1	38.45	30.43	24.9	16.9	54	15.5	384	297	HORI
1512.2	38.87	30.67	25.1	16.9	54	15.1	400	20	VERT
1698.0	39.83	30.01	26.3	16.5	54	14.2	185	258	VERT
1969.6	41.60	28.89	28.6	15.9	54	12.4	125	32	HORI

Peak Radiated Data for Emissions Above 1GHz

Frequency MHz	Level dB μ V/m	Angle deg	Height cm	Pol.
1062.12	55.92	317	200	VER
1064.13	56.13	185	200	HOR
1066.13	56.06	321	200	VER
1082.16	55.17	321	200	VER
1084.17	52.27	327	200	VER
1106.21	51.68	250	100	VER
1108.22	54.72	83	300	VER
1118.24	55.66	82	300	VER
1120.24	54.63	339	400	VER
1122.24	55.79	335	200	VER
1124.25	54.09	93	300	VER
1126.25	55.93	342	400	VER
1128.26	55.22	95	300	VER
1130.26	57.12	339	400	VER
1132.26	52.31	93	100	VER
1482.97	50.78	36	100	VER
1484.97	54.80	290	400	HOR
1511.02	53.27	354	400	VER
1513.03	55.29	42	400	VER
1697.39	54.54	280	200	VER
1699.39	51.01	21	300	HOR
1967.94	54.41	28	100	HOR
1969.94	52.34	133	100	HOR

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors - Quasi Peak and Average Detector

Test Setup


The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

See attached:

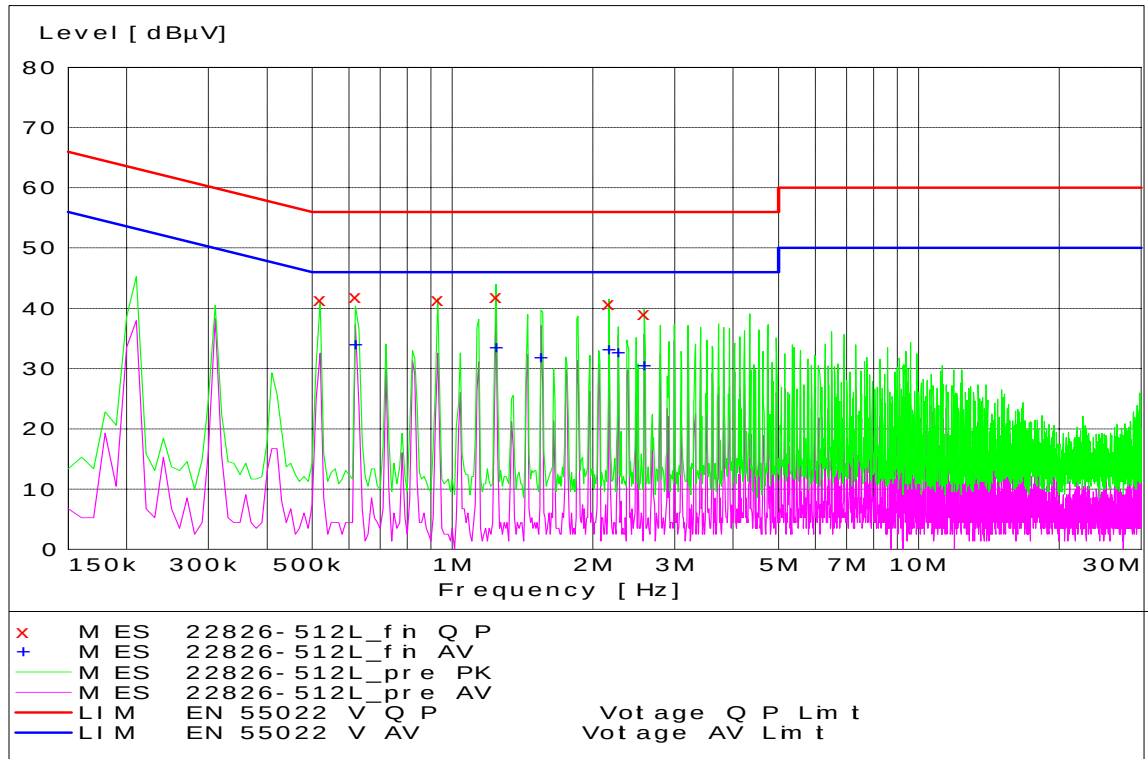

Pt 15 - Tx Mode - Line Coupling

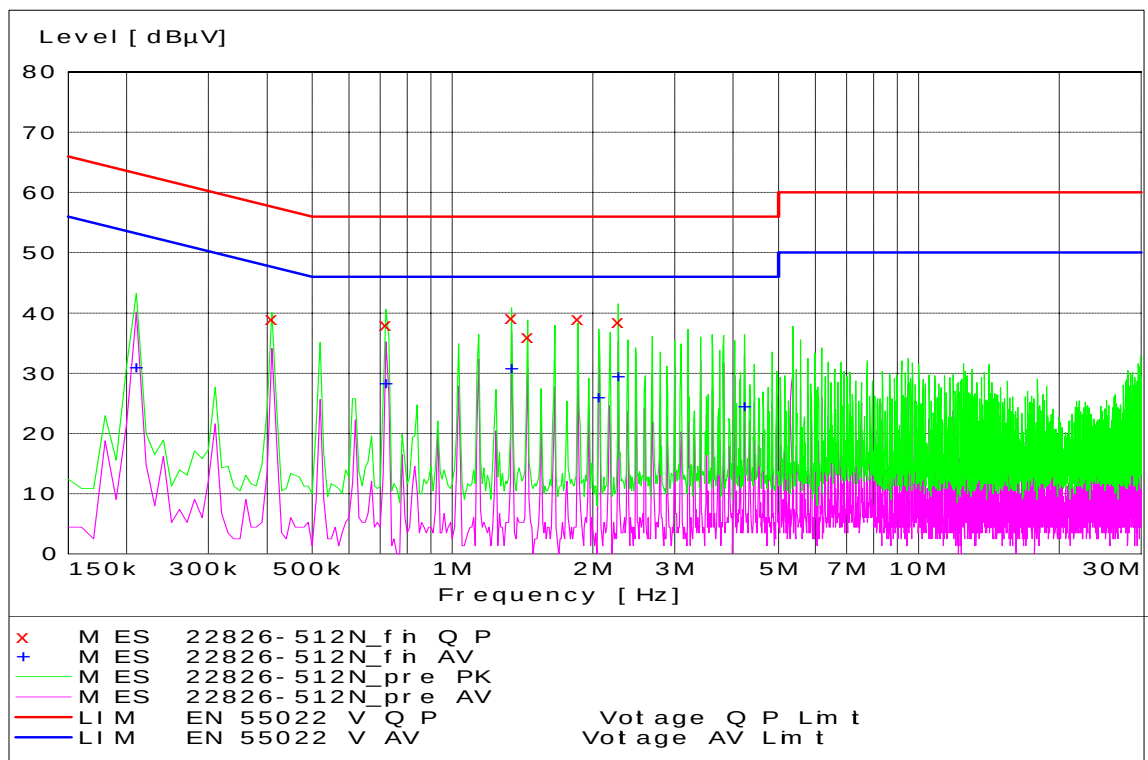

Pt 15 - Tx Mode - Neutral Coupling

End of Test Report