



**MOBILE DEVICES BUSINESS
PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 23305-1

Report Date – October 15, 2009

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: October 15, 2009

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Test Report Details..... 3

Applicable Standards..... 3

Summary of Testing..... 4

General and Special Conditions..... 4

Equipment and Cable Configurations 5

Measurement Procedures and Data 6

RF POWER OUTPUT..... 6

RADIATED POWER (EIRP AND ERP)8

OCCUPIED BANDWIDTH..... 10

SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 24

FIELD STRENGTH OF SPURIOUS EMISSIONS 31

FREQUENCY STABILITY..... 44

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDb FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: 109O-1

Tests Requested By: Motorola Inc.
Mobile Devices Business
600 North US Hwy 45
Libertyville, IL 60048

Product Type : Cellular Phone

Signaling Capability: GSM 850 & 1900, EDGE 850 & 1900, WCDMA 850 & 1900, Bluetooth, WLAN

FCC ID: IHDT56KV2

Serial Numbers: 356689030000178, 356689030000095,
356689030000079

Testing Complete Date: October 15, 2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 2
- Part 22 Subpart H - Public Mobile Services
- Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
4	Occupied Bandwidth	See Plots
5	Spurious Emissions at Antenna Terminal	See results
6	Field Strength of Spurious Emissions	See results
7	Frequency Stability	See results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde & Schwarz	Receiver	ESIB40	100226	1/30/10
Rohde Schwarz	Receiver	ESI26	838786/010	5/01/10
Hewlett Packard	EMC Analyzer	E7405A	US40240219	4/24/10
Agilent	Spectrum Analyzer	N9020A	US46470586	12/10/09
Hewlett Packard	Signal Generator	83623B	3844A00935	4/24/11
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	04/29/10
A.H. Systems	DRG Horn Antenna	SAS 200/571	365	12/23/09
ETS	Log-Periodic Antenna	3148	1189	6/12/10
ETS	Biconical Antenna	3110B	3369	10/21/09
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
Thermotron	Environmental Chamber	S-4	31580	1/28/10
Agilent	Power Meter	E4416A	GB41293262	11/01/09
Agilent	Power Sensor	E9323A	MY44420845	12/13/09
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/10
Agilent	Power Meter	E4416A	GB41293260	1/21/2010
Agilent	Power Sensor	E9323A	US40412069	12/13/2009
ETS	LISN	3810/2NM	00062907	12/10/09
ETS	LISN	3810/2NM	00062912	12/10/09

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

Note that the Agilent power meter, power sensor and the preamplifier are on a two-year calibration cycle. All other equipments are on a one-year calibration cycle.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of an Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector.

Measurement Results

GSM 850

Frequency (MHz)	Power (dBm)
824.2	32.55
836.6	32.51
848.8	32.59

GSM 1900

Frequency (MHz)	Power (dBm)
1850.2	31.89
1880.0	31.50
1909.8	31.41

EDGE 850

Frequency (MHz)	Power (dBm)
824.2	27.53
836.6	27.48
848.8	27.41

EDGE 1900

Frequency (MHz)	Power (dBm)
1850.2	27.97
1880.0	28.00
1909.8	28.01

WCDMA Modes

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes				Conducted Power (dBm) for WCDMA – HSPA (HSUPA/HSDPA-Rel 6) Modes				
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
WCDMA 850	4132	23.90	23.87	23.92	21.90	21.07	20.84	23.99	23.97	23.98	24.01	24.05
	4180	23.81	23.86	23.74	21.92	20.90	20.90	23.85	23.98	23.95	24.02	24.00
	4233	23.82	23.80	23.80	21.81	20.98	20.82	23.91	23.85	23.91	23.81	23.91
WCDMA 1900	9262	23.93	24.04	23.51	22.23	21.30	21.31	24.17	24.05	24.16	24.03	24.20
	9400	23.93	23.93	23.85	22.00	21.25	20.93	24.74	23.98	24.07	23.98	24.10
	9538	23.88	23.55	23.04	21.73	20.82	20.64	23.73	23.72	23.75	23.56	23.58
WCDMA 2100	9612	23.91	23.82	23.91	22.19	21.10	21.07	23.84	23.96	24.02	24.00	24.00
	9750	23.84	23.75	23.85	22.10	21.06	20.94	23.79	23.93	23.94	23.96	23.96
	9888	23.95	23.87	24.04	22.28	21.33	21.12	24.02	24.10	24.08	24.14	24.12

All WCDMA testing was done in RMC mode.

RADIATED POWER (EIRP AND ERP)

Measurement Procedure

The phone was tested in a 16’ anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT’s radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber.

All measurements were made with the phone placed in a call using a mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a peak detector for all bands in the Spectrum Analyzers. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these

A peak detector was used for measurements in the GSM 850, Edge 850, WCDMA 850 & 1900 bands and an average detector was used in the GSM 1900 and EDGE 1900 bands.

Measurement Results

Band	EIRP dBm	ERP dBm
GSM 850	31.46	29.36
GSM 1900	32.61	30.51
EDGE 850	30.28	28.18
EDGE 1900	29.95	27.85
WCDMA 850	25.41	23.31
WCDMA 1900	29.49	27.39

OCCUPIED BANDWIDTH

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. For all testing the EUT was powered through the computer’s USB port.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Measurement Results


Attached

Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Lower Band Edge - EDGE 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - EDGE 850	1	Auto	2004	Max Hold	Peak	30
Lower Band Edge - EDGE 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - EDGE 1900	1	Auto	2004	Max Hold	Peak	30


- Notes: 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for ³ the resolution bandwidth.
 2) The plotted data shown for the band edge measurements is representative of data taken with a true 3 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3 kHz resolution bandwidth filter.

Measurement Results – GSM 850


GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)

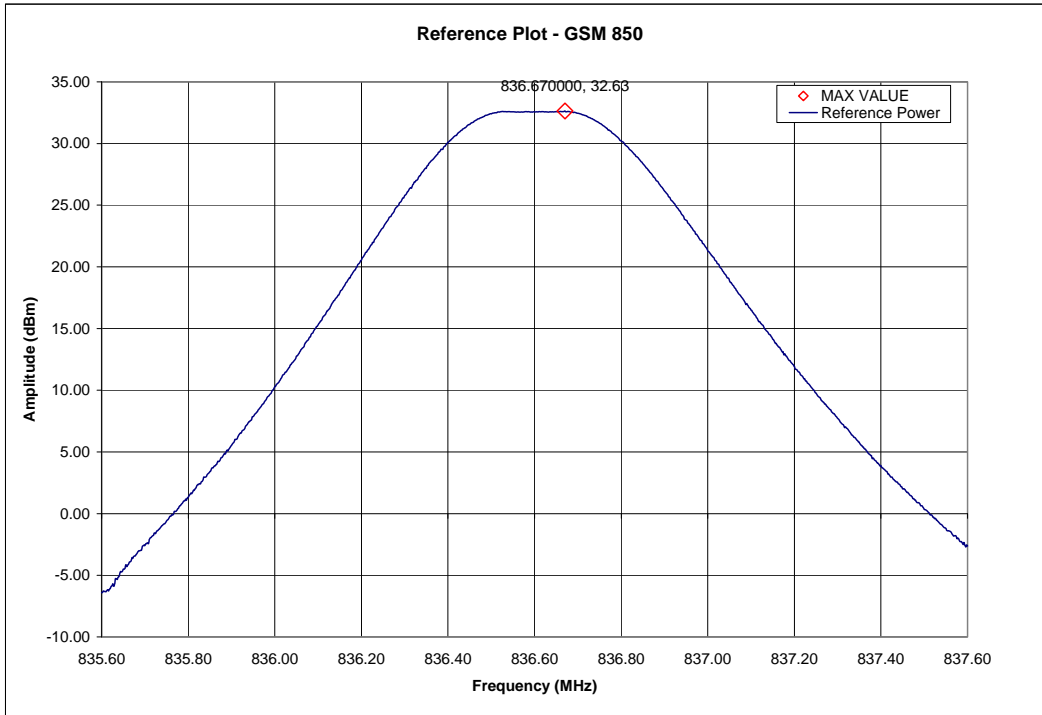


GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth

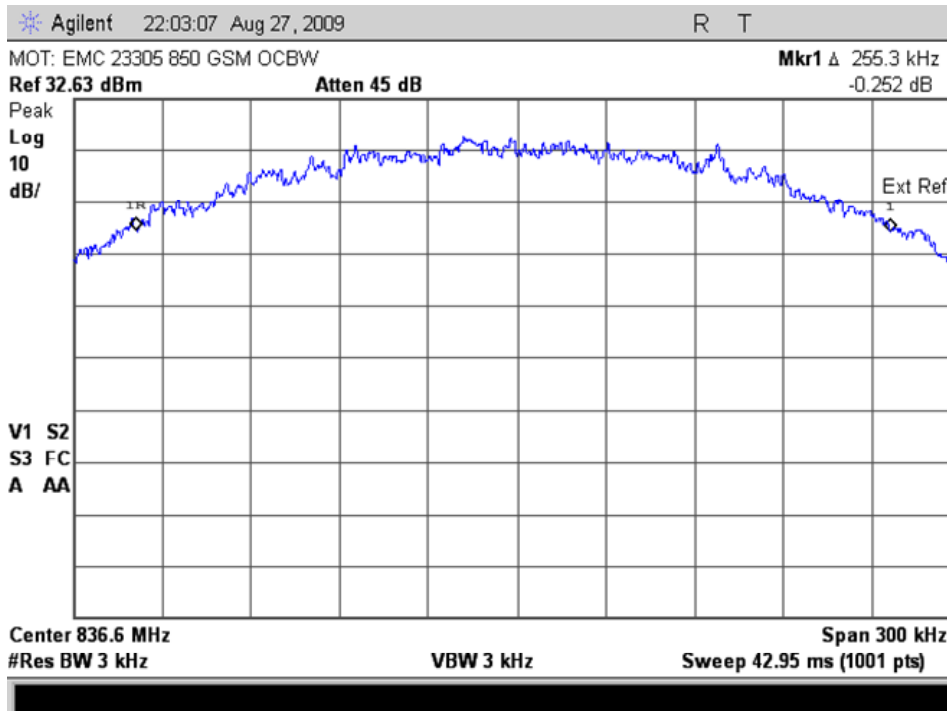


GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)

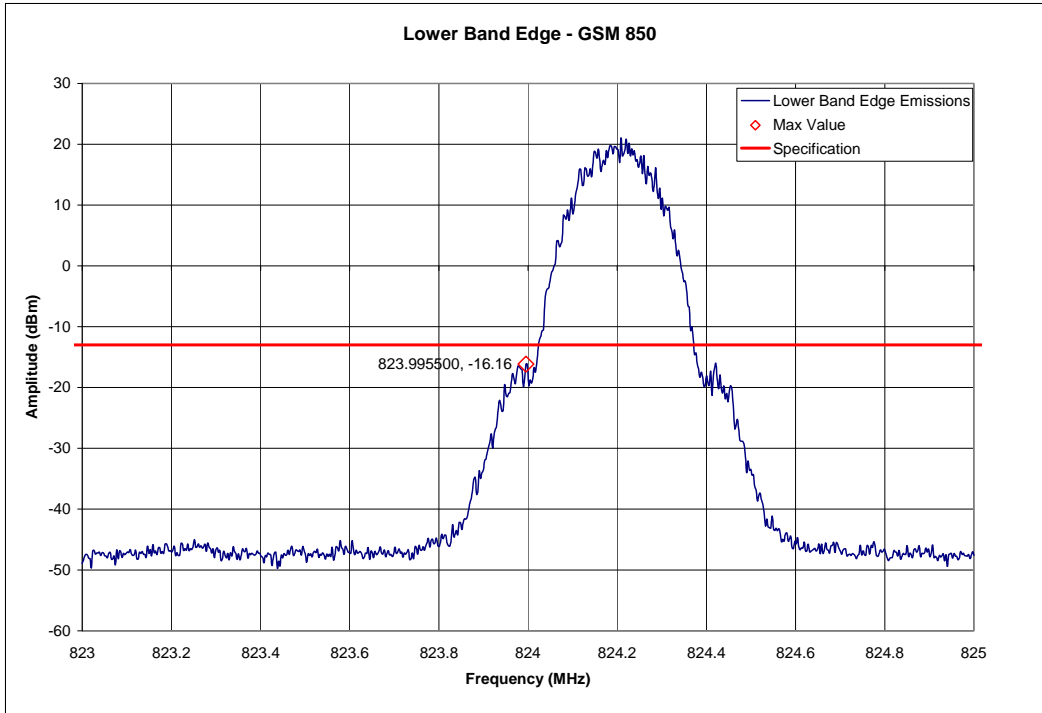


GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)

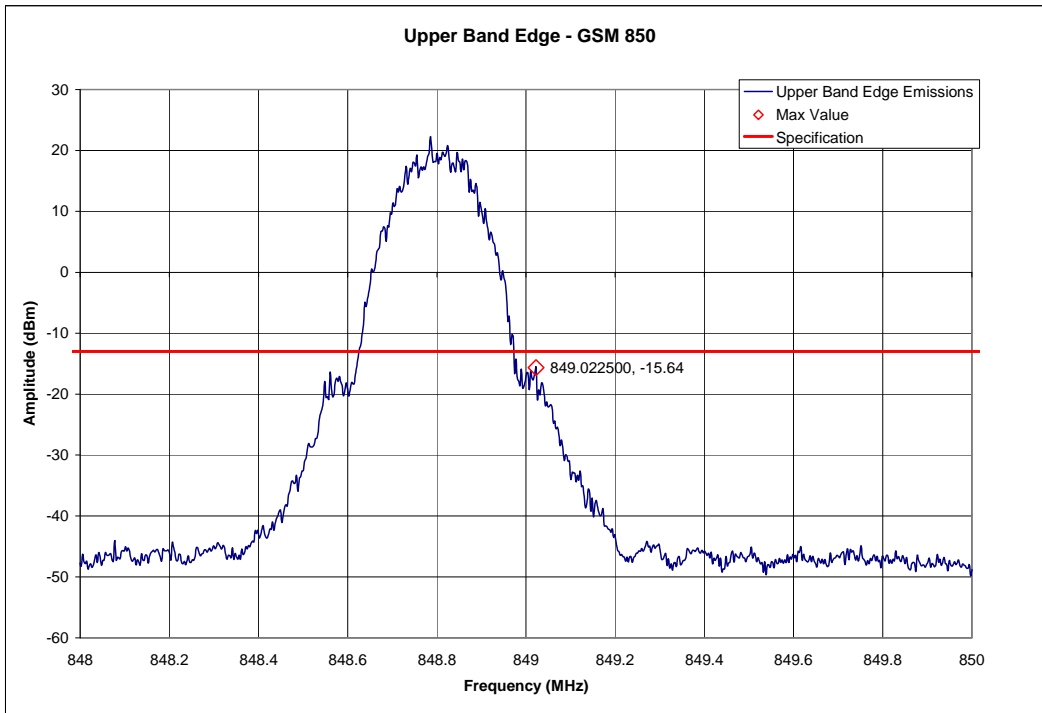

GSM 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)

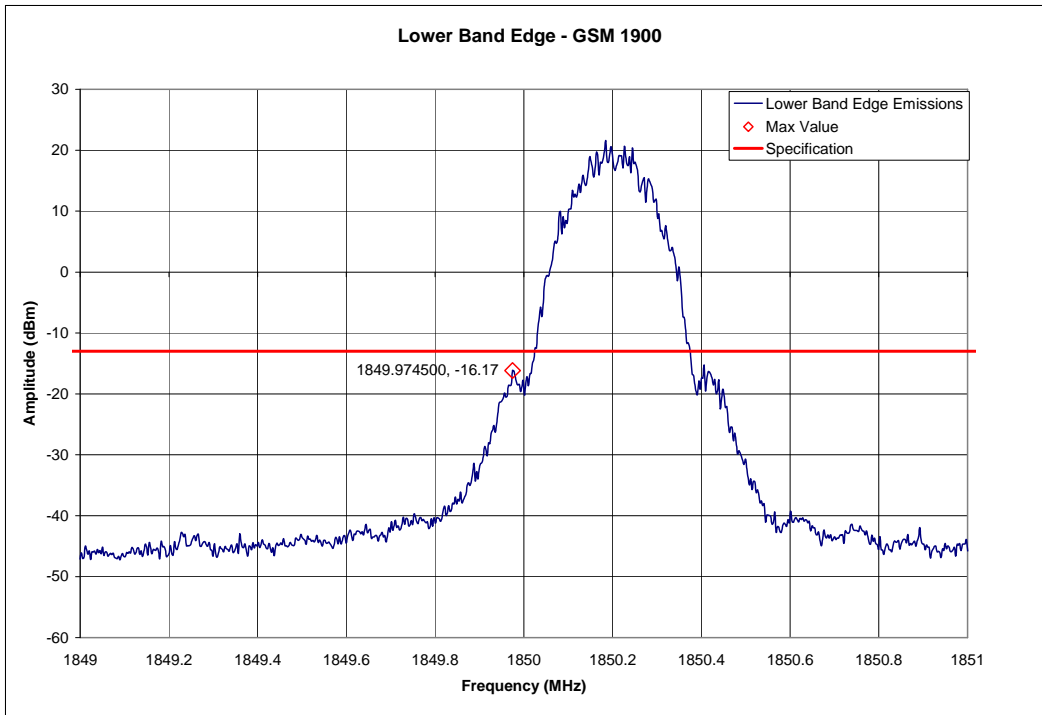


GSM 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)

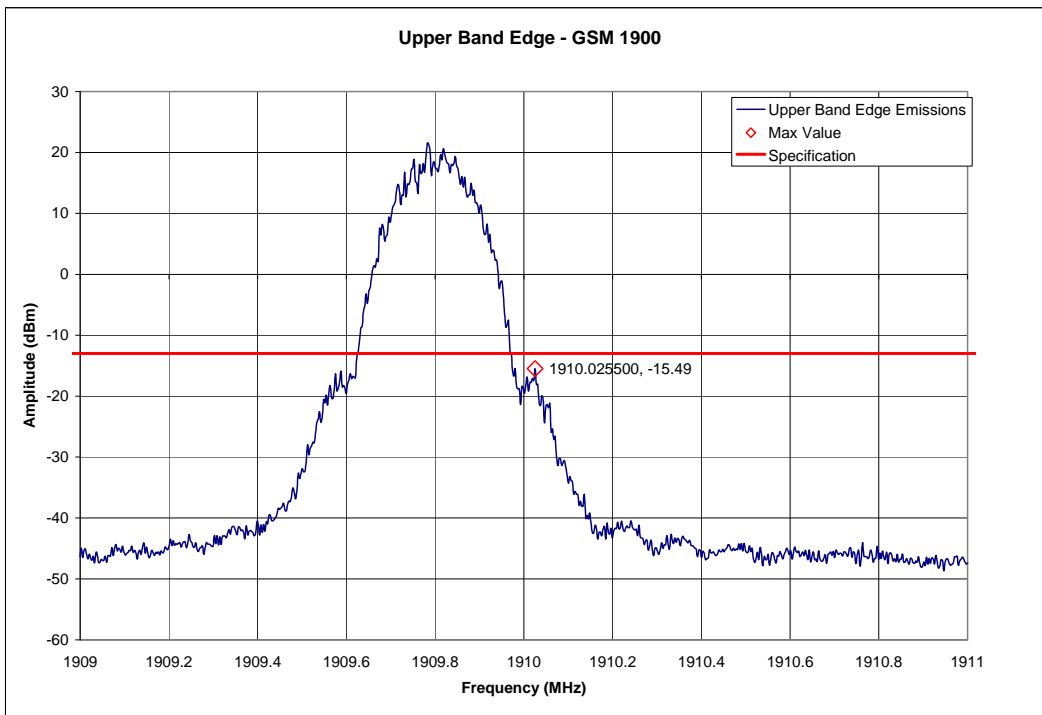


Measurement Results – EDGE 850


EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth

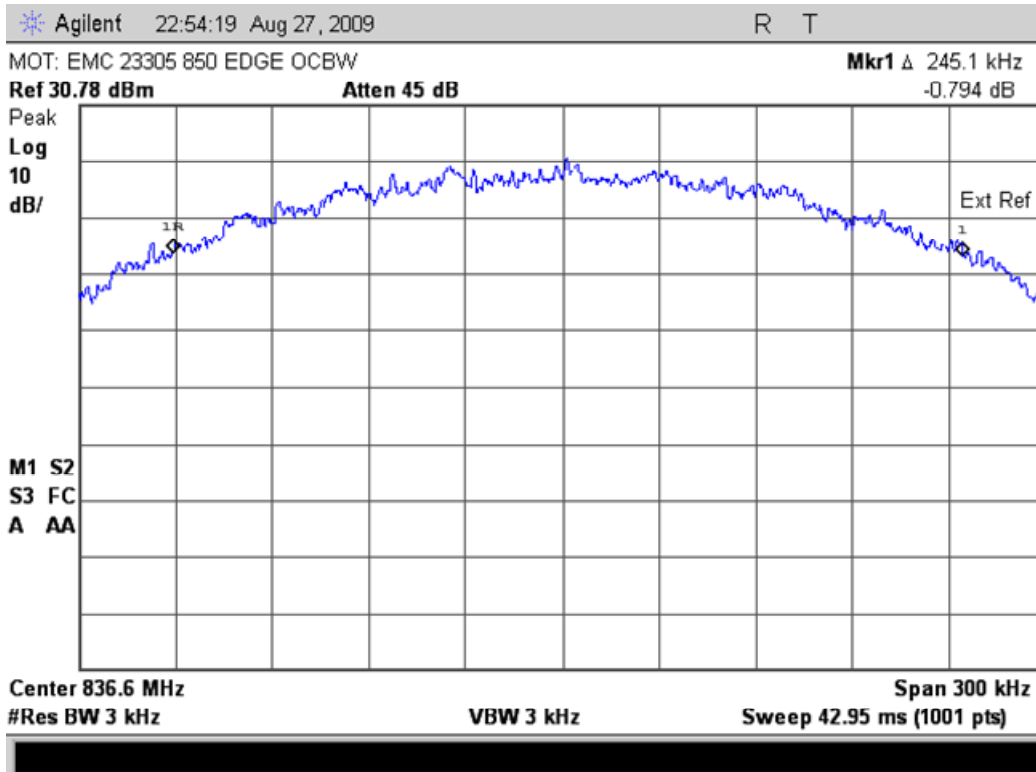

EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)

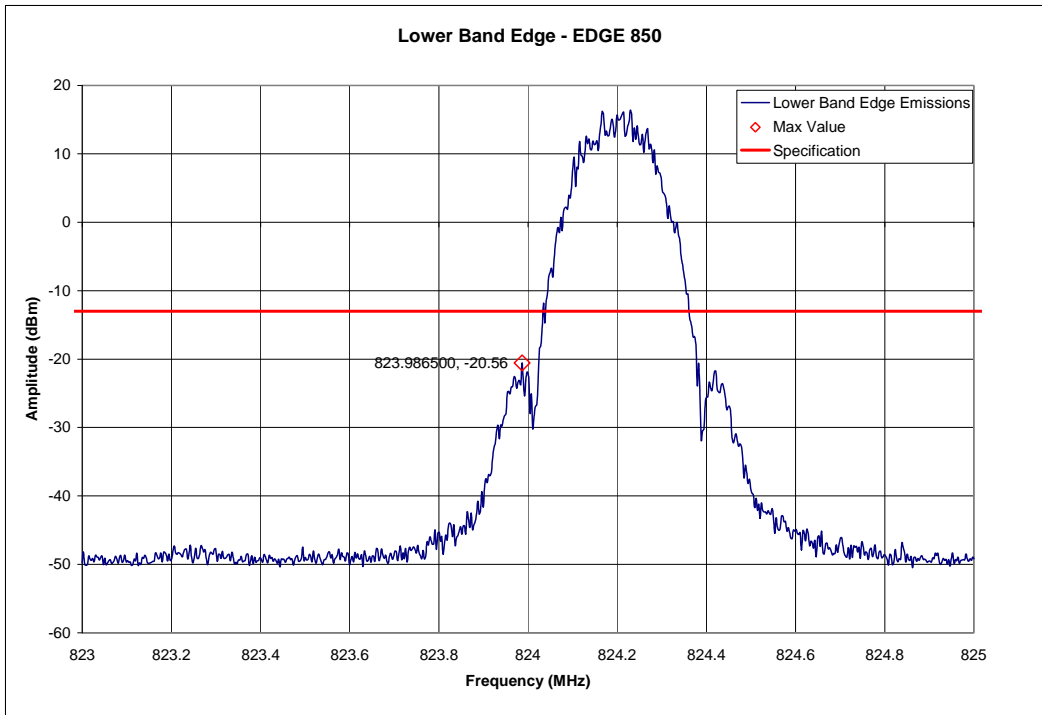


EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)

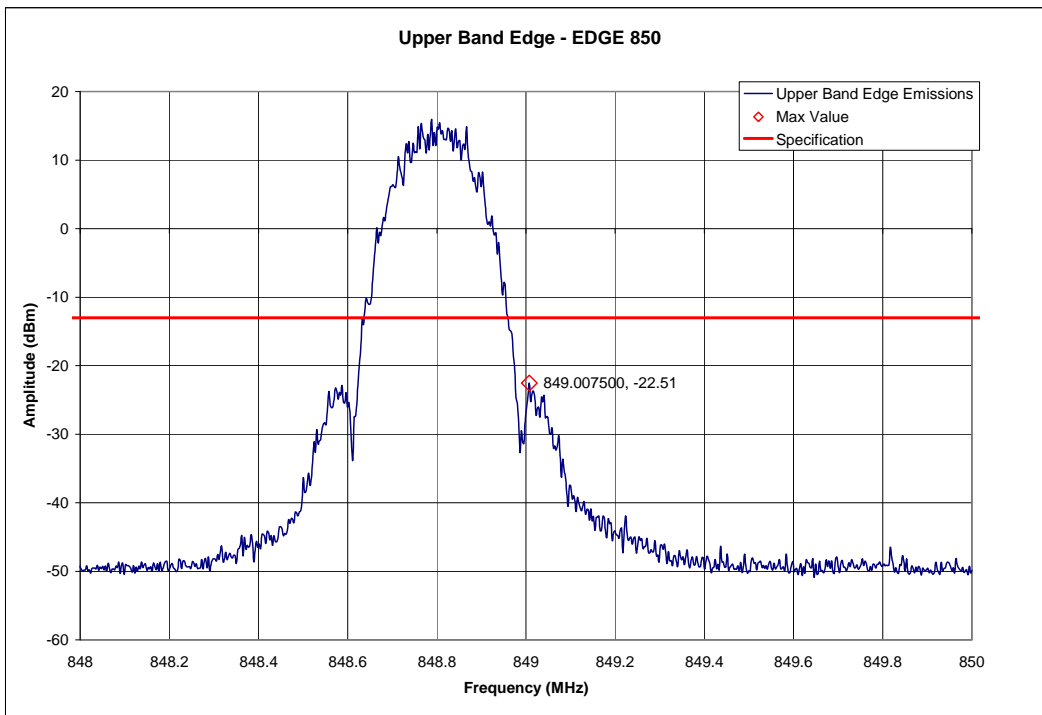


Measurement Results – EDGE 1900


EDGE 1900 – Channel 661 (1880.00 MHz) – Occupied Bandwidth

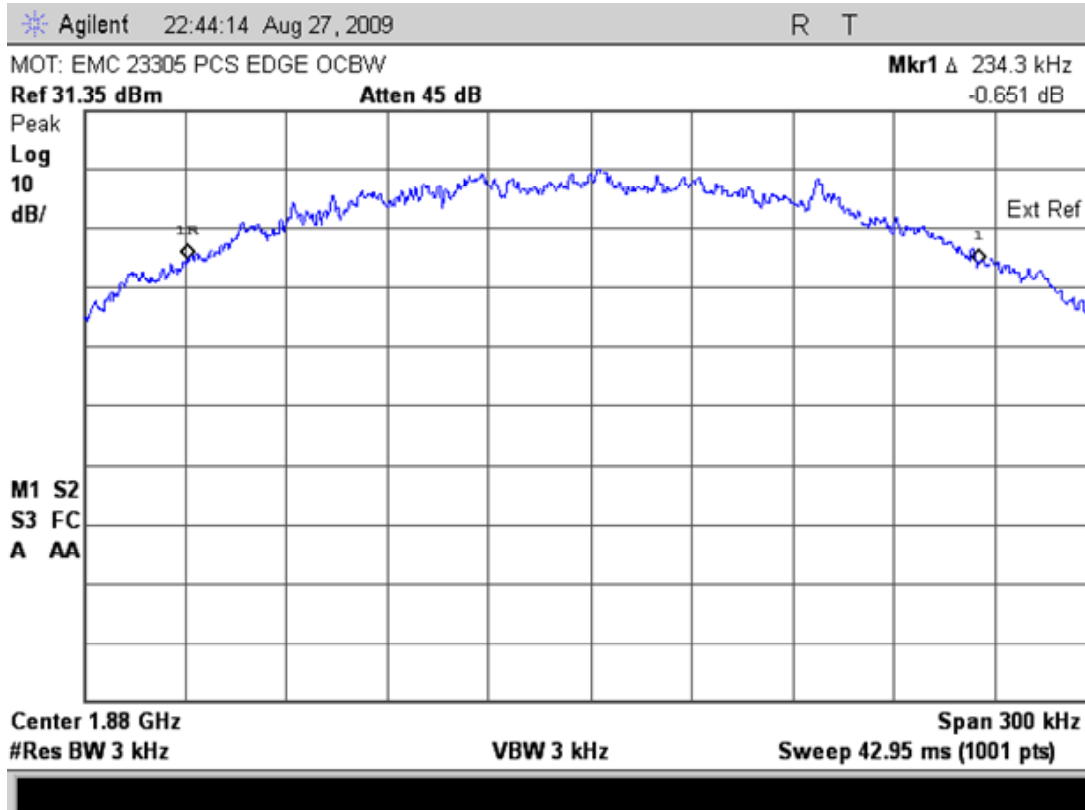

EDGE 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)

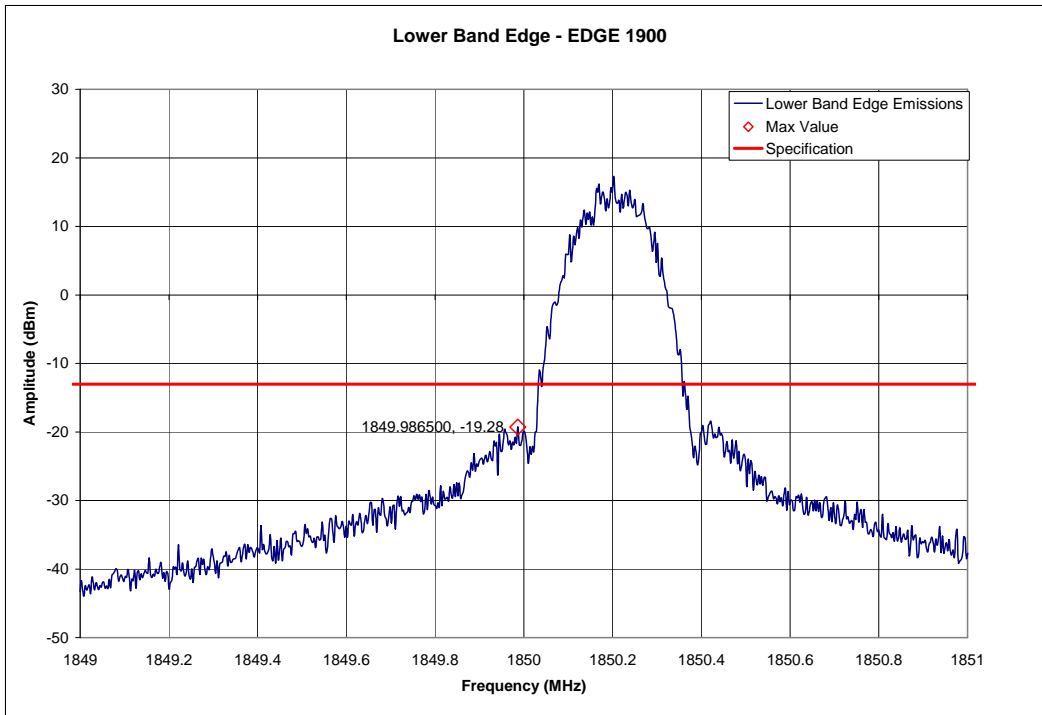


EDGE 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)

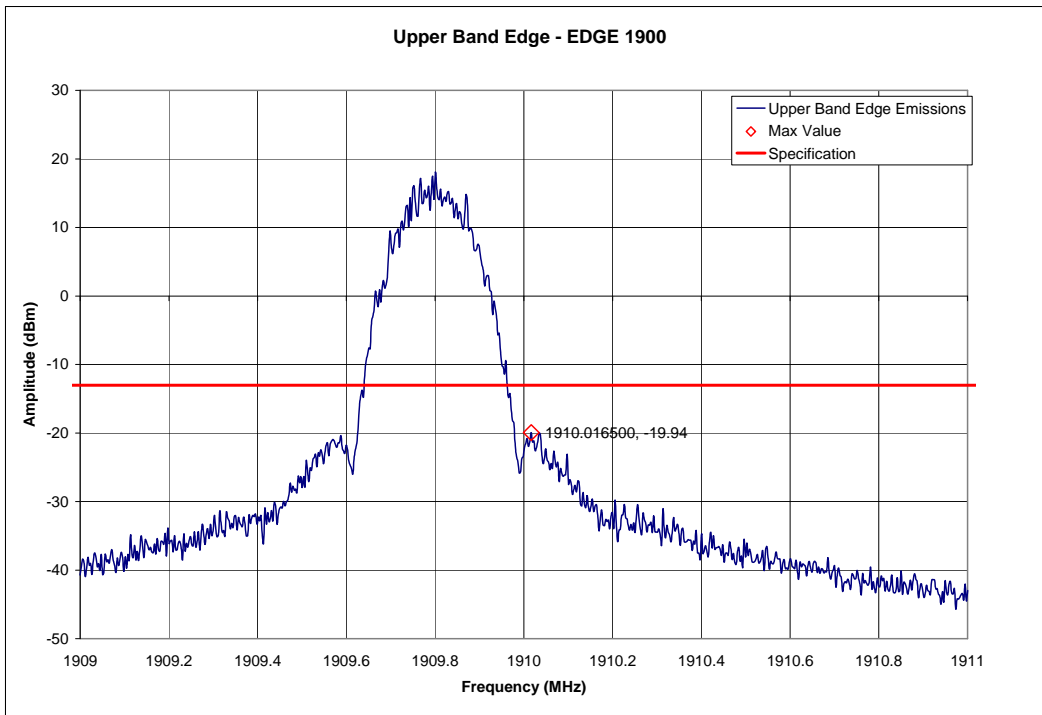


Measurement Results – WCDMA 850


WCDMA 850 – Reference Level Plot – Channel 4180 (836.00 MHz)

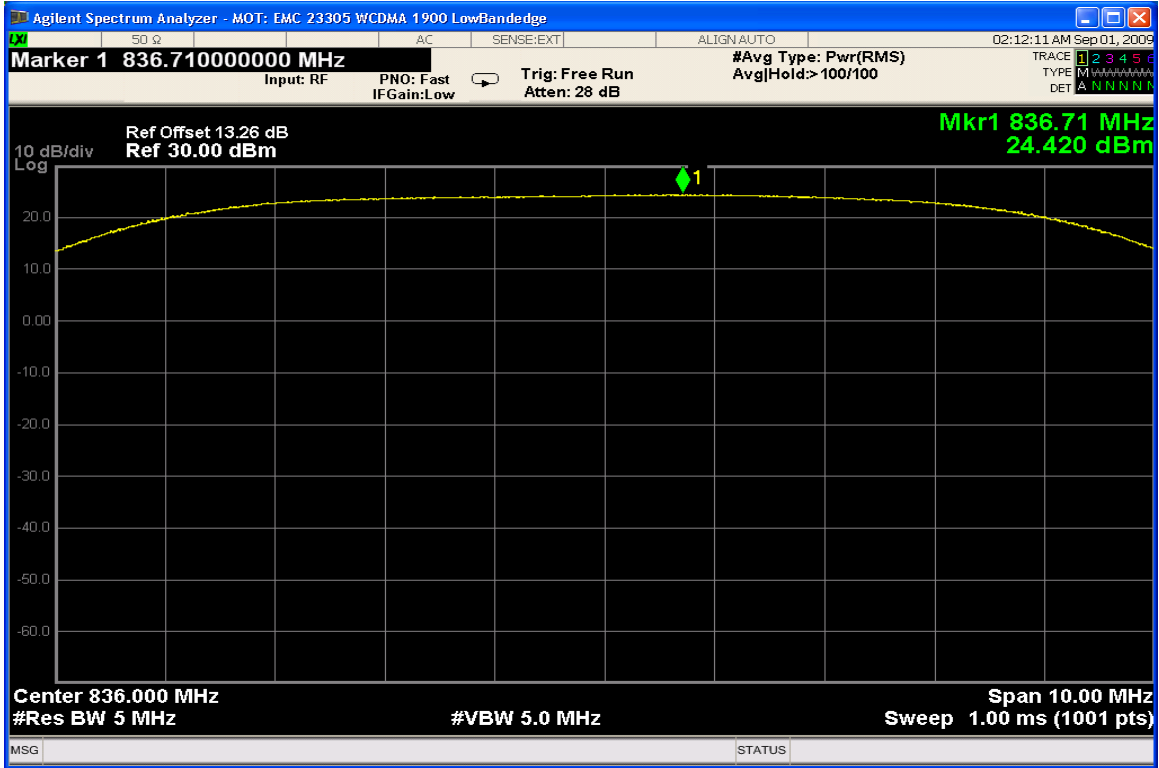

WCDMA 850 – Occupied Bandwidth – Channel 4180 (836.00 MHz)

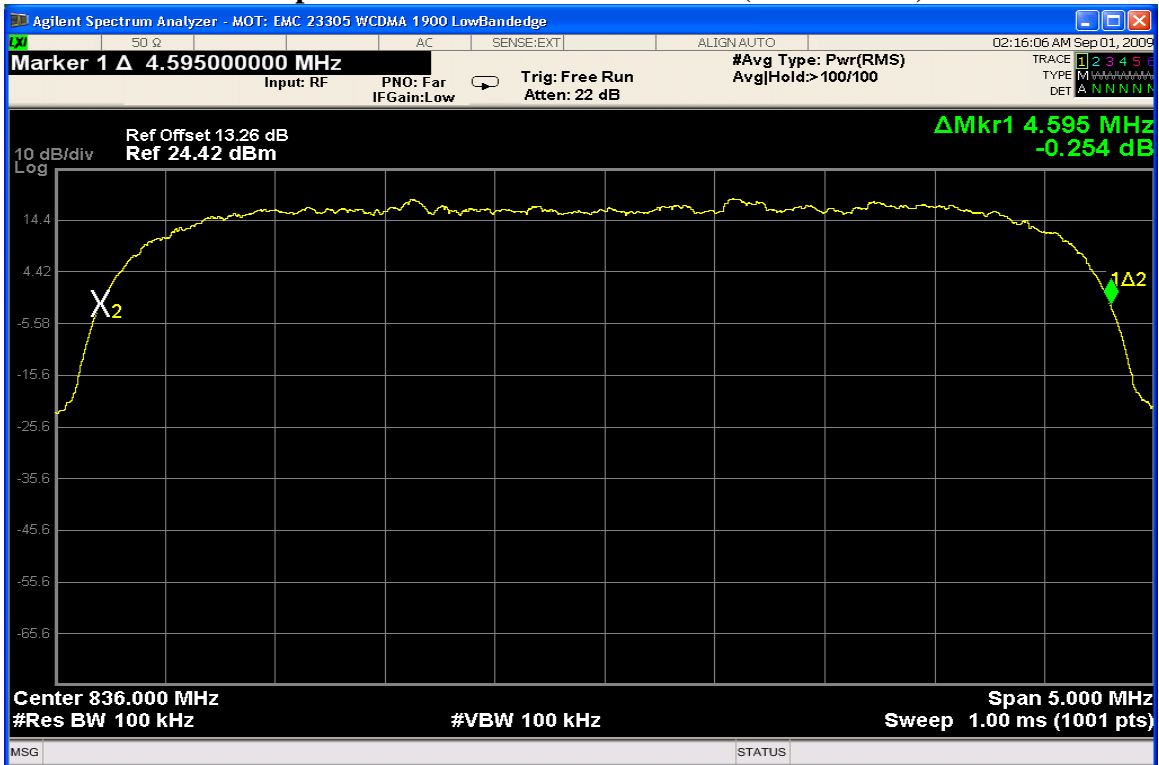

WCDMA 850 – Lower Band Edge – Channel 4132 (826.40 MHz)

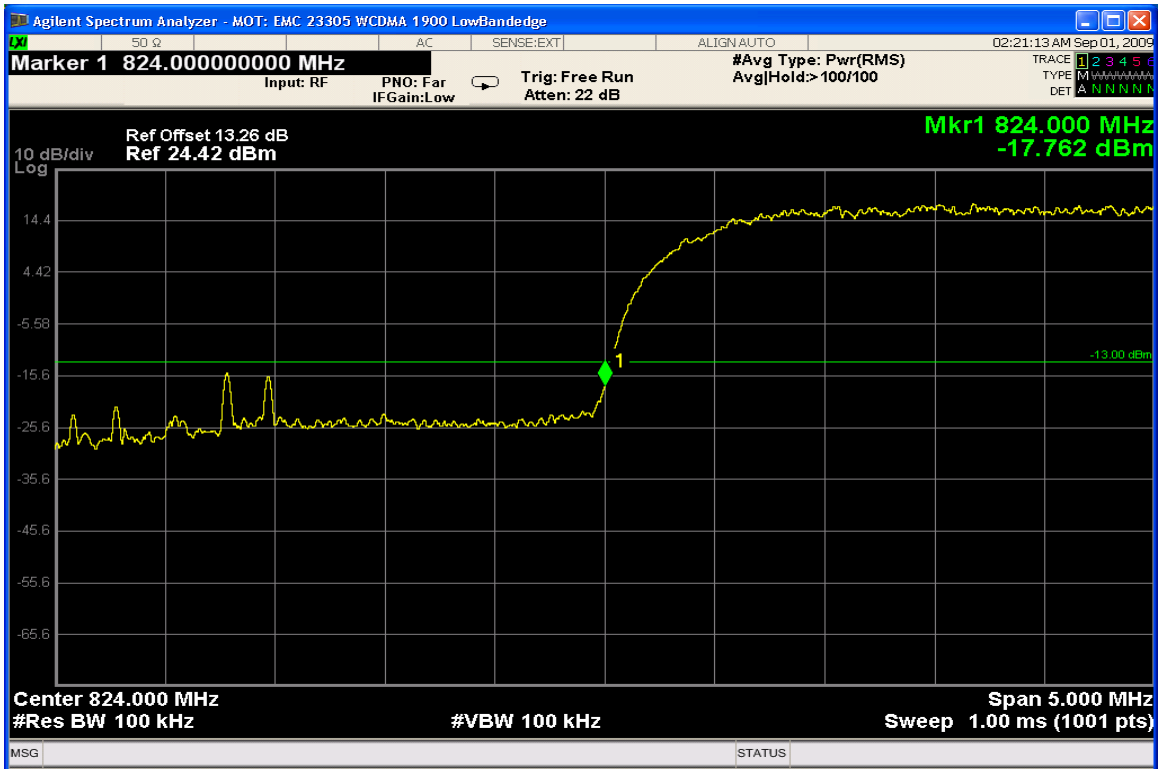


WCDMA 850 – Upper Band Edge – Channel 4233 (846.60 MHz)




Measurement Results – WCDMA 1900



WCDMA 1900 – Reference Level Plot – Channel 9400 (1880.00 MHz)

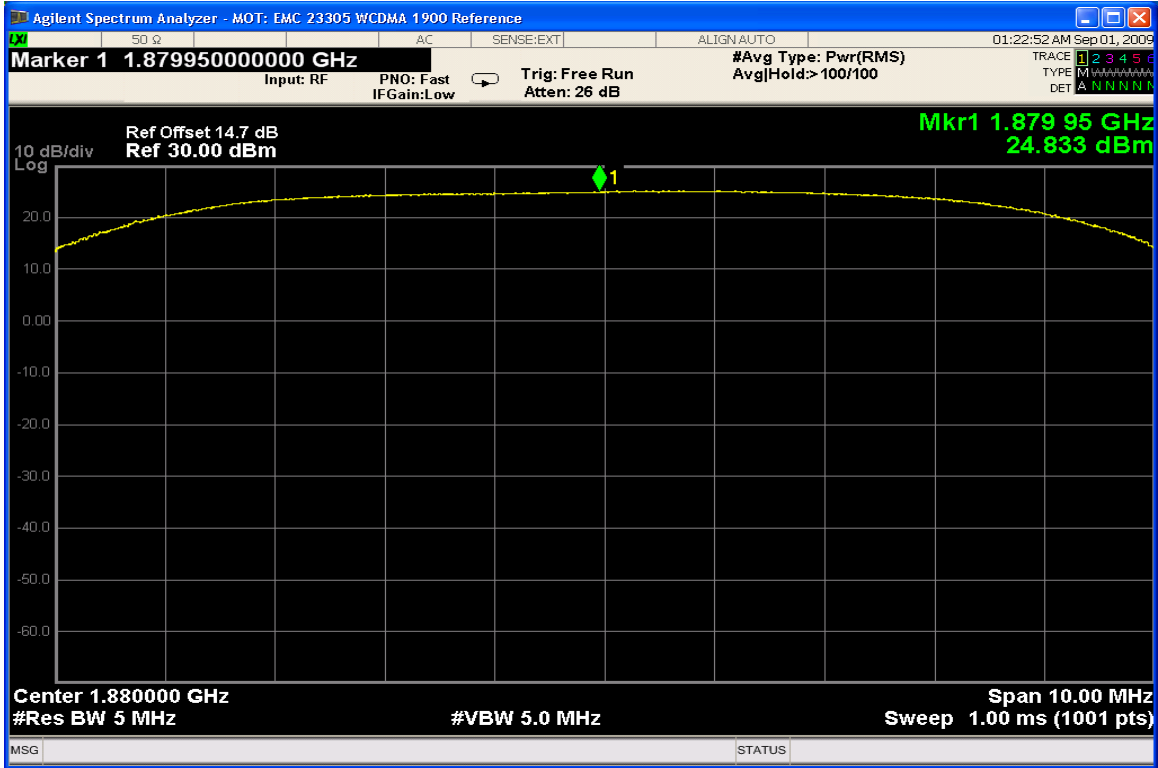


WCDMA 1900 – Occupied Bandwidth – Channel 9400 (1880.00 MHz)

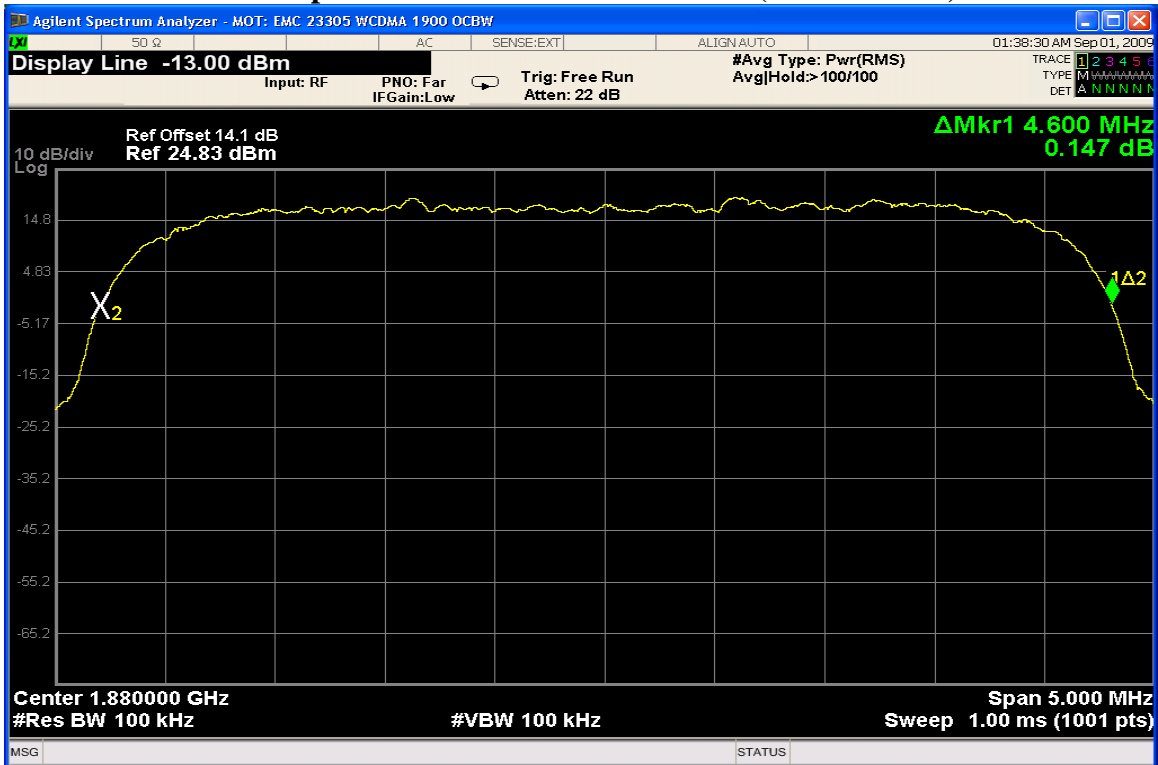

WCDMA 1900 – Lower Band Edge – Channel 9262 (1852.40 MHz)

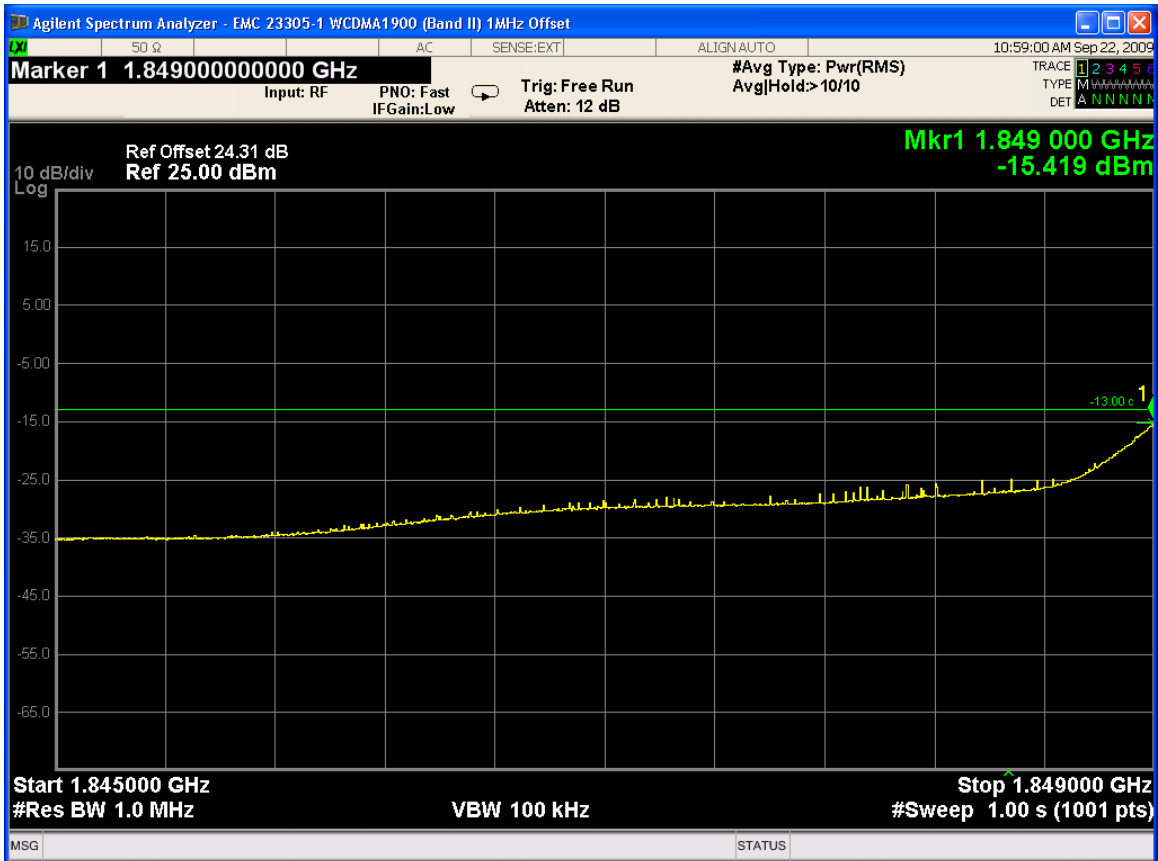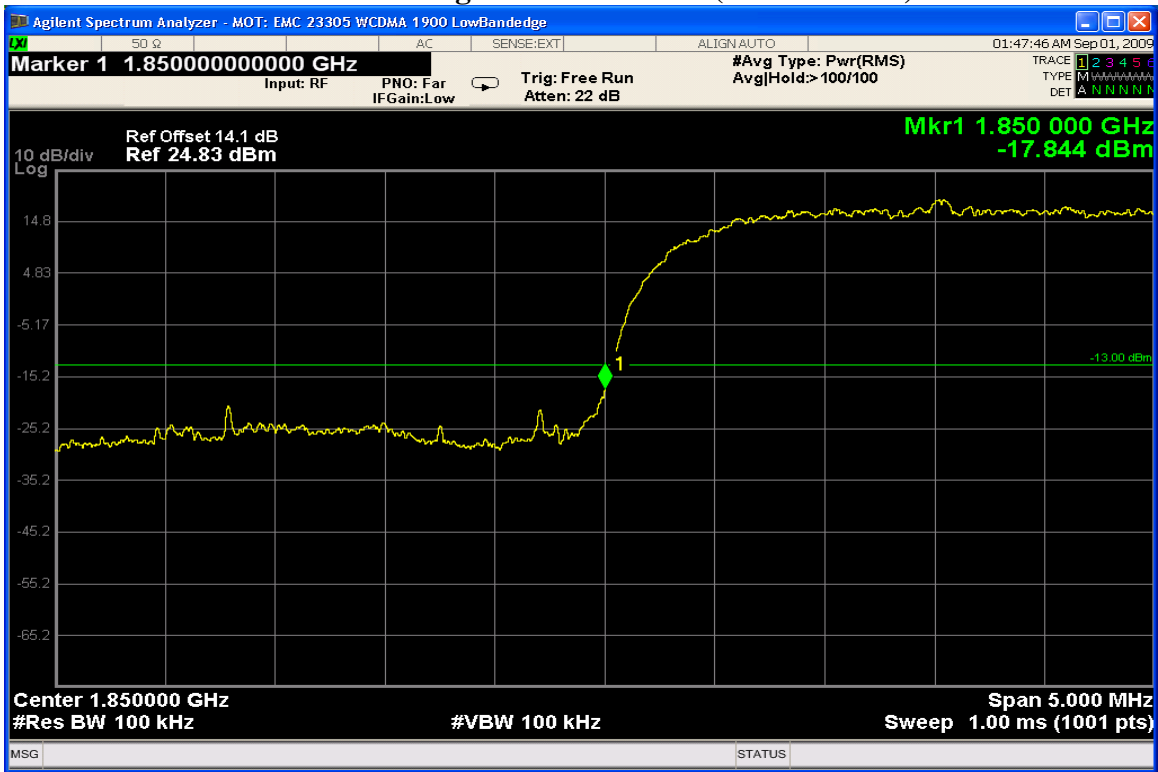

WCDMA 1900 – Upper Band Edge – Channel 9538 (1907.60 MHz)

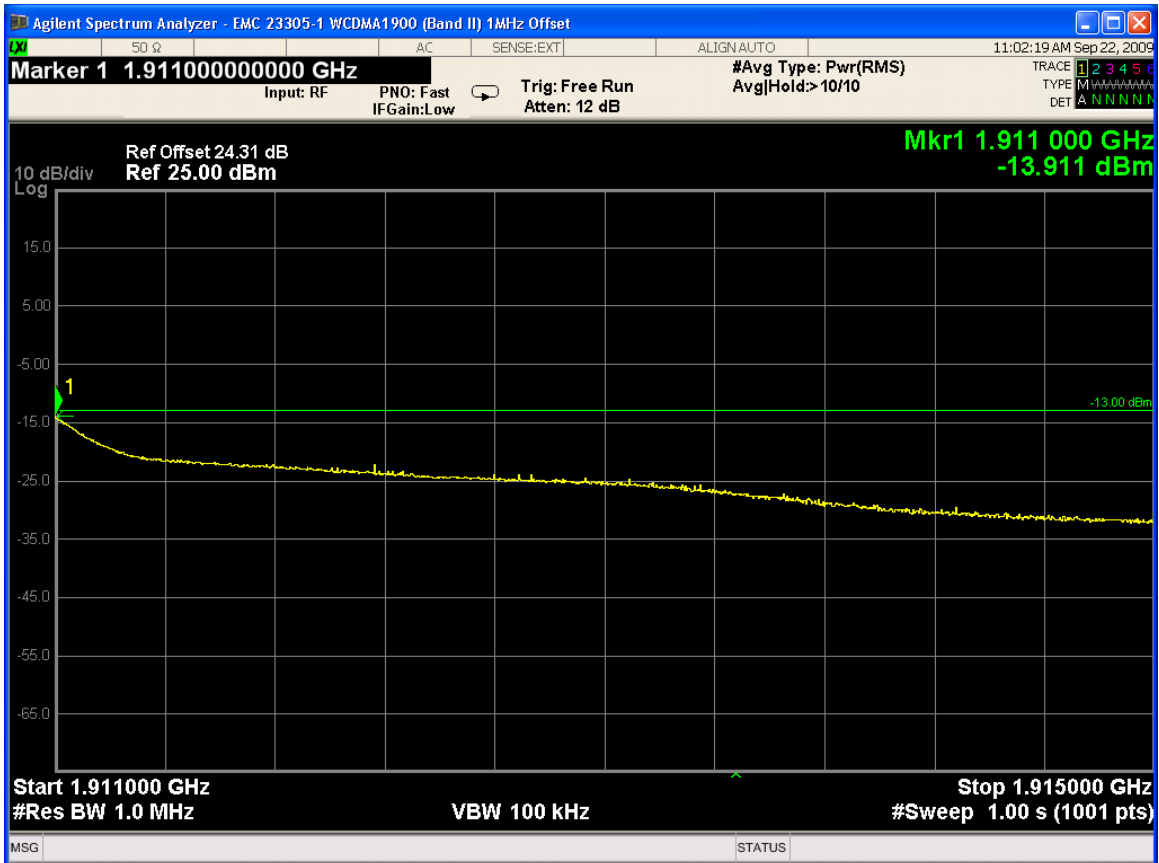

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. For all testing the EUT was powered through the computer's USB.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results – GSM 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-45.39
3rd harmonic	-13	-40.49
4th harmonic	-13	-48.67
5th harmonic	-13	-39.32
6th harmonic	-13	-45.64
7th harmonic	-13	-45.22
8th harmonic	-13	-49.78
9th harmonic	-13	*
10th harmonic	-13	*

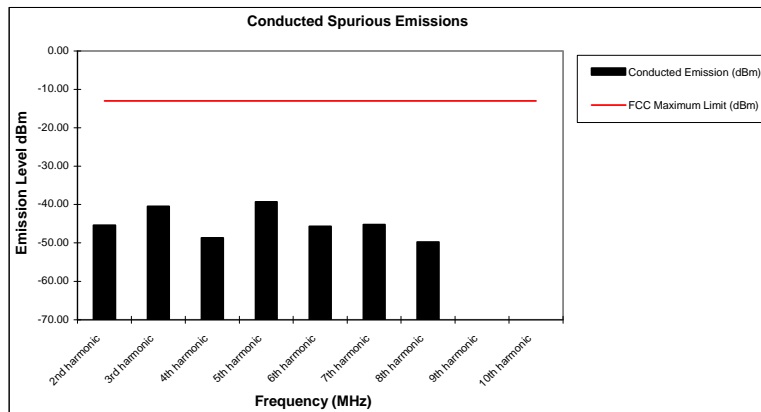

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-43.93
3rd harmonic	-13	-33.82
4th harmonic	-13	-44.89
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

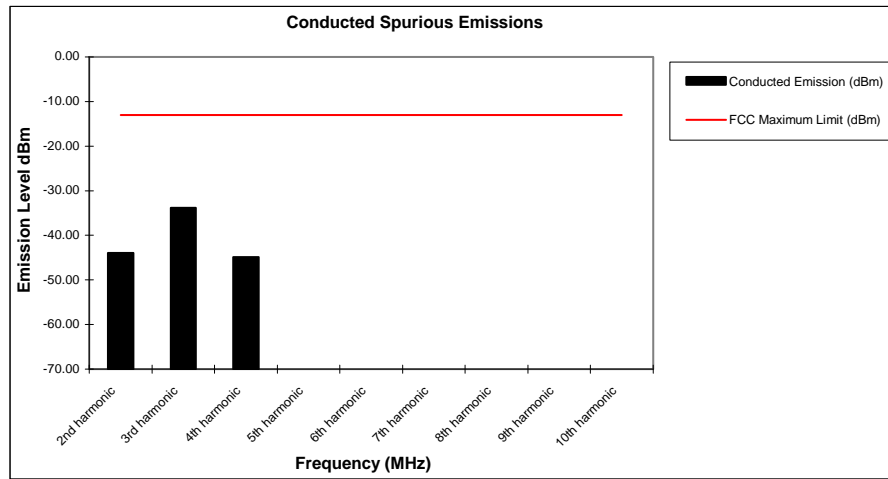

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-48.79
3rd harmonic	-13	-44.89
4th harmonic	-13	-50.96
5th harmonic	-13	-40.83
6th harmonic	-13	-46.38
7th harmonic	-13	-49.83
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

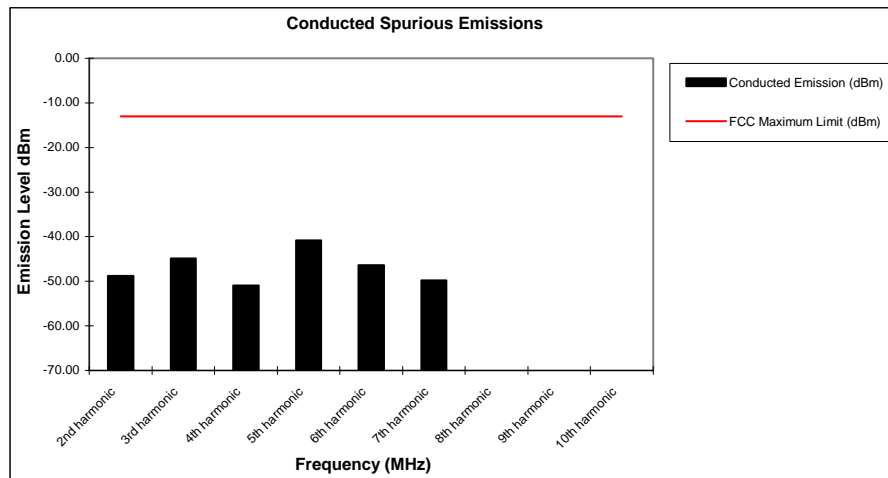

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-44.54
3rd harmonic	-13	-34.24
4th harmonic	-13	-44.76
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

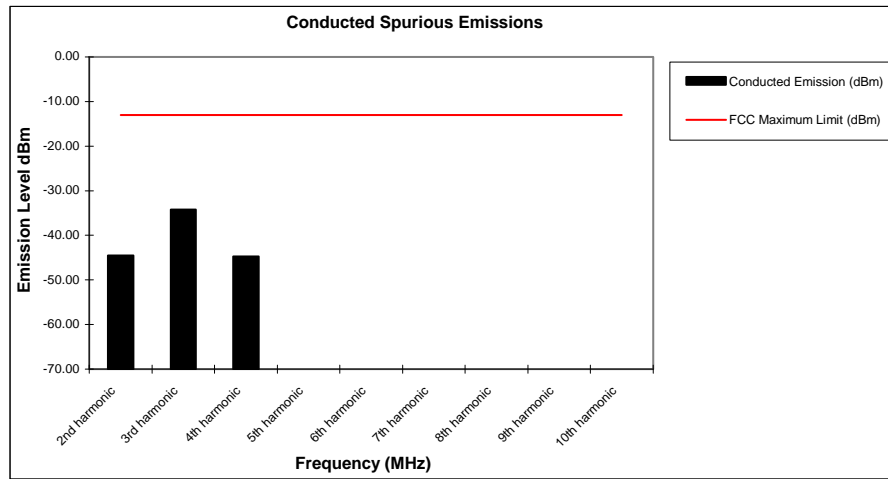

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-54.45
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

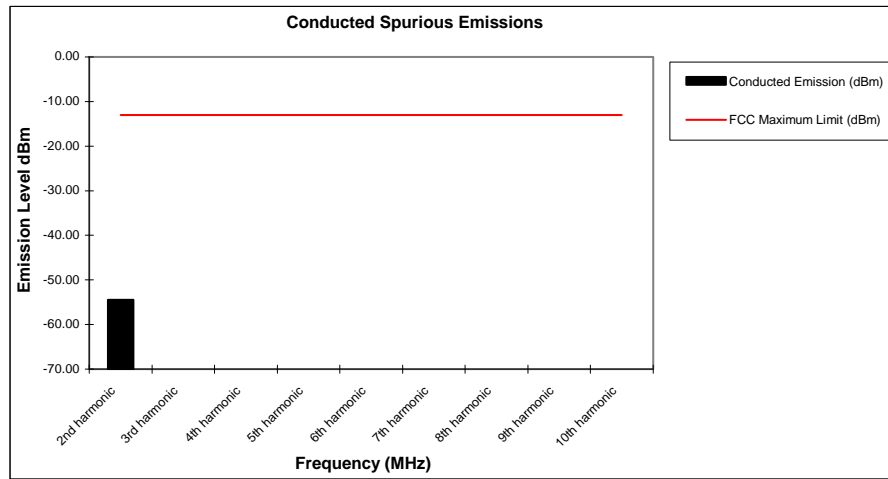

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-30.94
3rd harmonic	-13	-54.80
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

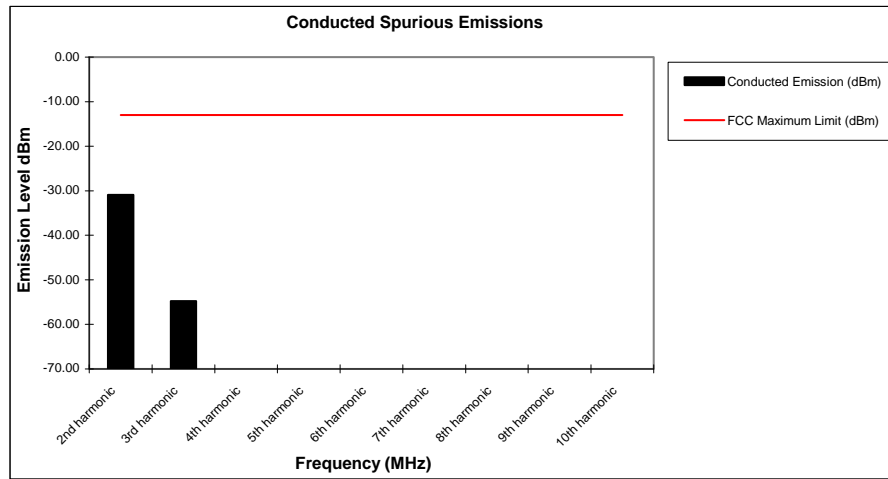

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results


Attached

Measurement Results – GSM 850

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

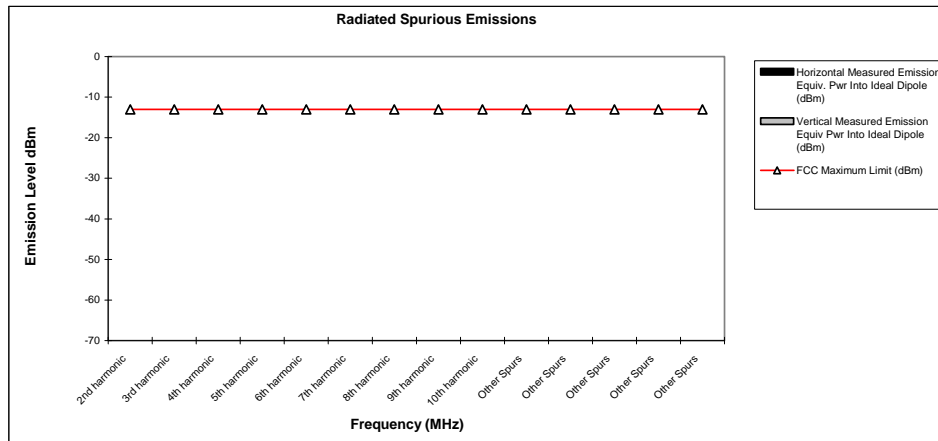

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 850

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

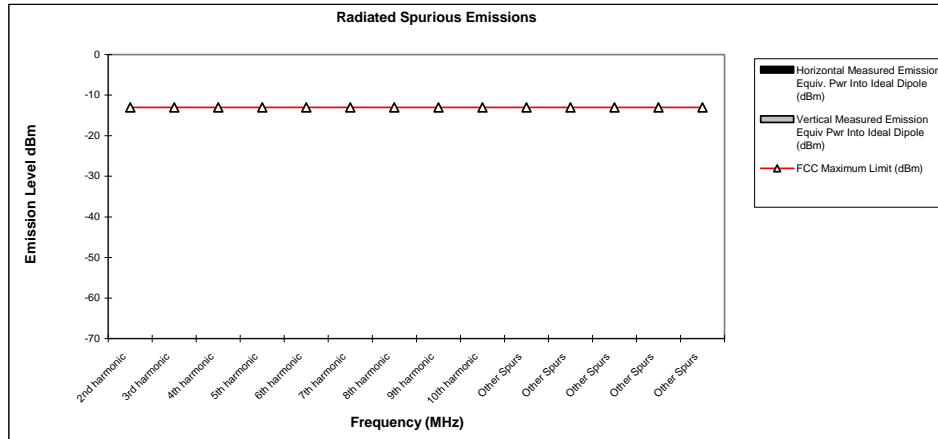

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

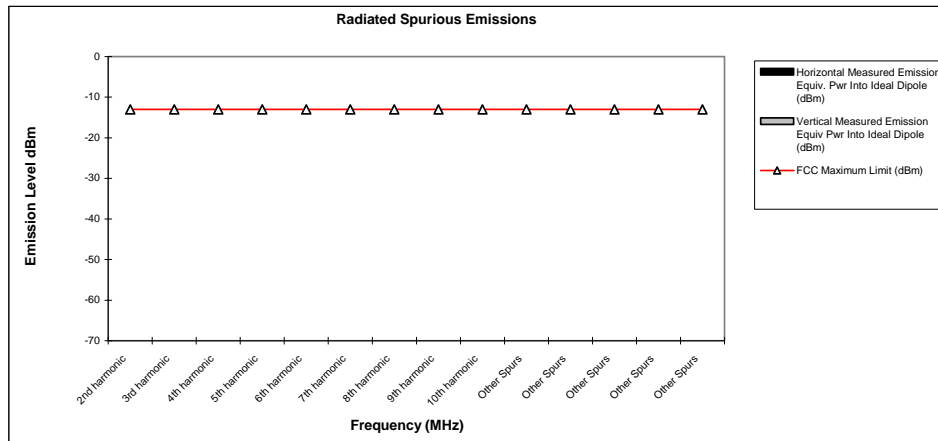

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

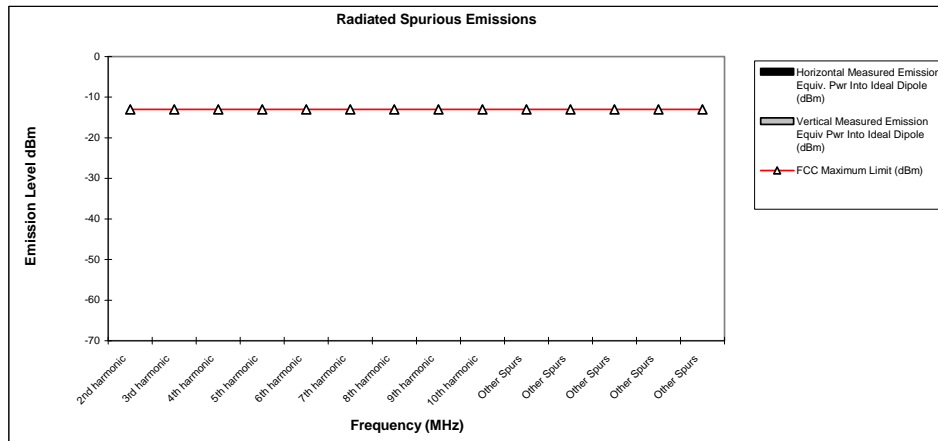

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

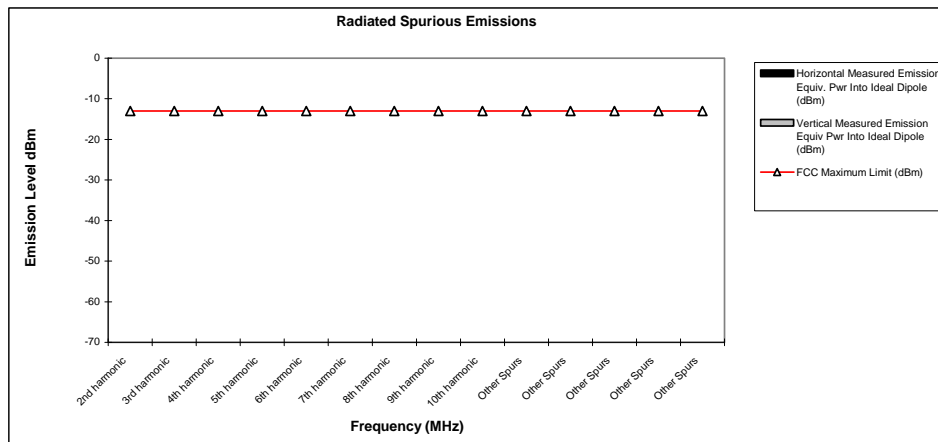

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

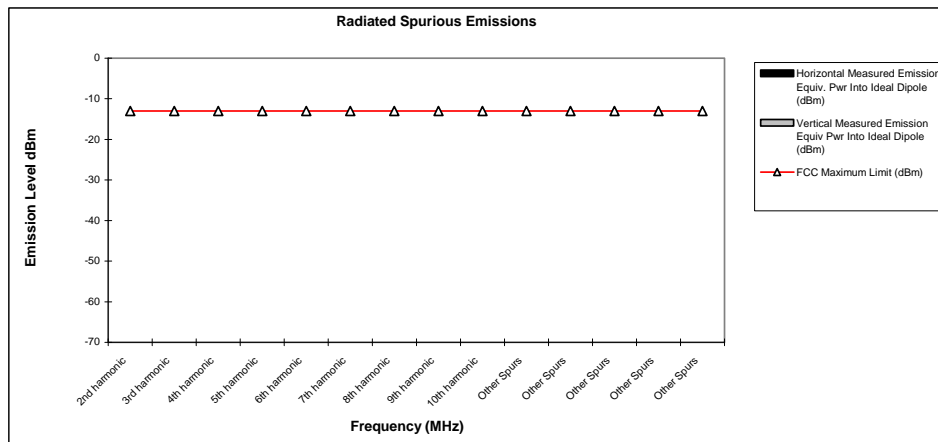

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

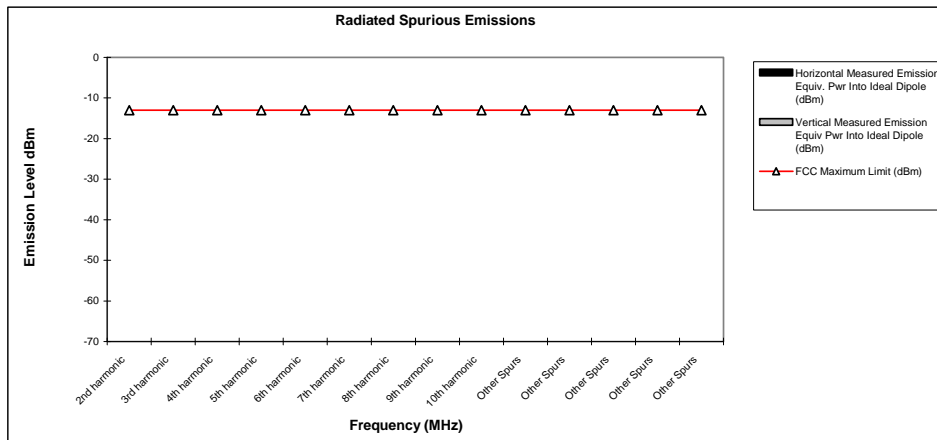

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

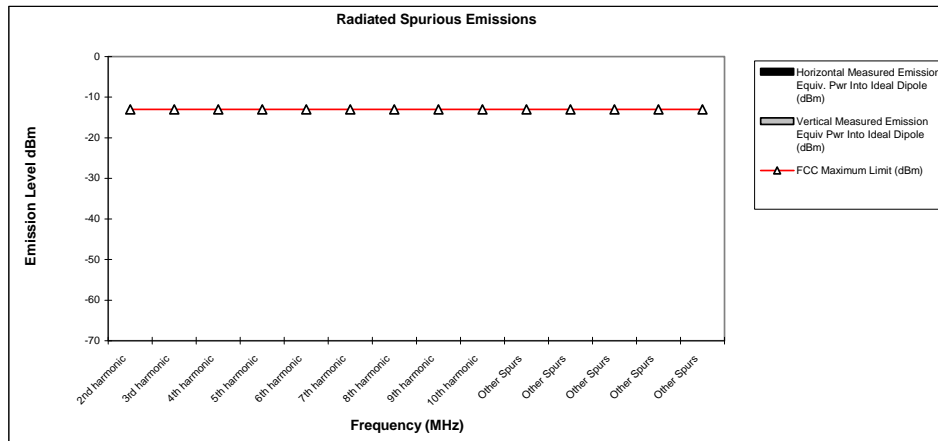

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 850

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

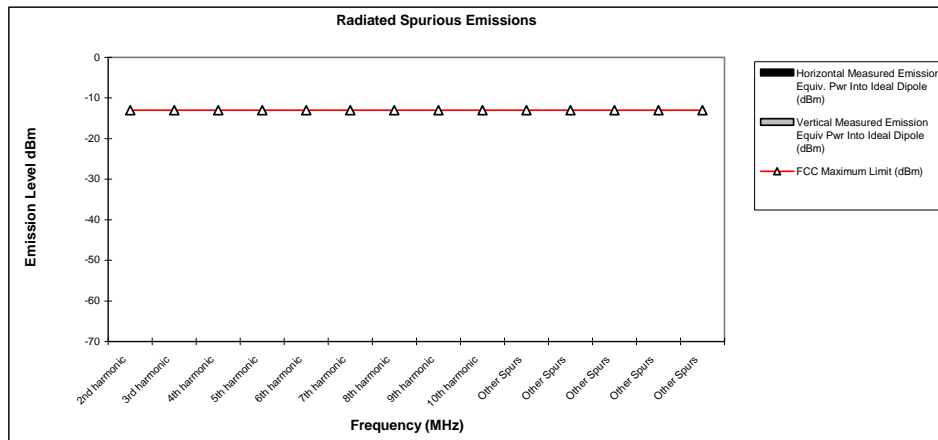

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 850

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

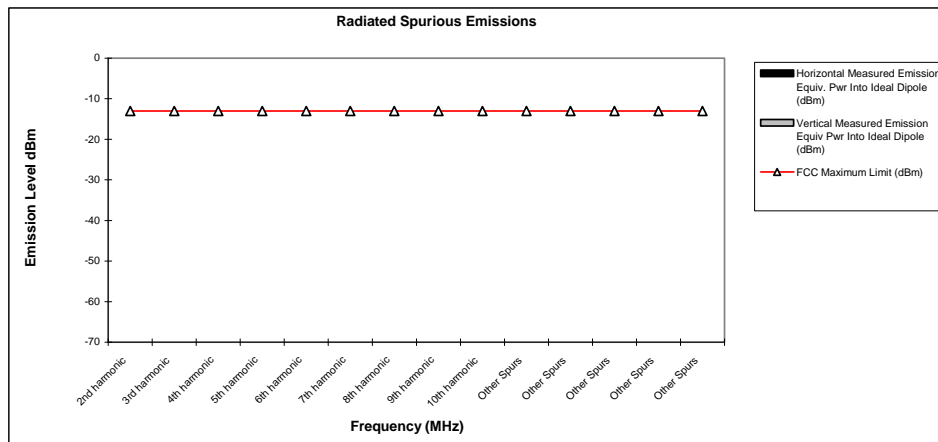

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 1900

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	-31.2
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

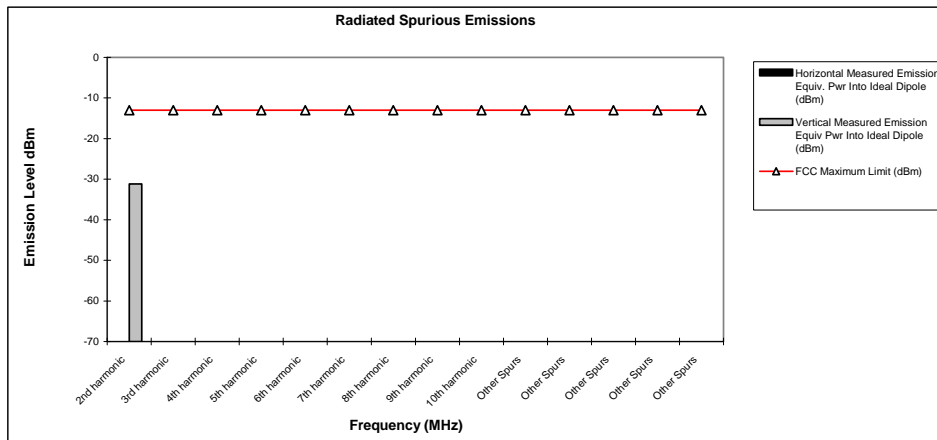

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 1900

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-31.6	-32.0
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

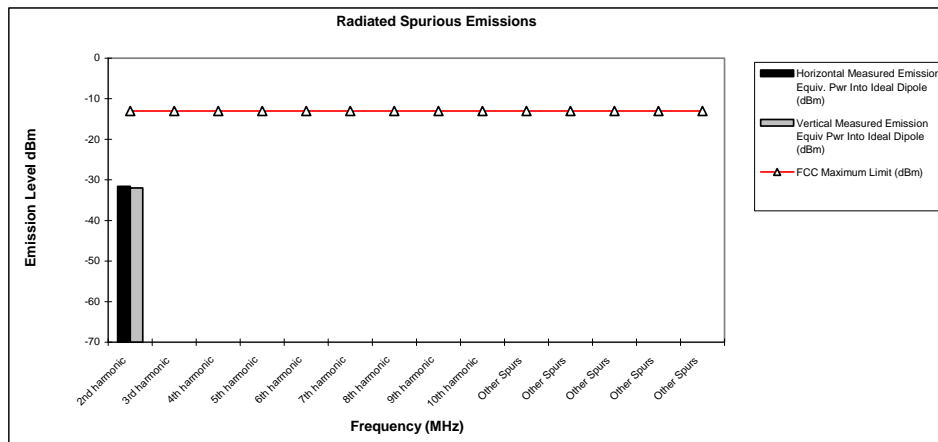

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Emissions below -33 dBm are not shown.

The margin with respect to the limit is the minimum margin for all modes and bands.

FREQUENCY STABILITY

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results – GSM 850

Frequency Stability

Mode: GSM 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.1 ppm

Temperature	Frequency Error	Frequency Error	Voltage	Voltage
C	HZ	(PPM)	(%)	(VDC)
-30 C	-27.43	-0.033	100%	3.80
-20 C	-29.54	-0.035	100%	3.80
-10 C	-24.13	-0.029	100%	3.80
0 C	-31.69	-0.038	100%	3.80
10 C	-40.37	-0.048	100%	3.80
20 C	-31.06	-0.037	100%	3.80
30 C	-41.02	-0.049	100%	3.80
40 C	-37.66	-0.045	100%	3.80
50 C	-38.83	-0.046	100%	3.80
60 C	-49.93	-0.060	100%	3.80
20 C	-36.60	-0.044	Battery Endpoint	3.47

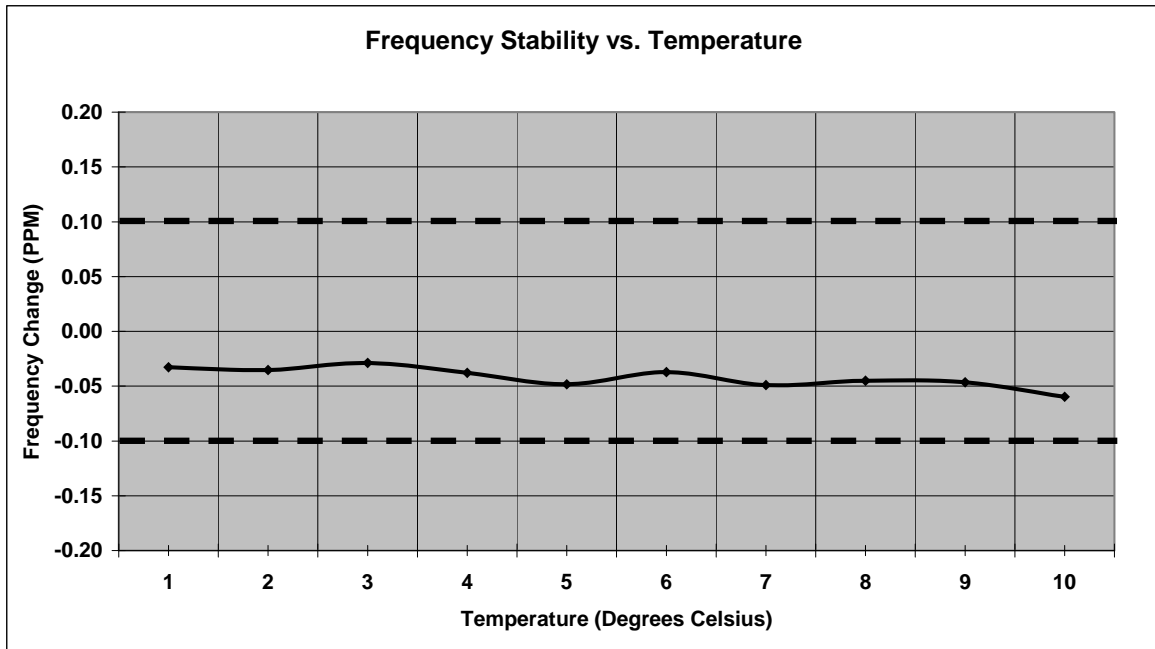


Measurement Results – GSM 1900

Frequency Stability

Mode: GSM 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-78.43	-0.042	100%	3.80
-20 C	-34.90	-0.019	100%	3.80
-10 C	-50.94	-0.027	100%	3.80
0 C	-61.63	-0.033	100%	3.80
10 C	38.83	0.021	100%	3.80
20 C	-66.10	-0.035	100%	3.80
30 C	-76.87	-0.041	100%	3.80
40 C	-56.88	-0.030	100%	3.80
50 C	-69.88	-0.037	100%	3.80
60 C	-87.58	-0.047	100%	3.80
20 C	-72.56	-0.039	Battery Endpoint	3.47

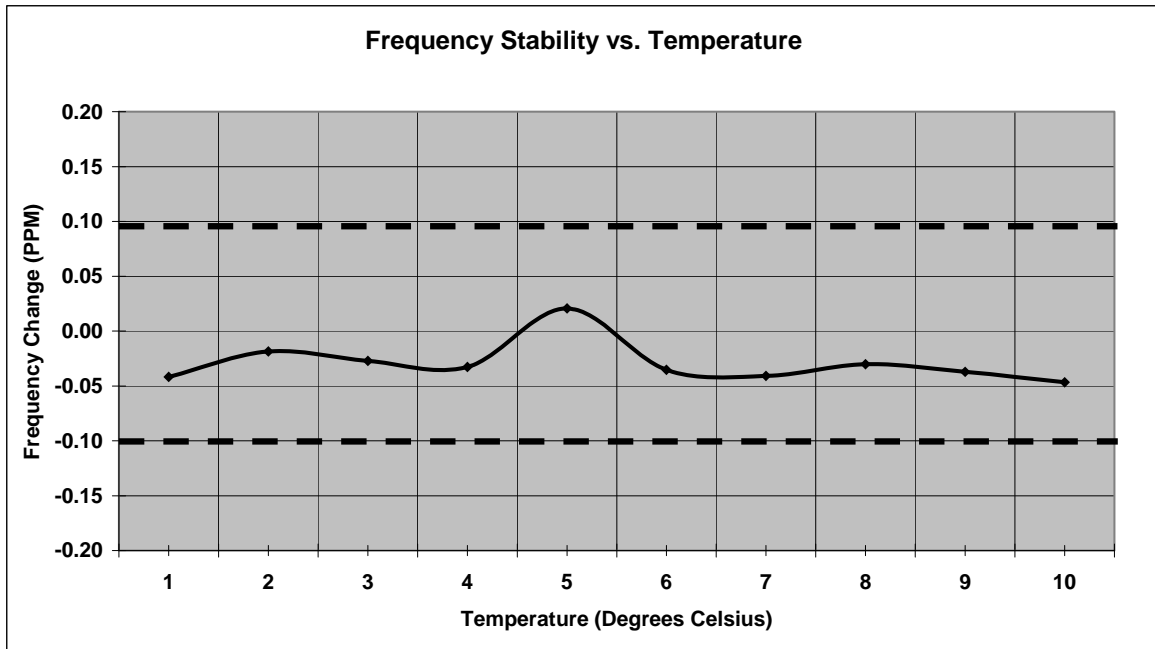


Measurement Results – EDGE 850

Frequency Stability

Mode: EDGE 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	19.81	0.024	100%	3.80
-20 C	-48.09	-0.057	100%	3.80
-10 C	-41.03	-0.049	100%	3.80
0 C	-36.97	-0.044	100%	3.80
10 C	-57.84	-0.069	100%	3.80
20 C	-25.55	-0.031	100%	3.80
30 C	-48.75	-0.058	100%	3.80
40 C	-48.08	-0.057	100%	3.80
50 C	-50.20	-0.060	100%	3.80
60 C	-72.36	-0.087	100%	3.80
20 C	-29.84	-0.036	Battery Endpoint	3.47

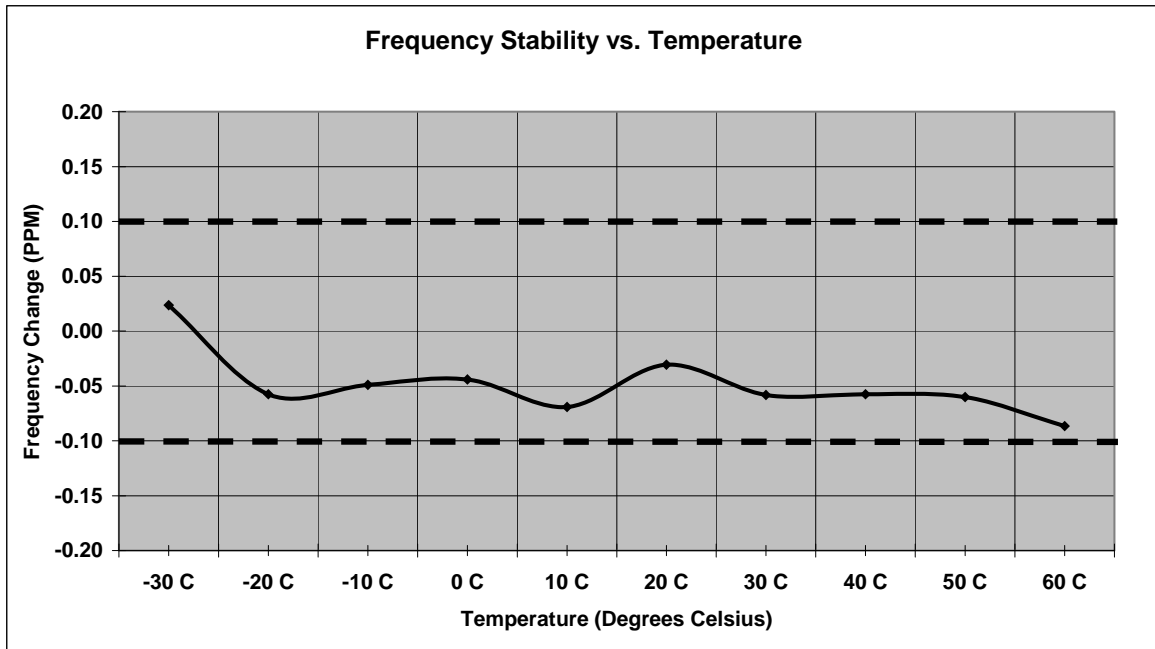


Measurement Results – EDGE 1900

Frequency Stability

Mode: EDGE 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	47.32	0.025	100%	3.80
-20 C	44.74	0.024	100%	3.80
-10 C	-48.47	-0.026	100%	3.80
0 C	-59.88	-0.032	100%	3.80
10 C	-89.26	-0.047	100%	3.80
20 C	-57.38	-0.031	100%	3.80
30 C	-49.98	-0.027	100%	3.80
40 C	-56.13	-0.030	100%	3.80
50 C	-97.16	-0.052	100%	3.80
60 C	-111.07	-0.059	100%	3.80
20 C	-63.31	-0.034	Battery Endpoint	3.47

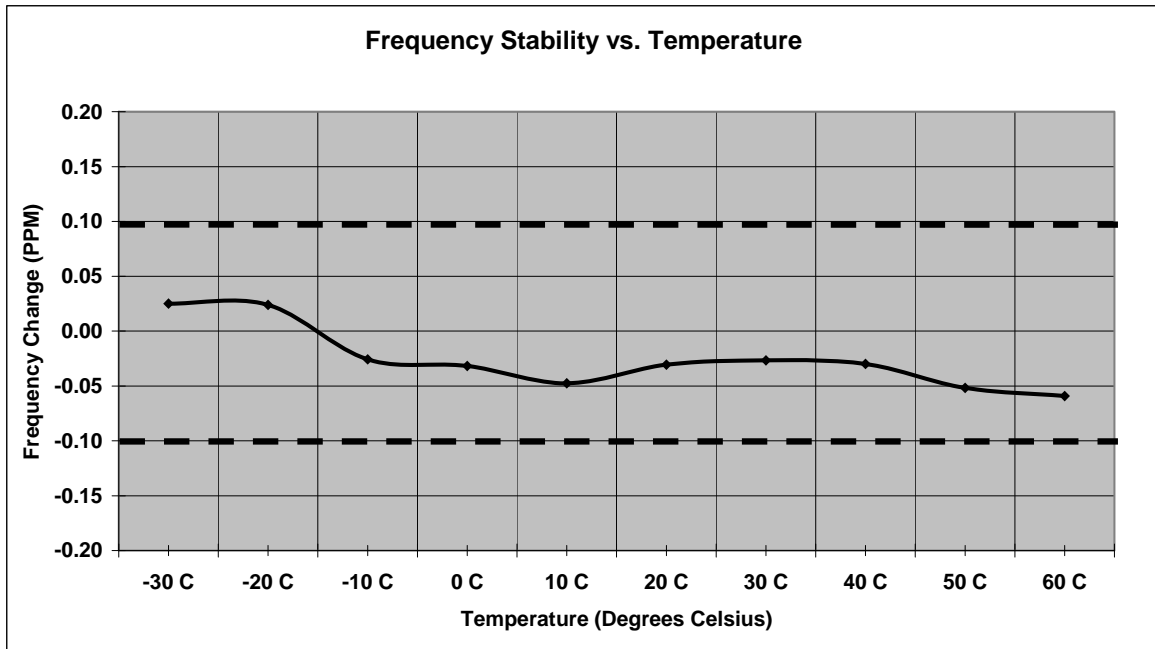


Measurement Results – WCDMA 850

Frequency Stability

Mode: WCDMA 850 **Operating Frequency:** 836.00 MHz
Channel: 4180 **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-34.12	-0.041	100%	3.80
-20 C	-11.93	-0.014	100%	3.80
-10 C	-24.18	-0.029	100%	3.80
0 C	-48.31	-0.058	100%	3.80
10 C	-33.50	-0.040	100%	3.80
20 C	-19.51	-0.023	100%	3.80
30 C	-21.37	-0.026	100%	3.80
40 C	-15.33	-0.018	100%	3.80
50 C	-17.58	-0.021	100%	3.80
60 C	-16.72	-0.020	100%	3.80
20 C	-21.09	-0.025	Battery Endpoint	3.47

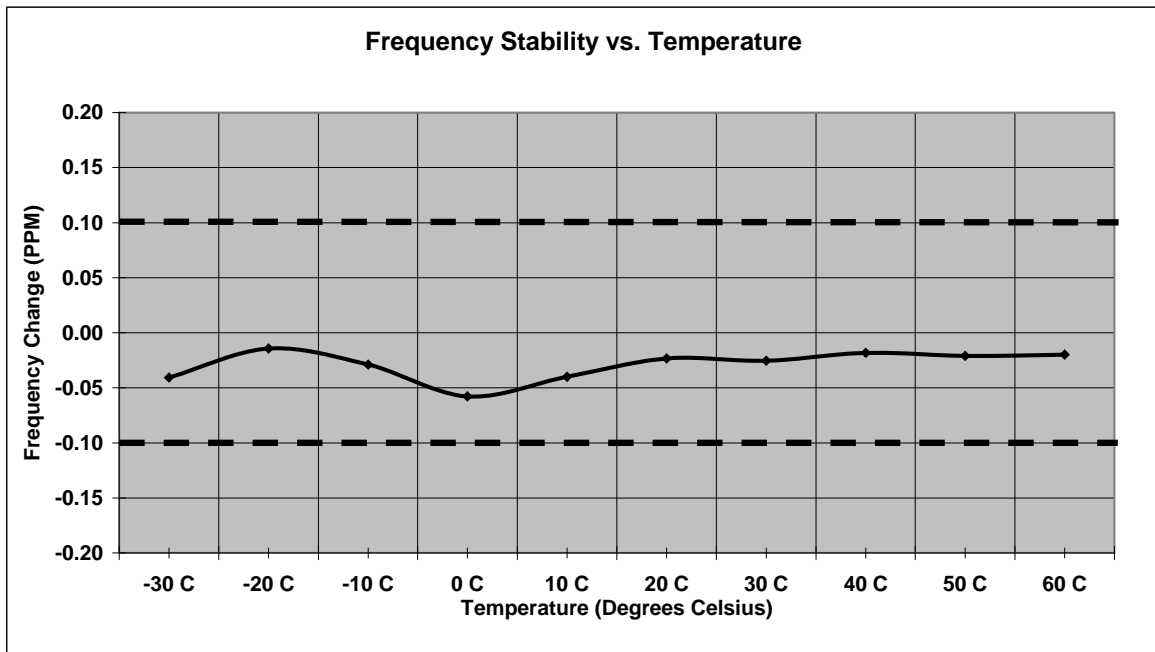


Measurement Results – WCDMA 1900

Frequency Stability

Mode: WCDMA 1900 **Operating Frequency:** 1880.0 MHz
Channel: 9400 **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-43.41	-0.023	100%	3.80
-20 C	-61.47	-0.033	100%	3.80
-10 C	-31.90	-0.017	100%	3.80
0 C	-36.74	-0.020	100%	3.80
10 C	-31.71	-0.017	100%	39.20
20 C	-38.49	-0.020	100%	3.80
30 C	-33.87	-0.018	100%	3.80
40 C	-35.98	-0.019	100%	3.80
50 C	-34.08	-0.018	100%	3.80
60 C	-26.69	-0.014	100%	3.80
20 C	-39.49	-0.021	Battery Endpoint	3.47

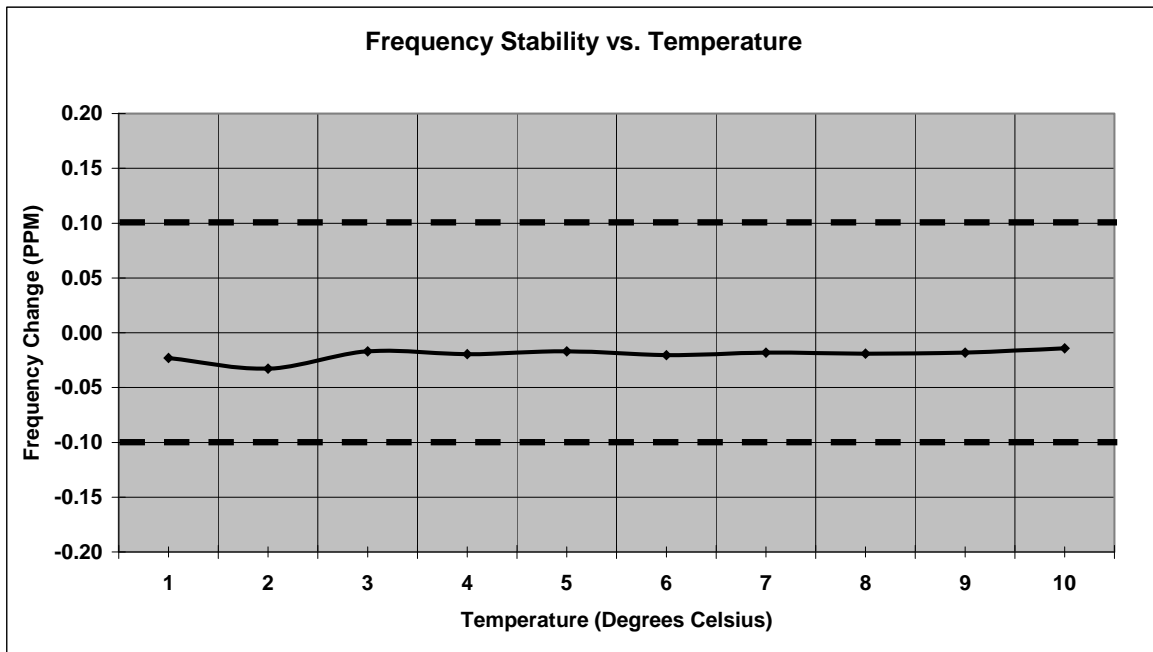

End of Test Report