



MOTOROLA

Portable Cellular Phone SAR Test Report

Tests Requested By: Motorola Mobile Devices
600 N. US Highway 45
Libertyville, IL 60048

Test Report #: 24003-1F

Date of Report: Sept 3, 2010

Date of Test: Aug 22 – Sept 3, 2010

FCC ID #: IHDT56LW1

Generic Name: MKSQ7-3334411A11
Motorola Mobile Devices Business Product Safety & Compliance Laboratory

Test Laboratory: 600 N. US Highway 45
Libertyville, IL 60048

Report Author: Katerina Bruggemann
Engineer

This laboratory is accredited to ISO/IEC 17025-2005 to perform the following tests:

Accreditation:	<u>Tests:</u>	<u>Procedures:</u>
	Electromagnetic Specific Absorption Rate	IEC 62209-1 RSS-102 IEEE 1528 - 2003 FCC OET Bulletin 65 (including Supplement C) Australian Communications Authority Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 2003 CENELEC EN 50360 ARIB Std. T-56 (2002)



TESTING CERT #2518-02

Statement of Compliance:

On the following products or types of products:
On the following products or types of products: Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with IEEE 1528 / CENELEC EN62209-1 (2006), as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2010

This test report shall not be reproduced except in full, without written approval of the laboratory. The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report. Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. Introduction	3
2. Description of the Device Under Test	3
2.1 Antenna description	3
2.2 Device description	3
3. Test Equipment Used	5
3.1 Dosimetric System	5
3.2 Additional Equipment	5
4. Electrical parameters of the tissue simulating liquid	6
5. System Accuracy Verification	7
6. Test Results	8
6.1 Head Adjacent Test Results	10
6.2 Body Worn Test Results	16
References	22
Appendix 1: SAR distribution comparison for the system accuracy verification	
Appendix 2: SAR distribution plots for Phantom Head Adjacent Use	
Appendix 3: SAR distribution plots for Body Worn Configuration	
Appendix 4: Probe Calibration Certificate	
Appendix 5: Measurement Uncertainty Budget	
Appendix 6: Dipole Characterization Certificate	

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1g average set in [3] and 2.0W/kg in a 10g average set in [2].

For ANSI / IEEE C95.1 (1g), the final SAR reading for this phone is 0.63 W/kg for head adjacent use and 1.15 W/kg for body worn use. These measurements were performed using a Dasy4™ v4.7 system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich Switzerland.

2. Description of the Device Under Test

2.1 Antenna description

Type	Internal	
Location	Bottom of the Phone	
Dimensions	Length	55 mm
	Width	12 mm

2.2 Device description

Serial Number(s)	TA19103KRE								
Mode(s) of Operation*	GSM 850	GSM 900	GSM 1800	GSM 1900	WCDMA 850	WCDMA 1700	WCDMA 2100	Wi-Fi 802.11 b/g/n	Blue Tooth
Modulation Mode(s)	GMSK	GMSK	GMSK	GMSK	QPSK	QPSK	QPSK	BPSK	GFSK
Maximum Output Power Setting	33.0 dBm	33.0 dBm	30.5 dBm	30.5 dBm	24.0 dBm	24.0 dBm	24.0 dBm	16.0 dBm	10.07 dBm
Duty Cycle	1:8	1:8	1:8	1:8	1:1	1:1	1:1	1:1	1:1
Transmitting Frequency Range(s)	824.2 - 848.8 MHz	880.2 - 914.8 MHz	1710.2 - 1784.8 MHz	1850.20 - 1909.80 MHz	826.4 - 846.6 MHz	1712.4 - 1752.6 MHz	1922.4 - 1977.6 MHz	1710.2 - 1784.8 MHz	2400 - 2483.5 MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype								
Device Category	Portable								
RF Exposure Limits	General Population / Uncontrolled								

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: 24003-1F

Mode(s) of Operation	GPRS 850				GPRS 900				GPRS 1800				GPRS 1900			
Modulation	GMSK				GMSK				GMSK				GMSK			
Maximum Output Power Setting	33.0	31.0	29.0	27.1	33.0	31.0	29.0	27.1	30.5	28.6	26.7	24.9	30.5	28.6	26.7	24.9
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			
Mode(s) of Operation	EDGE 850				EDGE 900				EDGE 1800				EDGE 1900			
Modulation	8PSK				8PSK				8PSK				8PSK			
Maximum Output Power Setting	27.5	25.6	23.7	21.8	27.5	25.6	23.7	21.8	26.5	24.73	22.96	21.19	26.5	24.73	22.96	21.19
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			

3. Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10g RSS uncertainty of the measurement system is ±10.8% (K=1) with an expanded uncertainty of ±21.6% (K=2). The overall 1g RSS uncertainty of the measurement system is ±11.1% (K=1) with an expanded uncertainty of ±22.2% (K=2). The measurement uncertainty budget is given in Appendix 5. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4W/kg to 10W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE V1	SN 376	7/13/2011
E-Field Probe ES3DV3	SN 3183	7/14/2011
S.A.M. Phantom used for 800-900MHz	TP-1005	
S.A.M. Phantom used for 1700-2450MHz	TP-1139	
Dipole Validation Kit, DV835V2	420tr	3/17/2011
Dipole Validation Kit, DV1800V2	259tr	3/17/2011
Dipole Validation Kit, DV2450V2	766	3/17/2011

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04822	Apr-22-2011
Power Meter E4419B	GB39511082	Apr-24-2011
Power Sensor #1 - E9301A	US39210915	Dec-04-2010
Power Sensor #2 - E9301A	US39210916	Nov-16-2010
Network Analyzer HP8753ES	US39172529	June-04-2011
Dielectric Probe Kit HP85070C	US99360070	

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of $\rho=1\text{g/cm}^3$ was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
835	Head	Measured, 8/22/2010	42.1	0.92	21.4
		Recommended Limits	41.5 ±5%	0.90 ±5%	18-25
	Body	Measured, 8/31/2010	53.4	0.98	20.0
		Recommended Limits	55.2 ±5%	0.97 ±5%	18-25
1730	Head	Measured, 9/1/2010	39.5	1.39	19.5
		Recommended Limits	40.1 ±5%	1.36 ±5%	18-25
	Body	Measured, 9/2/2010	52.3	1.51	20.0
		Recommended Limits	53.5 ±5%	1.48 ±5%	18-25
1880	Head	Measured, 8/25/2010	38.6	1.46	20.0
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
	Body	Measured, 9/1/2010	50.8	1.59	20.0
		Recommended Limits	53.3 ±5%	1.52 ±5%	18-25
2450	Head	Measured, 8/31/2010	36.6	1.78	19.6
		Measured, 9/1/2010	38.4	1.78	20.2
		Recommended Limits	39.2 ±10%	1.80 ±5%	18-25
	Body	Measured, 9/3/2010	50.4	1.94	19.6
		Recommended Limits	52.7 ±10%	1.95 ±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835MHz / 900 MHz Head	835MHz / 900 MHz Body	1800MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450MHz Head	2450 MHz Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within ±10% from the target SAR indicated in Appendix 6. These frequencies are within ±10% of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ϵ_r	σ (S/m)		
835	Measured, 8/22/2010	9.65	42.2	0.93	20.6	20.3
	Measured, 8/24/2010	9.83	42.9	0.93	20.0	20.0
	Measured, 8/31/2010	9.93	42.6	0.92	20.3	20.1
	Recommended Limits	9.59	41.5 ±5%	0.97 ±5%	18-25	18-25
1800	Measured, 8/25/2010	39.73	38.9	1.37	20.0	20.0
	Measured, 8/26/2010	39.73	38.8	1.37	20.2	20.0
	Measured, 8/30/2010	39.13	38.5	1.35	20.2	20.4
	Measured, 9/01/2010	40.30	38.8	1.38	20.3	20.3
	Measured, 9/02/2010	40.03	38.4	1.37	19.8	19.9
	Recommended Limits	38.36	40.0 ±5%	1.4 ±5%	18-25	18-25
2450	Measured, 8/31/2010	57.00	36.6	1.78	20.3	19.9
	Measured, 9/01/2010	55.00	38.4	1.78	20.2	19.7
	Measured, 9/02/2010	57.50	38.0	1.80	19.8	19.2
	Recommended Limits	54.55	39.2 ±10%	1.80 ±5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3183	835	6.11	5 of 11
		1810	5.05	5 of 11
		1950	4.82	5 of 11
		2450	4.49	5 of 11

6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was setup to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 ($\pm 30\%$) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15 mm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY4™ manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:

Battery #1 – SNN5843A – 1390 mAH Battery

Battery #2 – SNN5875A – 1820 mAH Battery

SNN5843A battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

Per the “SAR Measurement Procedures for 3G Devices” released in October, 2007, 12.2kbps RMC, 12.2kbps AMR, HS-DPCCH Sub-test 1-4, and E-DCH Sub-test 1-5 modes were considered. The conducted power measurements (per section 5.2 of 3GPP TS 34.121) for each mode are shown in the table below.

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes				Conducted Power (dBm) for WCDMA – HSPA (HSUPA/HSDPA-Rel 6) Modes				
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
WCDM A 850	4132	23.98	23.99	23.95	23.92	24.05	24.14	23.95	24.08	23.99	24.06	24.01
	4180	24.05	24.17	24.12	24.15	24.26	24.20	24.08	24.21	24.32	24.23	24.28
	4233	23.87	23.89	23.85	23.88	23.80	23.77	23.87	23.61	23.86	23.65	23.83
WCDM A 1700	1312	23.92	24.12	23.81	24.28	23.99	24.35	23.86	24.29	23.66	24.26	23.85
	1413	23.92	24.00	23.93	24.10	24.03	24.17	23.95	24.15	23.86	24.09	23.96
	1513	24.13	24.18	24.20	24.41	24.24	24.44	24.18	24.39	24.14	24.34	24.22

Evaluation of Wi-Fi 802.11 Modes

Per “SAR Measurement Procedures for 802.11 a/b/g Transmitters” (FCC KDB 248227), power measurements were performed for 802.11 operational modes. The conducted power measurements for each mode are shown in the table below. SAR testing for 802.11 modes was performed with the transmitter mode and data rate set to the configurations highlighted in bold below.

Band	Channel	Conducted Power (dBm) for 802.11b Mode Data Rates			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
Wi-Fi 2450 MHz	1	14.61	14.67	15.61	15.54
	6	14.79	14.88	15.92	15.79
	11	14.90	15.04	15.98	16.00

Band	Channel	Conducted Power (dBm) for 802.11g Mode Data Rates							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
Wi-Fi 2450 MHz	1	14.73	14.81	15.04	14.71	14.20	14.19	13.37	12.89
	6	15.06	15.04	15.23	15.02	14.53	14.43	13.15	13.17
	11	15.22	15.21	15.38	15.18	14.69	14.71	13.39	13.32

Band	Channel	Conducted Power (dBm) for 802.11n Mode Data Rates (20 MHz Channel, 800 ns Guard Interval)							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
Wi-Fi 2450 MHz	1	14.71	14.85	14.88	14.38	14.42	12.94	12.39	11.66
	6	14.95	15.08	15.11	14.51	14.63	13.15	12.61	11.95
	11	15.07	15.27	15.30	14.67	14.72	13.28	13.3	12.07

Band	Channel	Conducted Power (dBm) for 802.11n Mode Data Rates (20 MHz Channel, 400 ns Guard Interval)							
		7.2 Mbps	14.4 Mbps	21.7 Mbps	28.8 Mbps	43.3 Mbps	57.7 Mbps	65 Mbps	72.2 Mbps
Wi-Fi 2450 MHz	1	14.66	14.72	14.85	14.32	14.2	12.84	12.72	11.94
	6	14.94	14.94	15.09	14.41	14.42	13.06	12.96	12.11
	11	15.09	15.12	15.16	14.57	14.60	13.13	13.13	12.28

Evaluation of Bluetooth

Per "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas" (FCC KDB 648474), the necessity of stand-alone and simultaneous SAR testing was evaluated for the Bluetooth transmitter of the device under test.

- The highest output conducted power measured for Bluetooth on the device under test is 10.16 mW.
- The separation distance between the Bluetooth antenna and the main antenna is 2.51 cm.

Based on the output power of the Bluetooth transmitter and its antenna separation distance from the primary antenna, neither stand-alone nor simultaneous SAR measurements are required for the device under test. Pictorial representation of the antenna locations and separation distance are given in Exhibit 7d.

6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 5 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0cm ±0.5cm.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3183	835	6.11	5 of 11
		1810	5.05	5 of 11
		1950	4.82	5 of 11
		2450	4.49	5 of 11

Left Head Cheek Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	21.4	0.008	0.269	0.27	0.353	0.35
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	-0.066	0.312	0.32	0.537	0.55
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	21.4	0.003	0.249	0.25	0.326	0.33
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92						
	Channel 1413	23.92	19.5	-0.011	0.296	0.30	0.496	0.50
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61	19.4	0.001	0.0578	0.06	0.123	0.12
	Channel 6	14.79	19.8	-0.111	0.0605	0.06	0.128	0.13
	Channel 11	14.90	19.3	-0.036	0.054	0.05	0.113	0.11
WI-FI 2450 802.11b 5.5 Mbps	Channel 1	15.61	19.4	0.011	0.0576	0.06	0.122	0.12
	Channel 6	15.92	19.3	-0.014	0.0743	0.07	0.155	0.16
WI-FI 2450 802.11b 11 Mbps	Channel 11	16.00	19.3	0.122	0.0663	0.07	0.137	0.14
WI-FI 2450 802.11g 12 Mbps	Channel 1	15.04	19.1	-0.021	0.0401	0.04	0.0849	0.09
	Channel 6	15.23	19.2	-0.187	0.0492	0.05	0.103	0.11
	Channel 11	15.38	19.0	-0.024	0.0436	0.04	0.0912	0.09
WI-FI 2450 802.11n 21.7 Mbps	Channel 6	15.09	18.8	-0.020	0.101	0.10	0.212	0.21
	Channel 11	15.16	19.1	-0.068	0.089	0.09	0.186	0.19
WI-FI 2450 802.11n 19.5 Mbps	Channel 1	14.88	19.1	-0.094	0.0883	0.09	0.186	0.19
	Channel 6	15.11	18.9	-0.005	0.104	0.10	0.218	0.22
	Channel 11	15.30	18.8	-0.066	0.094	0.10	0.196	0.20

GSM 850 +WI-FI						0.37		0.57
GSM 1900 WI-FI						0.42		0.77
WCDMA 850 +WI-FI						0.35		0.55
WCDMA 1700 +WI-FI						0.40		0.72

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	21.4	0.105	0.282	0.28	0.372	0.37
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	0.054	0.174	0.17	0.277	0.28
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	21.4	0.009	0.254	0.25	0.336	0.34
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92						
	Channel 1413	23.92	19.5	-0.012	0.113	0.11	0.182	0.18
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	19.6	-0.120	0.034	0.04	0.0688	0.07
	Channel 11	14.90						
GSM 850 +WI-FI						0.32		0.44
GSM 1900 WI-FI						0.21		0.35
WCDMA 850 +WI-FI						0.29		0.41
WCDMA 1700 +WI-FI						0.15		0.25

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	21.4	0.058	0.220	0.22	0.290	0.29
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	0.068	0.128	0.13	0.204	0.20
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	21.4	0.150	0.207	0.21	0.271	0.27
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92						
	Channel 1413	23.92	19.5	0.021	0.202	0.20	0.341	0.34
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	19.4	-0.091	0.0065	0.01	0.0118	0.01
	Channel 11	14.90						
GSM 850 +WI-FI						0.23		0.30
GSM 1900 WI-FI						0.14		0.21
WCDMA 850 +WI-FI						0.22		0.28
WCDMA 1700 +WI-FI						0.21		0.35

Table 3: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	21.4	0.070	0.227	0.23	0.299	0.30
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	-0.074	0.120	0.12	0.199	0.20
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	21.4	0.052	0.218	0.22	0.288	0.29
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92						
	Channel 1413	23.92	19.5	-0.101	0.214	0.22	0.362	0.37
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	20.2	-0.220	0.00973	0.01	0.0185	0.02
	Channel 11	14.90						
GSM 850 +WI-FI						0.24		0.32
GSM 1900 WI-FI						0.13		0.22
WCDMA 850 +WI-FI						0.23		0.31
WCDMA 1700 +WI-FI						0.23		0.39

Table 4: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest Head with Battery 2								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz (RH Cheek)	Channel 128	33.20						
	Channel 190	33.04	21.4	-0.022	0.285	0.29	0.376	0.38
	Channel 251	33.03						
GSM 1900MHz (LH Cheek)	Channel 512	30.64						
	Channel 661	30.56	20.0	-0.054	0.358	0.36	0.623	0.63
	Channel 810	30.56						
WCDMA 850 (RH Cheek)	Channel 4132	23.98						
	Channel 4180	24.05	21.4	0.069	0.260	0.26	0.339	0.34
	Channel 4233	23.87						
WCDMA 1700 (LH Cheek)	Channel 1312	23.92						
	Channel 1413	23.92	20.0	-0.069	0.273	0.28	0.453	0.46
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps (LH Cheek)	Channel 1	14.61						
	Channel 6	14.79	19.6	-0.224	0.0529	0.06	0.111	0.12
	Channel 11	14.90						
GSM 1900 WI-FI						0.42		0.75
WCDMA 1700 +WI-FI						0.34		0.58

Table 5: SAR measurement results at the highest possible output power, measured in a head position against the ICNIRP and ANSI SAR Limit.

6.2 Body Worn Test Results

The SAR results shown in tables 6 through 12 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There are no Body-Worn Accessories available for this phone at the time of testing hence the device was tested per the supplement C testing guidelines for devices that do not have body worn accessories. A separation distance of 25mm between the device and the flat phantom was used for testing body-worn SAR. The device was tested with the front and back of the device facing the phantom. Both sides of the device were tested for Body SAR for the purpose of including the SAR evaluation for body-worn accessories that support the device with the front side facing the user.

In addition to accessory testing, the cellular phone was tested in data mode operations with the front and back of the phone facing the phantom. For these tests, a separation distance of 25mm between the device and the flat phantom was used. The device was tested with the front and back of the device facing the phantom.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3183	835	6.15	5 of 11
		1810	4.84	5 of 11
		1950	4.86	5 of 11
		2450	4.36	5 of 11

Body-Worn; Front of Phone 25mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	19.2	-0.032	0.0523	0.05	0.0705	0.07
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	0.011	0.0391	0.04	0.0606	0.06
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	20.0	0.081	0.083	0.08	0.111	0.11
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92						
	Channel 1413	23.92	20.0	-0.038	0.056	0.06	0.0868	0.09
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	19.2	0.192	0.003	0.00	0.007	0.01
	Channel 11	14.90						
GSM 850 +WI-FI						0.05		0.08
GSM 1900 WI-FI						0.04		0.07
WCDMA 850 +WI-FI						0.08		0.12
WCDMA 1700 +WI-FI						0.06		0.10

Table 6: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 25mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	19.6	-0.306	0.119	0.13	0.169	0.18
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	-0.128	0.194	0.20	0.323	0.33
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	20.0	-0.227	0.144	0.15	0.197	0.21
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92	20.0	-0.076	0.639	0.65	1.07	1.09
	Channel 1413	23.92	20.0	-0.022	0.570	0.57	0.956	0.96
	Channel 1513	24.13	20.0	-0.196	0.351	0.37	0.590	0.62
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61	18.3	0.083	0.0133	0.01	0.0239	0.02
	Channel 6	14.79	18.9	0.066	0.0192	0.02	0.0341	0.03
	Channel 11	14.90	18.4	0.095	0.0208	0.02	0.0374	0.04
WI-FI 2450 802.11b 5.5 Mbps	Channel 1	15.61	18.2	0.110	0.0146	0.01	0.0258	0.03
	Channel 6	15.92	18.3	-0.189	0.0219	0.02	0.0385	0.04
WI-FI 2450 802.11b 11 Mbps	Channel 11	16.00	18.1	-0.036	0.0234	0.02	0.0416	0.04
WI-FI 2450 802.11g 12 Mbps	Channel 1	15.04	18.2	-0.051	0.00934	0.01	0.0166	0.02
	Channel 6	15.23	18.0	0.101	0.0135	0.01	0.0242	0.02
	Channel 11	15.38	20.1	0.085	0.016	0.02	0.0288	0.03
WI-FI 2450 802.11n 21.7 Mbps	Channel 6	15.09	20.1	-0.017	0.034	0.03	0.061	0.06
	Channel 11	15.16	20.1	-0.095	0.033	0.03	0.0576	0.06
WI-FI 2450 802.11n 19.5 Mbps	Channel 1	14.88	20.1	0.069	0.0249	0.02	0.0438	0.04
	Channel 6	15.11	20.1	-0.055	0.0328	0.03	0.058	0.06
	Channel 11	15.30	20.2	-0.068	0.0333	0.03	0.0589	0.06
GSM 850 +WI-FI						0.16		0.24
GSM 1900 WI-FI						0.23		0.39
WCDMA 850 +WI-FI						0.18		0.27
WCDMA 1700 +WI-FI						0.68		1.15

Table 7: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; GPRS Class 10, Back of Phone 25mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GPRS 850MHz	Channel 128	31.10						
	Channel 190	30.94	20.0	-0.040	0.118	0.12	0.162	0.16
	Channel 251	30.95						
GPRS 1900MHz	Channel 512	28.68						
	Channel 661	28.63	20.0	-0.051	0.257	0.26	0.431	0.44
	Channel 810	28.65						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	20.1	-0.017	0.034	0.03	0.061	0.06
	Channel 11	14.90						
GPRS 850 +WI-FI						0.15		0.22
GPRS 1900 +WI-FI						0.29		0.50

Table 8: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; EDGE Class 10, Back of Phone 25mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
EDGE 850MHz	Channel 128	25.72						
	Channel 190	25.55	20.0	-0.098	0.0443	0.05	0.0606	0.06
	Channel 251	25.44						
EDGE 1900MHz	Channel 512	24.72						
	Channel 661	24.61	20.0	0.048	0.118	0.12	0.195	0.20
	Channel 810	24.72						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	20.1	-0.017	0.034	0.03	0.061	0.06
	Channel 11	14.90						
EDGE 850 +WI-FI						0.08		0.12
EDGE1900 +WI-FI						0.15		0.26

Table 9: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; HSDPA, Back of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
HSDPA 1700 (subtest 4)	Channel 1312	24.35	19.5	-0.128	0.633	0.65	1.07	1.10
	Channel 1413	24.17	19.5	0.041	0.547	0.55	0.923	0.92
	Channel 1513	24.44	19.5	-0.154	0.352	0.36	0.596	0.62
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	20.1	-0.017	0.034	0.03	0.061	0.06
	Channel 11	14.90						
HSDPA 1700 +WI-FI						0.68		1.16

Table 10: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; HSPA, Back of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
HSPA 850 (subtest 3)	Channel 4132	23.99						
	Channel 4180	24.32	19.8	-0.230	0.140	0.15	0.193	0.20
	Channel 4233	23.86						
HSPA 1700 (subtest 2)	Channel 1312	24.29	19.6	-0.075	0.675	0.69	1.13	1.15
	Channel 1413	24.15	19.5	-0.088	0.618	0.63	1.04	1.06
	Channel 1513	24.39	19.6	-0.046	0.390	0.39	0.660	0.67
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79	20.1	-0.017	0.034	0.03	0.061	0.06
	Channel 11	14.90						
HSPA 850 +WI-FI						0.18		0.26
HSPA 1700 +WI-FI						0.72		1.21

Table 11: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Highest Body with Battery 2								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850MHz	Channel 128	33.20						
	Channel 190	33.04	20.0	0.001	0.151	0.15	0.209	0.21
	Channel 251	33.03						
GSM 1900MHz	Channel 512	30.64						
	Channel 661	30.56	20.0	-0.088	0.265	0.27	0.444	0.45
	Channel 810	30.56						
WCDMA 850	Channel 4132	23.98						
	Channel 4180	24.05	19.9	0.040	0.141	0.14	0.193	0.19
	Channel 4233	23.87						
WCDMA 1700	Channel 1312	23.92	19.6	-0.159	0.523	0.54	0.861	0.89
	Channel 1413	23.92						
	Channel 1513	24.13						
WI-FI 2450 802.11b 1 Mbps	Channel 1	14.61						
	Channel 6	14.79						
	Channel 11	14.90	18.3	-0.007	0.0131	0.01	0.0236	0.02
GSM 850 +WI-FI						0.16		0.23
GSM 1900 WI-FI						0.28		0.47
WCDMA 850 +WI-FI						0.15		0.21
WCDMA 1700 +WI-FI						0.55		0.91

Table 12: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

References

- [1] CENELEC, en62209-1:2006 “Human Exposure to Radio Frequency Fields From Hand - Held and Body - Mounted Wireless Communication Devices – Human Models, Instrumentation, and Procedures”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300MHz – 3GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 9/1/2010 5:10:01 PM

DUT: Dipole 2450 MHz; Type: D2450V2; Procedure Notes: 2450 MHz System Performance Check /
 Dipole Sn# 766; PM1 Power = 200 mW;
 Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.7°C; Room Temp@ SPC = 20.2°C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.49, 4.49, 4.49); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 11.3 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm

Reference Value = 79.2 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 23.1 W/kg

SAR(1 g) = 11 mW/g; SAR(10 g) = 5.06 mW/g

Maximum value of SAR (measured) = 12.3 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm



Reference Value = 79.2 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 23.0 W/kg

SAR(1 g) = 11 mW/g; SAR(10 g) = 5.07 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm,
 dz=5mm

Maximum value of SAR (measured) = 12.6 mW/g

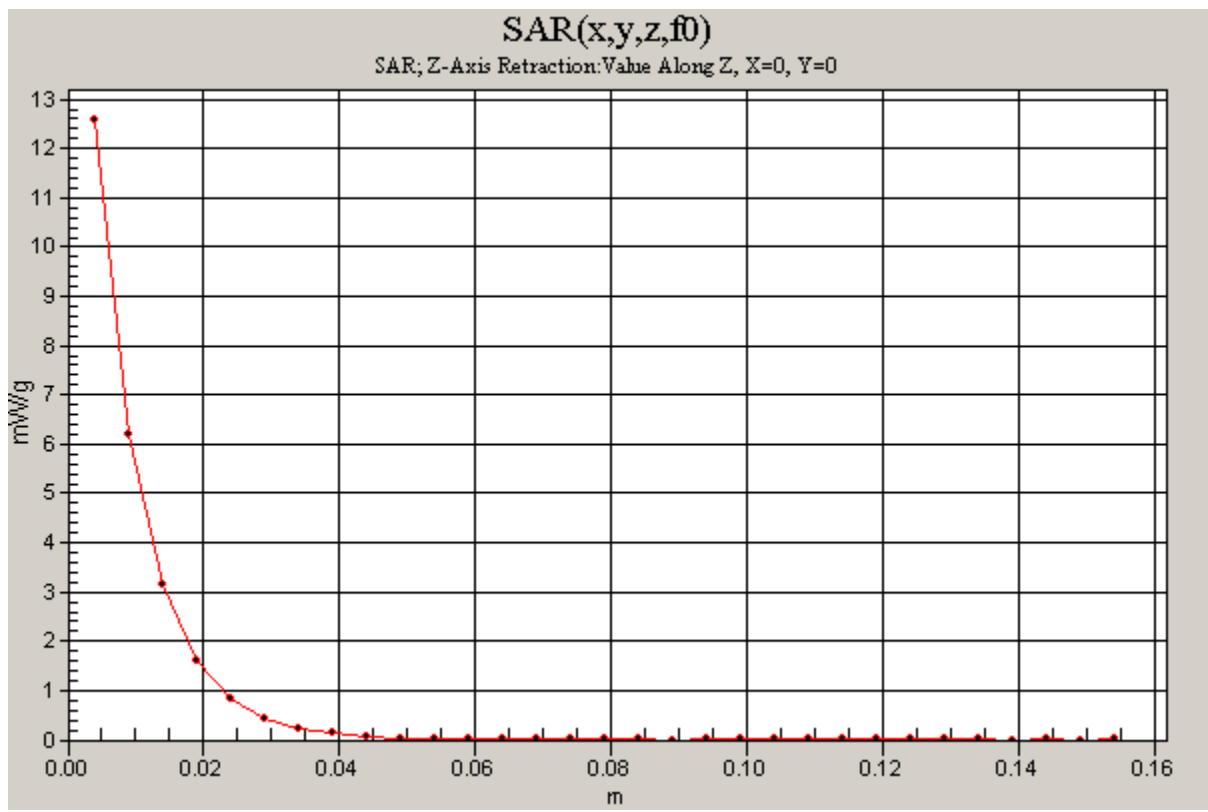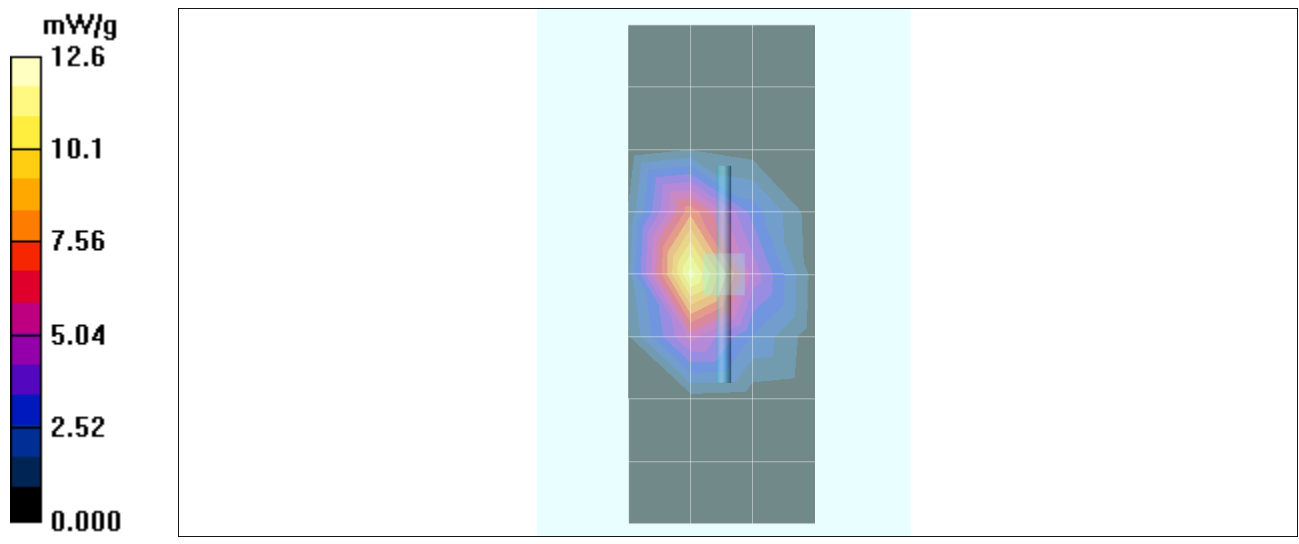

Date/Time: 8/31/2010 4:45:23 PM

DUT: Dipole 2450 MHz; Type: D2450V2; Procedure Notes: 2450 MHz System Performance Check / Dipole Sn# 766; PM1 Power = 200 mW
 Sim.Temp@ meas = 20.2*C; Sim.Temp@ SPC = 19.9*C; Room Temp@ SPC = 20.3*C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 36.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:



- Probe: ES3DV3 - SN3183; ConvF(4.49, 4.49, 4.49); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.0 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 68.6 V/m; Power Drift = 0.043 dB
 Peak SAR (extrapolated) = 23.9 W/kg
SAR(1 g) = 11.4 mW/g; SAR(10 g) = 5.22 mW/g
 Maximum value of SAR (measured) = 12.8 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 68.6 V/m; Power Drift = 0.043 dB
 Peak SAR (extrapolated) = 24.0 W/kg
SAR(1 g) = 11.4 mW/g; SAR(10 g) = 5.21 mW/g
 Maximum value of SAR (measured) = 12.5 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 12.9 mW/g

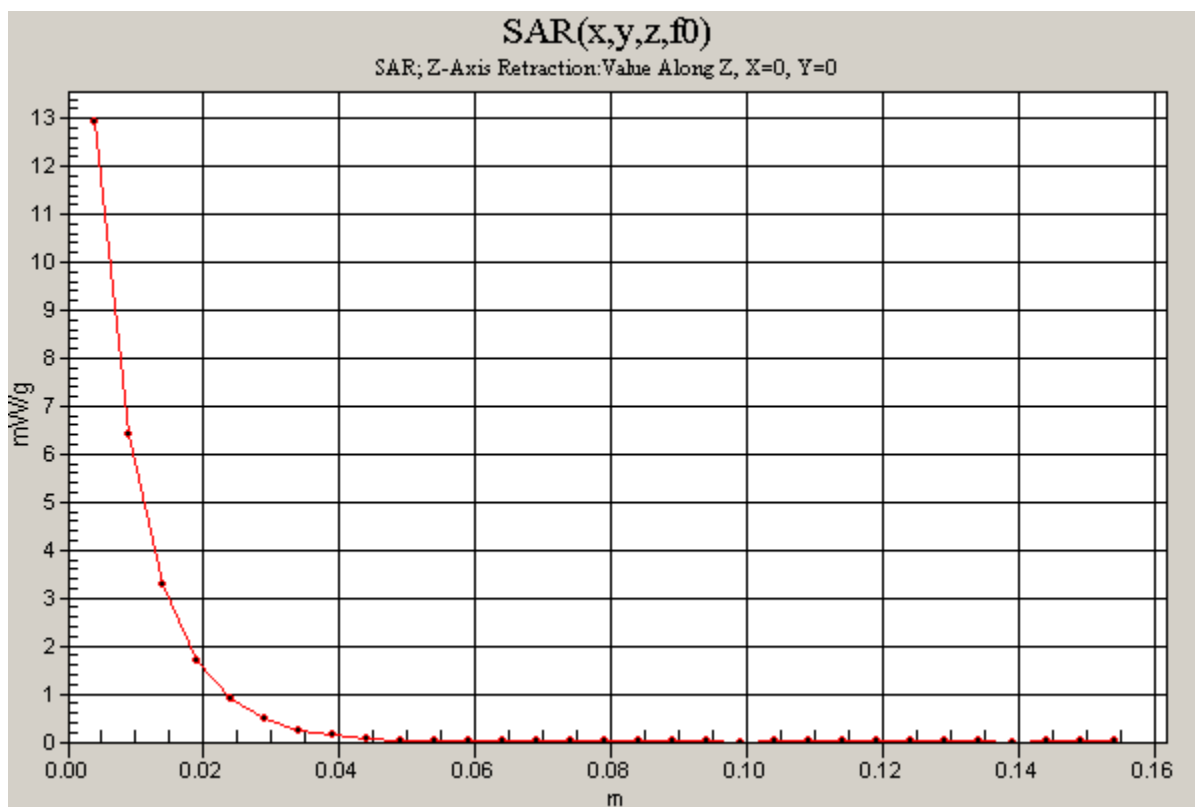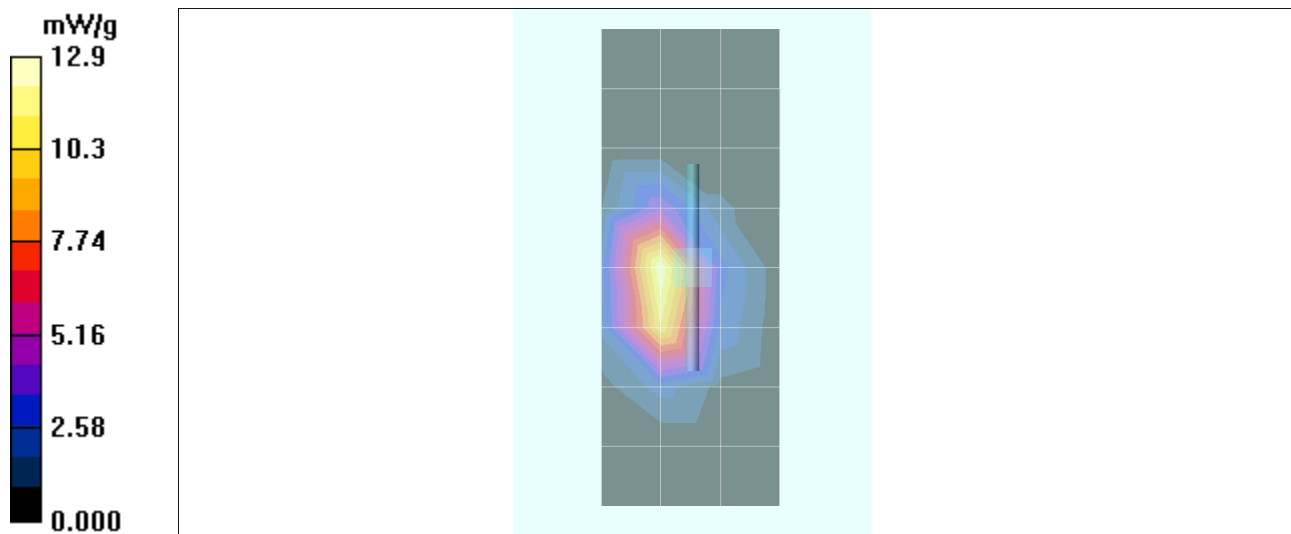

Date/Time: 9/2/2010 6:56:00 AM

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check /
 Dipole Sn# 259tr; PM1 Power = 200 mW
 Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.9°C; Room Temp@ SPC = 19.8°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:



- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 8.53 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 75.7 V/m; Power Drift = -0.016 dB
 Peak SAR (extrapolated) = 14.8 W/kg
SAR(1 g) = 7.99 mW/g; SAR(10 g) = 4.19 mW/g
 Maximum value of SAR (measured) = 8.78 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 75.7 V/m; Power Drift = -0.016 dB
 Peak SAR (extrapolated) = 14.9 W/kg
SAR(1 g) = 8.02 mW/g; SAR(10 g) = 4.19 mW/g
 Maximum value of SAR (measured) = 8.83 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 8.95 mW/g

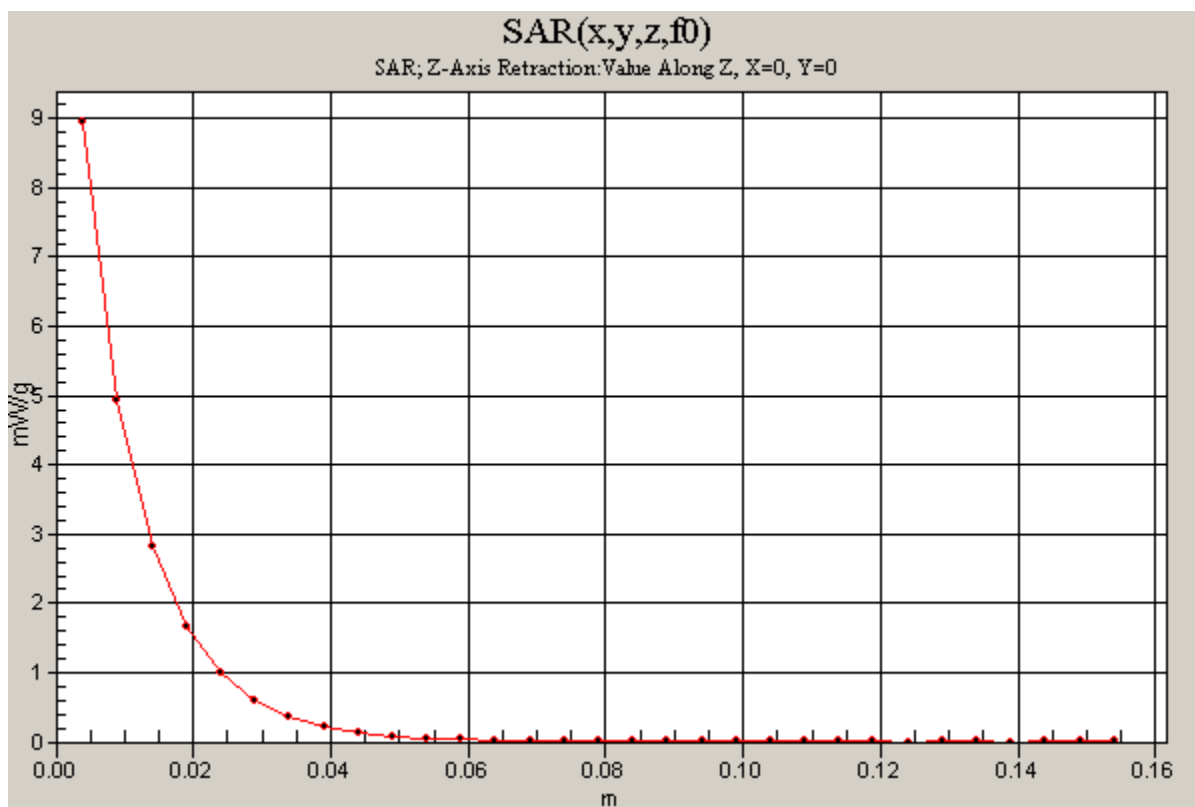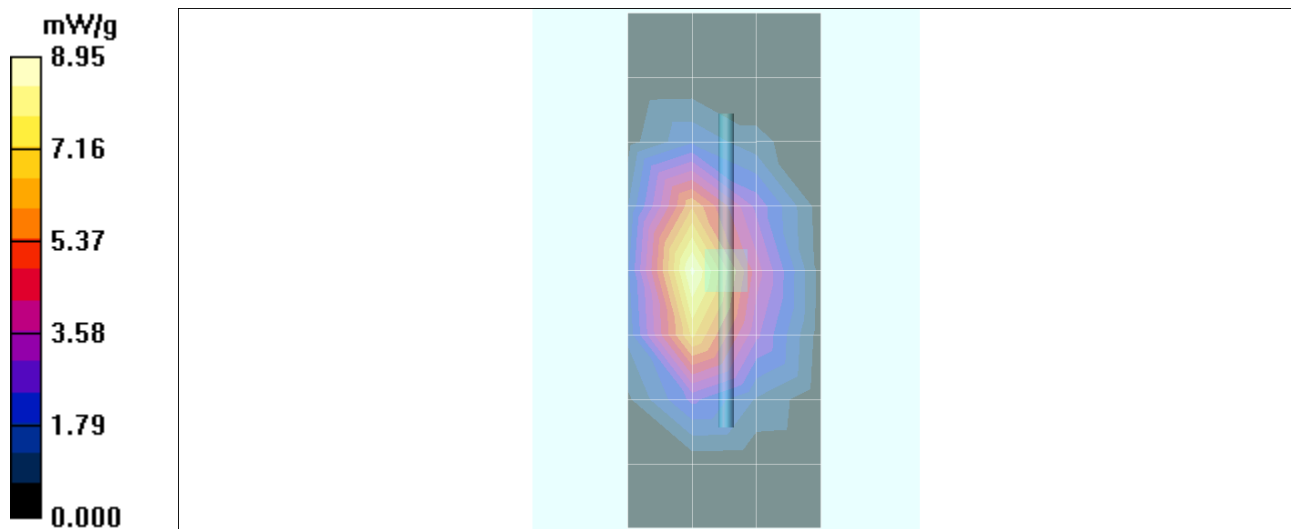

Date/Time: 9/1/2010 8:46:55 AM

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check /
 Dipole Sn# 259tr; PM1 Power = 200 mW
 Sim.Temp@ meas = 20.3*C; Sim.Temp@ SPC = 20.3*C; Room Temp@ SPC = 20.3*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 8.84 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm

Reference Value = 73.5 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 8.04 mW/g; SAR(10 g) = 4.24 mW/g

Maximum value of SAR (measured) = 8.94 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm

Reference Value = 73.5 V/m; Power Drift = -0.031 dB



Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 8.08 mW/g; SAR(10 g) = 4.24 mW/g

Maximum value of SAR (measured) = 9.00 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm,
 dz=5mm

Maximum value of SAR (measured) = 9.02 mW/g

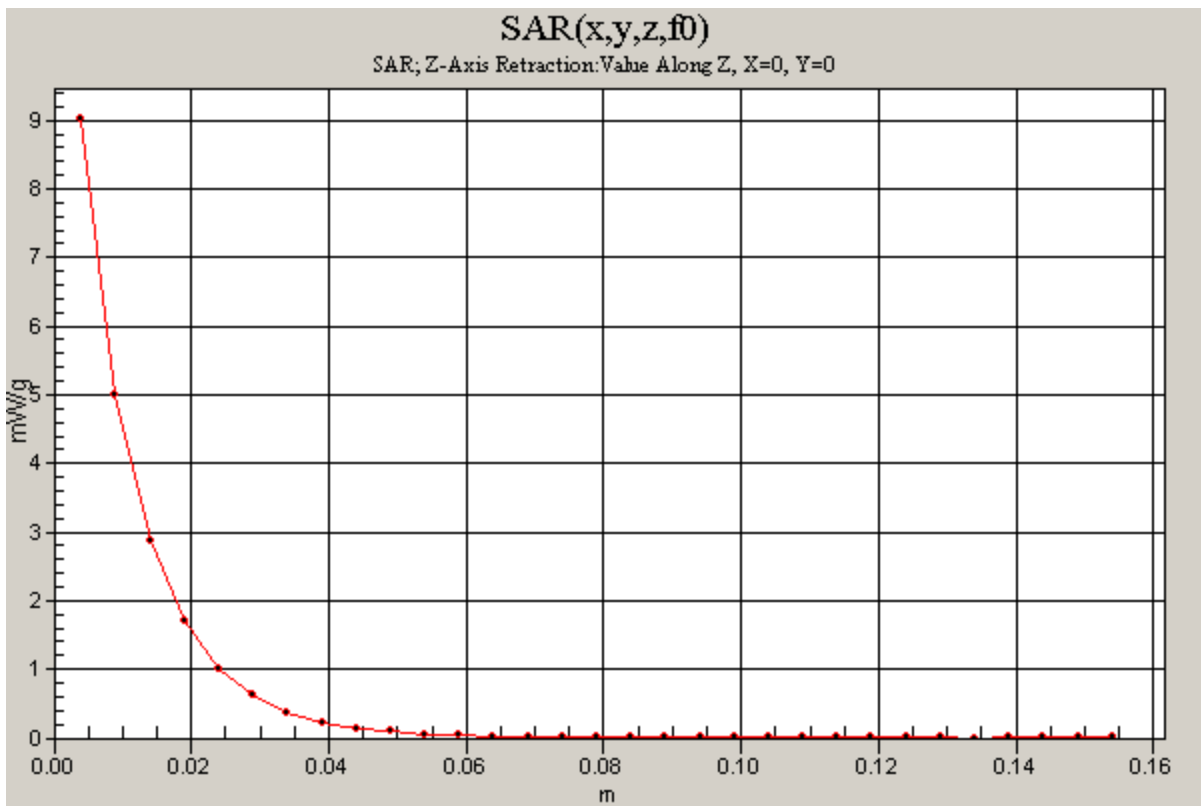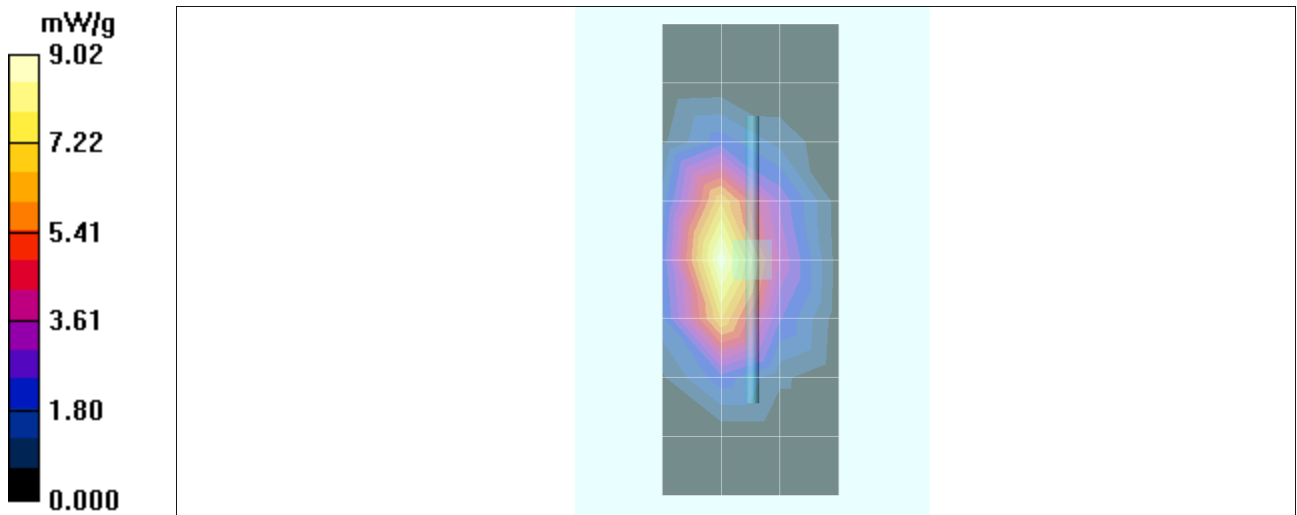

Date/Time: 8/30/2010 6:53:21 AM

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 259tr; PM1 Power = 200 mW
 Sim.Temp@ meas = 20.4*C; Sim.Temp@ SPC = 20.4*C; Room Temp@ SPC = 20.2*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 7.36 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 80.1 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 14.3 W/kg
SAR(1 g) = 7.8 mW/g; SAR(10 g) = 4.12 mW/g
 Maximum value of SAR (measured) = 8.73 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 80.1 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 14.5 W/kg
SAR(1 g) = 7.85 mW/g; SAR(10 g) = 4.14 mW/g
 Maximum value of SAR (measured) = 8.78 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 8.75 mW/g

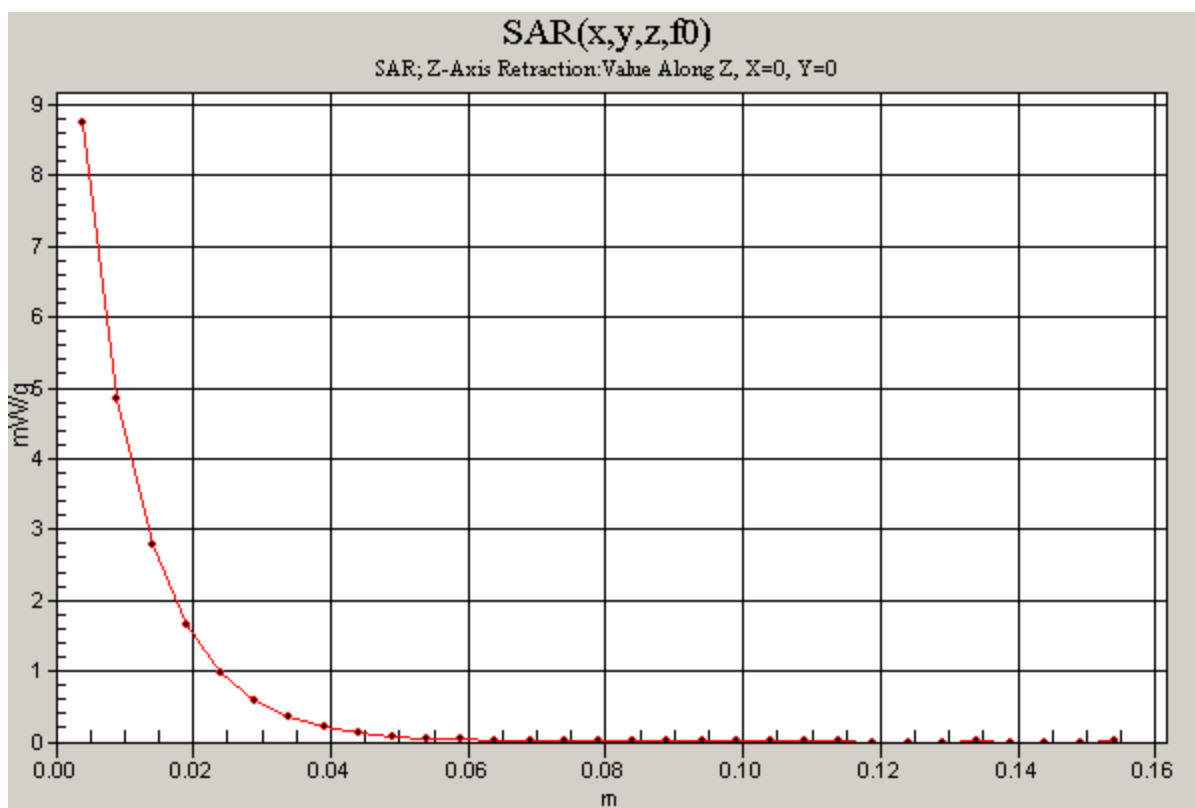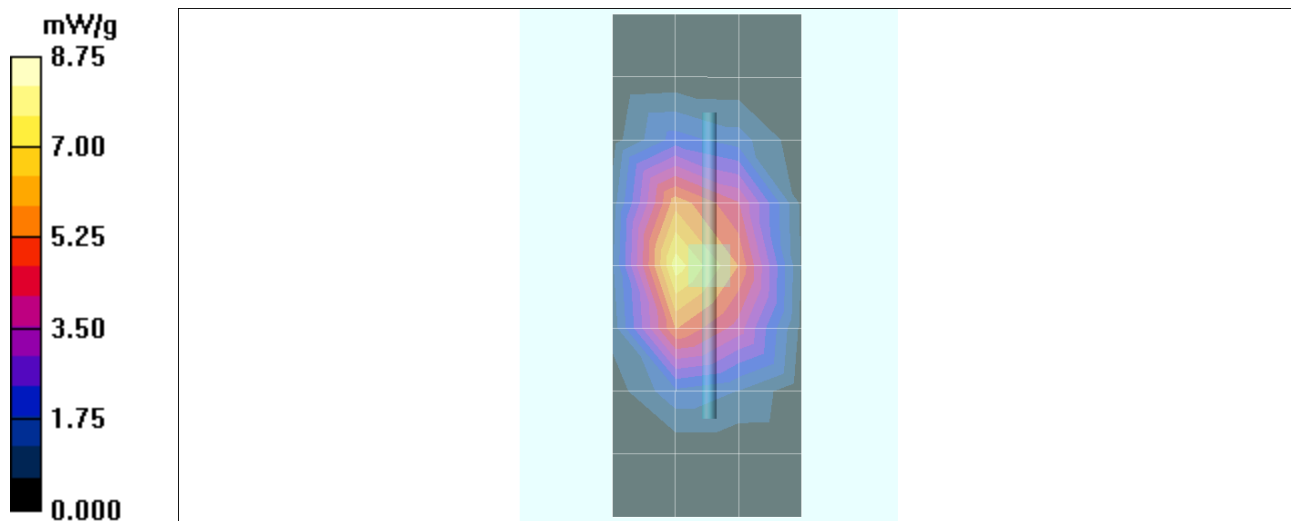

Date/Time: 8/26/2010 7:00:09 AM

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check /
 Dipole Sn# 259tr; PM1 Power = 200 mW
 Sim.Temp@ meas = 20.0*C; Sim.Temp@ SPC = 20.0*C; Room Temp@ SPC = 20.2*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 8.57 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 73.2 V/m; Power Drift = -0.062 dB
 Peak SAR (extrapolated) = 14.8 W/kg
SAR(1 g) = 7.94 mW/g; SAR(10 g) = 4.18 mW/g
 Maximum value of SAR (measured) = 8.78 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 73.2 V/m; Power Drift = -0.062 dB
 Peak SAR (extrapolated) = 14.7 W/kg
SAR(1 g) = 7.95 mW/g; SAR(10 g) = 4.19 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 8.84 mW/g

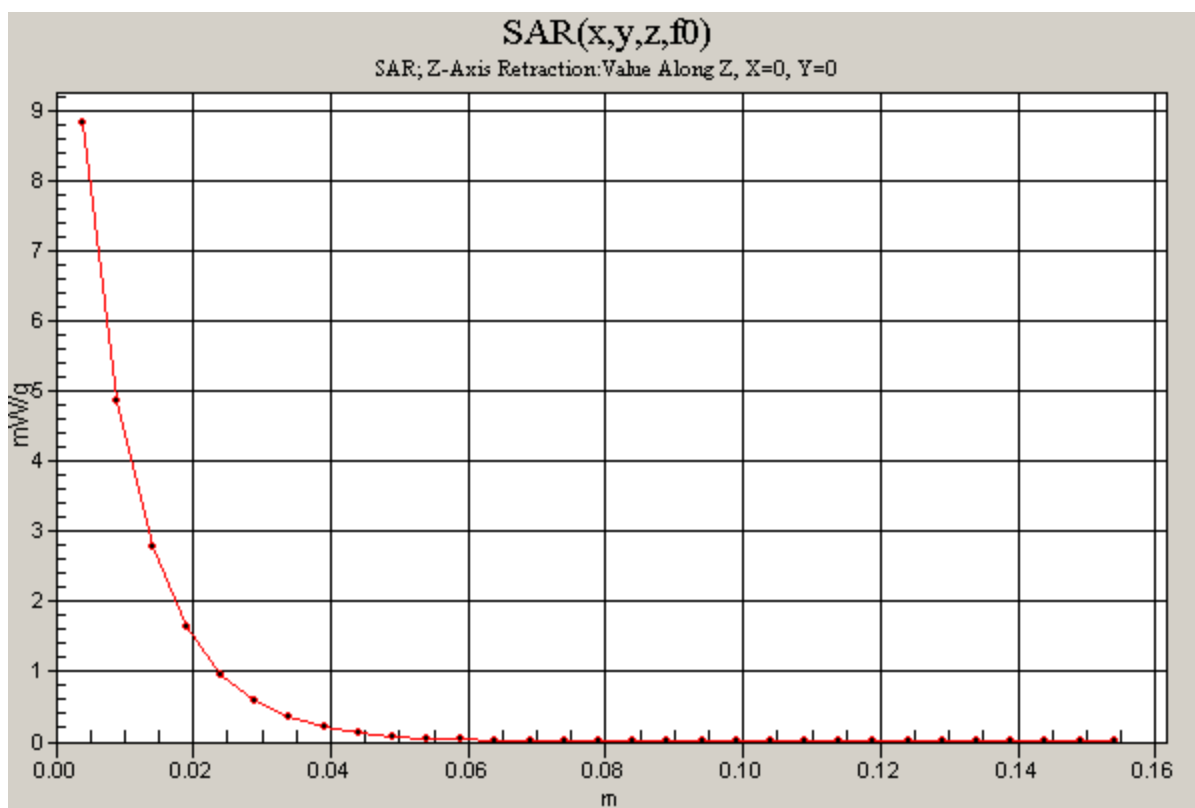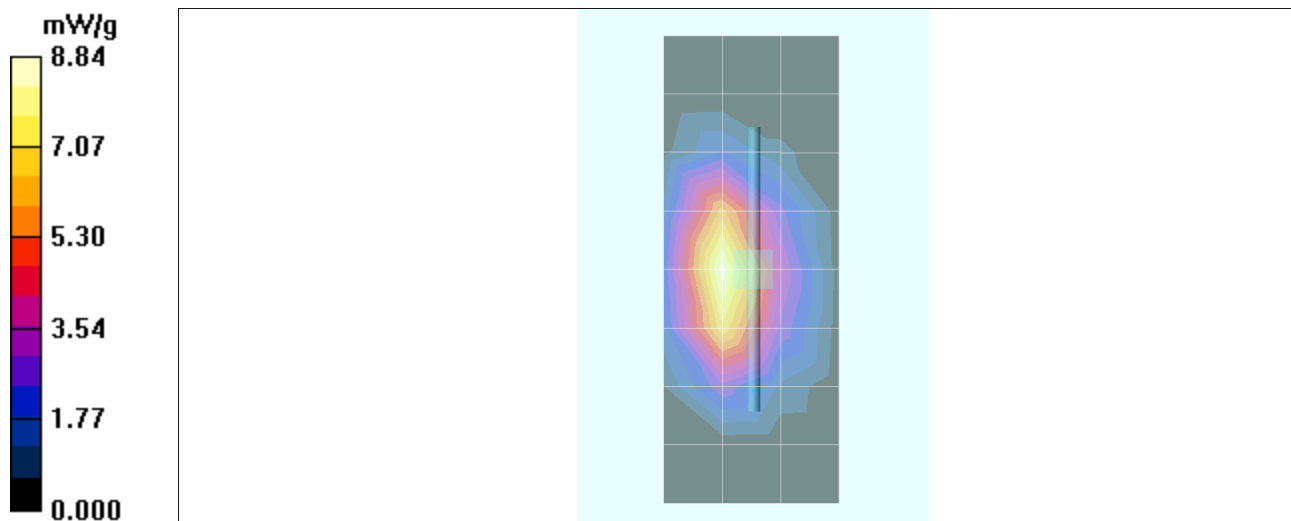

Date/Time: 8/25/2010 9:36:53 AM

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check /
 Dipole Sn# 259tr; PM1 Power = 200mW
 Sim.Temp@ meas=20.1*C; Sim.Temp@ SPC = 20.0*C; Room Temp@ SPC = 20.0*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 8.27 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.0 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 7.94 mW/g; SAR(10 g) = 4.16 mW/g

Maximum value of SAR (measured) = 8.76 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.0 V/m; Power Drift = -0.069 dB



Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 7.95 mW/g; SAR(10 g) = 4.17 mW/g

Maximum value of SAR (measured) = 8.58 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 8.79 mW/g

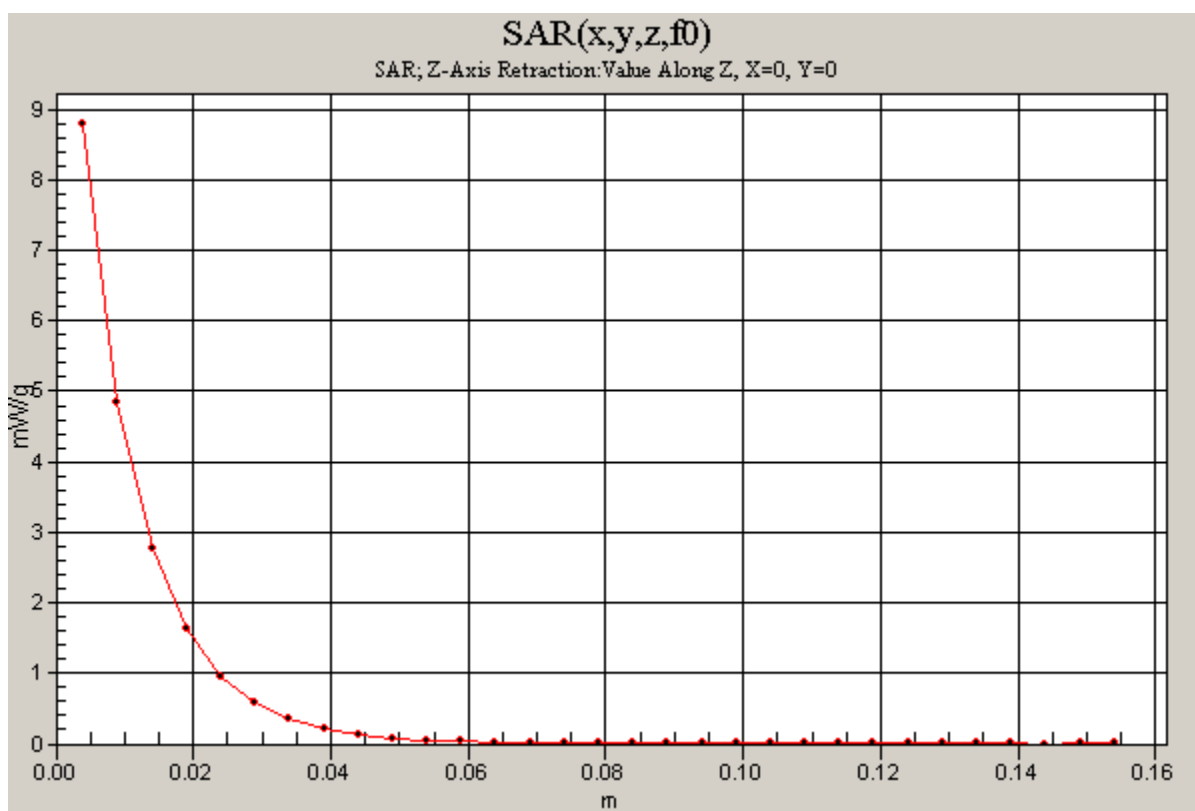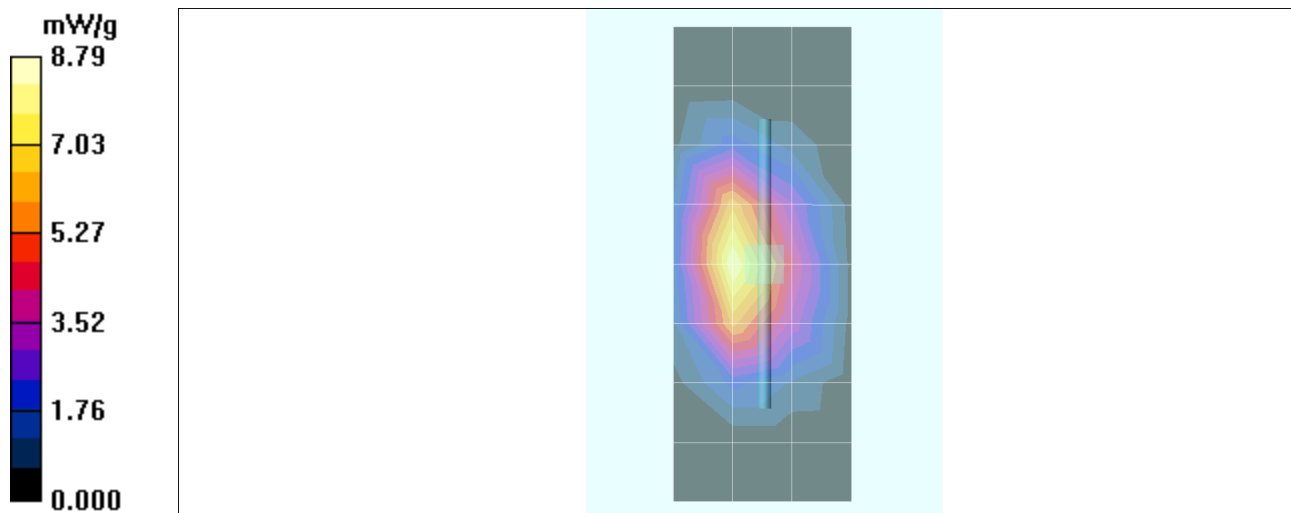

Date/Time: 8/31/2010 9:03:27 AM

DUT: Dipole 835 MHz; Type: D835V2; Procedure Notes: 835 MHz System Performance Check /
 Dipole Sn# 420tr; PM1 Power = 200mW
 Sim.Temp@ meas = 20.6*C; Sim.Temp@ SPC = 20.1*C; Room Temp@ SPC = 20.3*C

Communication System: CW - Dipole; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(6.11, 6.11, 6.11); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.88 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 49.0 V/m; Power Drift = -0.013 dB
 Peak SAR (extrapolated) = 3.01 W/kg
SAR(1 g) = 1.99 mW/g; SAR(10 g) = 1.29 mW/g
 Maximum value of SAR (measured) = 2.15 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 49.0 V/m; Power Drift = -0.013 dB
 Peak SAR (extrapolated) = 2.98 W/kg
SAR(1 g) = 1.98 mW/g; SAR(10 g) = 1.28 mW/g
 Maximum value of SAR (measured) = 2.13 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 2.14 mW/g

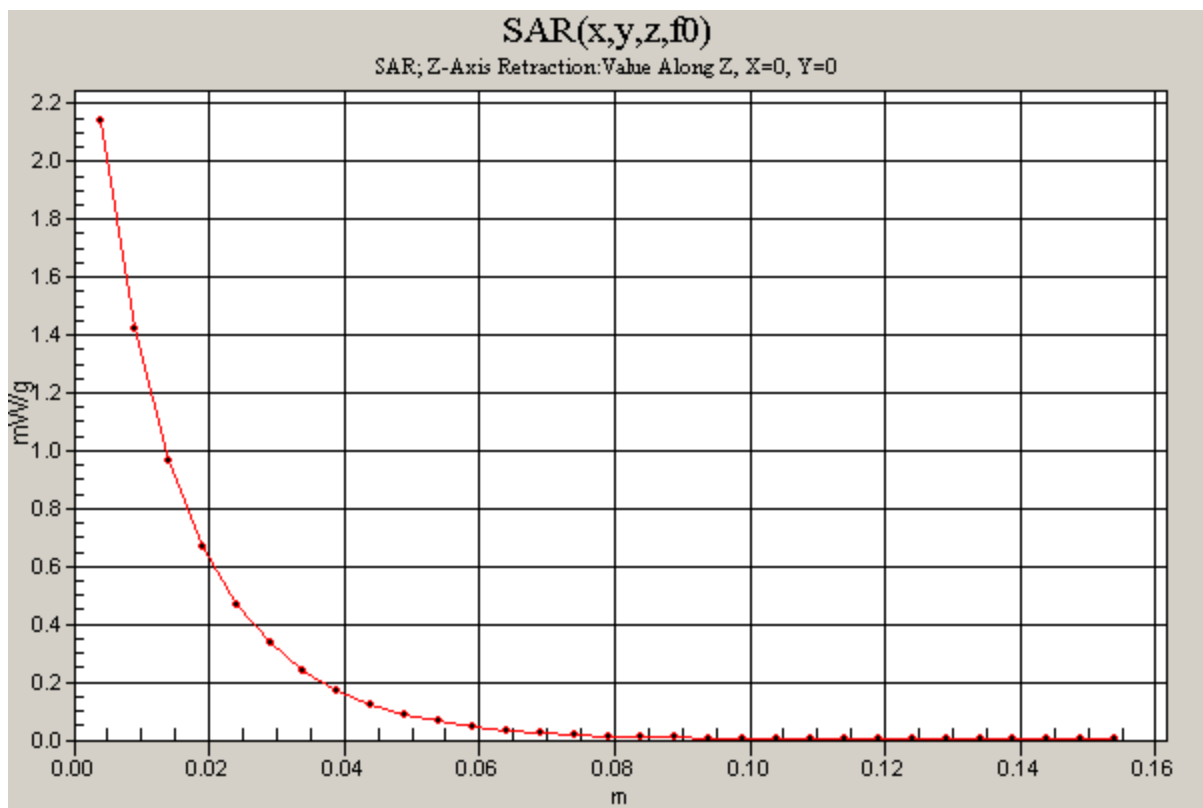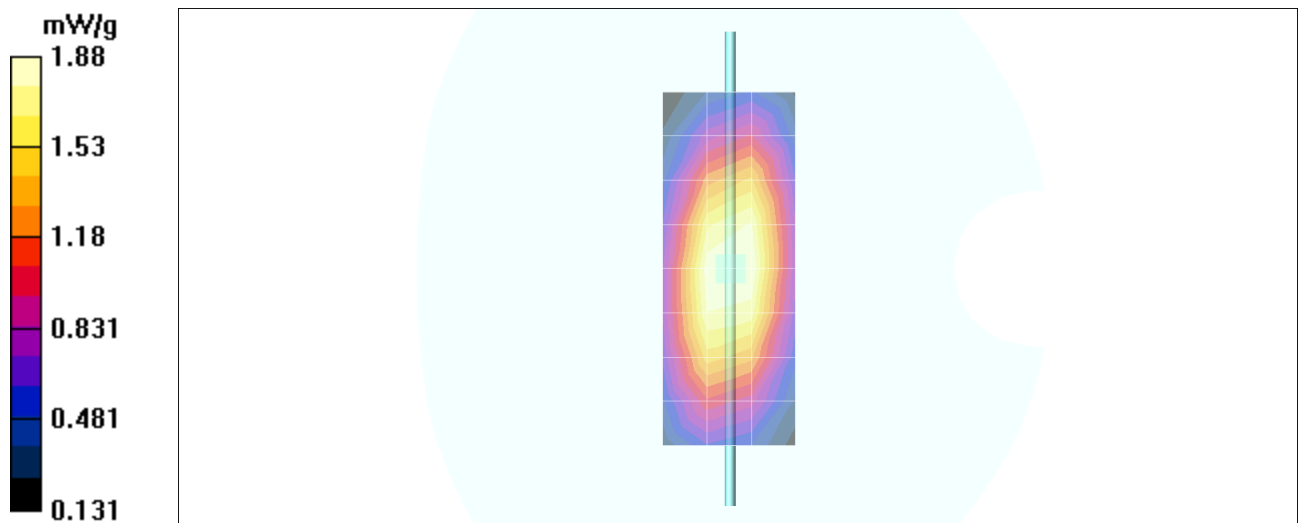

Date/Time: 8/24/2010 8:30:32 AM

DUT: Dipole 835 MHz; Type: D835V2; Procedure Notes: 835 MHz System Performance Check /
 Dipole Sn# 420tr; PM1 Power = 200mW
 Sim.Temp@ meas = 20.0*C; Sim.Temp@ SPC = 20.0*C; Room Temp@ SPC = 20.0*C

Communication System: CW - Dipole; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(6.11, 6.11, 6.11); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.03 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 48.0 V/m; Power Drift = -0.076 dB
 Peak SAR (extrapolated) = 2.96 W/kg
SAR(1 g) = 1.97 mW/g; SAR(10 g) = 1.27 mW/g
 Maximum value of SAR (measured) = 2.12 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 48.0 V/m; Power Drift = -0.076 dB
 Peak SAR (extrapolated) = 2.96 W/kg
SAR(1 g) = 1.96 mW/g; SAR(10 g) = 1.27 mW/g
 Maximum value of SAR (measured) = 2.09 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

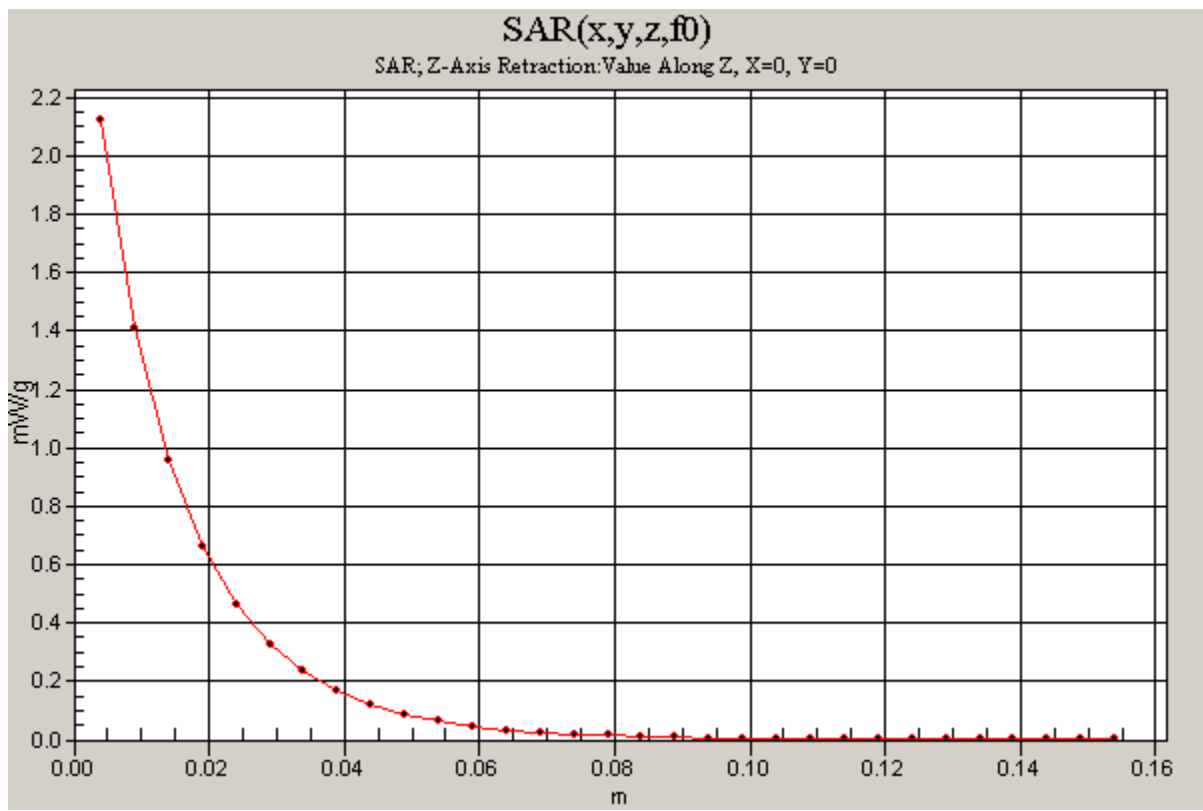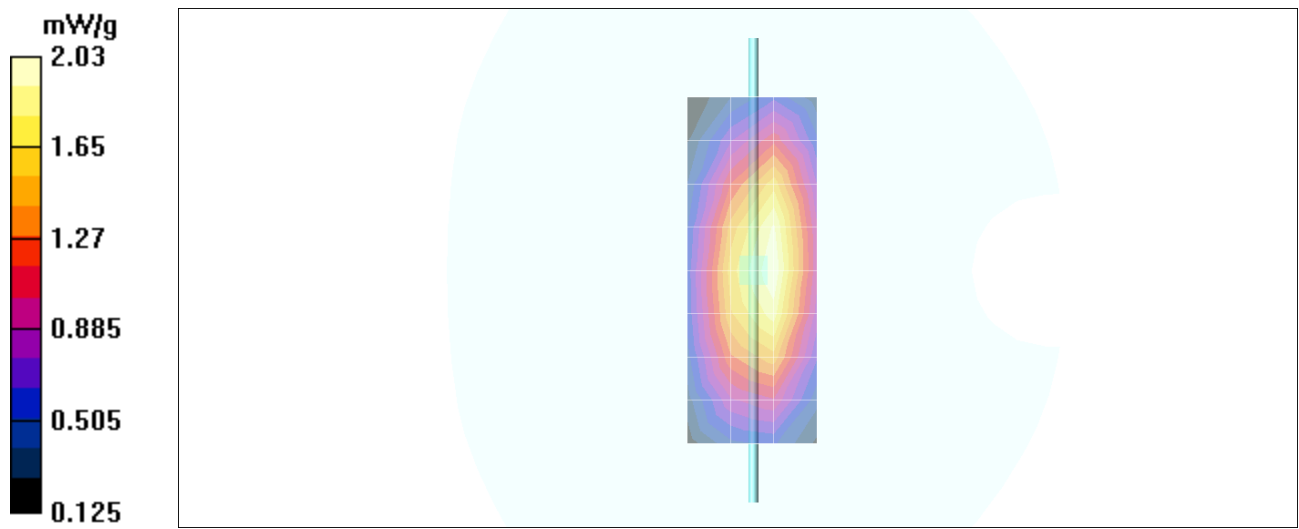

Date/Time: 8/22/2010 6:49:56 AM

DUT: Dipole 835 MHz; Type: D835V2; Procedure Notes: 835 MHz System Performance Check /
 Dipole Sn# 420tr; PM1 Power = 200 mW
 Sim.Temp@ meas = 20.3°C; Sim.Temp@ SPC = 20.3°C; Room Temp@ SPC = 20.6°C

Communication System: CW - Dipole; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:



- Probe: ES3DV3 - SN3037; ConvF(6.25, 6.25, 6.25); Calibrated: 9/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 9/17/2009
- Phantom: R1_Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (4x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.95 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 48.4 V/m; Power Drift = -0.039 dB
 Peak SAR (extrapolated) = 2.69 W/kg
SAR(1 g) = 1.94 mW/g; SAR(10 g) = 1.3 mW/g
 Maximum value of SAR (measured) = 2.11 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 48.4 V/m; Power Drift = -0.039 dB
 Peak SAR (extrapolated) = 2.77 W/kg
SAR(1 g) = 1.92 mW/g; SAR(10 g) = 1.26 mW/g
 Maximum value of SAR (measured) = 2.08 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Maximum value of SAR (measured) = 2.12 mW/g

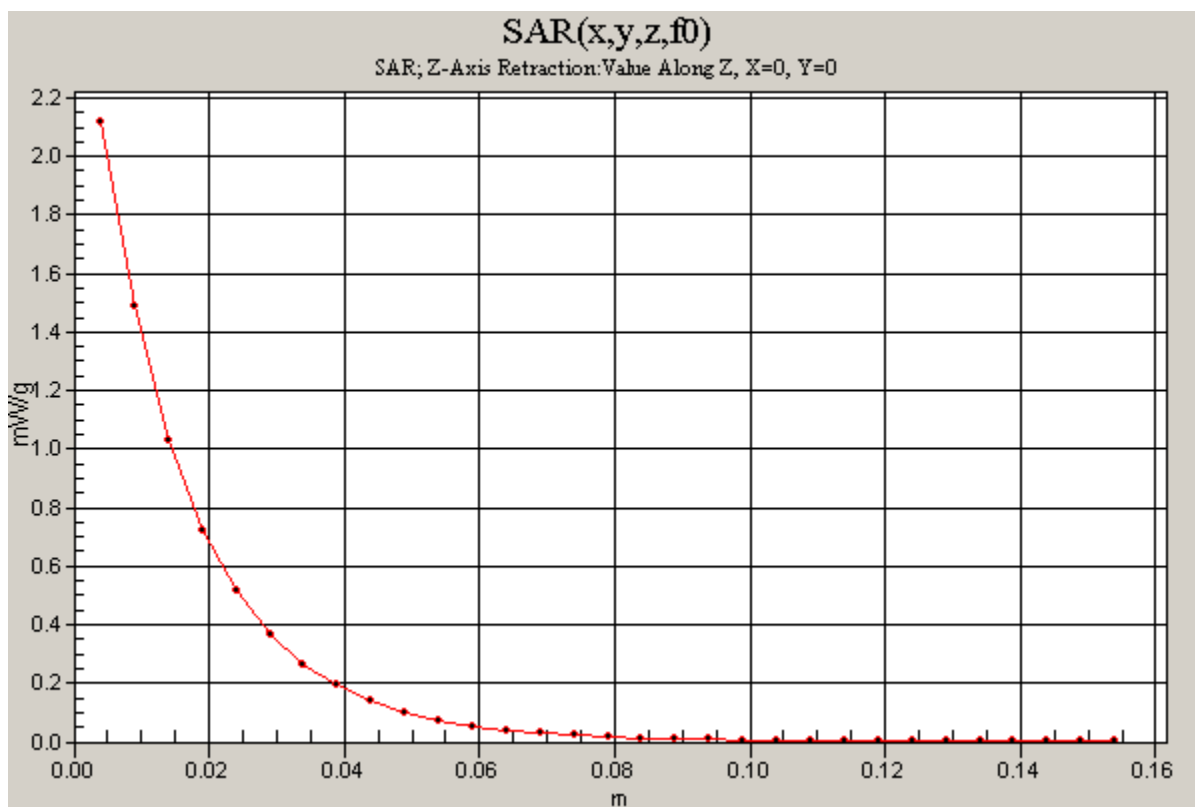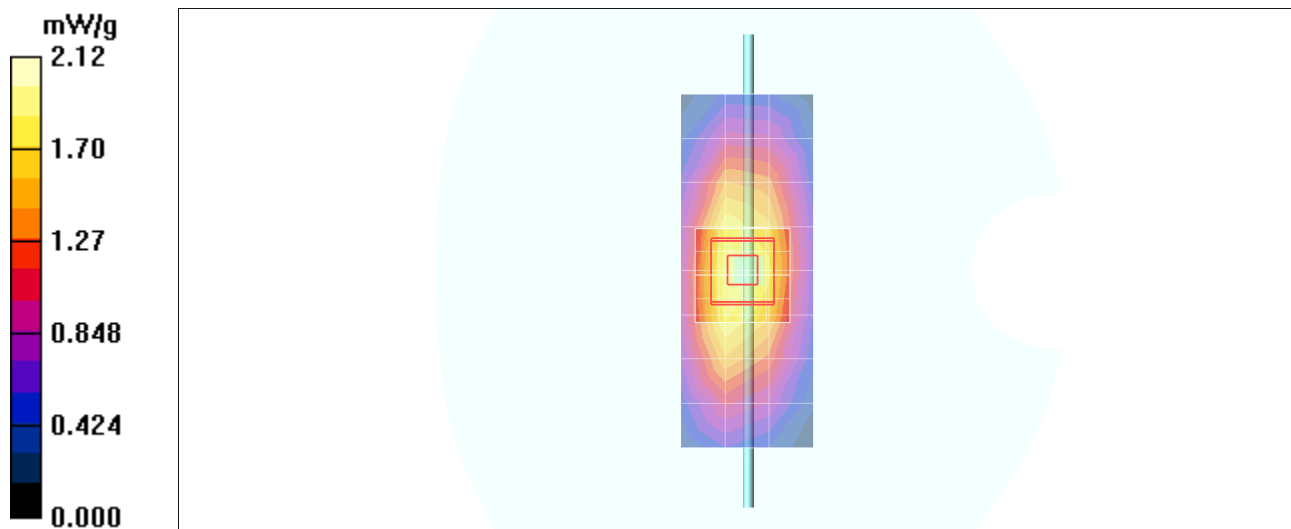

Date/Time: 9/2/2010 5:11:43 PM

DUT: Dipole 2450 MHz; Type: D2450V2; Procedure Notes: 2450 MHz System Performance Check /
 Dipole Sn# 766; PM1 Power = 200 mW
 Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.2°C; Room Temp@ SPC = 19.8°C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium: VALIDATION Only; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.49, 4.49, 4.49); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Daily SPC Check/Dipole Area Scan (9x4x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.2 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm

Reference Value = 63.6 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 24.4 W/kg

SAR(1 g) = 11.5 mW/g; SAR(10 g) = 5.24 mW/g

Maximum value of SAR (measured) = 12.8 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0: Measurement grid: dx=8mm,
 dy=8mm, dz=5mm

Reference Value = 63.6 V/m; Power Drift = 0.003 dB



Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 11.5 mW/g; SAR(10 g) = 5.24 mW/g

Maximum value of SAR (measured) = 12.5 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31): Measurement grid: dx=20mm, dy=20mm,
 dz=5mm

Maximum value of SAR (measured) = 13.0 mW/g

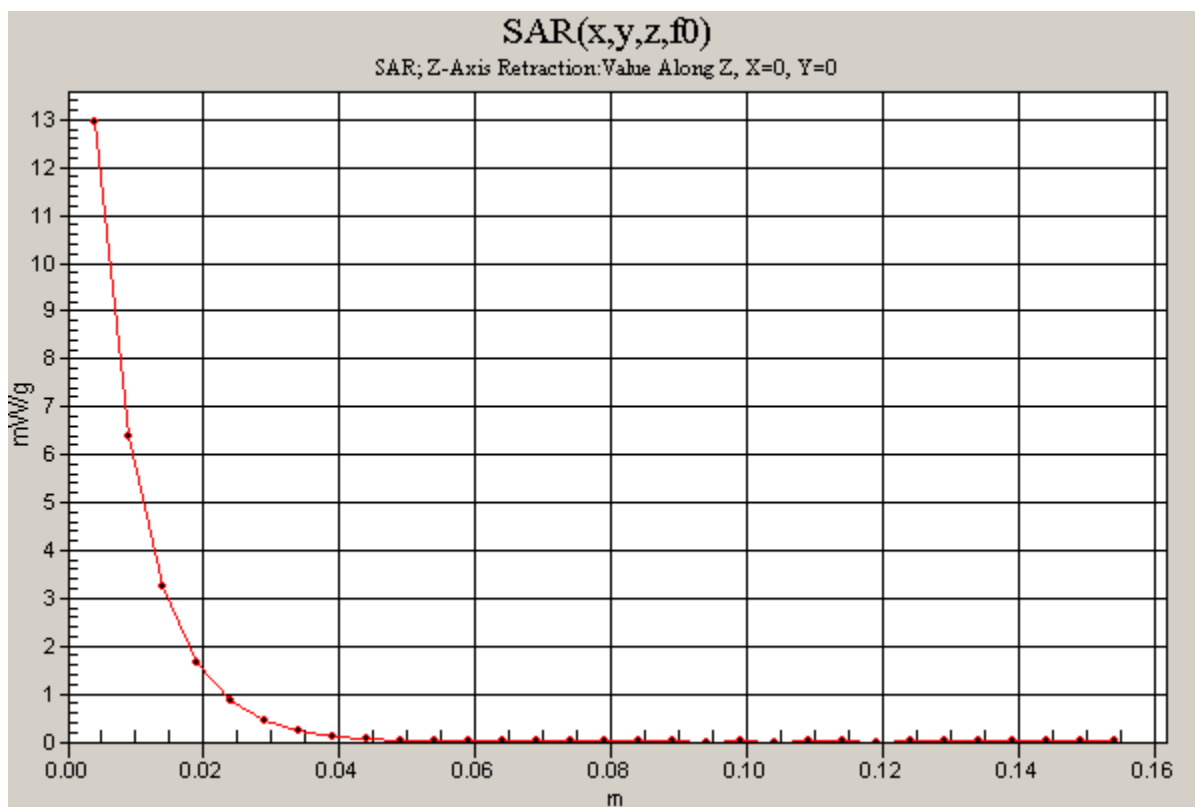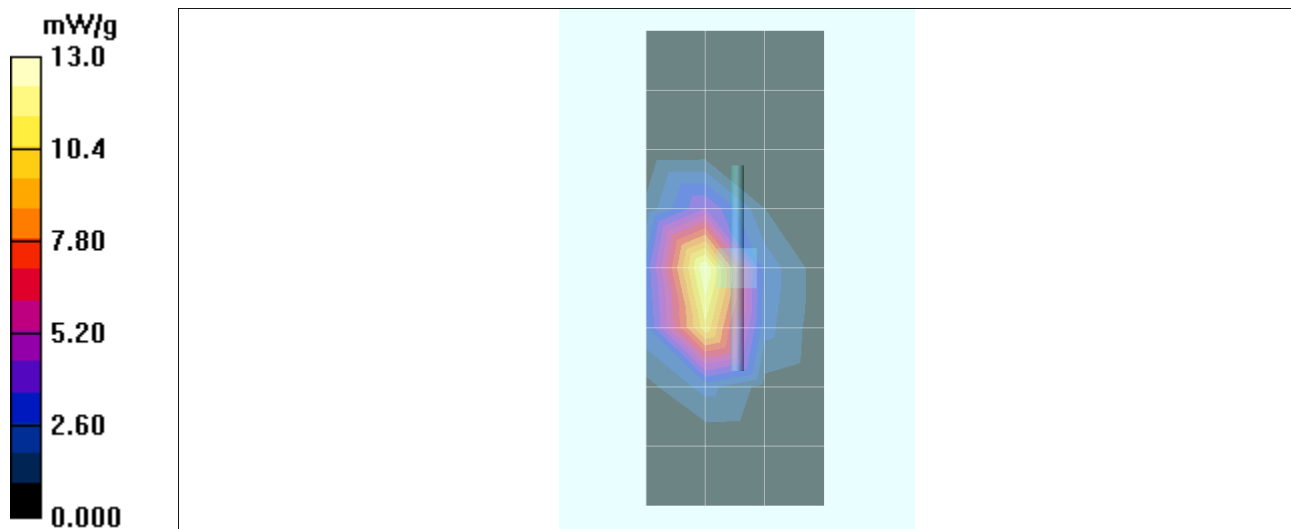

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 9/1/2010 2:10:03 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: ALWAYS UP; Antenna Position: INTERNAL;
Battery Model #: SNN5843A; DEVICE POSITION: tilt

Communication System: 3G/WCDMA 1700; Frequency: 1732.5 MHz; Communication System
Channel Number: 1413; Duty Cycle: 1:1

Medium: 1730 Glycol Head; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

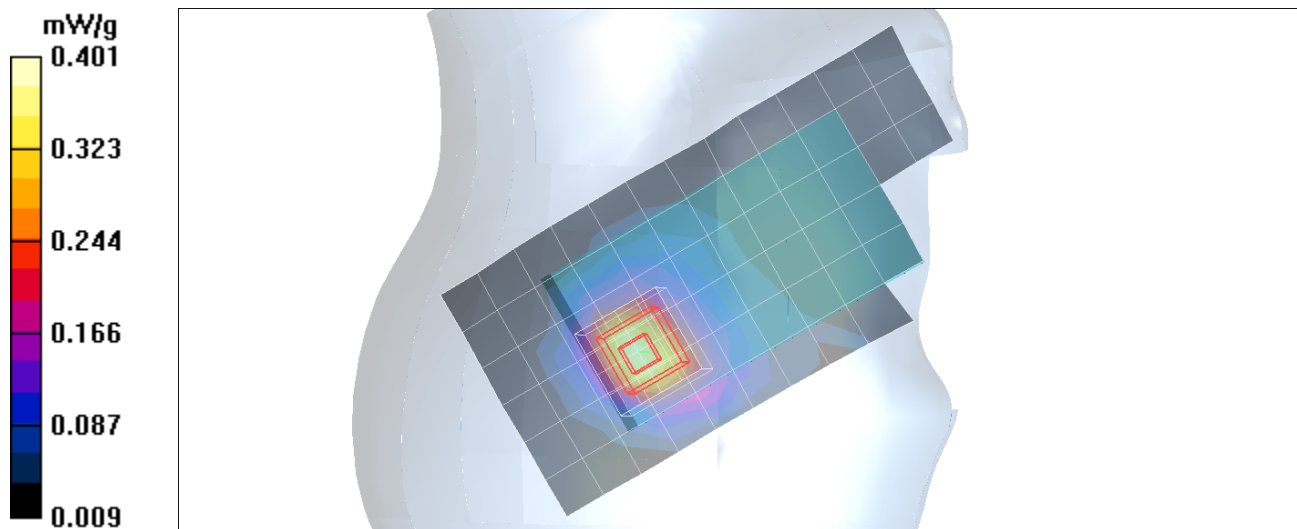

Date/Time: 8/22/2010 10:40:11 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: ALL UP; Antenna Position: INTERNAL; Battery Model #: SNN5843A; DEVICE POSITION: TILT

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Communication System Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.26, 6.26, 6.26); Calibrated: 9/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn440; Calibrated: 2/17/2010
- Phantom: R#4 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1131;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.295 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

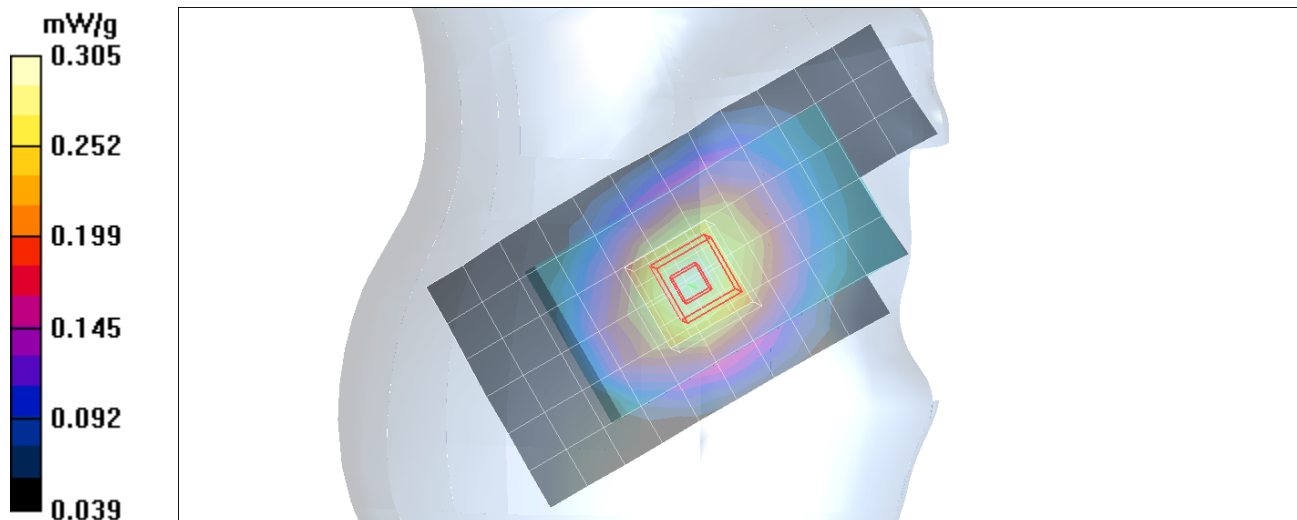

Date/Time: 8/25/2010 11:54:23 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 0; Antenna Position: internal; Battery Model #: SNN5843A; DEVICE POSITION: tilt

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8.3

Medium: Regular Glycol Head 1750/1880; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 mW/g


Left Head Template/5x5x7 Zoom Scan (<=3GHz) - to correct max outside (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

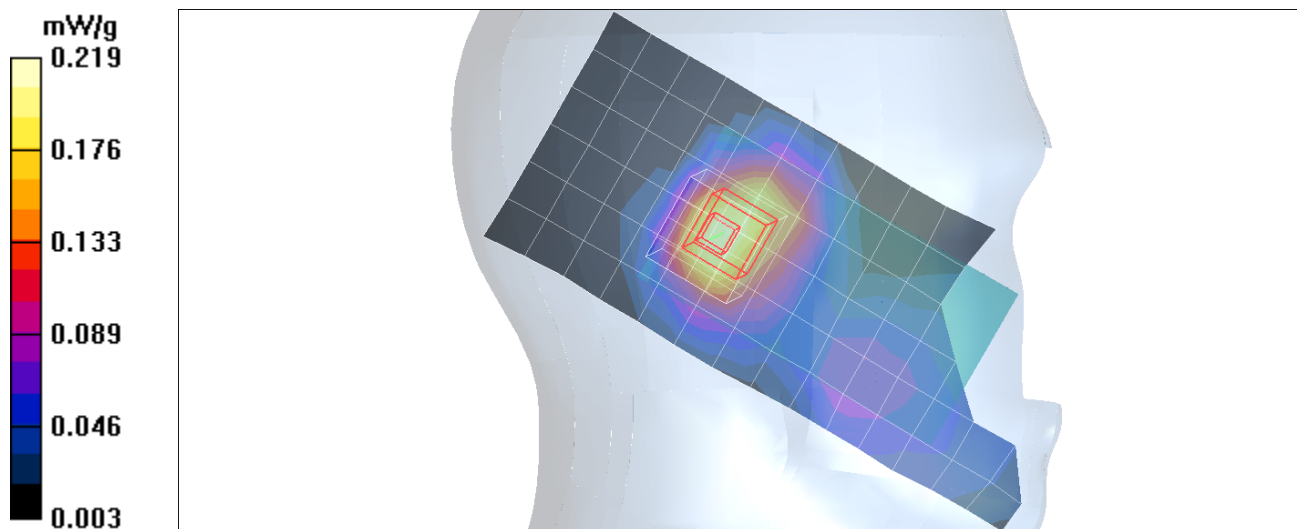

Date/Time: 8/22/2010 12:03:19 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 5; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5843A; DEVICE POSITION TILT

Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8.3

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.26, 6.26, 6.26); Calibrated: 9/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn440; Calibrated: 2/17/2010
- Phantom: R#4 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1131;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.316 mW/g

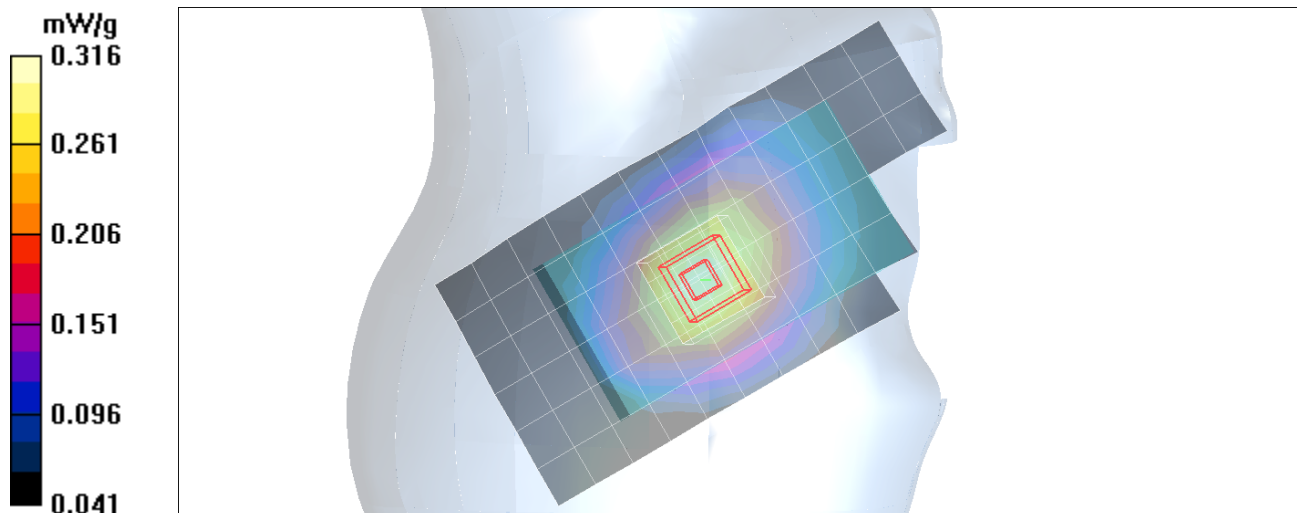

Date/Time: 9/1/2010 11:14:36 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: continuous; Antenna Position: Internal; Battery Model #: SNN5843A; DEVICE POSITION: Cheek

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.49, 4.49, 4.49); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.245 mW/g


Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.246 mW/g

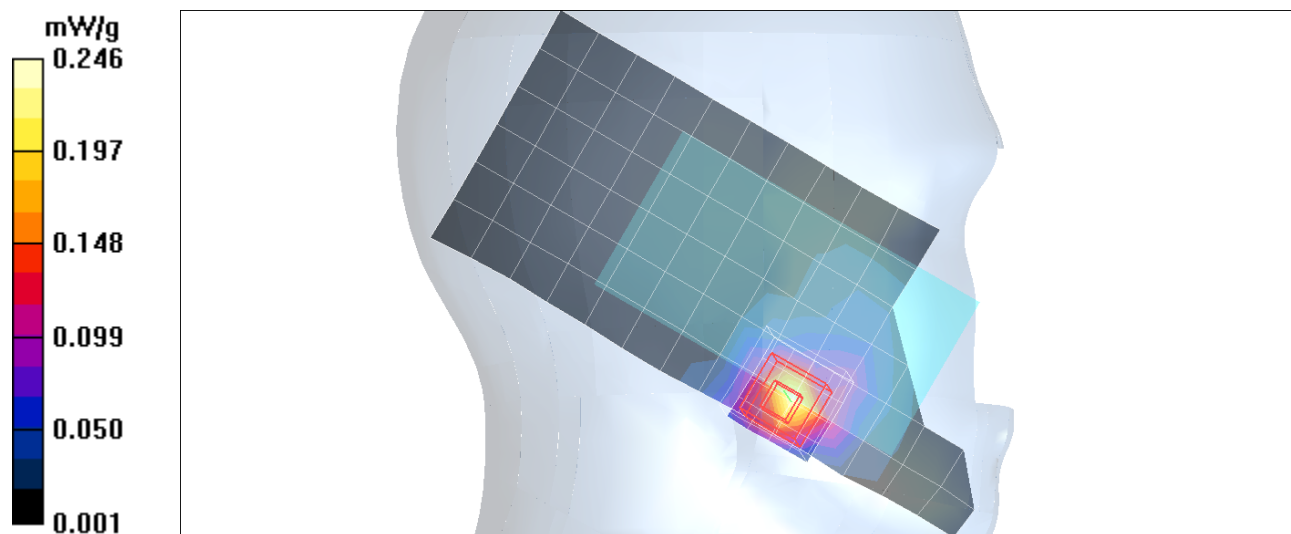

Date/Time: 9/1/2010 11:30:20 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: ALWAYS UP; Antenna Position: INTERNAL;
Battery Model #: SNN5843A; DEVICE POSITION: CHEEK

Communication System: 3G/WCDMA 1700; Frequency: 1732.5 MHz; Communication System
Channel Number: 1413; Duty Cycle: 1:1

Medium: 1730 Glycol Head; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.531 mW/g


Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

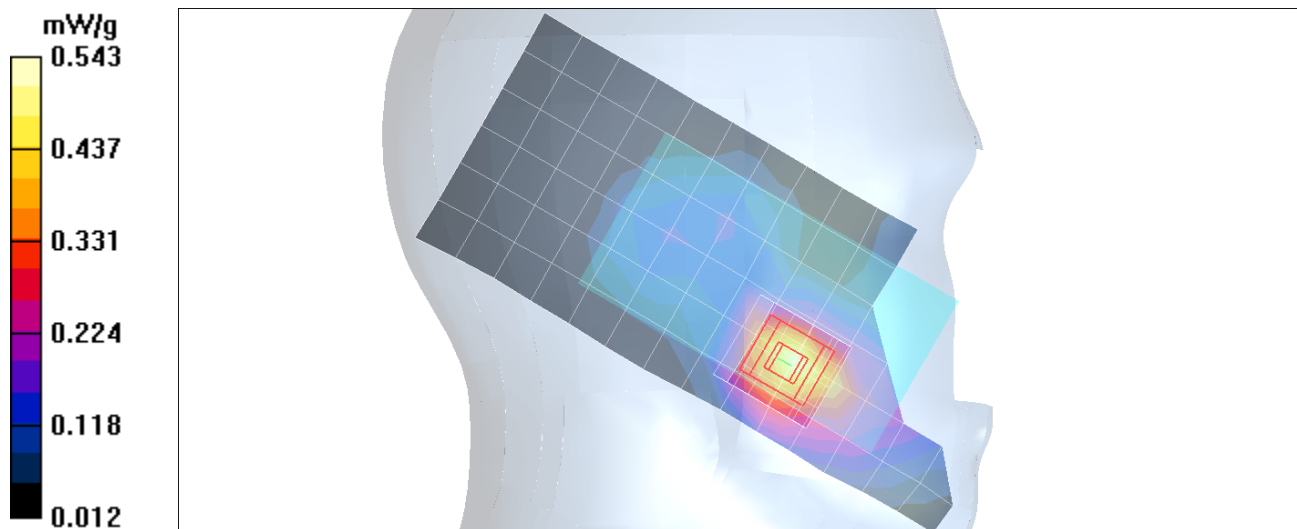

Date/Time: 8/22/2010 10:22:58 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: ALL UP; Antenna Position: INTERNAL; Battery Model #: SNN5843A; DEVICE POSITION: CHEEK

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Communication System Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.26, 6.26, 6.26); Calibrated: 9/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn440; Calibrated: 2/17/2010
- Phantom: R#4 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1131;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

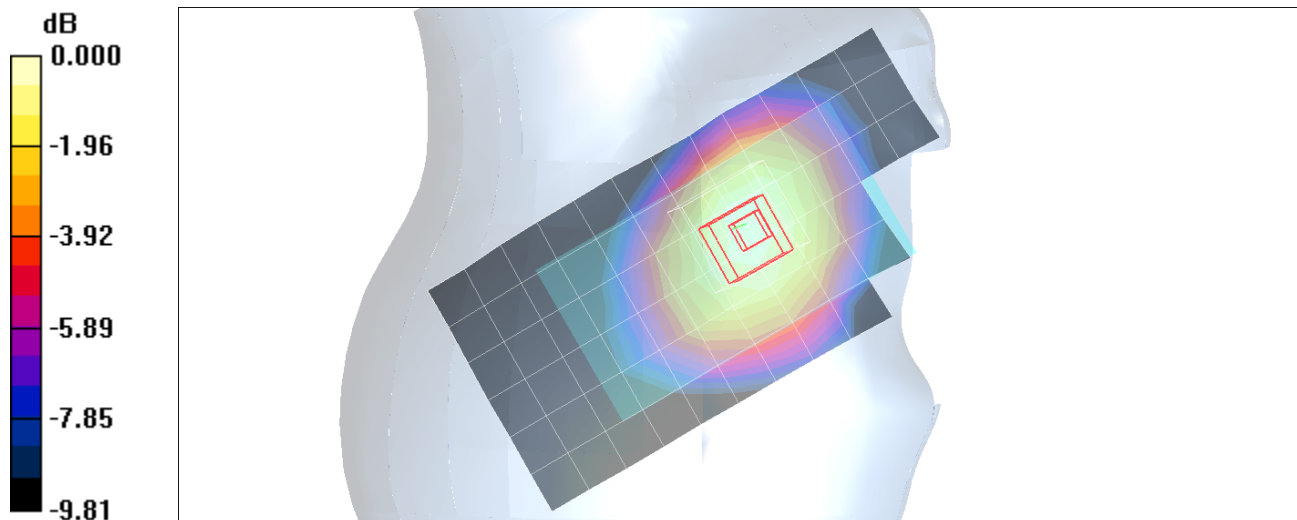

0 dB = 0.354mW/g

Date/Time: 8/25/2010 2:52:57 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 0; Antenna Position: internal; Battery Model #: SNN5875A; DEVICE POSITION: CHEEK

Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8.3

Medium: Regular Glycol Head 1750/1880; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(5.05, 5.05, 5.05); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.667 mW/g


Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

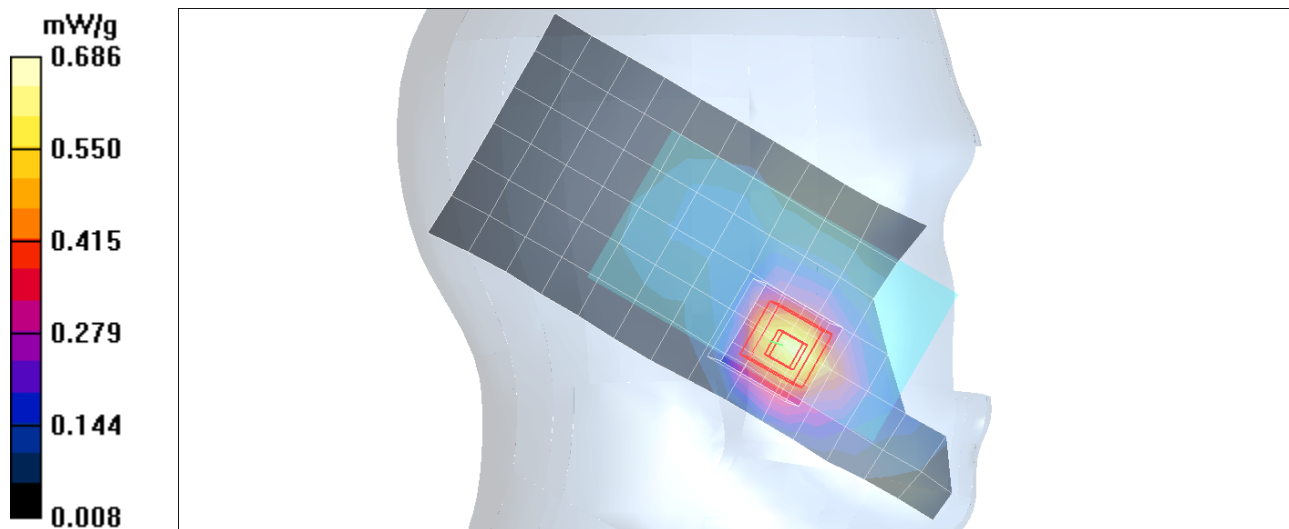

Date/Time: 8/22/2010 1:10:07 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 5; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5875A; DEVICE POSITION CHEEK

Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8.3

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.26, 6.26, 6.26); Calibrated: 9/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn440; Calibrated: 2/17/2010
- Phantom: R#4 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1131;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.398 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.394 mW/g

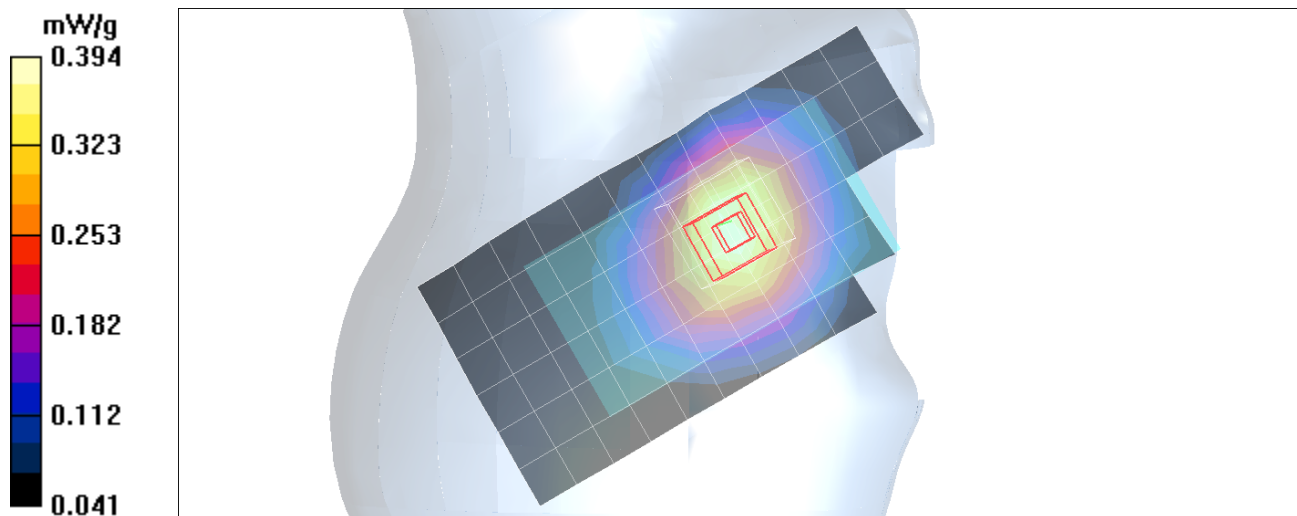

Date/Time: 8/31/2010 10:21:52 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: continuous; Antenna Position: Internal; Battery Model #: SNN5843A; DEVICE POSITION: Tilt;

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 36.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.49, 4.49, 4.49); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_ Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Template/Area Scan - Normal Extended (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.020 mW/g


Right Head Template/5x5x7 Zoom Scan (<=3GHz) - to correct max outside (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.95 V/m; Power Drift = -0.220 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00973 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

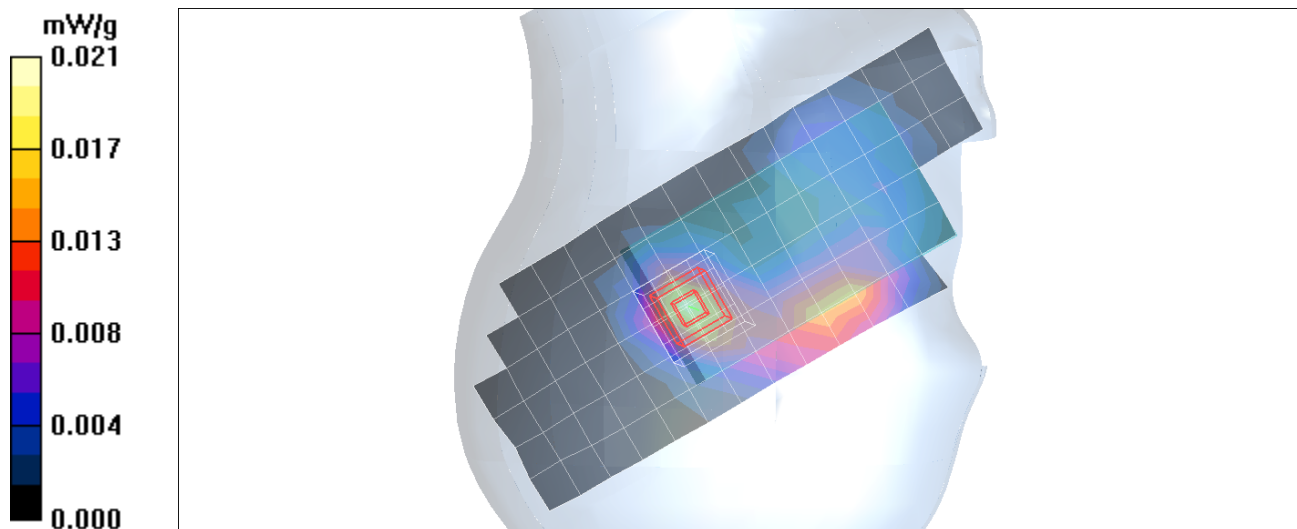

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 9/2/2010 2:20:57 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: ALL UP; Antenna Position: INTERNAL; Battery Model #: SNN5843A; DEVICE POSITION: Back of Phone 25mm away from phantom (HSPA Subtest 2)

Communication System: 3G/WCDMA 1700; Frequency: 1712.4 MHz; Communication System Channel Number: 1312; Duty Cycle: 1:1

Medium: 1730 Glycol Body; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.84, 4.84, 4.84); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 mW/g


Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.4 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.675 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

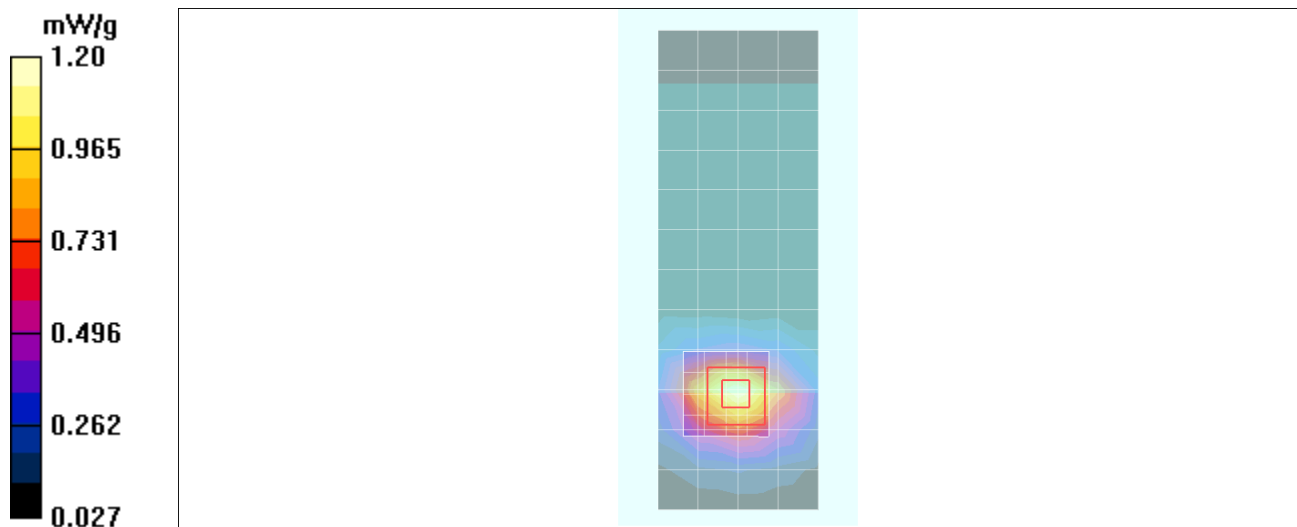

Date/Time: 8/31/2010 3:37:31 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: always up; Antenna Position: internal; Battery Model #: SNN5843A; DEVICE POSITION: BODYWORN BACK OF PHONE 25MM FROM PHANTOM ROM PHANTOM

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Communication System Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Body; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(6.15, 6.15, 6.15); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 1, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Amy Twin Phone Template/Area Scan - Normal Extended Body (15mm) (16x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.209 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.227 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.208 mW/g

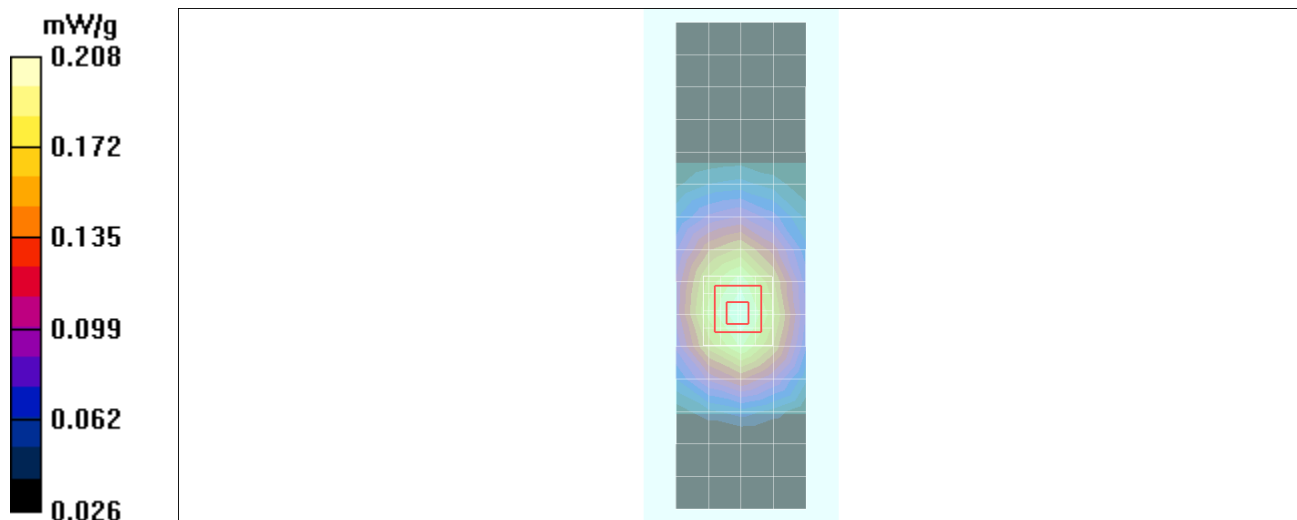

Date/Time: 9/1/2010 10:37:28 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 0; Antenna Position: internal; Battery Model #: SNN5875A; DEVICE POSITION: BODYWORN, BACK OF PHONE 25MM FROM PHANTOM

Communication System: GPRS 1900 - Class 10; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:4.15

Medium: Regular Glycol Body 1750/1880; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.84, 4.84, 4.84); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Amy Twin Phone Template/Area Scan - Normal Extended Body (15mm) (16x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.477 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

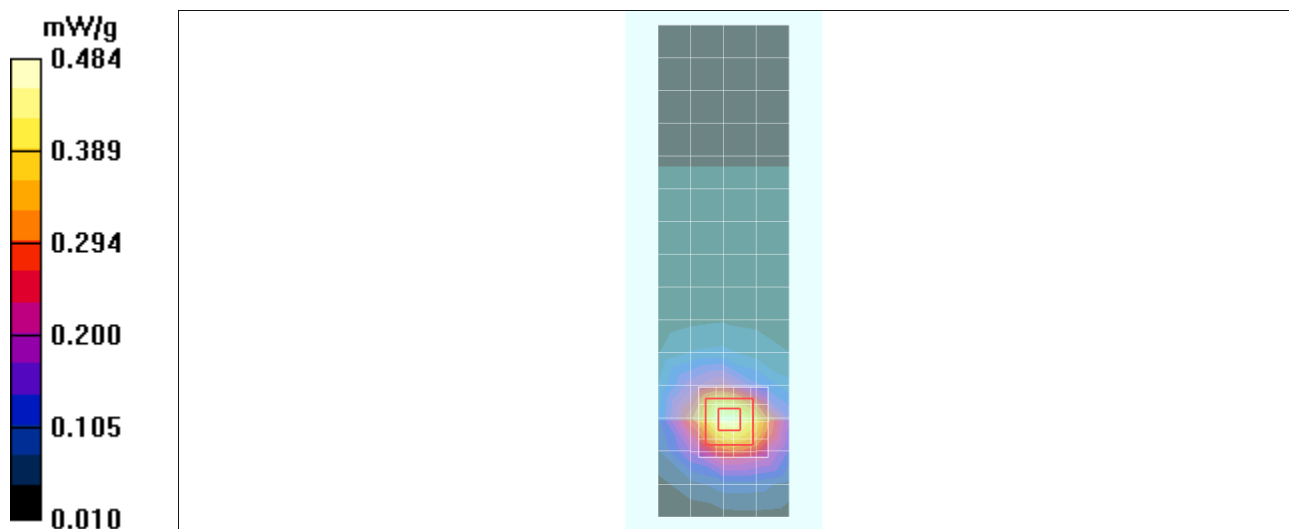

Date/Time: 8/31/2010 12:19:35 PM

Serial: TA19103KRE; Procedure Notes: Pwr Step: 5; Antenna Position: internal; Battery Model #: SNN5875A; DEVICE POSITION: BACK OF PHONE 25MM FROM PHANTOM

Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8.3

Medium: Low Freq Body; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(6.15, 6.15, 6.15); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_Section 1, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Amy Twin Phone Template/Area Scan - Normal Extended Body (15mm) (16x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.222 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

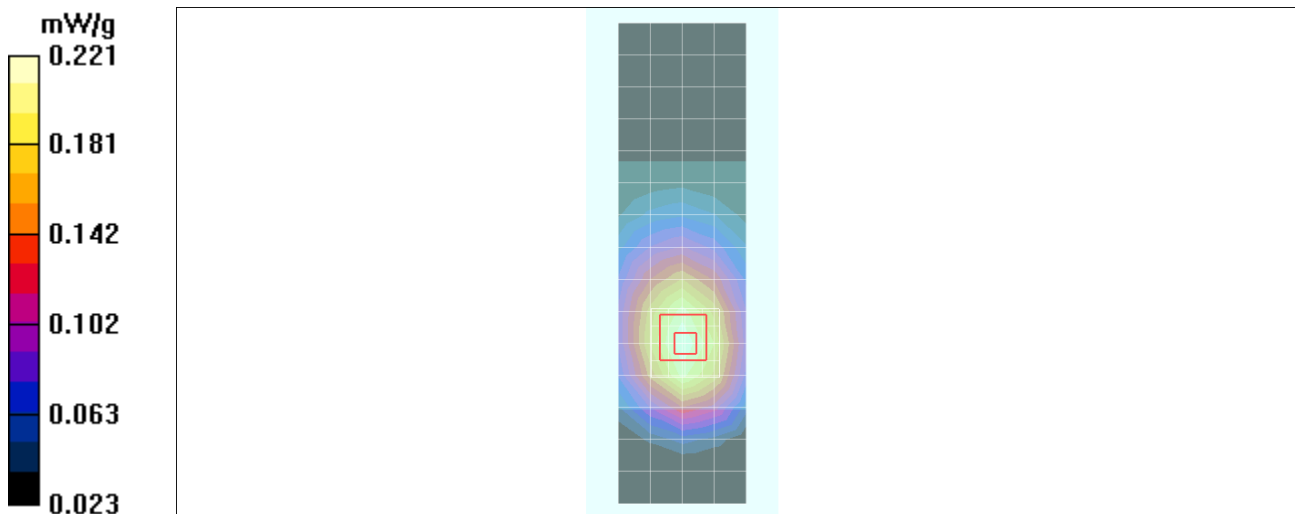

Date/Time: 9/3/2010 10:05:00 AM

Serial: TA19103KRE; Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL; Battery Model #: SNN5843A; DEVICE POSITION: Back of Phone 25mm away from phantom

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Body; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3183; ConvF(4.36, 4.36, 4.36); Calibrated: 7/14/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 7/13/2010
- Phantom: R1_ Section 2, Amy Twin, Rev3 (3-Feb-10); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.062 mW/g


Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.82 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

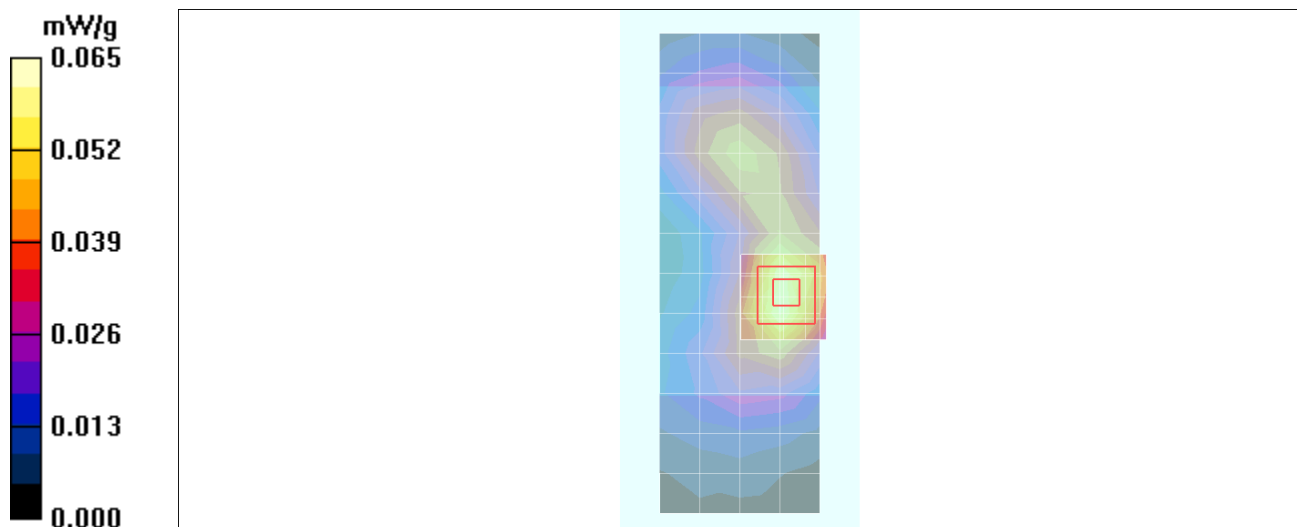

Appendix 4
Probe Calibration Certificate



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ES3-3183_Jul10**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3183**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 14, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by:	Name	Function	Signature
	Jeton Kastrali	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 15, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *VR_{x,y,z}*: *A*, *B*, *C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3183

Manufactured:	March 25, 2008
Last calibrated:	August 17, 2009
Recalibrated:	July 14, 2010

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 SN:3183**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.21	1.15	1.07	± 10.1%
DCP (mV) ^B	88.6	86.9	89.5	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	± 1.5%
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL. (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3183

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.11	6.11	6.11	0.99	1.04 ± 11.0%
1810	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	5.05	5.05	5.05	0.58	1.33 ± 11.0%
1950	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.82	4.82	4.82	0.54	1.37 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.49	4.49	4.49	0.44	1.70 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

DASY/EASY - Parameters of Probe: ES3DV3 SN:3183


Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.15	6.15	6.15	0.95	1.10 ± 11.0%
1810	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.84	4.84	4.84	0.39	1.87 ± 11.0%
1950	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.86	4.86	4.86	0.28	2.80 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.36	4.36	4.36	0.69	1.31 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

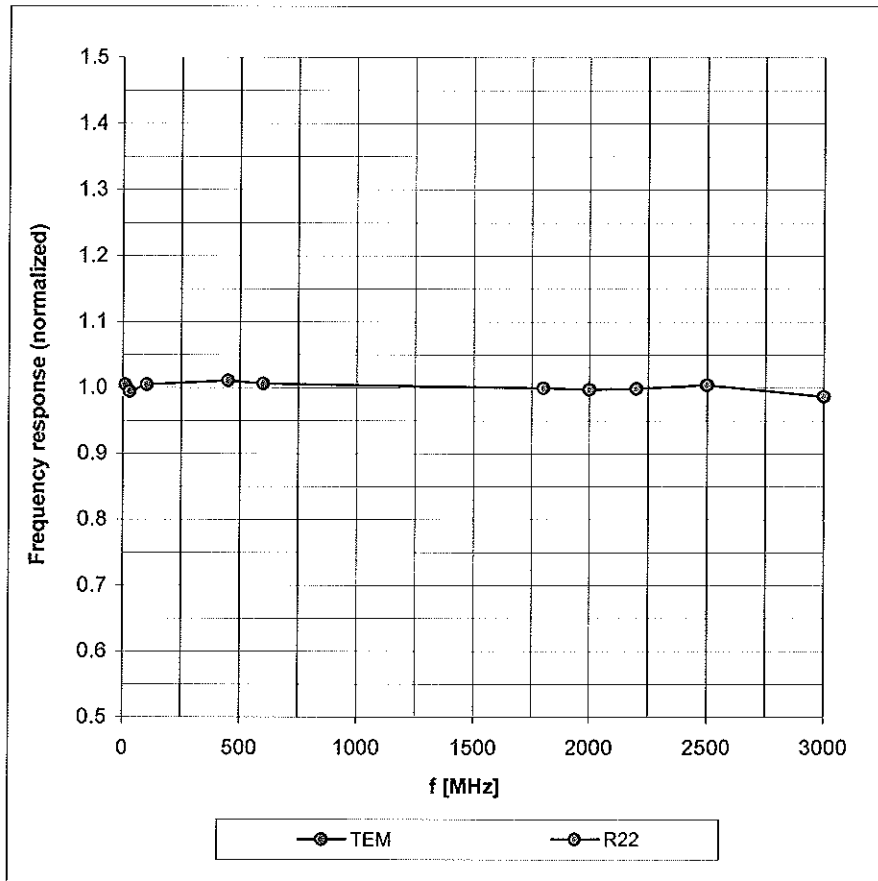



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

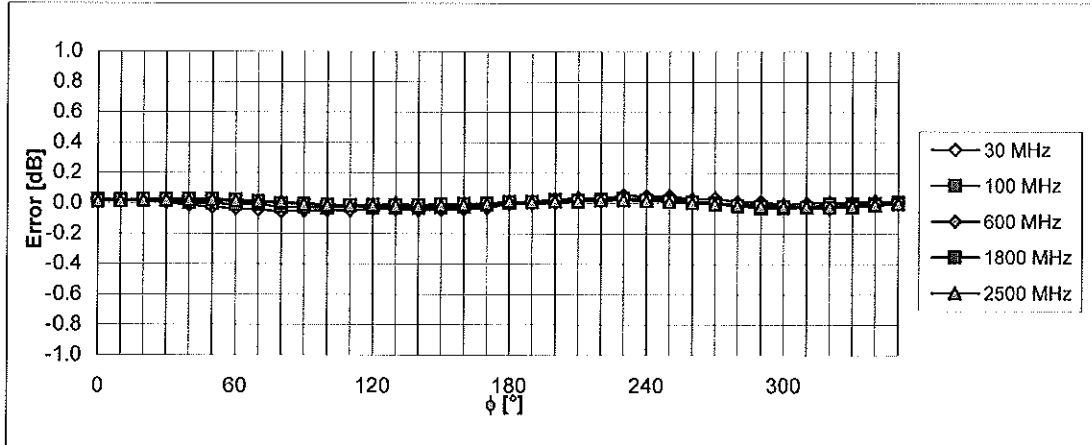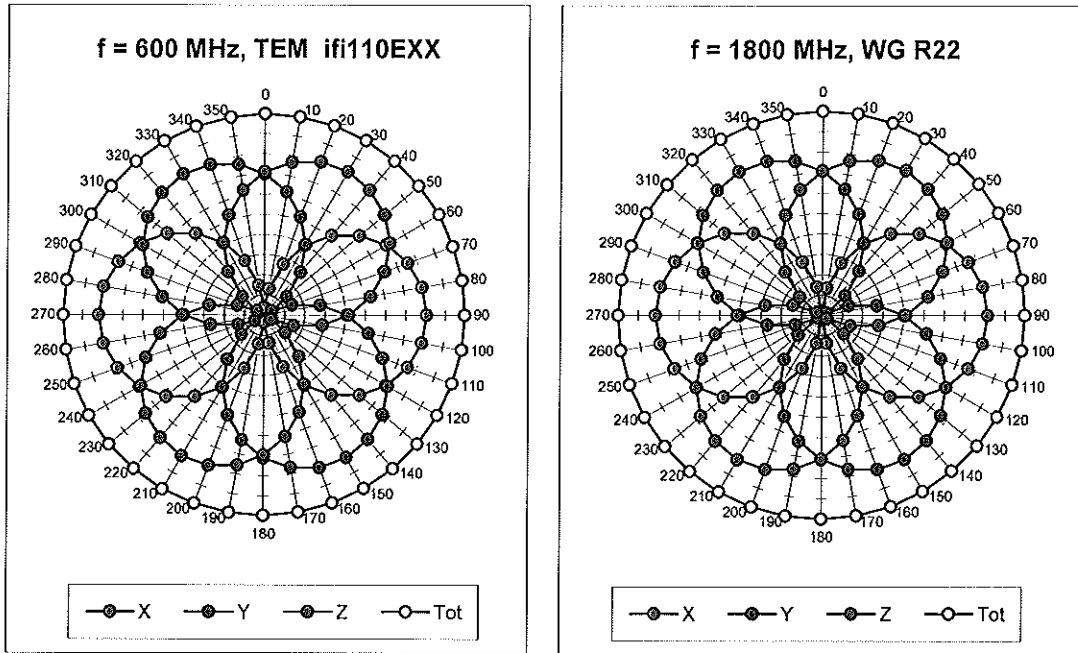



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

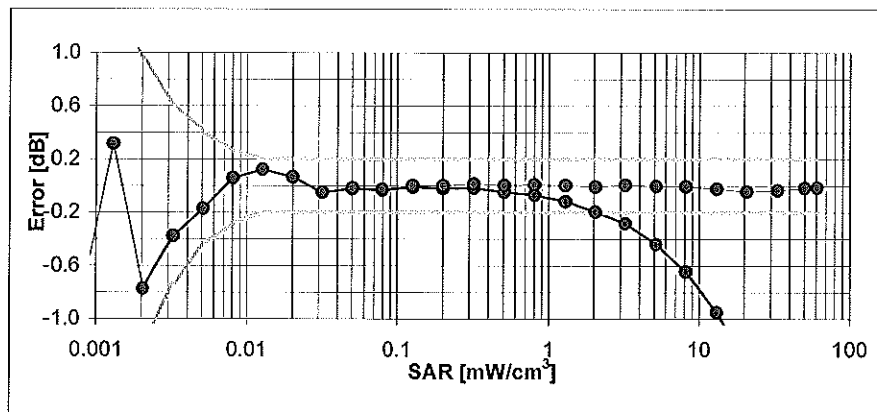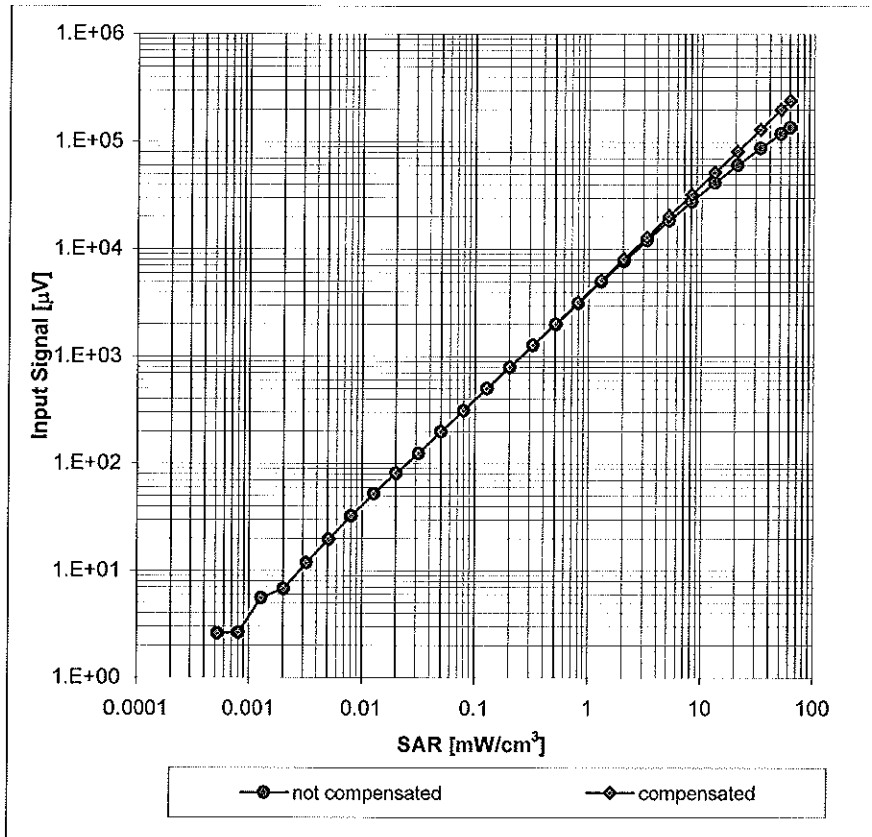


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

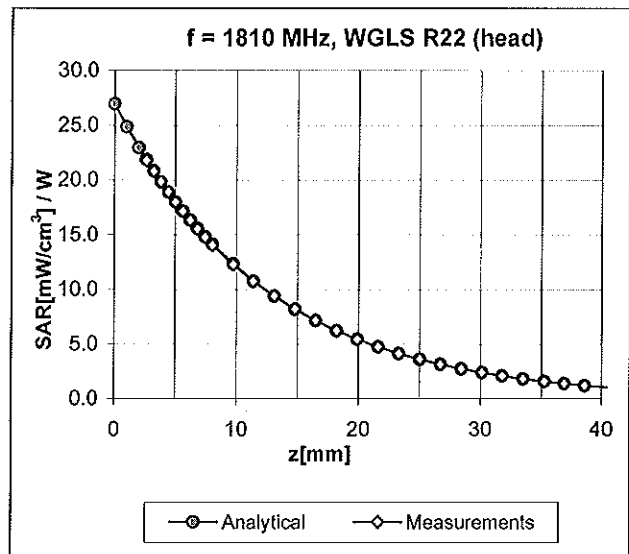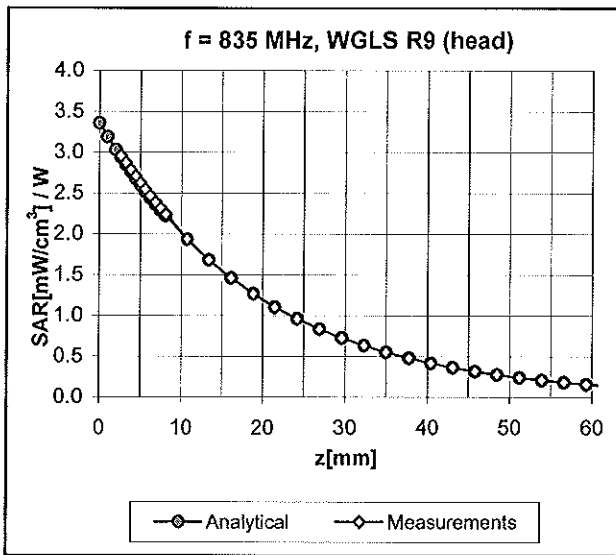

Deviation from Isotropy in HSL

Error (ϕ , θ), f = 900 MHz

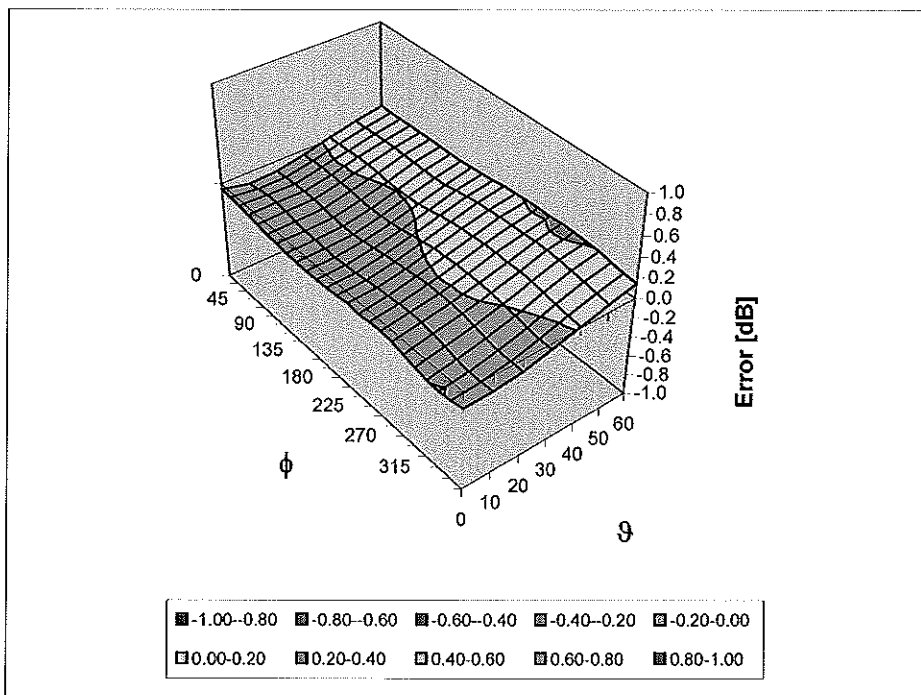

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4.0 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Appendix 5
Measurement Uncertainty Budget

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: 24003-1F

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	c_i (1 g)	c_i (10 g)	1 g u_i (±%)	10 g u_i (±%)	v_i
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty									
			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)									
			$k=2$				22.2	21.6	

Appendix 6

Dipole Characterization Certificate

Certification of System Performance Check Targets

FCD-1806, rev-1

-Historical Data-

1800 MHz	
Reference Target:	38.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	26March09 - 15Mar10
# of tests performed:	654
Grand Average:	38.36 (W/kg)
% Delta (Average - Reference Target)	-0.1%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity Target +/- %	Conductivity (S/m) Target +/- %
1800 MHz	38.36	40.0 +/- 5%	1.40 +/- 5%


-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

FCD-1806, rev-1

-Historical Data-

835 MHz	
Reference Target:	9.56 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	26March09 - 15Mar10
# of tests performed:	244
Grand Average:	9.59 (W/kg)
% Delta (Average - Reference Target)	0.3%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 432tr, 417tr, 420tr, 422tr, 423tr, 424tr, 425tr, 431tr, 434tr, 421tr, 436tr	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity Target +/- %	Conductivity (S/m) Target +/- %
835 MHz	9.59	41.5 +/- 5%	0.90 +/- 5%


-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

FCD-1806, rev-1

-Historical Data-

2450 MHz	
Reference Target:	52.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	26March09 - 15Mar10
# of tests performed:	159
Grand Average:	54.55 (W/kg)
% Delta (Average - Reference Target)	4.1%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
Applies to Dipole SN's:	
740, 766, 767, 788, 789	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity Target +/- %	Conductivity (S/m) Target +/- %
2450 MHz	54.55	39.2 +/- 10%	1.80 +/- 5%


-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

END OF REPORT