

#57 802.11b_Right Cheek_Ch11

DUT: 130415

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450_110603 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $21.3 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (interpolated) = 0.270 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.14 V/m ; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.291 mW/g ; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

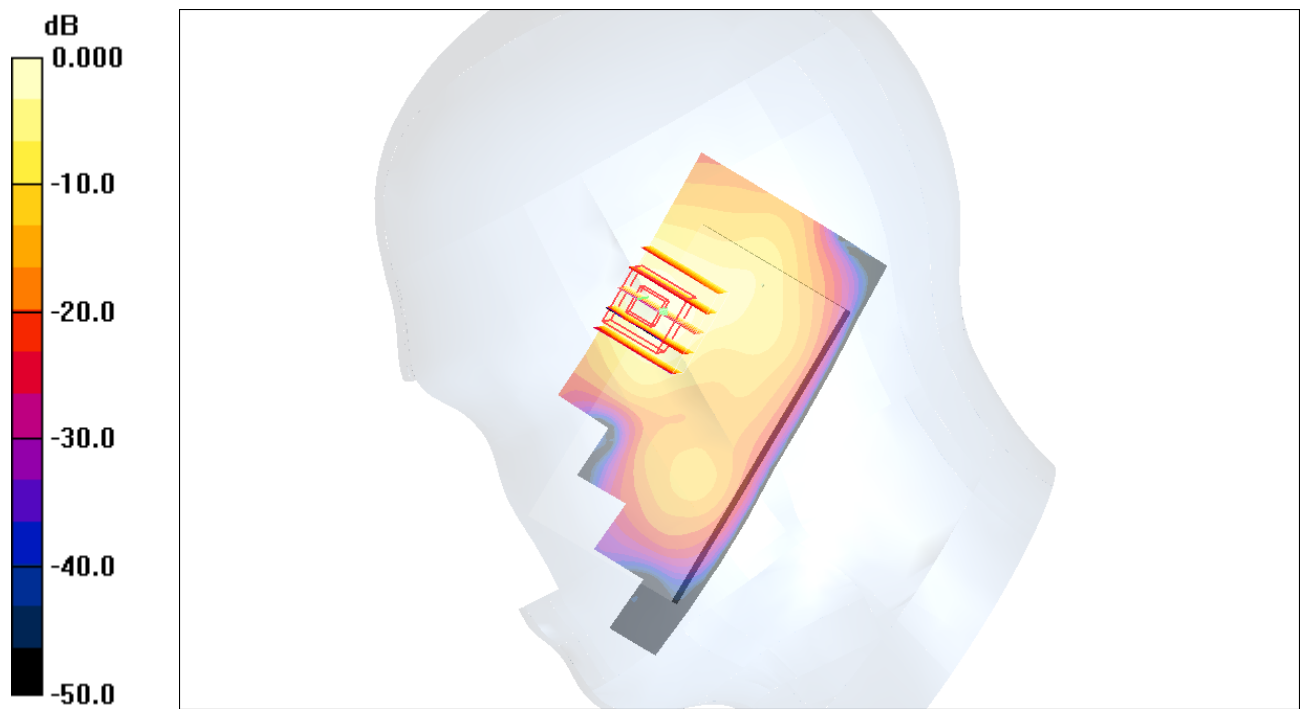

0 dB = 0.330mW/g

#57 802.11b_Right Cheek_Ch11_2D

DUT: 130415

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450_110603 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $21.3 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.270 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.14 V/m ; Power Drift = 0.150 dB


Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.291 mW/g ; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=2, Y=1

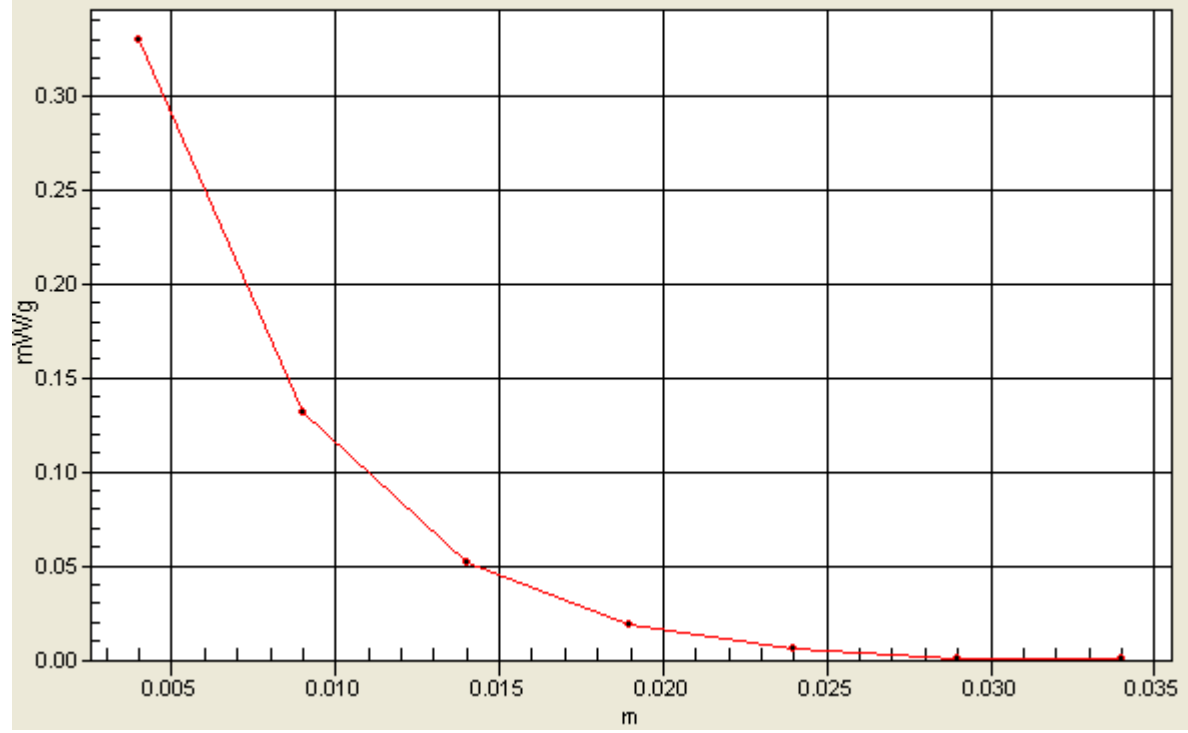

#58 802.11b_Bottom_1cm_Ch11

DUT: 130415

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110603 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.151 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.93 V/m ; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.128 mW/g ; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.139 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.93 V/m ; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.100 mW/g ; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

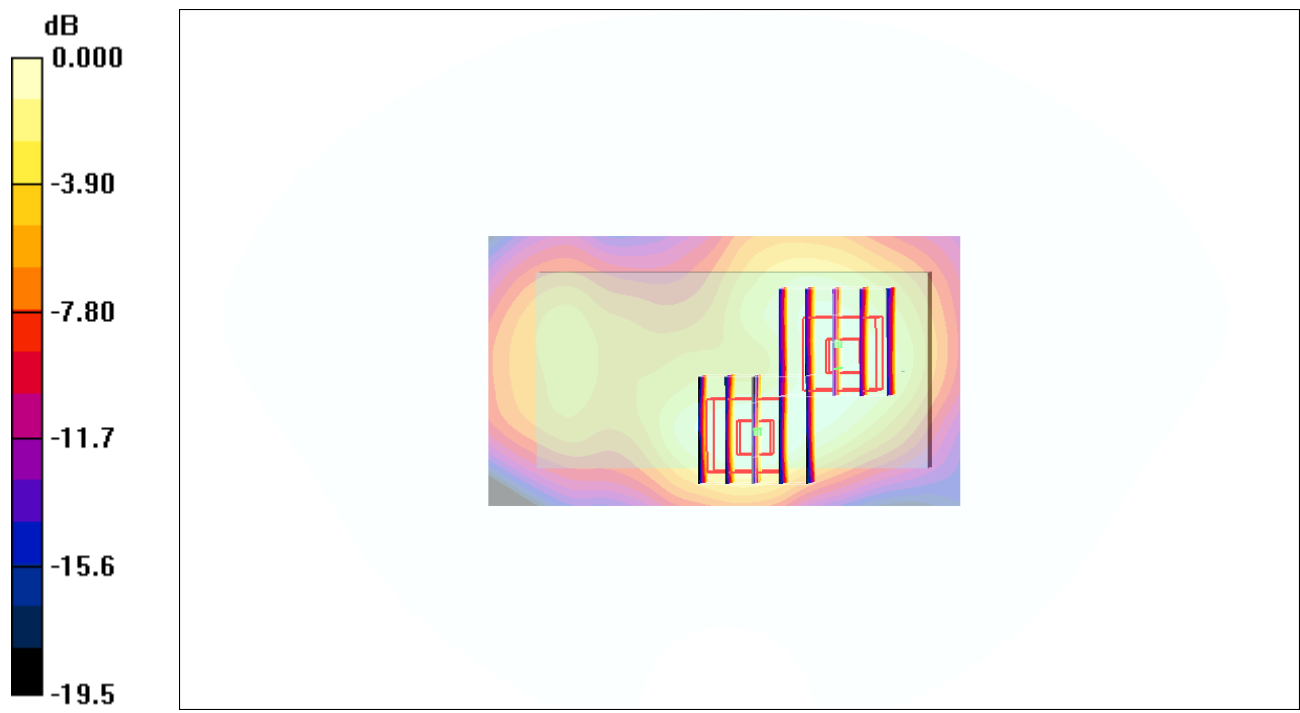

0 dB = 0.107mW/g

#58 802.11b_Bottom_1cm_Ch11_2D**DUT: 130415**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110603 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.151 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.93 V/m ; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.128 mW/g ; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.139 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.93 V/m ; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.100 mW/g ; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

1g/10g Averaged SAR

SAR, Zoom Scan: Value Along Z, X=2, Y=2

