



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 22 & 24 / IC RSS-132/RSS-133

Applicant Name:
Motorola Mobility, Inc.
8000 West Sunrise Blvd.
Plantation, FL 33322
United States

Date of Testing:
August 25 - 26, 2011
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1108231465.IHD

| | |
|-------------------|--------------------------------|
| FCC ID: | IHDT56MP1 |
| APPLICANT: | MOTOROLA MOBILITY, INC. |


Report Type: Class II Permissive Change (SA) Testing
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §22(H), §24(E)
IC Specification(s): RSS-132 Issue 2; RSS-133 Issue 5
EUT Type: Portable Handset
Test Device Serial No.: *identical prototype* [S/N: TA0690024X]
Class II Permissive Change(s): See Change Description
Original Grant Date: August 26, 2011

| Mode | Tx Frequency (MHz) | Emission Designator | ERP/EIRP | |
|----------|--------------------|---------------------|-----------------------|---------------------|
| | | | Maximum Power (Watts) | Maximum Power (dBm) |
| CDMA850 | 824.70 - 848.31 | 1M27F9W | 0.144 | 21.59 |
| CDMA1900 | 1851.25 - 1908.75 | 1M27F9W | 0.531 | 27.25 |



Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.




 Randy Ortanez
 President




| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 1 of 33 | |

T A B L E O F C O N T E N T S


| | | |
|--|--|----|
| FCC PART 22 & 24 MEASUREMENT REPORT..... | | 3 |
| 1.0 INTRODUCTION | | 4 |
| 1.1 SCOPE | | 4 |
| 1.2 TESTING FACILITY..... | | 4 |
| 2.0 PRODUCT INFORMATION..... | | 5 |
| 2.1 EQUIPMENT DESCRIPTION | | 5 |
| 2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS | | 5 |
| 2.3 LABELING REQUIREMENTS..... | | 5 |
| 3.0 DESCRIPTION OF TESTS | | 6 |
| 3.1 MEASUREMENT PROCEDURE | | 6 |
| 3.2 OCCUPIED BANDWIDTH | | 6 |
| 3.3 CELLULAR - BASE FREQUENCY BLOCKS..... | | 6 |
| 3.4 CELLULAR - MOBILE FREQUENCY BLOCKS..... | | 7 |
| 3.5 PCS - BASE FREQUENCY BLOCKS | | 7 |
| 3.6 PCS - MOBILE FREQUENCY BLOCKS..... | | 7 |
| 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL..... | | 7 |
| 3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS | | 8 |
| 3.9 PEAK-AVERAGE RATIO | | 8 |
| 4.0 TEST EQUIPMENT CALIBRATION DATA | | 9 |
| 5.0 SAMPLE CALCULATIONS | | 10 |
| 6.0 TEST RESULTS..... | | 11 |
| 6.1 SUMMARY..... | | 11 |
| 6.2 TRANSMITTER CONDUCTED OUTPUT POWER | | 12 |
| 6.3 EFFECTIVE RADIATED POWER OUTPUT DATA | | 13 |
| 6.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA..... | | 14 |
| 6.5 CELLULAR CDMA RADIATED MEASUREMENTS..... | | 15 |
| 6.6 PCS CDMA RADIATED MEASUREMENTS..... | | 18 |
| 7.0 PLOT(S) OF EMISSIONS | | 21 |
| 8.0 CONCLUSION..... | | 33 |

| | | | | |
|---|---|--|---|--|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 2 of 33 | |



MEASUREMENT REPORT

FCC Part 22 & 24



§2.1033 General Information



APPLICANT: Motorola Mobility, Inc.
APPLICANT ADDRESS: 8000 West Sunrise Blvd.
 Plantation, FL 33322, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
IC SPECIFICATION(S): RSS-132 Issue 2; RSS-133 Issue 5
FCC ID: IHDT56MP1
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: CDMA / EvDO
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: TA0690024X Production Ship Authorization Engineering
DATE(S) OF TEST: August 25 - 26, 2011
TEST REPORT S/N: 0Y1108231465.IHD

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

| | | | |
|---|---|---|--|
| FCC ID: IHDT56MP1 |  FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 3 of 33 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

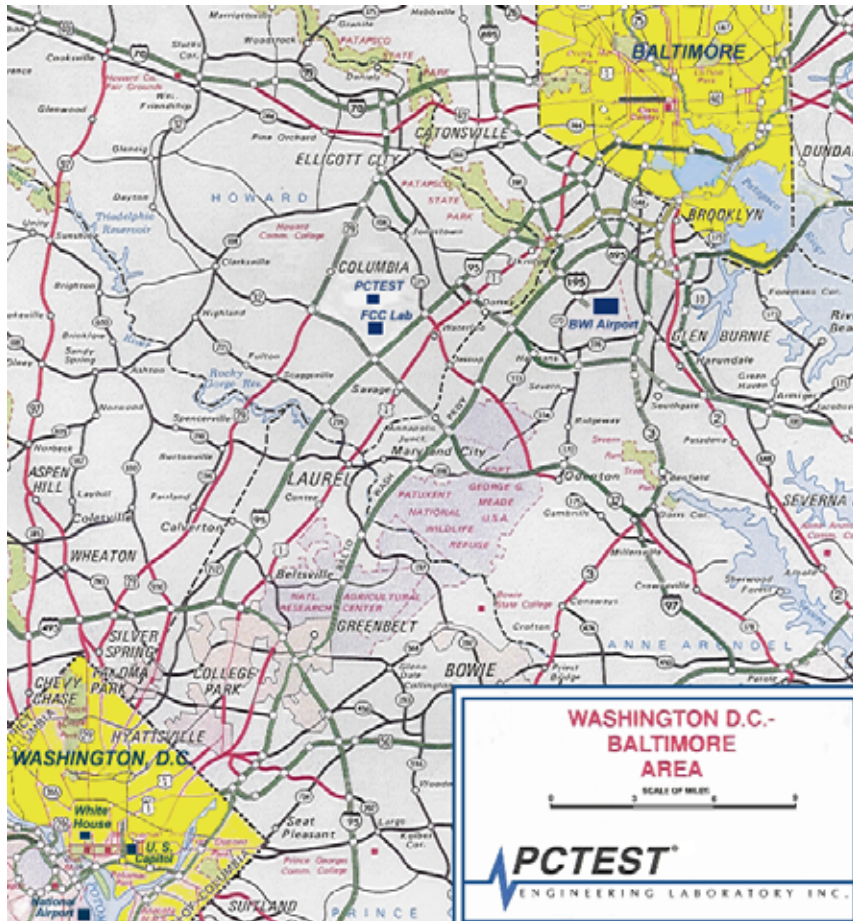




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EVD0 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 4 of 33 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Portable Handset FCC ID: IHDT56MP1**. The EUT consisted of the following component(s):

| Trade Name | FCC ID | Description |
|------------|-----------|------------------|
| Motorola | IHDT56MP1 | Portable Handset |

Table 2-1. EUT Equipment Description

This unit was tested with its standard battery (SNN5894A).

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 5 of 33 | |

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

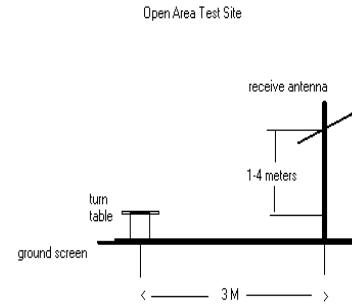


Figure 3-1. Diagram of 3-meter outdoor test range


Deviation from Measurement Procedure.....None

3.2 Occupied Bandwidth

§2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

3.3 Cellular - Base Frequency Blocks

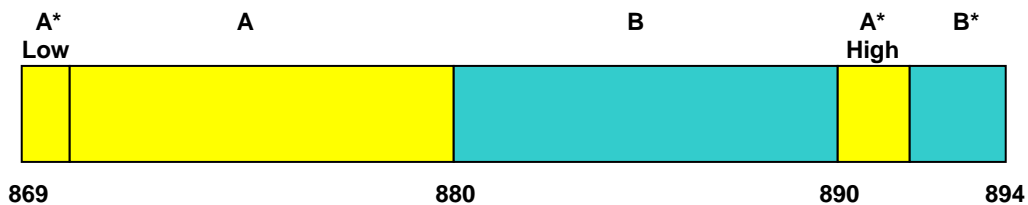

BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 6 of 33 |


3.4 Cellular - Mobile Frequency Blocks

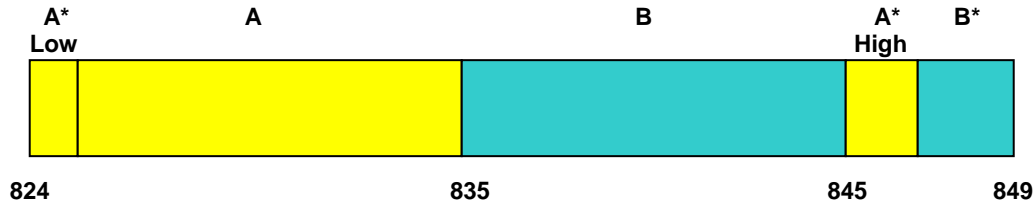

BLOCK 1: 824 – 835 MHz (A* Low + A)
 BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
 BLOCK 4: 846.5 – 849 MHz (B*)


3.5 PCS - Base Frequency Blocks

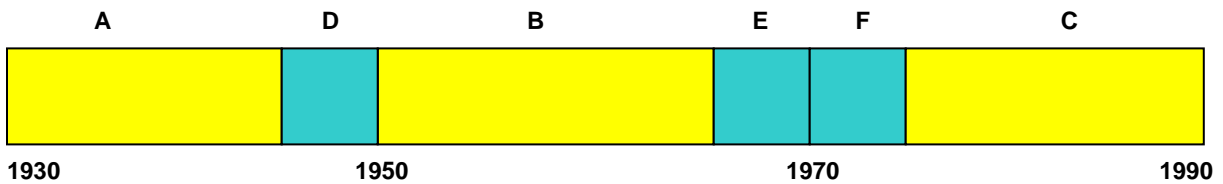

BLOCK 1: 1930 – 1945 MHz (A)
 BLOCK 2: 1945 – 1950 MHz (D)
 BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)
 BLOCK 5: 1970 – 1975 MHz (F)
 BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

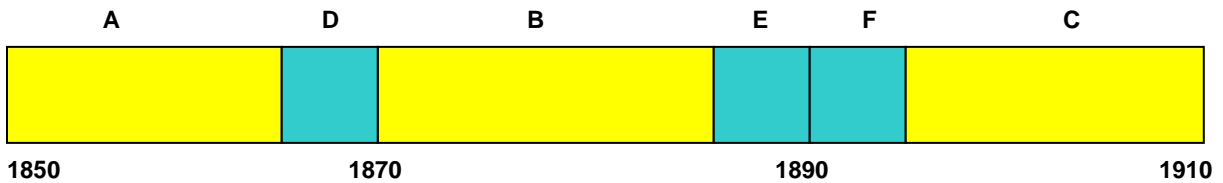



BLOCK 1: 1850 – 1865 MHz (A)
 BLOCK 2: 1865 – 1870 MHz (D)
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)
 BLOCK 5: 1890 – 1895 MHz (F)
 BLOCK 6: 1895 – 1910 MHz (C)

3.7 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a)(b); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 7 of 33 | |

3.8 Radiated Power and Radiated Spurious Emissions



§2.1053, 22.913(a)(2), 22.917(a), 24.232(c), 24.238(a), RSS-132 (4.5.1.2), RSS-133 (6.5.1)

Radiated power and radiated spurious emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested with the RC3/SO55 configuration with "All Up" power control bits.

3.9 Peak-Average Ratio

§24.232(d), RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.



| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 8 of 33 |

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------|-----------|----------------------------------|------------|--------------|------------|---------------|
| Agilent | 8449B | (1-26.5GHz) Pre-Amplifier | 2/8/2011 | Annual | 2/8/2012 | 3008A00985 |
| Agilent | E8257D | (250kHz-20GHz) Signal Generator | 4/8/2011 | Annual | 4/8/2012 | MY45470194 |
| Agilent | N9020A | MXA Signal Analyzer | 9/8/2010 | Annual | 9/8/2011 | US46470561 |
| Agilent | E5515C | Wireless Communications Test Set | 2/8/2011 | Annual | 2/8/2012 | GB45360985 |
| Agilent | N9038A | MXE EMI Receiver | 8/5/2011 | Annual | 8/5/2012 | MY51210133 |
| Anritsu | ML2495A | Power Meter | 10/13/2010 | Annual | 10/13/2011 | 941001 |
| Anritsu | MA2411B | Pulse Sensor | N/A | | N/A | 1027293 |
| MiniCircuits | VHF-1300+ | High Pass Filter | N/A | | N/A | 30716 |
| MiniCircuits | VHF-3100+ | High Pass Filter | N/A | | N/A | 30721 |
| Pasternack | PE2208-6 | Bidirectional Coupler | N/A | | N/A | N/A |
| Rohde & Schwarz | CMU200 | Base Station Simulator | N/A | | N/A | 836536/0005 |
| Schwarzbeck | UHA9105 | Dipole Antenna (400 - 1GHz) Rx | 9/17/2009 | Biennial | 9/17/2011 | 9105-2404 |
| Schwarzbeck | UHA9105 | Dipole Antenna (400 - 1GHz) Tx | 9/17/2009 | Biennial | 9/17/2011 | 9105-2403 |
| Sunol | DRH-118 | Horn Antenna (1 - 18GHz) | 7/5/2011 | Biennial | 7/5/2013 | A050307 |
| Sunol | JB5 | Bi-Log Antenna (30M - 5GHz) | 9/17/2009 | Biennial | 9/17/2011 | A051107 |
| Sunol | DRH-118 | Horn Antenna (1-18 GHz) | 6/17/2011 | Biennial | 6/17/2013 | A042511 |

Table 4-1. Test Equipment

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 9 of 33 | |

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation



9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80) = 50.3$ dBc.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 10 of 33 |



6.0 TEST RESULTS

6.1 Summary

Company Name: Motorola Mobility, Inc.
 FCC ID: IHDT56MP1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO

| FCC Part Section(s) | RSS Sections | Test Description | Test Limit | Test Condition | Test Result | Reference |
|------------------------------|--------------------------------------|--|--|----------------|-------------|-------------------|
| TRANSMITTER MODE (TX) | | | | | | |
| 2.1049, 22.917(a), 24.238(a) | RSS-Gen (4.6.1) RSS-133 (2.3) | Occupied Bandwidth | N/A | CONDUCTED | PASS | Section 7.0 |
| 2.1051, 22.917(a), 24.238(a) | RSS-132 (4.5.1.2) RSS-133 (6.5.1) | Band Edge / Conducted Spurious Emissions | < 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions | | PASS | Section 7.0 |
| 24.232(d) | RSS-133 (6.4) | Peak-Average Ratio | < 13 dB | | PASS | Section 7.0 |
| 2.1046 | RSS-132 (4.4) RSS-133 (4.1) | Transmitter Conducted Output Power | N/A | | PASS | Section 6.2 |
| 22.913(a)(2) | RSS-132 (4.4) | Effective Radiated Power | < 7 Watts max. ERP | RADIATED | PASS | Section 6.3 |
| 24.232(c) | RSS-133 (6.4) [SRSP-510 (5.1.2)] | Equivalent Isotropic Radiated Power | < 2 Watts max. EIRP | | PASS | Section 6.4 |
| 2.1053, 22.917(a), 24.238(a) | RSS-132 (4.5.1.2) RSS-133 (6.5.1) | Undesirable Emissions | < 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions | | PASS | Sections 6.5, 6.6 |

Table 6-1. Summary of Test Results

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 11 of 33 | |

6.2 Transmitter Conducted Output Power

§2.1046

The EUT was connected to an Agilent 8960 base station simulator and was set to the RC3/SO55 configuration with “All Up” bits in order to produce the maximum power in each band of operation. The maximum power was recorded and is shown below.



The conducted powers measured and shown below for this device may vary slightly from the conducted powers measured on the original device. Such deviations may be attributed to production from device to device and well as measurement uncertainty however the measured powers still fall within the tune up range.

| Band | Channel | Frequency | SO55 [dBm] |
|----------|---------|-----------|------------|
| | F-RC | MHz | RC3 |
| Cellular | 1013 | 824.7 | 24.41 |
| | 384 | 836.52 | 24.47 |
| | 777 | 848.31 | 24.26 |
| PCS | 25 | 1851.25 | 24.33 |
| | 600 | 1880 | 24.34 |
| | 1175 | 1908.75 | 24.31 |

Table 6-2. RC3/SO55 CDMA Conducted Power



Figure 6-1. Test Setup Diagram

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 12 of 33 | |

6.3 Effective Radiated Power Output Data

§22.913(a)(2), RSS-132 (4.4)

| Frequency [MHz] | Mode | Measured Level [dBm] | Substitute Level [dBm] | Antenna Gain [dBd] | Pol [H/V] | ERP [dBm] | ERP [Watts] | Battery Type |
|-----------------|---------|----------------------|------------------------|--------------------|-----------|-----------|-------------|--------------|
| 824.70 | CDMA850 | -14.680 | 20.86 | 0.00 | H | 20.86 | 0.122 | Slim |
| 836.52 | CDMA850 | -13.950 | 21.59 | 0.00 | H | 21.59 | 0.144 | Slim |
| 848.31 | CDMA850 | -15.480 | 20.06 | 0.00 | H | 20.06 | 0.101 | Slim |



Table 6-3. Effective Radiated Power Output Data

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 13 of 33 | |

6.4 Equivalent Isotropic Radiated Power Output Data

§24.232(c), RSS-133 (6.4) [SRSP-510 (5.1.2)]

| Frequency [MHz] | Mode | Measured Level [dBm] | Substitute Level [dBm] | Antenna Gain [dBi] | Pol [H/V] | EIRP [dBm] | EIRP [Watts] | Battery Type |
|-----------------|----------|----------------------|------------------------|--------------------|-----------|------------|--------------|--------------|
| 1851.25 | CDMA1900 | -14.170 | 19.50 | 7.75 | H | 27.25 | 0.531 | Slim |
| 1880.00 | CDMA1900 | -14.520 | 19.15 | 7.83 | H | 26.98 | 0.499 | Slim |
| 1908.75 | CDMA1900 | -14.430 | 19.24 | 7.93 | H | 27.17 | 0.521 | Slim |



Table 6-4. Equivalent Isotropic Radiated Power Output Data

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 14 of 33 | |

6.5 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a), RSS-132 (4.5.1.2)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 20.86 dBm = 0.122 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.86 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 1649.40 | -54.76 | 6.16 | -48.60 | H | 69.5 |
| 2474.10 | -55.38 | 6.34 | -49.04 | H | 69.9 |
| 3298.80 | -92.21 | 6.71 | -85.50 | H | 106.4 |
| 4123.50 | -90.29 | 7.39 | -82.90 | H | 103.8 |
| 4948.20 | -89.81 | 8.91 | -80.90 | H | 101.8 |



Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 15 of 33 | |

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053, 22.917(a), RSS-132 (4.5.1.2)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 21.59 dBm = 0.144 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.59 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 1673.04 | -52.50 | 6.09 | -46.41 | H | 68.0 |
| 2509.56 | -53.98 | 6.38 | -47.60 | H | 69.2 |
| 3346.08 | -92.41 | 6.90 | -85.51 | H | 107.1 |
| 4182.60 | -90.84 | 7.79 | -83.05 | H | 104.6 |
| 5019.12 | -89.40 | 8.83 | -80.57 | H | 102.2 |



Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 16 of 33 | |

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053, 22.917(a), RSS-132 (4.5.1.2)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 20.06 dBm = 0.101 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.06 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 1696.62 | -54.30 | 6.01 | -48.29 | H | 68.3 |
| 2544.93 | -51.66 | 6.47 | -45.19 | H | 65.3 |
| 3393.24 | -92.62 | 7.10 | -85.52 | H | 105.6 |
| 4241.55 | -91.19 | 8.09 | -83.10 | H | 103.2 |
| 5089.86 | -89.14 | 8.86 | -80.28 | H | 100.3 |



Table 6-7. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 17 of 33 | |

6.6 PCS CDMA Radiated Measurements

§2.1053, 24.238(a), RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 27.25 dBm = 0.531 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.25 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 3702.50 | -30.72 | 9.62 | -21.11 | H | 48.4 |
| 5553.75 | -42.87 | 10.61 | -32.26 | H | 59.5 |
| 7405.00 | -83.73 | 10.84 | -72.88 | H | 100.1 |
| 9256.25 | -81.95 | 12.20 | -69.75 | H | 97.0 |
| 11107.50 | -77.40 | 12.86 | -64.54 | H | 91.8 |



Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 18 of 33 | |

PCS CDMA Radiated Measurements (Cont'd)
§2.1053, 24.238(a), RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 26.98 dBm = 0.499 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 39.98 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 3760.00 | -25.48 | 9.30 | -16.18 | H | 43.2 |
| 5640.00 | -52.05 | 10.89 | -41.16 | H | 68.1 |
| 7520.00 | -83.41 | 10.85 | -72.56 | H | 99.5 |
| 9400.00 | -81.85 | 12.17 | -69.67 | H | 96.7 |
| 11280.00 | -77.18 | 13.05 | -64.13 | H | 91.1 |



Table 6-9. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 19 of 33 | |

PCS CDMA Radiated Measurements (Cont'd)
§2.1053, 24.238(a), RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 27.17 dBm = 0.521 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.17 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 3817.50 | -22.68 | 9.05 | -13.63 | H | 40.8 |
| 5726.25 | -50.83 | 11.07 | -39.75 | H | 66.9 |
| 7635.00 | -83.59 | 11.11 | -72.48 | H | 99.6 |
| 9543.75 | -82.06 | 12.36 | -69.70 | H | 96.9 |
| 11452.50 | -77.33 | 13.23 | -64.10 | H | 91.3 |



Table 6-10. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:


Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.


This device was tested with the RC3/SO55 configuration with "All Up" power control bits. This unit was tested with its standard battery (SNN5894A). The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 20 of 33 | |

7.0 PLOT(S) OF EMISSIONS

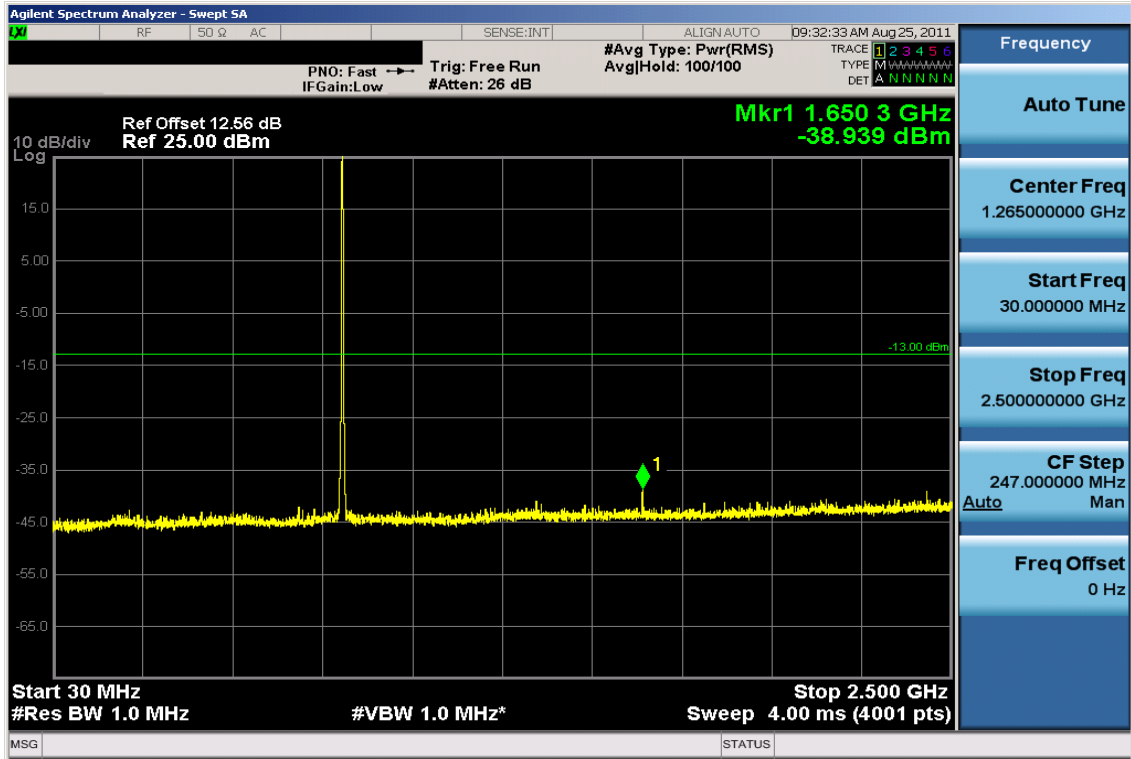


Plot 7-1. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

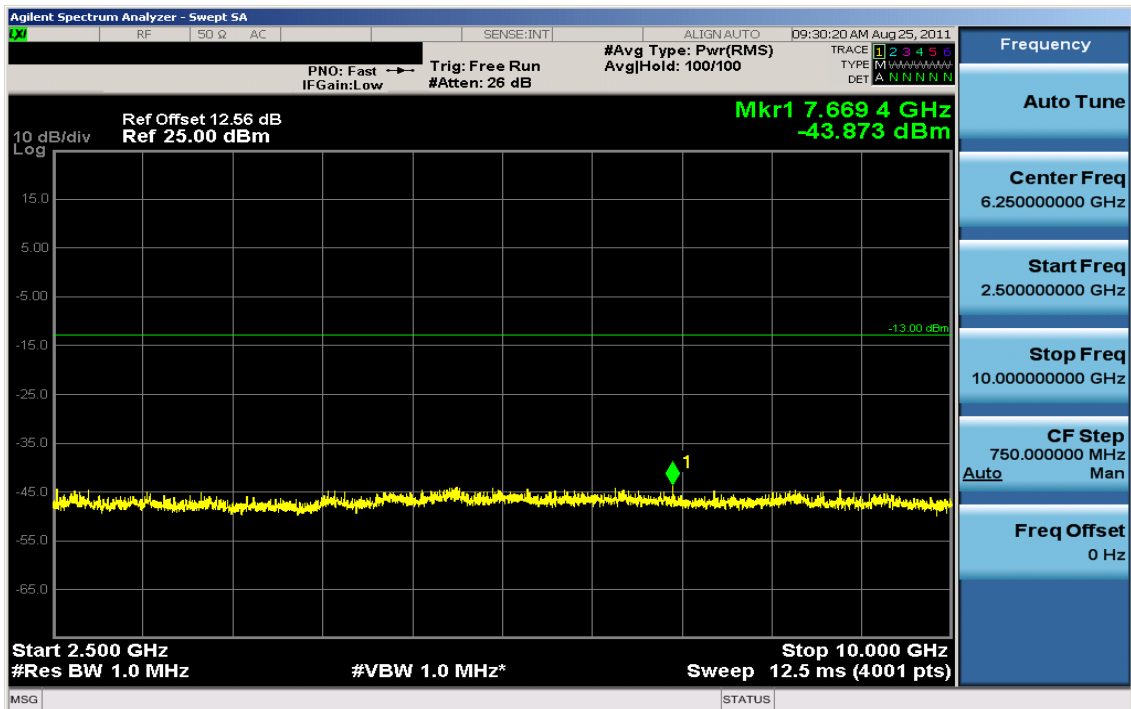


Plot 7-2. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

| | | | | |
|--------------------------------------|-------------------------------------|--|---------------|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 21 of 33 | |

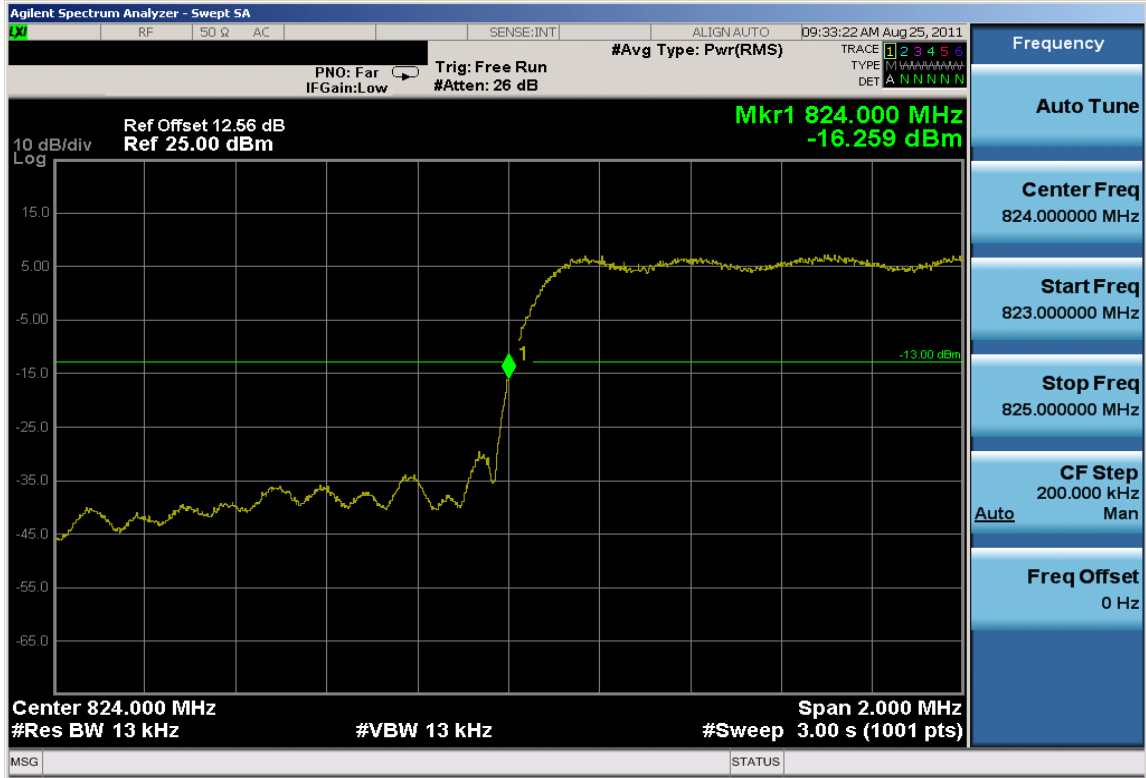


Plot 7-3. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)

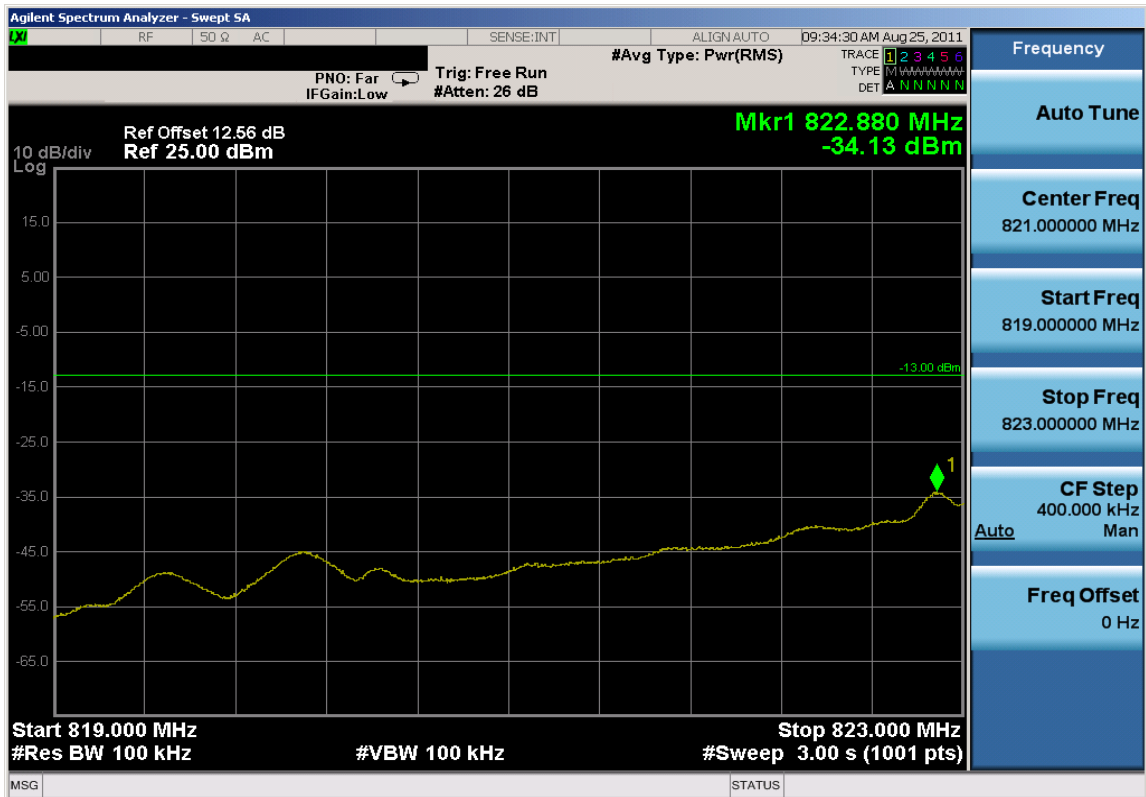


Plot 7-4. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 22 of 33 |

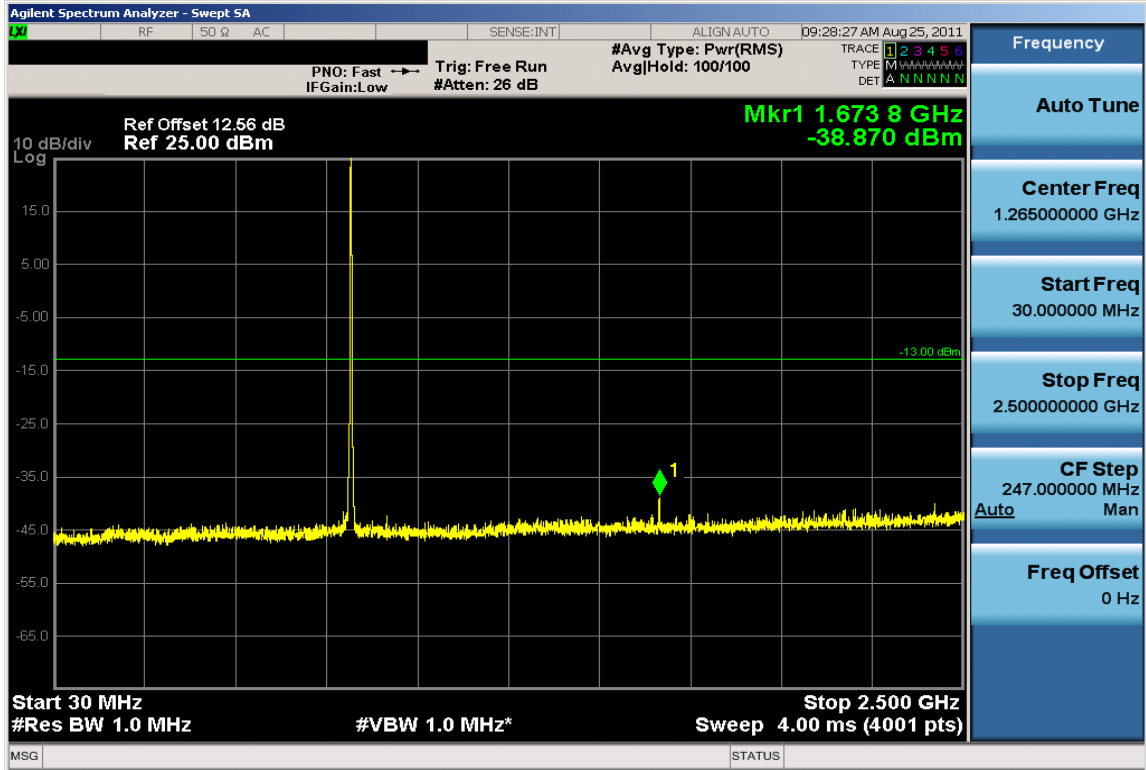


Plot 7-5. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

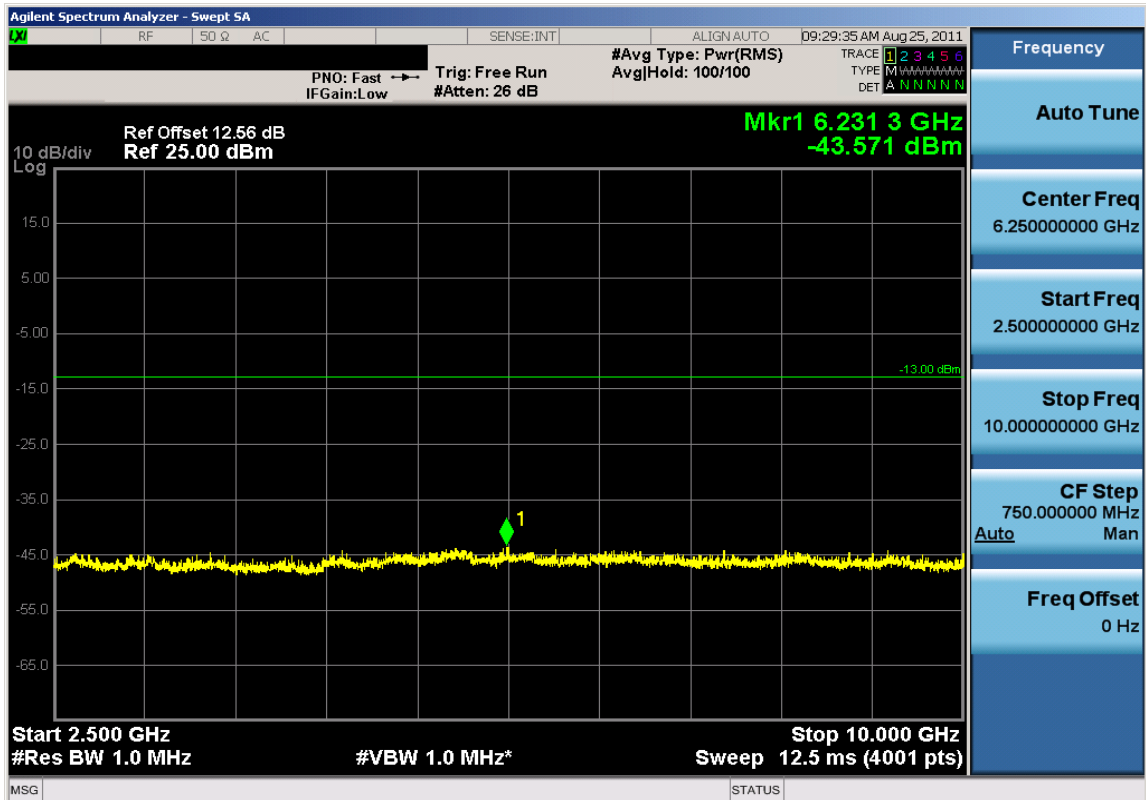


Plot 7-6. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

| | | | | |
|--------------------------------------|-------------------------------------|---|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 23 of 33 |

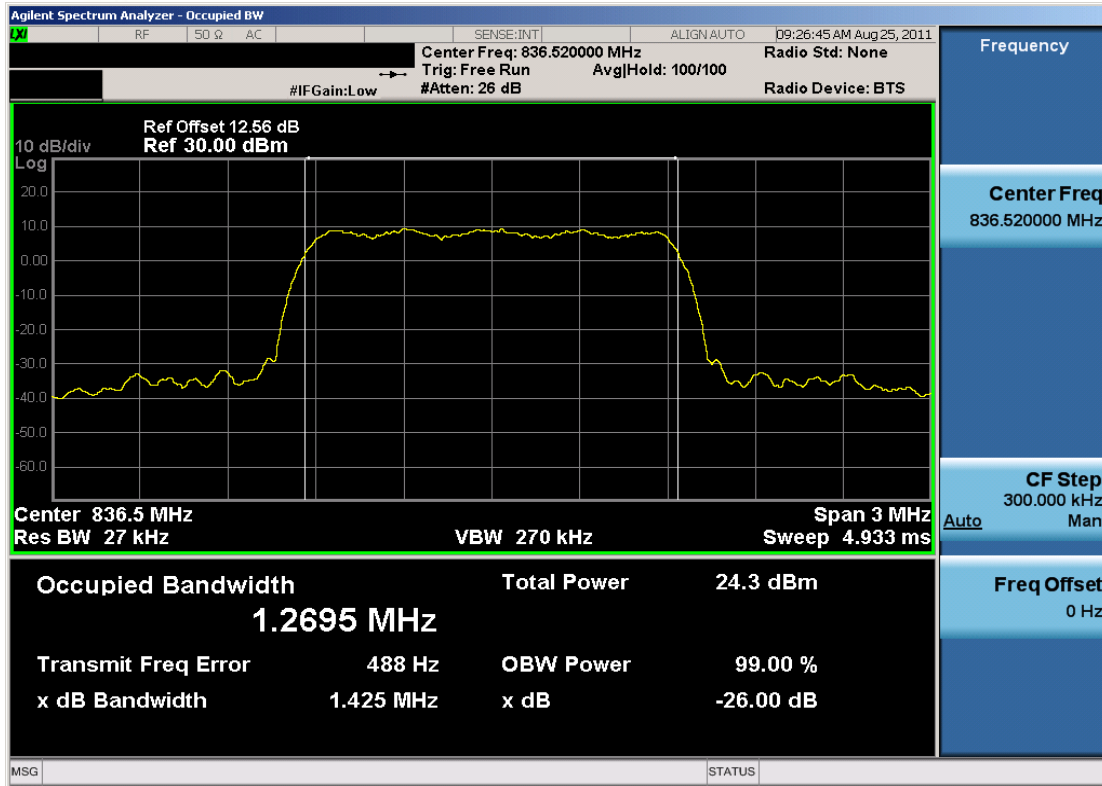


Plot 7-7. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

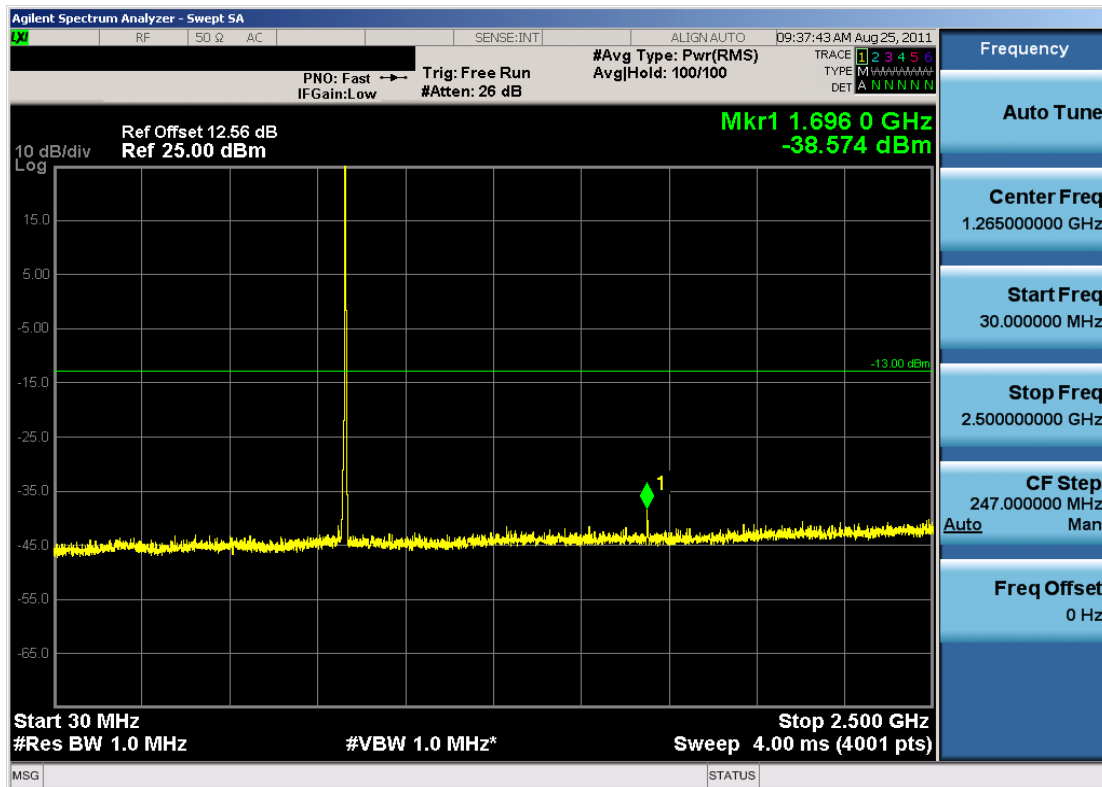


Plot 7-8. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 24 of 33 |

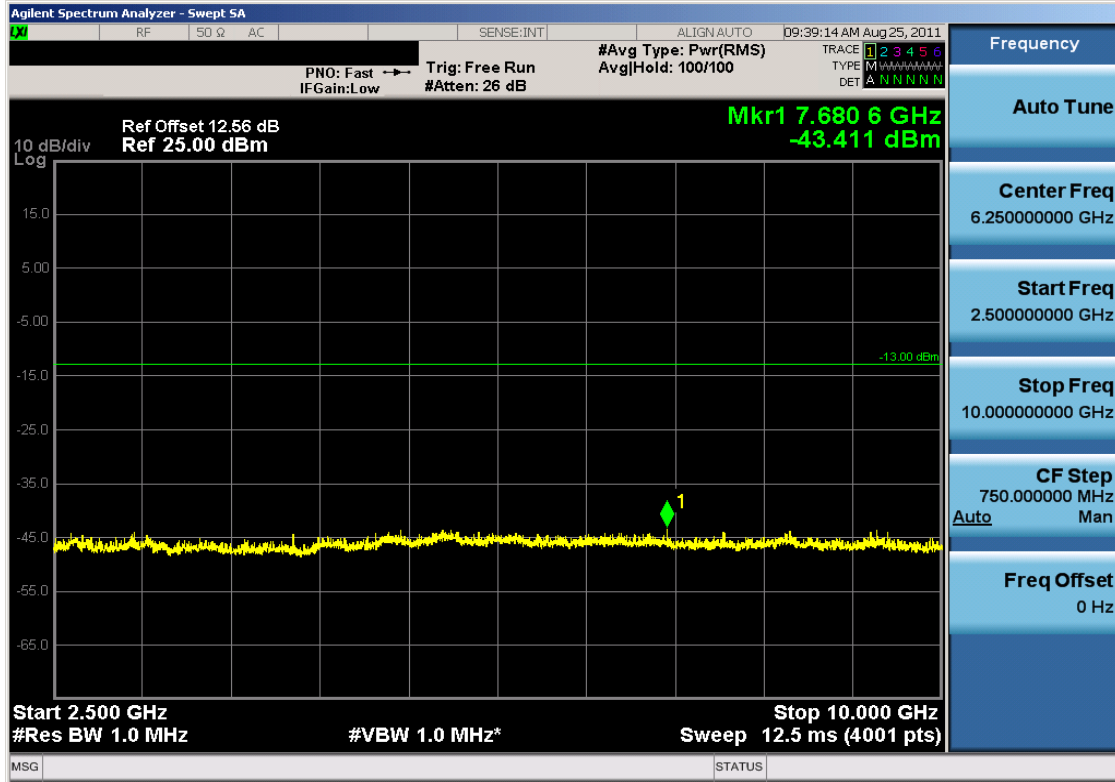


Plot 7-9. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

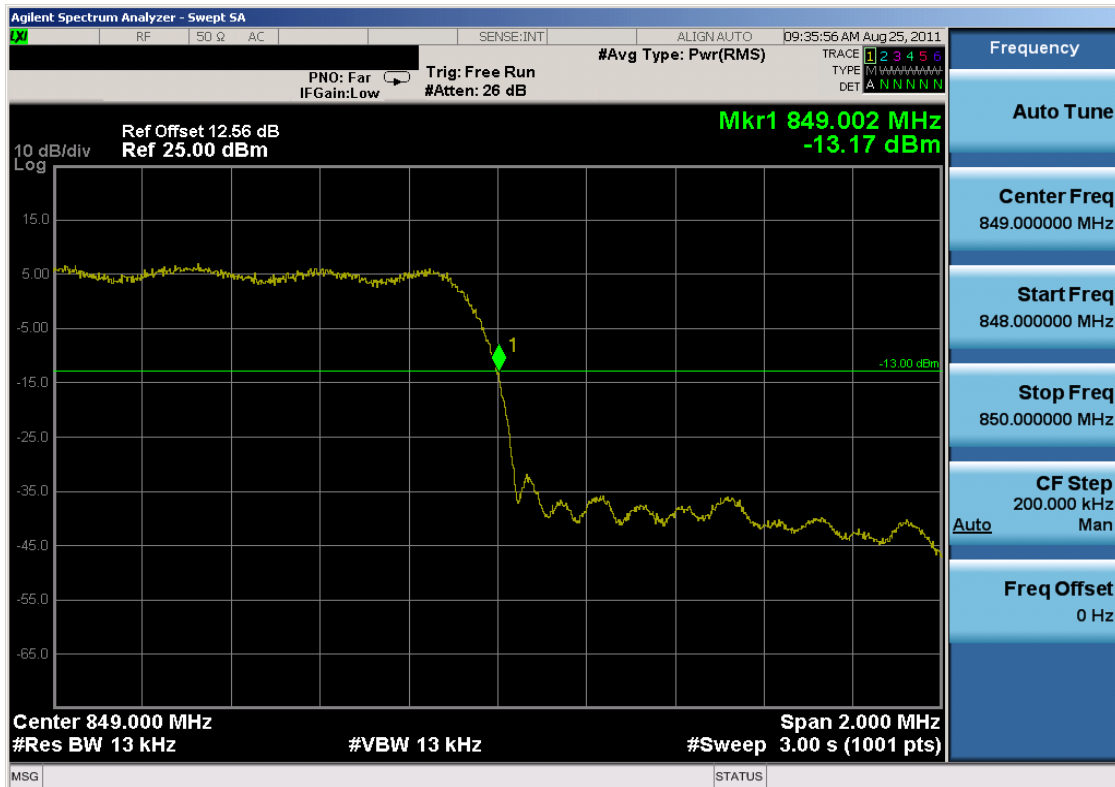


Plot 7-10. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 25 of 33 |

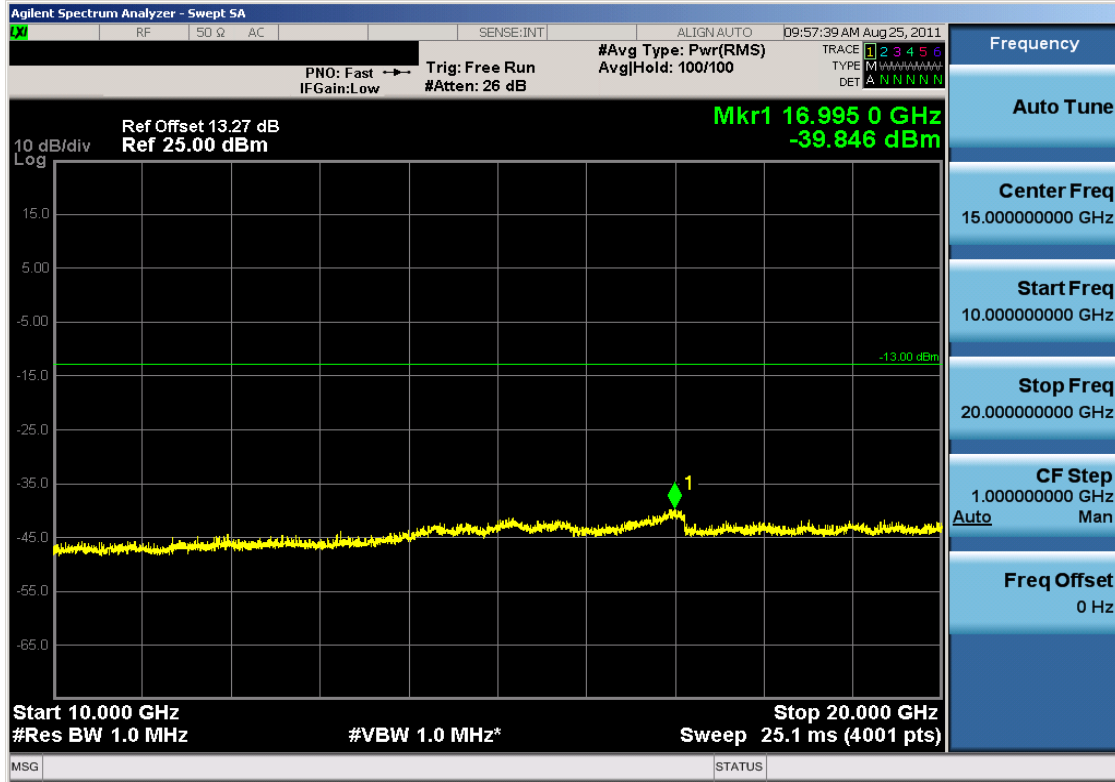


Plot 7-17. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

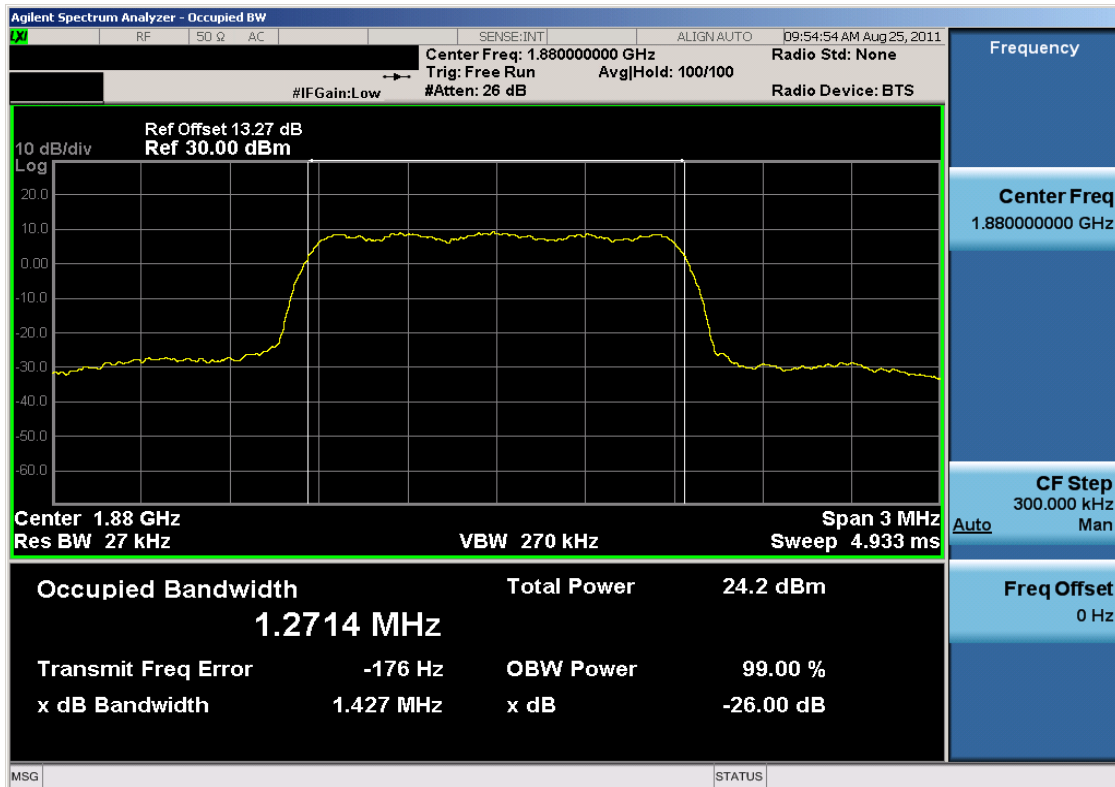


Plot 7-18. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

| | | | | |
|--------------------------------------|-------------------------------------|--|---------------|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 29 of 33 | |

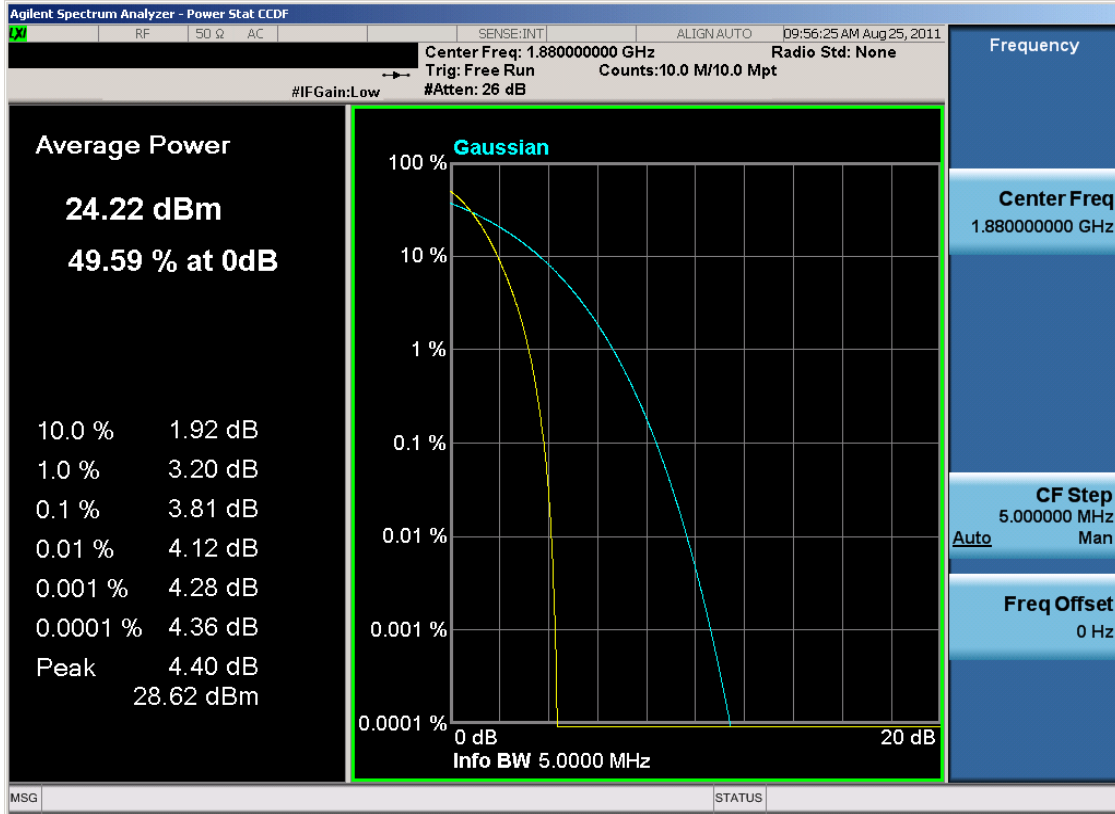


Plot 7-19. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

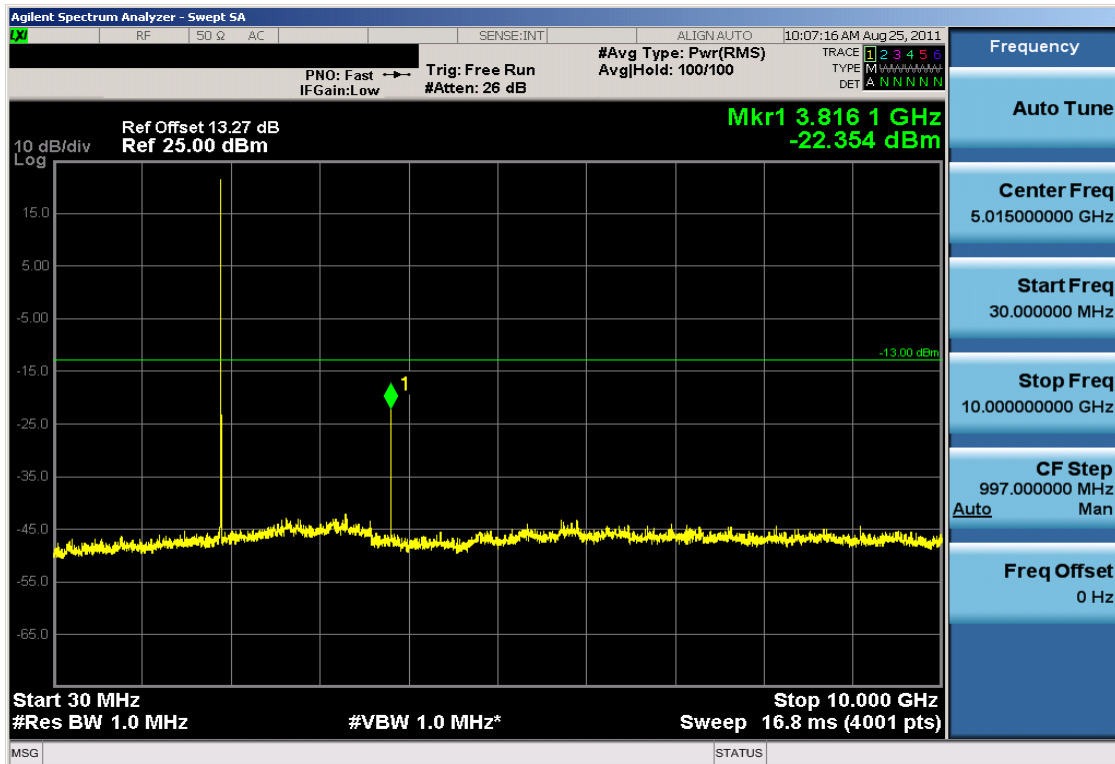


Plot 7-20. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

| | | | | |
|--------------------------------------|--|--|---------------|---------------------------------|
| FCC ID: IHDT56MP1 | PCTEST ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | Page 30 of 33 | |

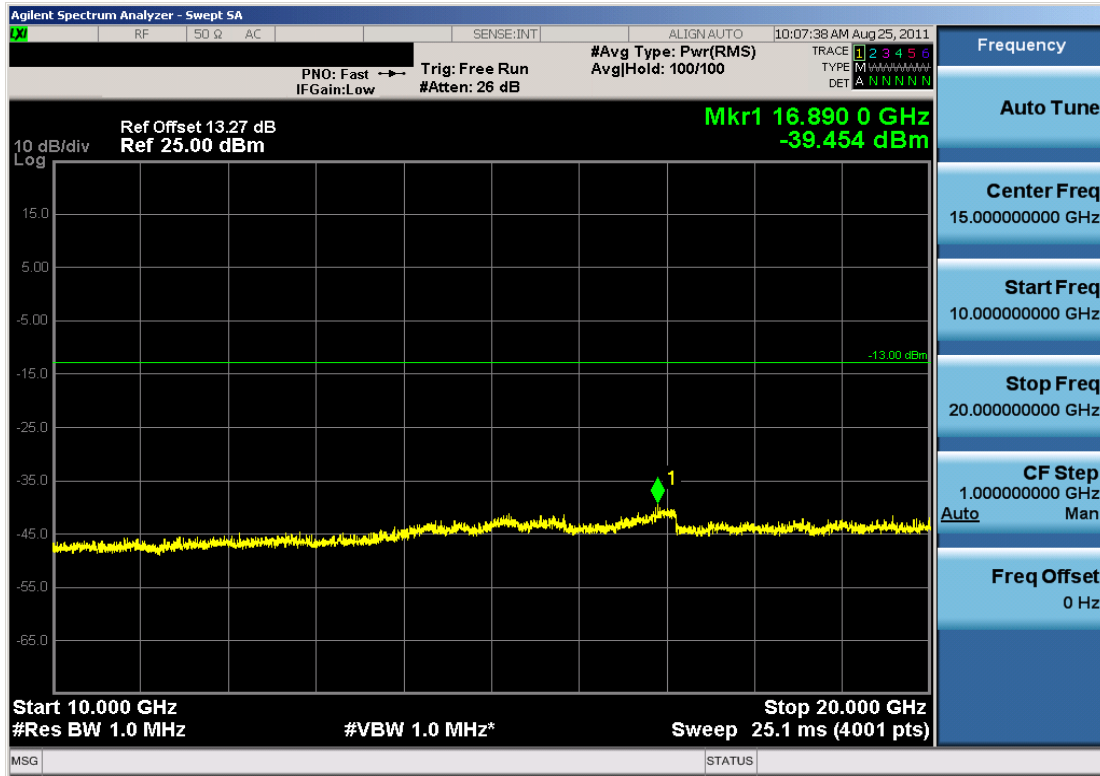

Plot 7-21. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

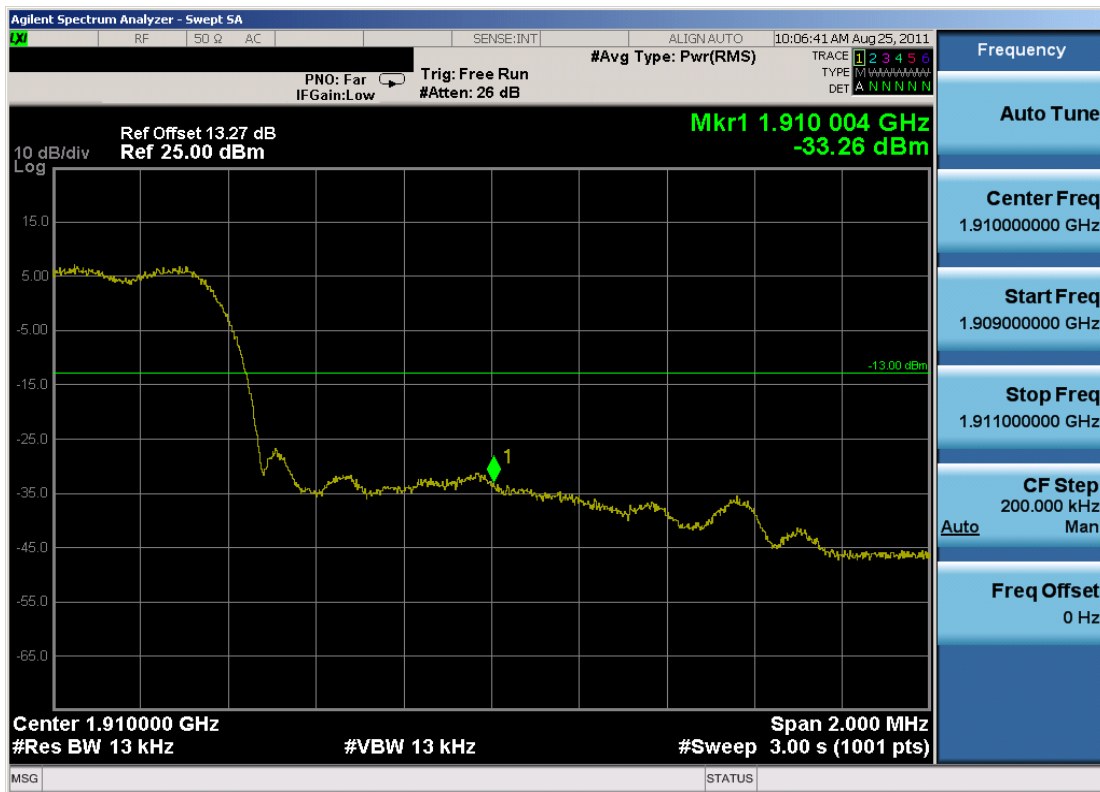



Plot 7-22. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

| | | | | |
|--------------------------------------|-------------------------------------|--|--|---------------------------------|
| FCC ID: IHDT56MP1 | | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 31 of 33 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Motorola Portable Handset FCC ID: IHDT56MP1** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules and RSS-132 and RSS-133 of the Industry Canada rules.

| | | | | |
|--------------------------------------|---|--|---|---------------------------------|
| FCC ID: IHDT56MP1 |  | FCC Pt. 22/24 CDMA / EvDO MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) |  | Reviewed by: Quality Manager |
| Test Report S/N: 0Y1108231465.IHD | Test Dates: August 25 - 26, 2011 | EUT Type: Portable Handset | | Page 33 of 33 |