

#11 GSM850_Right Cheek_Ch189**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.757 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.58 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 0.763 mW/g

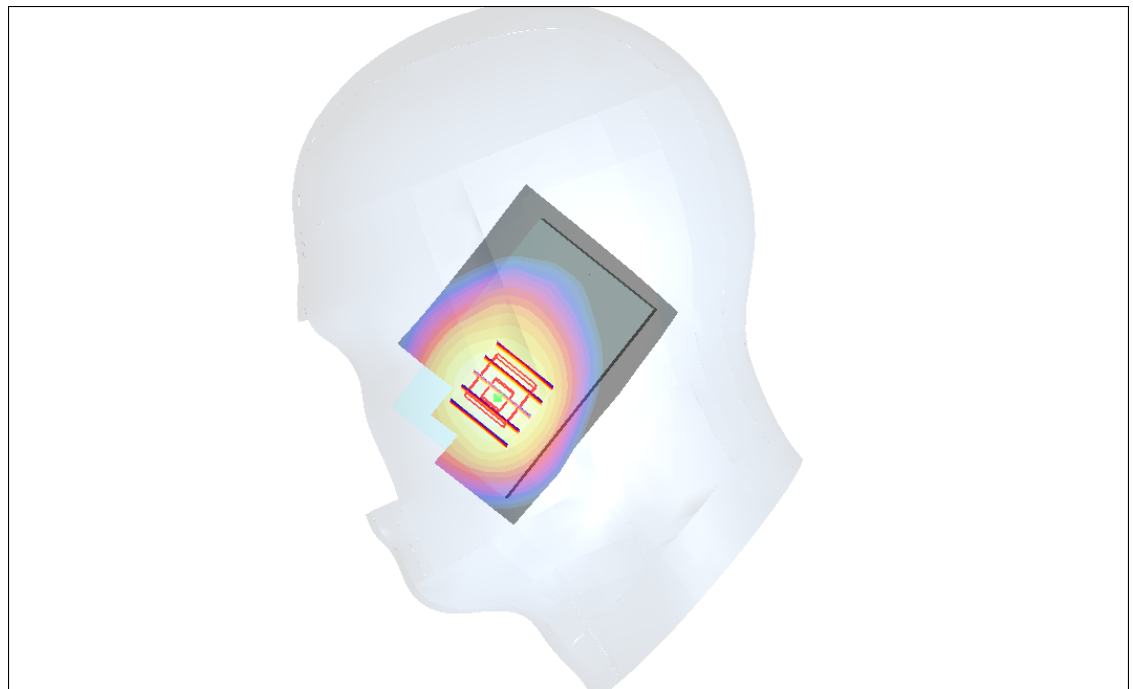

0 dB = 0.763mW/g

#11 GSM850_Right Cheek_Ch189_2D**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.757 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.58 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 0.763 mW/g

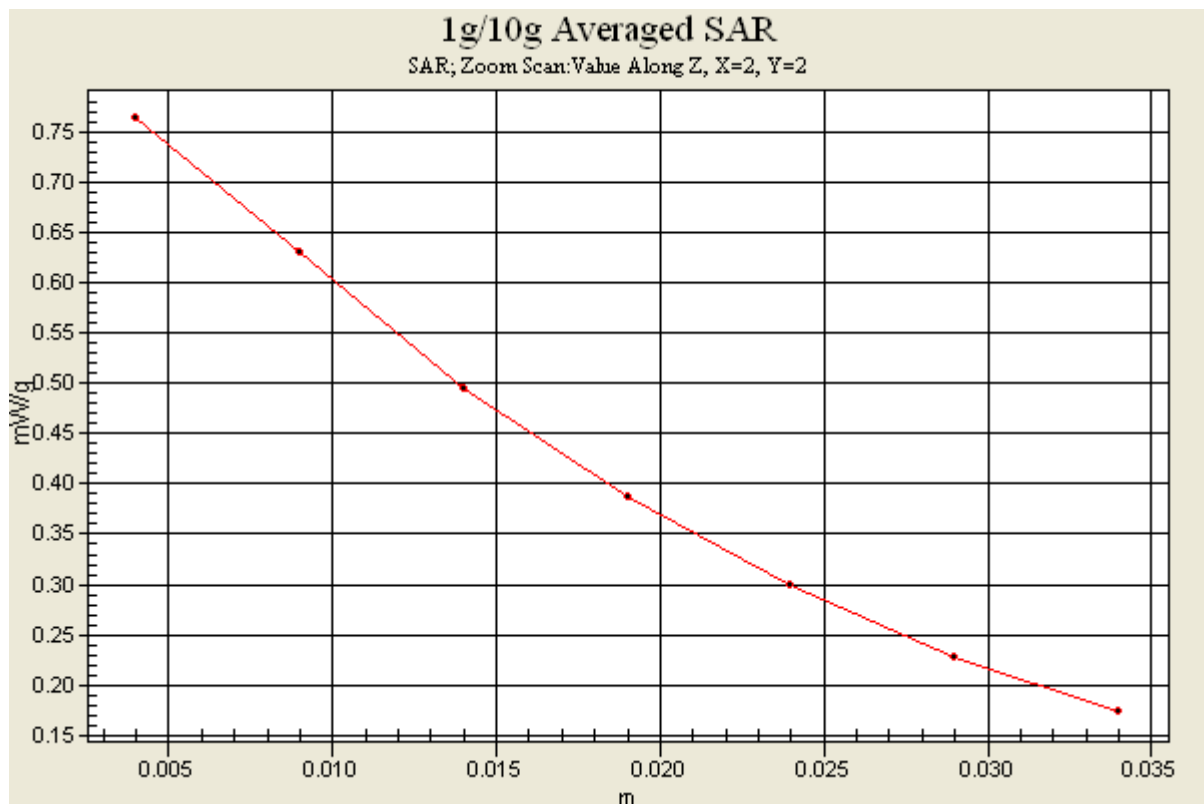

#12 GSM850_Right Tilted_Ch189**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.356 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.363 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.282 mW/g

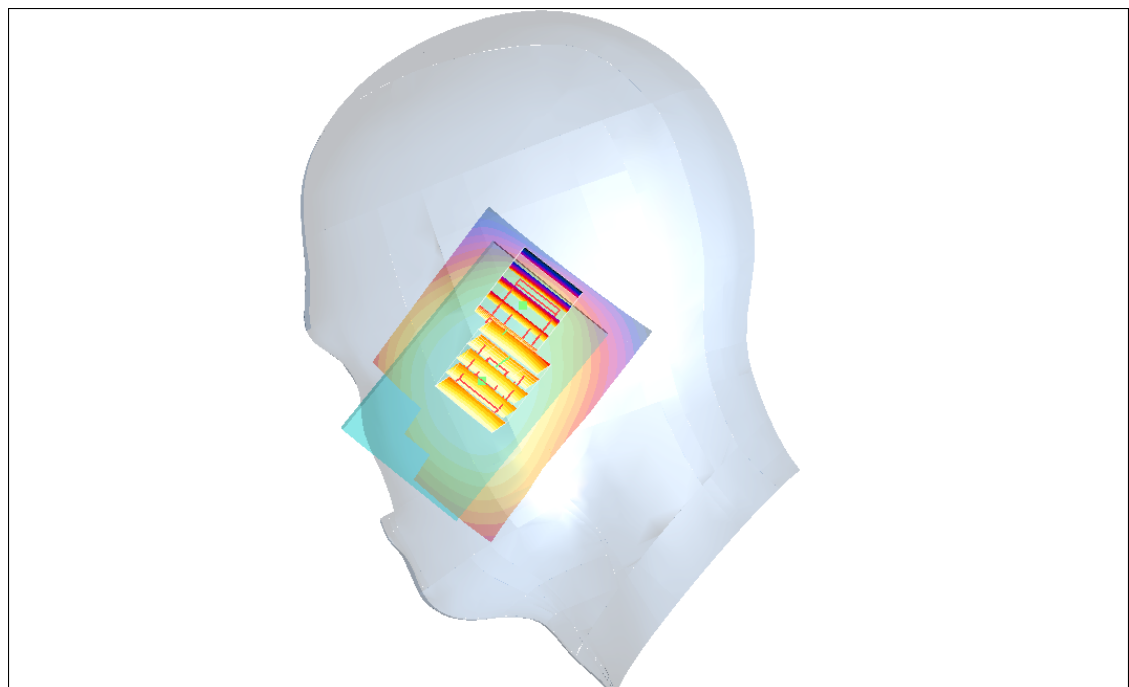

0 dB = 0.282mW/g

#13 GSM850_Left Cheek_Ch189**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.749 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 0.723 mW/g

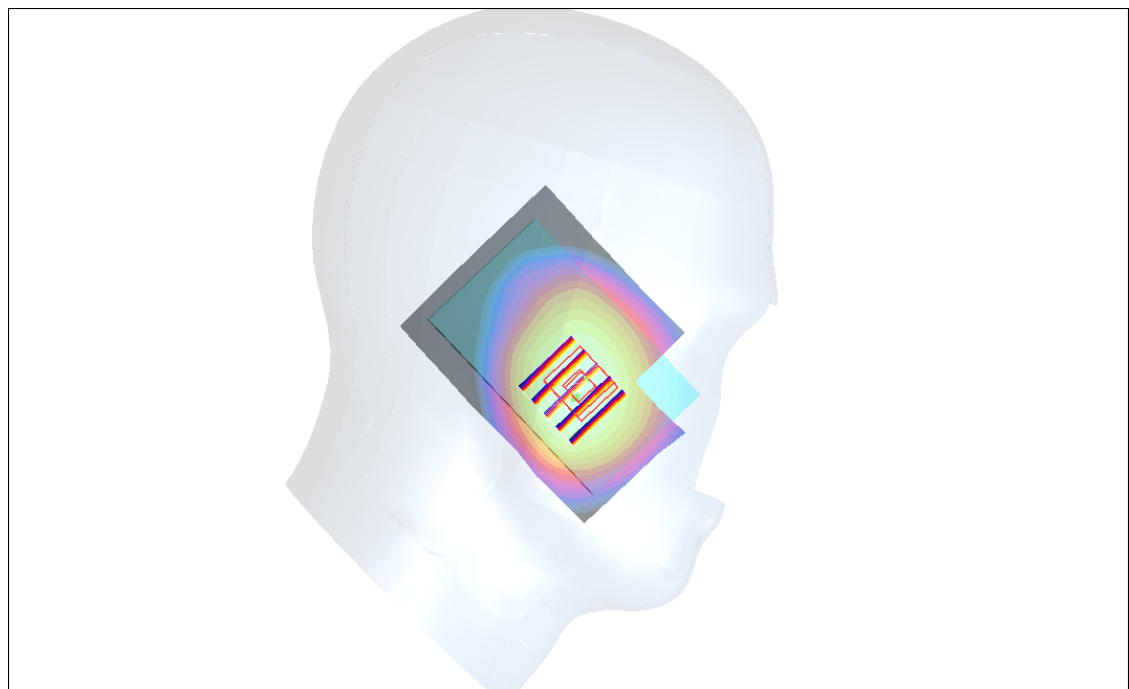

0 dB = 0.723mW/g

#14 GSM850_Left Tilted_Ch189**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.403 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.404 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

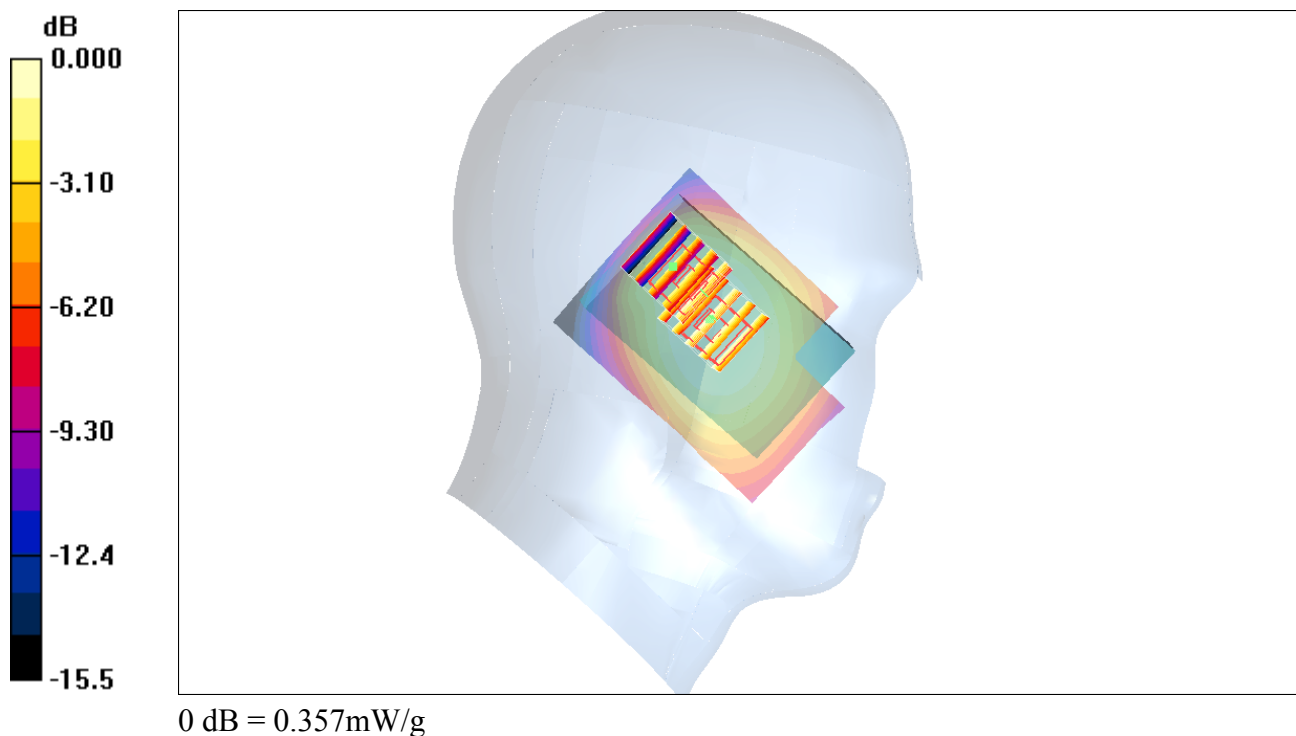

#19 GSM1900_Right Cheek_Ch512**DUT: 1D0154-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_120115 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.635 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.386 mW/g

Maximum value of SAR (measured) = 0.616 mW/g

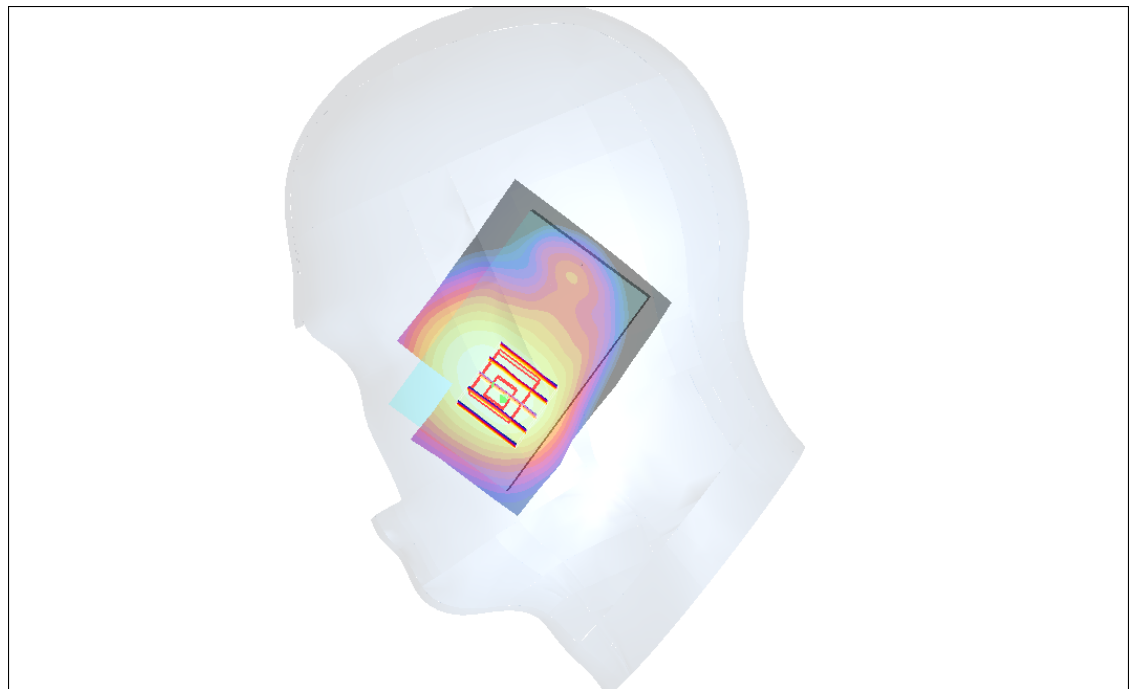

0 dB = 0.616mW/g

#20 GSM1900_Right Tilted_Ch512**DUT: 1D0154-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_120115 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

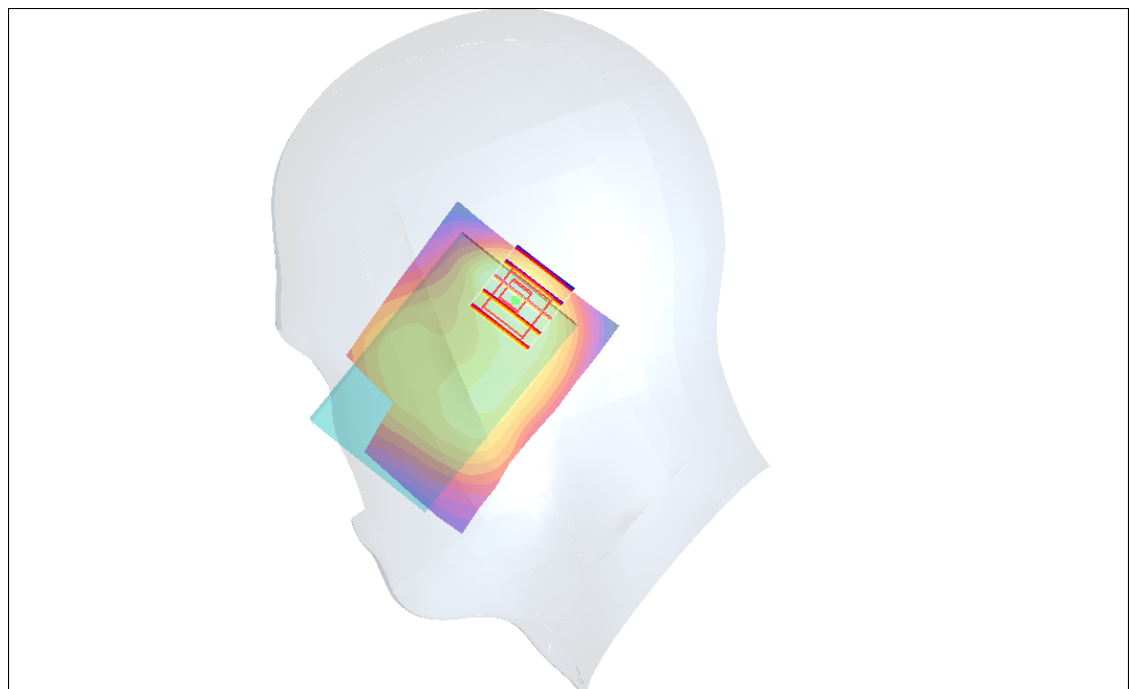

0 dB = 0.293mW/g

#21 GSM1900_Left Cheek_Ch512**DUT: 1D0154-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_120115 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.822 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.32 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.796 mW/g

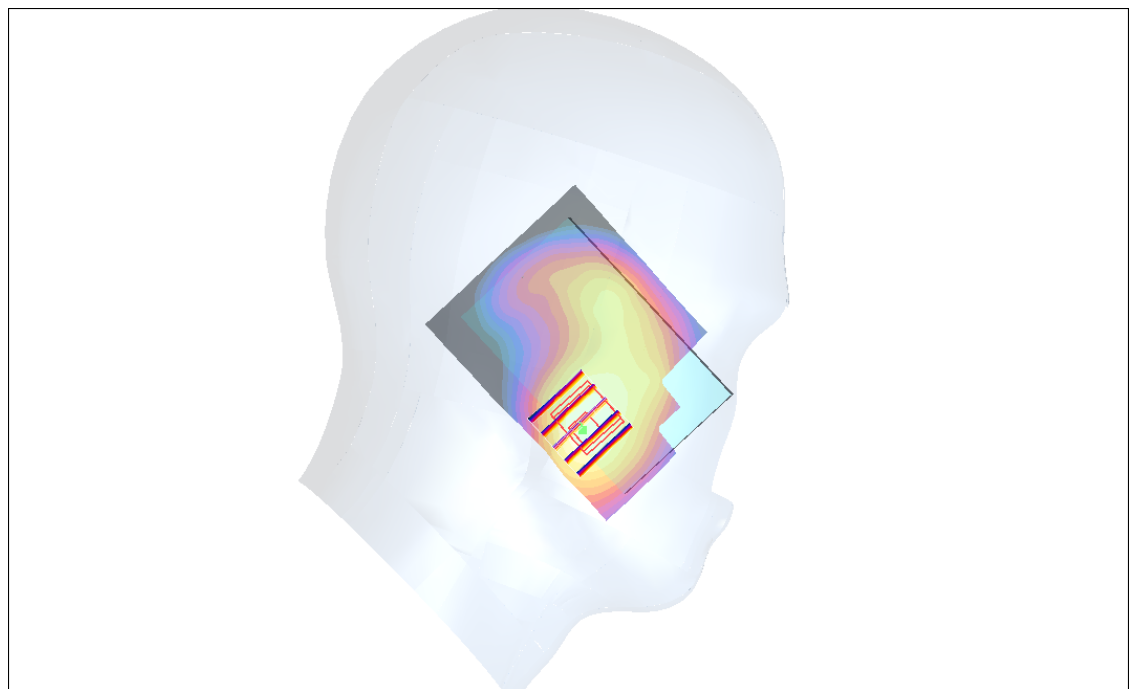

0 dB = 0.796mW/g

#21 GSM1900_Left Cheek_Ch512_2D**DUT: 1D0154-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_120115 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.822 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.32 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.796 mW/g

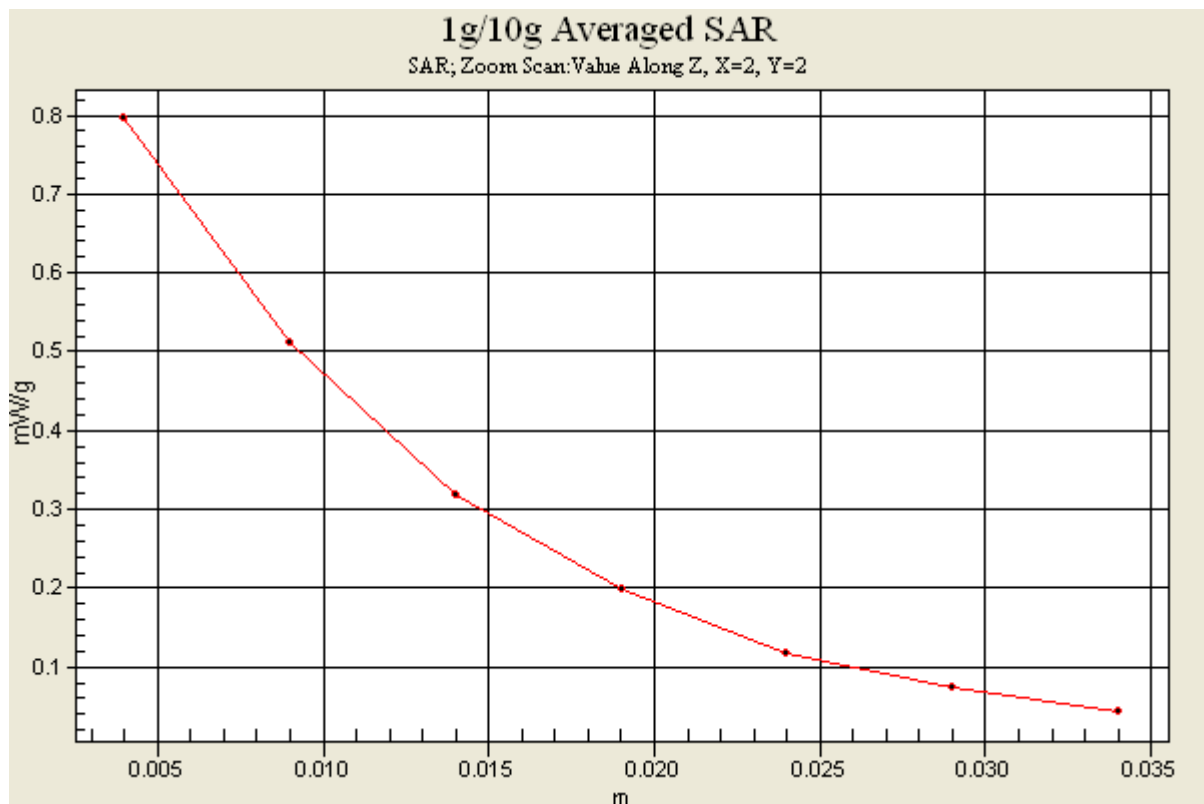

#22 GSM1900_Left Tilted_Ch512**DUT: 1D0154-01**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_120115 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

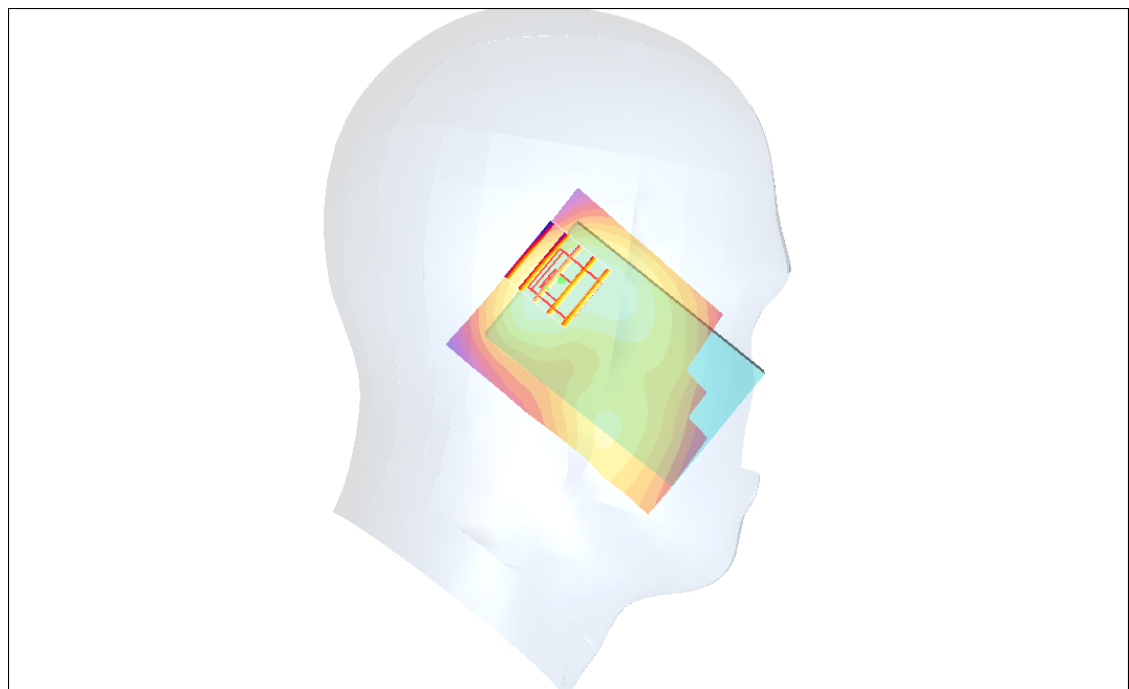

0 dB = 0.276mW/g

#15 WCDMA V_RMC12.2K_Right Cheek_Ch4182**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.802 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.578 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

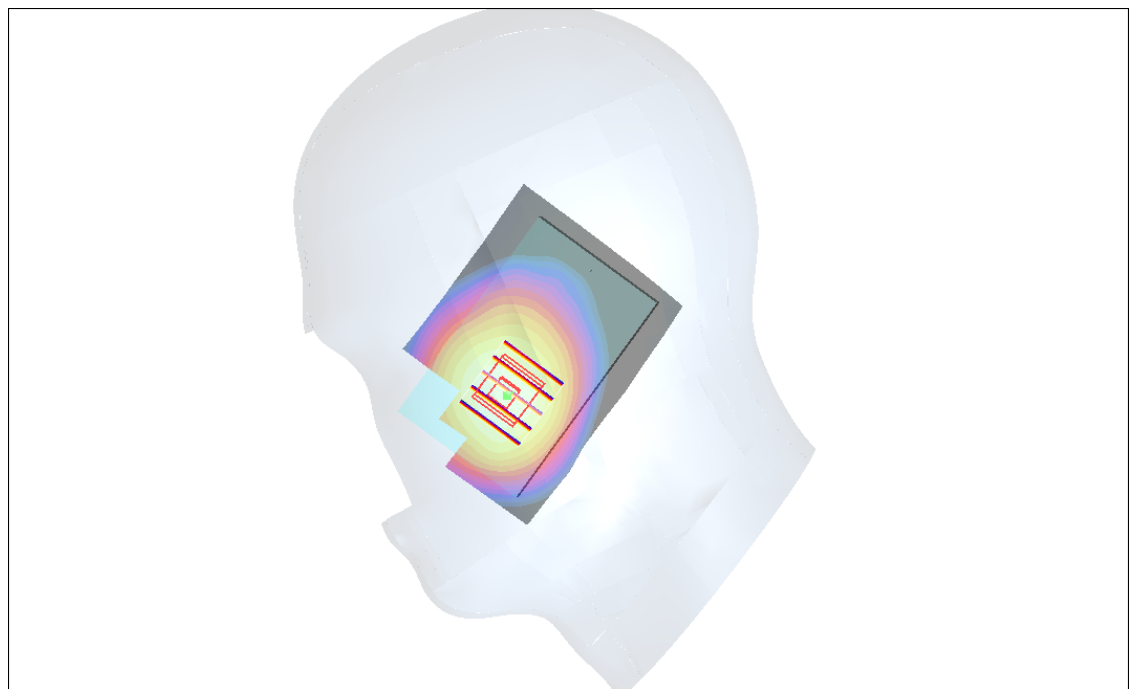

0 dB = 0.808mW/g

#15 WCDMA V_RMC12.2K_Right Cheek_Ch4182_2D**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.802 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.578 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

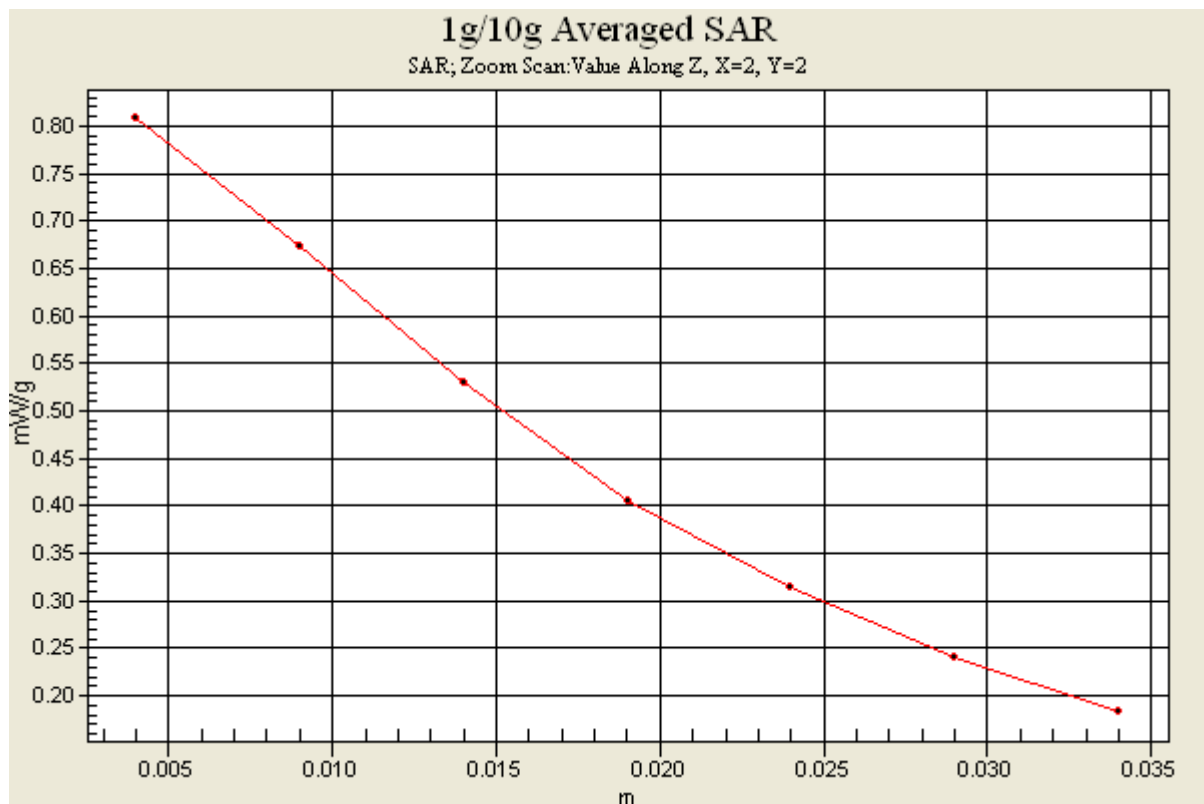

#16 WCDMA V_RMC12.2K_Right Tilted_Ch4182**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.375 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.379 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

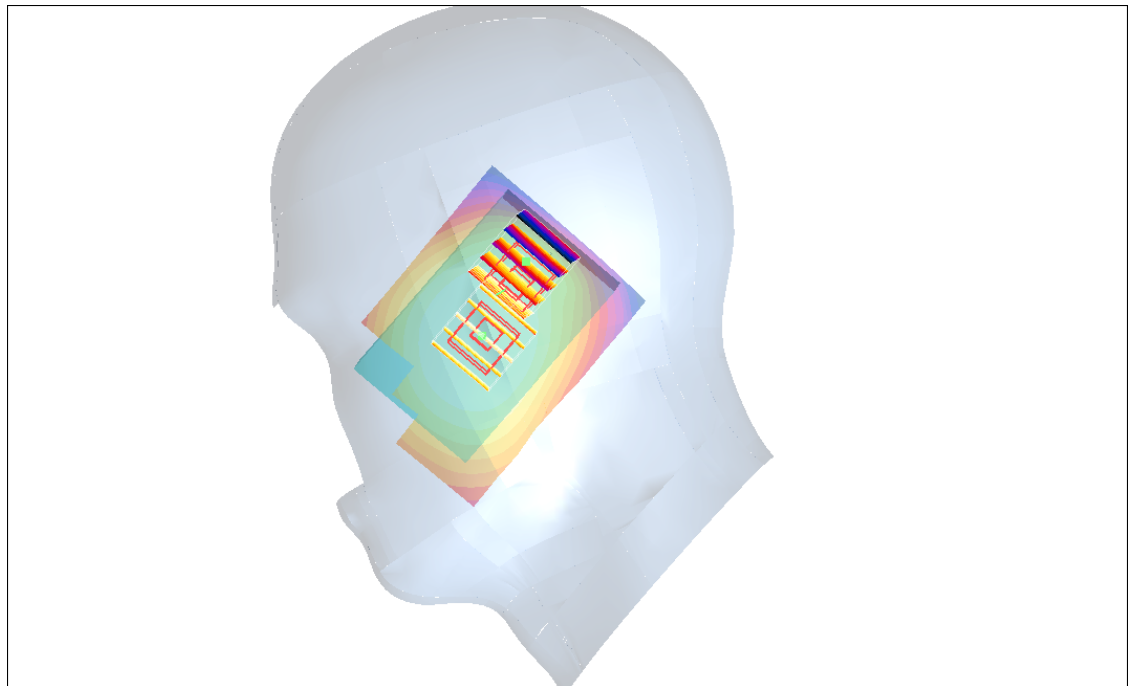

0 dB = 0.298mW/g

#17 WCDMA V_RMC12.2K_Left Cheek_Ch4182**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.791 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.900 W/kg

SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 0.758 mW/g

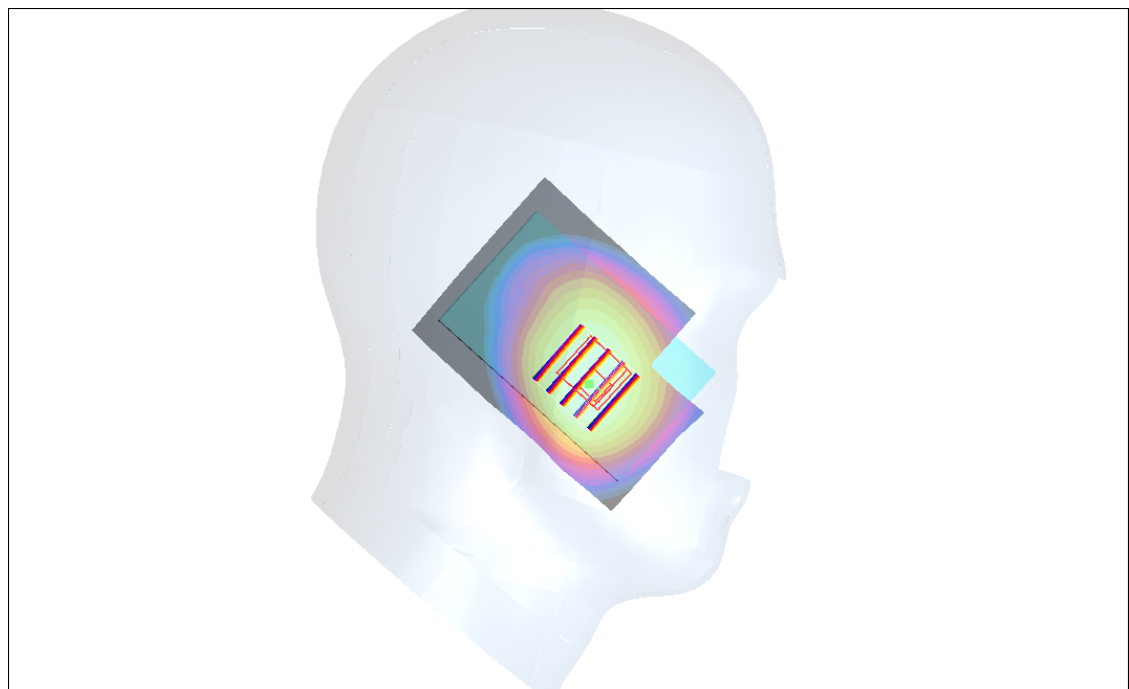

0 dB = 0.758mW/g

#18 WCDMA V_RMC12.2K_Left Tilted_Ch4182**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.39, 6.39, 6.39); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.443 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.441 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

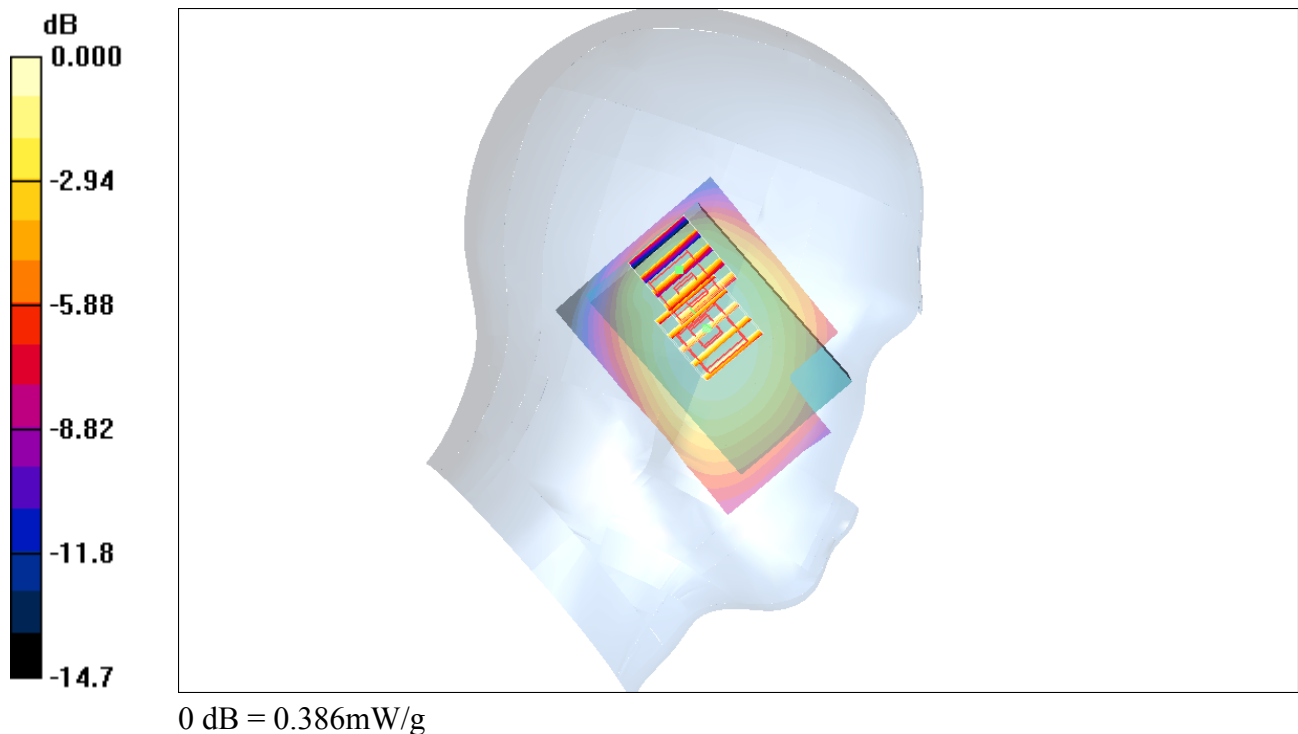

#23 WCDMA II_RMC12.2K_Right Cheek_Ch9262**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.944 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.579 mW/g

Maximum value of SAR (measured) = 0.929 mW/g

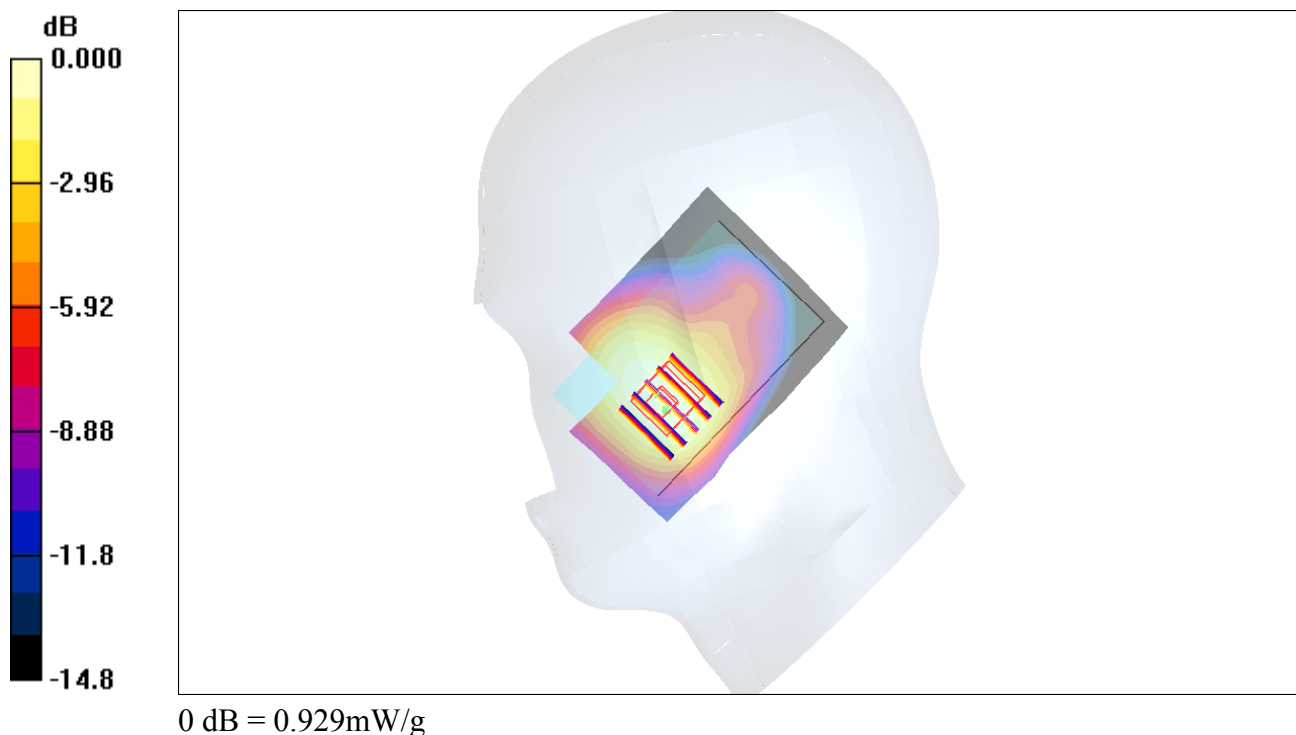

#24 WCDMA II_RMC12.2K_Right Tilted_Ch9262**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.454 mW/g

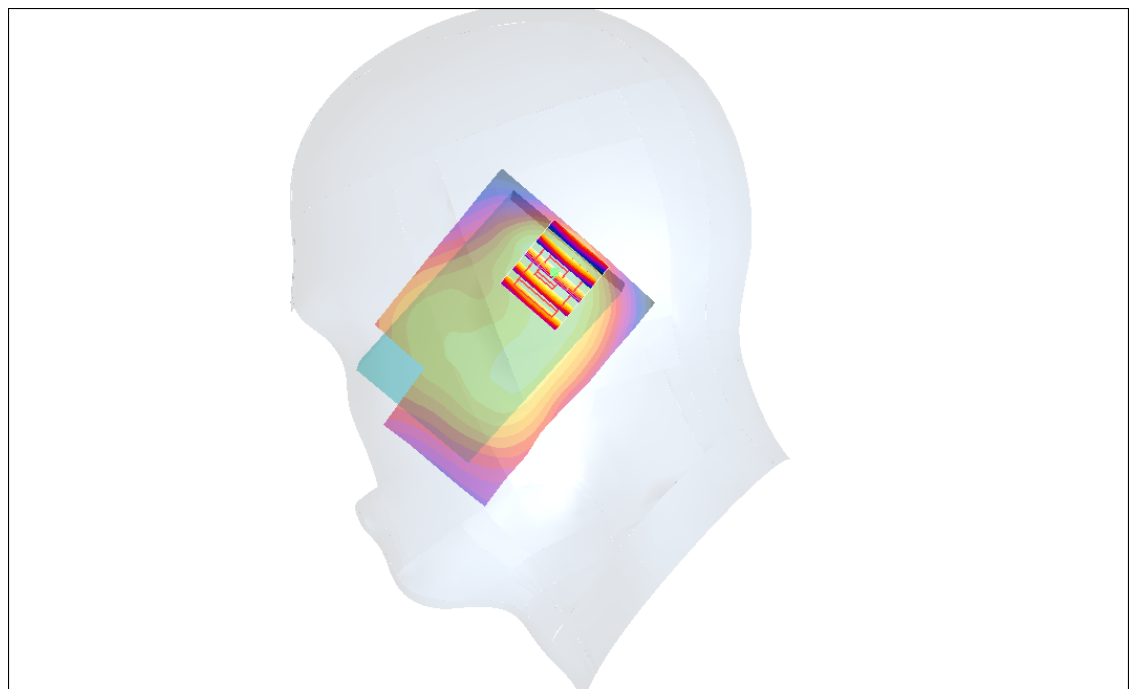

0 dB = 0.454mW/g


#25 WCDMA II_RMC12.2K_Left Cheek_Ch9262**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used : $f = 1852.4 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.2°C ; Liquid Temperature : 21.2°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

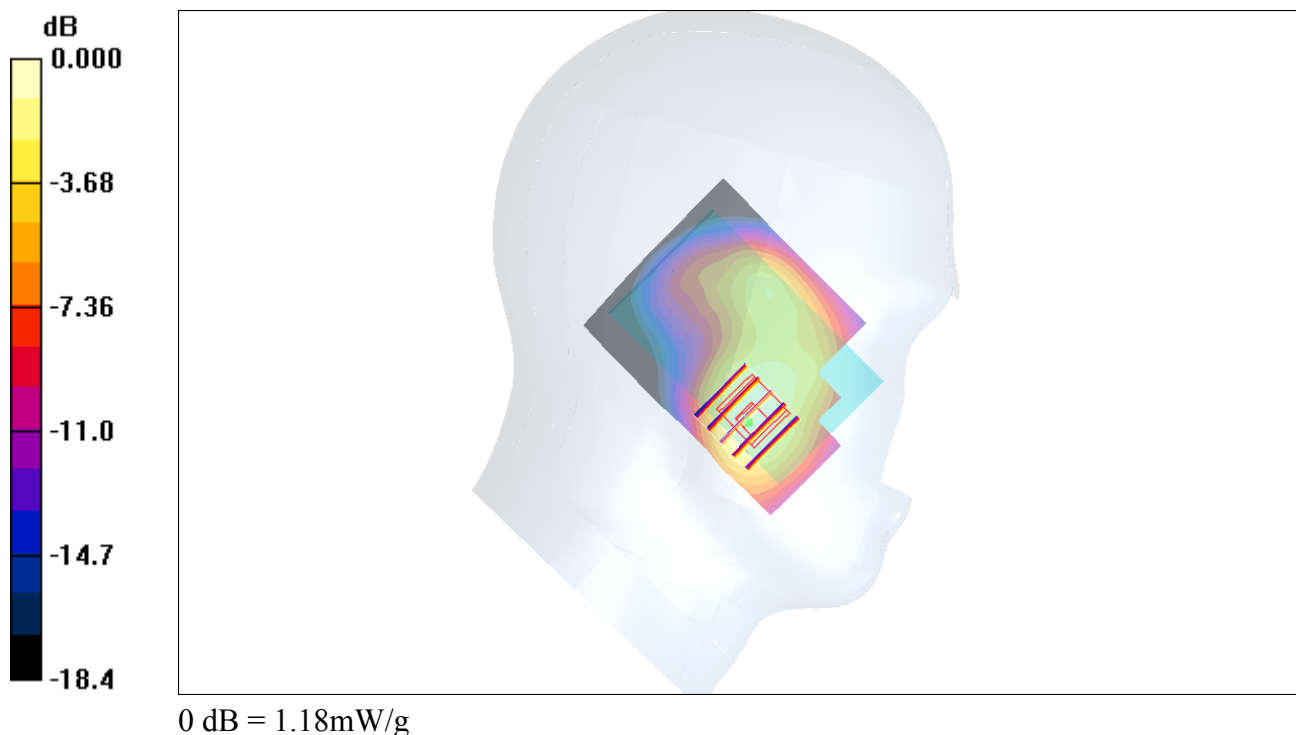Ch9262/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (interpolated) = 1.19 mW/g **Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.4 V/m ; Power Drift = -0.021 dB Peak SAR (extrapolated) = 1.67 W/kg **SAR(1 g) = 1.07 mW/g ; SAR(10 g) = 0.639 mW/g** Maximum value of SAR (measured) = 1.18 mW/g 

#26 WCDMA II_RMC12.2K_Left Tilted_Ch9262**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.529 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.461 mW/g

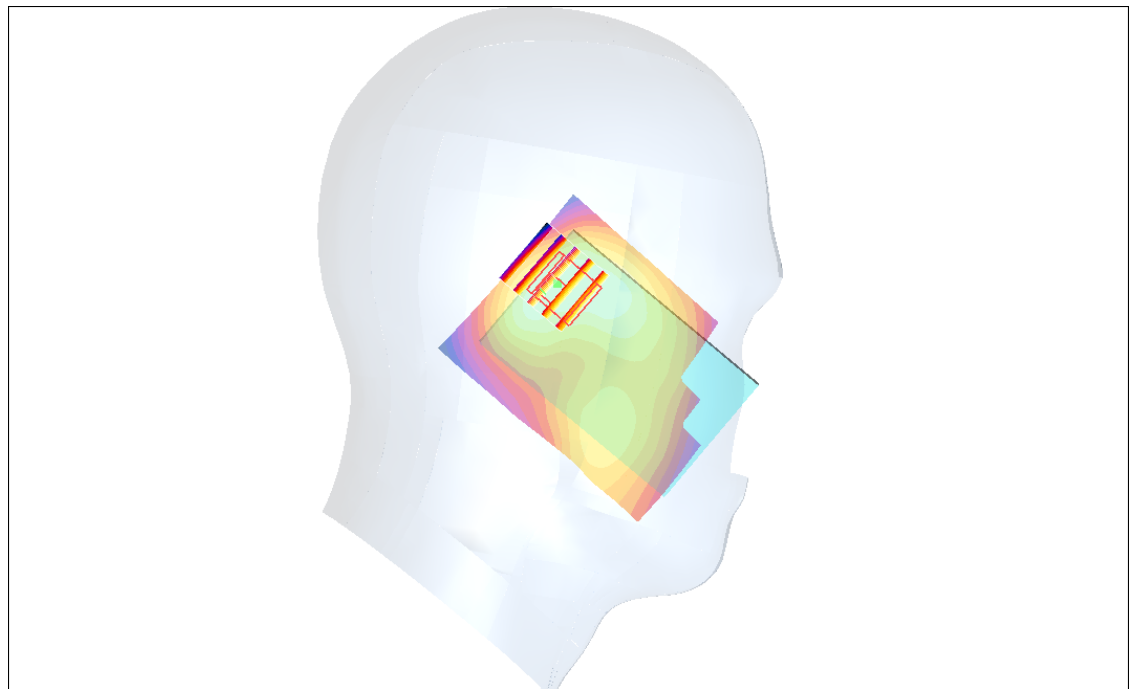

0 dB = 0.461mW/g

#27 WCDMA II_RMC12.2K_Right Cheek_Ch9400**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g



Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.715 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

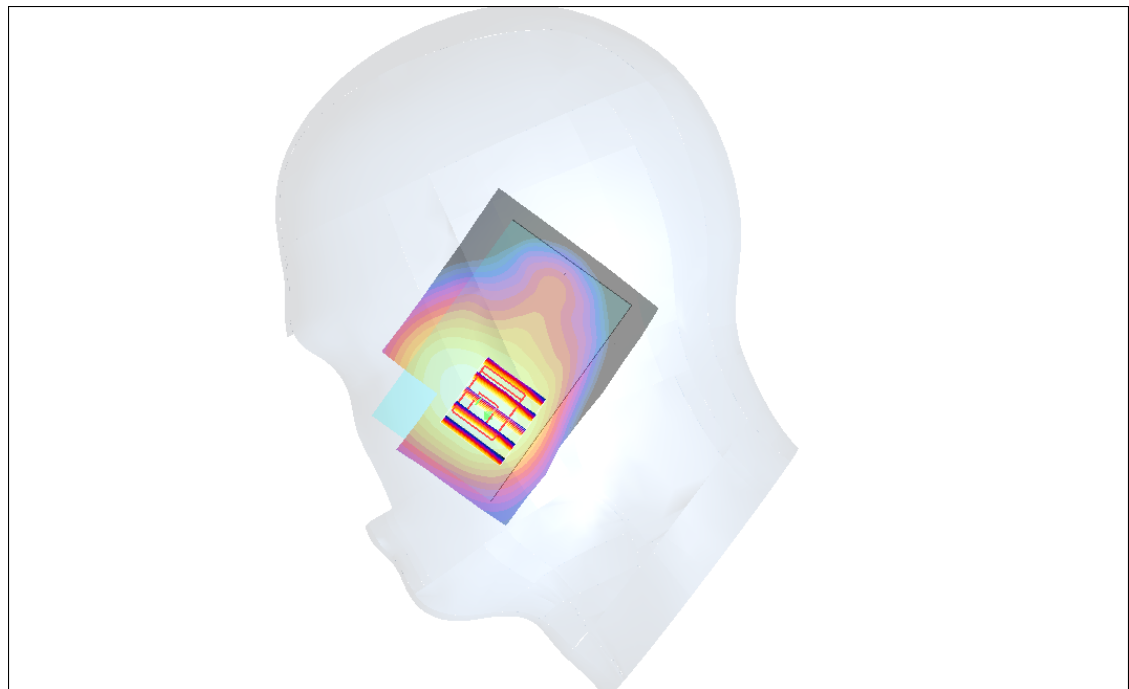

0 dB = 1.16mW/g

#28 WCDMA II_RMC12.2K_Right Cheek_Ch9538**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.993 mW/g; SAR(10 g) = 0.653 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

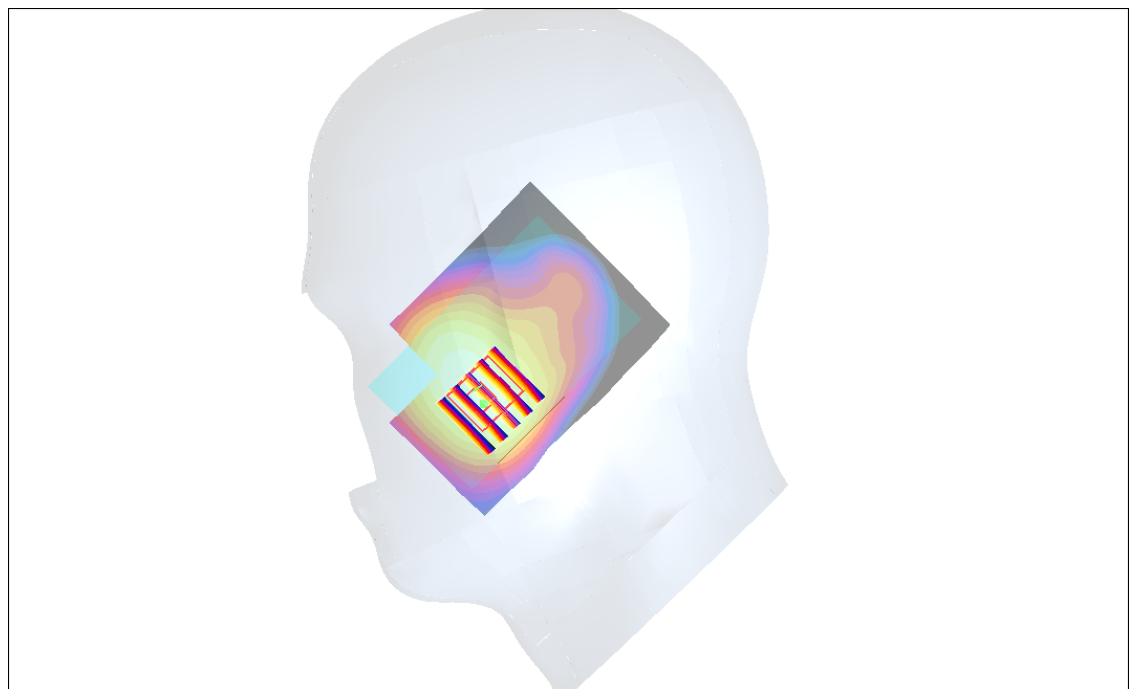

0 dB = 1.07mW/g

#29 WCDMA II_RMC12.2K_Left Cheek_Ch9400**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.56 mW/g



Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.836 mW/g

Maximum value of SAR (measured) = 1.53 mW/g

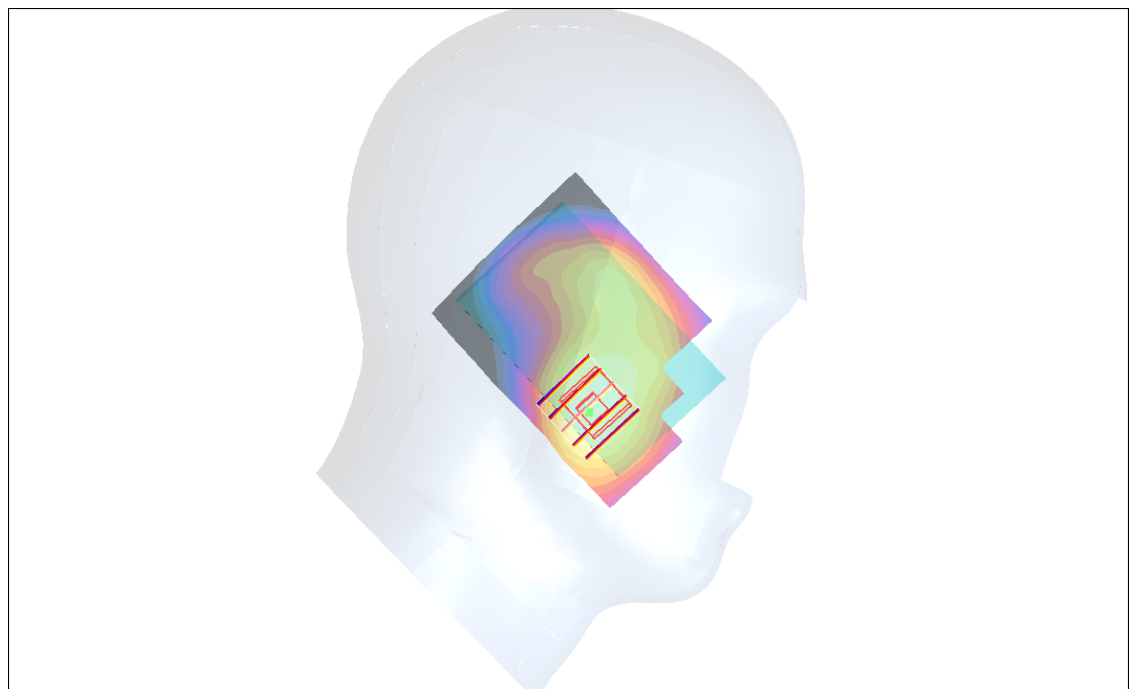

0 dB = 1.53mW/g

#29 WCDMA II_RMC12.2K_Left Cheek_Ch9400_2D**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.56 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.836 mW/g

Maximum value of SAR (measured) = 1.53 mW/g

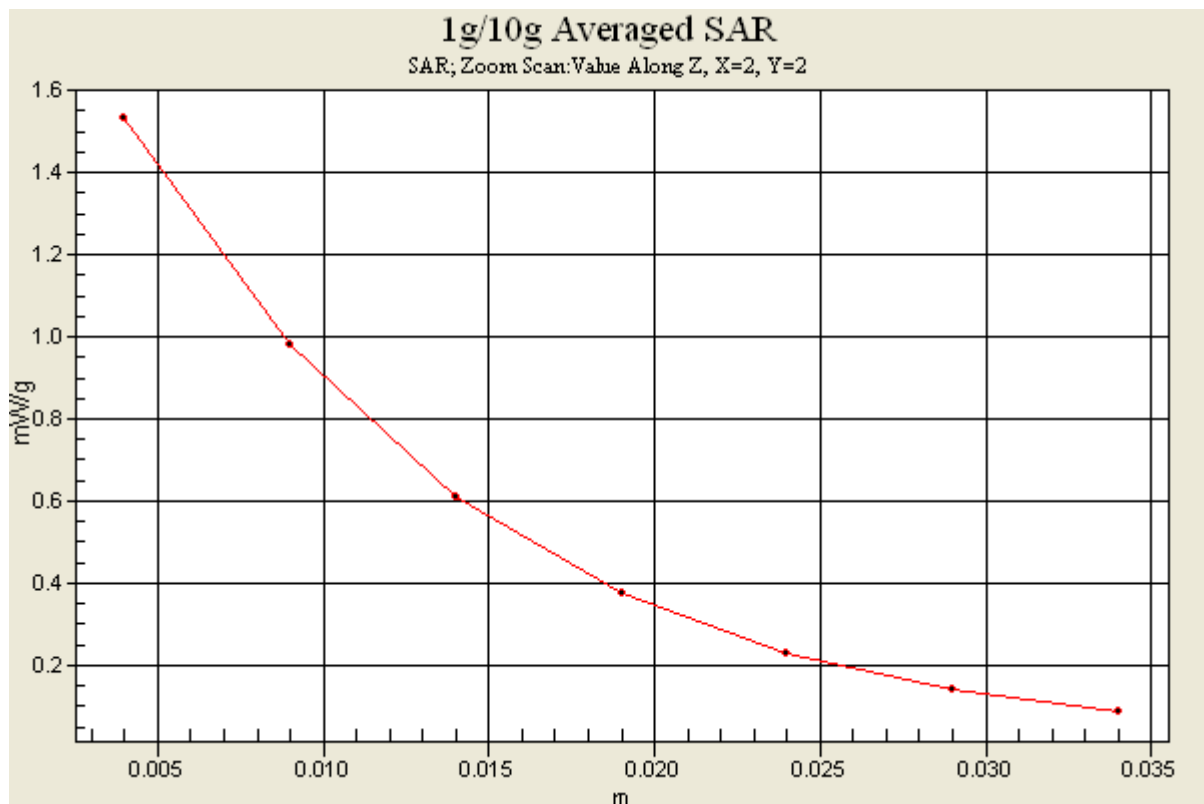

#30 WCDMA II_RMC12.2K_Left Cheek_Ch9538**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_120115 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.2°C ; Liquid Temperature : 21.2°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.43 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.3 V/m ; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.29 mW/g ; SAR(10 g) = 0.764 mW/g

Maximum value of SAR (measured) = 1.40 mW/g

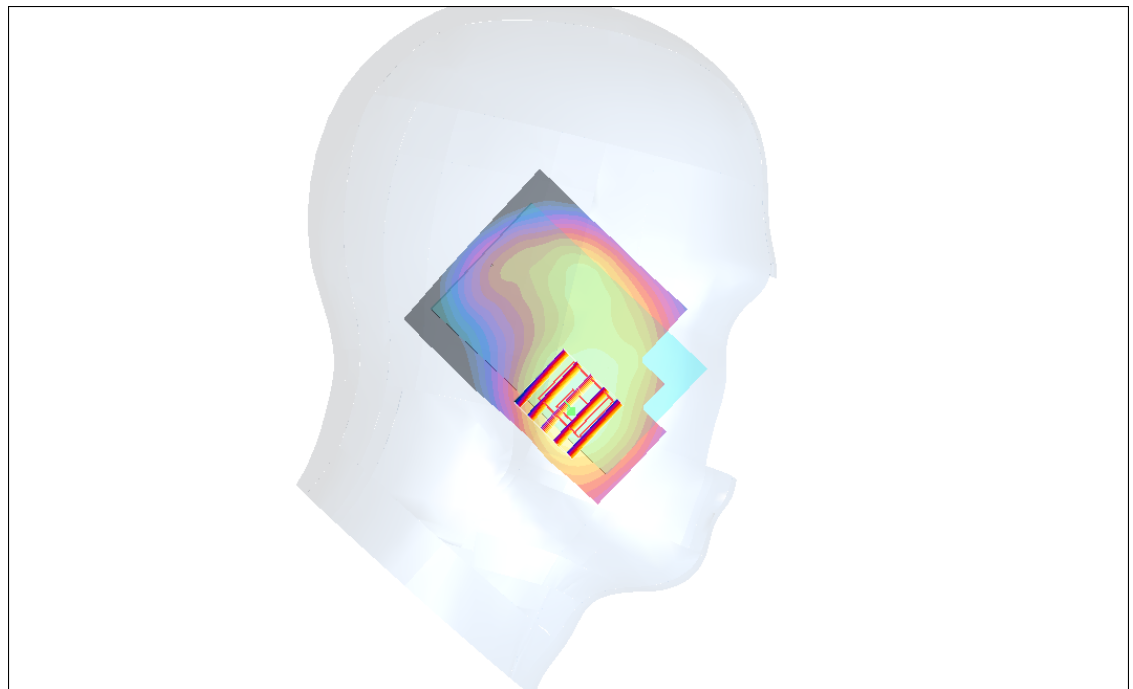

0 dB = 1.40 mW/g

#07 GSM850_GPRS10_Front_1.5cm_Ch189_Earphone**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.420 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.416 mW/g

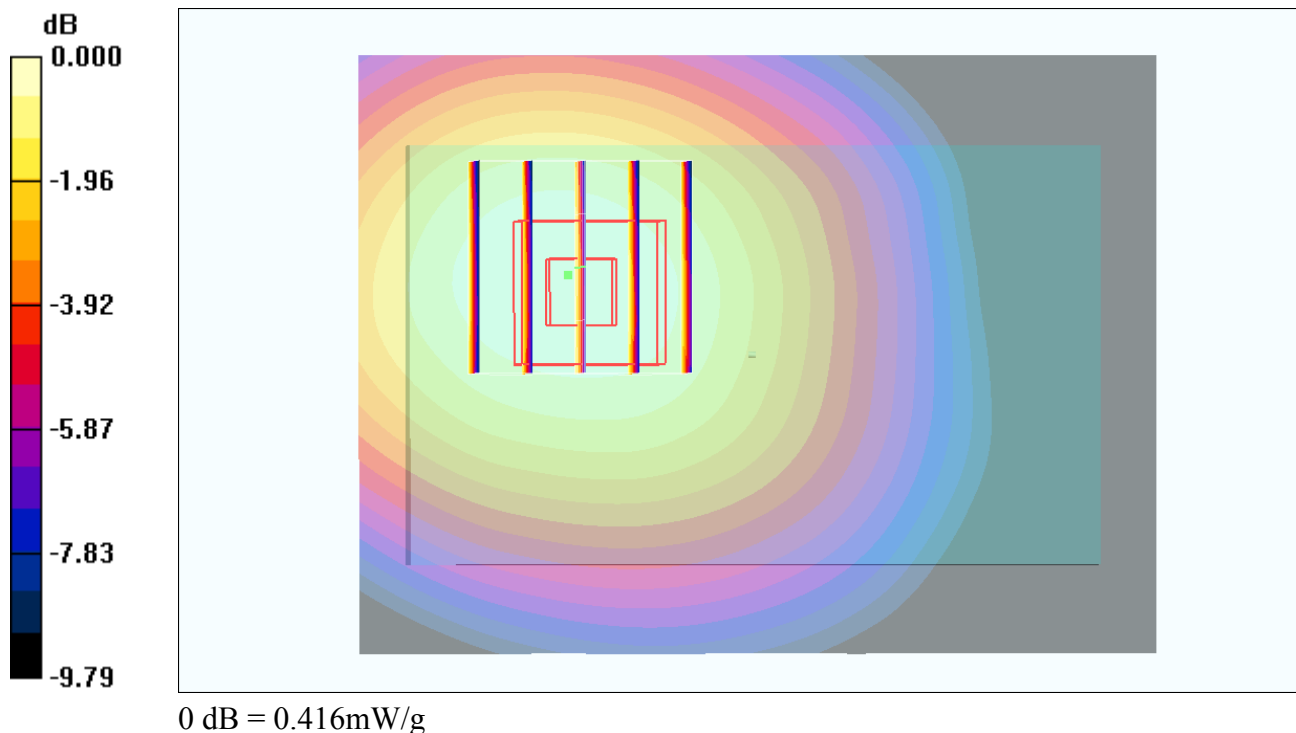

#08 GSM850_GPRS10_Back_1.5cm_Ch189_Earphone**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.689 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

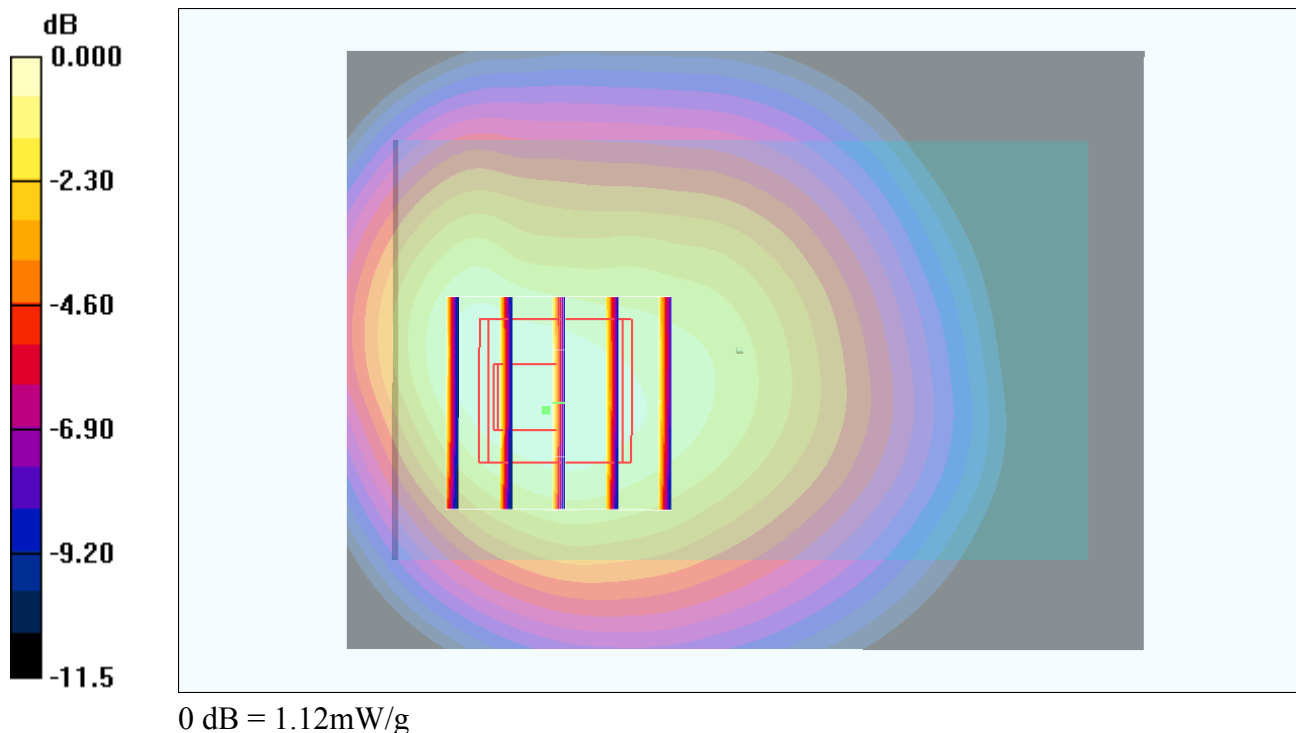

#09 GSM850_GPRS10_Back_1.5cm_Ch128_Earphone**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: MSL_850_120115 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch128/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.800 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.800 mW/g

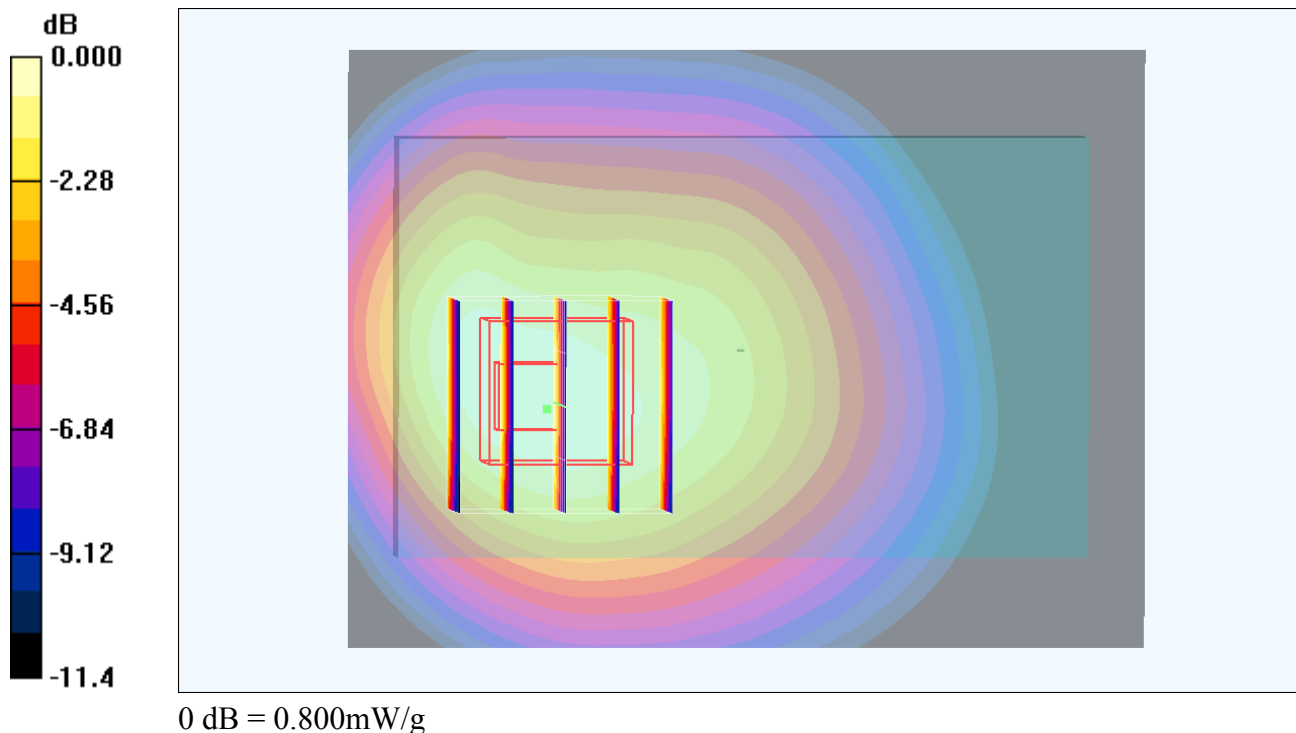

#10 GSM850_GPRS10_Back_1.5cm_Ch251_Earphone**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_120115 Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.50 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.4 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.922 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

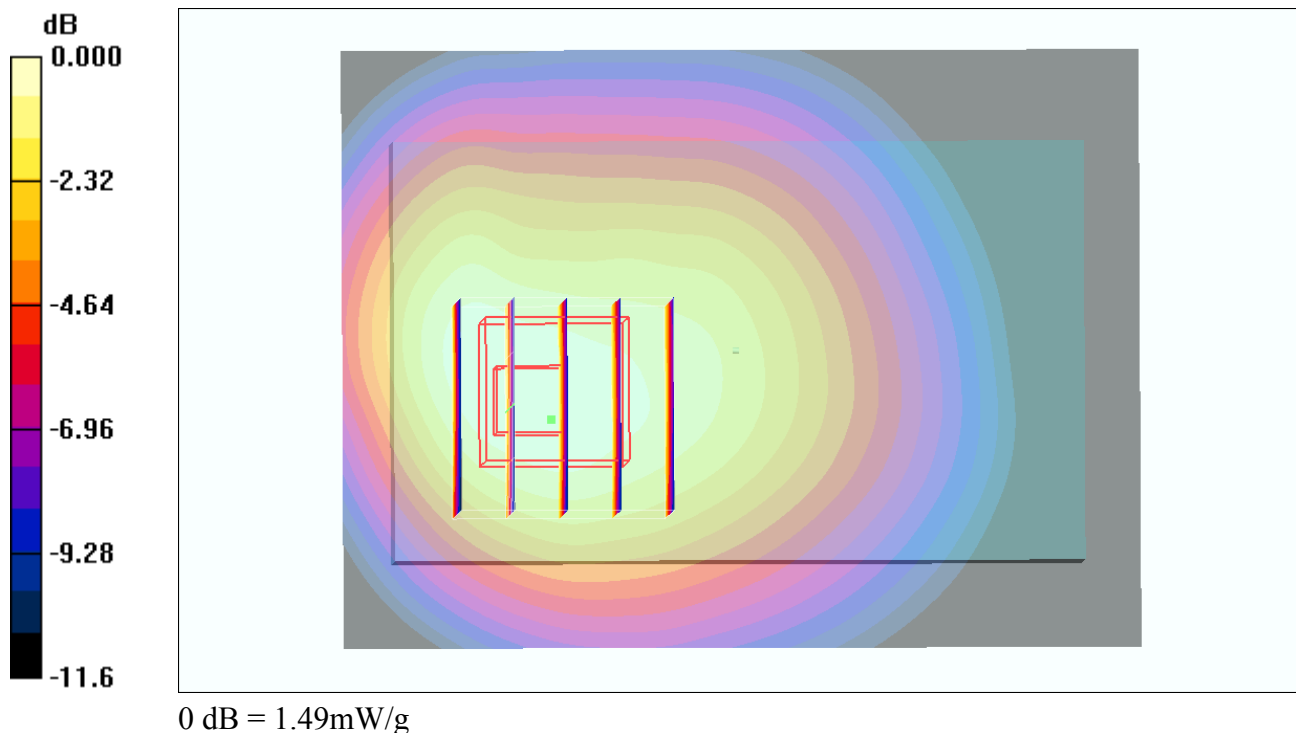

#10 GSM850_GPRS10_Back_1.5cm_Ch251_Earphone_2D**DUT: 1D0154-01**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_120115 Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.50 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.4 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.922 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

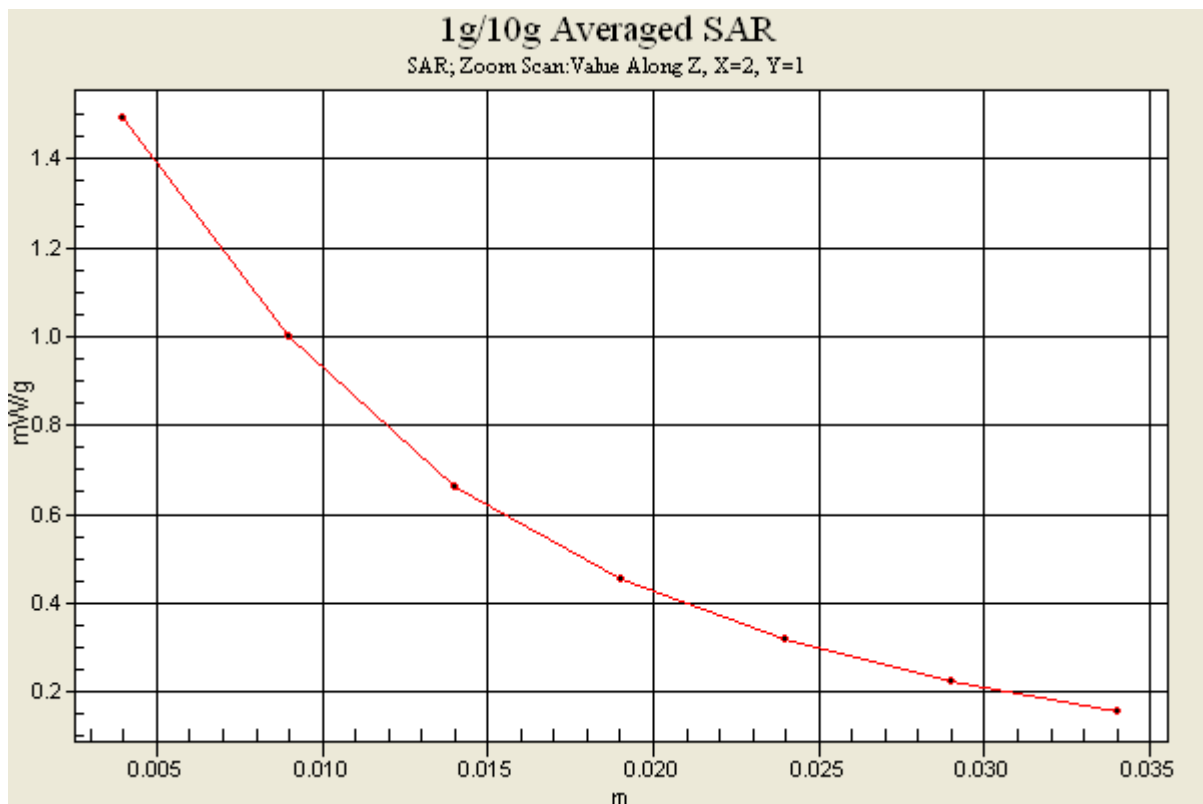

#01 GSM1900_GPRS10_Frot_1.5cm_Ch661_Earphone**DUT: 1D0154-01**

Communication System: PCS ; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL_1900_120114 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r =$

52.954; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.343 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.002 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.335 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.002 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

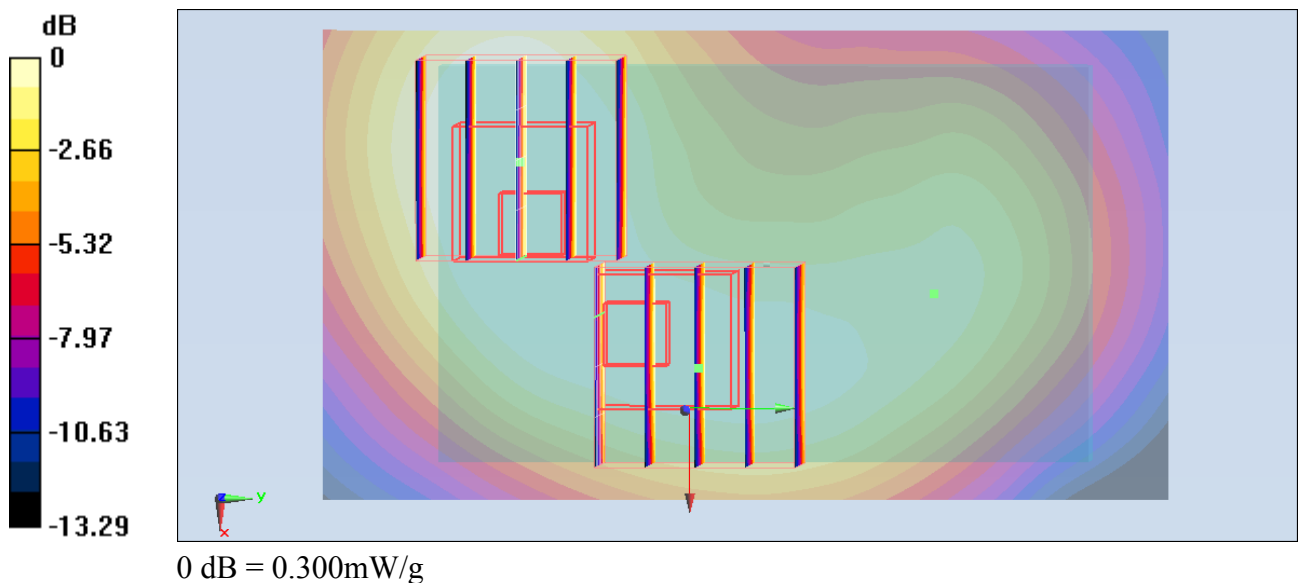

#02 GSM1900_GPRS10_Back_1.5cm_Ch661_Earphone**DUT: 1D0154-01**


Communication System: PCS ; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL_1900_120114 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.954$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

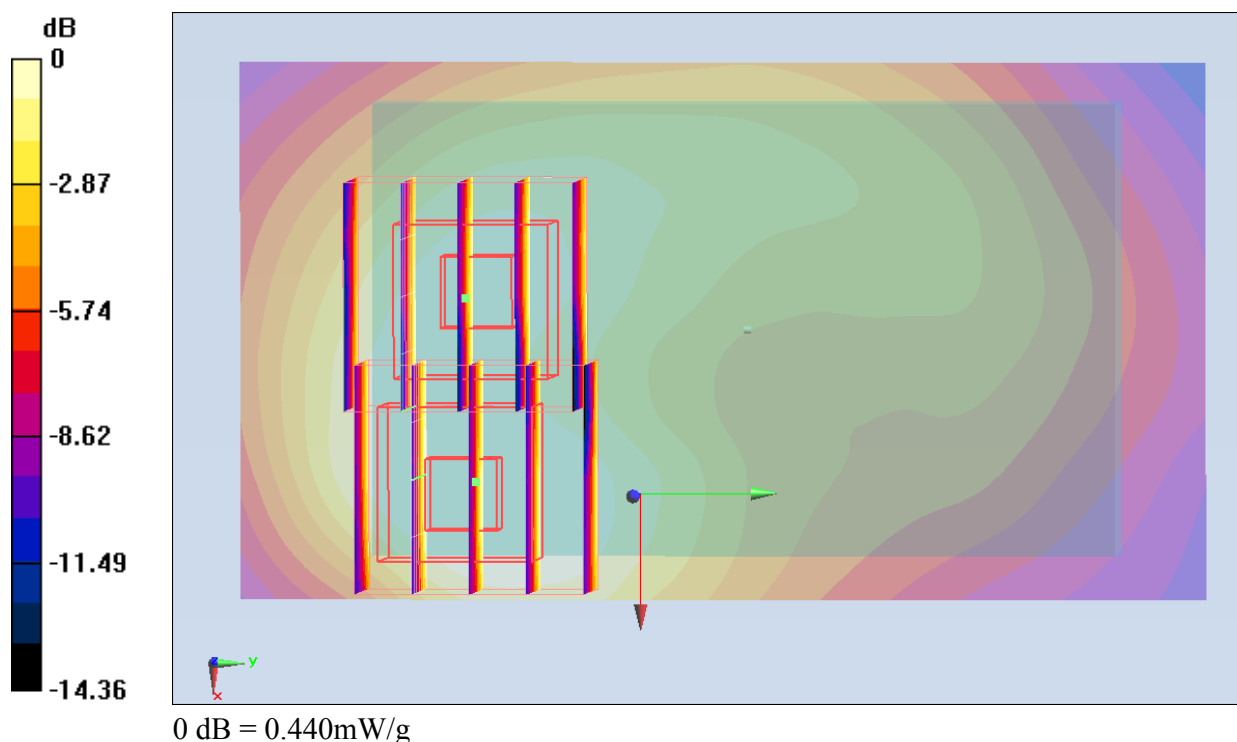Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.602 mW/g**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.363 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.902 W/kg
SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.296 mW/g
Maximum value of SAR (measured) = 0.540 mW/g**Ch661/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.363 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.660 W/kg
SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.243 mW/g
Maximum value of SAR (measured) = 0.439 mW/g

#02 GSM1900_GPRS10_Back_1.5cm_Ch661_Earphone_2D

DUT: 1D0154-01

Communication System: PCS ; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL_1900_120114 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r =$

52.954; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.602 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.363 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.540 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.363 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

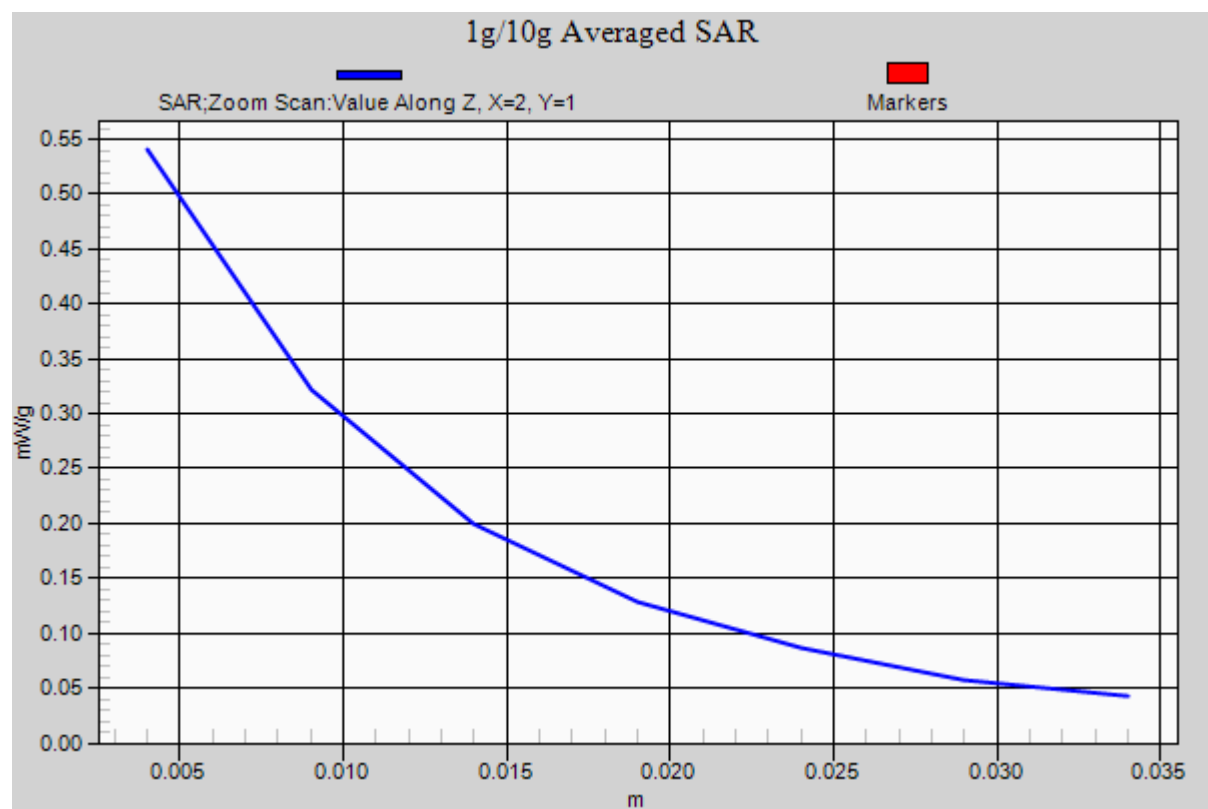

#05 WCDMA V _RMC12.2K_Front_1.5cm_Ch4182_Earphone**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_120114 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r =$

54.792; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.357 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.521 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

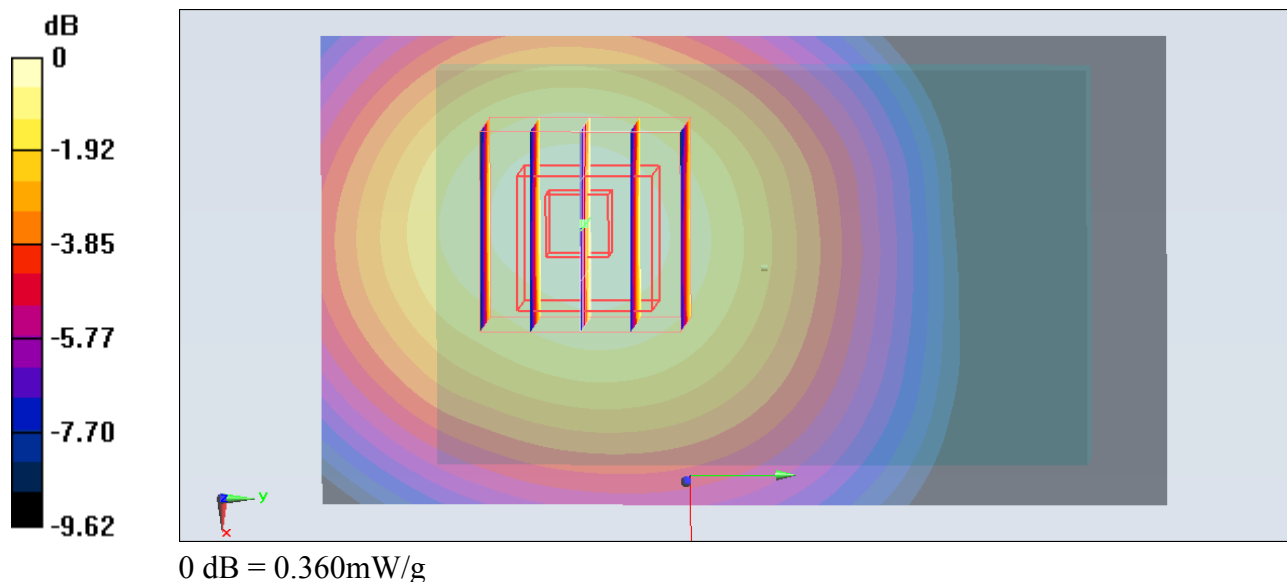

#06 WCDMA V _RMC12.2K_Back_1.5cm_Ch4182_Earphone**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.790 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.482 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

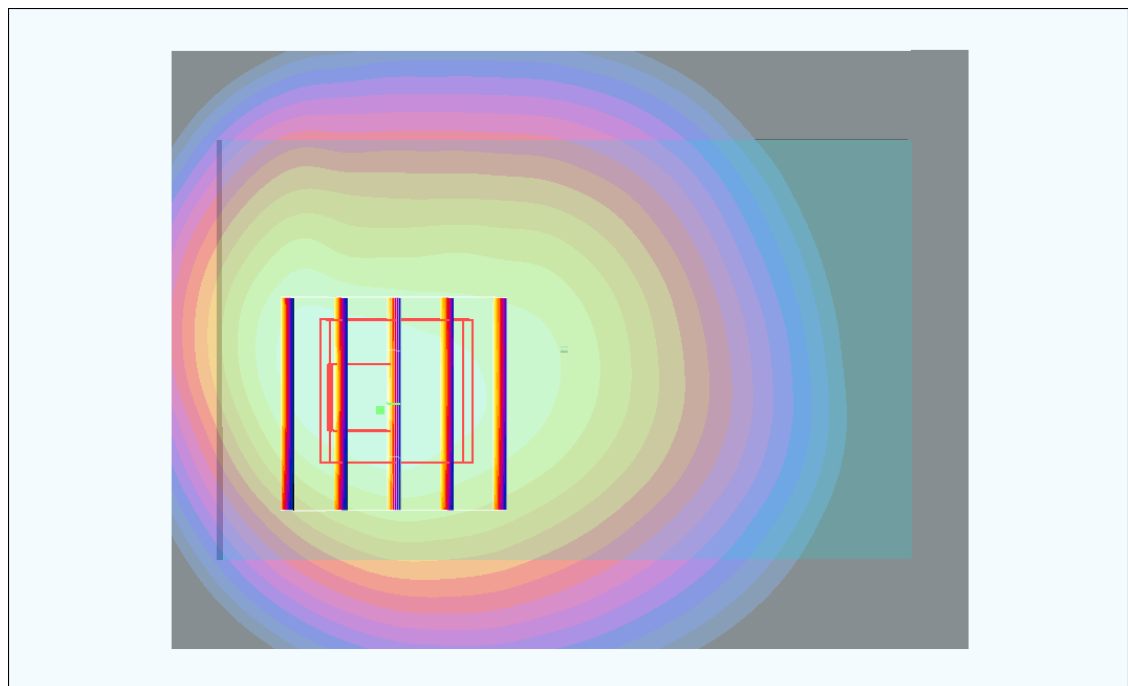

0 dB = 0.777mW/g

#06 WCDMA V_RMC12.2K_Back_1.5cm_Ch4182_Earphone_2D**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_120115 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011-04-28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.790 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.482 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

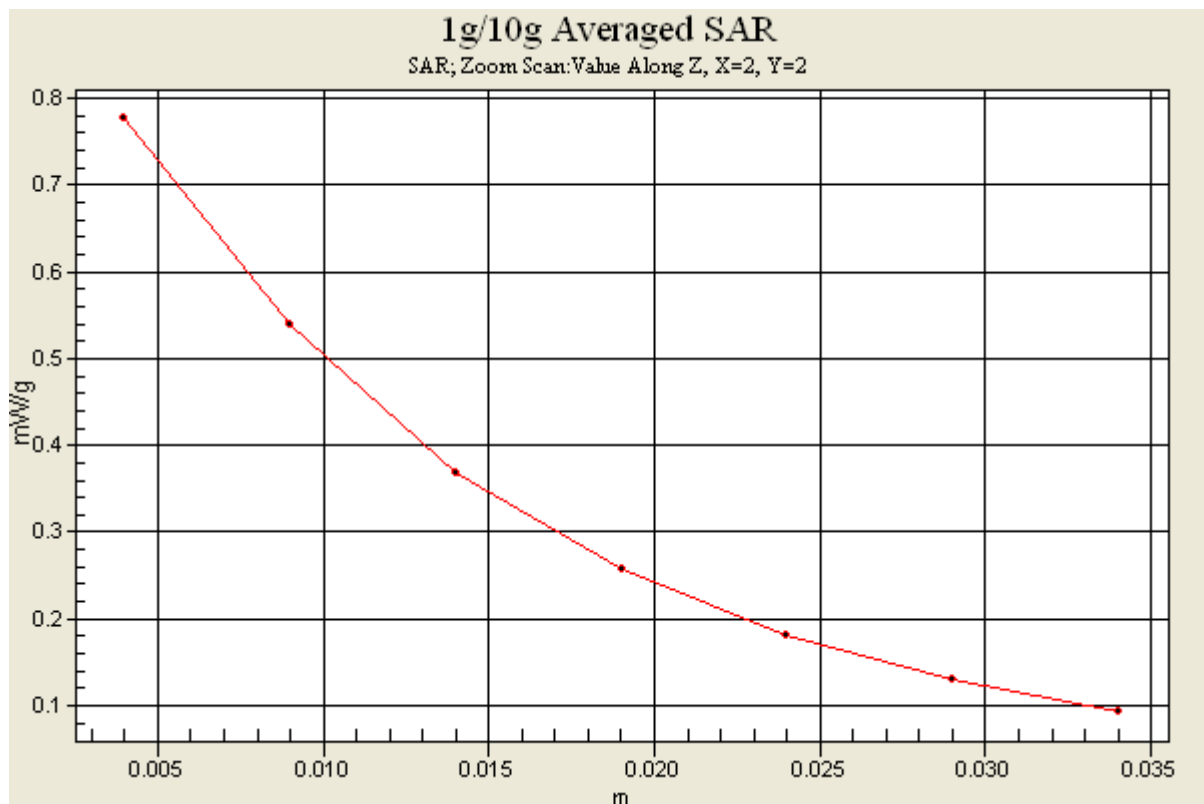

#03 WCDMA II_RMC12.2K_Front_1.5cm_Ch9262_Earphone**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_120114 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.057; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.365 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.818 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.354 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.818 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

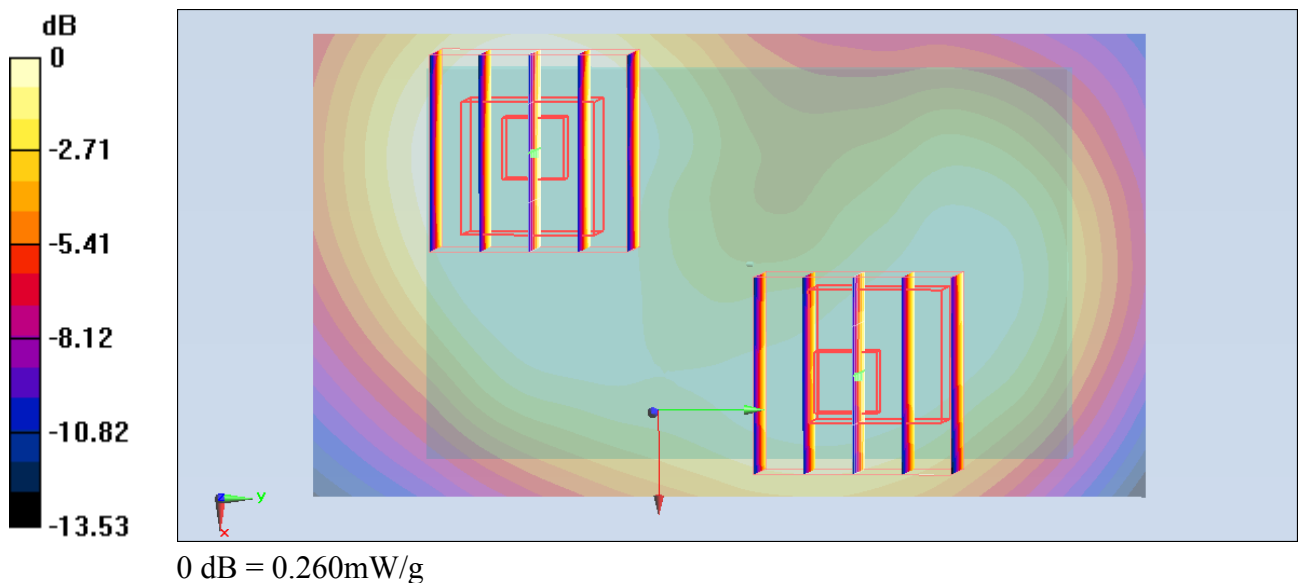

#04 WCDMA II_RMC12.2K_Back_1.5cm_Ch9262_Earphone**DUT: 1D0154-01**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_120114 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.057; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.433 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

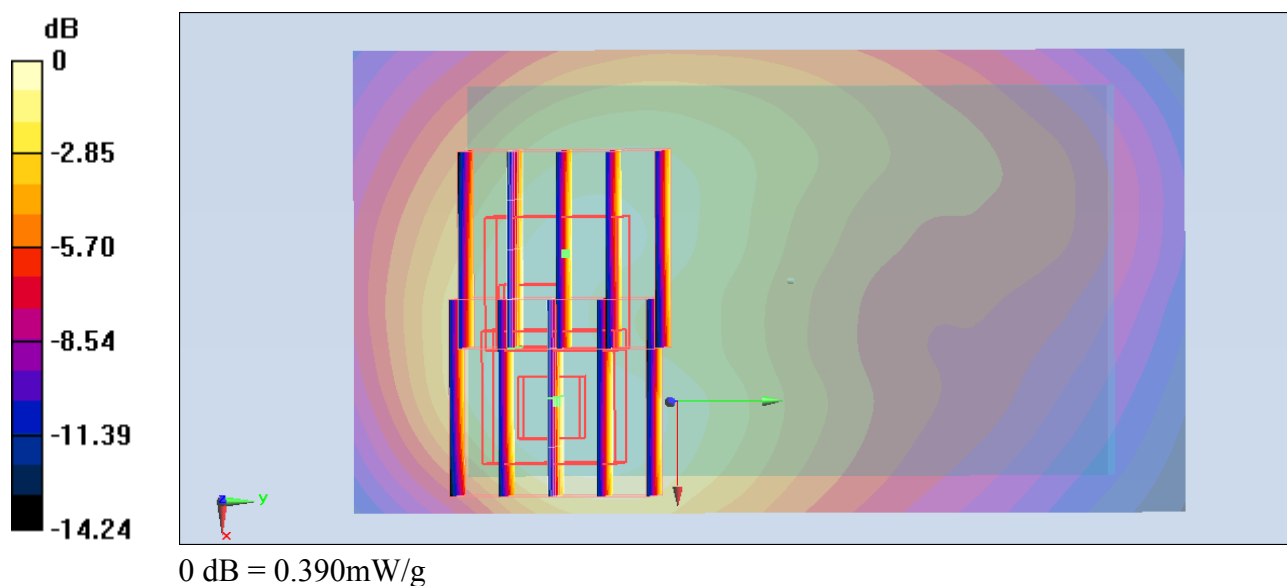

#04 WCDMA II_RMC12.2K_Back_1.5cm_Ch9262_Earphone_2D

DUT: 1D0154-01

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_120114 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.057; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.64, 4.64, 4.64); Calibrated: 2011/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/6/20
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.433 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

