



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 25039-1

**Report Date** – July 17, 2012

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Albert J. Patapack

Title: EMC Engineer

Date: July 17, 2012

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY UKAS OR ANY AGENCY OF THE U.S. GOVERNMENT.



2404

**Table of Contents**

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	6
Measurement results	6
Radiated Power	8
Measurement results	8
Occupied Bandwidth	11
Measurement results	12
Spurious Emissions at Antenna Terminals	26
Measurement results	27
Field Strength of Spurious Emissions	37
Measurement results	38
Frequency Stability	41
Measurement results	42

## Test Report Details

All Tests, except Radiated Power, Performed By:

ADR Testing Service  
Location Code: ADR LV  
Motorola Mobility LLC  
Product Safety and Compliance Group  
600 North US Hwy 45  
Libertyville, IL 60048  
PH (847) 523-6167 Fax (847) 523-4538  
FCC Registration Number: 316588  
Industry Canada Number: 109O-1

Radiated Power Testing Performed By:



PCTEST Engineering Laboratory, Inc.  
6660-B Dobbin Road,  
Columbia, MD 21045 USA  
PH (410) 290-6652  
FCC Registration Number: 90864  
Industry Canada Number: 2451A-1

Tests Requested By:

Motorola Mobility LLC  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type:

Cellular Phone

Signaling Capability:

WCDMA 850/1900, GSM 850/1900,  
EDGE 850/1900, LTE Band 4/17, HSDPA,  
HSUPA, GPRS, Bluetooth LE + EDR,  
802.11a/b/g/n

FCC ID:

IHDT56NG9

Serial Numbers:

LVML2A0014, LVML2A0029

Testing Complete Date:

June 21, 2012

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X   Part 2
- X   Part 22 Subpart H - Public Mobile Services
- X   Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004,  
 RSS-Gen Issue 3, RSS-132 Issue 2, RSS-133 Issue 5

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
4	Occupied Bandwidth	See Plots
5	Spurious Emissions at Antenna Terminal	See results
6	Field Strength of Spurious Emissions	See results
7	Frequency Stability	See results

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

This product utilizes an internal battery that is not removable. When applicable, EMC testing was performed with the internal battery fully charged. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

For all testing performed by ADR Testing Service

<b>Manufacturer</b>	<b>Equipment Type</b>	<b>Model No.</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	Receiver	ESIB40	100226	5/15/2013
Hewlett Packard	EMC Analyzer	E7405	US39440191	9/23/2012
Agilent	MXA Signal Analyzer	N9020A	US46470586	01/20/2014
Agilent	Signal Generator	83712A	3429A00286	3/26/2013
A. H. Systems	DRG Horn Antenna	SAS 200/571	365	8/24/2012
ETS	Log-Periodic Antenna	3148	1188	12/12/2012
ETS	Biconical Antenna	3110B	3369	12/14/2012
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
Thermotron	Environmental Chamber	S-4	31580	11/16/2012
Agilent	Power Meter	E4416A	GB41293258	7/15/2013
Agilent	Power Sensor	E9323A	US40412063	8/19/2012
Agilent	Microwave Preamplifier	8449B	3008A01442	9/22/2012

Note that the Agilent power meter, the Signal Generator and the MXA signal analyzer are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

For Radiated Power testing performed by PCTEST Engineering Laboratory, Inc.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/7/2012	Annual	6/7/2013	N/A
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Anritsu	MA2411B	Pulse Sensor	10/13/2011	Annual	10/13/2012	1027293
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		N/A	836536/0005
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404

## Measurement Procedures and Data

### RF POWER OUTPUT

#### Measurement Procedure

The RF output port of the Equipment Under Test, EUT, is directly coupled to the input of an Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The average power output is measured for all channels.

#### Measurement Results

##### GSM 850

Frequency (MHz)	Power (dBm)
824.2	33.28
836.6	33.35
848.8	33.27

##### GSM 1900

Frequency (MHz)	Power (dBm)
1850.2	30.63
1880.0	30.69
1909.8	30.36

##### EDGE 850

Frequency (MHz)	Power (dBm)
824.2	28.73
836.6	28.82
848.8	28.72

##### EDGE 1900

Frequency (MHz)	Power (dBm)
1850.2	27.67
1880.0	27.66
1909.8	27.65

Conducted Power was measured according to the “SAR Measurement Procedure for 3G Devices” released on October, 2007. .

Band	Frequency (MHz)	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes			
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4
WCDMA 850	826.4	24.37	24.3	24.28	24.34	24.29	24.32
	836.0	24.21	24.12	24.15	24.22	24.18	24.21
	846.6	24.34	24.24	24.17	24.17	24.28	24.18
WCDMA 1900	1852.4	23.74	23.66	23.75	23.78	23.76	23.8
	1880.0	24.29	24.25	24.4	24.33	24.36	24.4
	1907.6	23.8	23.74	23.76	23.78	23.8	23.77

Band	Channel	Conducted Power (dBm) for WCDMA – HSPA (HSUPA/HSDPA-Rel 6) Modes				
		Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
WCDMA 850	826.4	23.05	23.12	23.15	23.11	23.1
	836.0	23.38	23.4	23.39	23.37	23.31
	846.6	23.35	23.33	23.32	23.22	23.26
WCDMA 1900	1852.4	23.76	23.84	23.9	23.72	23.74
	1880.0	24.27	24.38	24.45	24.33	24.3
	1907.6	23.82	23.98	23.93	23.85	23.83

Based on the power measurements, all WCDMA testing was performed in RMC mode.

## **RADIATED POWER (EIRP AND ERP)**

### **Measurement Procedure**

Radiated power measurements are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the radiated power level of the EUT. The power is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g$  [dBm] - cable loss [dB].

**Measurement Results**

<b>Band</b>	<b>EIRP dBm</b>	<b>ERP dBm</b>
GSM 850	31.74	<b>29.64</b>
GSM 1900	<b>32.89</b>	30.79
EDGE 850	25.73	<b>23.63</b>
EDGE 1900	<b>32.70</b>	30.60
WCDMA 850	22.59	<b>20.49</b>
WCDMA 1900	<b>28.27</b>	26.17

## OCCUPIED BANDWIDTH

### Measurement Procedure

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Measurement Results  
Attached

Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 850	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30

- Notes:
- 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for <sup>3</sup> the resolution bandwidth.
  - 2) The plotted data shown for the band edge measurements is representative of data taken with a true 3 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3 kHz resolution bandwidth filter.


**Measurement Results – GSM 850**

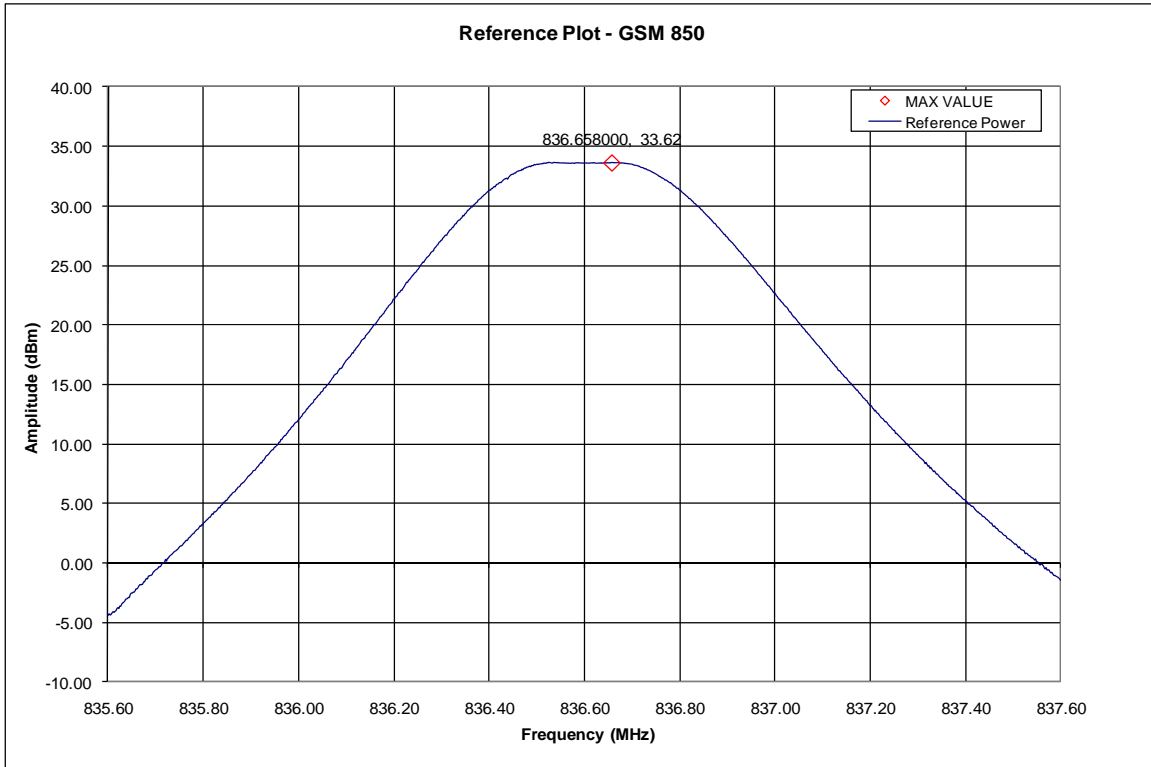


**GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)**



**GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

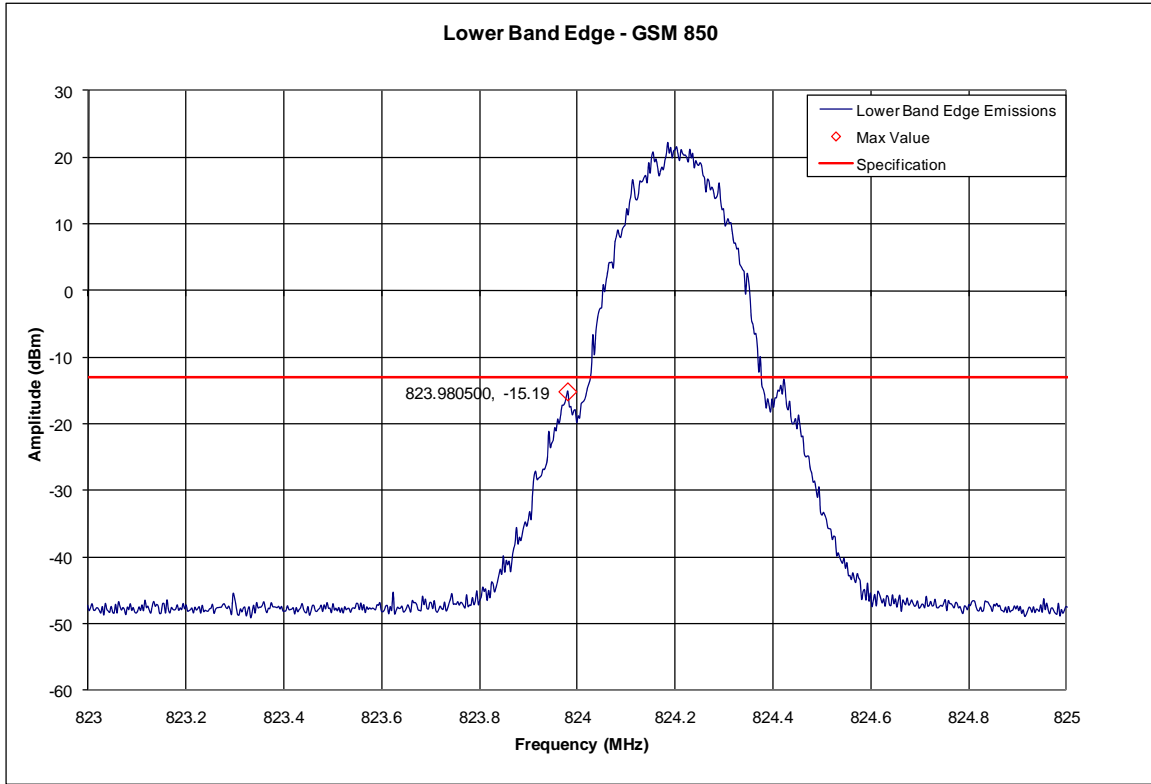


**GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

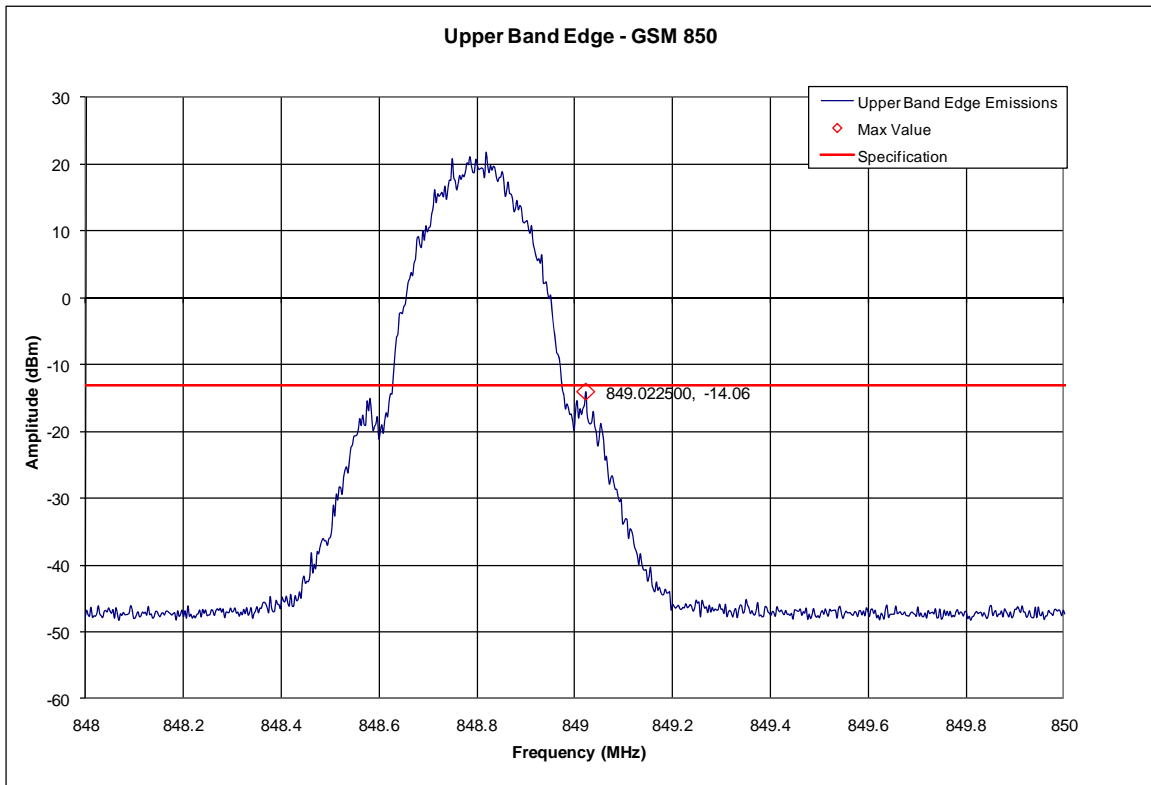


**GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)**


**Measurement Results – EDGE 850**

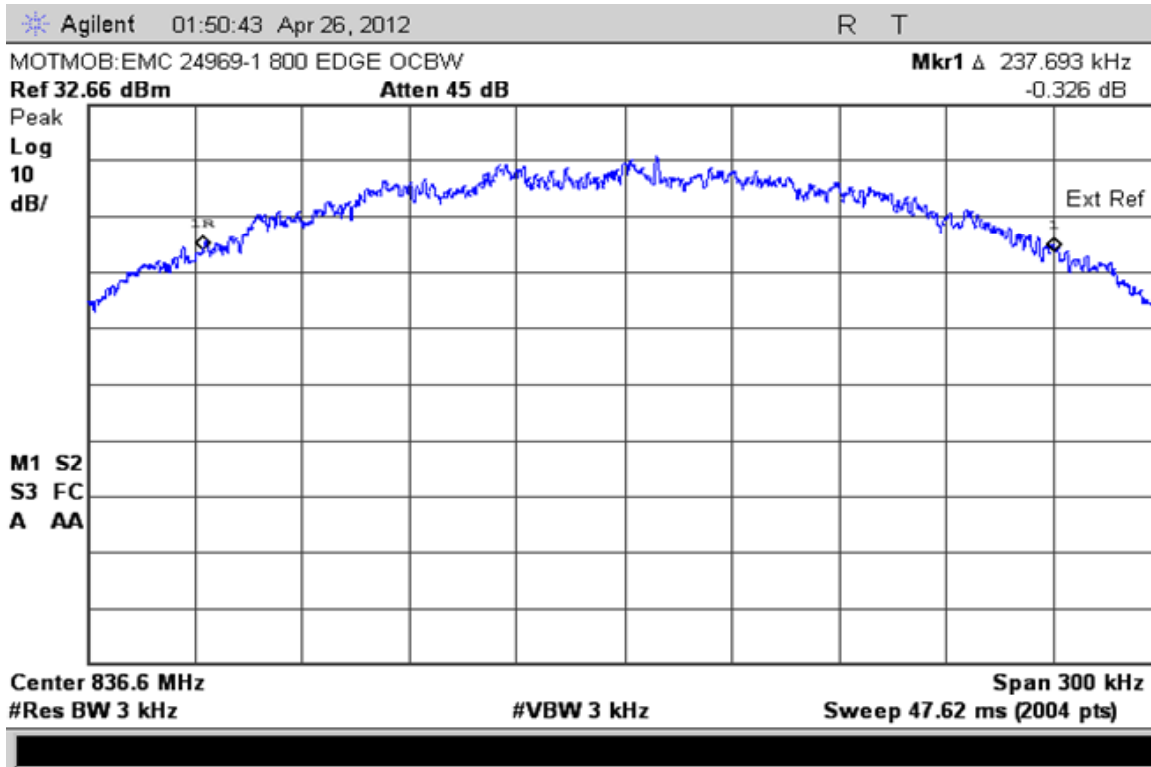

**EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

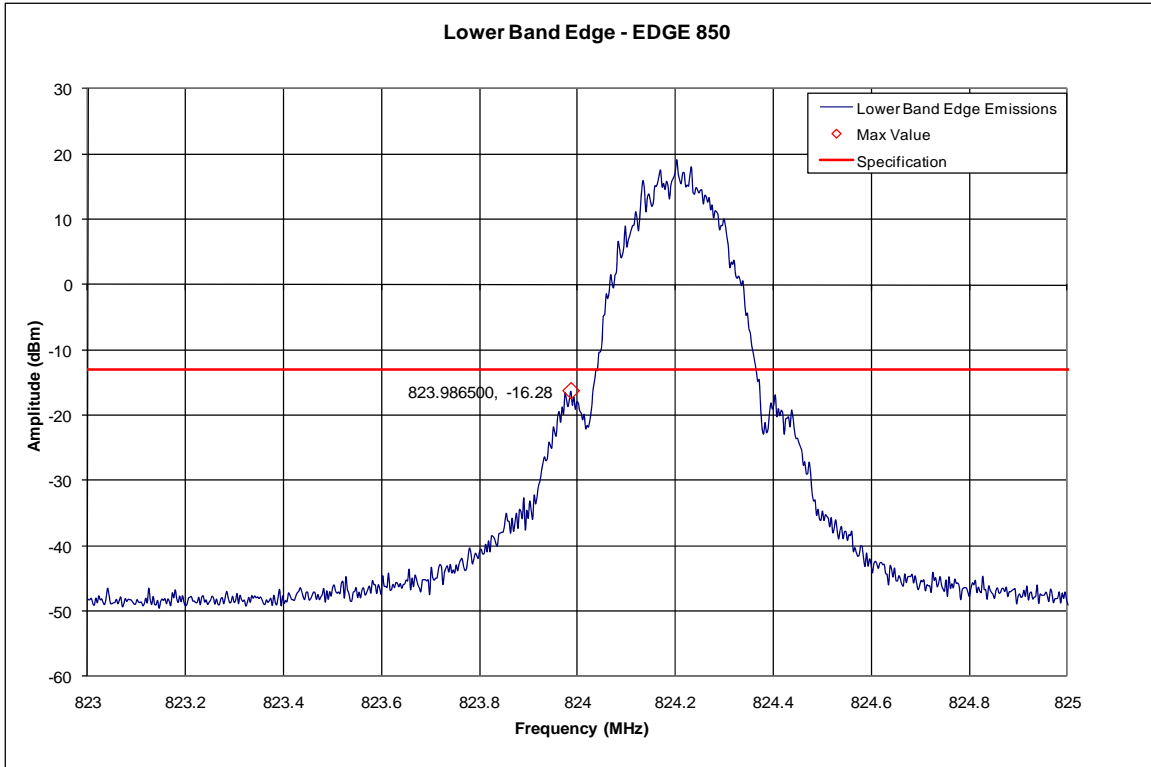


**EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

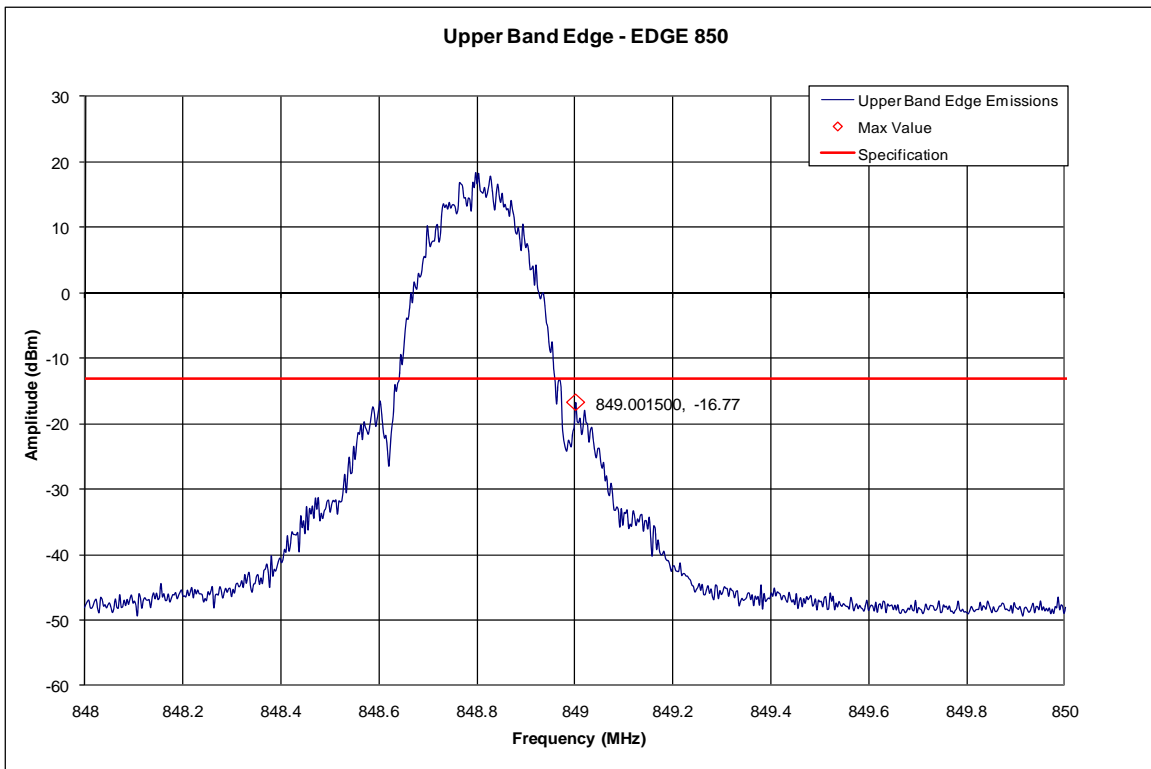


**EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)**


**Measurement Results – GSM 1900**

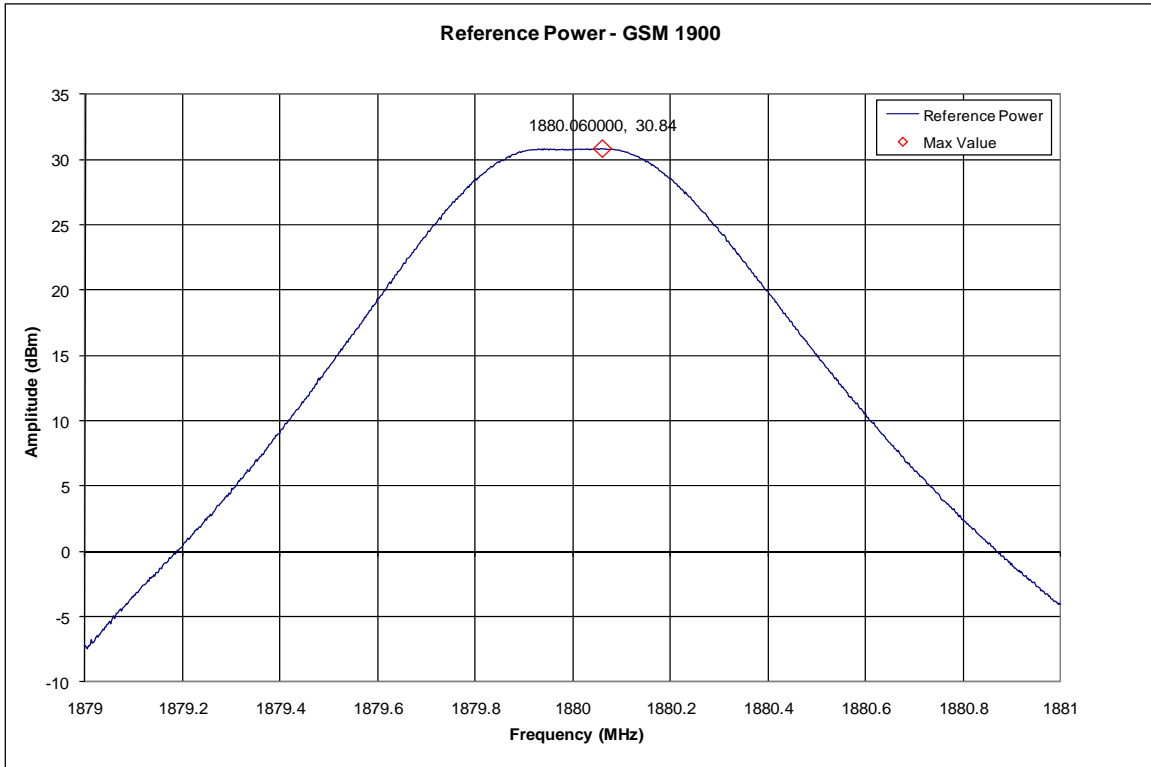


**GSM 1900 – Reference Level Plot – Channel 661 (1880.00MHz)**

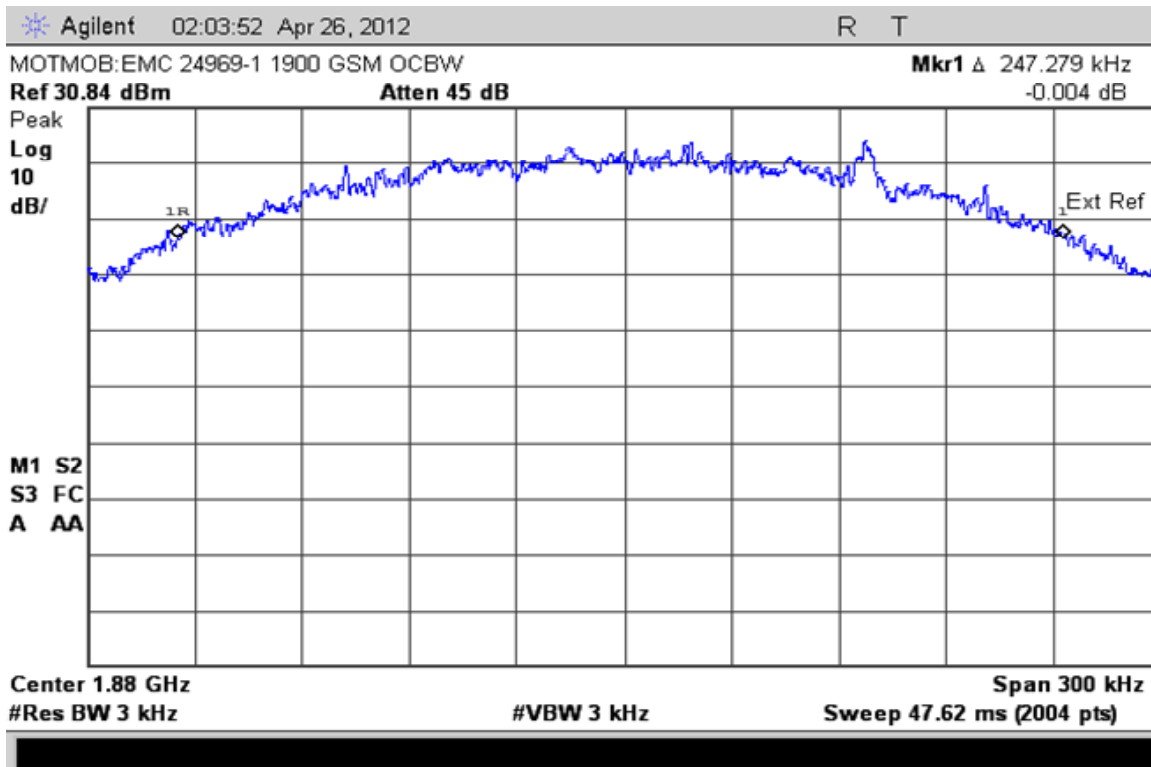

**GSM 1900 – Occupied Bandwidth – Channel 661 (1880.00MHz)**

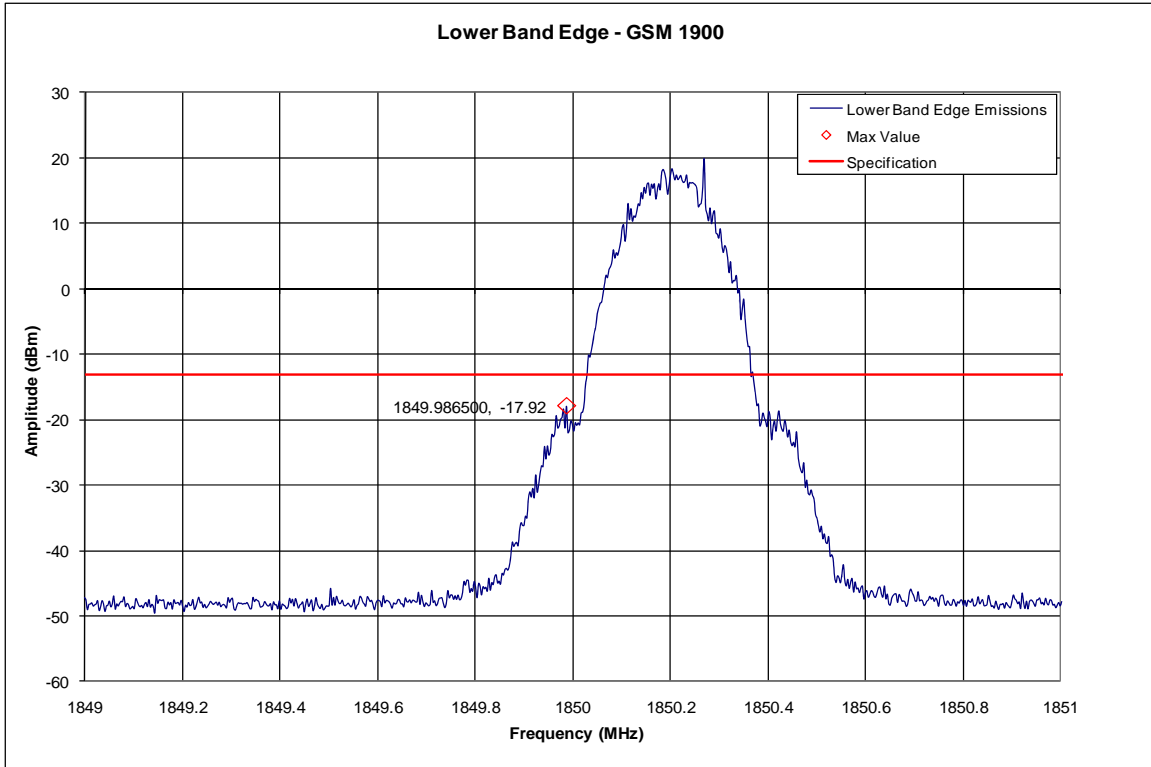


**GSM 1900 – Lower Band Edge – Channel 512 (1850.2MHz)**

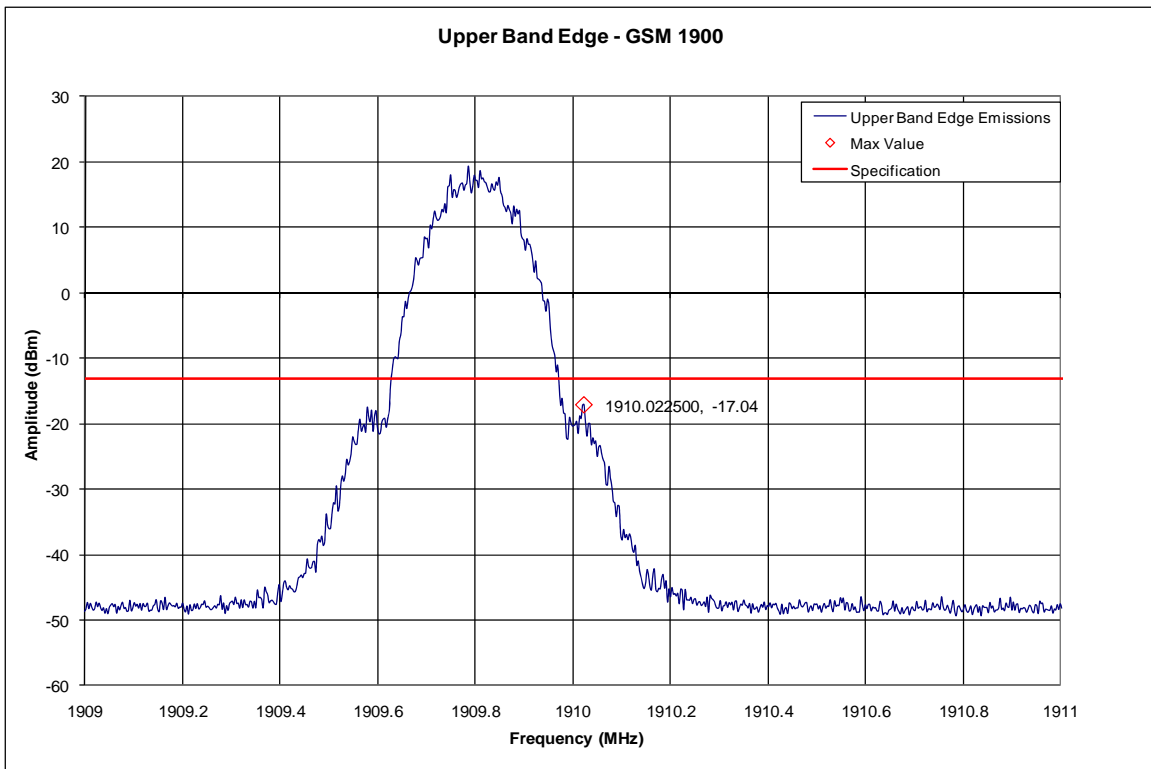


**GSM 1900 – Upper Band Edge – Channel 810 (1909.8MHz)**


**Measurement Results – EDGE 1900**

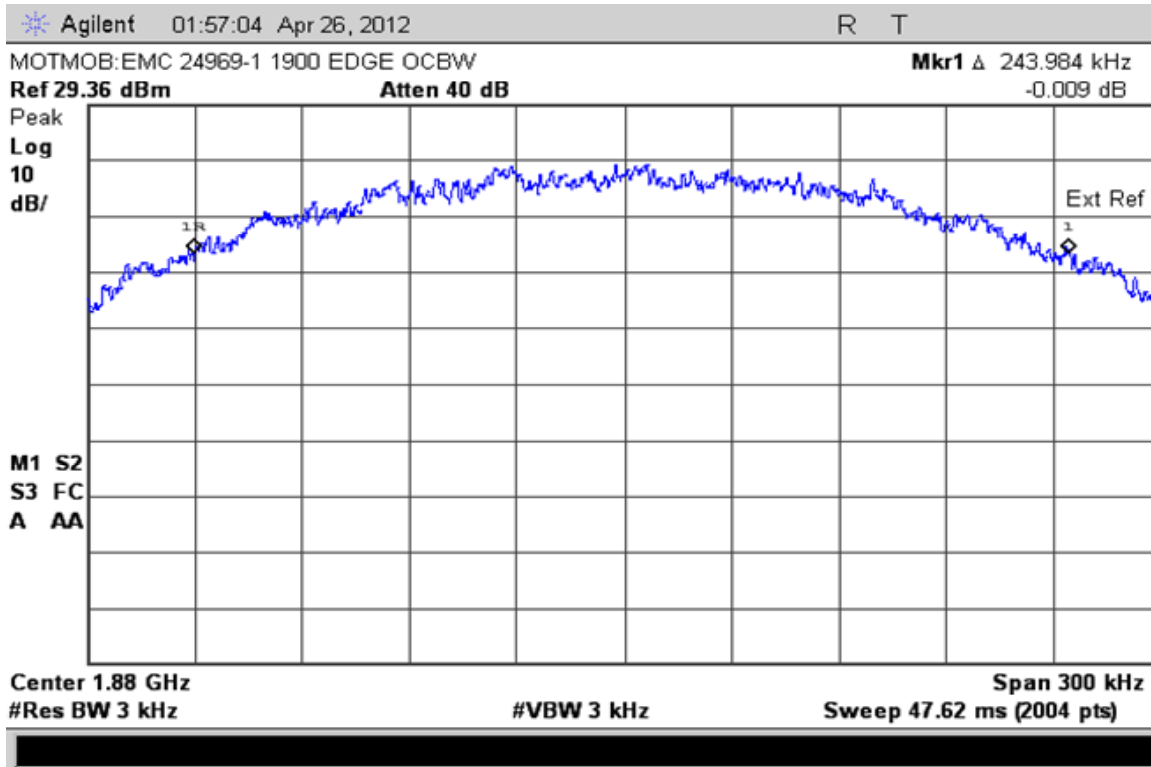

**GSM 1900 EDGE – Occupied Bandwidth – Channel 661 (1880.00MHz)**

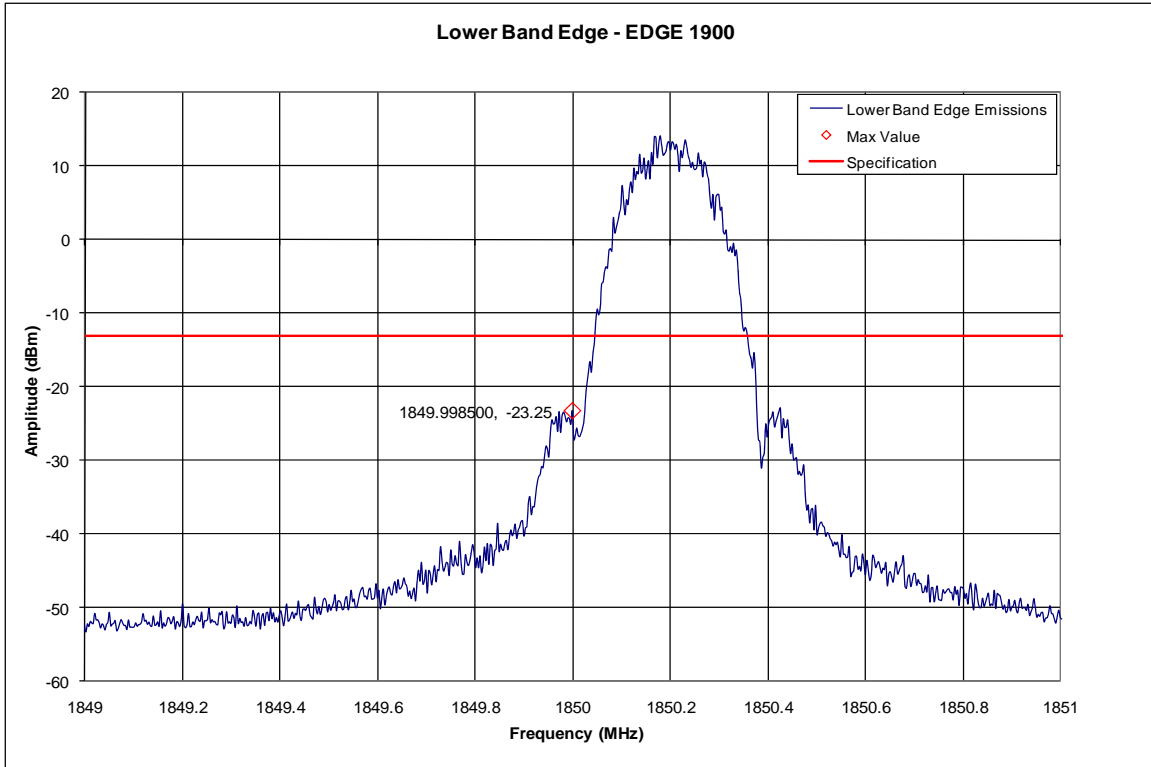


**GSM 1900 EDGE – Lower Band Edge – Channel 512 (1850.2MHz)**

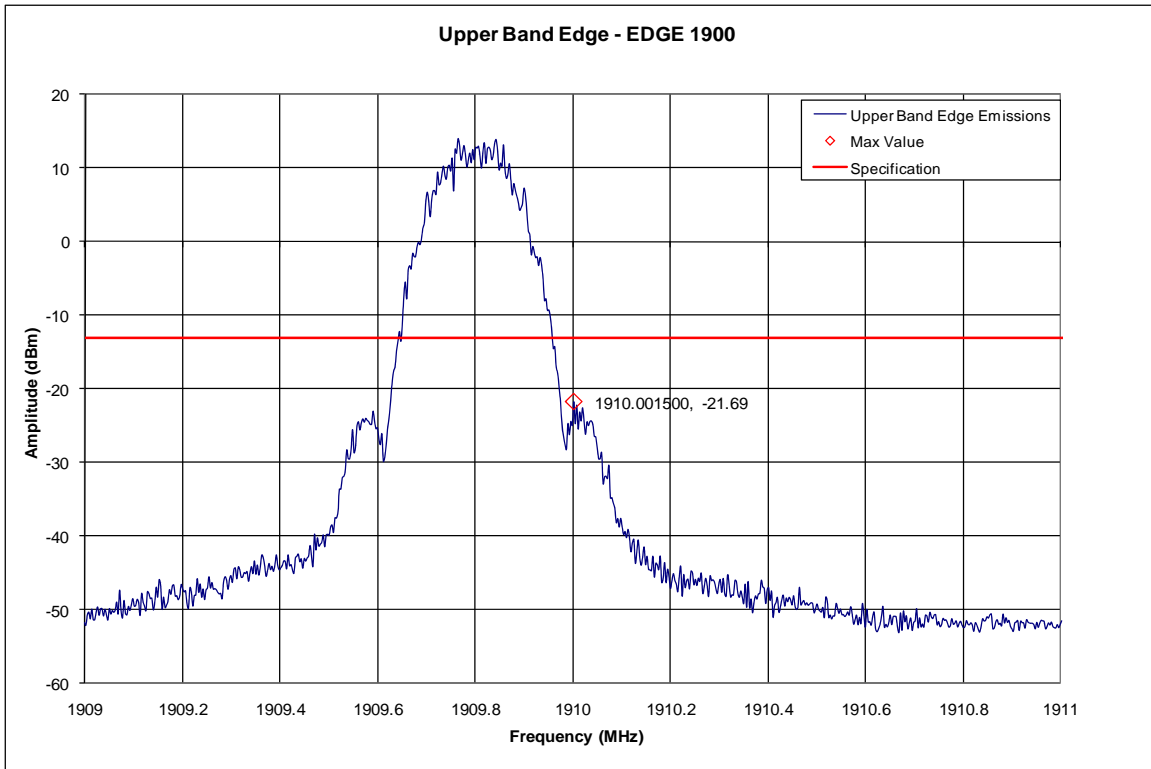


**GSM 1900 EDGE – Upper Band Edge – Channel 810 (1909.8MHz)**


**Measurement Results – WCDMA 850**

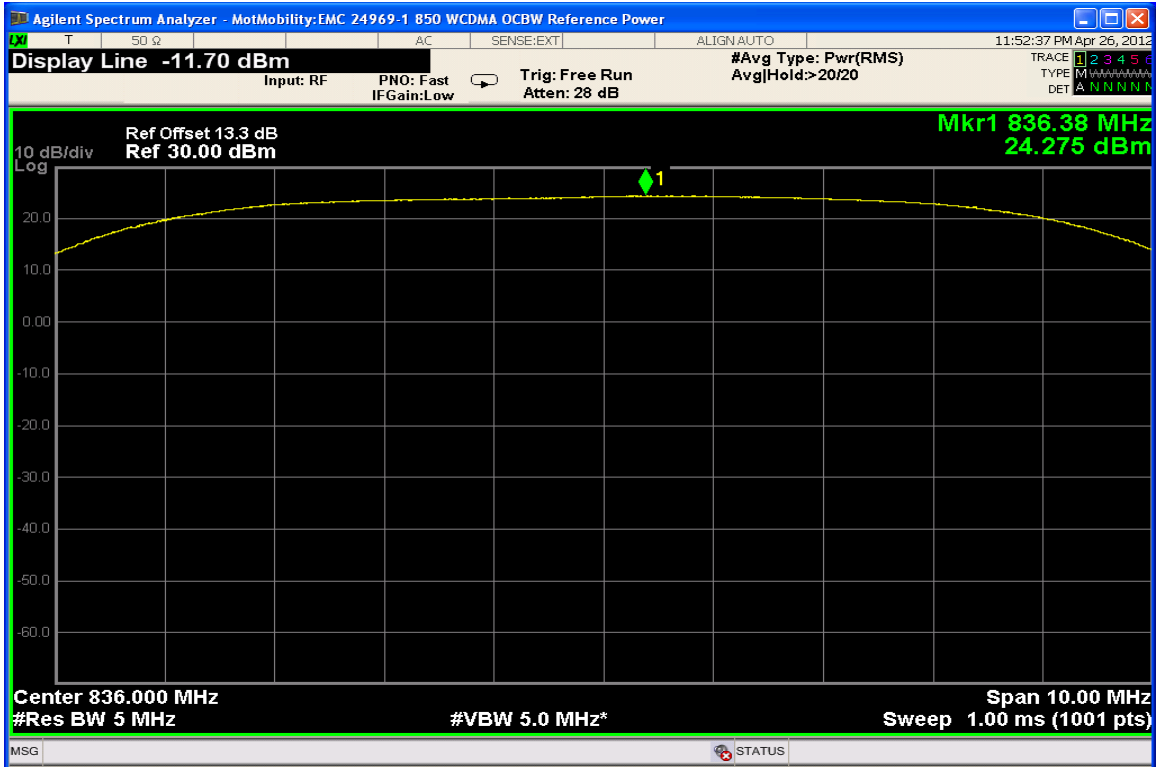

**WCDMA 850 – Reference Level Plot – Channel 4180 (836.0 MHz)**

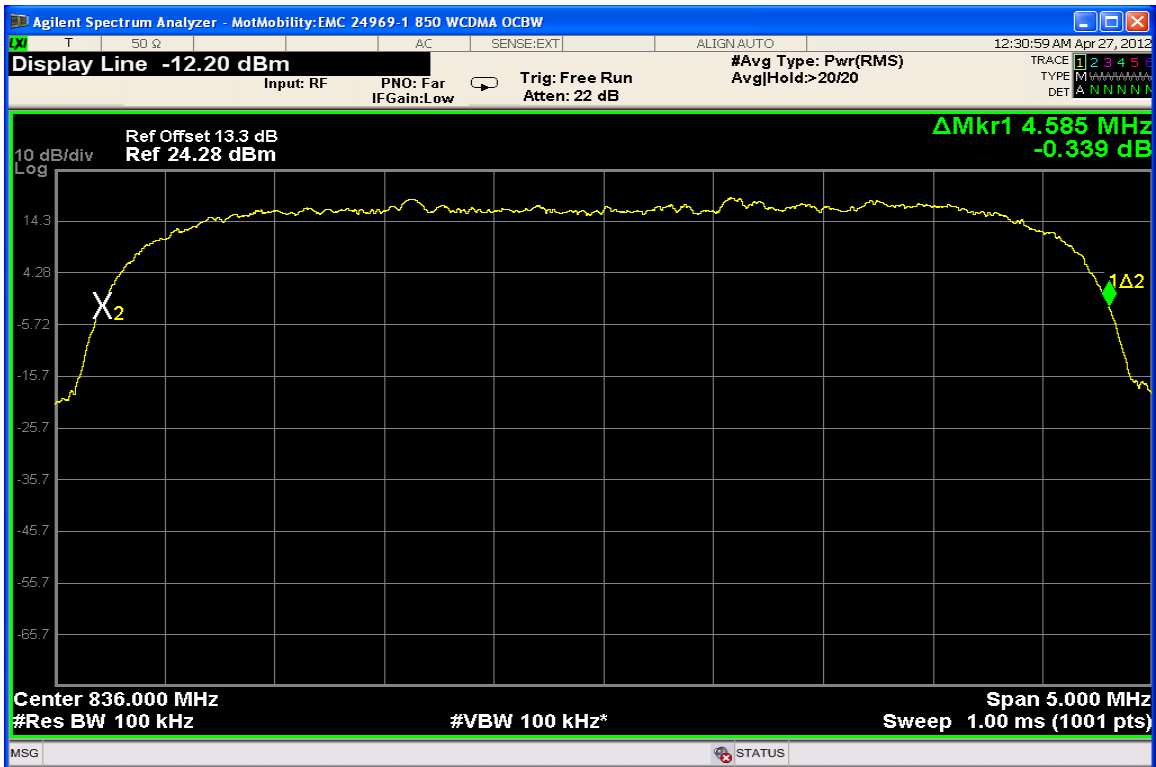

**WCDMA 850 – Occupied Bandwidth – Channel 4180 (836.0 MHz)**

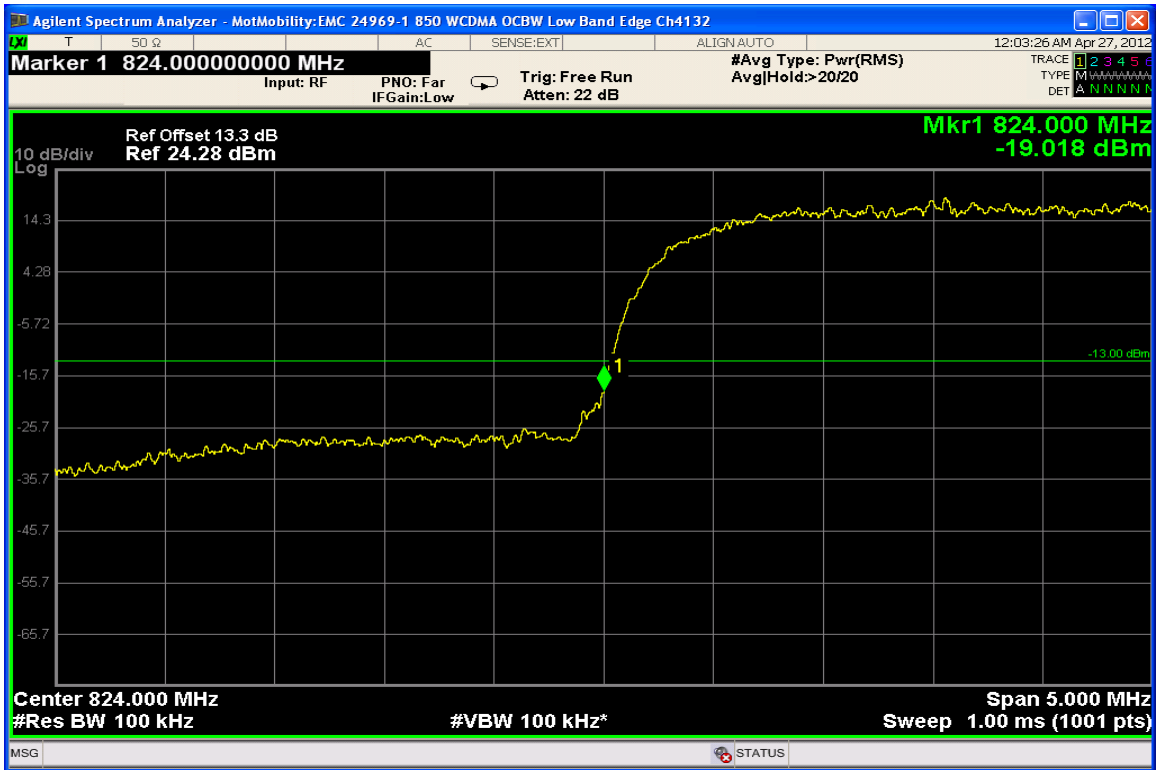


WCDMA 850 – Lower Band Edge – Channel 4132 (826.4 MHz)




WCDMA 850 – Upper Band Edge – Channel 4233 (846.6 MHz)


**Measurement Results – WCDMA 1900**

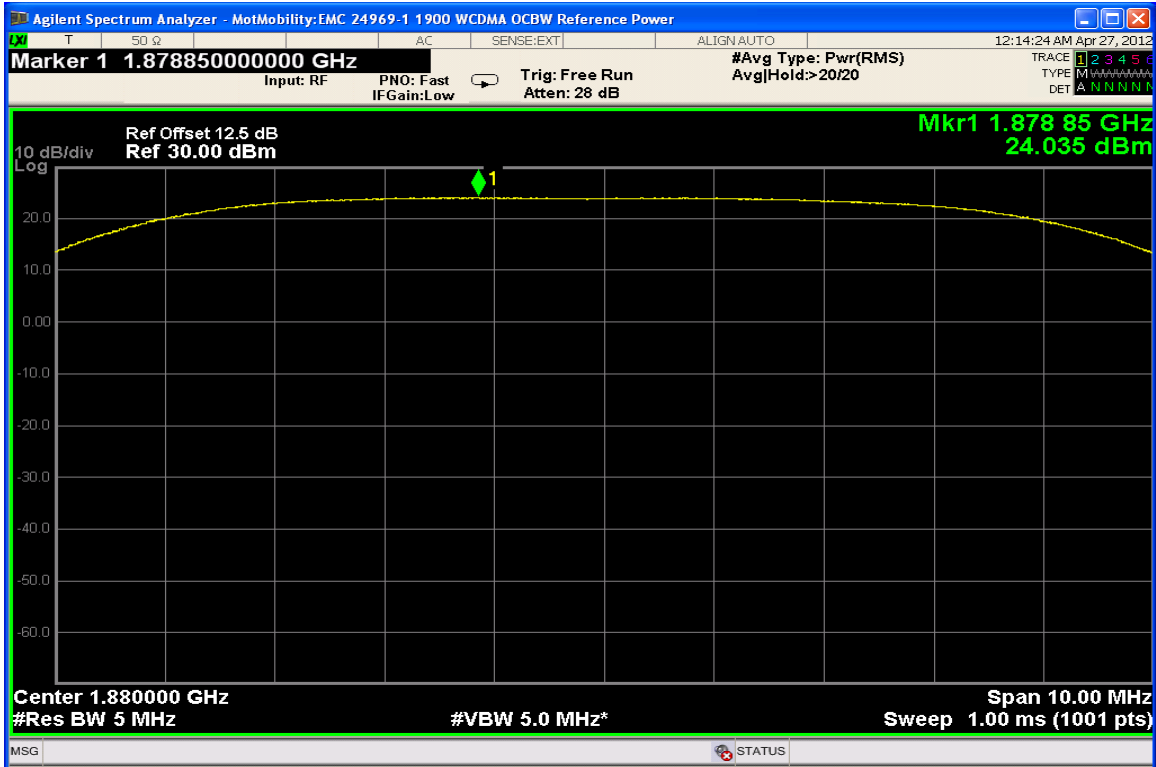

**WCDMA 1900 – Reference Level Plot – Channel 9400 (1880.00 MHz)**

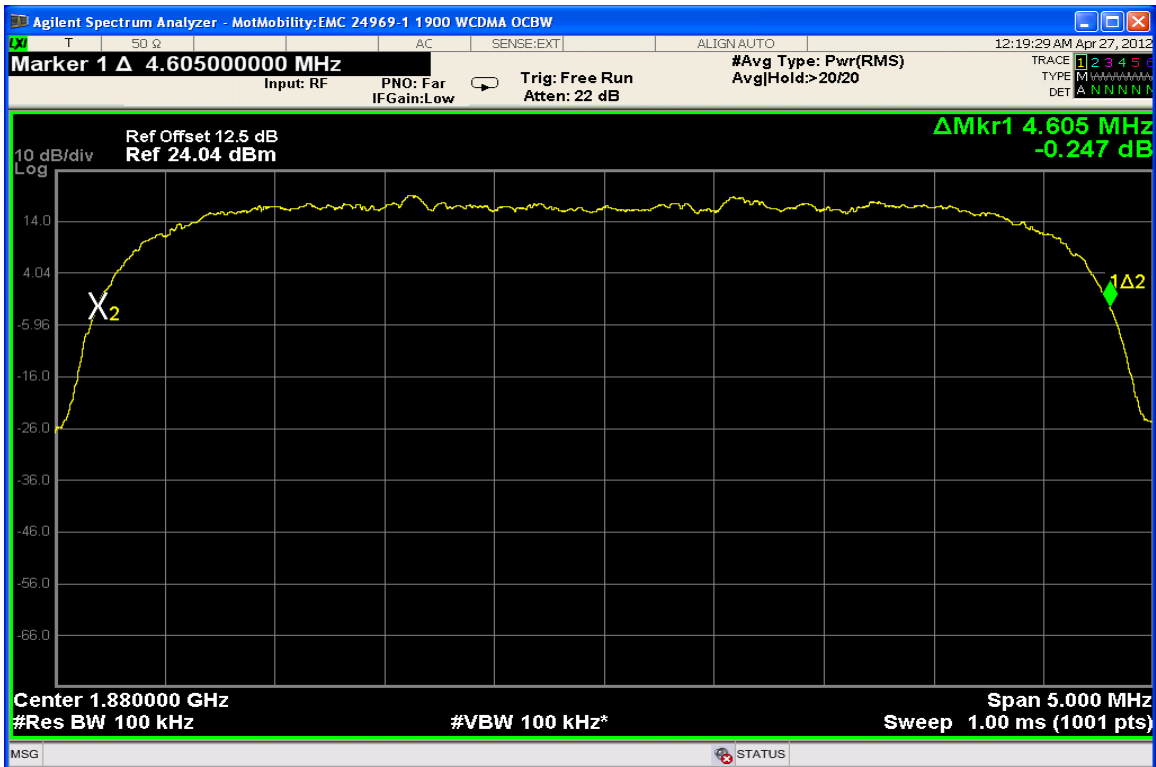

**WCDMA 1900 – Occupied Bandwidth – Channel 9400 (1880.00 MHz)**

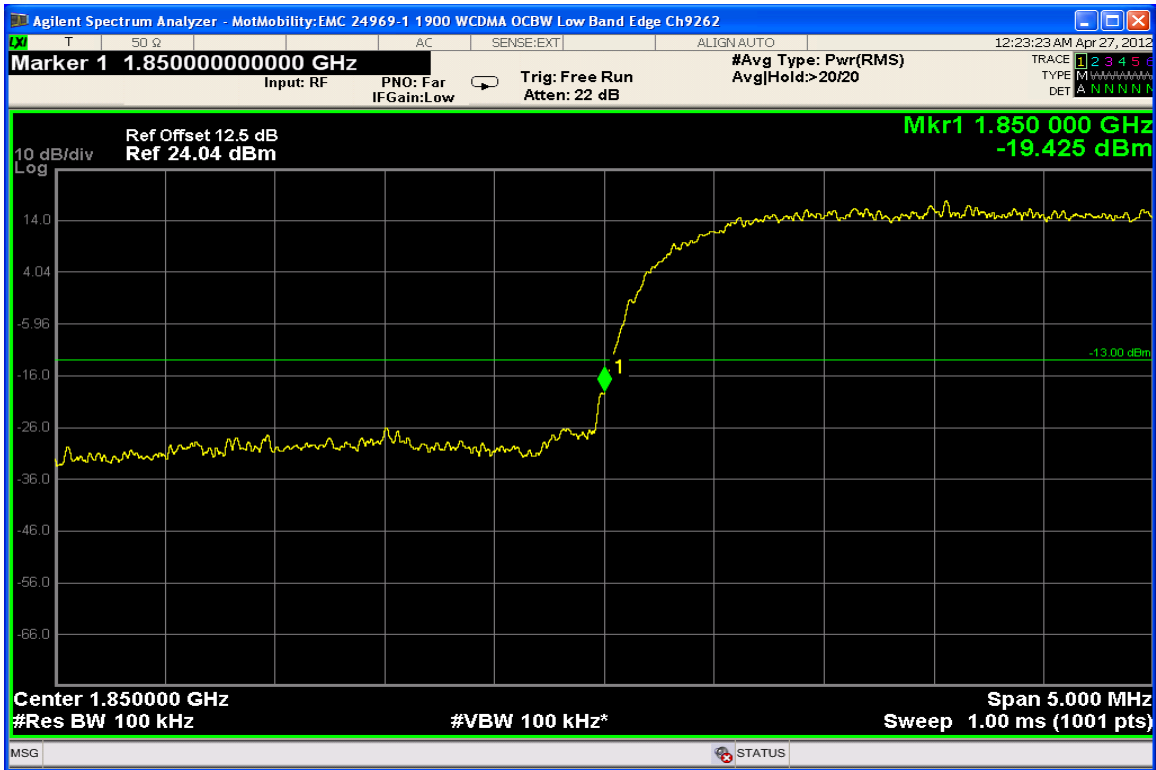

WCDMA 1900 – Lower Band Edge – Channel 9262 (1852.40 MHz)



WCDMA 1900 – Upper Band Edge – Channel 9538 (1907.60 MHz)

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **Measurement Procedure**

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:


Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

### **Measurement Results**

Attached

**Measurement Results**  
**Modulation: GSM 850**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-37.34
3rd harmonic	-13	-51.97
4th harmonic	-13	*
5th harmonic	-13	-59.30
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

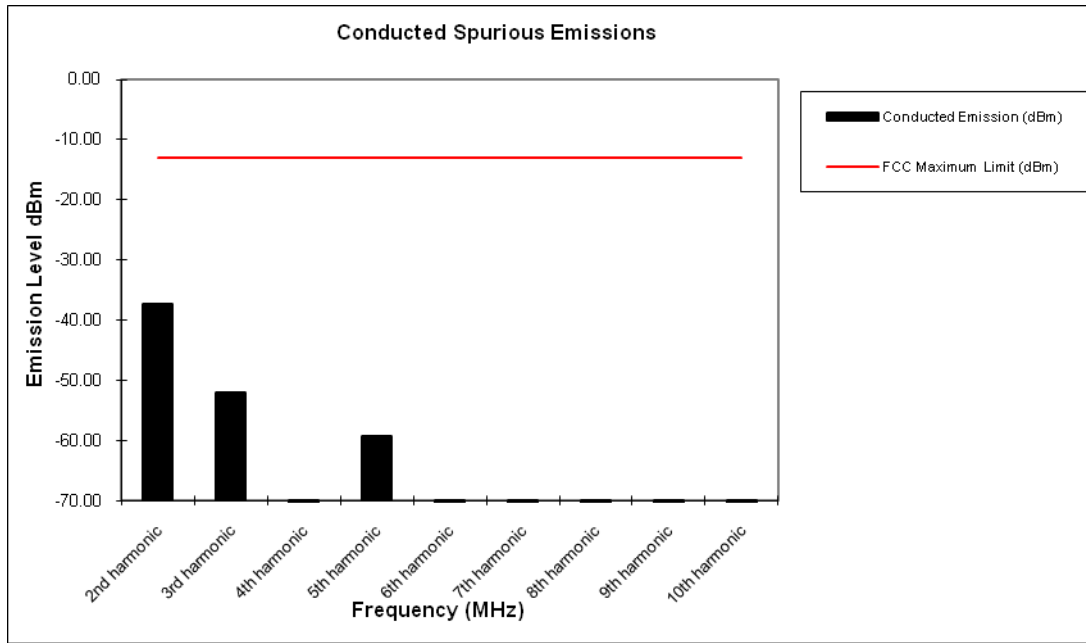


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: EDGE 850**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-40.12
3rd harmonic	-13	-51.81
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

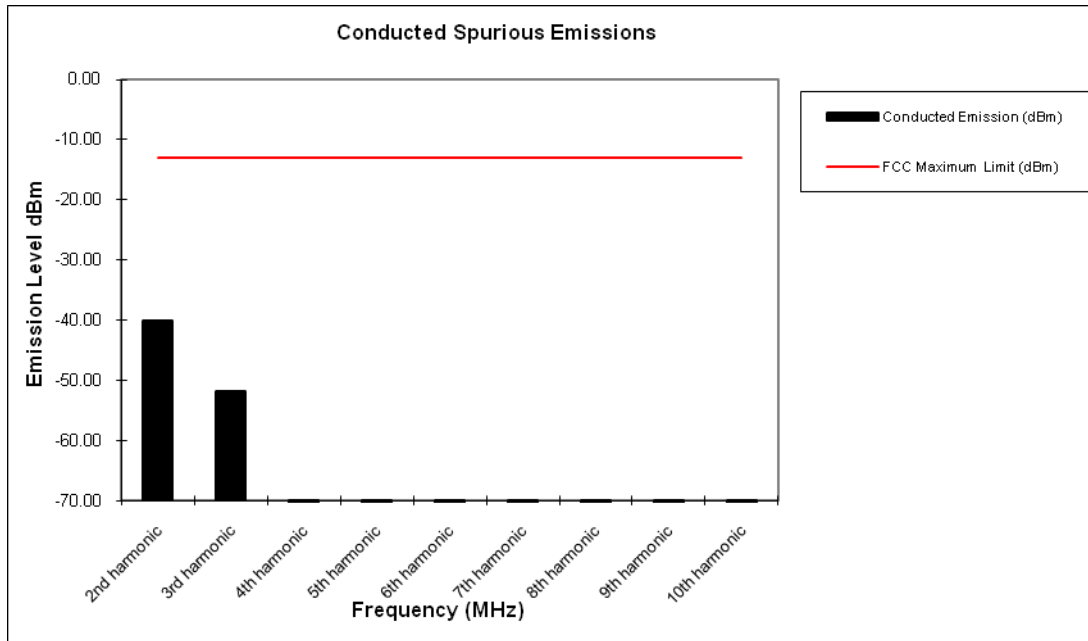


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: GSM 1900**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-35.31
3rd harmonic	-13	-48.65
4th harmonic	-13	-41.32
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

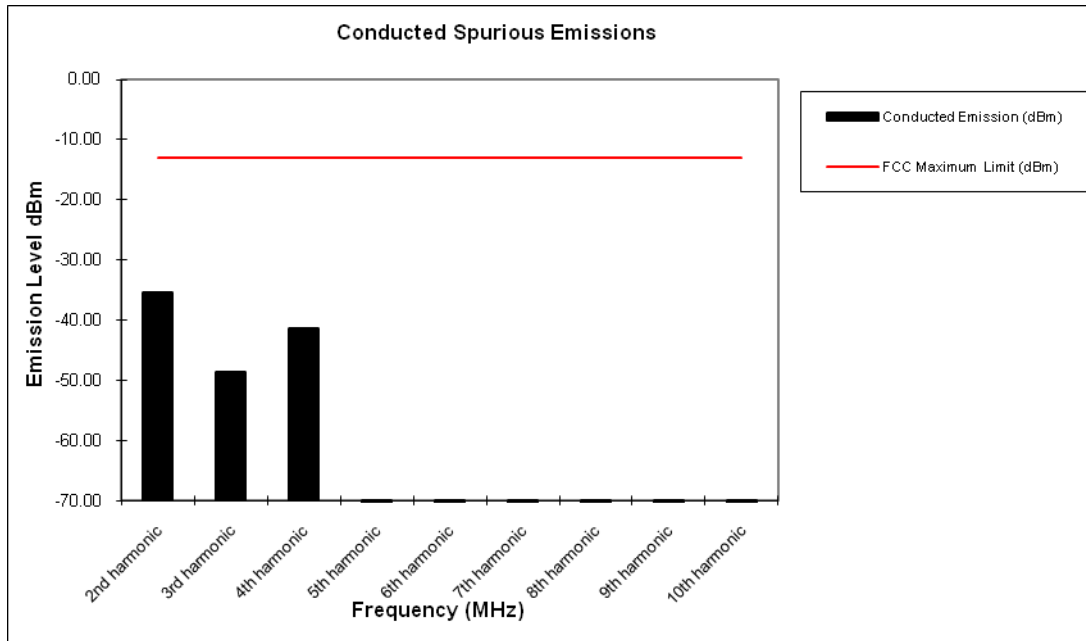


**Notes:**

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: EDGE 1900**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-36.28
3rd harmonic	-13	-51.51
4th harmonic	-13	-42.03
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

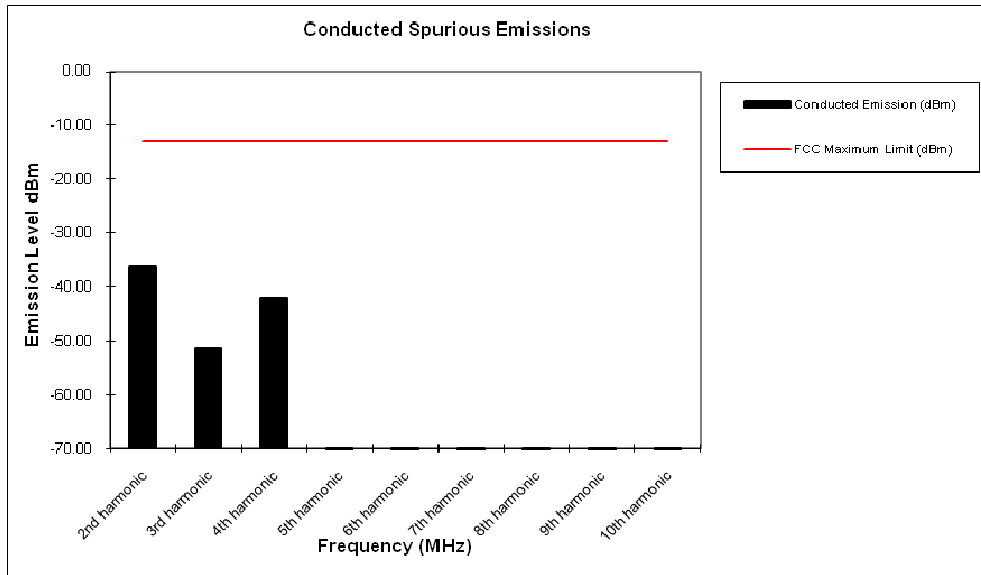


Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: WCDMA 850**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-45.54
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

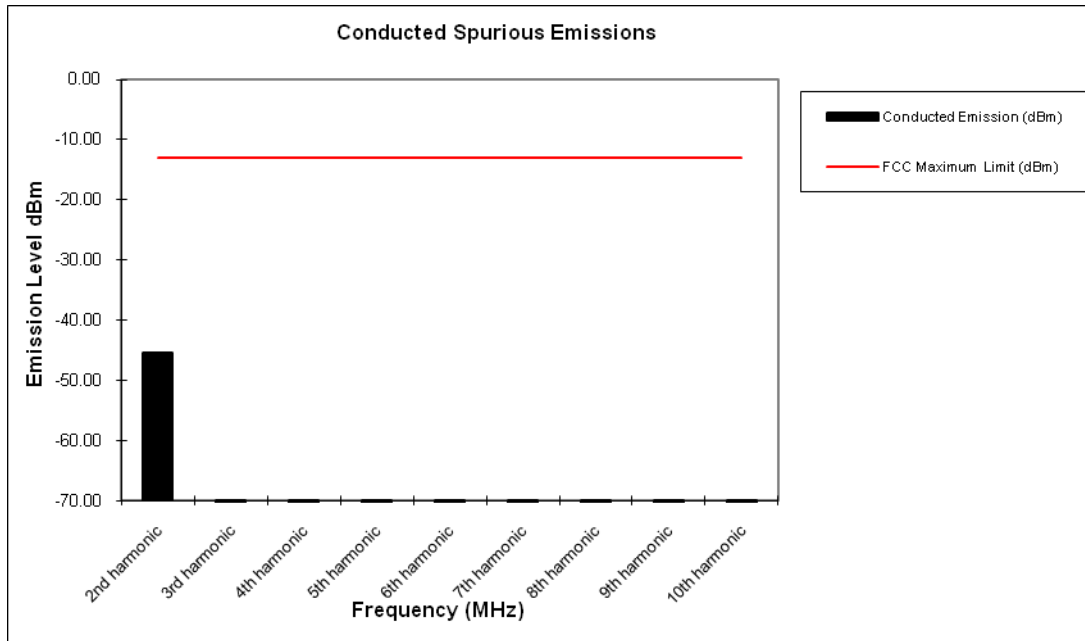

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

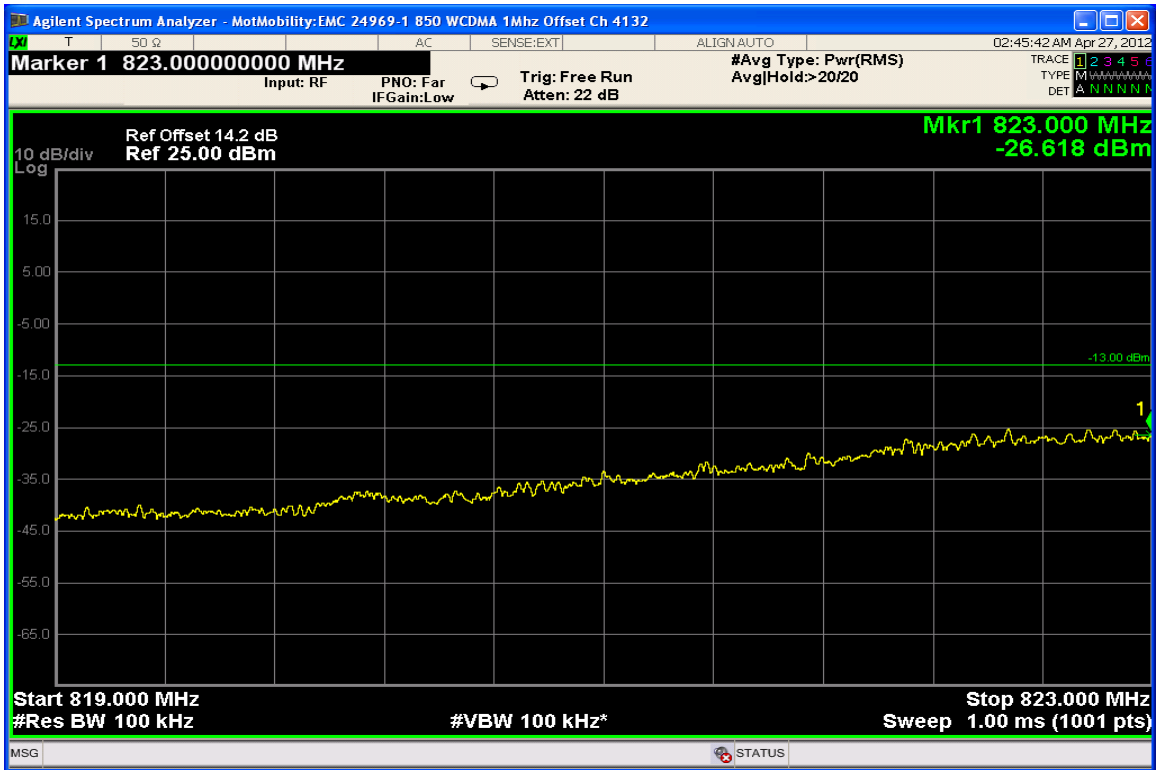


850 WCDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)



850 WCDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)

**Measurement Results**  
**Modulation: WCDMA 1900**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-29.26
3rd harmonic	-13	-43.78
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

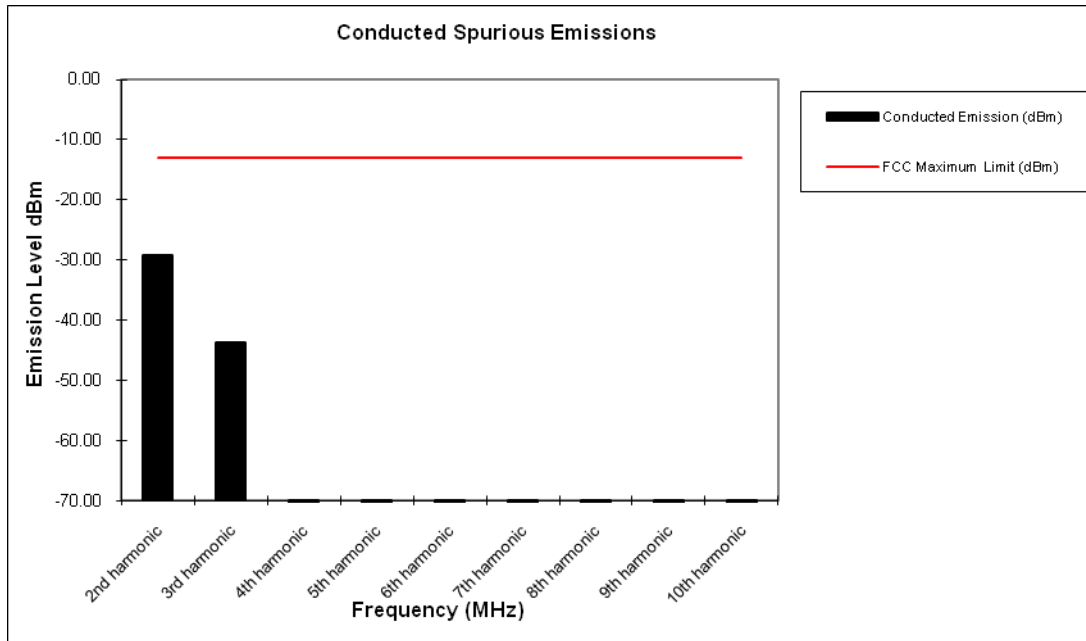


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

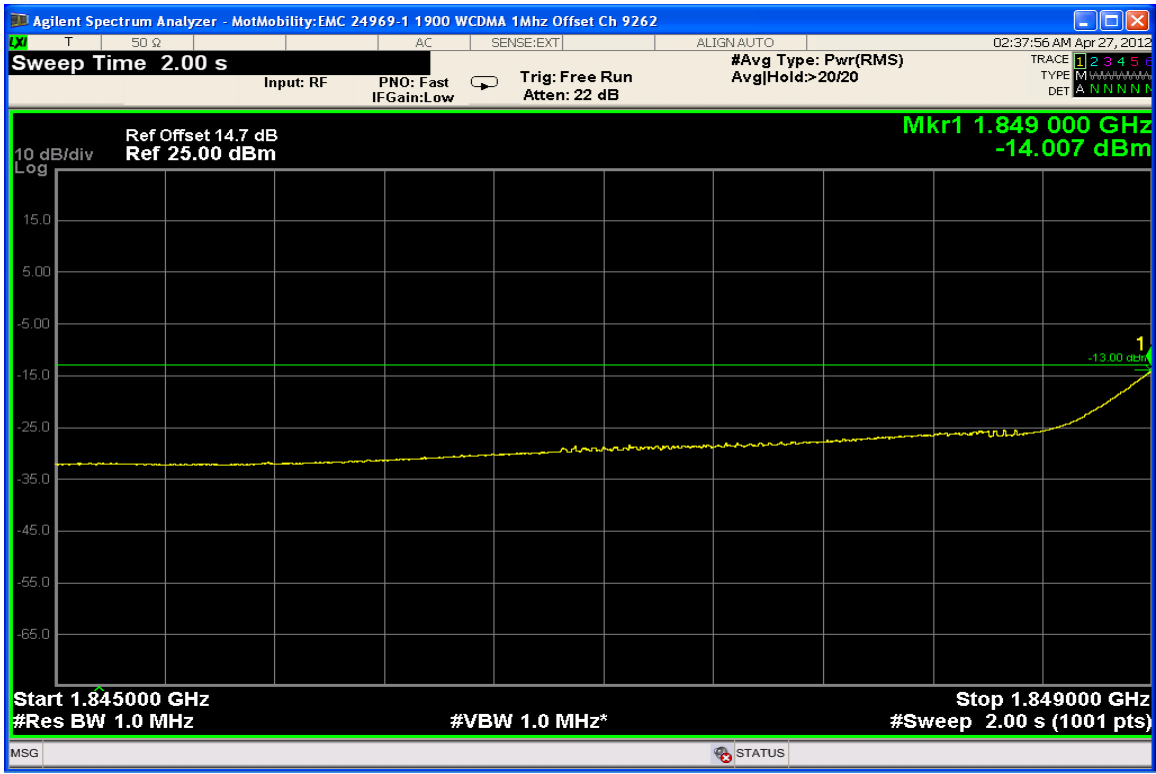

1900 WCDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)

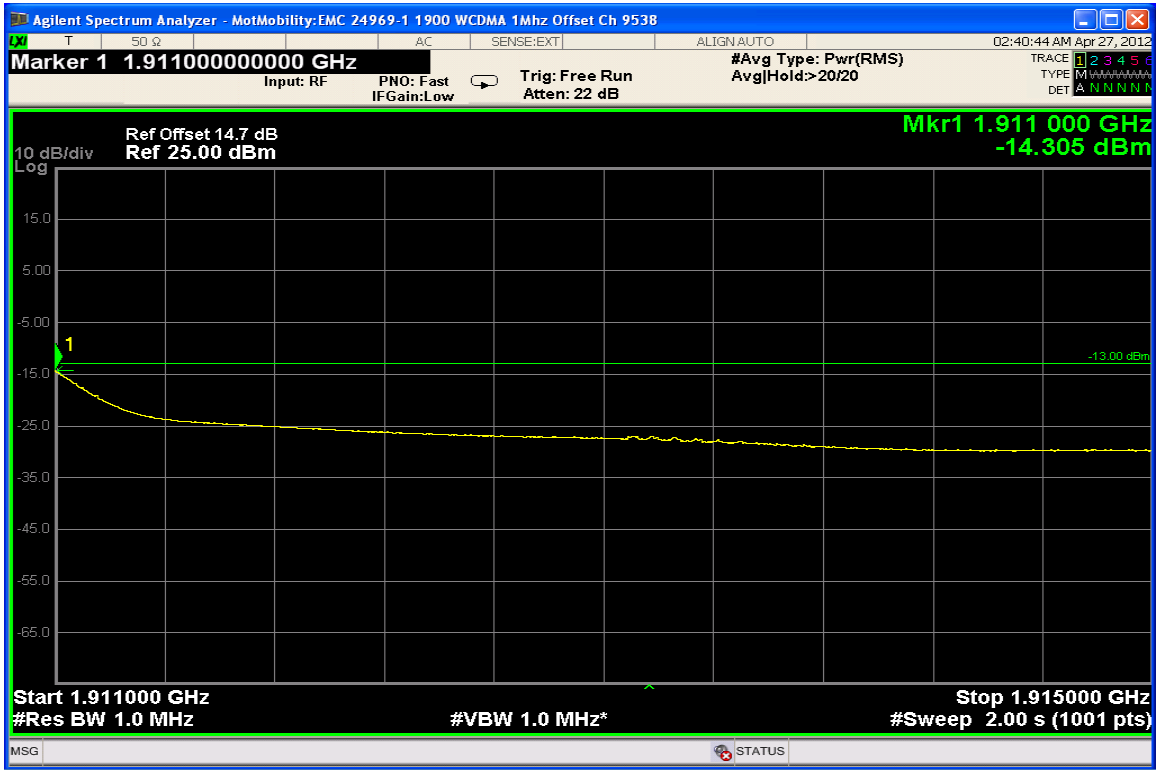

1900 WCDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Measurement Procedure**

The EUT is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage. Testing was performed in three orthogonal planes where the X plane is with the EUT orientated vertically, the Y plane is with the EUT orientated on its side and the Z plane with the EUT laying flat on the table. The worst case emission is reported for each tested mode.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


**Measurement Results**

Attached

**Measurement Results –  
GSM 850, EDGE 850, WCDMA 850, WCDMA 1900; all planes**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

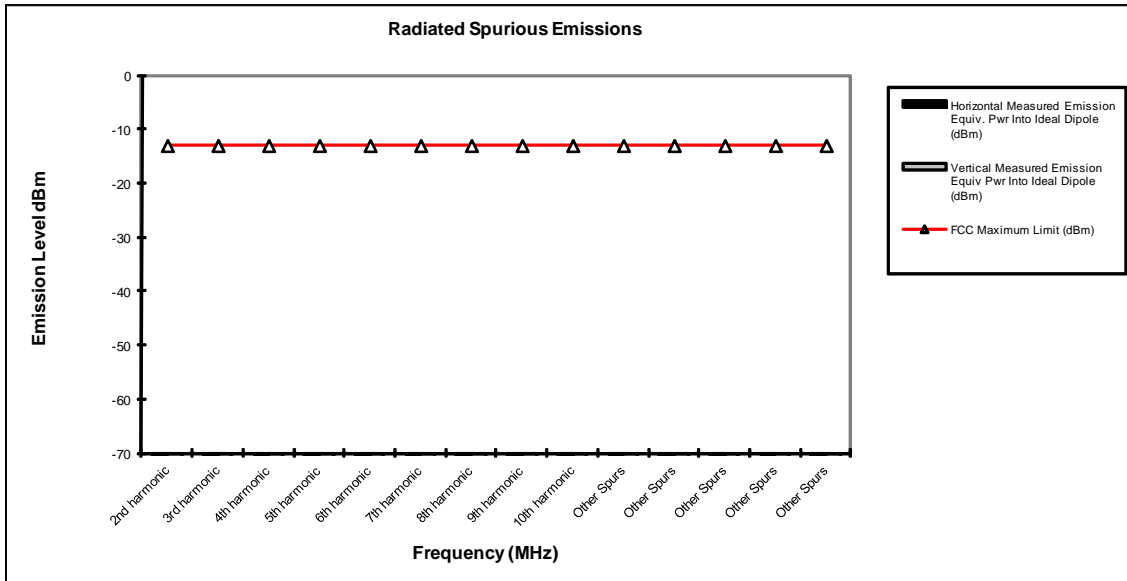

Notes:


- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –GSM 1900; Y plane**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-22.1	-21.0
3rd harmonic	-13	-38.8	-41.4
4th harmonic	-13	-27.3	-31.8
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

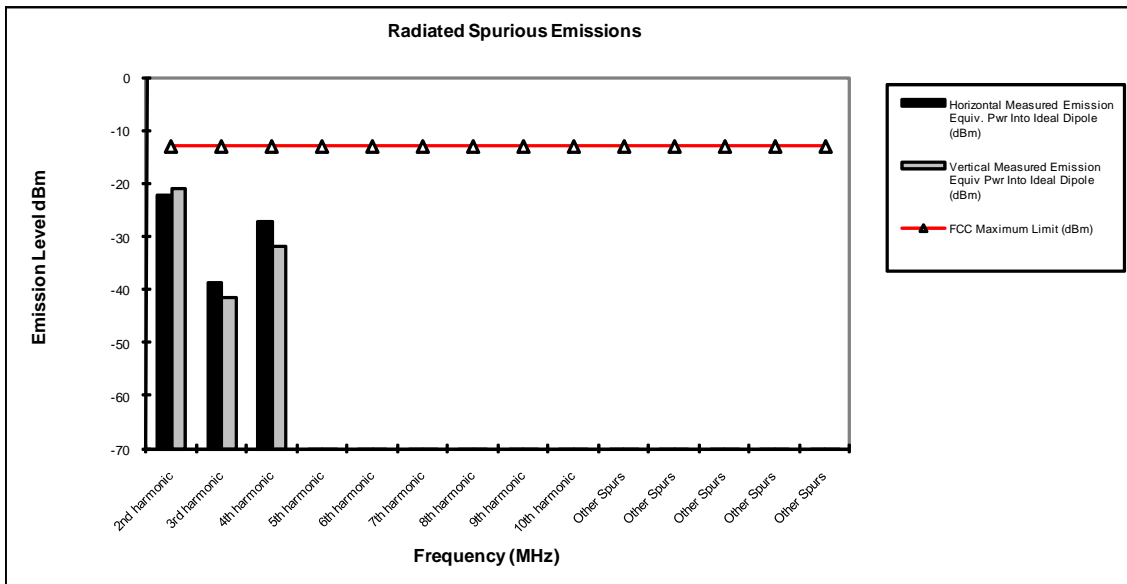

Notes:


- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –EDGE 1900; Z plane**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-27.3	-24.5
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

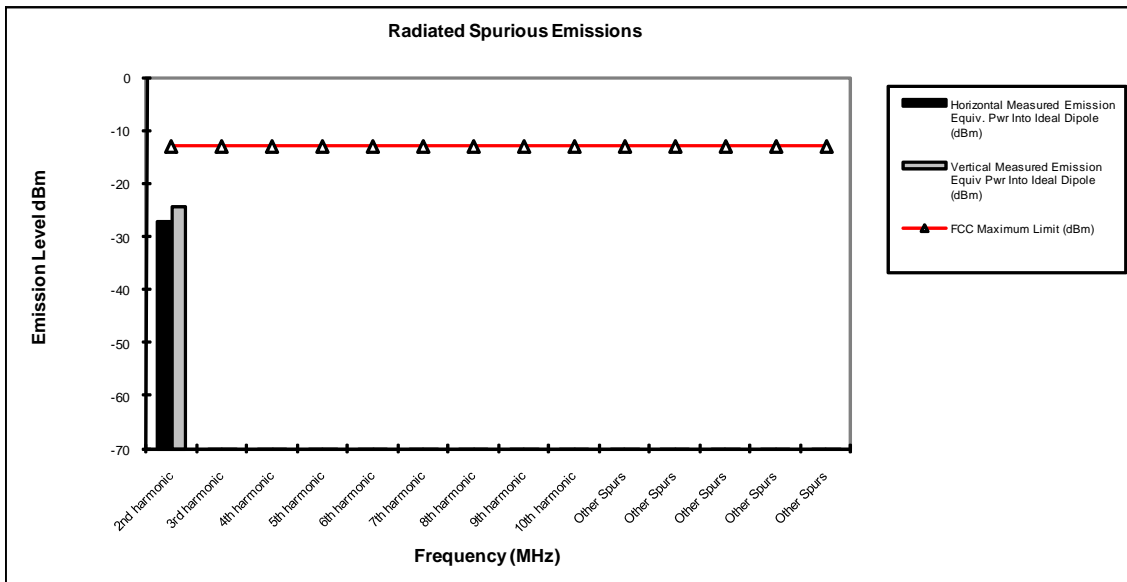

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

## **FREQUENCY STABILITY**

### **Measurement Procedure**

The EUT is placed in an environmental chamber. The antenna port of the EUT is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

### **Measurement Results**

Attached


**Measurement Results**  
**Modulation: GSM 850**

# Frequency Stability

**Mode:** GSM 850  
**Channel:** 190

**Operating Frequency:** 836.6 MHz  
**Deviation Limit (PPM):** 2.5 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-25.64	-0.031	100%	3.60
-20 C	-22.57	-0.027	100%	3.60
-10 C	22.67	0.027	100%	3.60
0 C	30.03	0.036	100%	3.60
10 C	10.66	0.013	100%	3.60
20 C	-13.26	-0.016	100%	3.60
30 C	-33.01	-0.039	100%	3.60
40 C	-24.26	-0.029	100%	3.60
50 C	-12.11	-0.014	100%	3.60
60 C	-17.36	-0.021	100%	3.60
20 C	12.17	0.015	Battery Endpoint	2.60

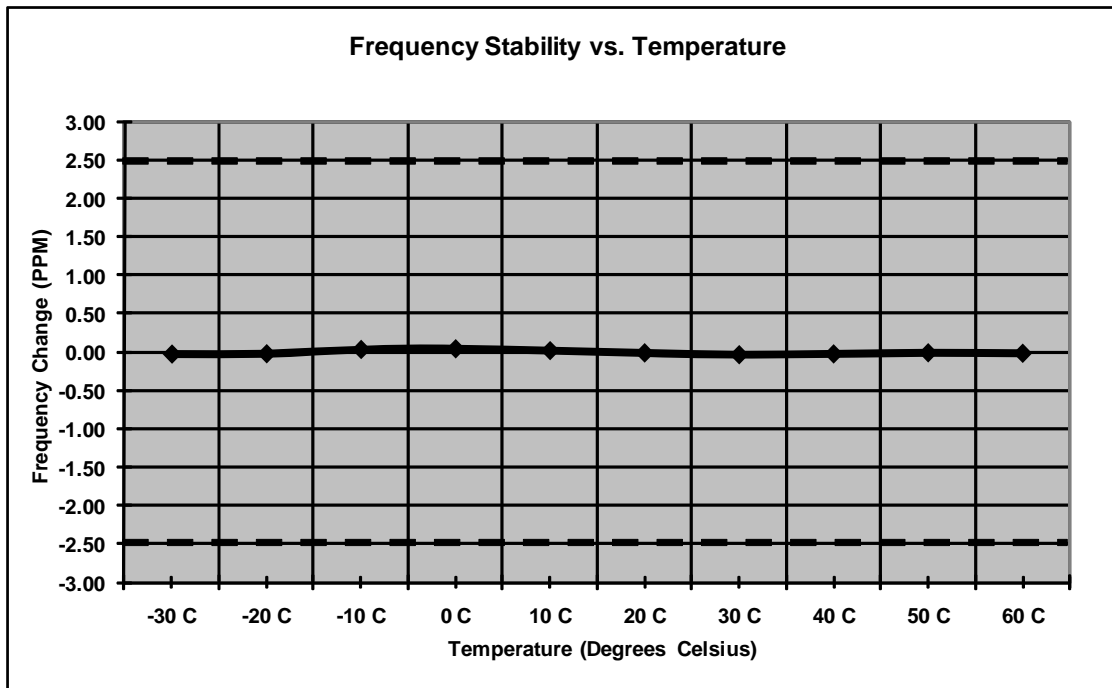


**Measurement Results**  
**Modulation: EDGE 850**

# Frequency Stability

**Mode:** GSM 850 EDGE      **Operating Frequency:** 836.6 MHz  
**Channel:** 190              **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-26.78	-0.032	100%	3.60
-20 C	-34.11	-0.041	100%	3.60
-10 C	51.07	0.061	100%	3.60
0 C	43.91	0.052	100%	3.60
10 C	39.47	0.047	100%	3.60
20 C	-49.18	-0.059	100%	3.60
30 C	32.15	0.038	100%	3.60
40 C	21.34	0.026	100%	3.60
50 C	25.77	0.031	100%	3.60
60 C	-6.66	-0.008	100%	3.60
20 C	36.38	0.043	Battery Endpoint	2.60

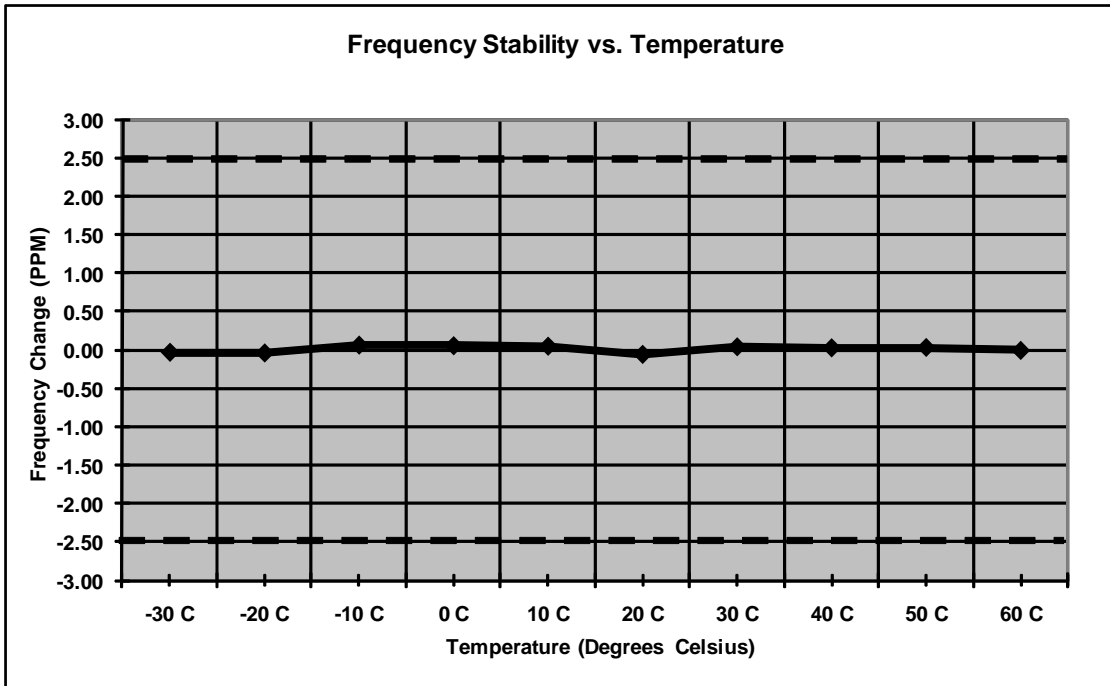


**Measurement Results**  
**Modulation: GSM 1900**

# Frequency Stability

**Mode:** GSM 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	84.50	0.045	100%	3.60
-20 C	-63.48	-0.034	100%	3.60
-10 C	72.72	0.039	100%	3.60
0 C	83.65	0.044	100%	3.60
10 C	50.73	0.027	100%	3.60
20 C	20.55	0.011	100%	3.60
30 C	30.56	0.016	100%	3.60
40 C	23.21	0.012	100%	3.60
50 C	24.24	0.013	100%	3.60
60 C	23.25	0.012	100%	3.60
20 C	40.09	0.021	Battery Endpoint	2.60

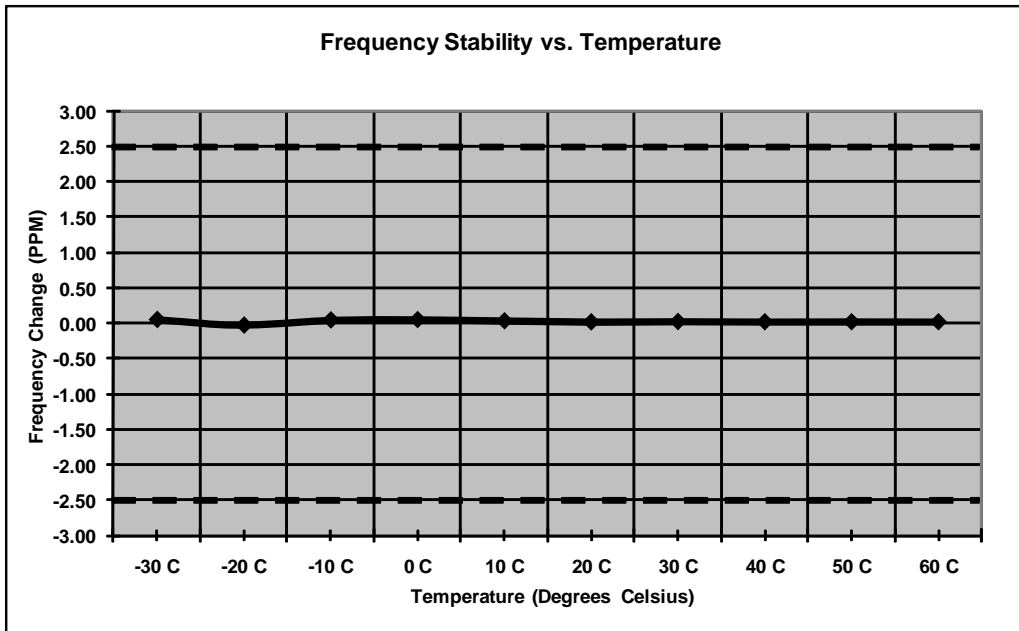


**Measurement Results**  
**Modulation: EDGE 1900**

# Frequency Stability

**Mode:** GSM 1900 EDGE      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661                      **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	52.74	0.028	100%	3.60
-20 C	35.23	0.019	100%	3.60
-10 C	96.32	0.051	100%	3.60
0 C	90.47	0.048	100%	3.60
10 C	77.67	0.041	100%	3.60
20 C	32.30	0.017	100%	3.60
30 C	24.21	0.013	100%	3.60
40 C	44.06	0.023	100%	3.60
50 C	43.44	0.023	100%	3.60
60 C	-22.63	-0.012	100%	3.60
20 C	59.56	0.032	Battery Endpoint	2.60

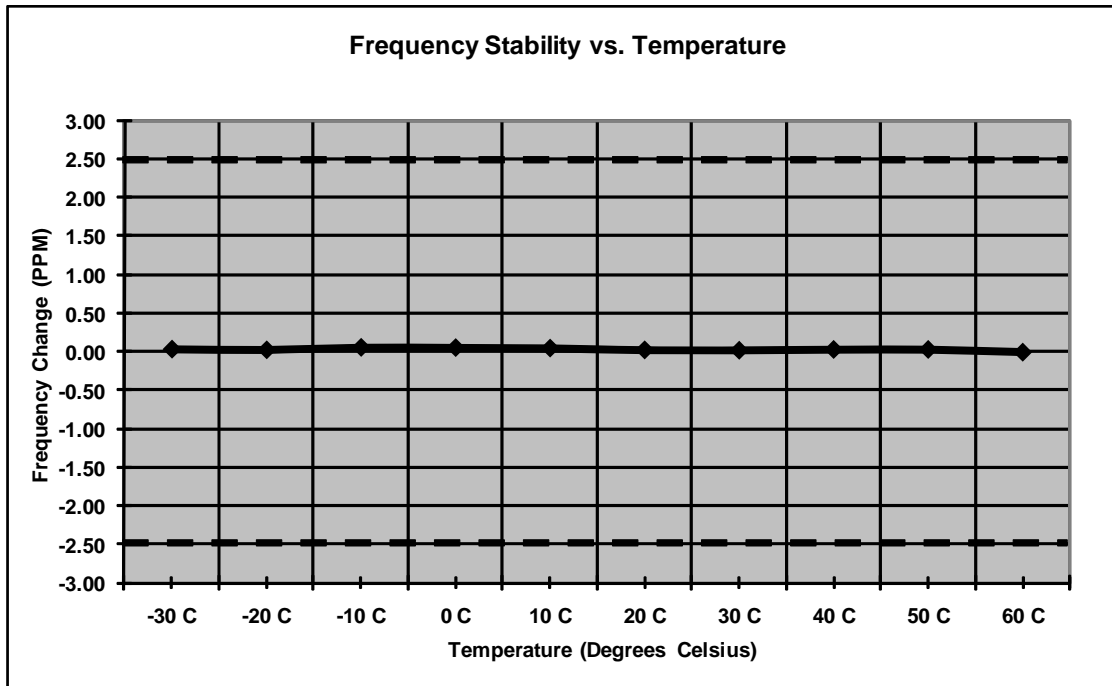


**Measurement Results**  
**Modulation: WCDMA 850**

# Frequency Stability

**Mode:** WCDMA 800      **Operating Frequency:** 836.00 MHz  
**Channel:** 4180          **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-34.95	-0.042	100%	3.60
-20 C	-58.38	-0.070	100%	3.60
-10 C	-53.28	-0.064	100%	3.60
0 C	-59.55	-0.071	100%	3.60
10 C	-44.63	-0.053	100%	3.60
20 C	-81.94	-0.098	100%	3.60
30 C	-80.35	-0.096	100%	3.60
40 C	-106.21	-0.127	100%	3.60
50 C	-107.11	-0.128	100%	3.60
60 C	-106.66	-0.128	100%	3.60
20 C	-91.05	-0.109	Battery Endpoint	2.60

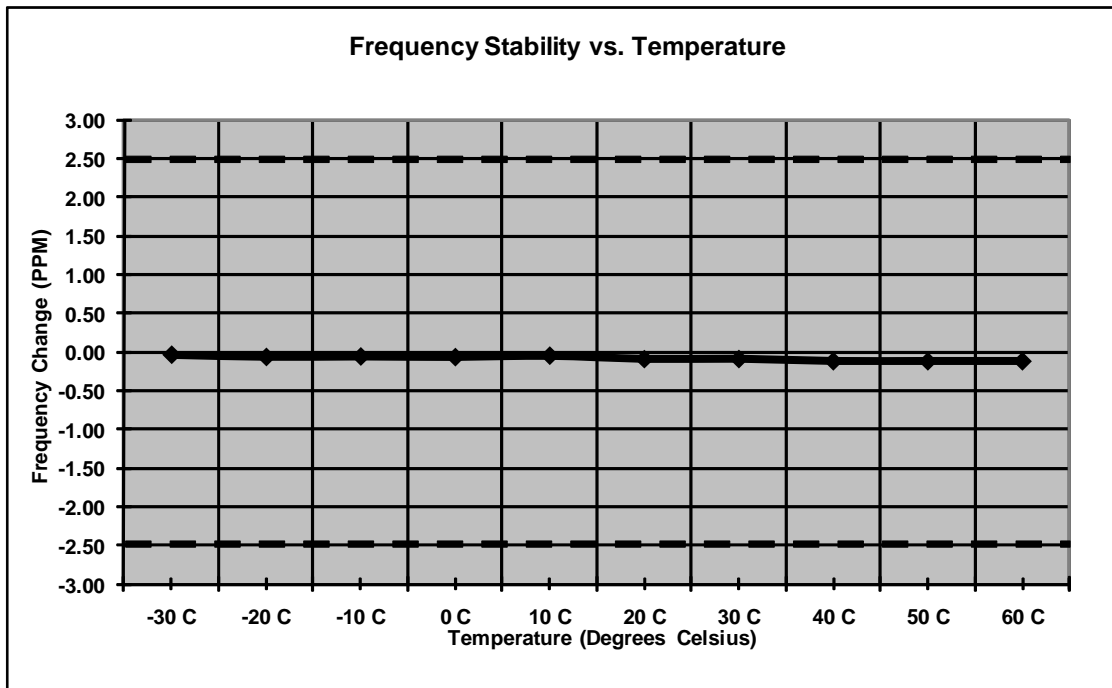


**Measurement Results**  
**Modulation: WCDMA 1900**

# Frequency Stability

**Mode:** WCDMA 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 600              **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-119.17	-0.063	100%	3.60
-20 C	-121.98	-0.065	100%	3.60
-10 C	-118.73	-0.063	100%	3.60
0 C	-121.44	-0.065	100%	3.60
10 C	-138.23	-0.074	100%	3.60
20 C	-130.19	-0.069	100%	3.60
30 C	-185.40	-0.099	100%	3.60
40 C	-159.21	-0.085	100%	3.60
50 C	-259.53	-0.138	100%	3.60
60 C	-284.95	-0.152	100%	3.60
20 C	-174.58	-0.093	Battery Endpoint	2.60

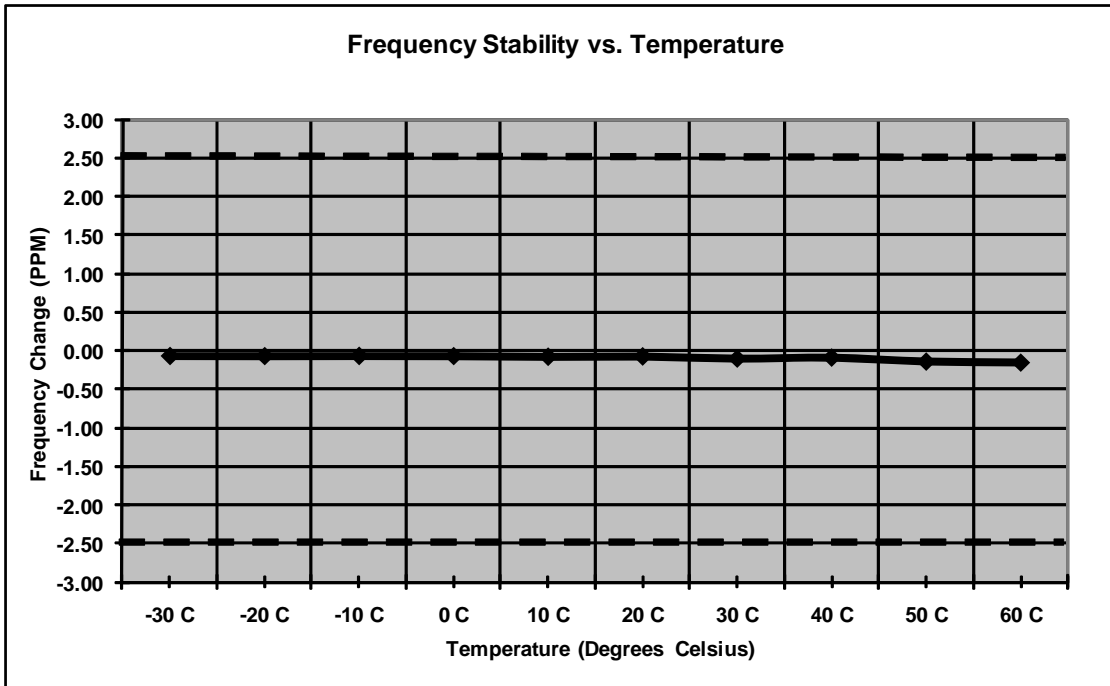

**End of Test Report**