



*Mobile Devices business  
iDEN Mobile Devices Operations*

# RF Test Report

FCC Rule Parts: 15C (Bluetooth)  
Industry Canada: RSS-Gen, RSS-210

**Product Name: i418**

**FCC ID: IHDT56NP1**

Date: July 6, 2012

# Table of Contents

Test Report Details	6d0-1
Bluetooth Transmitter Characteristics	6dc-1
Radiated and Conducted Spurious	TIMCO Report

## Test Report Details

Tests Performed by:

TIMCO Engineering  
Laboratory details in report

FCC Registration Number: **95517**

Industry Canada Number: **2056A**

---

Product Type:

Cellular Phone

Signaling Capabilities:

Bluetooth Transceiver (2.4 GHz ISM)

FCC ID:

IHDT56NP1

IC ID:

NA

## Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the United States Code of Federal Regulations, Title 47 Part 2, Sub-part J, as well as the following parts:

- X**    Part 15 Subpart C – Radio Frequency Devices.
- X**    RSS-210 – Low-power License-exempt Radiocommunication  
            Devices (All Frequency Bands): Category I  
            Equipment.

Applicable Standards: TIA/EIA-603-A, TIA/EIA-603-B, TIA/EIA-603-C, and ANSI C63.4-2009.

### Exhibit 6d: Bluetooth Measured Data– Pursuant 47 CFR 2.1041; RSS-Gen Section 3.

Bluetooth conducted measurement setup and procedure was provided in Exhibit 7.

#### 6d.1. Bluetooth Carrier Frequency Separation – Pursuant 47 CFR 15.247(a)(1); RSS-210 Section A8.1.

Criterion: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

The measurement shows a carrier frequency separation of 1.000 MHz, which is greater than the measured 20 dB bandwidth of 900 kHz.


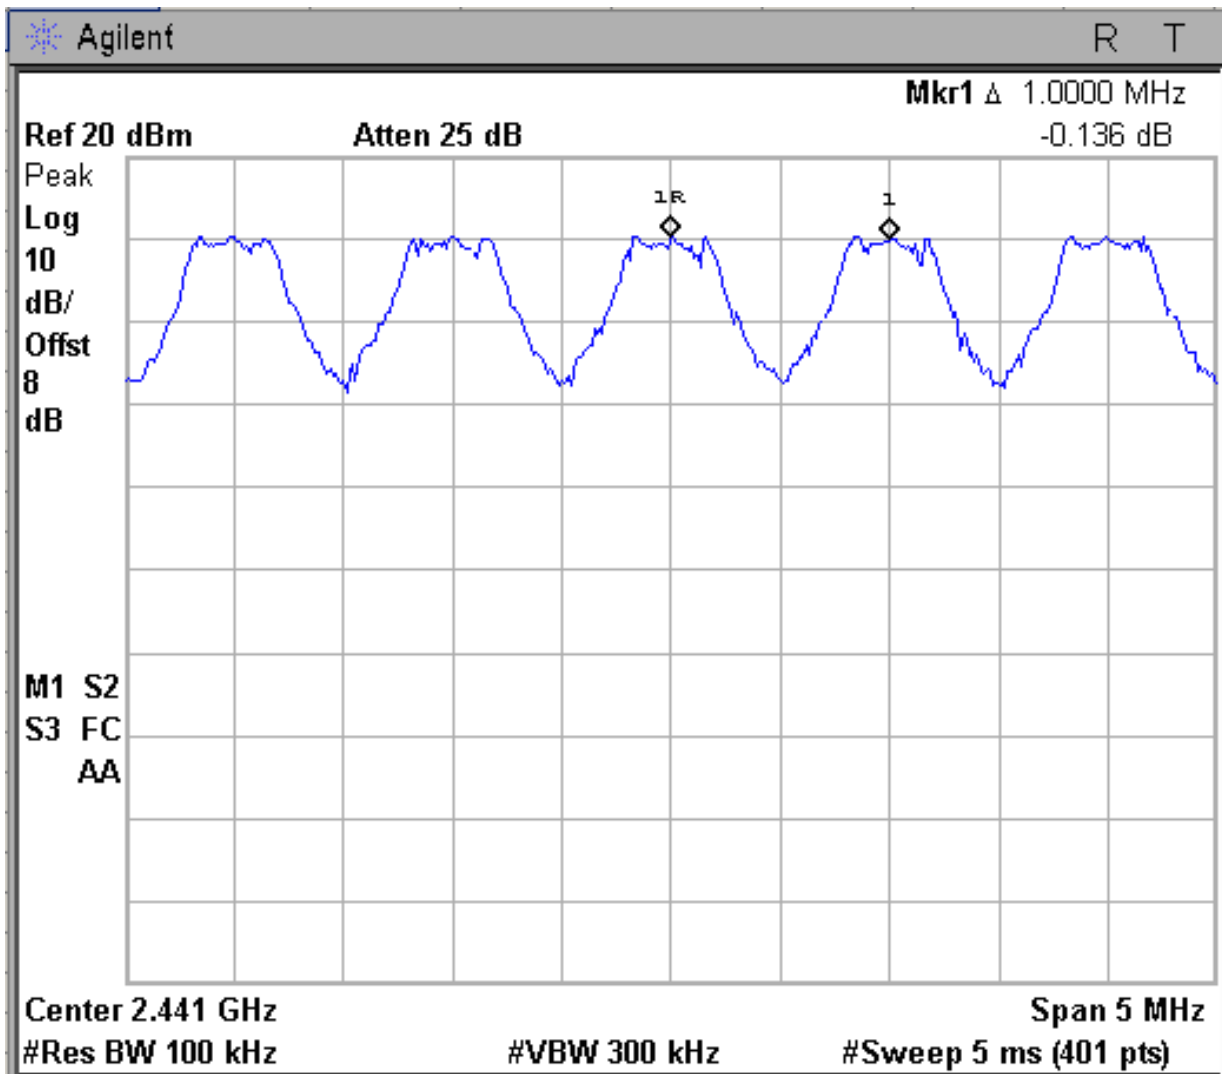


Figure 6d.1-1: Plot of Bluetooth carrier frequency separation

**6d.2. 20 dB Bandwidth – Pursuant 47 CFR 15.247(a)(1); RSS-210 Section A8.1.**

The 20 dB bandwidth of the emission is 1.40 MHz.

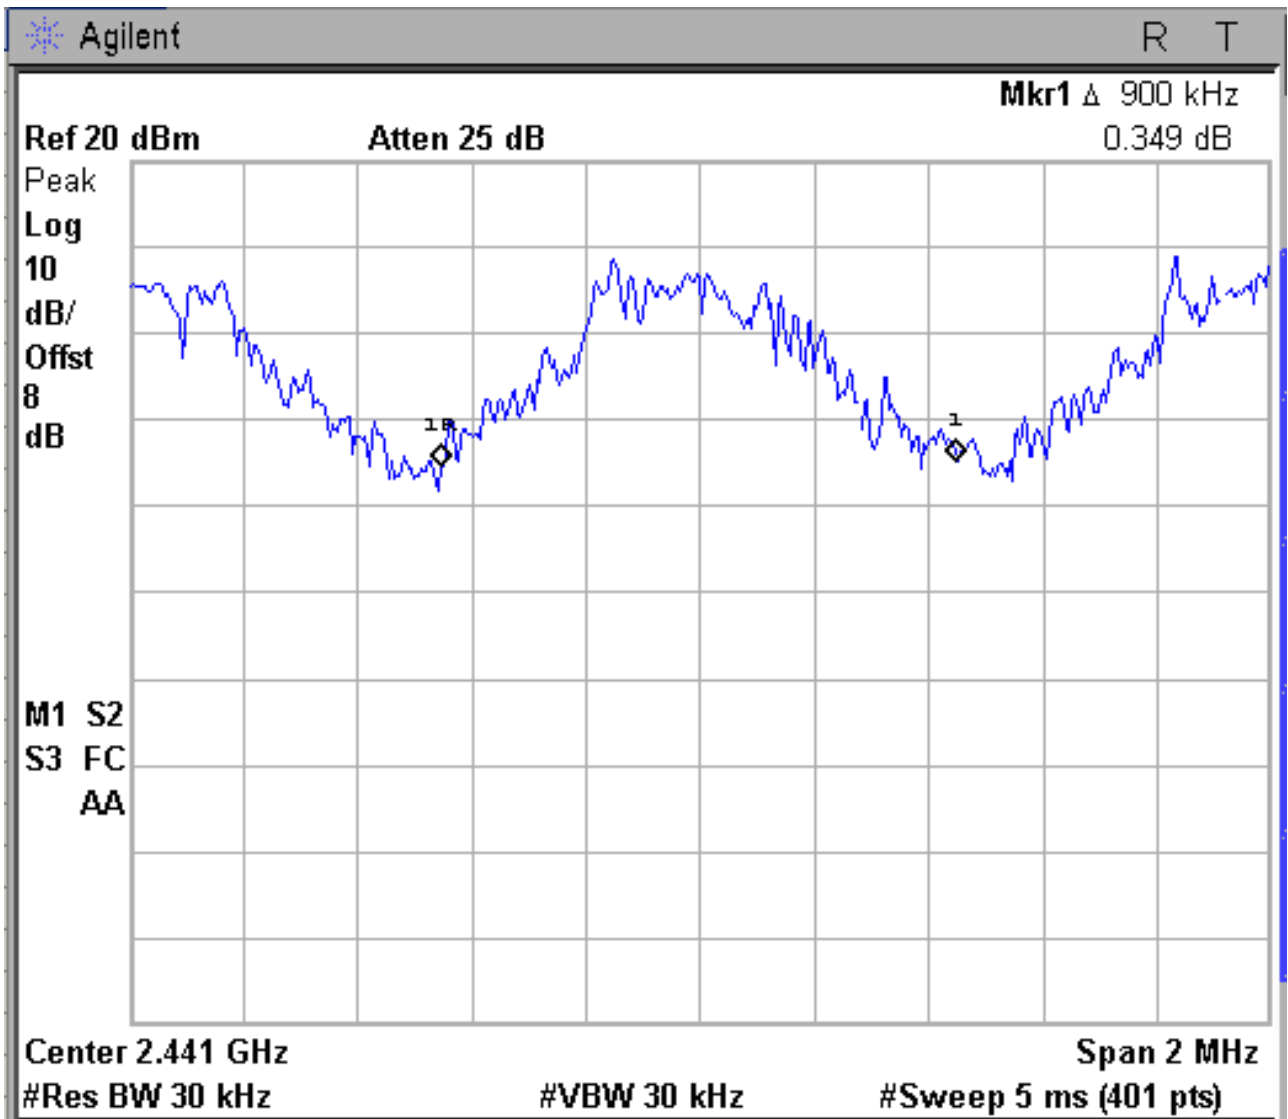

**Figure 6d.2-1: Plot of 20 dB bandwidth (GFSK Modulation)**

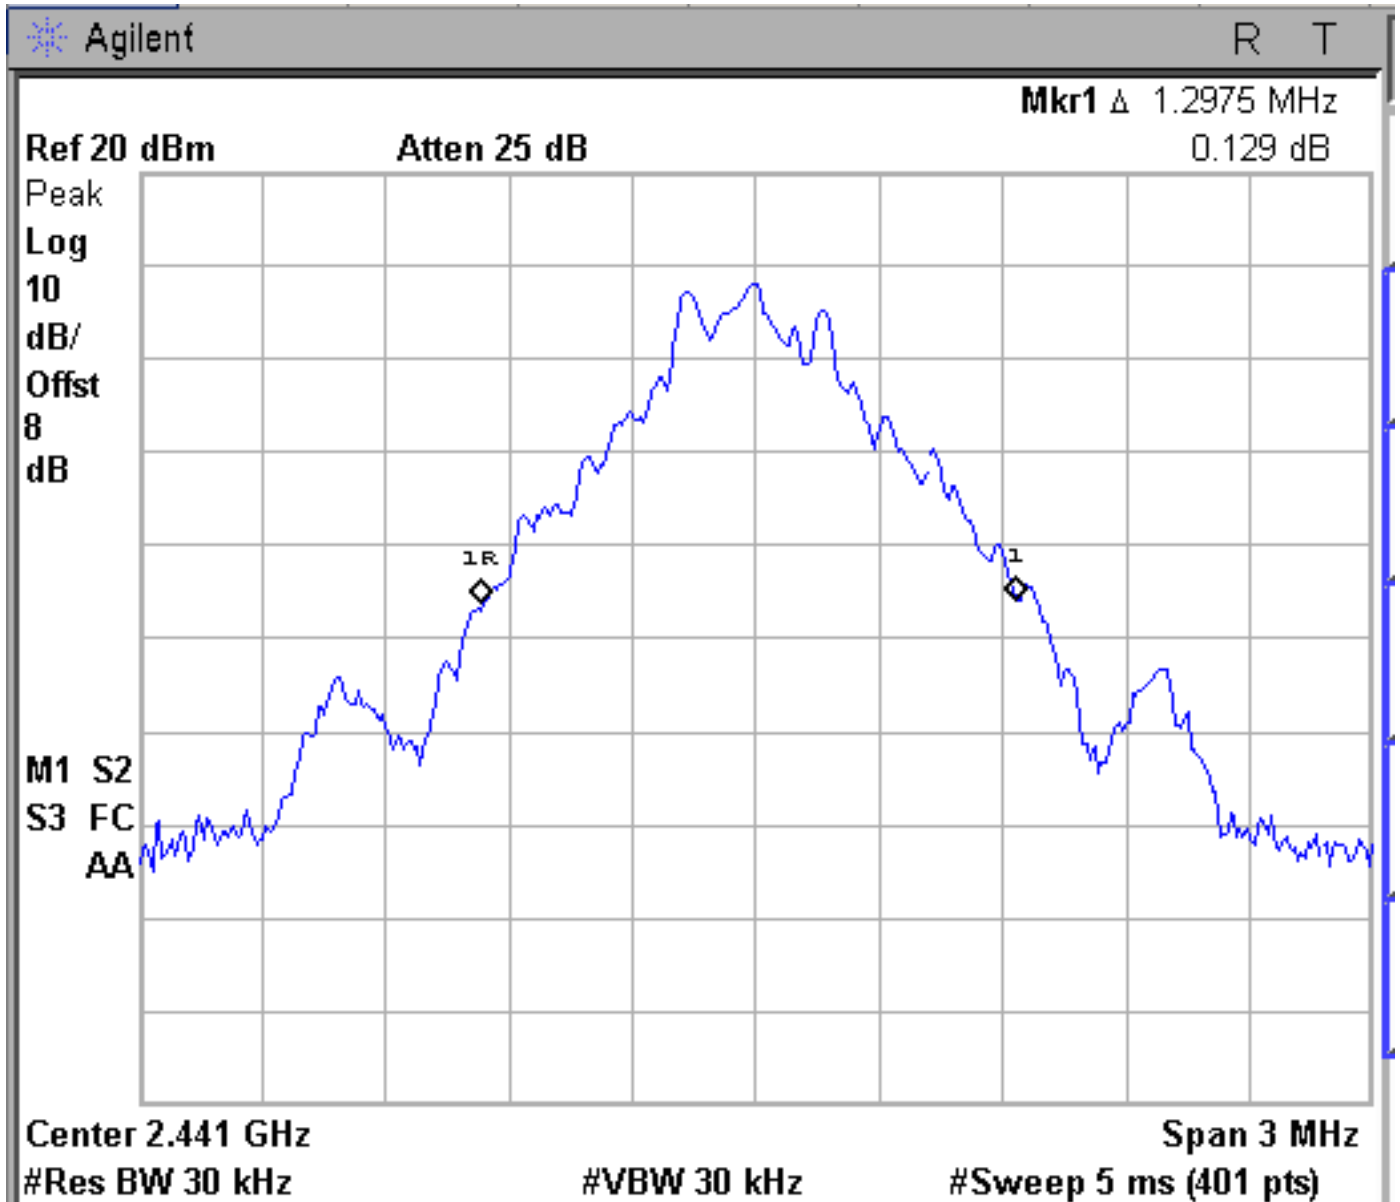


Figure 6d.2-2: Plot of 20 dB bandwidth (Pi/4 DPSK Modulation)


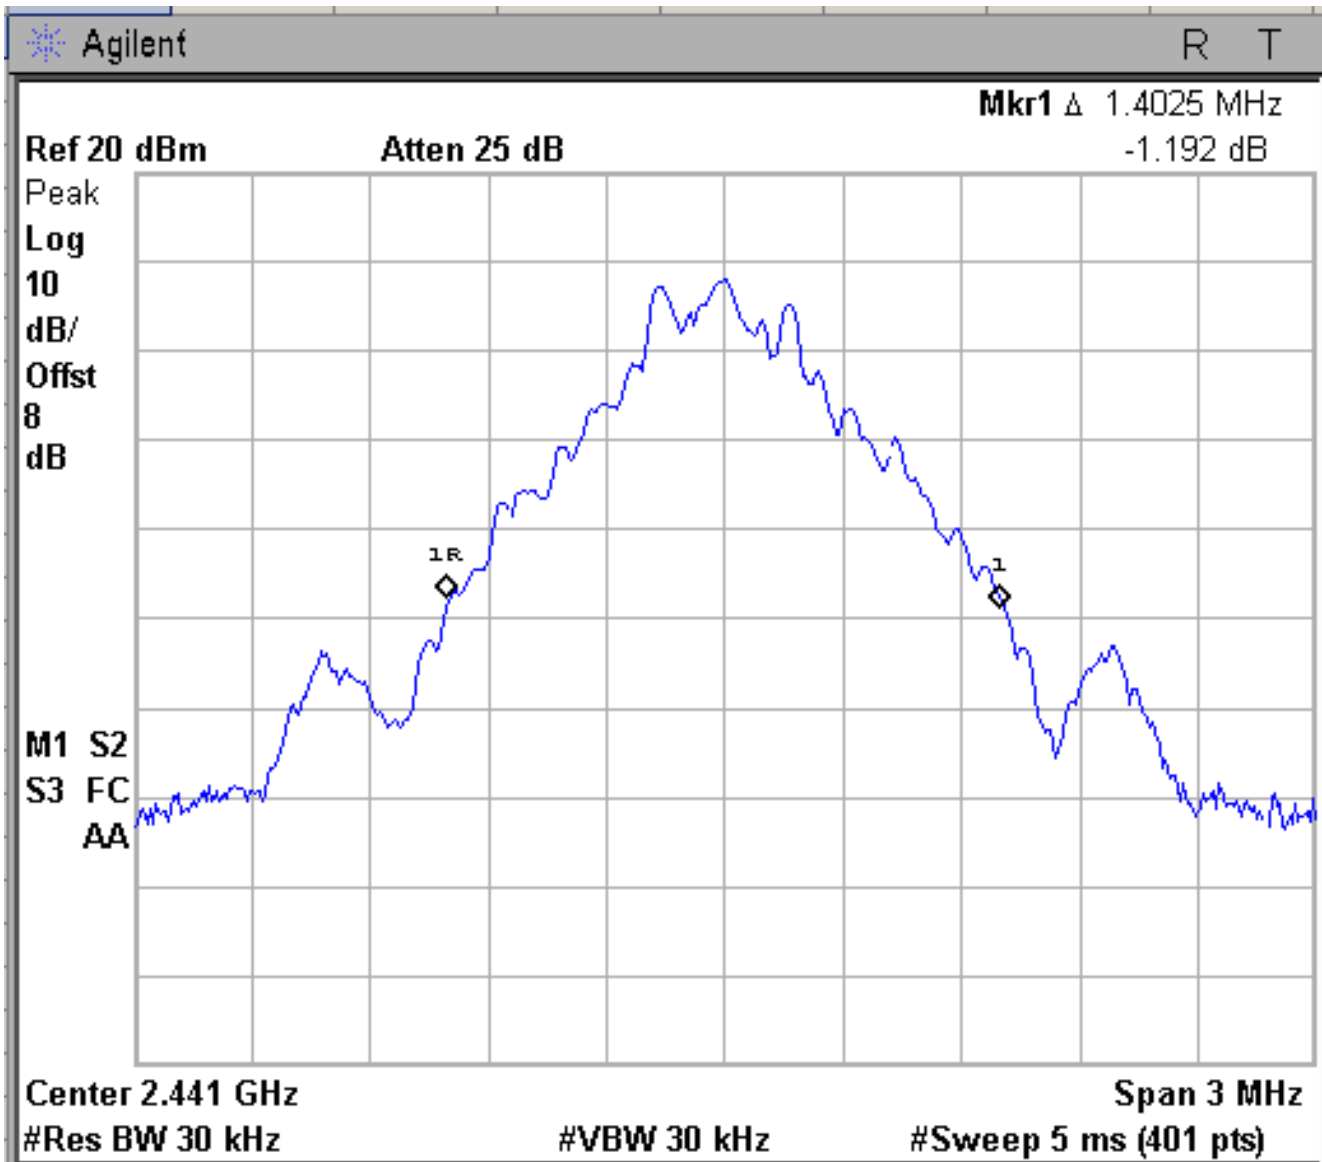


Figure 6d.2-3: Plot of 20 dB bandwidth (8-DPSK Modulation)

**6d.3. Bluetooth number of hopping frequencies – Pursuant 47 CFR 15.247(a)(1)(iii); RSS-210 Section A8.1.**

Criterion: Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

The measurement shows 79 non-overlapping channels over a span of 79 MHz.

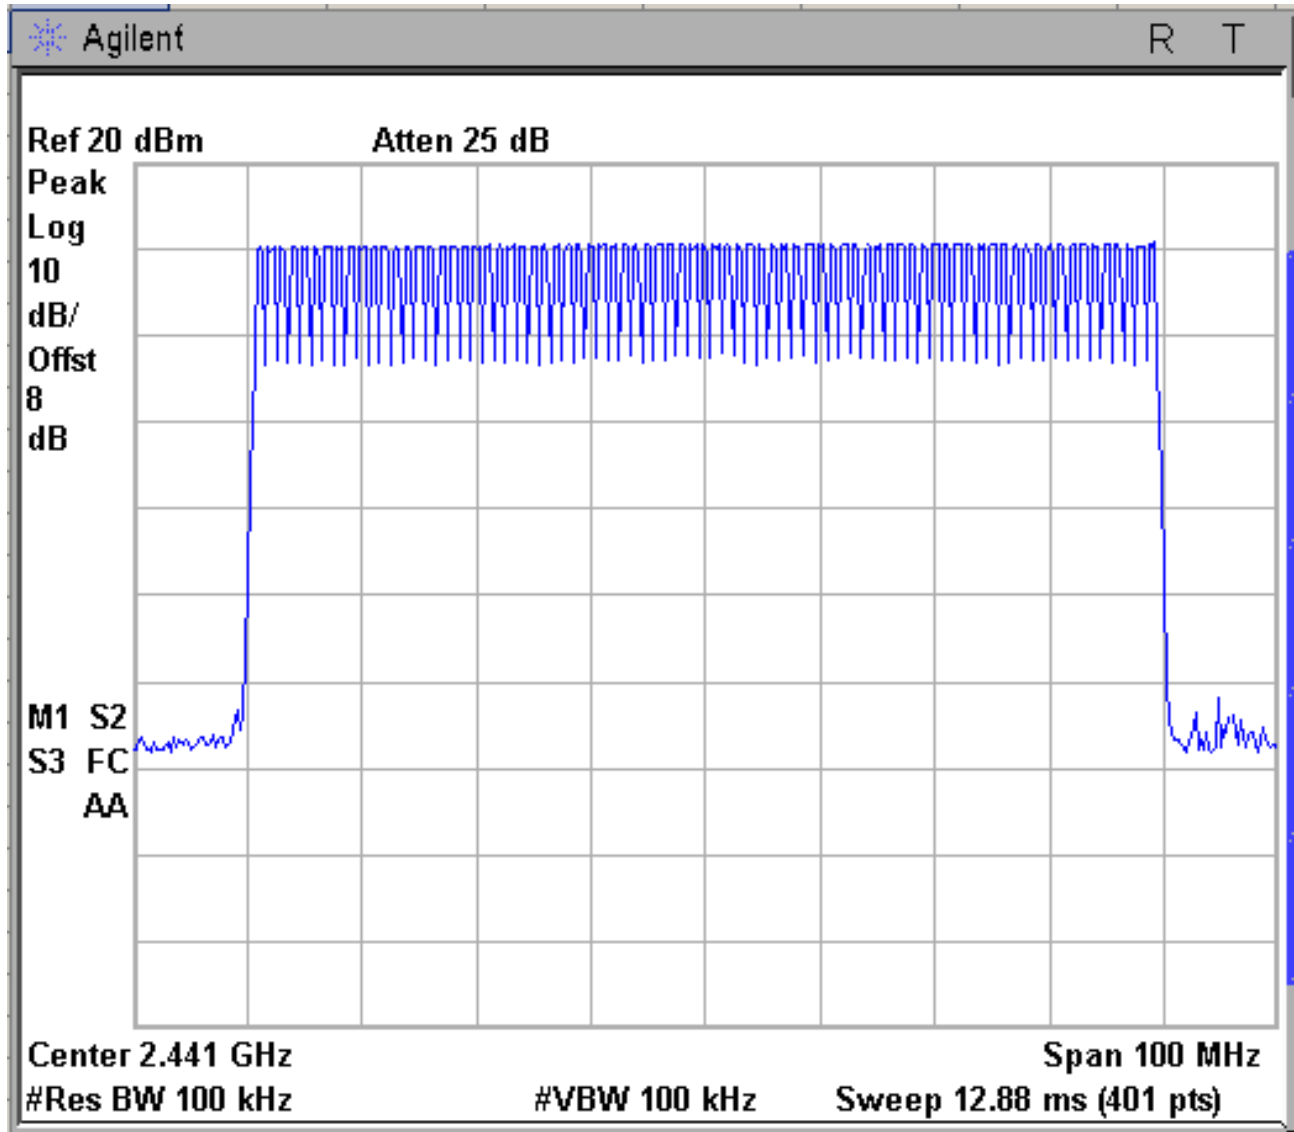


**Figure 6d.3-1: Plot of number of Bluetooth hopping frequencies**

**6d.4. Time of Occupancy (Dwell Time) – Pursuant 47 CFR 15.247(a)(1)(iii); RSS-210 Section A8.1.**

Criterion: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

This plot shows a sweep over a 31.6 second period for DH1 packet. It is clear that a measurement cannot be made here due to the coarse resolution in the time domain.

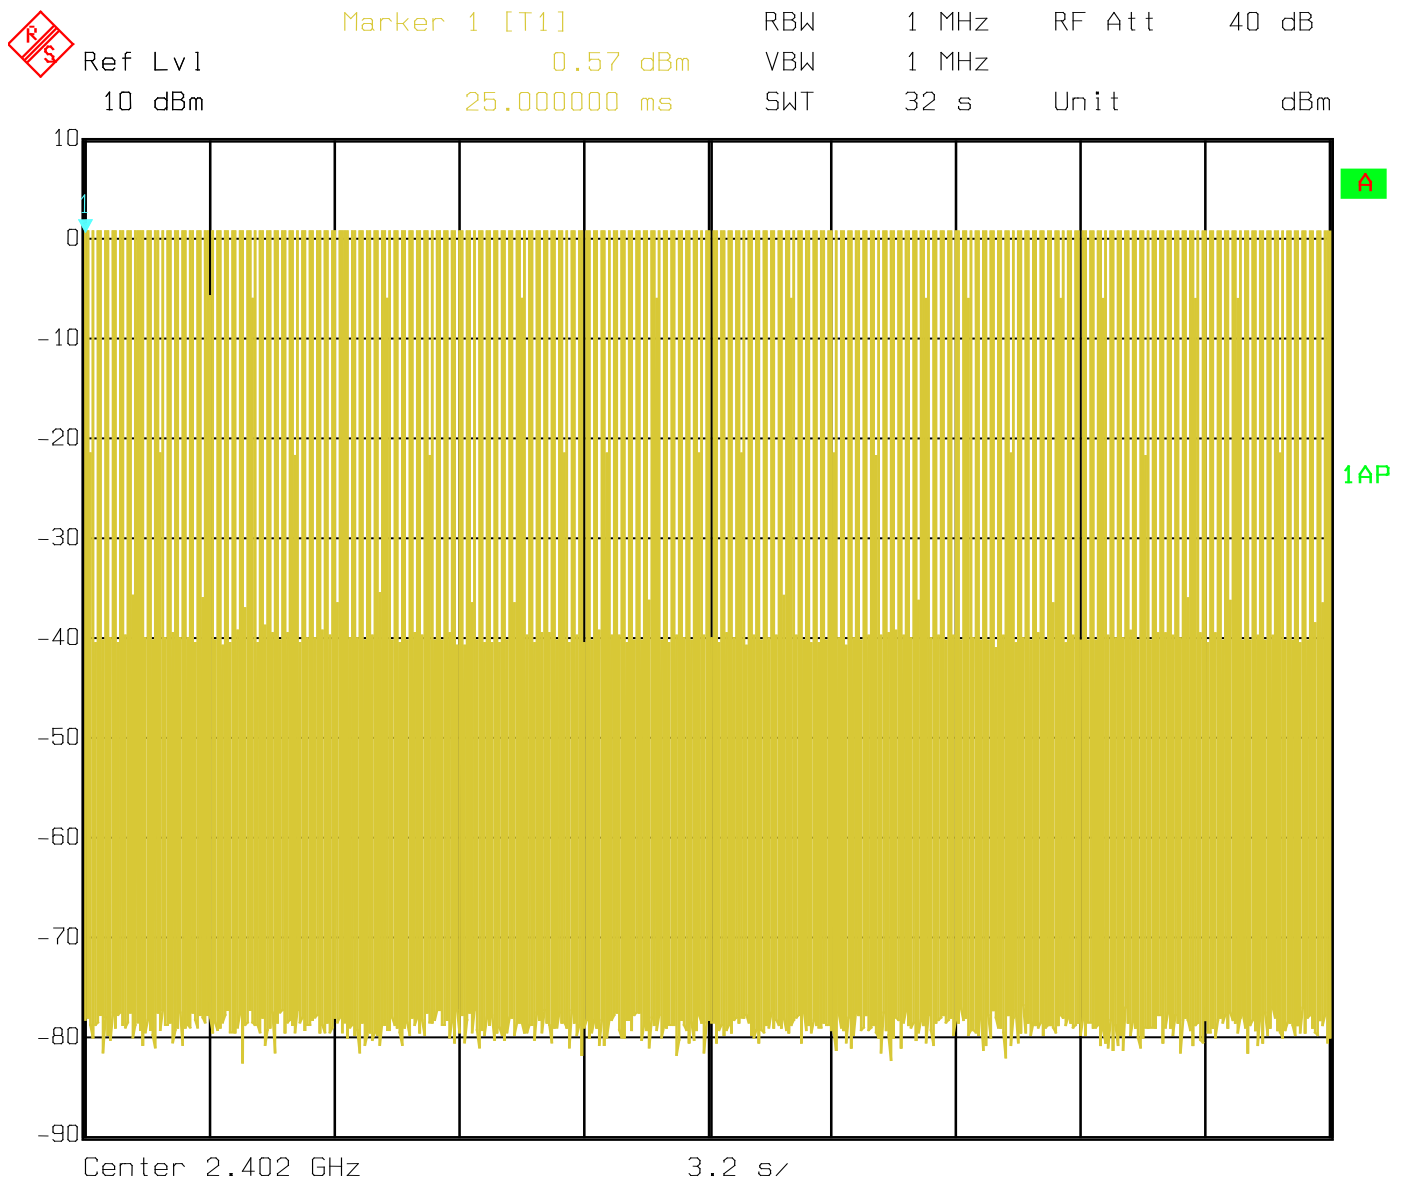

**Figure 6d.4-1: Plot of dwell time over 32 second period**

This plot below shows the sweep in a 4 second period. Again, the resolution is not fine enough to capture the dwell time in each burst. The periodicity, however, can be seen and the number of time slots occupied (41) can be extrapolated to show the number of time slots occupied within a 31.6 second period ( $41 \cdot \frac{32s}{4s} = 323.9 \approx 324$ ).

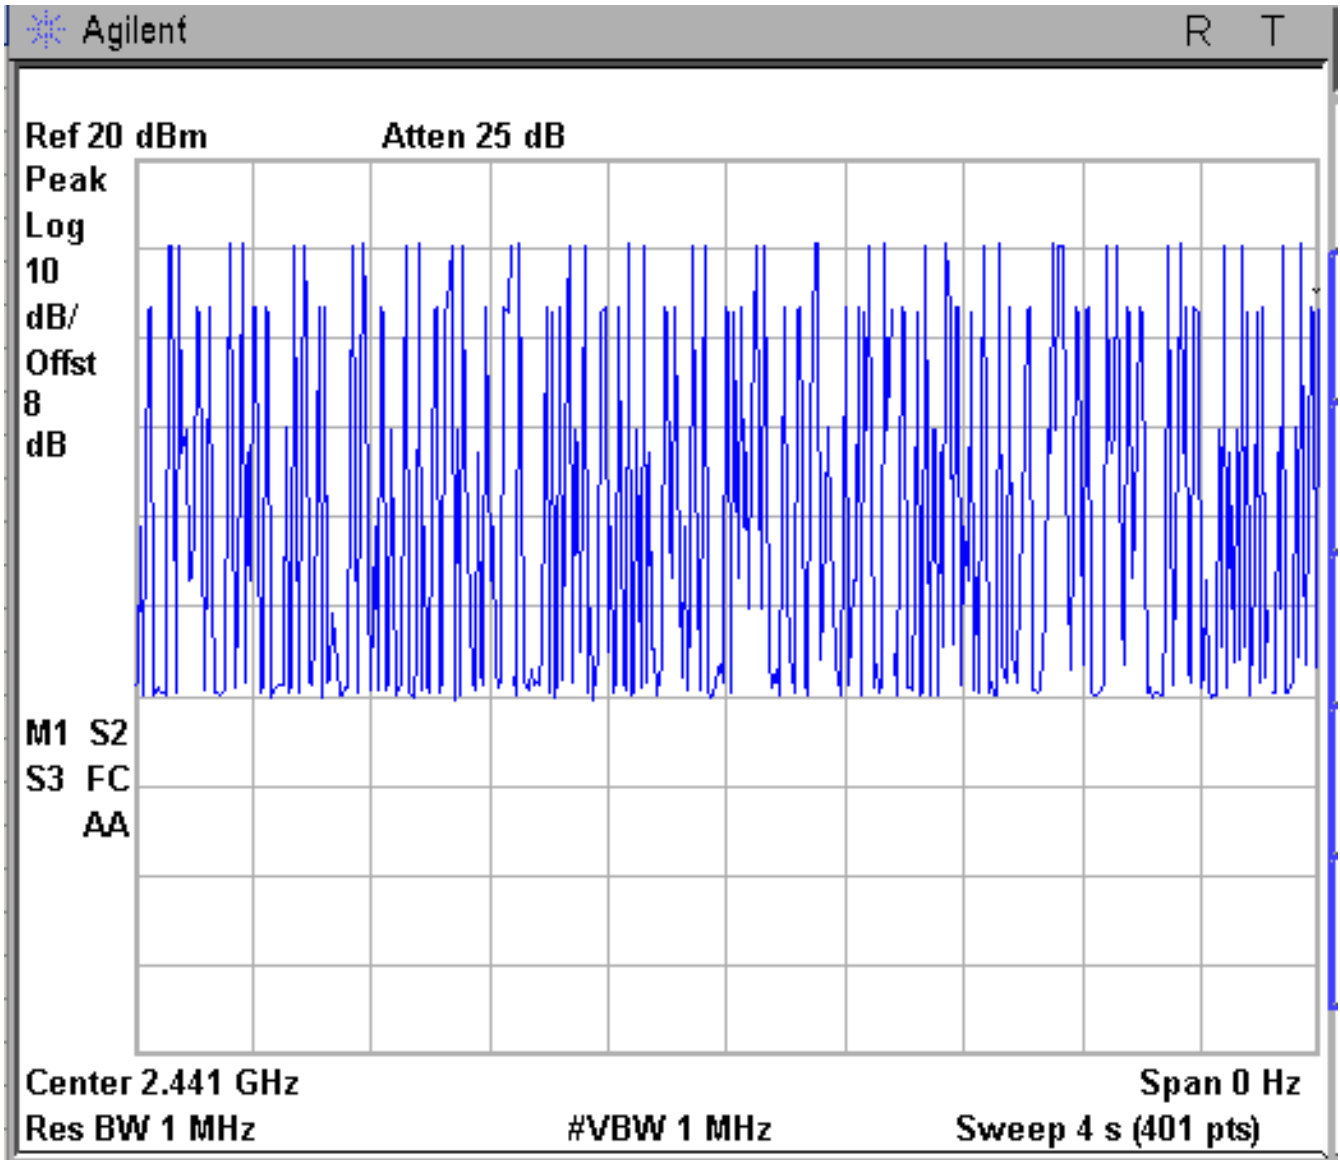


Figure 6d.4-2: Plot of dwell time over 4 second period.

This plot below shows a sweep over a 6 ms period, allowing the measurement of one time-slot (360µs). This active time can be multiplied by the number of transmissions in a 31.6 second period (324) to derive the total dwell time in a 31.6 second period (123.1ms). The specification is 400 ms maximum dwell time.


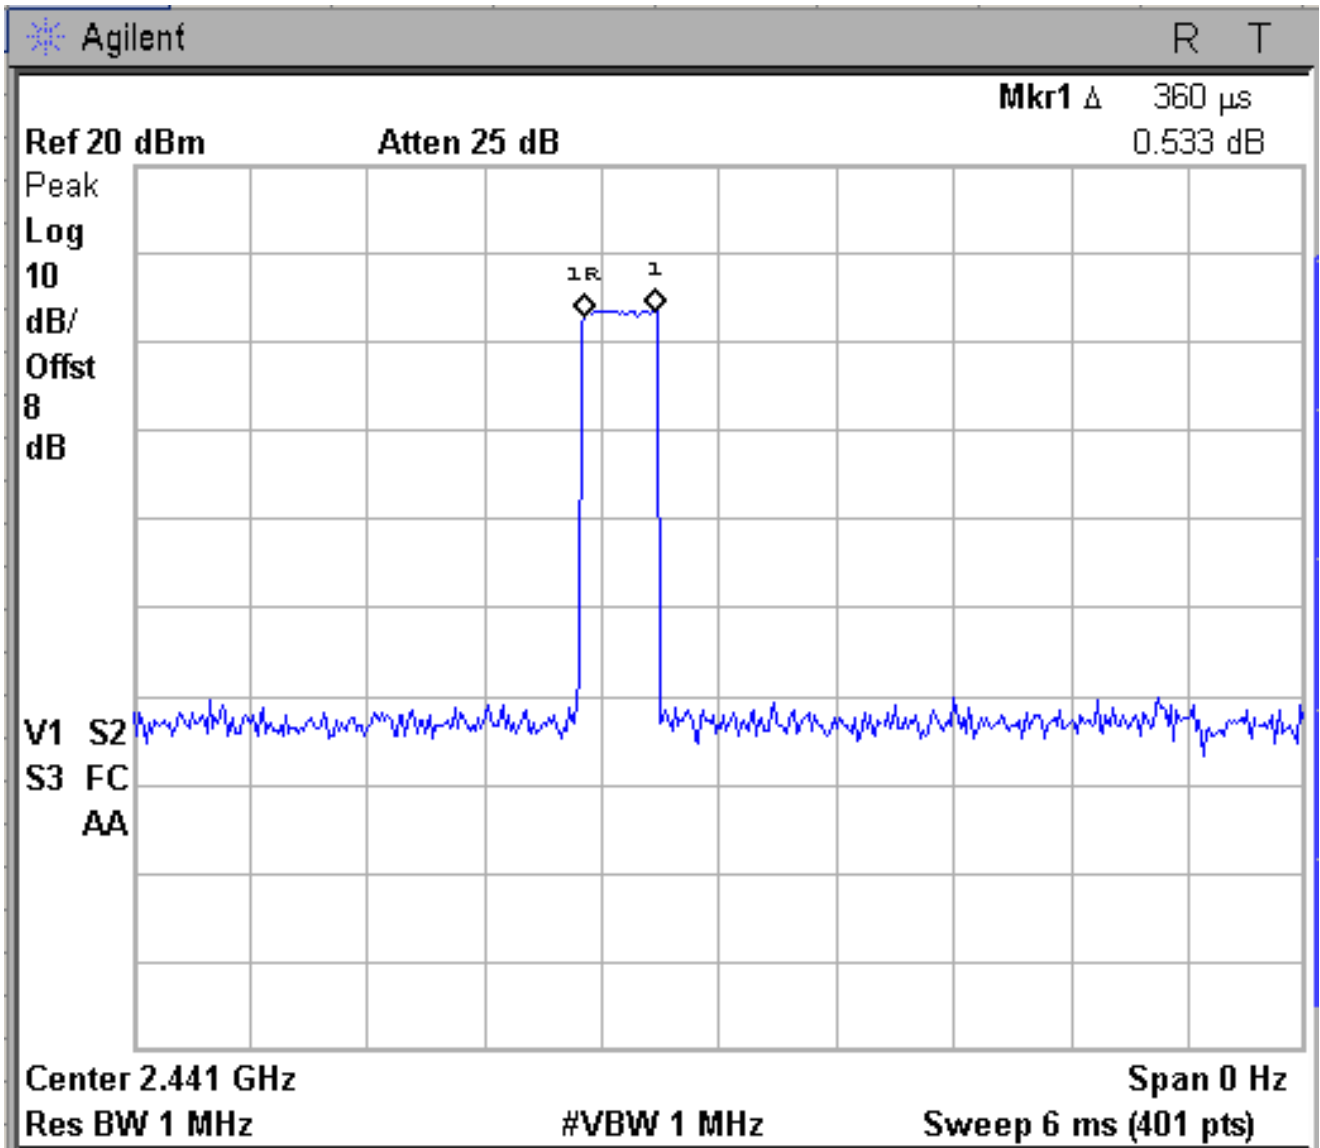


Figure 6d.4-3: Plot of dwell time over 6 ms period.

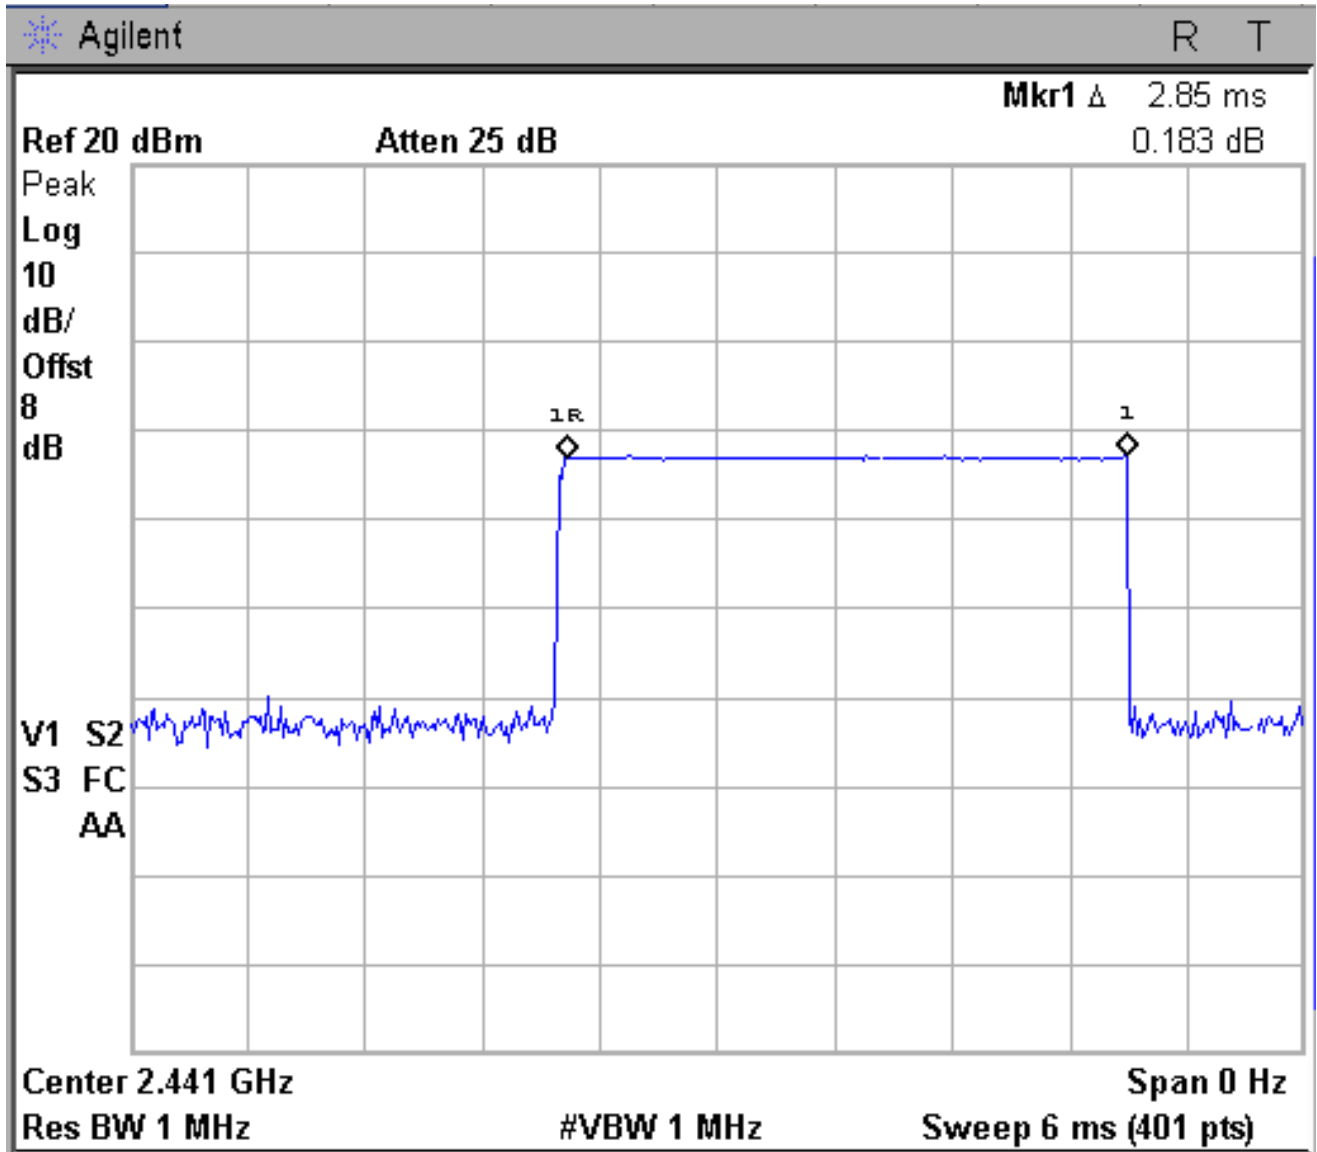


**Figure 6c.4-4: Plot of dwell time over 6ms period.**

The measurement shows the total dwell time for the longest Bluetooth packet, DH-5, in a 31.6 second period is 311-ms.

**6d.5. Peak Bluetooth Output Power – Pursuant 47 CFR 15.247(b)(1); RSS-210 Section A8.4.**

Criterion: For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

The peak output power is 10.44dBm, which is equivalent to 11.066mW (see Exhibit 12)..

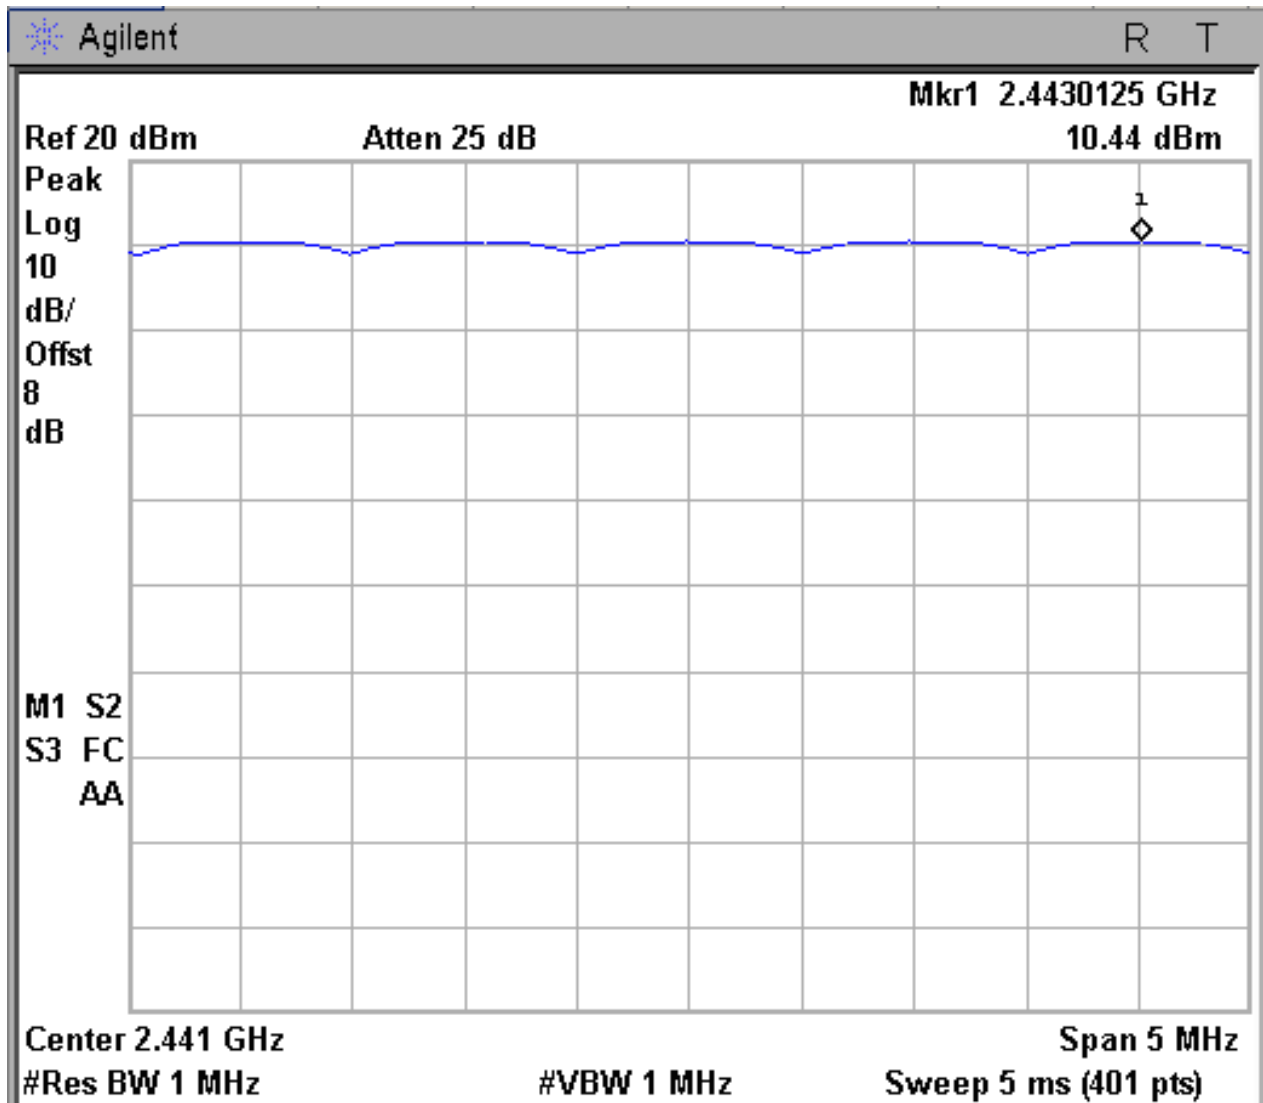

**Figure 6d.5-1: Plot of peak output power**

**6d.6. De Facto EIRP Limit – Pursuant 47 CFR 15.247(b)(4); RSS-210 Section A8.4.**


Criterion: The conducted output power limit of 1-watt is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna employed by this transmitter is intended to be omni-directional, and thus will not exhibit directional gain in excess of 6 dBi. The conducted power is less than the limits set forth (see elsewhere in this report for details).

**6d.7. Band-Edge Compliance of RF Conducted Emissions – Pursuant 47 CFR 15.247(d); RSS-210 Section A8.1.**

Criterion: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The measurement shows 53.1dB at the lower band edge and 58.12dB at the upper band edge with the hopping function disabled. The measurement shows 57.97dB at the lower band edge and 59.23dB at the upper band edge with the hopping enabled.

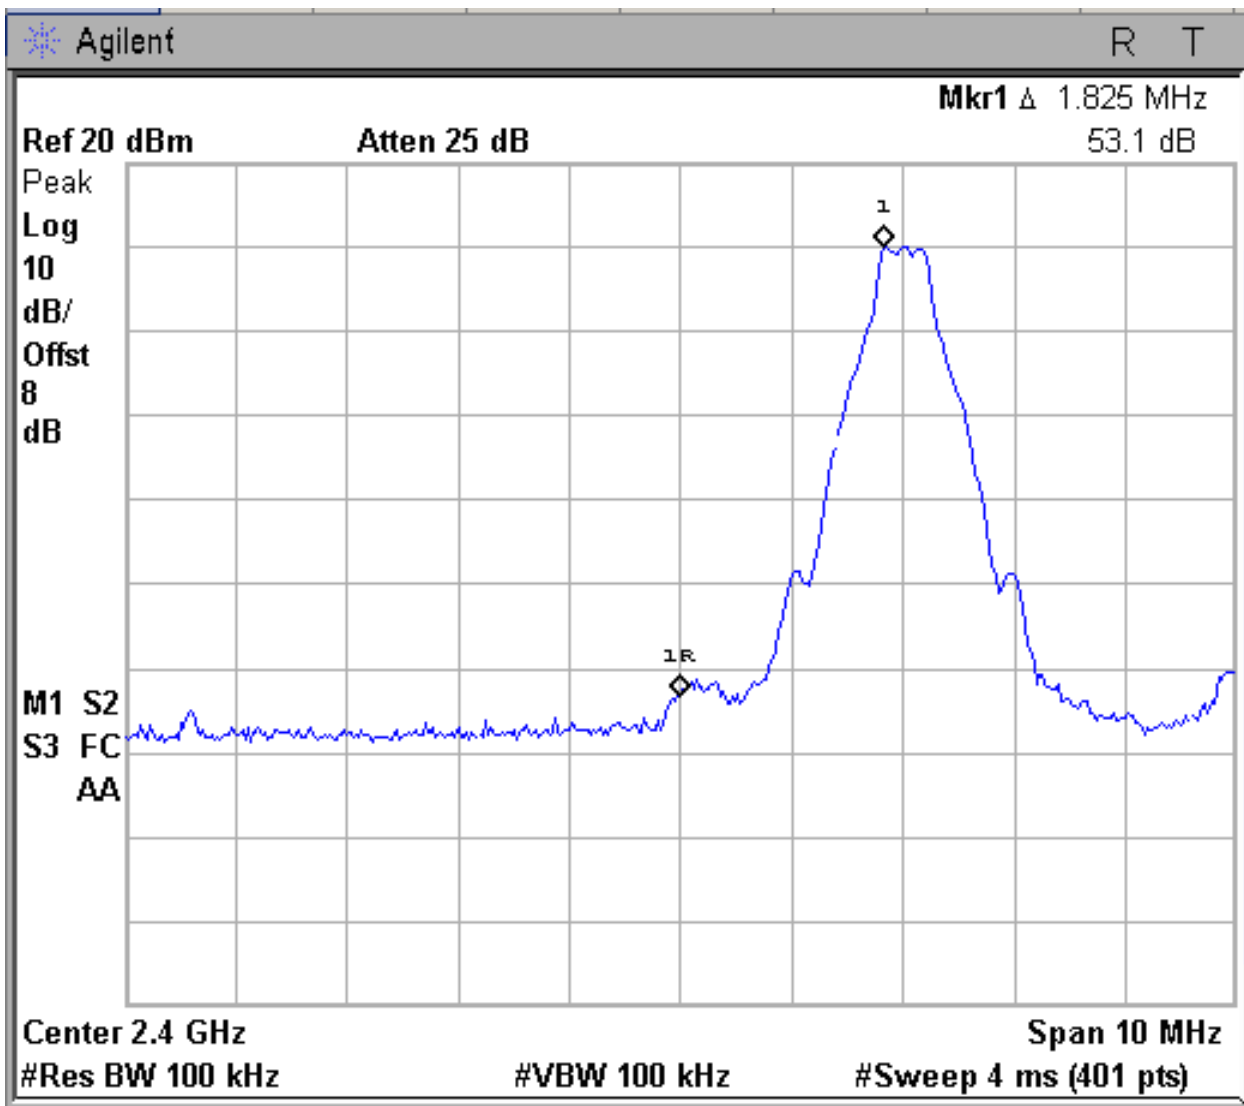

**Figure 6d.6-1: Plot of lower band-edge conducted emissions with hopping disabled (GFSK Modulation).**

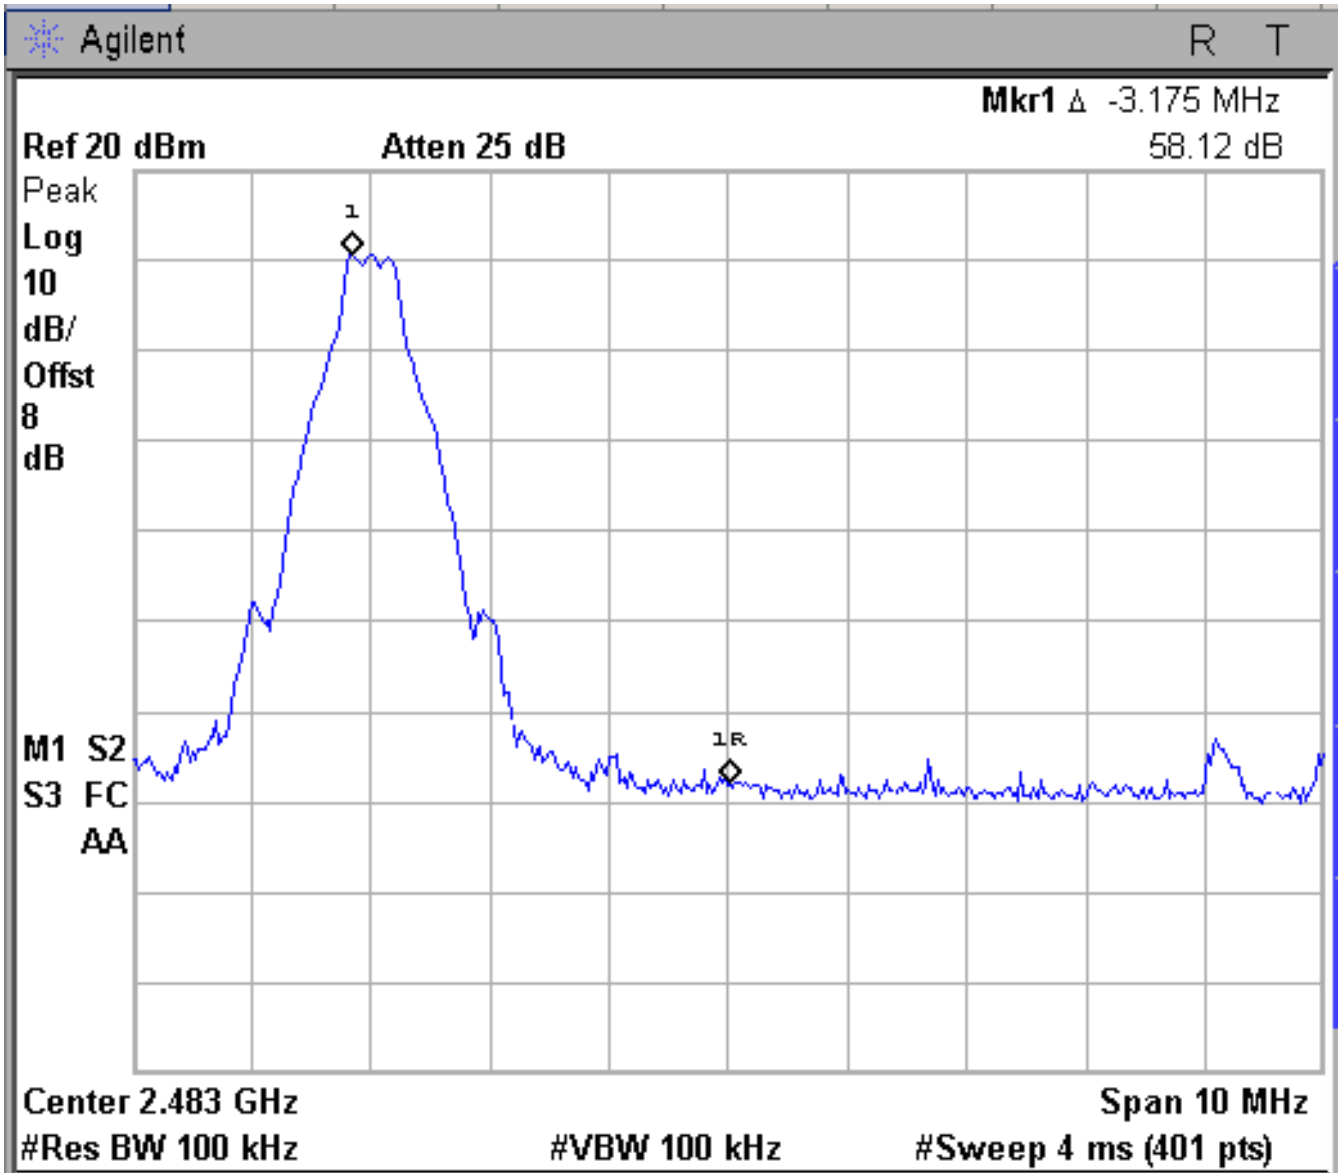


Figure 6d.6-2: Plot of upper band-edge conducted emissions with hopping disabled (GFSK Modulation).

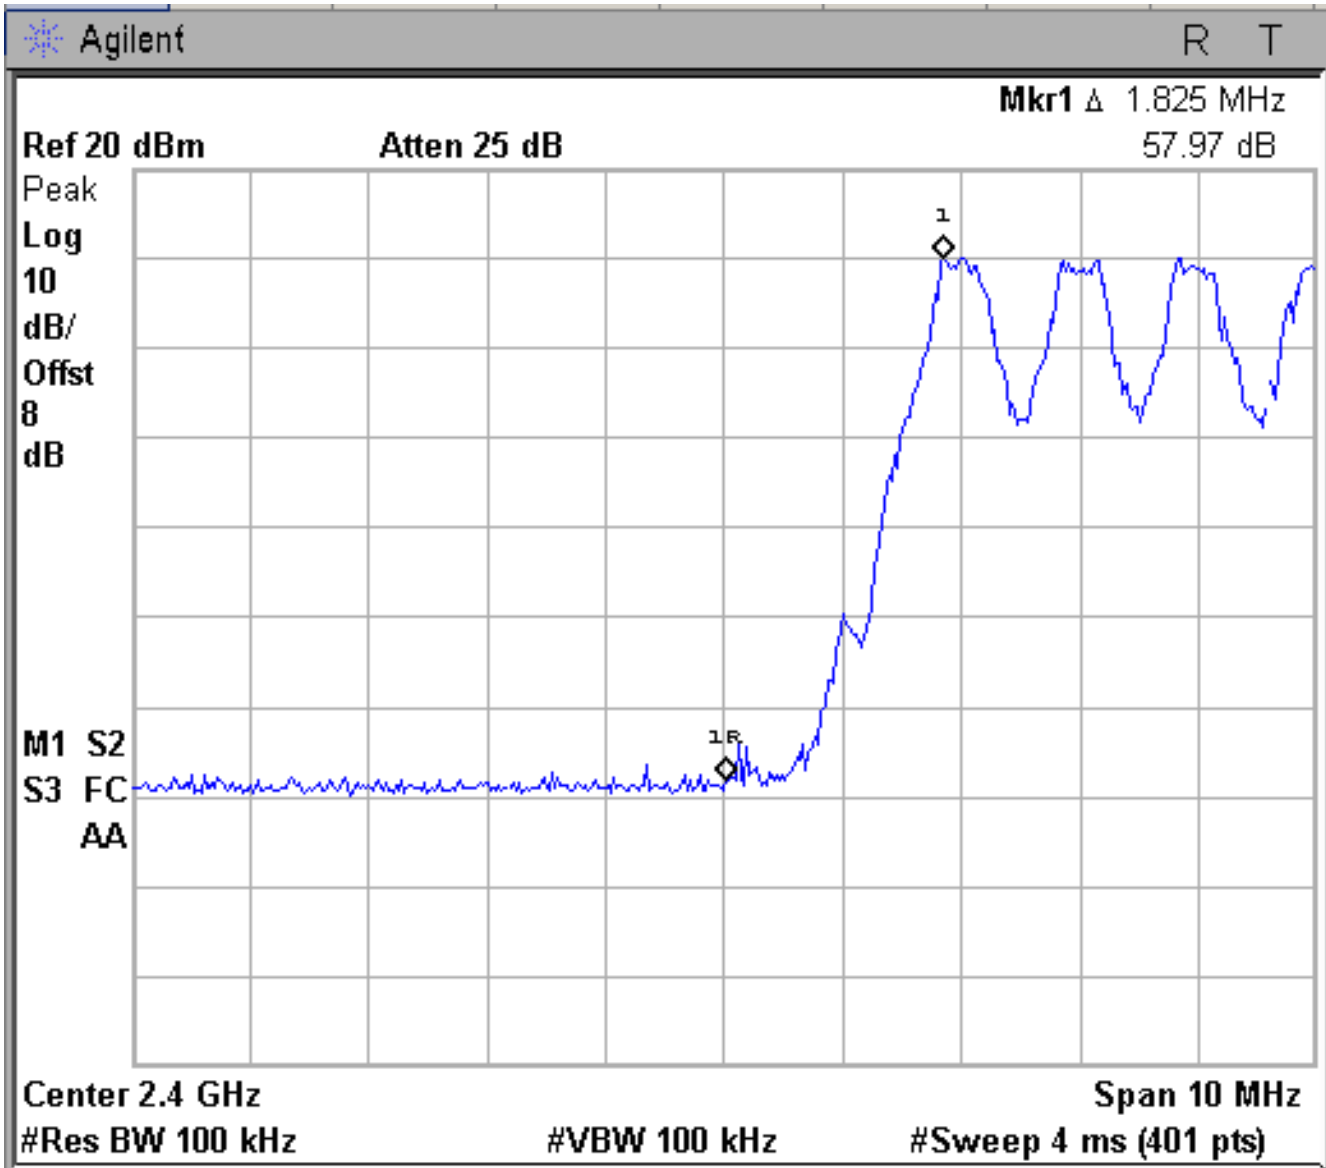


Figure 6d.6-3: Plot of lower band-edge conducted emissions with hopping enabled (GFSK Modulation).

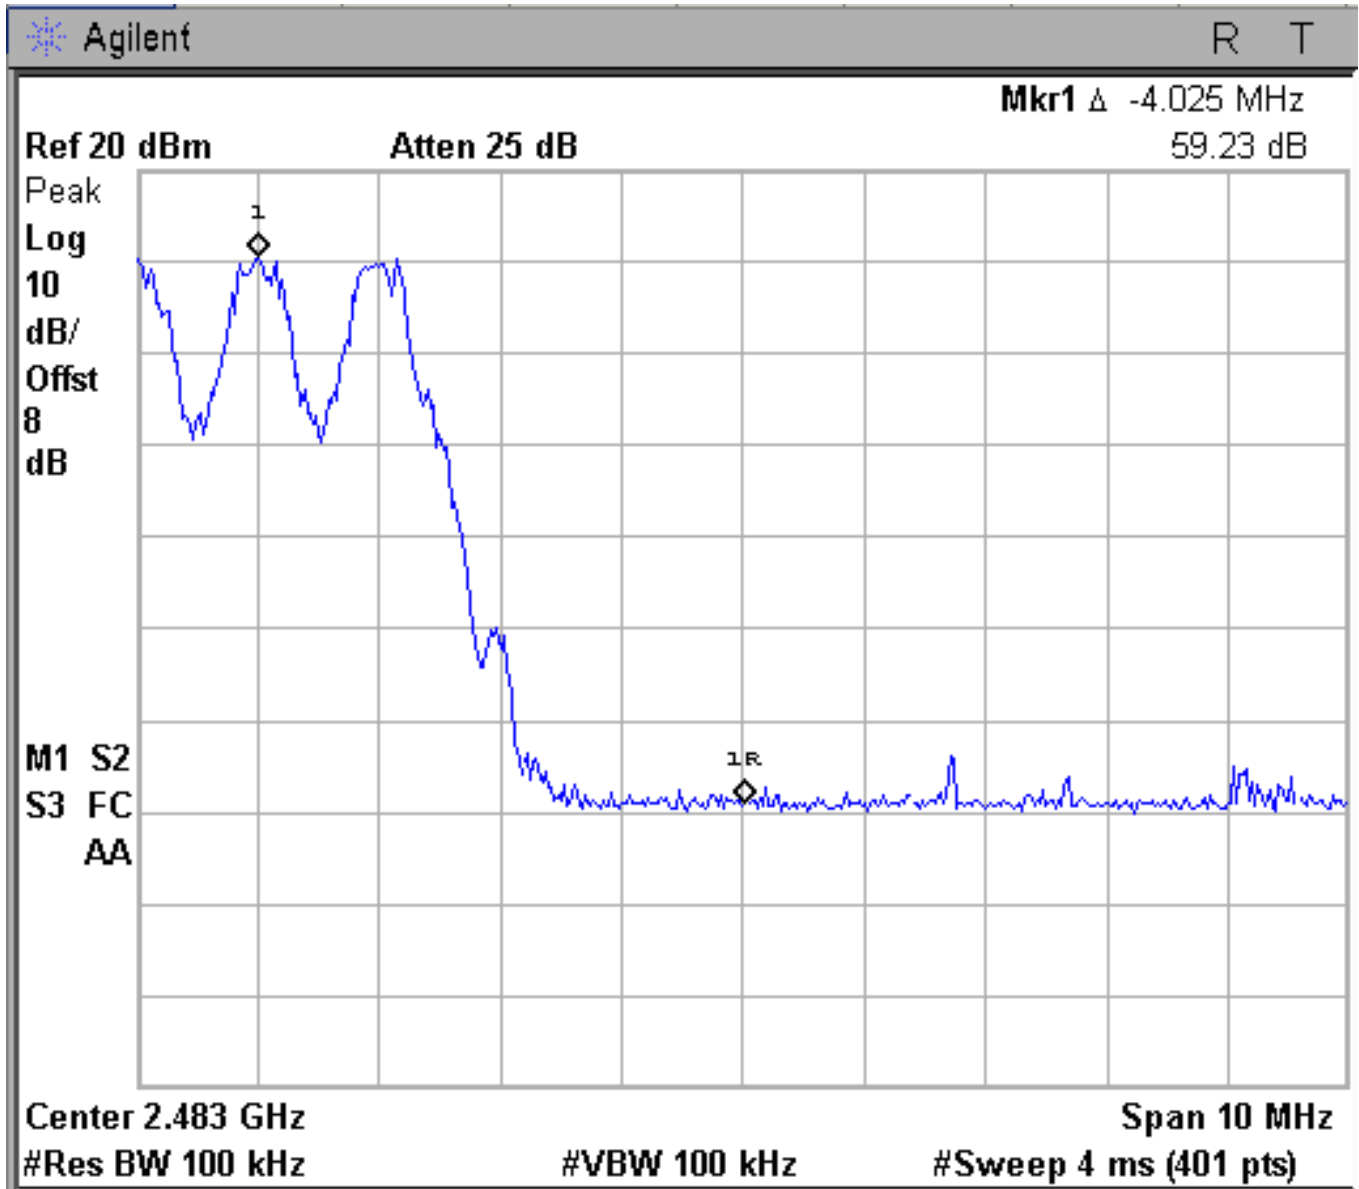


Figure 6d.6-4: Plot of upper band-edge conducted emissions with hopping enabled (GFSK Modulation).

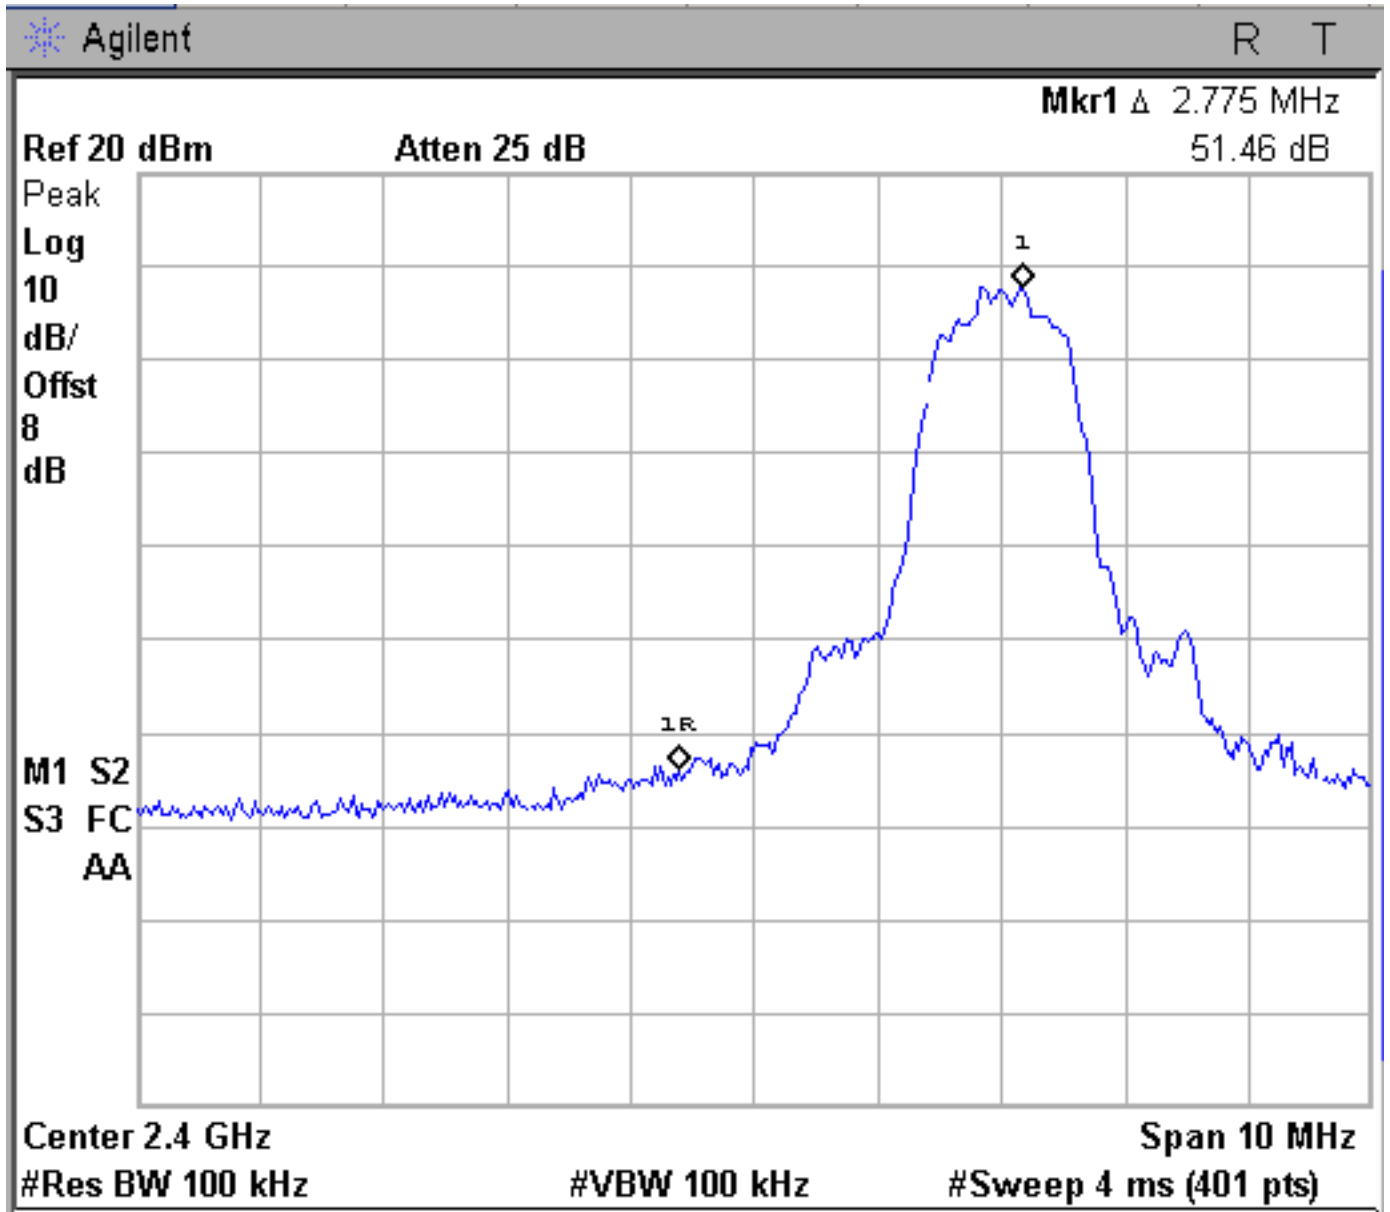


Figure 6d.6-5: Plot of lower band-edge conducted emissions with hopping disabled (Pi/4 DPSK Modulation).

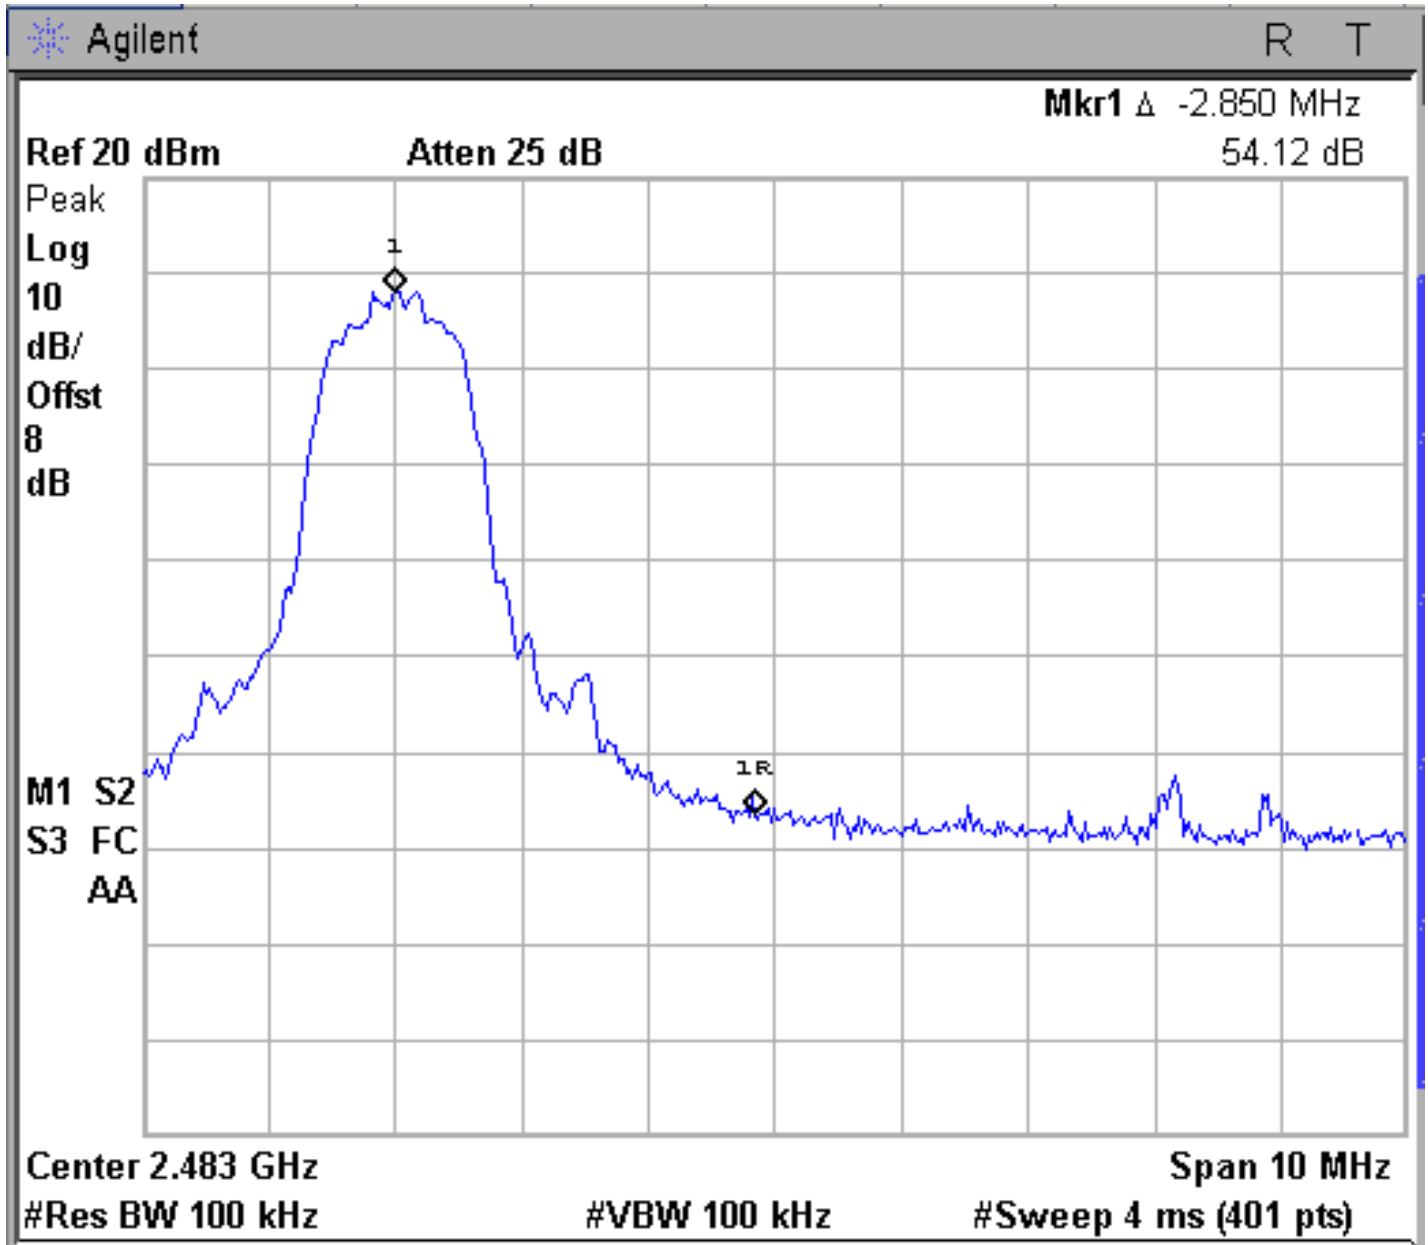


Figure 6d.6-6: Plot of upper band-edge conducted emissions with hopping disabled (Pi/4 DPSK Modulation).

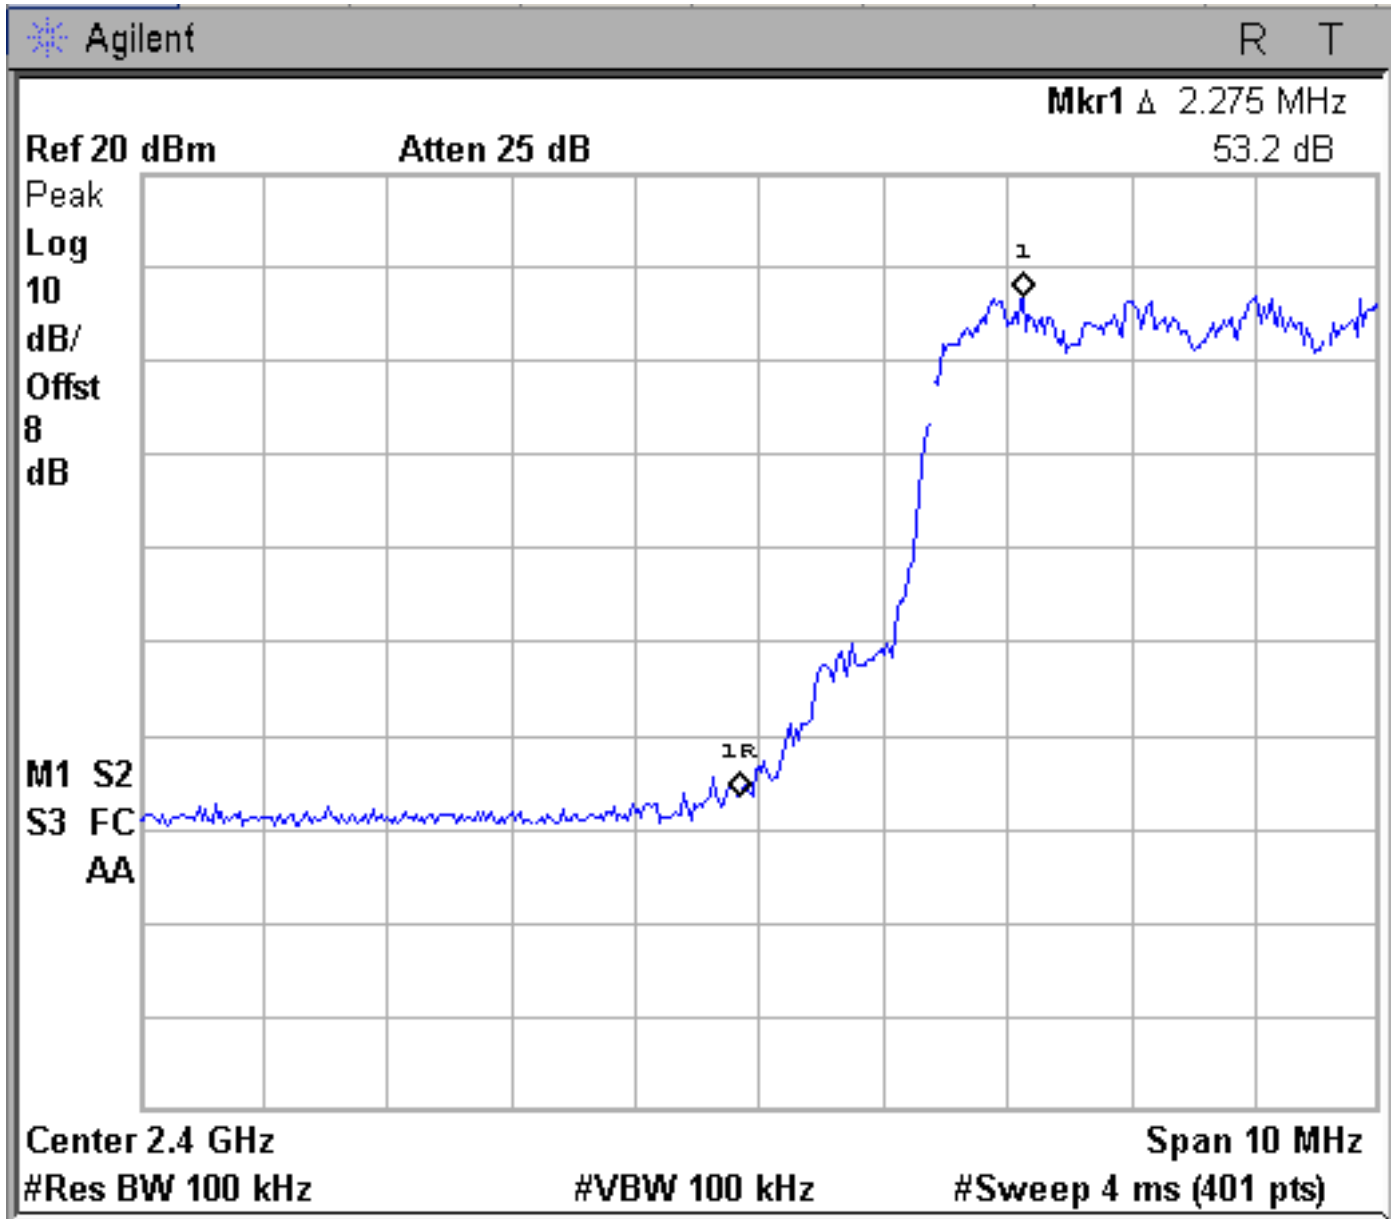


Figure 6d.6-7: Plot of lower band-edge conducted emissions with hopping enabled (Pi/4 DPSK Modulation).

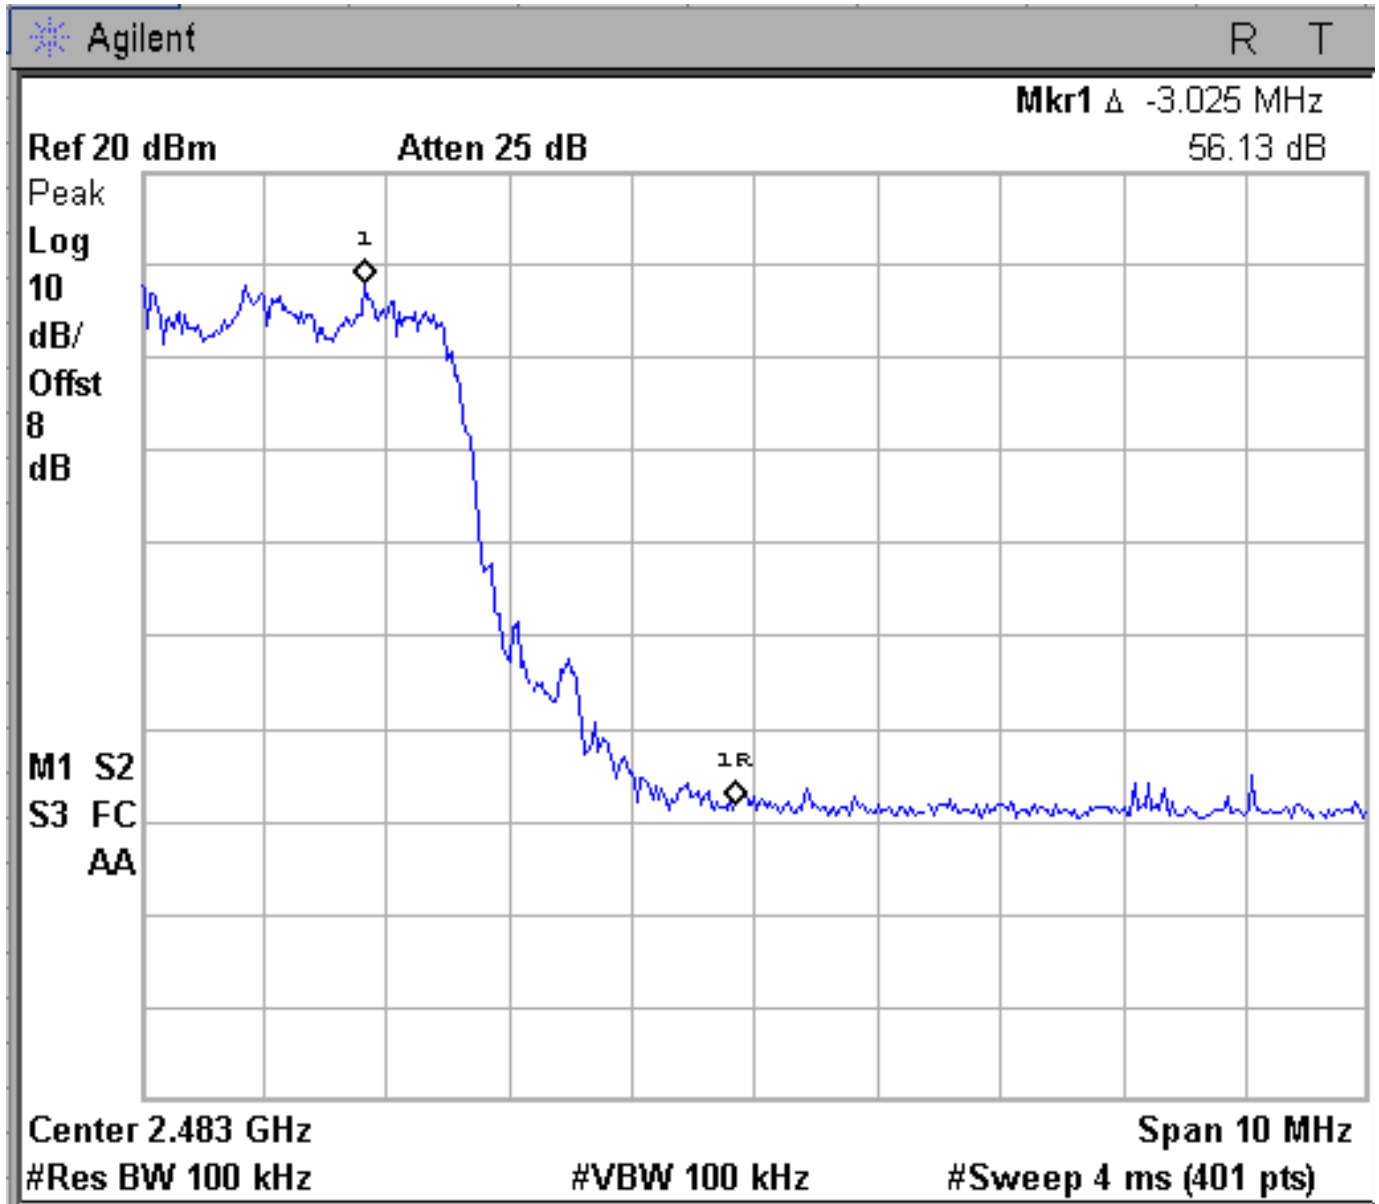


Figure 6d.6-8: Plot of upper band-edge conducted emissions with hopping enabled (Pi/4 DPSK Modulation).

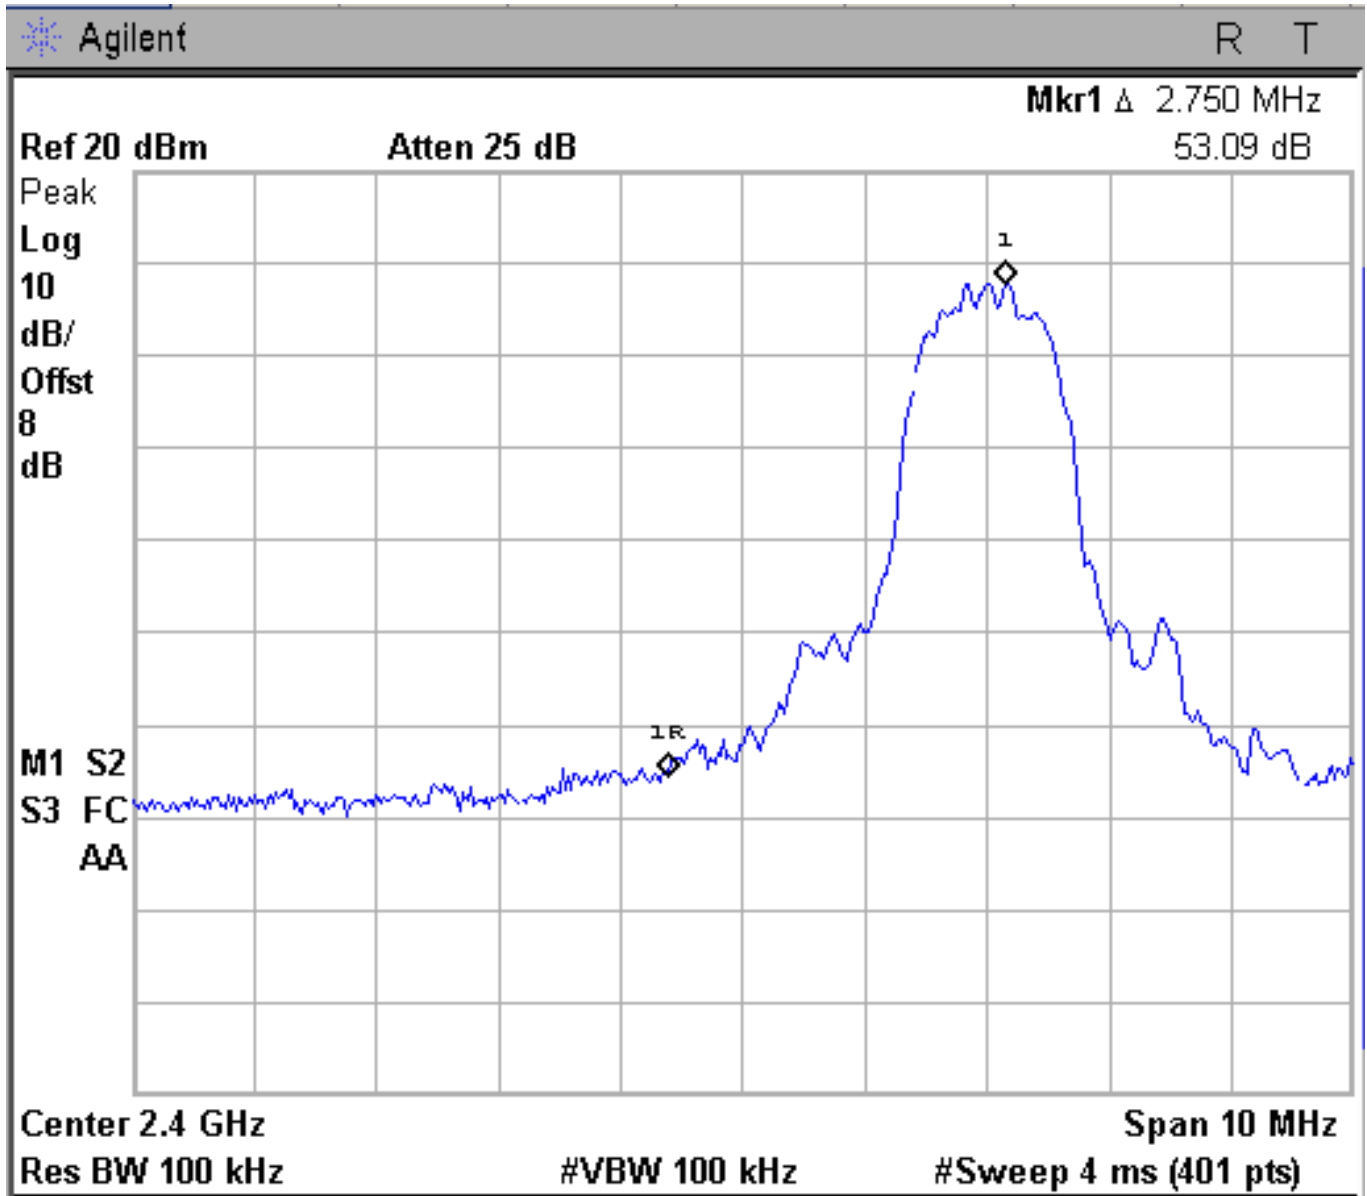


Figure 6d.6-9: Plot of lower band-edge conducted emissions with hopping disabled (8 DPSK Modulation).

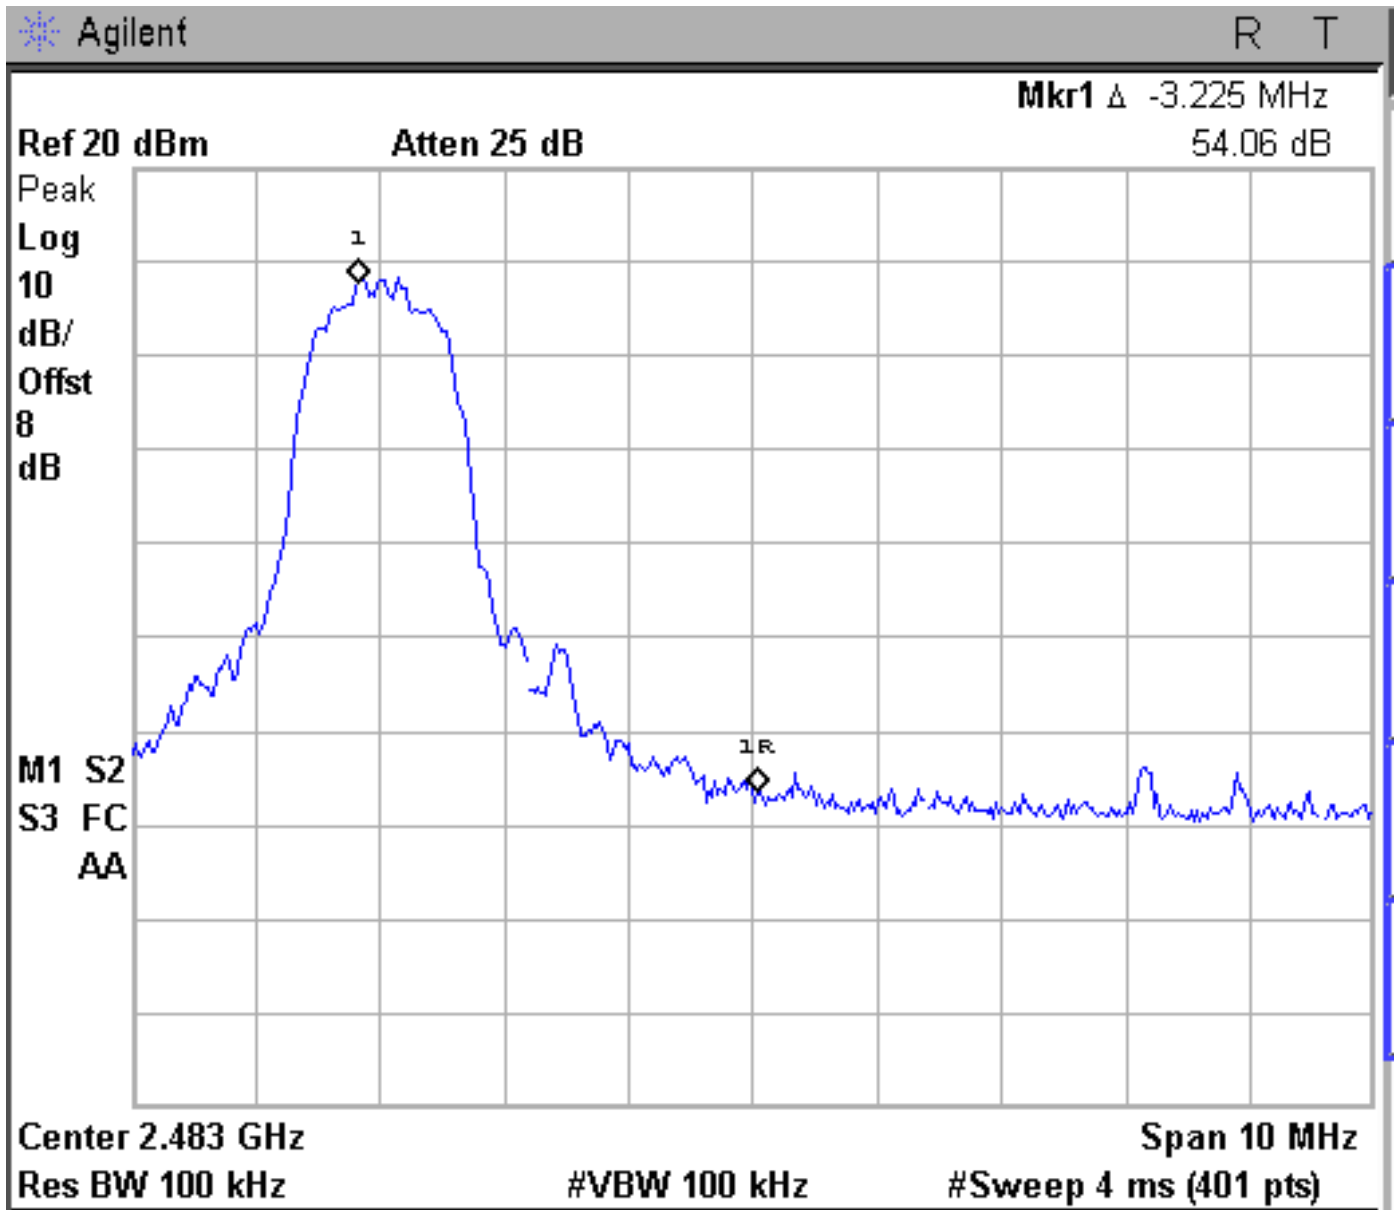


Figure 6d.6-10: Plot of upper band-edge conducted emissions with hopping disabled (8 DPSK Modulation).

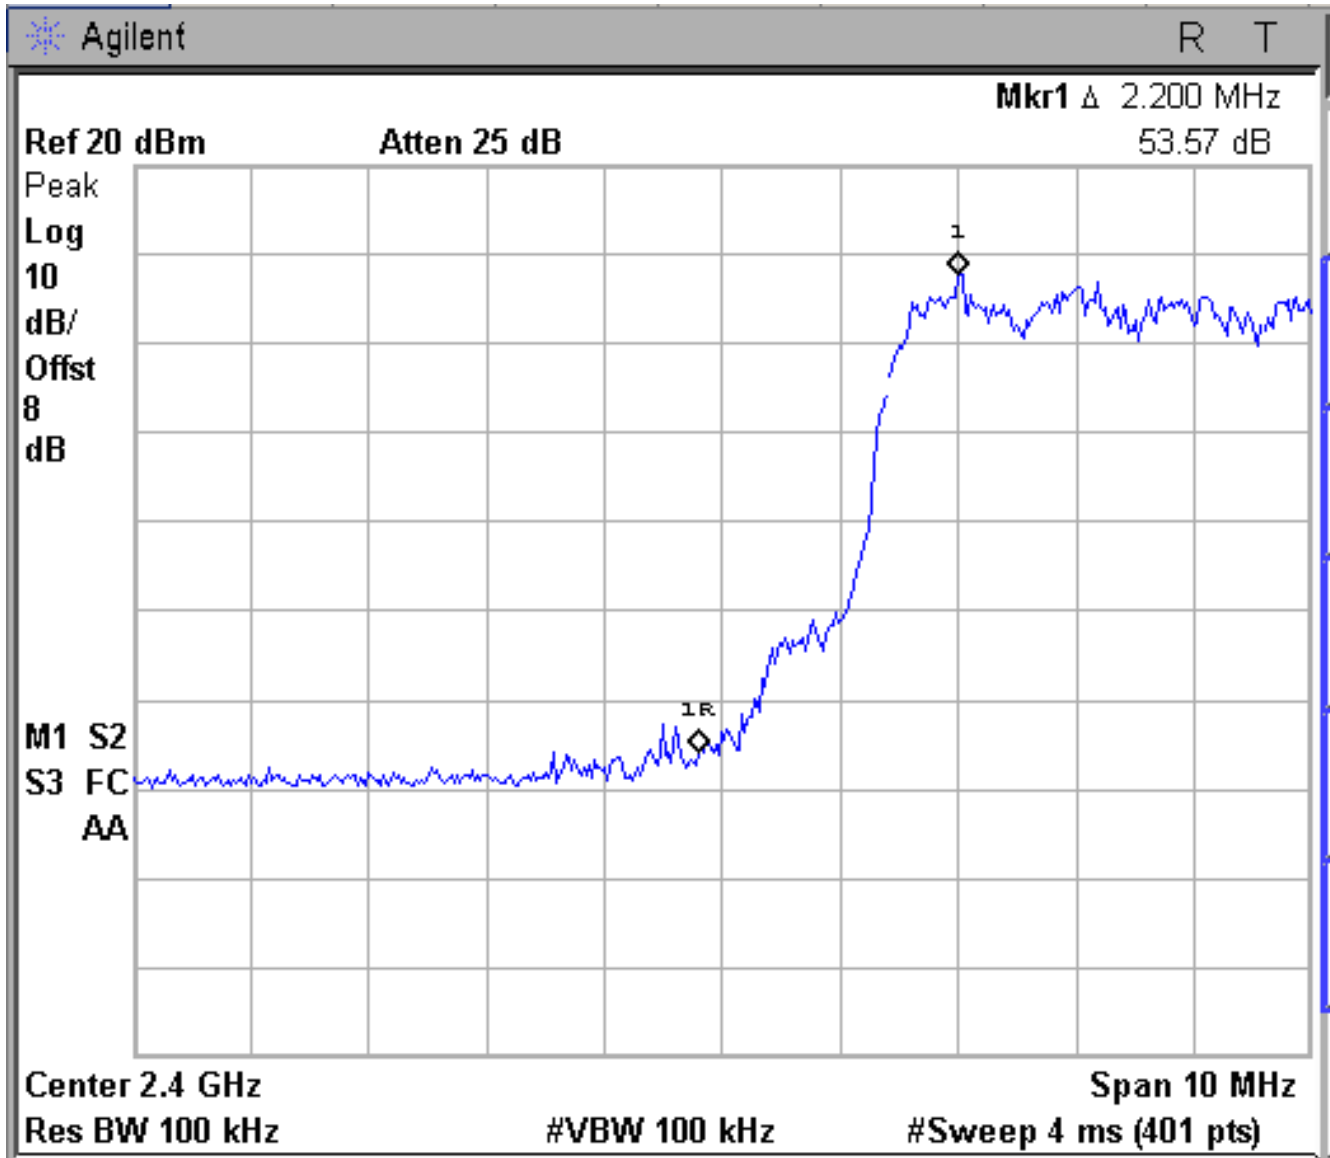


Figure 6d.6-11: Plot of lower band-edge conducted emissions with hopping enabled (8 DPSK Modulation).


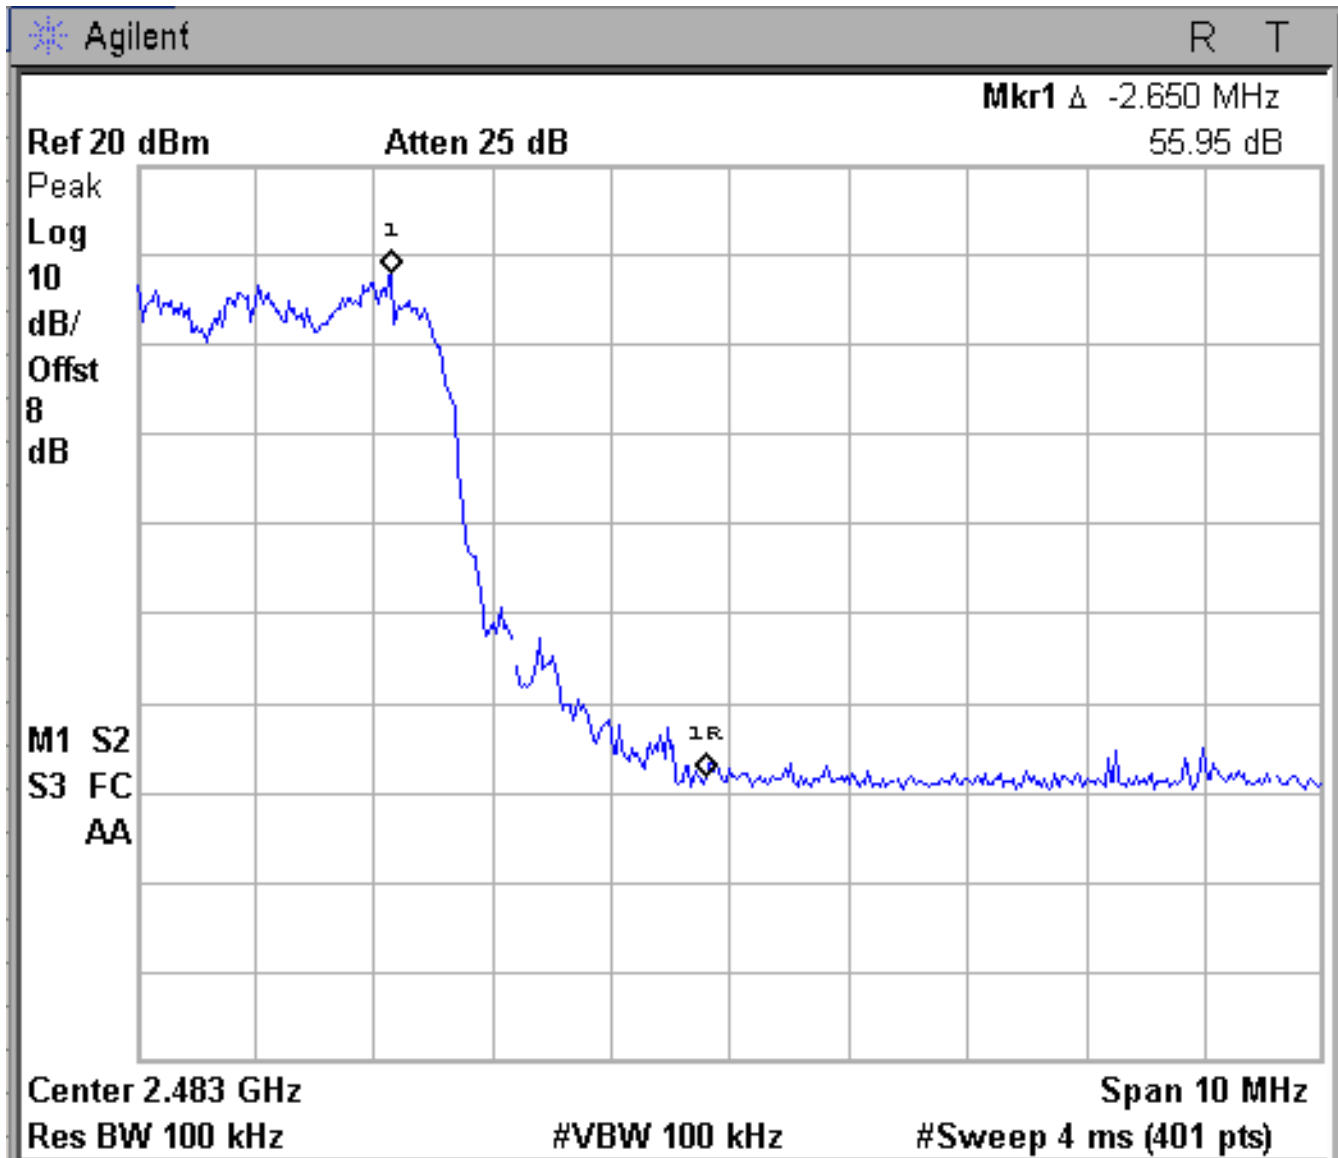


Figure 6d.6-12: Plot of upper band-edge conducted emissions with hopping enabled (8 DPSK Modulation).

**6d.8. Spurious RF Conducted Emissions – Pursuant 47 CFR 15.247(d); RSS-210 A8.5.**

Criterion: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The emissions are below 30 dBc at the second harmonic of the transmit frequency and far lower at all other frequencies.

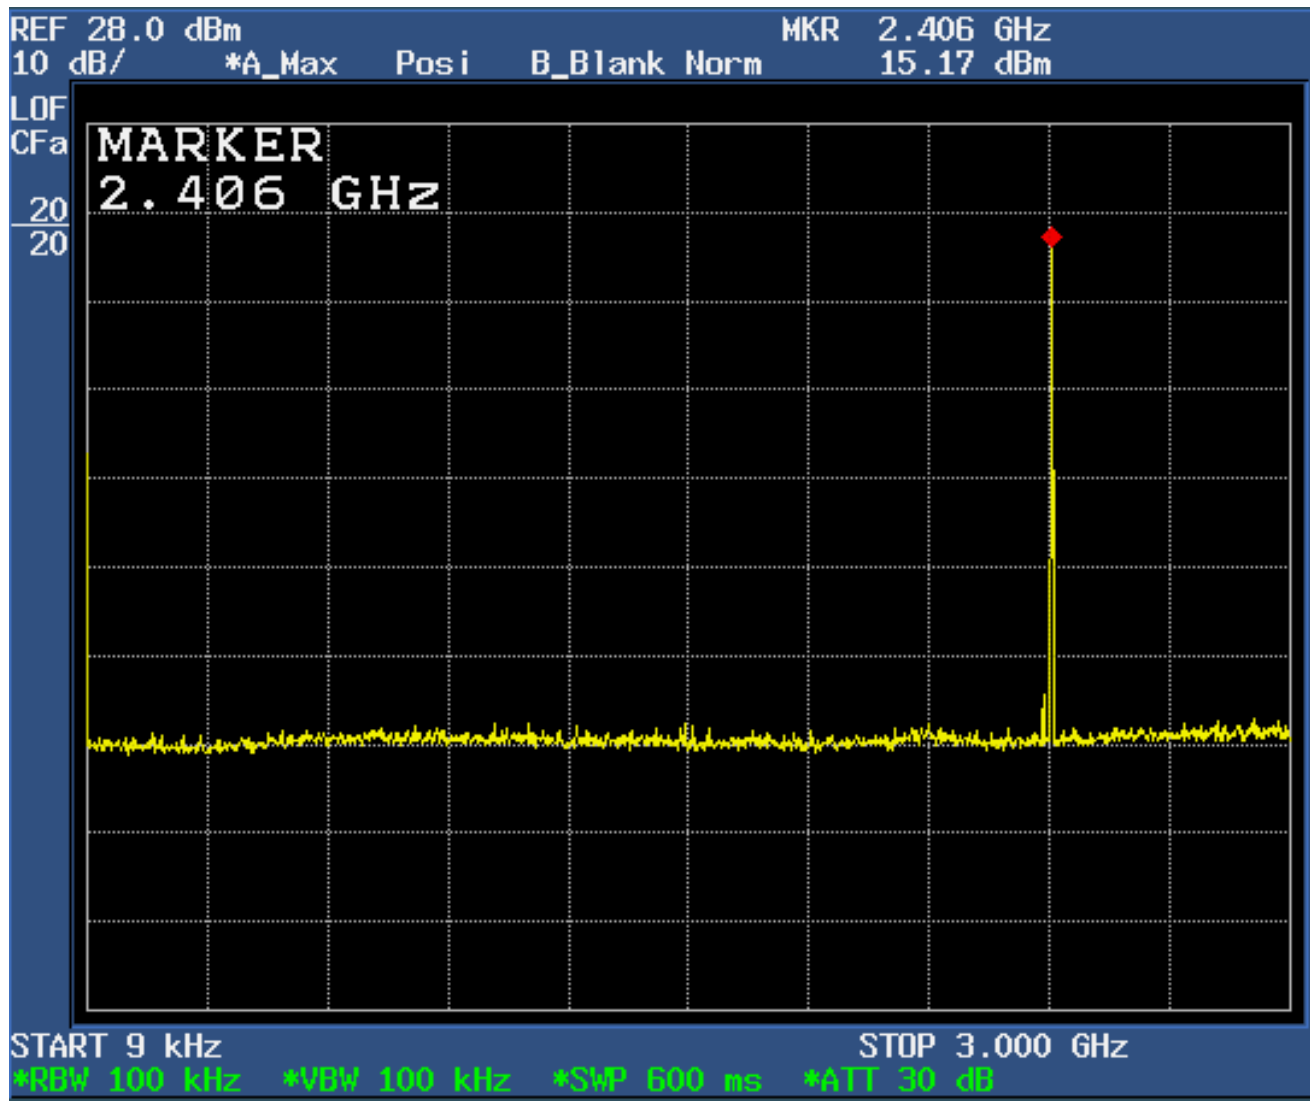

**Figure 6d.7-1: Plot of spurious conducted emissions Plot of spurious conducted emissions 9 kHz – 3.0 GHz (Low Channel Enabled).**



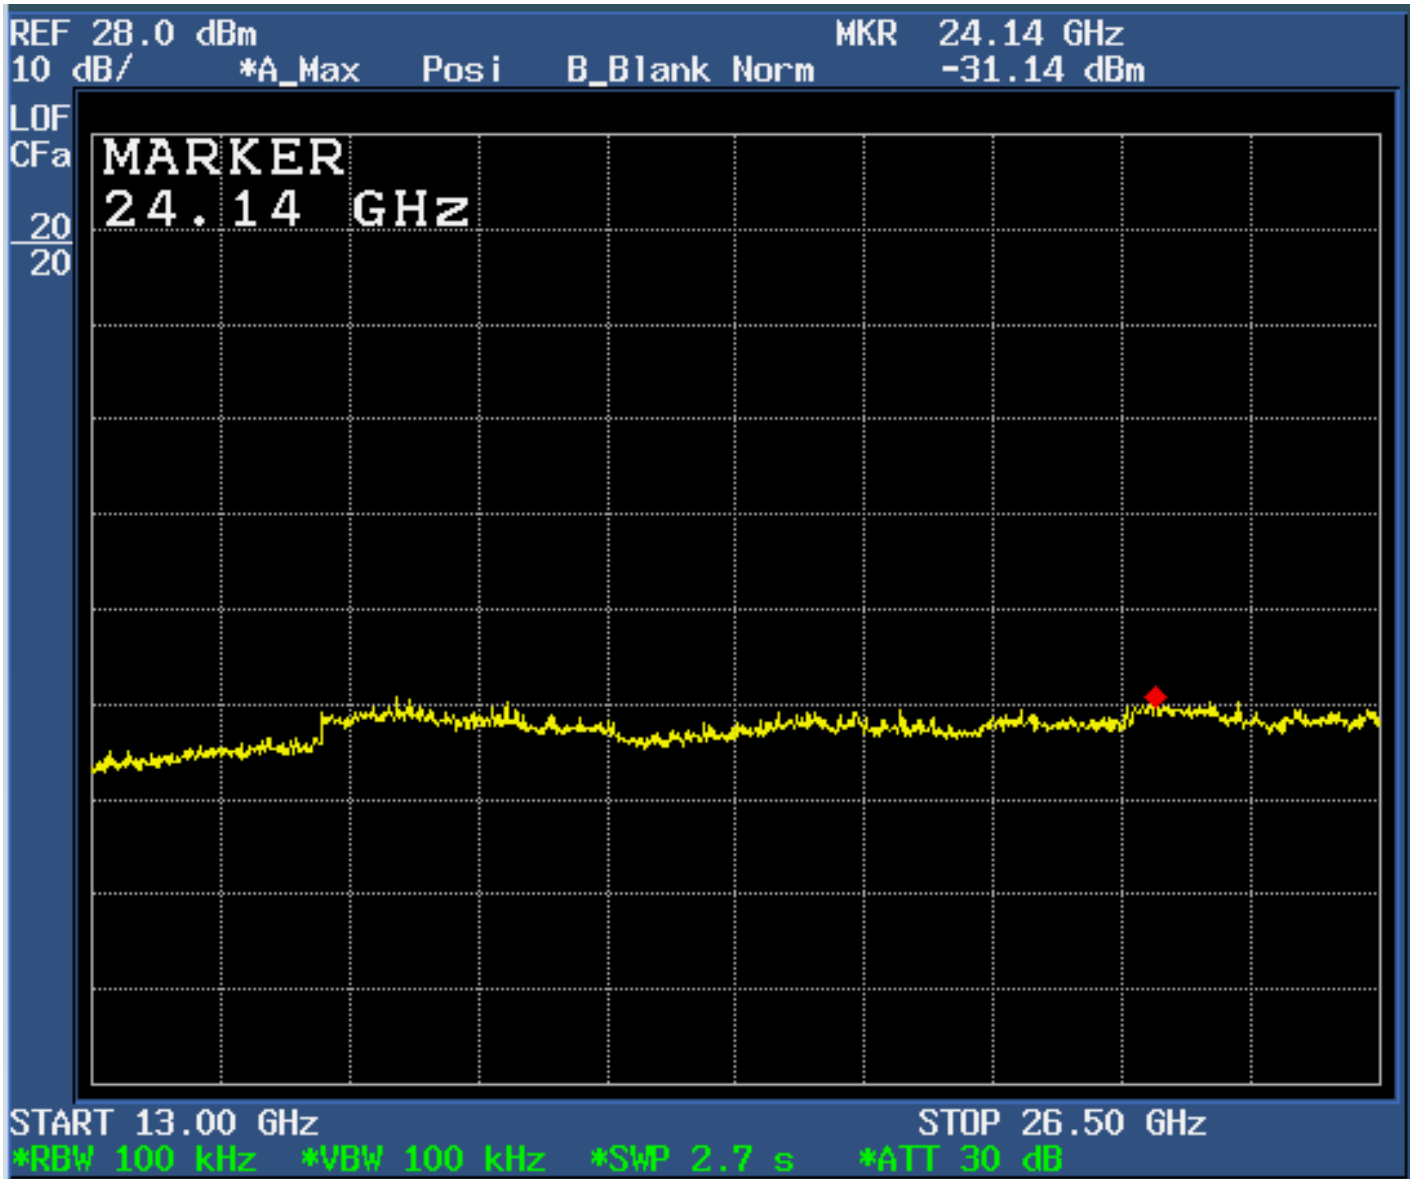


Figure 6d.7-3: Plot of spurious conducted emissions 13 GHz – 26.5 GHz (Low Channel Enabled).

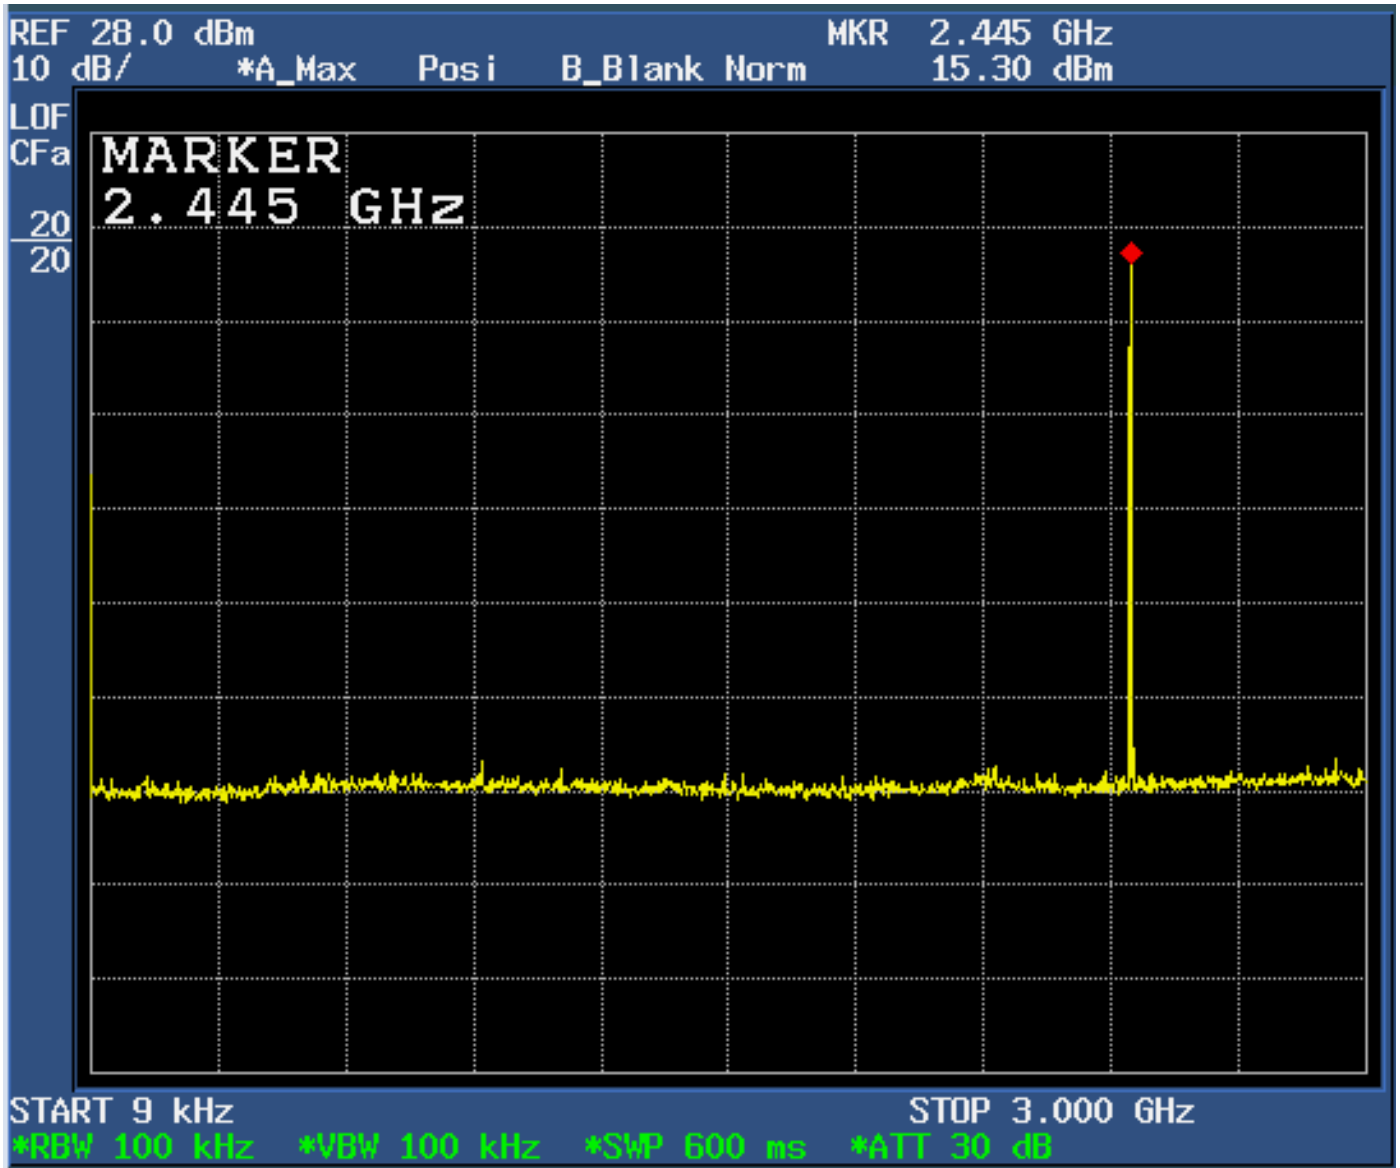


Figure 6d.7-4: Plot of spurious conducted emissions Plot of spurious conducted emissions 9 kHz – 3.0 GHz (Mid Channel Enabled).



Figure 6d.7-5: Plot of spurious conducted emissions 3 GHz – 13 GHz (Mid Channel Enabled).

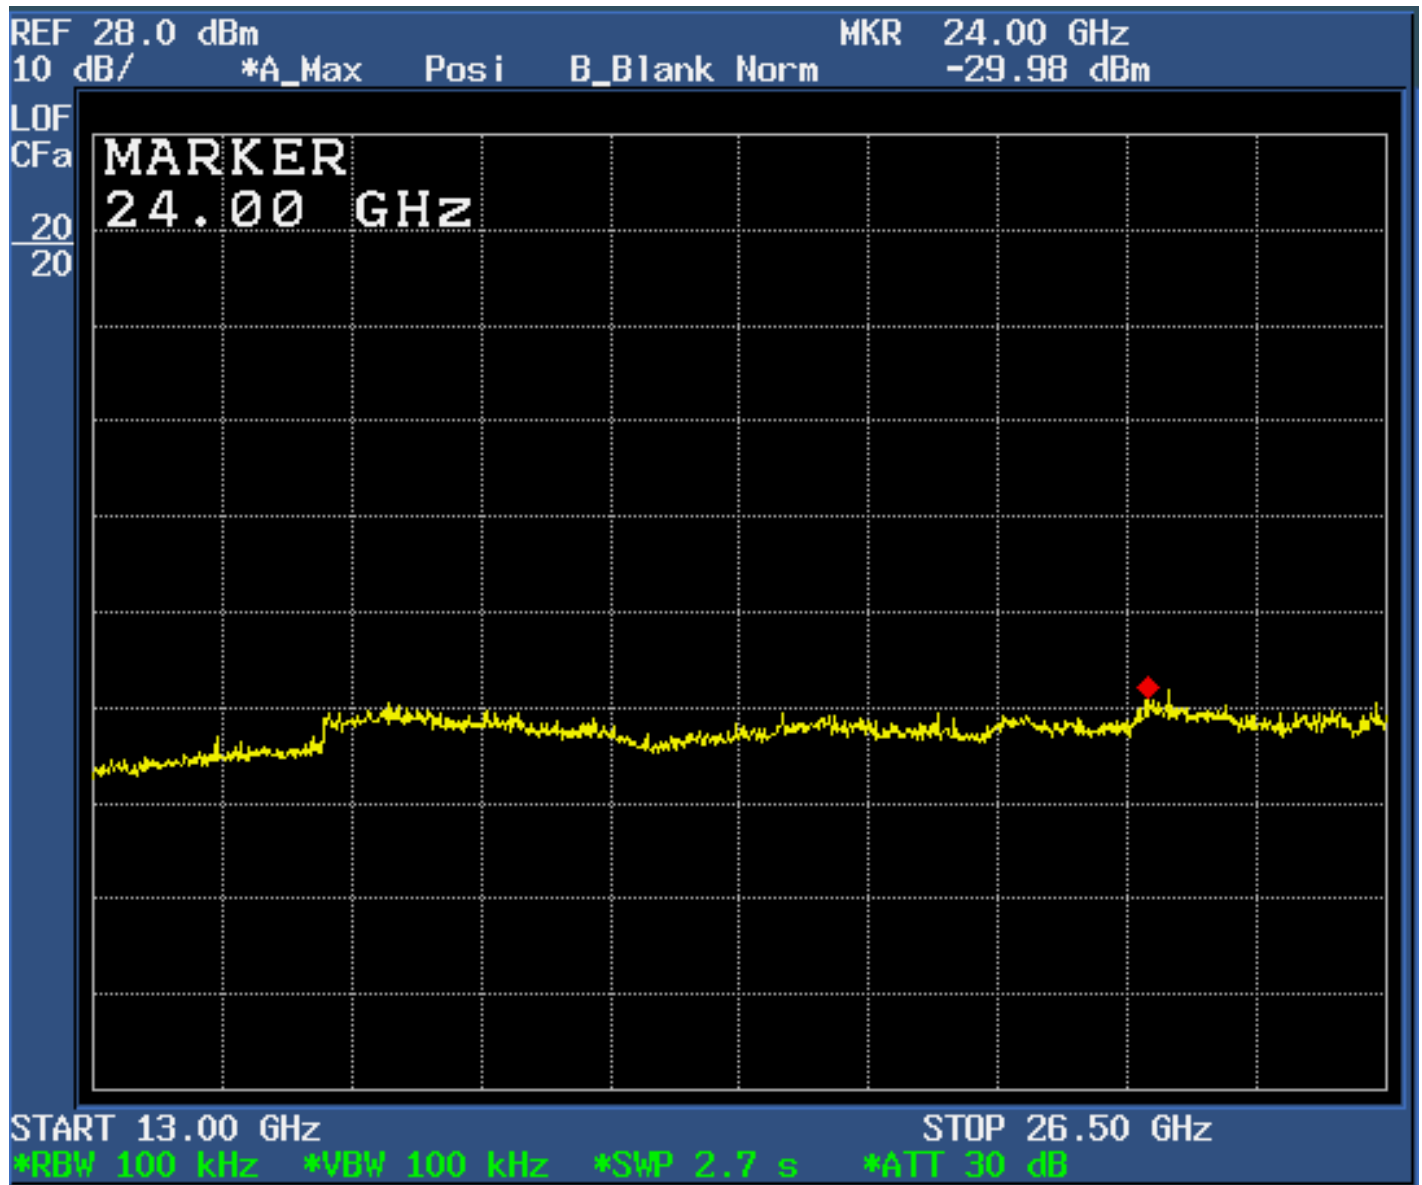


Figure 6d.7-6: Plot of spurious conducted emissions 13 GHz – 26.5 GHz (Mid Channel Enabled).


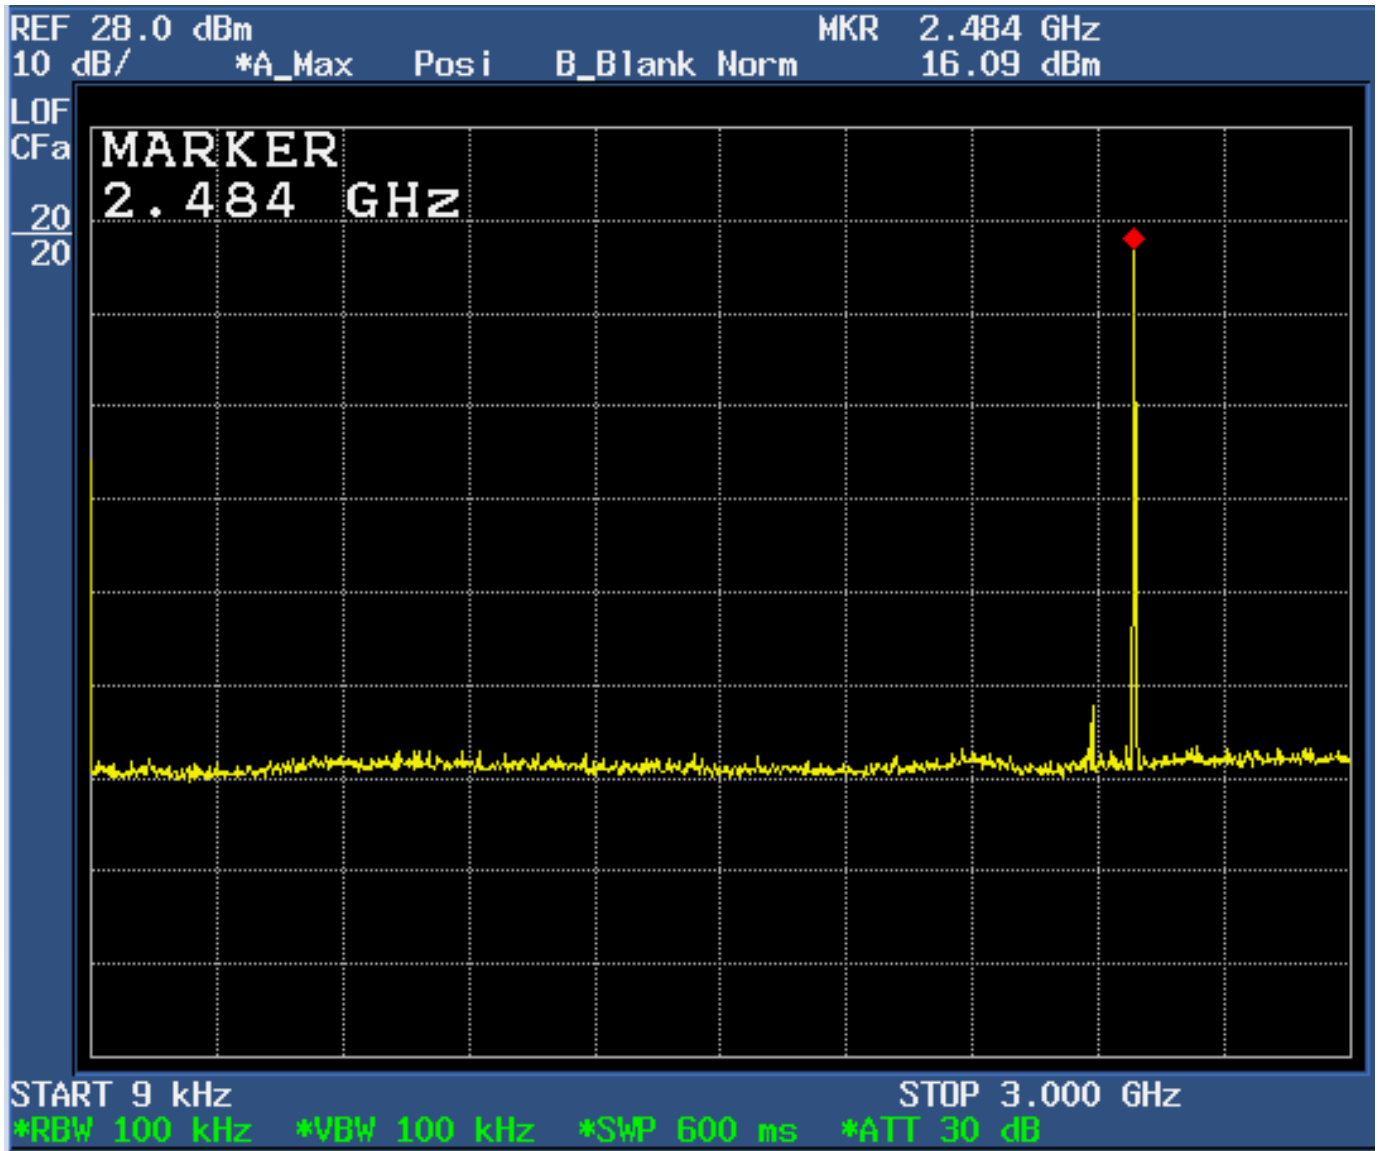


Figure 6d.7-7: Plot of spurious conducted emissions 9 kHz – 3.0 GHz (High Channel Enabled).

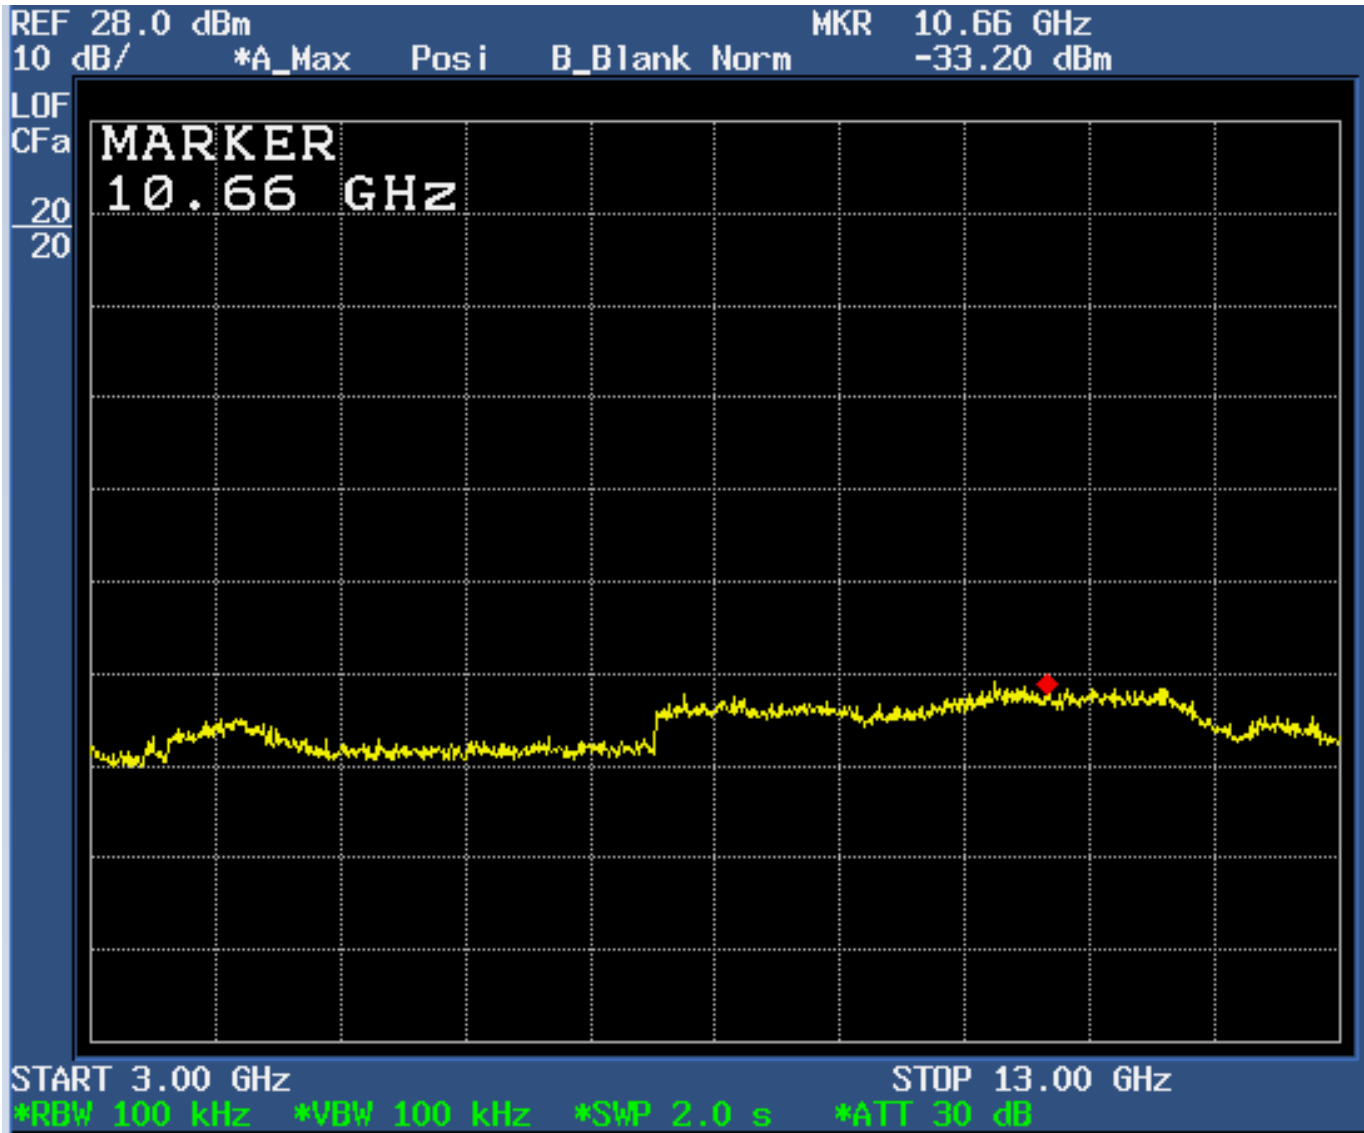

**Figure 6d.7-8: Plot of spurious conducted emissions 3 GHz – 13 GHz (High Channel Enabled).**



Figure 6d.7-9: Plot of spurious conducted emissions 13 GHz – 26.5 GHz (High Channel Enabled).

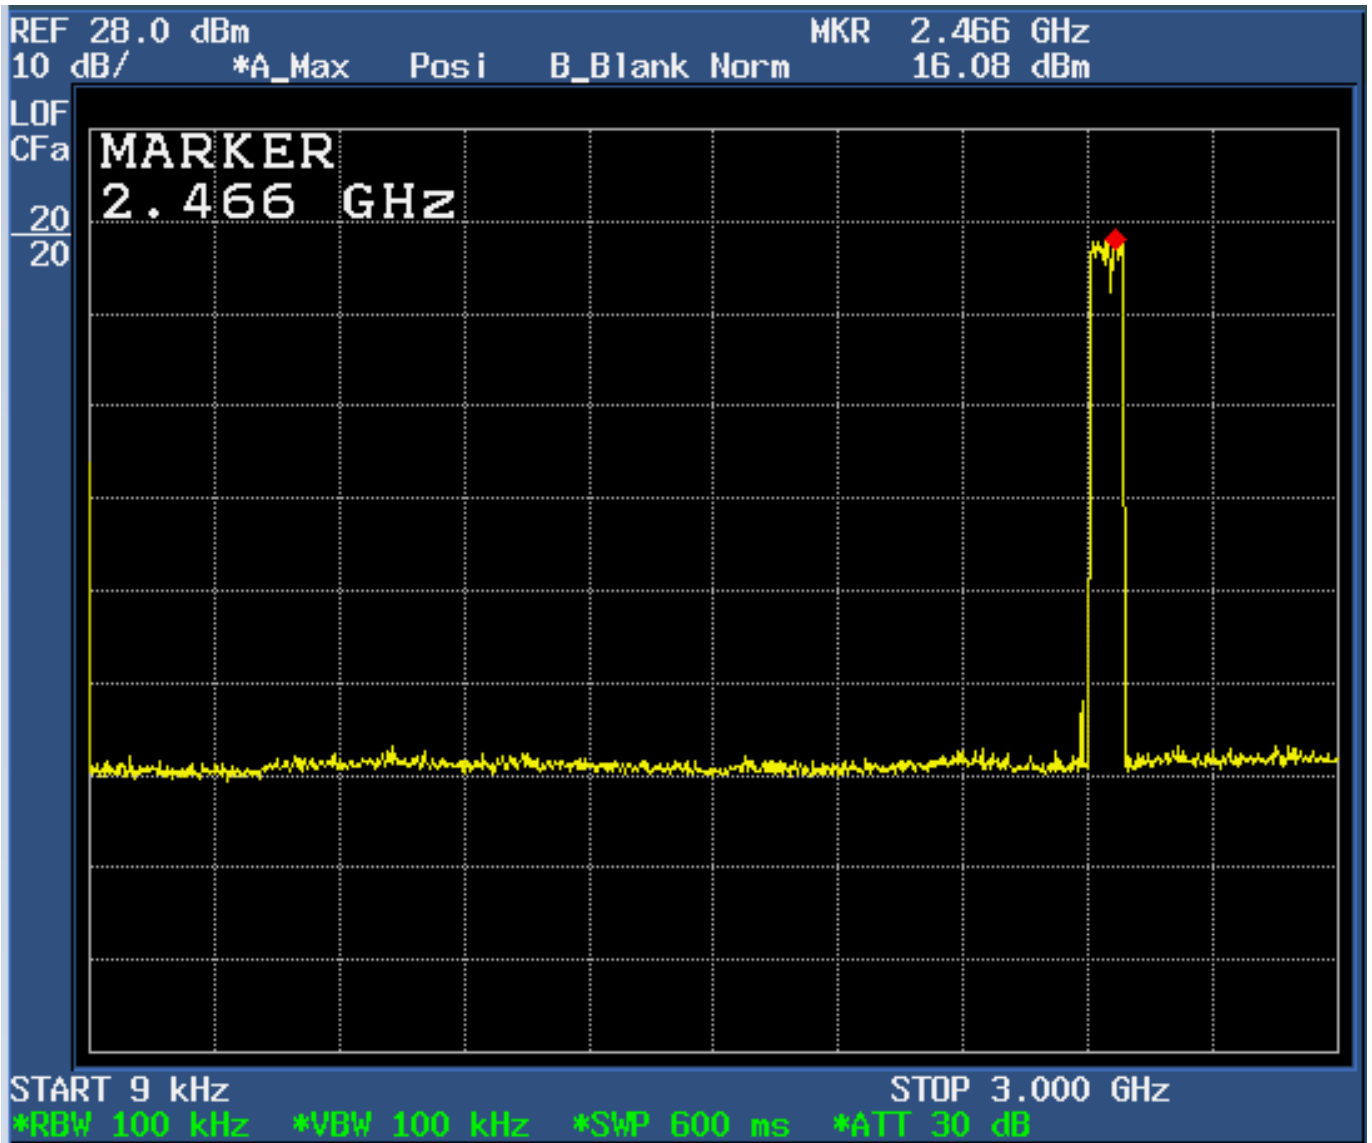


Figure 6d.7-10: Plot of spurious conducted emissions 9 kHz – 3.0 GHz (Hopping Enabled).

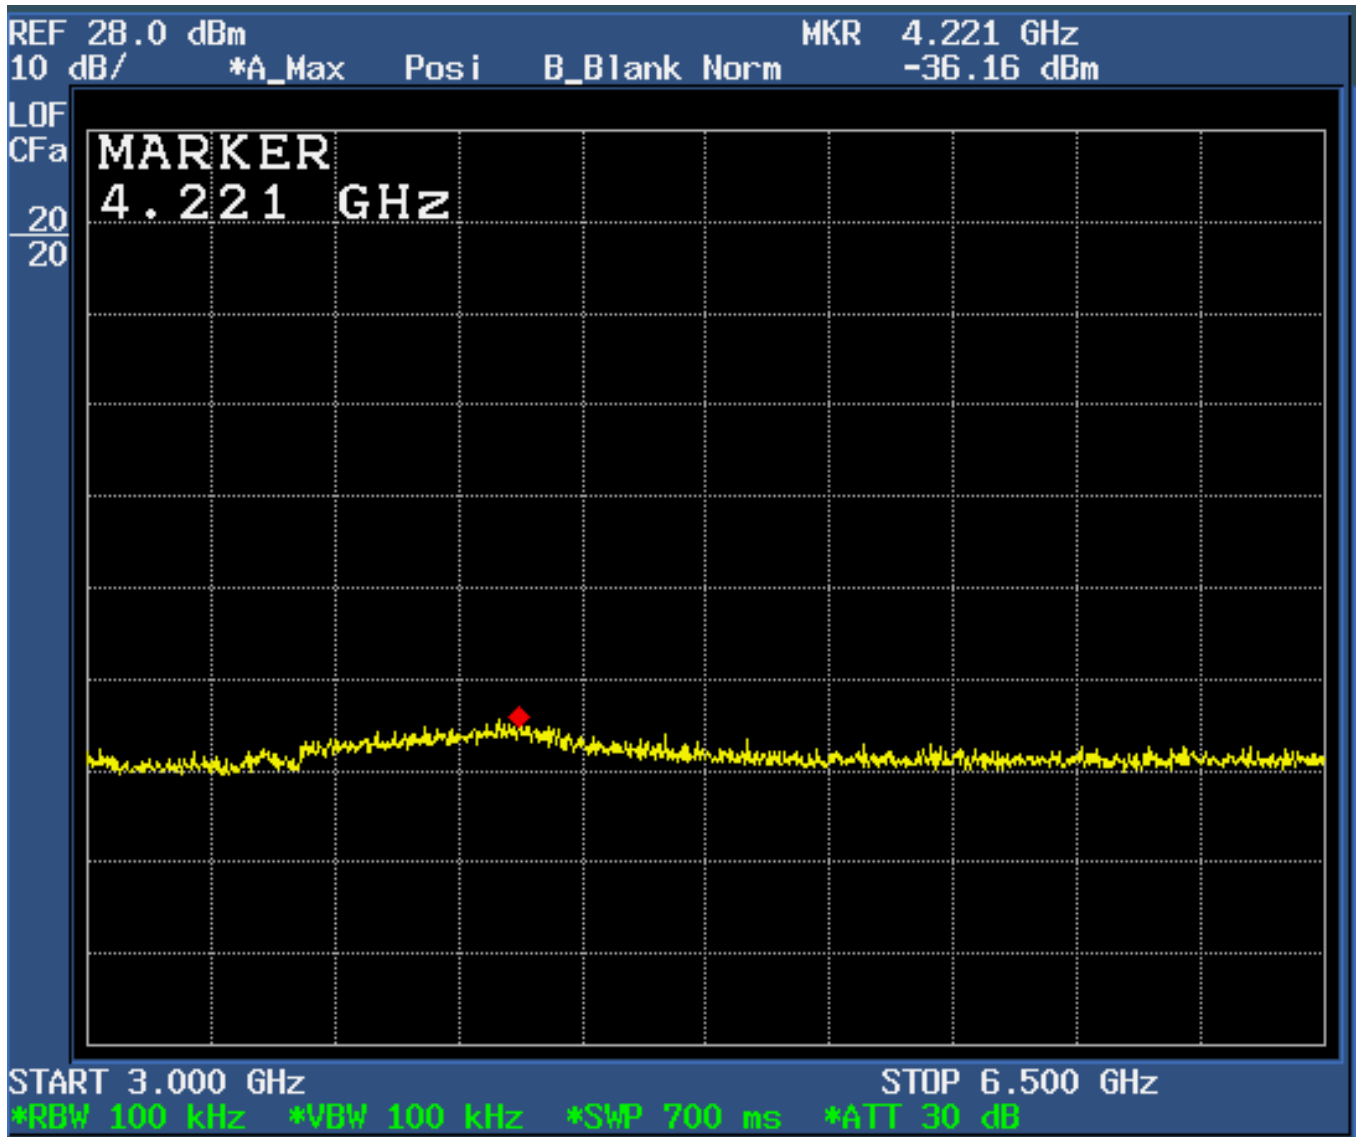


Figure 6d.7-11: Plot of spurious conducted emissions 3 GHz – 6.5 GHz (Hopping Enabled).

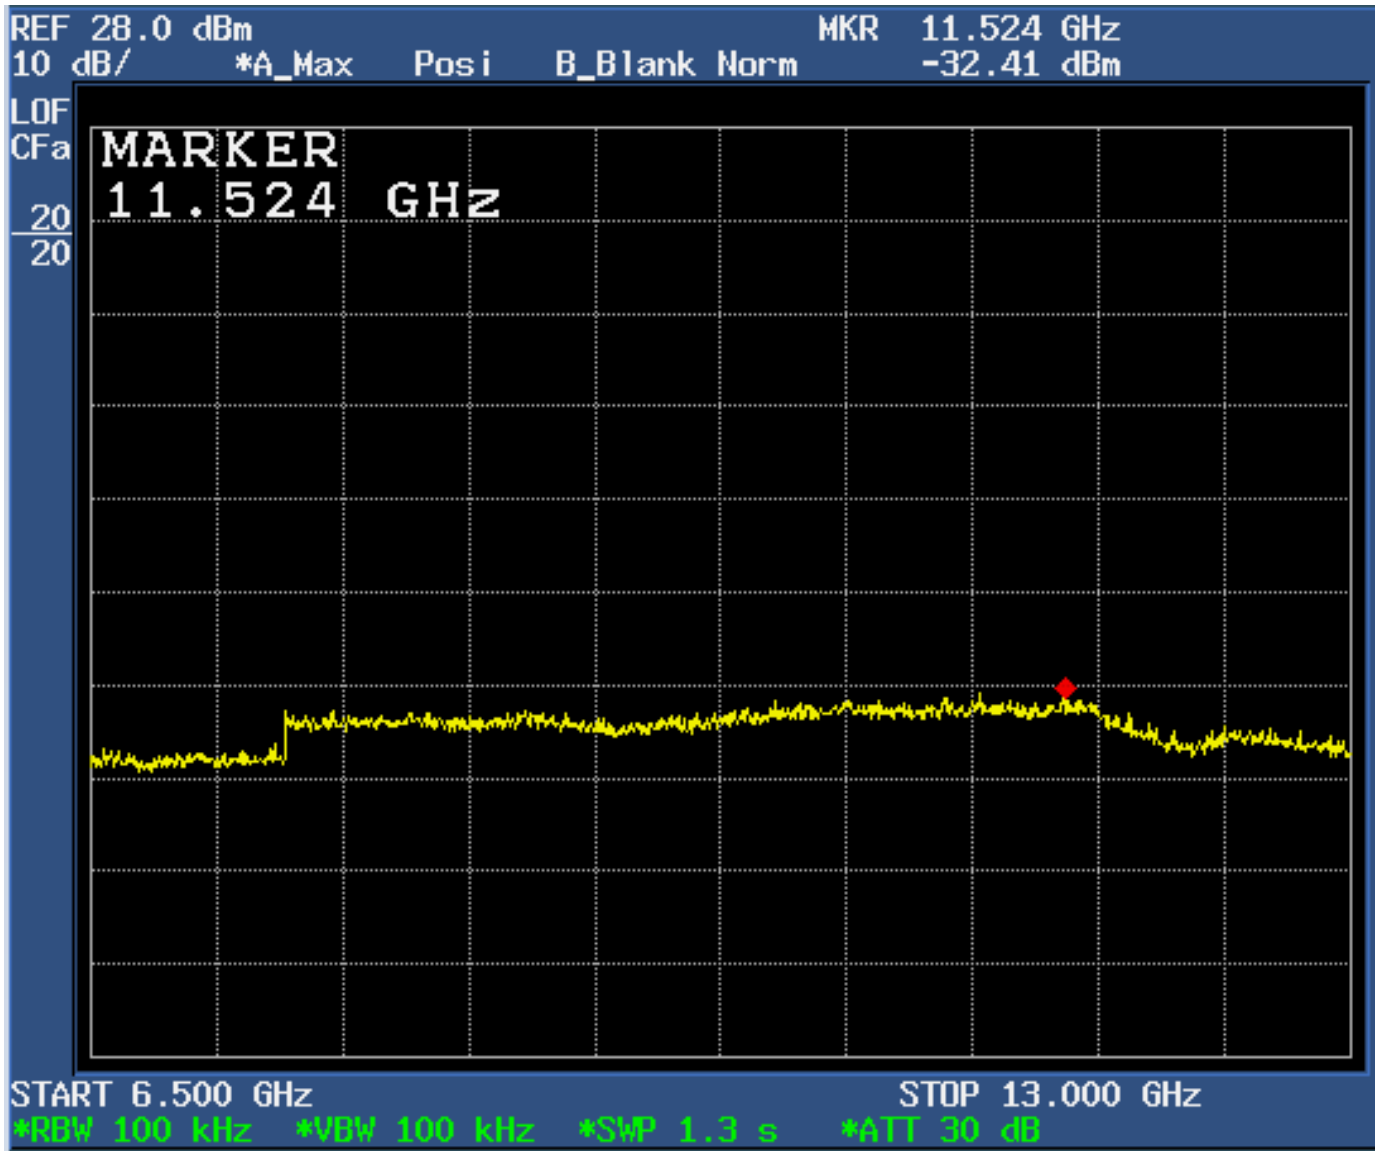


Figure 6d.7-12: Plot of spurious conducted emissions 6.5 GHz – 13.0 GHz (Hopping Enabled).

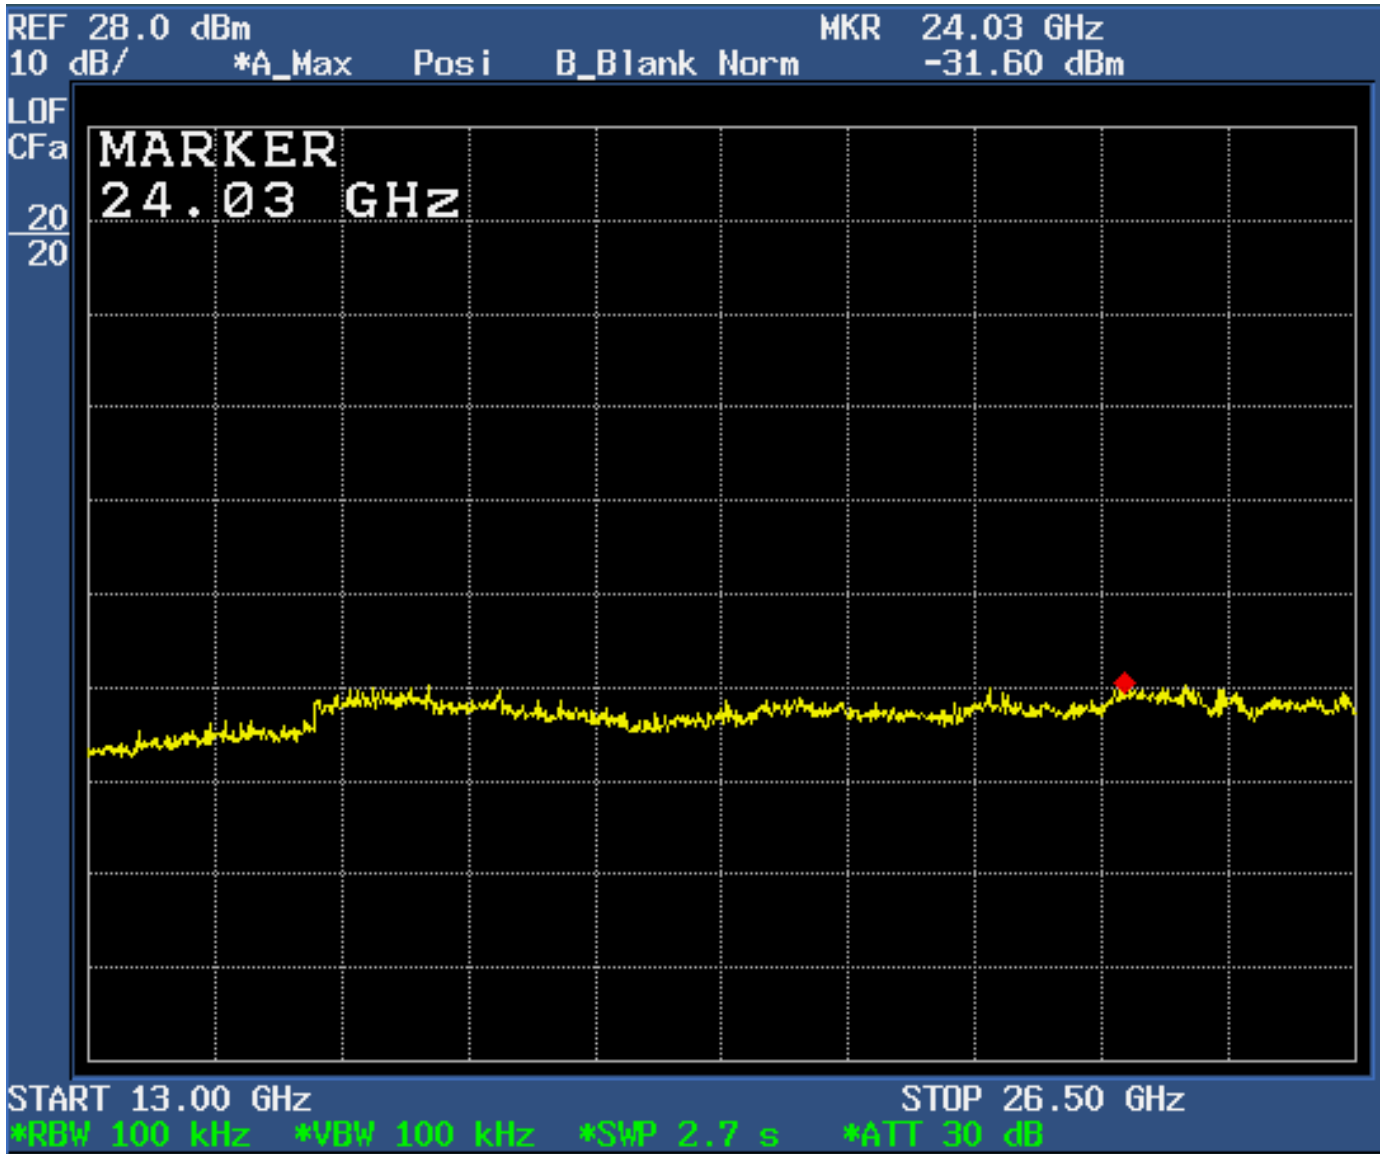


Figure 6d.7-13: Plot of spurious conducted emissions 13 GHz – 26.5 GHz (Hopping Enabled).