



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 25143-1JBP

Report Date – August 31, 2012

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Albert J. Patapack

Title: EMC Engineer

Date: August 31, 2012

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY UKAS OR ANY AGENCY OF THE U.S. GOVERNMENT.



2404

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Equipment List	5
Measurement Procedures and Data	6

Test Report Details

Tests Performed By: ADR Testing Service
Location Code: ADR LV
Motorola Mobility LLC
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
FCC Registration Number: 316588
Industry Canada Number: 1090-1

Tests Requested By: Motorola Mobility LLC
600 North US Hwy 45
Libertyville, IL 60048

Signaling Capability: WCDMA 850/1900, GSM 850/1900,
EDGE 850/1900, HSDPA, HSUPA, GPRS,
Bluetooth LE + EDR, 802.11a/b/g/n

FCC ID: IHDT56NS4

Serial Numbers: KSRC060006

Testing Complete Date: August 21, 2012

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47:

 X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003, RSS-210 Issue 8

Summary of Testing

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

This product utilizes an internal battery that is not removable. When applicable, EMC testing was performed with the internal battery fully charged.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

Equipment and Cable Configurations

The EUT was tested in a configuration as specified by ANSI C63.4 2003 Standard requirements.

Equipment List

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde & Schwarz	Receiver	ESI40	100226	5/15/2013
A. H. Systems	DRG Horn Antenna	SAS 200/571	365	8/24/2012
ETS	Log-Periodic Antenna	3148	1188	12/12/2012
ETS	Biconical Antenna	3110B	3369	12/14/2012
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
ETS	LISN	3810/2NM	00023630	9/02/2012
ETS	LISN	3810/2NM	2179	9/02/2012
ETS	Loop Antenna	6507	00049471	12/13/2012
Hewlett Packard	Laptop Computer	8440P	CND04111C8	NA
Hewlett Packard	Monitor	HP2311X	CNT101X68Q	NA
Dell	Mouse	M-UVDEL1	HCJ43516737	NA

All equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

The HP 8440P Laptop Computer, HP Monitor and the Dell Mouse are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. Initially, for all radiated emissions, the antenna mast is varied from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer using the peak detector function. Below 1000MHz, the final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector. The receiver used has an average detector function and an RMS detector function. The average detector function is used for final radiated emissions measurements above 1000MHz. Above 1000MHz, the EMI receiver VBW and RBW are both set to 1MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The test is performed with the EUT connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. Two additional peripherals, a USB mouse and a VGA monitor, are also connected to the laptop computer through the appropriate port. The EUT was communicating with the laptop computer continuously.

Additional EUT information:

Processor Speed – Up to 1.5GHz

Xtal – 27MHz, 48MHz

TCXO – 19.2MHz

Memory Size – 1GB LPDDR, 8GB eMMC

Video Resolution – 540x960(qHD)

Video Clock: Max 230MHz

Refresh rate – 60Hz

Testing was conducted up to and including 8GHz.

Measurement Results

Radiated emissions were measured from 9 kHz to 30 MHz and all emissions were 20 dB below the limit.

Operating Mode – Rx Mode, Data Transfer Mode.

Notes: Worst Case emissions reported.

30 MHz – 1000 MHz

Frequency MHz	Level dBµV/m	Measured dBµV	Transd dB	Cables dB	Limit dBµV/m	Margin dB	Height cm	Angle deg	Pol.
31.44	35.69	16.42	12.5	6.8	40	4.3	102	173	VERT
37.64	34.20	16.35	11	6.9	40	5.8	101	84	VERT
57.28	35.67	19.12	9.4	7.1	40	4.3	100	227	VERT
70.96	28.31	12.66	8.4	7.2	40	11.7	133	27	VERT
97.80	32.83	15.14	10.2	7.5	43.5	10.7	98	344	VERT
144.72	37.41	17.16	12.5	7.8	43.5	6.1	151	146	HORI
279.68	33.95	12.16	13.2	8.6	46	12	99	146	HORI
355.16	35.70	12.14	14.6	9.0	46	10.3	99	35	HORI
422.40	42.83	17.43	16.2	9.2	46	3.2	100	356	HORI
932.00	33.64	-1.27	23.9	11.0	46	12.4	100	349	HORI

Average Measurements Above 1 GHz

Frequency MHz	Level dBμV/m	Measured dBμV	Transd dB	Gain dB	Limit dBμV/m	Margin dB	Height cm	Angle deg	Pol.
1123.6	31.73	34.68	23.9	26.8	54	22.3	129	165	VERT
1203.2	31.71	34.06	24.3	26.7	54	22.3	120	146	HORI
1345.6	31.21	32.89	24.6	26.3	54	22.8	118	199	VERT
1598.9	33.25	33.57	25.4	25.7	54	20.8	118	0	VERT
1689.6	32.31	32.14	25.6	25.5	54	21.7	342	153	HORI
2504.4	36.35	30.53	29.6	23.8	54	17.6	365	103	HORI
3158.7	38.60	30.05	31.7	23.1	54	15.4	139	241	VERT
3328.1	38.12	29.72	31.2	22.8	54	15.9	120	57	VERT
3973.6	39.09	28.16	32.2	21.3	54	14.9	346	299	HORI
5254.3	41.30	27.11	33.9	19.7	54	12.7	100	167	HORI
6676.6	43.60	26.00	36.3	18.7	54	10.4	200	152	HORI
6899.7	44.21	26.27	36.6	18.7	54	9.8	163	98	VERT
6982.3	44.30	26.24	36.7	18.7	54	9.7	273	345	VERT
7161.9	45.23	26.39	37.3	18.5	54	8.8	191	141	VERT
7679.3	45.50	26.29	37.0	17.8	54	8.5	242	353	VERT
7814.3	46.00	26.39	37.3	17.7	54	8.0	101	186	HORI
7984.8	46.39	26.59	37.3	17.5	54	7.6	99	177	HORI

Peak Radiated Data for Emissions Above 1GHz

Frequency MHz	Level dBμV/m	Measured dBμV	Transd dB	Gain dB	Height cm	Angle deg	Pol.	Limit dBμV/m	Result
1123.6	48.62	51.57	23.9	26.8	129	165	VERT	74	Pass
1203.2	47.85	50.20	24.3	26.7	120	146	HORI	74	Pass
1345.6	46.63	48.31	24.6	26.3	118	199	VERT	74	Pass
1598.9	48.87	49.20	25.4	25.7	118	0	VERT	74	Pass
1689.6	46.73	46.56	25.6	25.5	342	153	HORI	74	Pass
2504.4	50.63	44.81	29.6	23.8	365	103	HORI	74	Pass
3158.7	51.40	42.85	31.7	23.1	139	241	VERT	74	Pass
3328.1	51.75	43.36	31.2	22.8	120	57	VERT	74	Pass
3973.6	51.93	41.00	32.2	21.3	346	299	HORI	74	Pass
5254.3	54.68	40.49	33.9	19.7	100	167	HORI	74	Pass
6676.6	56.44	38.85	36.3	18.7	200	152	HORI	74	Pass
6899.7	57.41	39.47	36.6	18.7	163	98	VERT	74	Pass
6982.3	57.02	38.96	36.7	18.7	273	345	VERT	74	Pass
7161.9	58.33	39.49	37.3	18.5	191	141	VERT	74	Pass
7679.3	59.22	40.00	37.0	17.8	242	353	VERT	74	Pass
7814.3	58.45	38.85	37.3	17.7	101	186	HORI	74	Pass
7984.8	59.81	40.00	37.3	17.5	99	177	HORI	74	Pass

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using a LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Detectors - Quasi Peak and Average Detector


Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The test is performed with the EUT connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. Two additional peripherals, a USB mouse and a VGA monitor, are also connected to the laptop computer through the appropriate port. The EUT was communicating with the laptop computer continuously.

Measurement Results

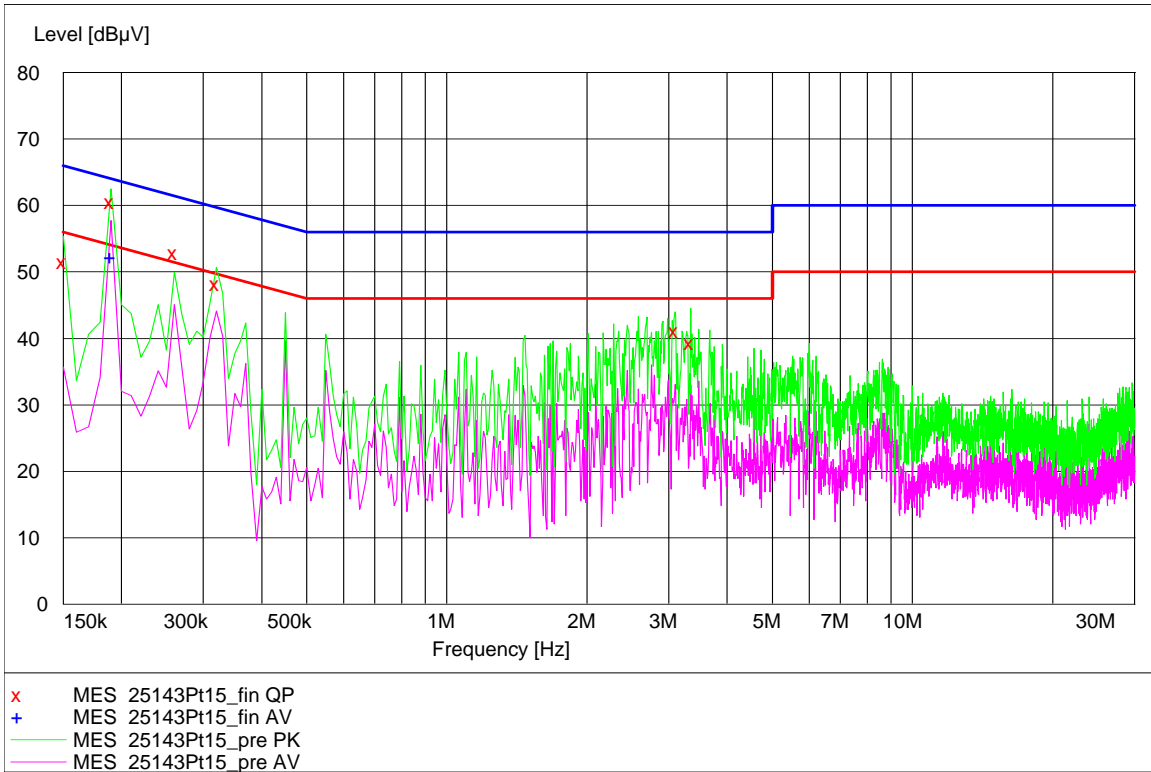

Tx Mode - Line Coupling

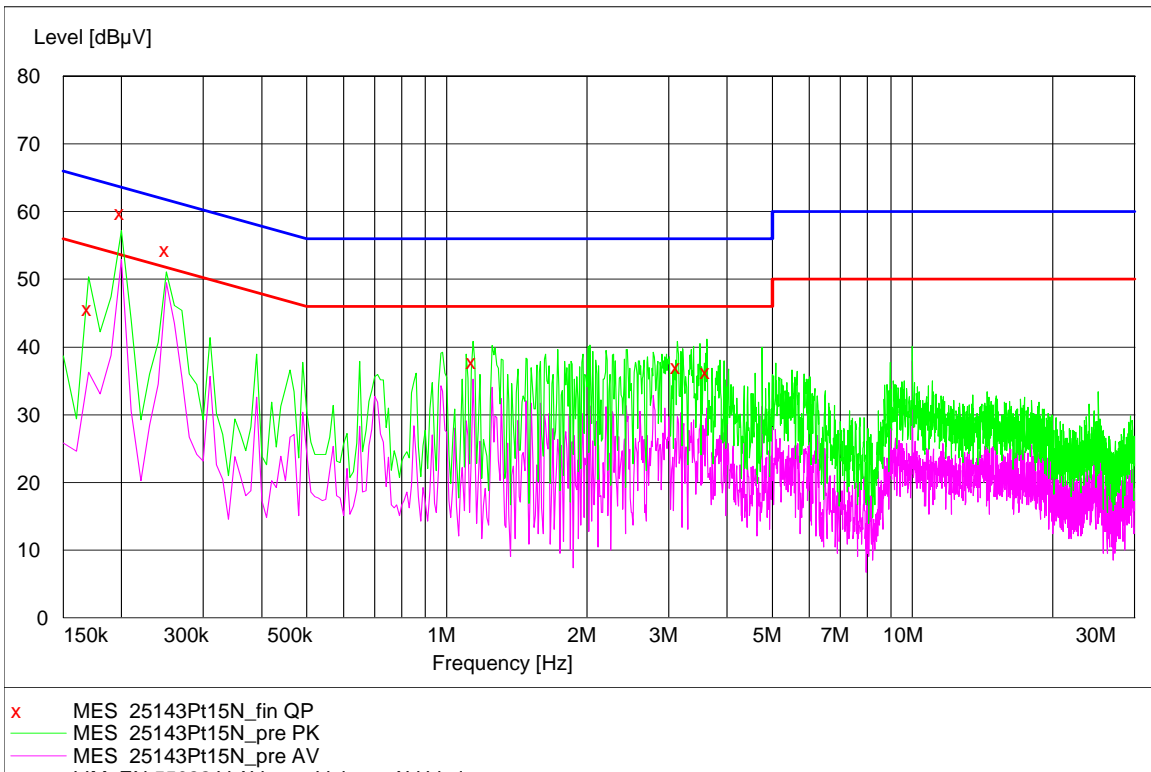

Tx Mode - Neutral Coupling

End of Test Report