



MOTOROLA MOBILITY

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 25082-1 WLAN- Conducted

Report Date – 2012-8-03

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Hongpeng Yin

Title: EMC Project Manager

Test: 2012-07-21 to 2011-08-03

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2012-08-10

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 402854

IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ
ISO/IEC-17025:2005 accredited by UKAS



UKAS Certificate Number: 2404

Table of Contents

Test Report Details 3
Applicable Standards 3
Summary of Testing..... 4
General and Special Conditions..... 4
Equipment and Cable Configurations..... 4
Measuring Equipment and Calibration Information..... 5
Description of WLAN Transmitter..... 5
Measurement Procedures and Data..... 6
 Spectrum Bandwidth..... 6
 Measurement Procedure..... 6
 Measurement Results 6
Peak Output Power 31
 Measurement Procedure..... 31
 Measurement Results 31
Power Spectral Density..... 34
 Measurement Procedure..... 34
 Measurement Results 34
Spurious RF Conducted Emissions..... 36
 Measurement Procedure..... 36
 Measurement Results 36
AC Line Conducted Emissions..... 63
 Measurement Procedure..... 63
 Measurement Results 63

Test Report Details

Tests Performed By: Motorola (Beijing) Mobility Technologies Co., Ltd.
Asia Global Compliance Labs
No.1 Wang Jing East Road
Chao Yang District
Beijing, 100102, P. R. China
Phone: +86 10 8499 5891
FCC Registration Number: 402854
IC Registration Number: 109AW-1

Tests Requested By: Motorola Mobility LLC.
600 North US Hwy 45
Libertyville, IL 60048
Unite Status

Product Type: Cell phone

Signaling Capability: GSM 850/1900, EDGE850/1900,
WCDMA850/1900 , Bluetooth+EDR,
802.11a/802.11b/802.11g/802.11n

IMEI: 352519050045502
352519050044794

FCC ID: IHDT56NS8

Project number: 25082-1

Testing Complete Date: 2012-08-03

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

 X Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI 63.4 2003, RSS-210 Issue 8

In addition, testing was performed per FCC KDB publication number 558074.

Summary of Testing

Test	Test Name	Pass/Fail
1	Spectrum Bandwidth	Pass
2	Peak Power	Pass
3	Power Spectral Density	Pass
4	Spurious RF Conducted Emissions	Pass
5	AC Line Conducted Emissions	Pass

Test	Test Name	Results
1	Spectrum Bandwidth	See plots
2	Peak Power	See plots
3	Power Spectral Density	See tables
4	Spurious RF Conducted Emissions	See plots
5	AC Line Conducted Emissions	See Plots

General and Special Conditions

This product utilizes an internal battery that is not removable. When applicable, EMC testing was performed with the internal battery fully charged.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Manufacturer	Equipment Type	Model No.	Serial Number	Date of calibration
Rohde Schwarz	Receiver	FSU26	200353	03/13/2012
Rohde Schwarz	Receiver	ESCI	100650	03/13/2012
Agilent	Attenuator	8491A	MY39263202	NCR
Rohde Schwarz	LISN	ENV216	100055	12/19/2010

Note All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list. The LISN is on a two-year calibration cycle. All other equipments are on a one-year calibration cycle..

Description of WLAN Transmitter

The EUT offers WLAN as a feature. The WLAN antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a WLAN transmitter, it is designed operate with other WLAN devices as defined by the industrial standard. In this application, the device is battery operated.

De Facto EIRP Limit – Pursuant 47 CFR 15.247(b)(4); RSS-210 Section A8.4.

Criterion: The conducted output power limit of 1-watt is based on the use of antennas with directional gains that do not exceed 6 dB_i. If transmitting antennas of directional gain greater than 6 dB_i are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB_i.

The antenna employed by this transmitter is intended to be omni-directional, and thus will not exhibit directional gain in excess of 6 dB_i. The conducted power is less than the limits set forth (see elsewhere in this report for details).

Measurement Procedures and Data

Spectrum Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.

20 dB BW Test Settings

1. RBW \geq 100 kHz
2. VBW \geq RBW
3. Sweep = auto
4. Detector function = peak
5. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20 dB bandwidth of the emission.

For 6 dB BW, test method from KDB 558074 was followed.


6 dB BW Settings

RBW = 300 kHz
VBW = 3 MHz
Detector = Peak
Trace = Max Hold
Sweep = Auto

All modes of operation and data rates were investigated. The test results shown below represent the worst case condition.


Measurement Results

See attached

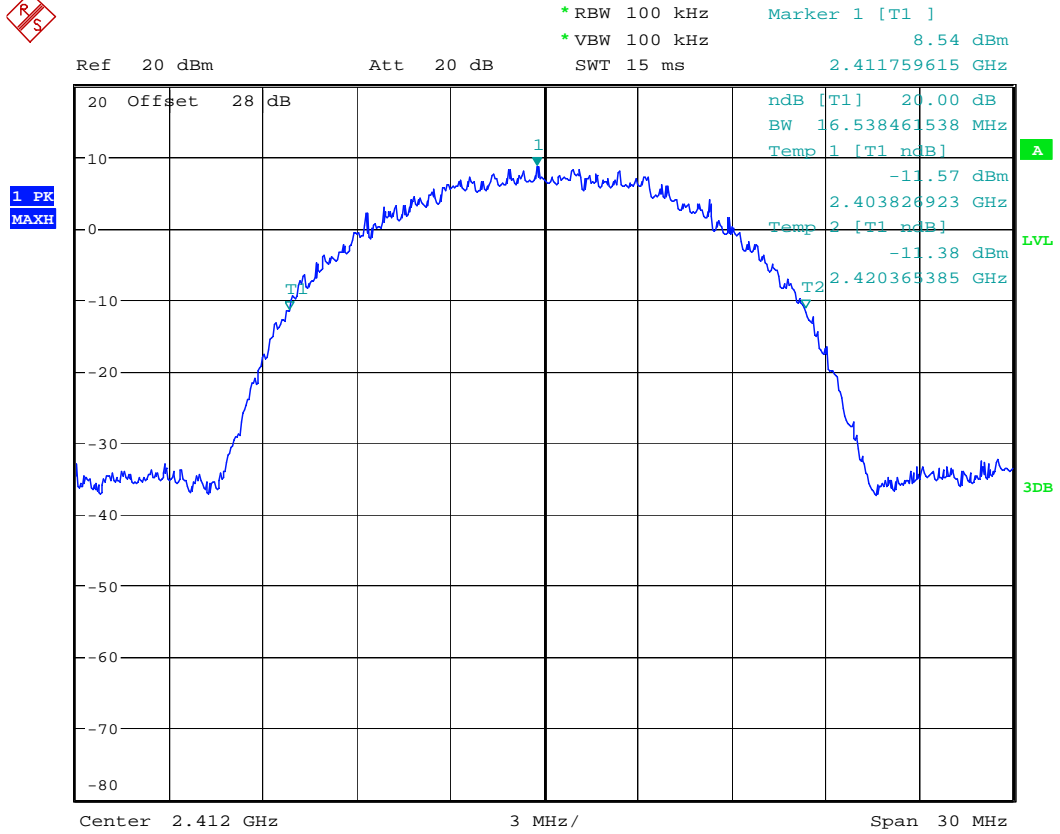


Date: 24.JUL.2012 09:43:05

20 dB Bandwidth Channel 1 @ 5.5Mbps

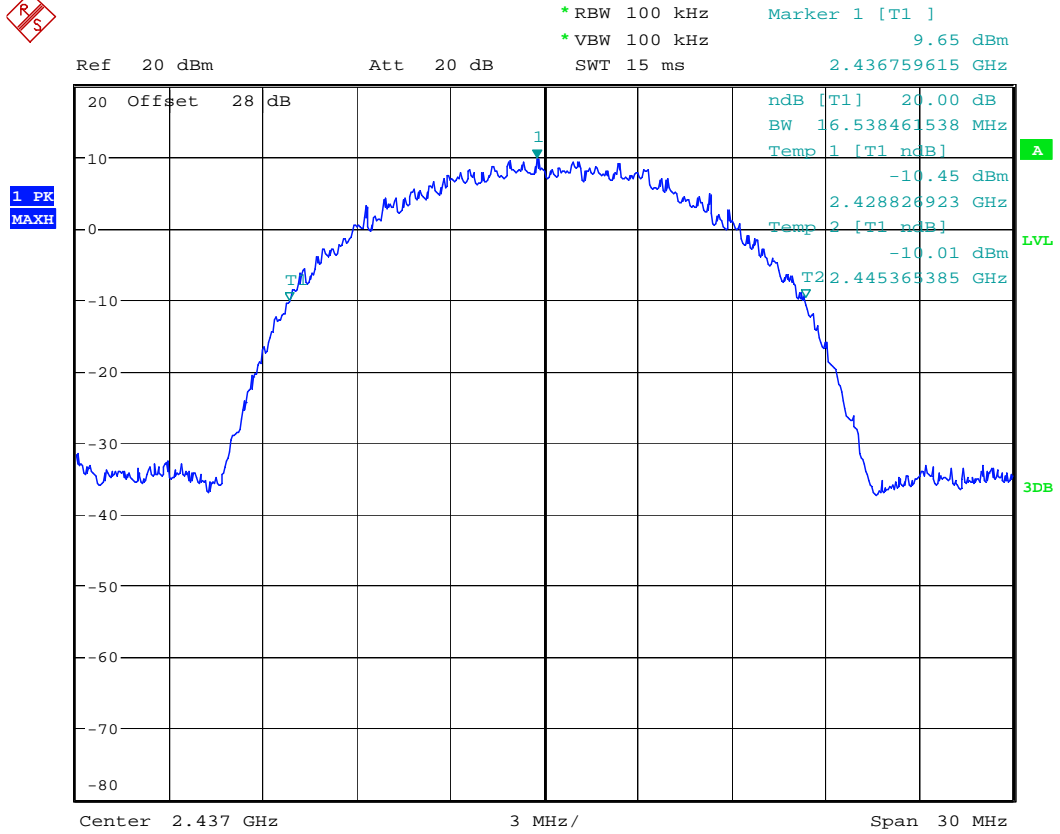

Date: 24.JUL.2012 09:41:55


20 dB Bandwidth Channel 6 @ 5.5Mbps

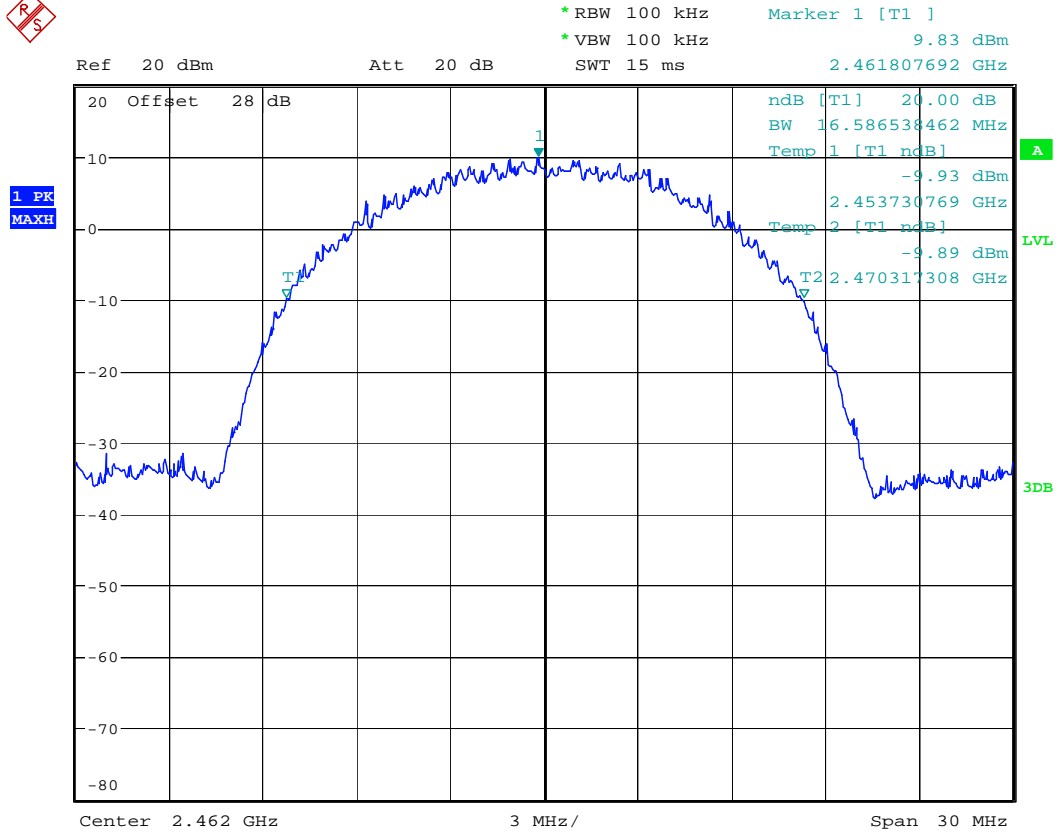

Date: 24.JUL.2012 09:40:53


20 dB Bandwidth Channel 11 @ 5.5Mbps

802.11g Mode

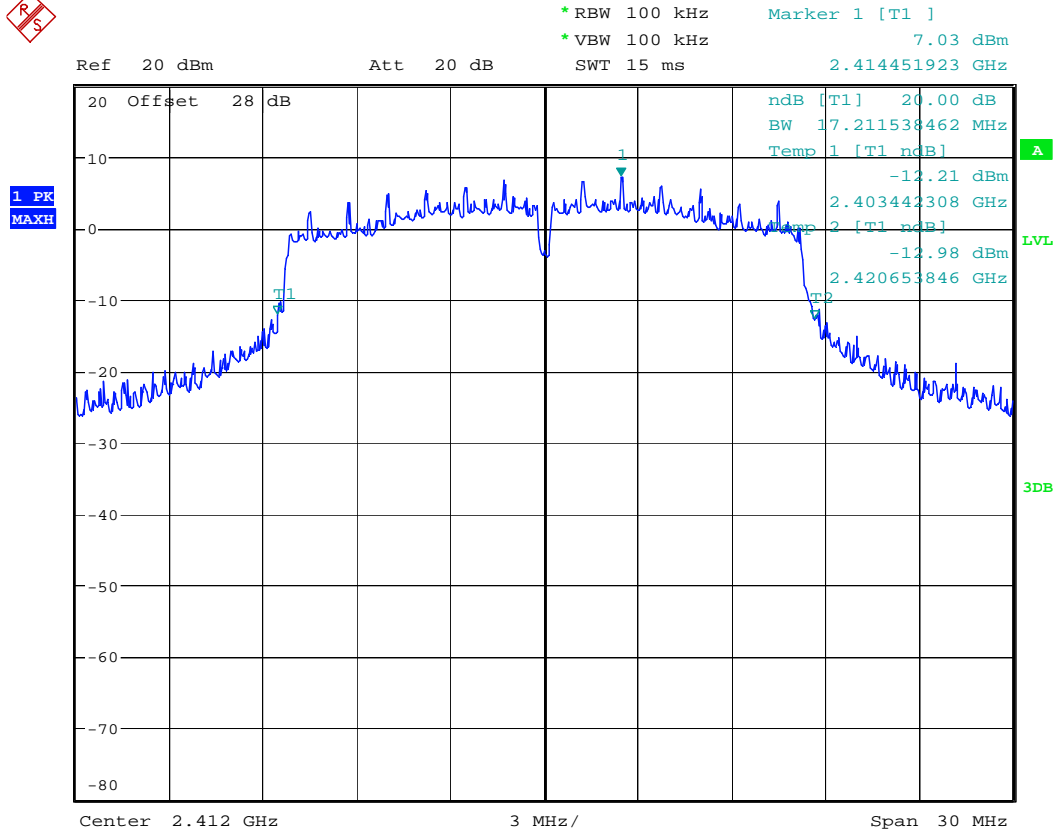


Date: 24.JUL.2012 09:44:13

20 dB Bandwidth Channel 1 @ 6Mbps

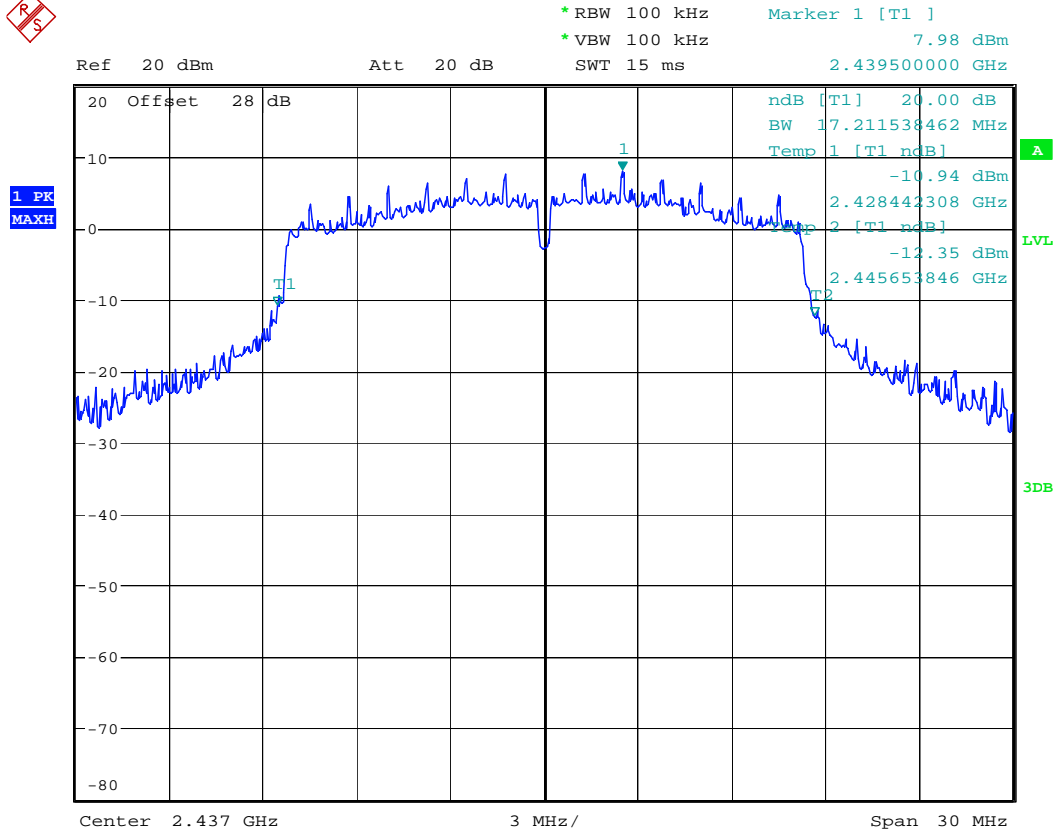

Date: 24.JUL.2012 09:45:52


20 dB Bandwidth Channel 6 @ 6Mbps

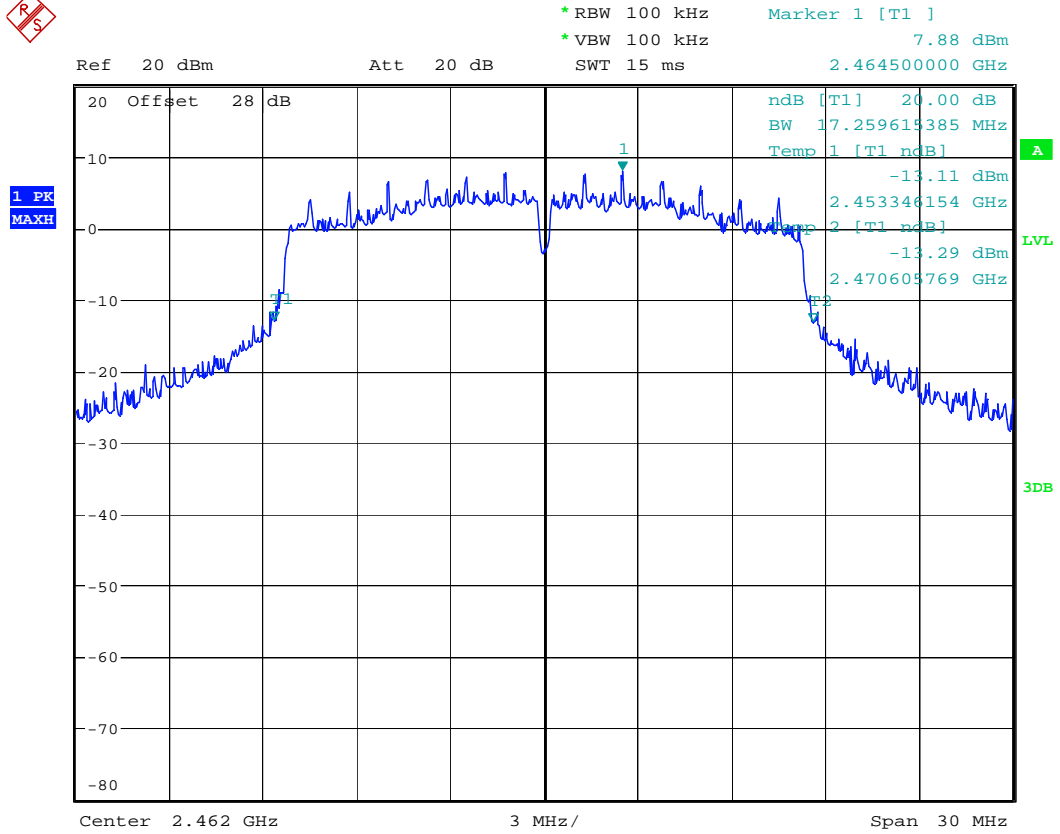

Date: 24.JUL.2012 09:46:46


20 dB Bandwidth Channel 11 @ 6Mbps

802.11n 400ns GI Mode

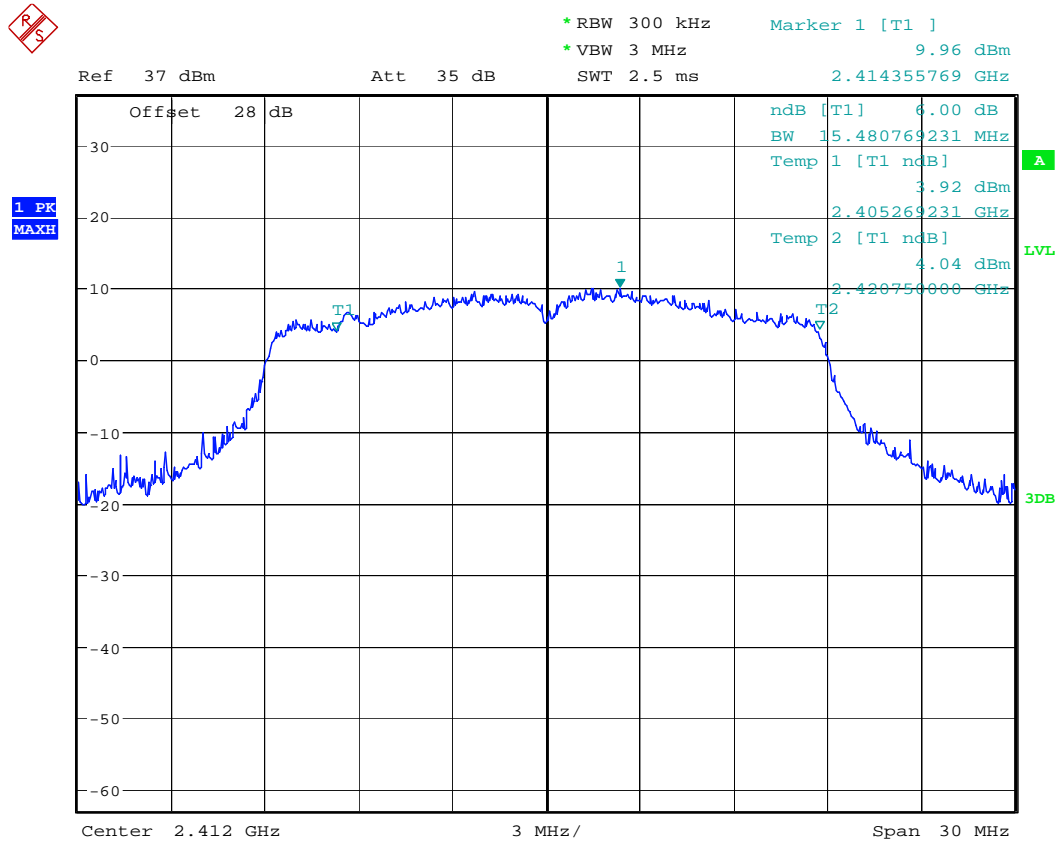


Date: 24.JUL.2012 10:01:22

6dB Bandwidth Channel 1 @ 21.7Mbps

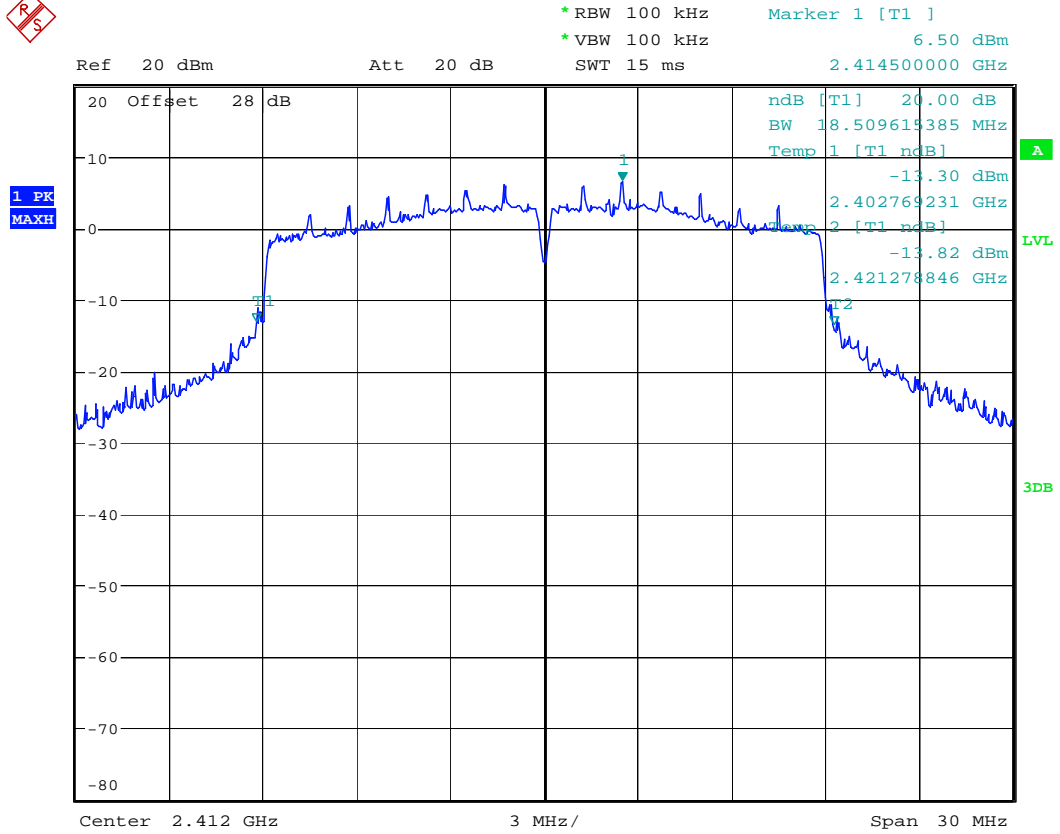


Date: 24.JUL.2012 09:48:37

20dB Bandwidth Channel 1 @ 21.7Mbps

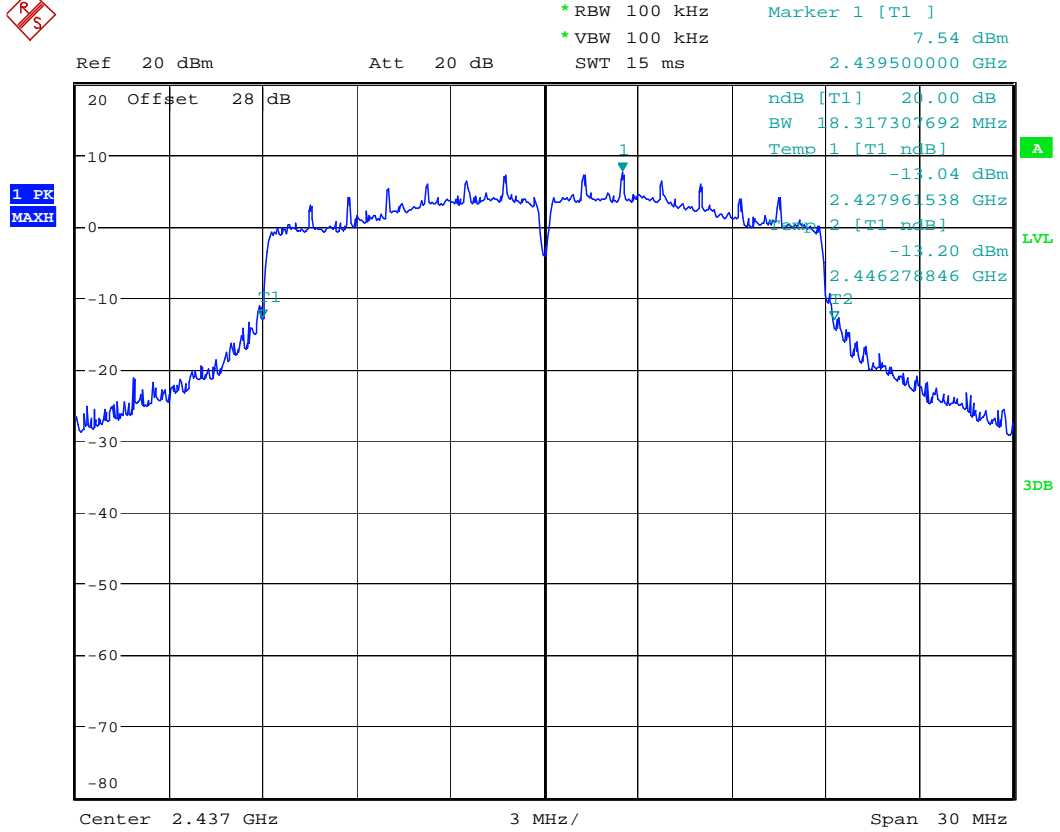

Date: 24.JUL.2012 09:49:27


20dB Bandwidth Channel 6 @ 21.7Mbps

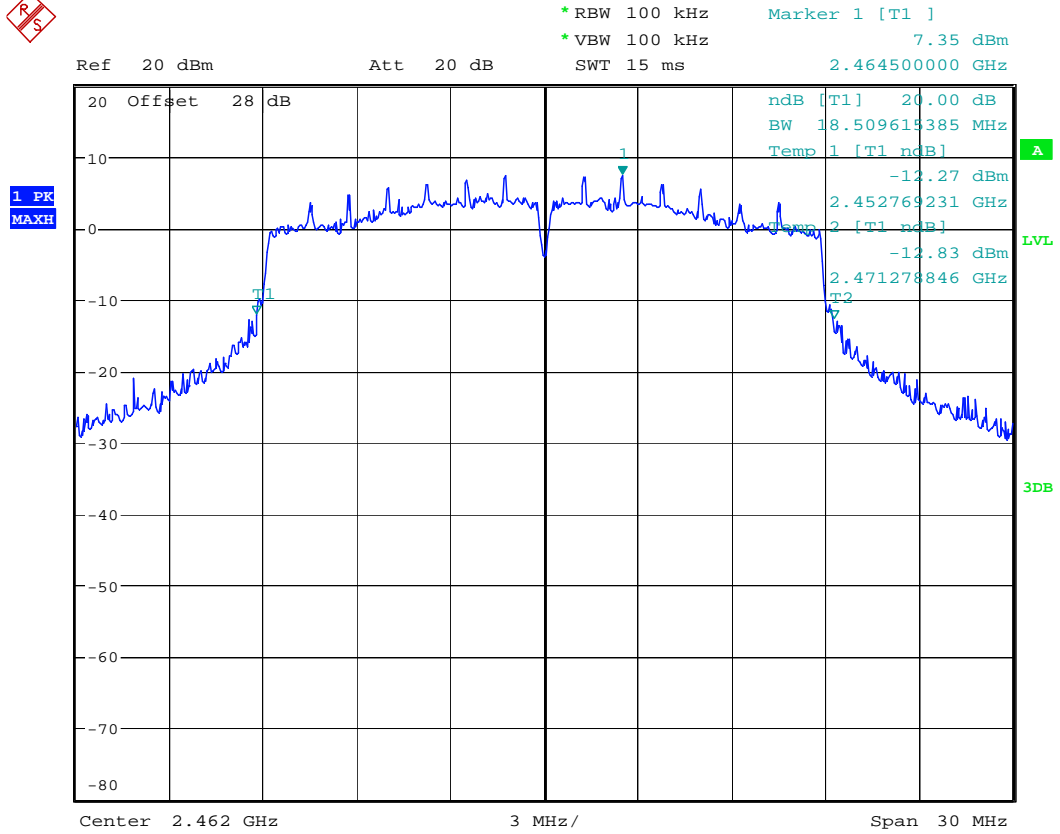

Date: 24.JUL.2012 09:50:16


20dB Bandwidth Channel 11 @ 21.7Mbps

802.11n 800ns GI Mode

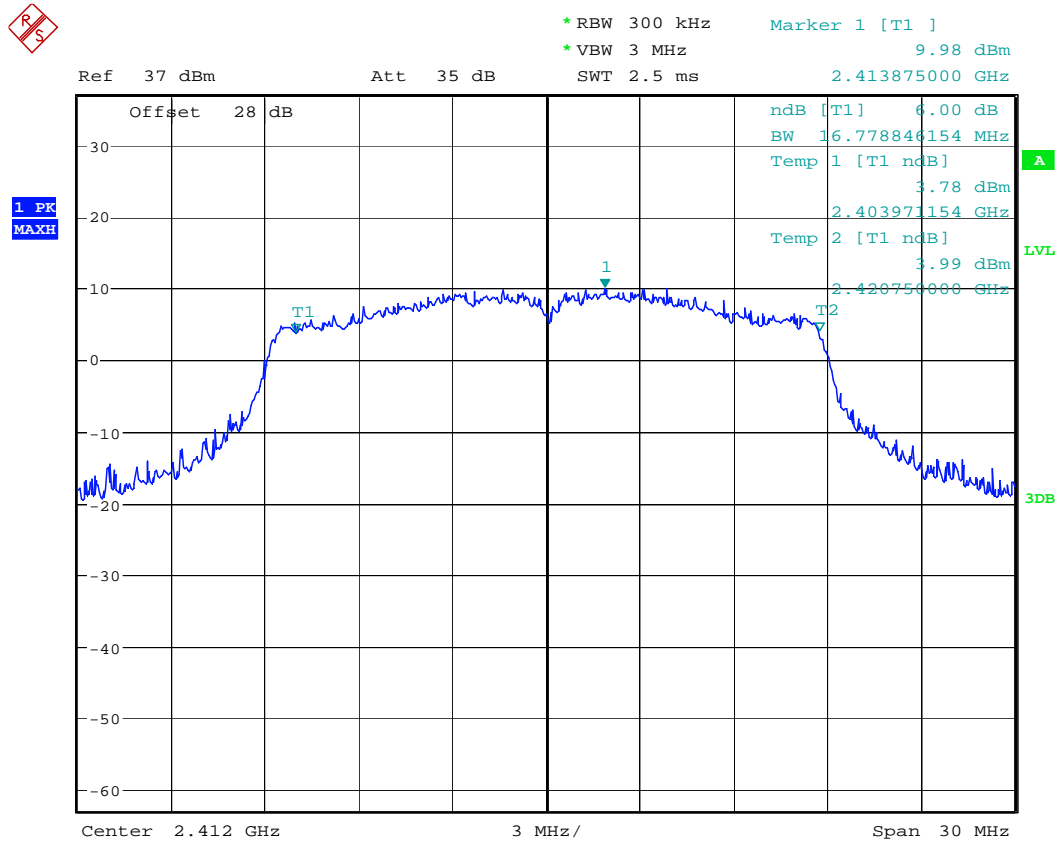


Date: 24.JUL.2012 09:56:27

6 dB Bandwidth Channel 1 @ 19.5Mbps

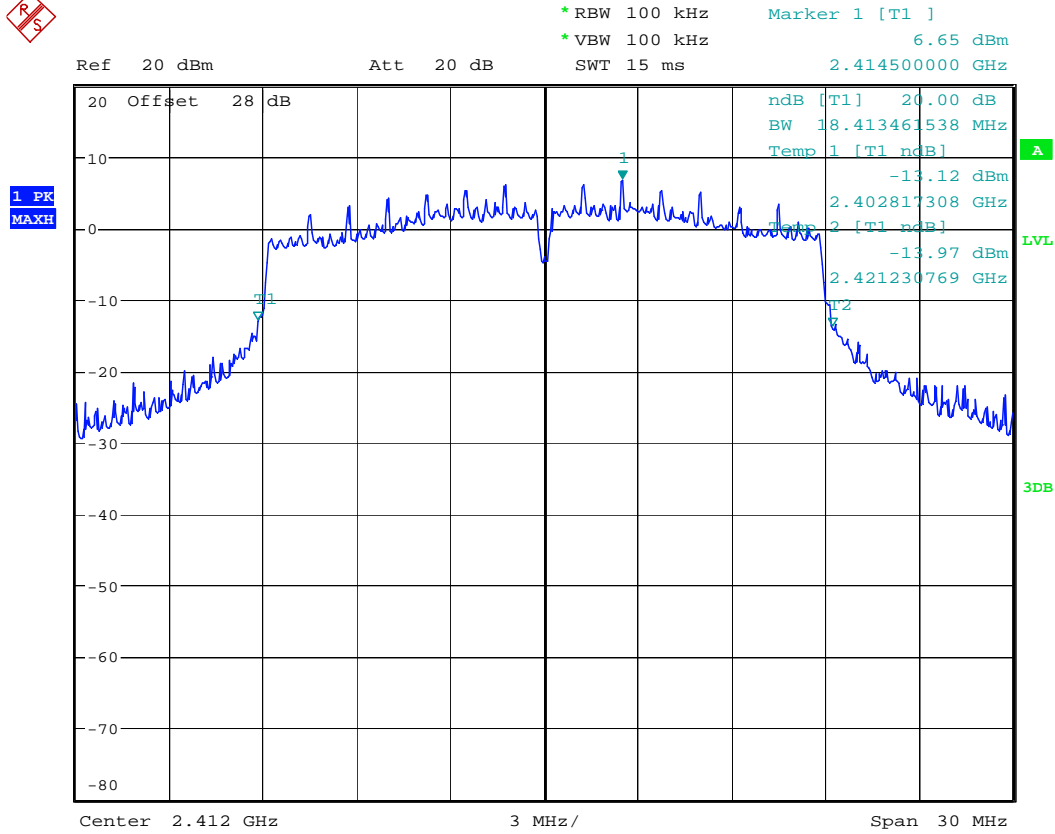


Date: 24.JUL.2012 09:54:27

20 dB Bandwidth Channel 1 @ 19.5Mbps

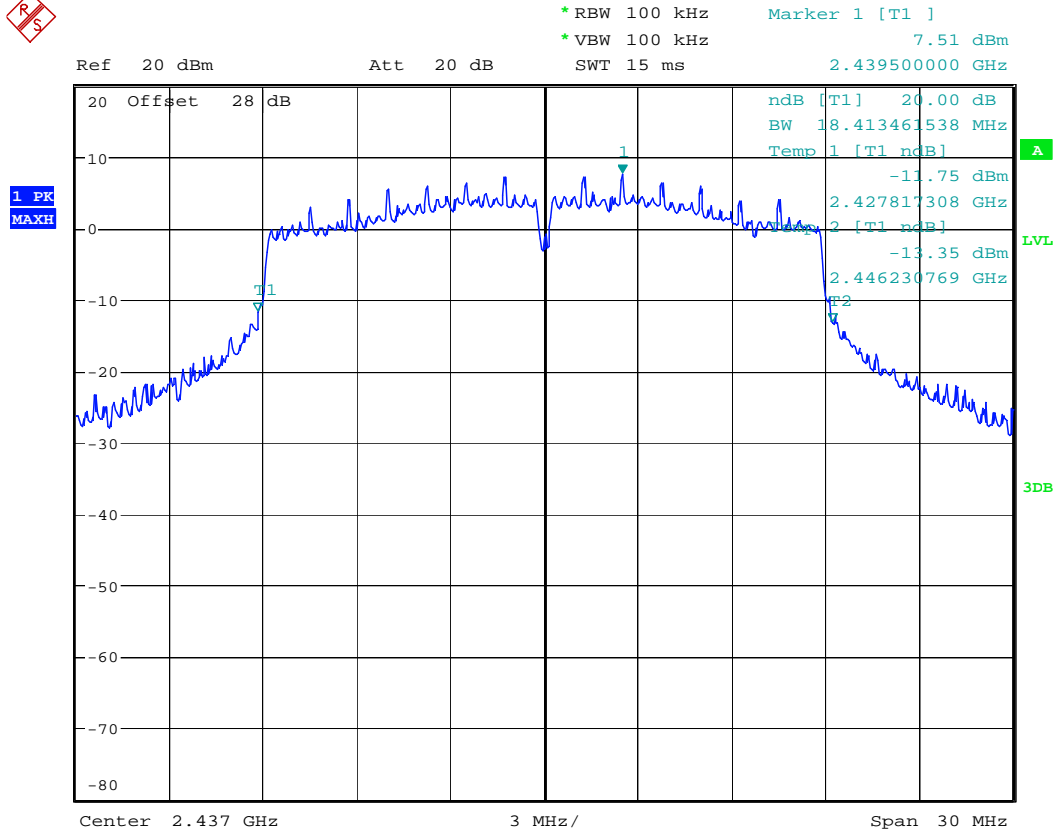

Date: 24.JUL.2012 09:53:14

20 dB Bandwidth Channel 6 @ 19.5Mbps

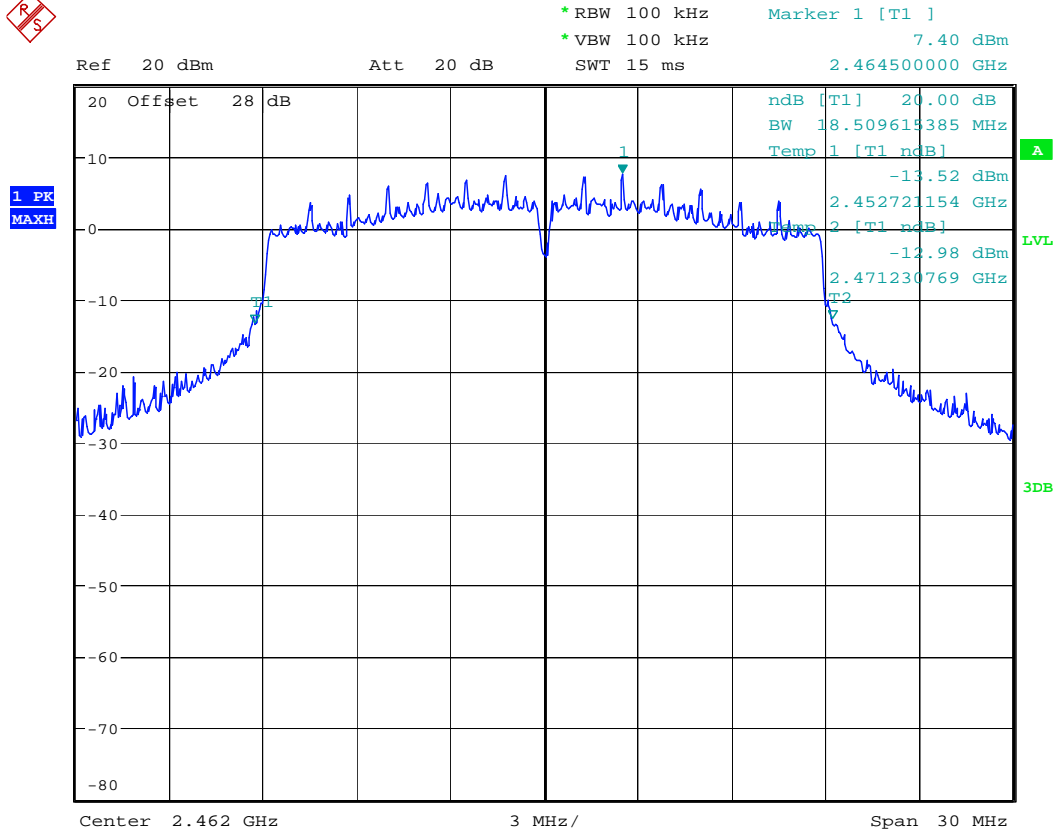

Date: 24.JUL.2012 09:51:44

20 dB Bandwidth Channel 11 @ 19.5Mbps

PEAK OUTPUT POWER

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the Spectrum analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage. Initially, an average detector is used to measure power in the low, middle and high channels for all data rates. The average measurements are used to determine which data rate is to be fully tested for each supported mode. Using a peak detector, the power is then measured for all data rates.

Measurement Results

See Attached

Initial average power measurements

Channel	Average power (dBm) for <u>802.11b</u> Data Rates			
	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
1	17.1	17.41	18.2	18.27
6	18.2	18.43	19.36	19.32
11	18.47	18.6	19.61	19.45

Channel	Average power (dBm) for <u>802.11g</u> Data Rates							
	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
1	17.17	17.16	16.77	16.9	15.3	15.31	13.86	13.91
6	18.34	18.22	17.96	18.02	16.43	16.46	15.27	15.15
11	18.5	18.48	18.24	18.17	16.75	16.61	15.53	15.24

Channel	Average power (dBm) for <u>802.11n</u> Data Rates								
	20 MHz BW, 400 ns GI								
	7.2 Mbps	14.4 Mbps	21.7 Mbps	28.9 Mbps	43.3 Mbps	57.8 Mbps	65 Mbps	72.2 Mbps	
1	16.07	16.68	16.59	15.33	15.27	13.82	13.88	13.21	
6	17.17	17.82	17.84	16.37	16.47	14.89	14.86	14.28	
11	17.49	17.96	18.03	16.52	16.79	15.12	15.23	14.4	

Channel	Average power (dBm) for <u>802.11n</u> Data Rates								
	20 MHz BW, 800 ns GI								
	6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps	
1	16.38	17.22	17.21	15.63	15.51	14.32	14.06	13.41	
6	17.44	18.06	18.07	16.68	16.69	15.31	15.17	14.28	
11	17.61	18.19	18.27	16.82	16.86	15.41	15.59	14.49	

Based on these initial measurements, it was determined that testing will be performed in the 5.5Mbps data rate for the 802.11b mode, the 6Mbps data rate for the 802.11g mode, 21.7Mbps data rate for 802.11n 400ns GI mode and 19.5Mbps data rate for 802.11n 800ns GI mode. Tables showing the peak power measurements for the all data rates follow.

The peak power was measured using the below settings.

RBW = 1 MHz

VBW = 3 MHz

Span = 10 MHz for "b" mode and 20 MHz for "g" and "n" mode.

Detector = Peak

Trace = Max Hold

Int BW = 6 dB BW measured for each mode.

Channel	Peak power (dBm) for <u>802.11b</u> Data Rates			
	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
1	19.1	19.5	21.48	22.53
6	20.16	20.55	22.69	23.56
11	20.44	20.76	22.94	23.77

Channel	Peak power (dBm) for <u>802.11g</u> Data Rates							
	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
1	22.48	22.45	22.39	22.39	20.82	20.86	19.49	19.44
6	23.68	23.58	23.5	23.52	21.93	22.01	20.74	20.68
11	23.86	23.83	23.82	23.69	22.22	22.2	21.08	20.71

Channel	Peak power (dBm) for <u>802.11n</u> Data Rates								
	20 MHz BW, 400 ns GI								
	7.2 Mbps	14.4 Mbps	21.7 Mbps	28.9 Mbps	43.3 Mbps	57.8 Mbps	65 Mbps	72.2 Mbps	
1	22.15	22.28	22.24	20.97	20.82	19.45	19.43	18.77	
6	23.34	23.41	23.39	21.99	22.05	20.42	20.45	19.85	
11	23.62	23.51	23.59	22.15	22.38	20.63	20.84	19.94	

Channel	Peak power (dBm) for <u>802.11n</u> Data Rates								
	20 MHz BW, 800 ns GI								
	6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps	
1	21.75	22.8	22.63	21.13	21.12	19.81	19.55	18.82	
6	22.73	23.57	23.53	22.16	22.18	20.74	20.73	19.74	
11	22.91	23.74	23.75	22.31	22.36	20.89	21.03	19.93	

Power Spectral Density

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.

The WLAN function of the EUT was enabled. Test method from KDB 558074 was followed.

The spectrum analyzer used the following settings:

1. Span = 10 MHz
2. VBW = 300 kHz
3. RBW= 100 kHz
4. Sweep = Auto
5. Detector function = peak
6. Trace = max hold

Bandwidth Correction factor = $10 \text{ Log } (3 \text{ kHz}/100 \text{ kHz}) = -15.32 \text{ dB}$

The trace was allowed to stabilize. All modes of operation and data rates were investigated. The test results shown below represent the worst case condition.

Measurement Results

2412 MHz		2437MHz		2462MHz	
Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm
8.88	-6.44	9.76	-5.56	10.03	-5.29

802.11 b 5.5Mbps

2412 MHz		2437MHz		2462MHz	
Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm
7.32	-8	8.45	-6.87	8.33	-6.99

802.11 g 6Mbps

2412 MHz		2437MHz		2462MHz	
Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm
6.80	-8.52	7.83	-7.49	7.75	-7.57

802.11n(400ns) 21.7Mbps

2412 MHz		2437MHz		2462MHz	
Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm	Measured PSD dBm	Corrected PSD dBm
6.81	-8.51	7.88	-7.44	7.76	-7.56

802.11n(800ns) 19.5Mbps

SPURIOUS RF CONDUCTED EMISSIONS

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 20dB passive attenuator. A fully charged battery was used for the supply voltage.


Test method from KDB 558074 was followed.

All modes of operation and data rates were investigated. The test results shown below represent the worst case condition.

Measurement Results


See attached:

802.11b Mode @ 5.5Mbps

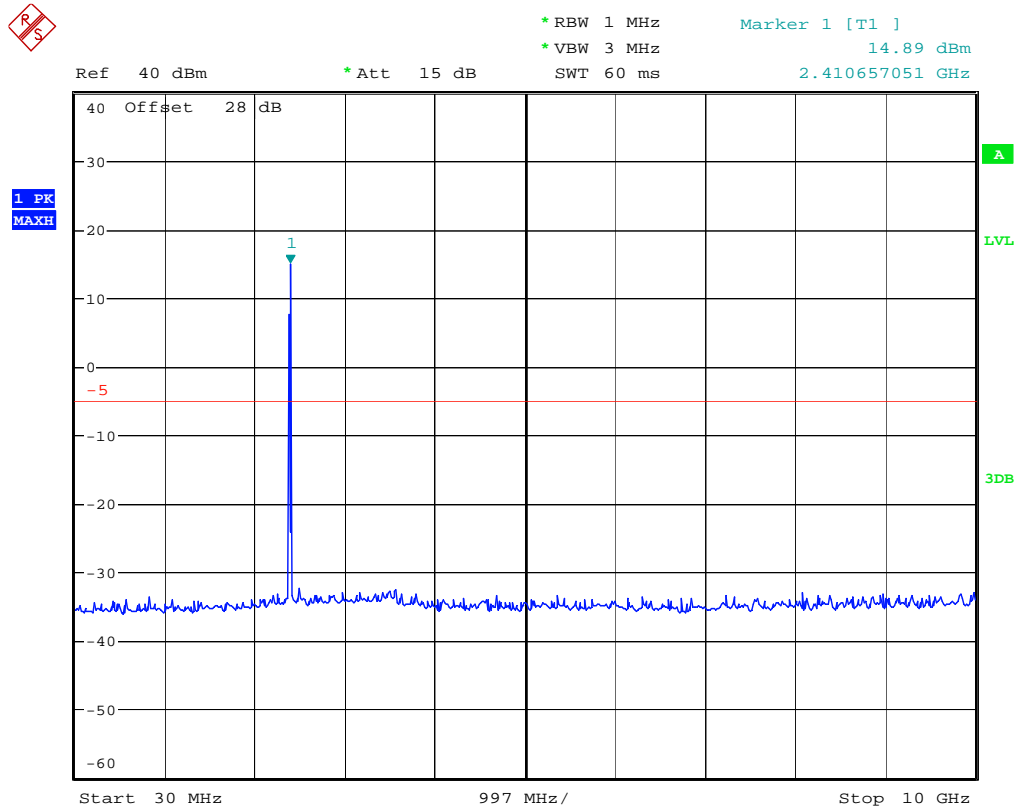


Date: 24.JUL.2012 10:19:49

Conducted Spurious Emissions 30MHz-10GHz (Low Channel)

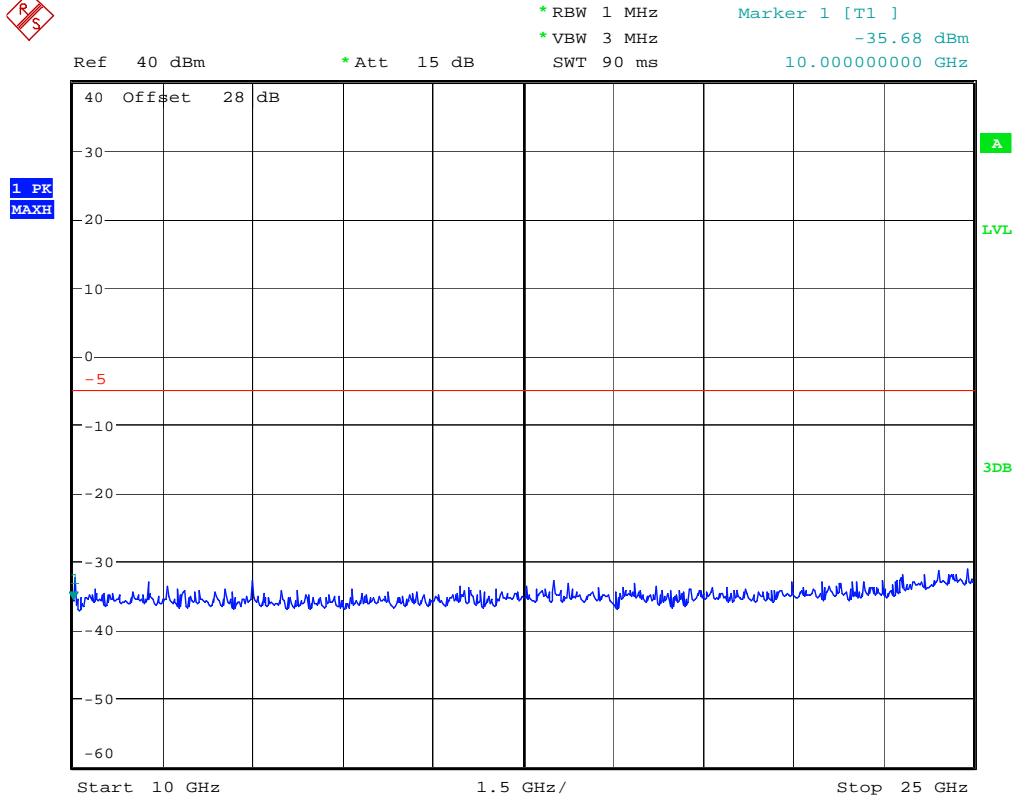


Date: 24.JUL.2012 10:20:33

Conducted Spurious Emissions 10GHz-25GHz (Low Channel)

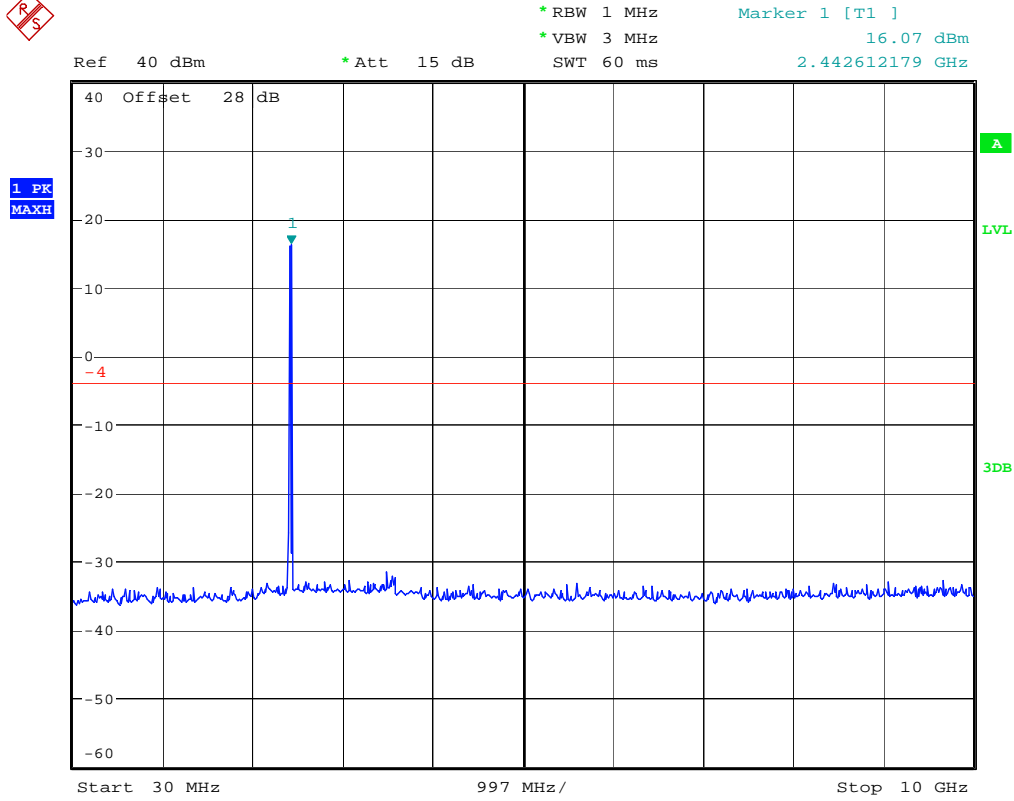


Date: 24.JUL.2012 10:21:52

Conducted Spurious Emissions 30MHz-10GHz (Mid Channel)

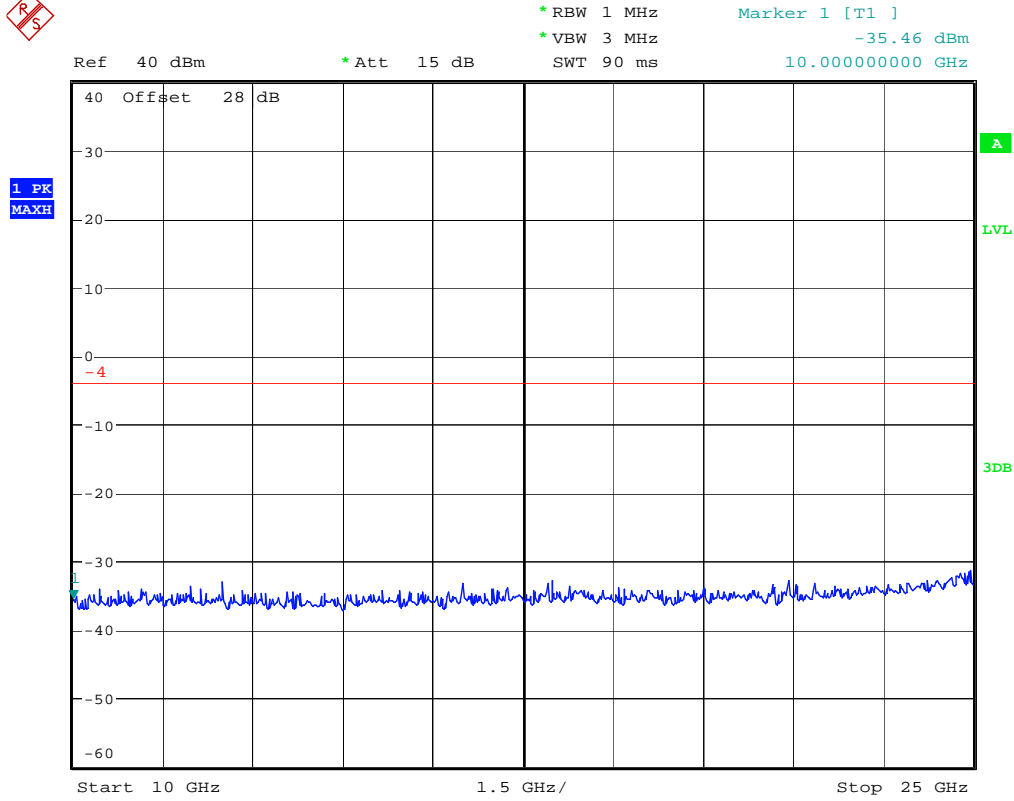


Date: 24.JUL.2012 10:22:22

Conducted Spurious Emissions 10GHz-25GHz (Mid Channel)

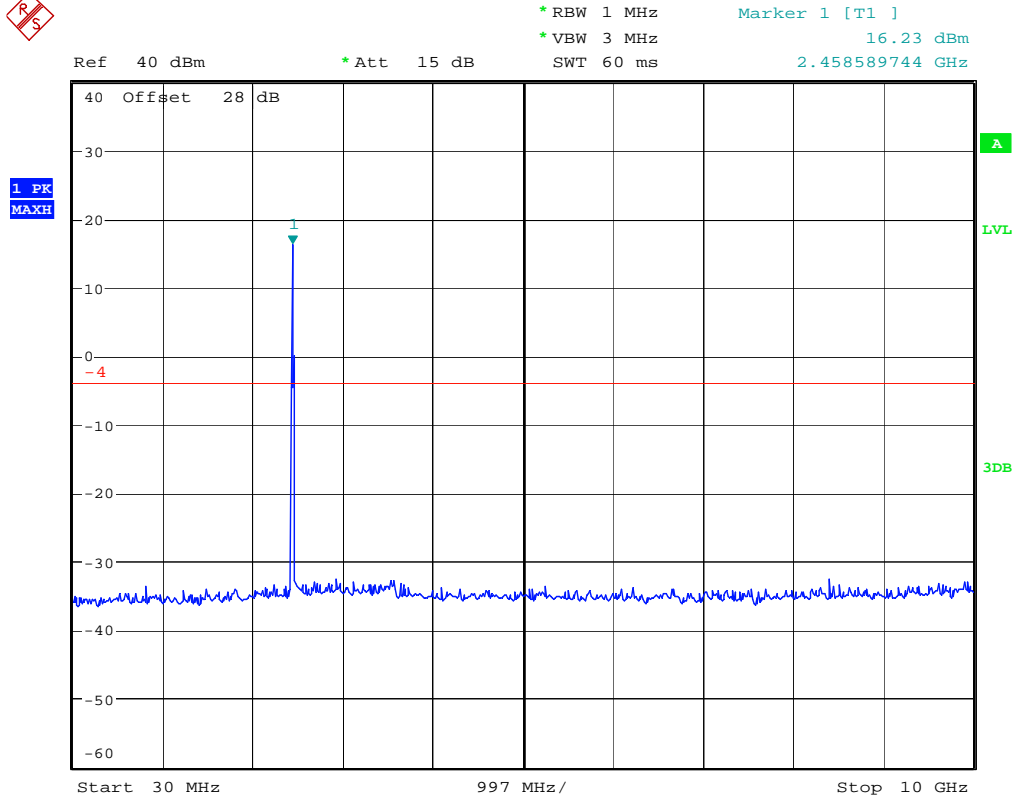

Date: 24.JUL.2012 10:23:26


Conducted Spurious Emissions 30MHz-10GHz (High Channel)

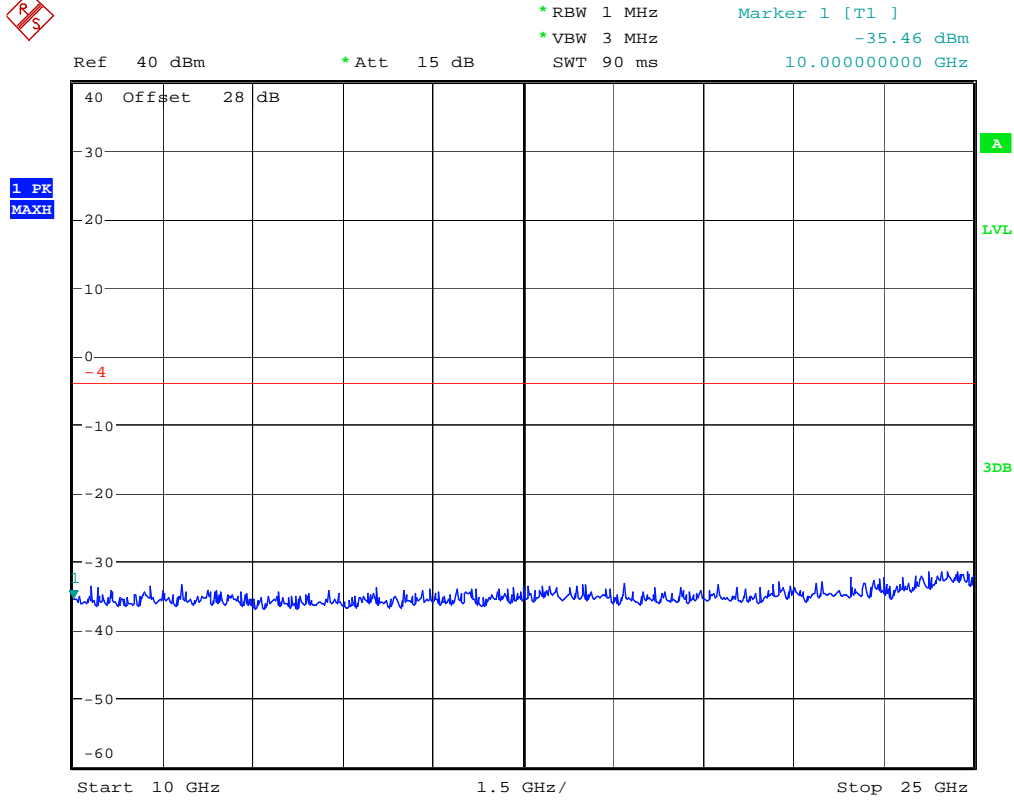

Date: 24.JUL.2012 10:23:51


Conducted Spurious Emissions 10GHz-25GHz (High Channel)

802.11 g @ 6Mbps

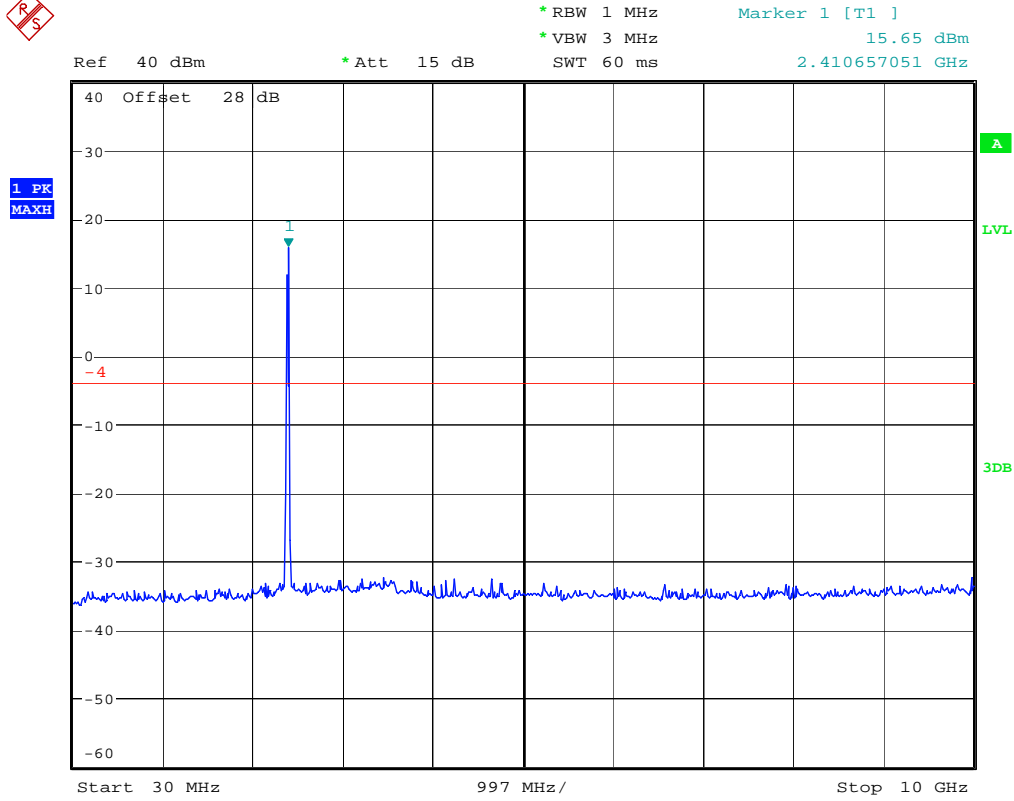


Date: 24.JUL.2012 10:25:33

Conducted Spurious Emissions 30MHz-10GHz (Low Channel)

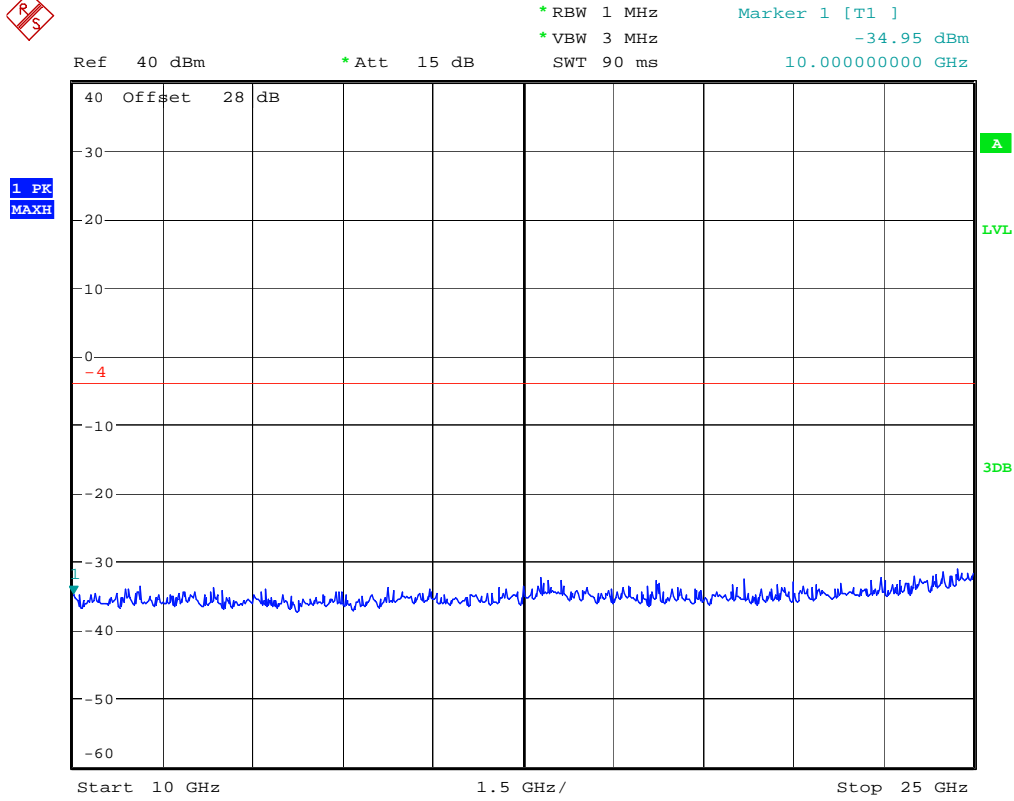


Date: 24.JUL.2012 10:26:06

Conducted Spurious Emissions 10GHz-25GHz (Low Channel)

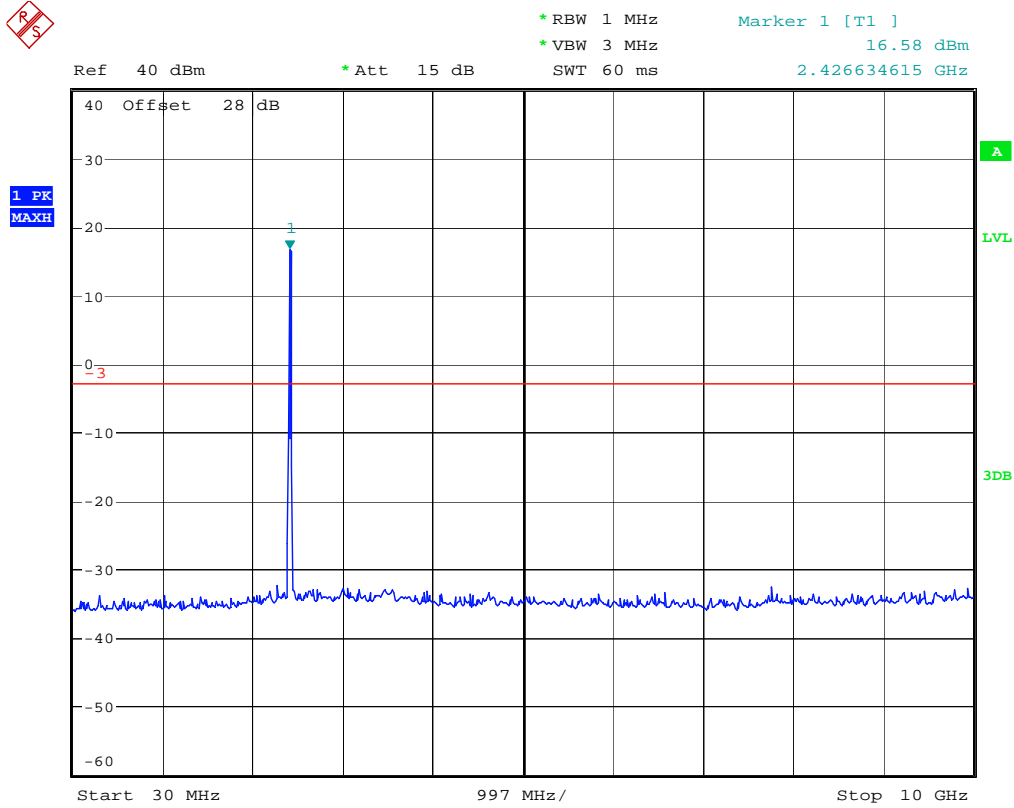


Date: 24.JUL.2012 10:27:51

Conducted Spurious Emissions 30MHz-10GHz (Mid Channel)

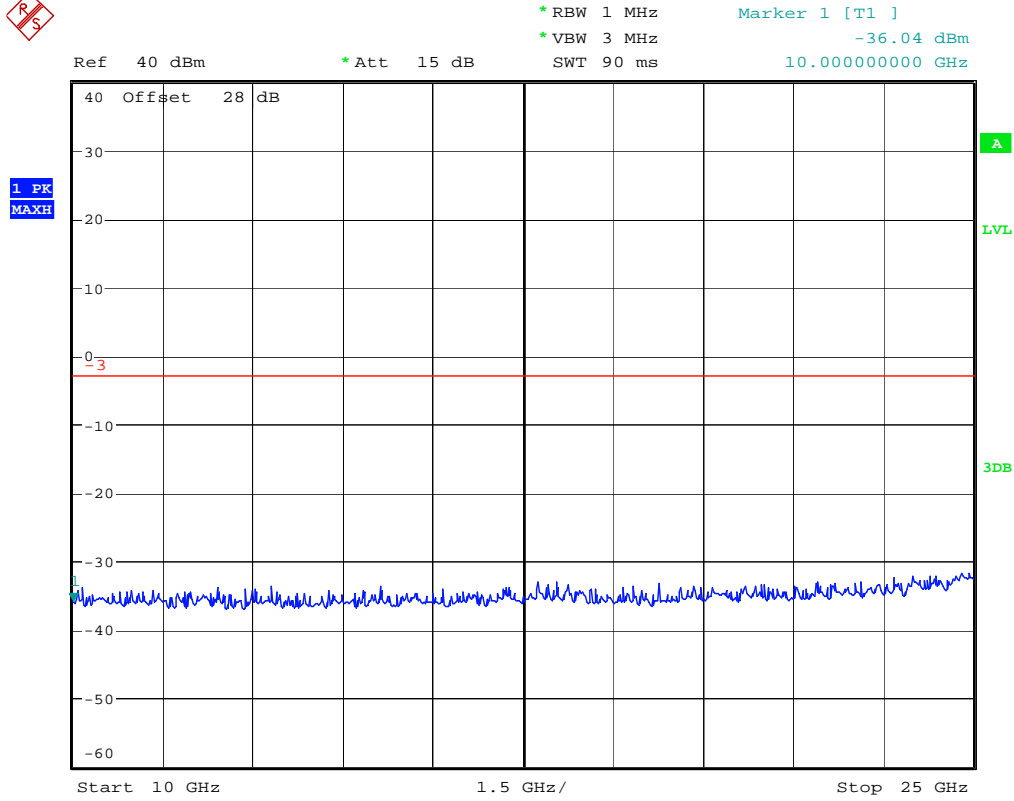


Date: 24.JUL.2012 10:28:16

Conducted Spurious Emissions 10GHz-25GHz (Mid Channel)

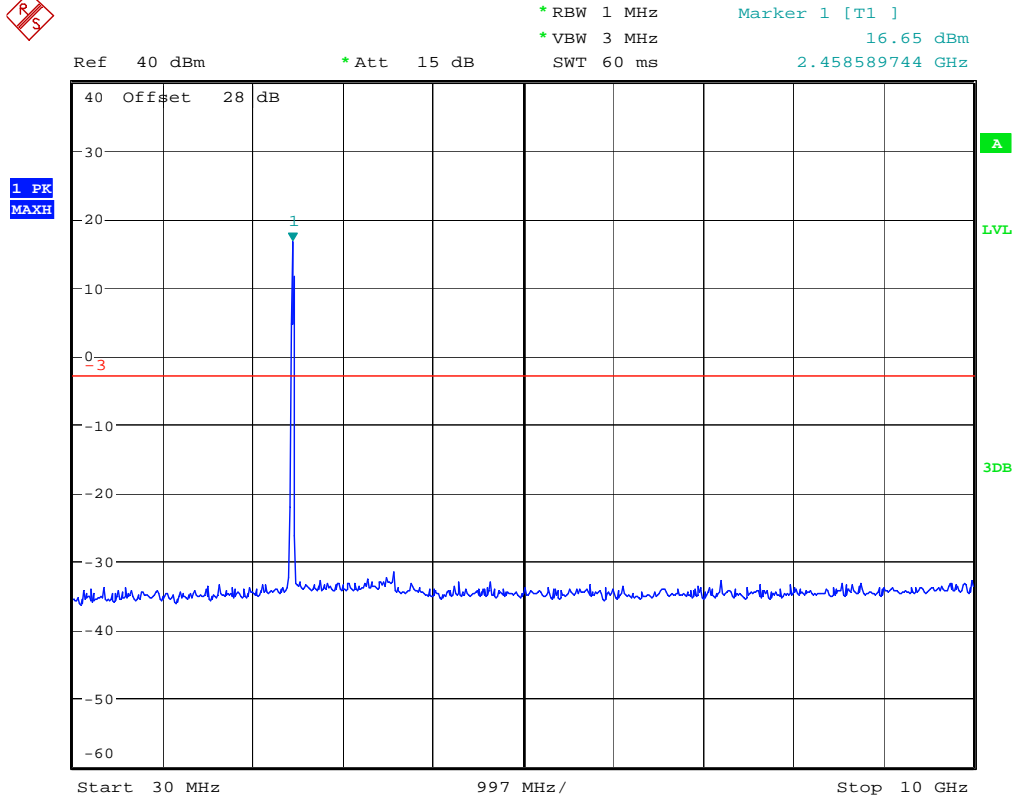

Date: 24.JUL.2012 10:29:33


Conducted Spurious Emissions 30MHz-10GHz (High Channel)

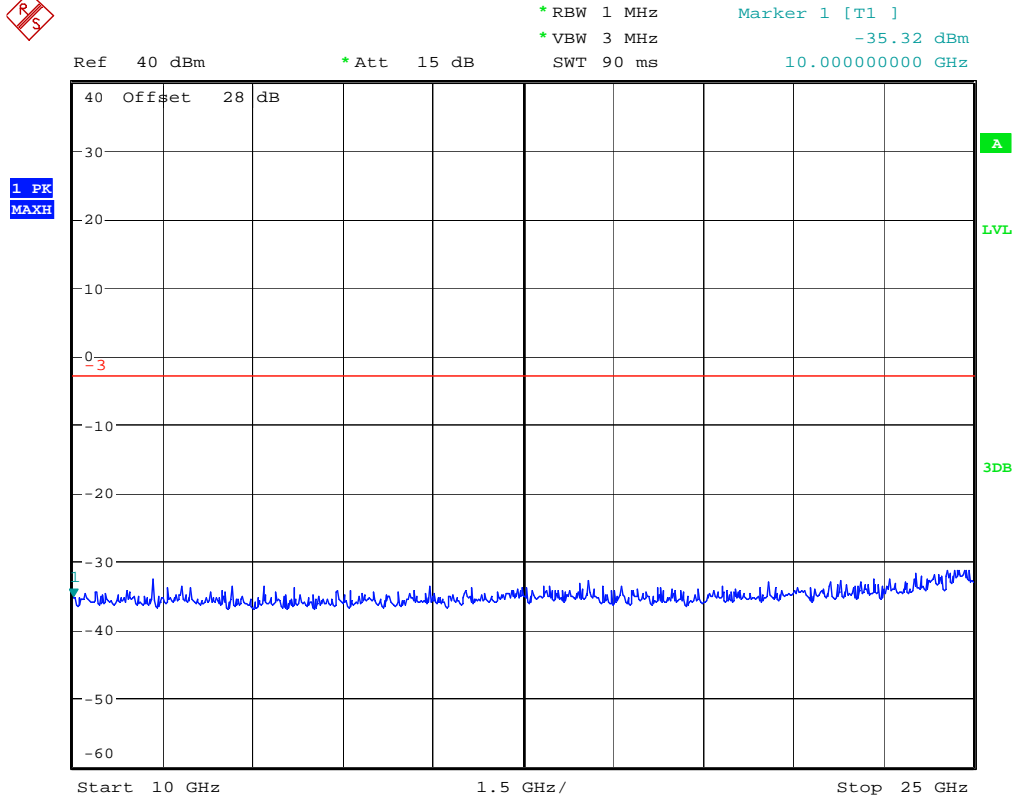

Date: 24.JUL.2012 10:30:07


Conducted Spurious Emissions 10GHz-25GHz (High Channel)

802.11b @ 5.5Mbps Band edge

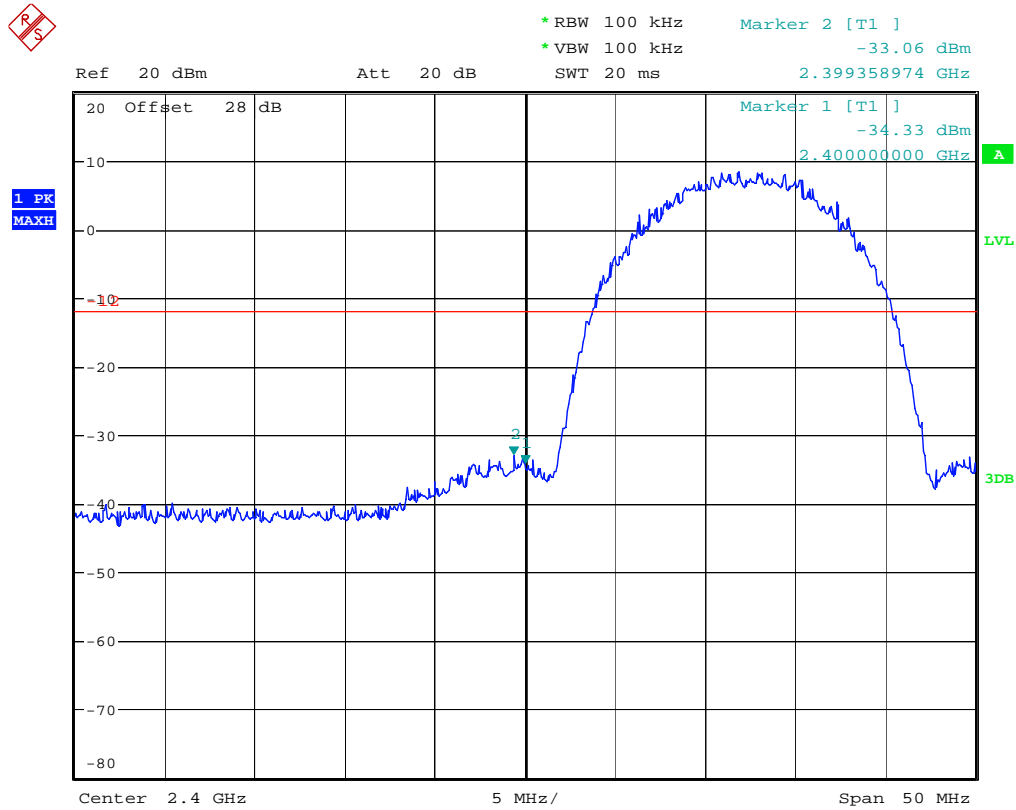


Date: 24.JUL.2012 10:32:46

Channel 1 – Lower Band Edge

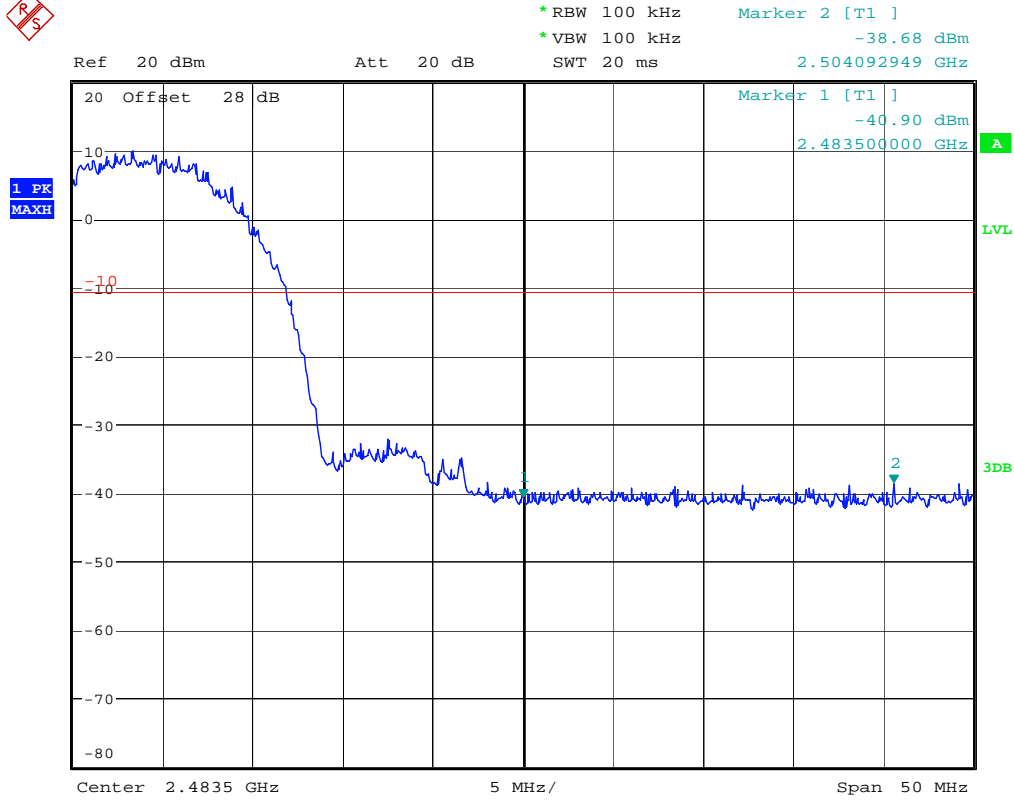


Date: 24.JUL.2012 10:34:47

Channel 11 – Upper Band Edge
802.11g @ 6Mbps Band Edge

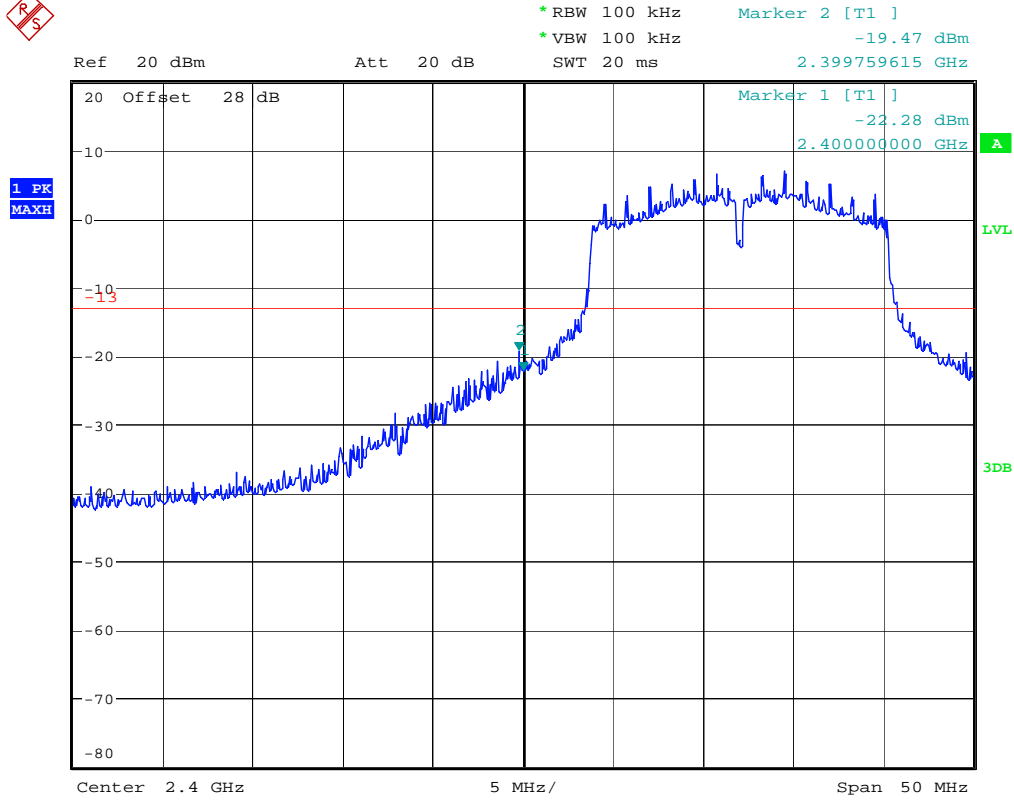

Date: 24.JUL.2012 10:36:32


Channel 1 – Lower Band Edge

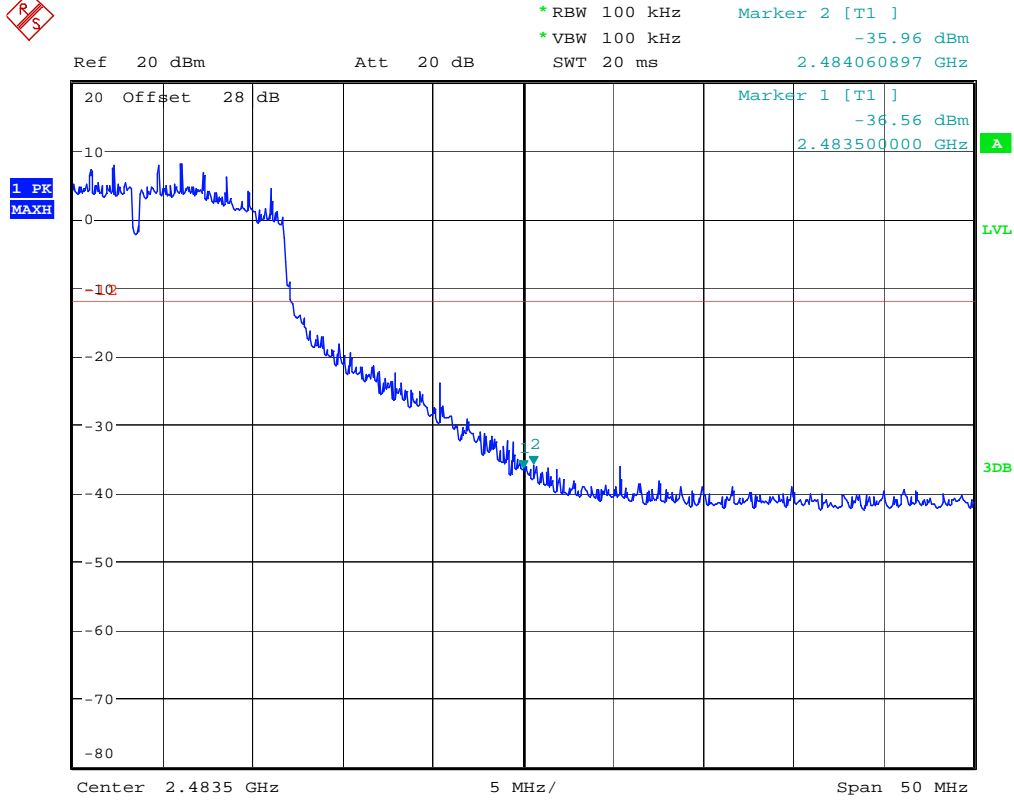

Date: 24.JUL.2012 10:38:09


Channel 11 – Upper Band Edge

802.11n 400ns GI @ 21.7Mbps Band Edge

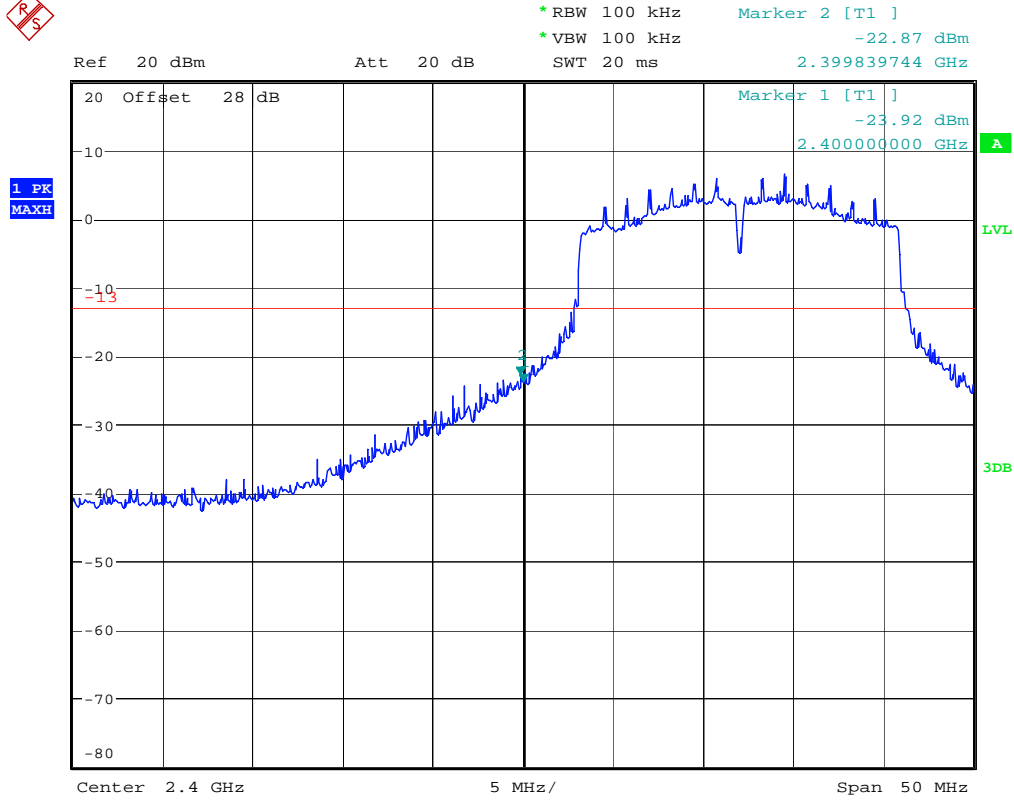

Date: 24.JUL.2012 10:40:01


Channel 1 – Lower Band Edge

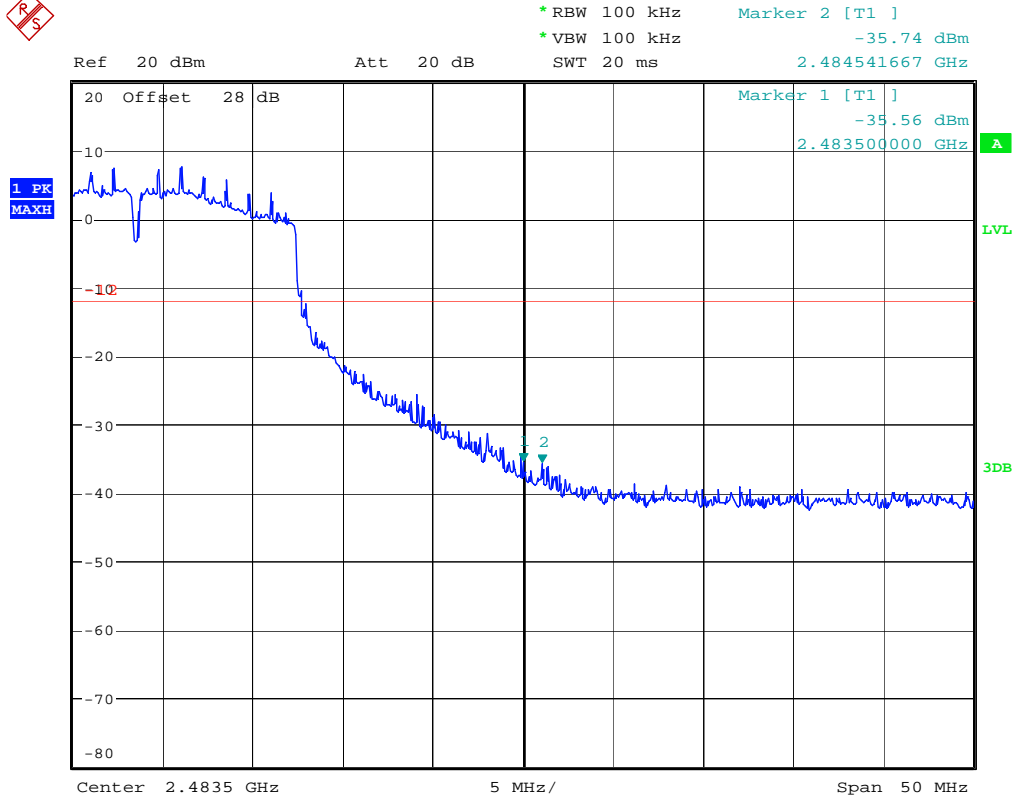

Date: 24.JUL.2012 10:41:29


Channel 11 – Upper Band Edge

802.11n 800ns GI @ 19.5Mbps Band Edge

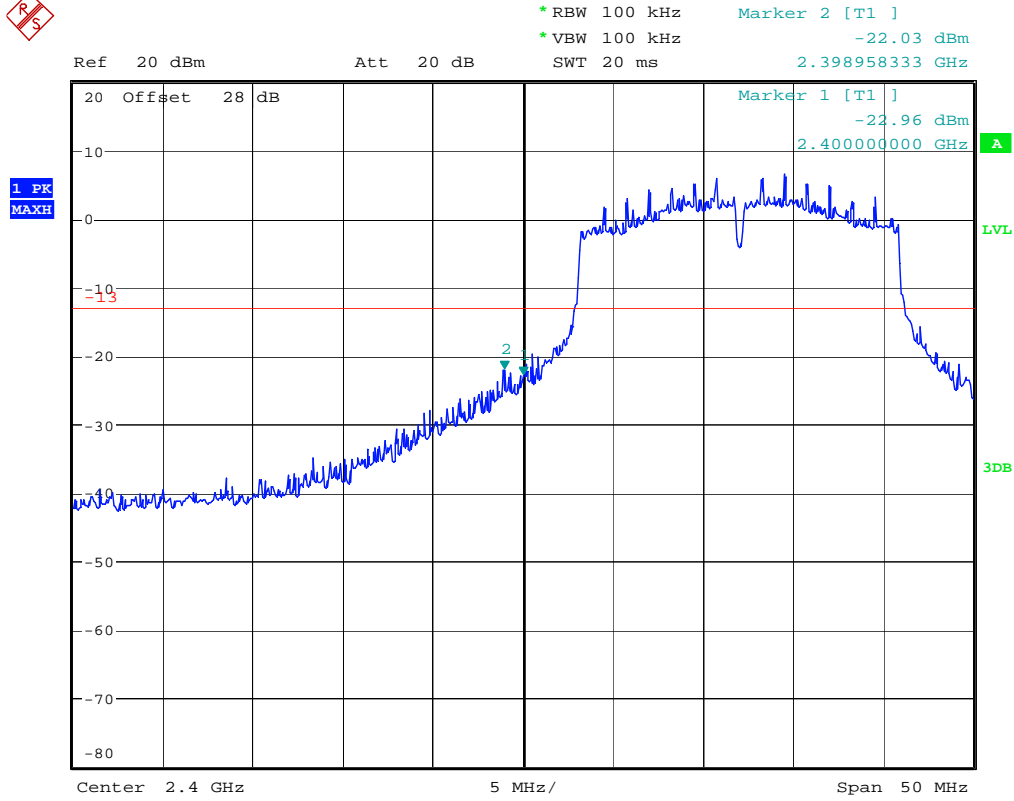

Date: 24.JUL.2012 10:43:41


Channel 1 – Lower Band Edge

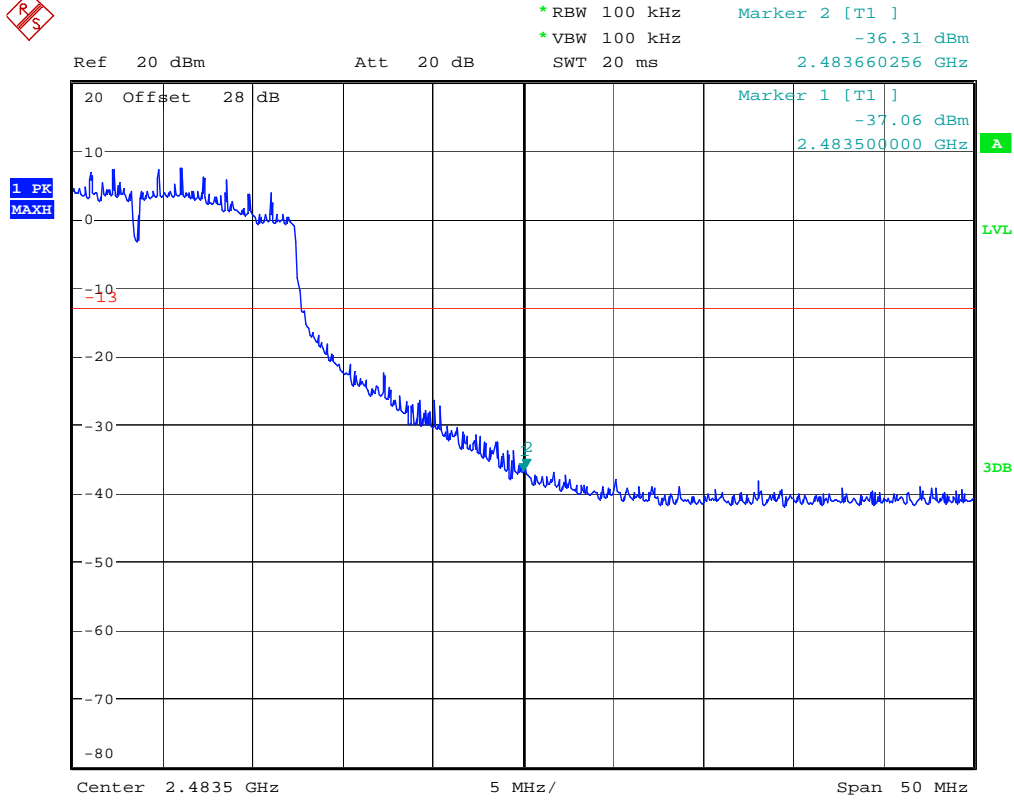

Date: 24.JUL.2012 10:42:35


Channel 11 – Upper Band Edge

802.11a 5G @ 9 Mbps Band Edge

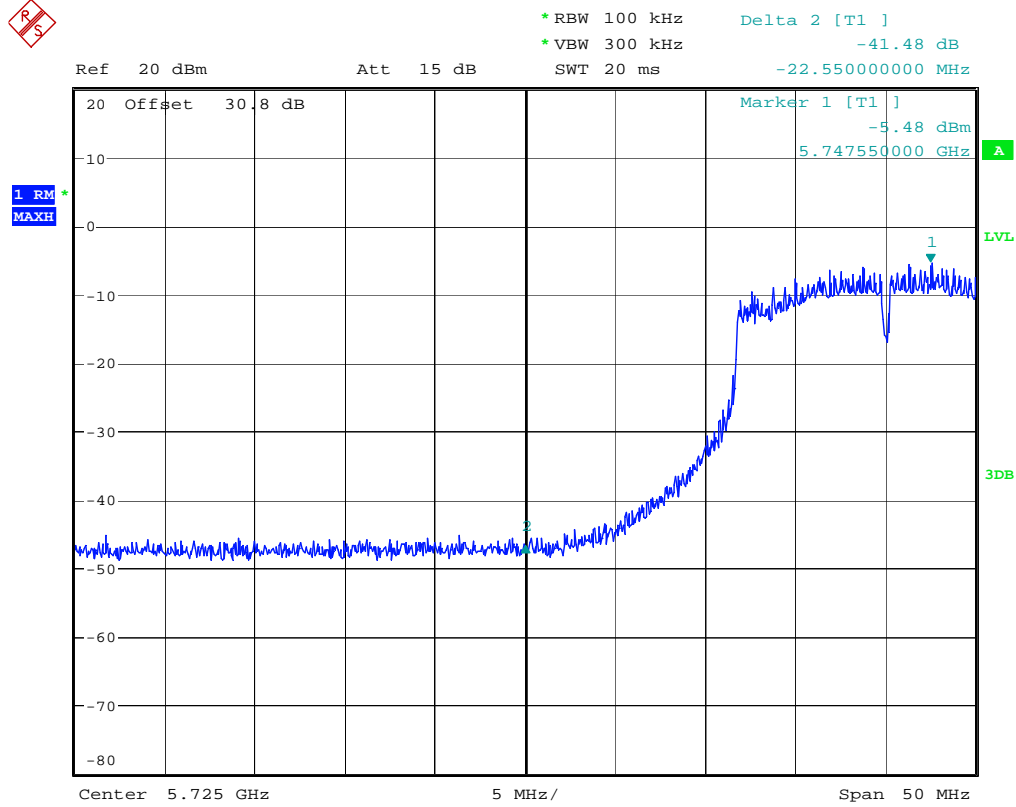

Date: 10.AUG.2012 16:20:10


Channel 149 – Lower Band Edge

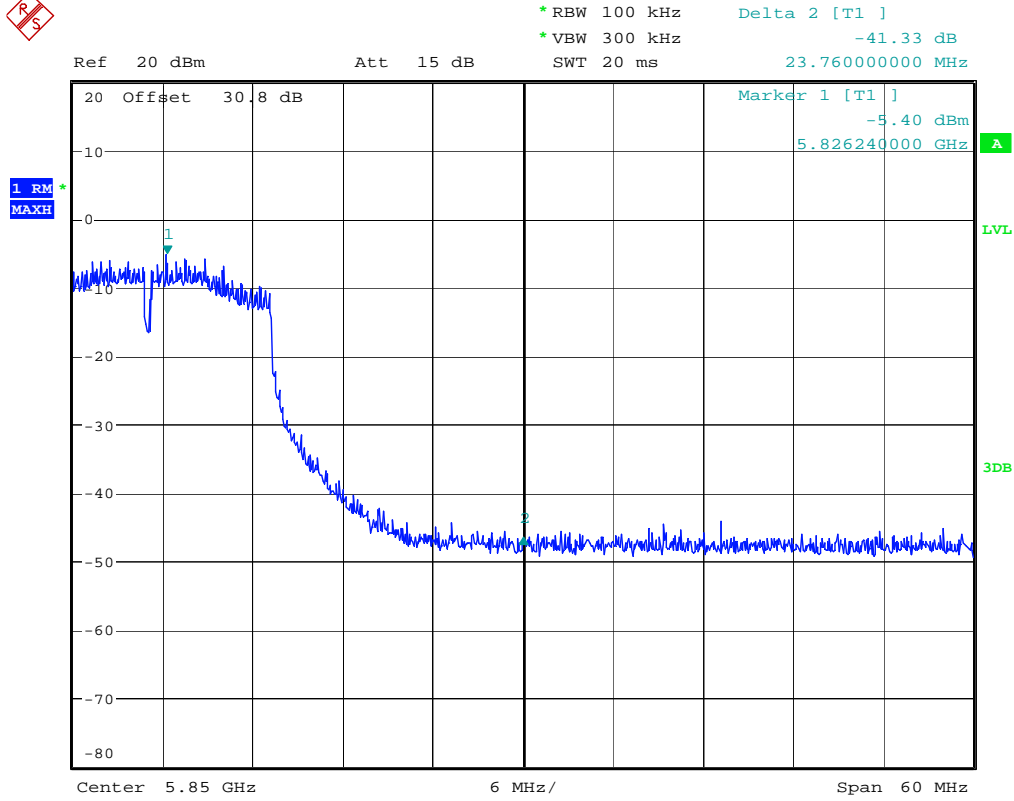

Date: 10.AUG.2012 16:22:21


Channel 165 – Upper Band Edge

802.11n 5G 400ns GI @ 7.2Mbps Band Edge

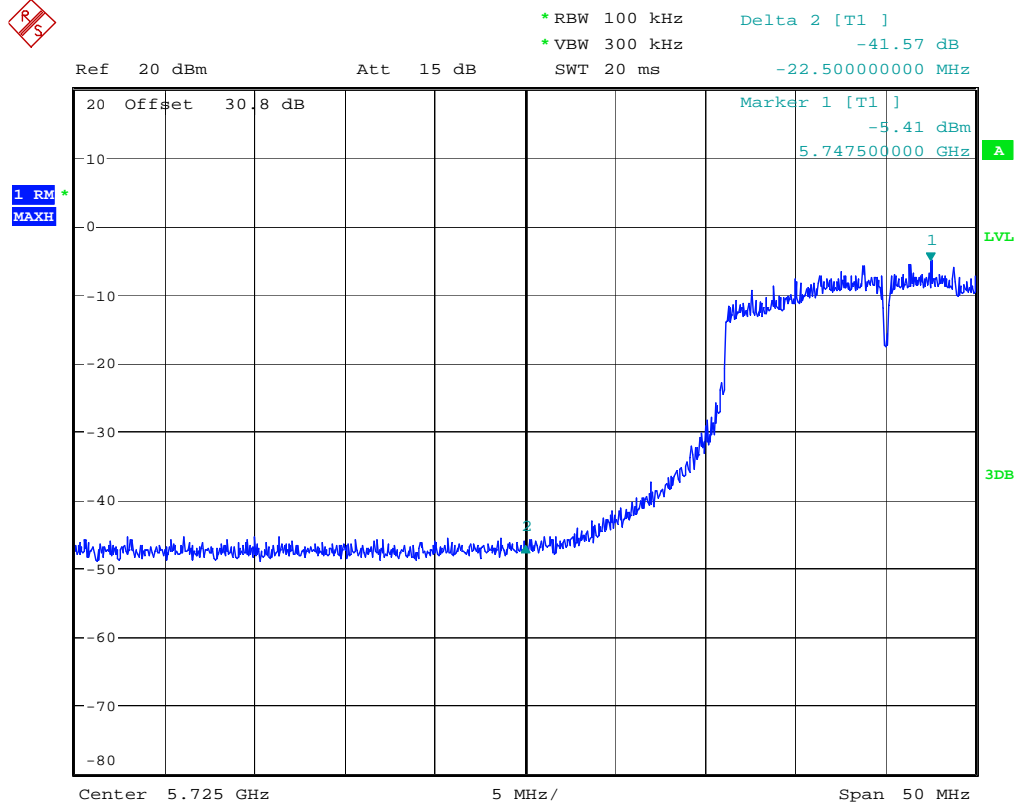

Date: 10.AUG.2012 16:25:23


Channel 149 – Lower Band Edge

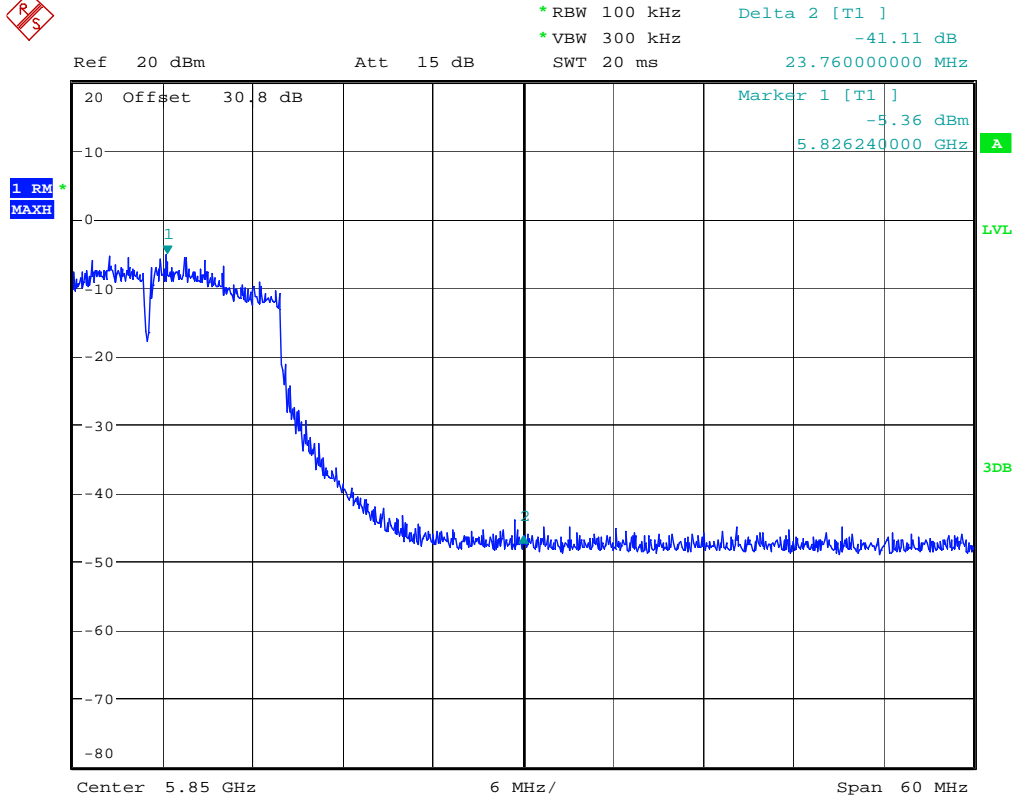

Date: 10.AUG.2012 16:23:39


Channel 165 – Upper Band Edge

802.11n 5G 800ns GI @ 6.5Mbps Band Edge

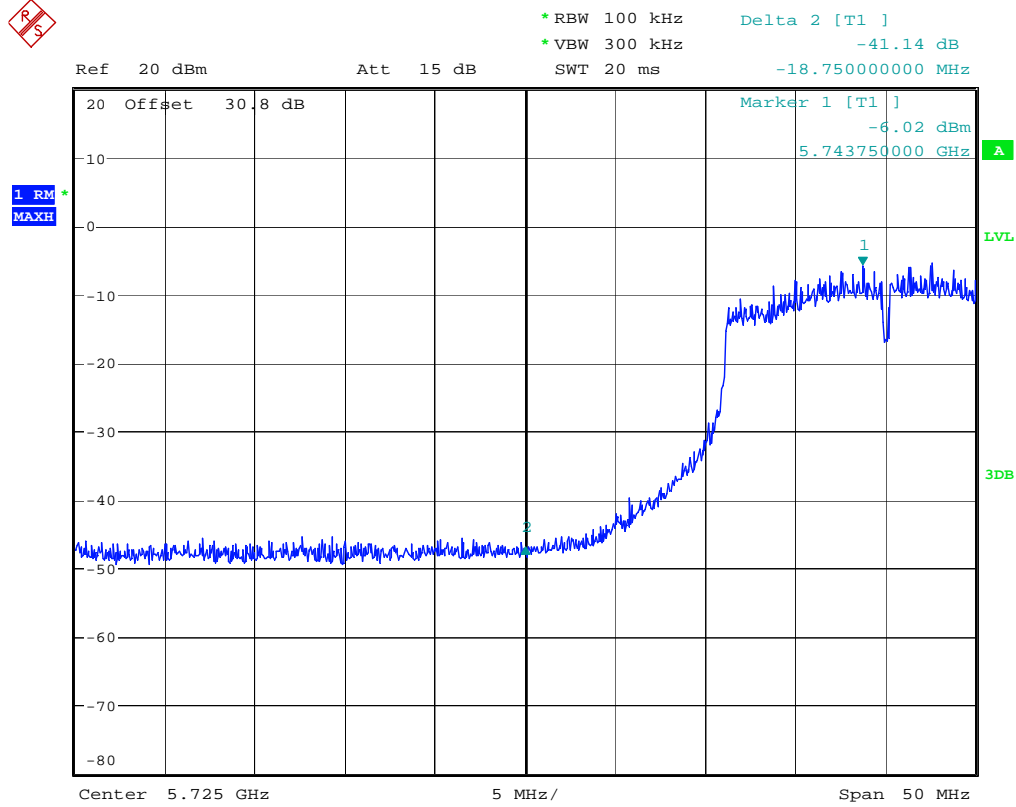

Date: 10.AUG.2012 16:26:20

Channel 149 – Lower Band Edge

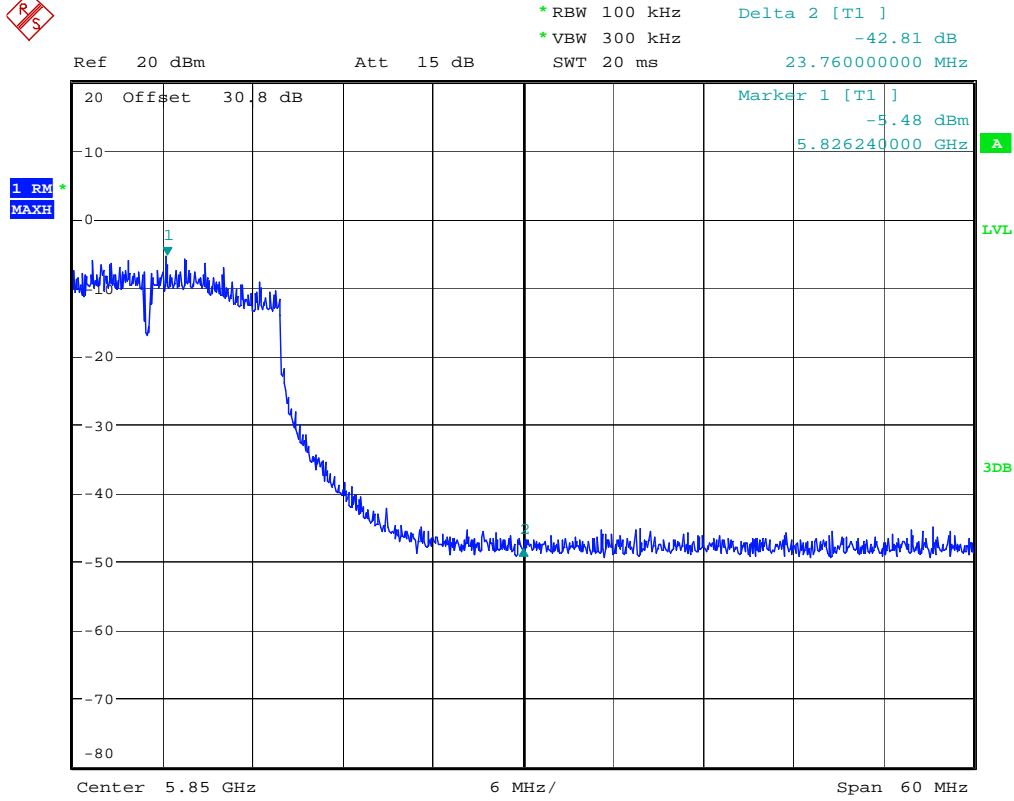

Date: 10.AUG.2012 16:27:20

Channel 165 – Upper Band Edge

AC LINE CONDUCTED EMISSIONS

CFR 47 Part 15.207

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors – Quasi Peak and Average Detector.

All modes of operation and data rates were investigated. The test results shown below represent the worst case condition.


Measurement Results

See attached:


802.11b @ 5.5 Mbps

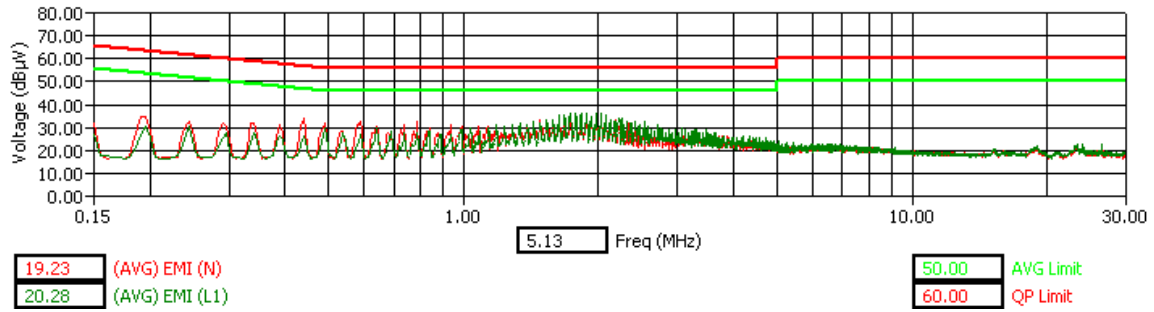


WLAN Channel 1 - Tx Mode – AVG Detector

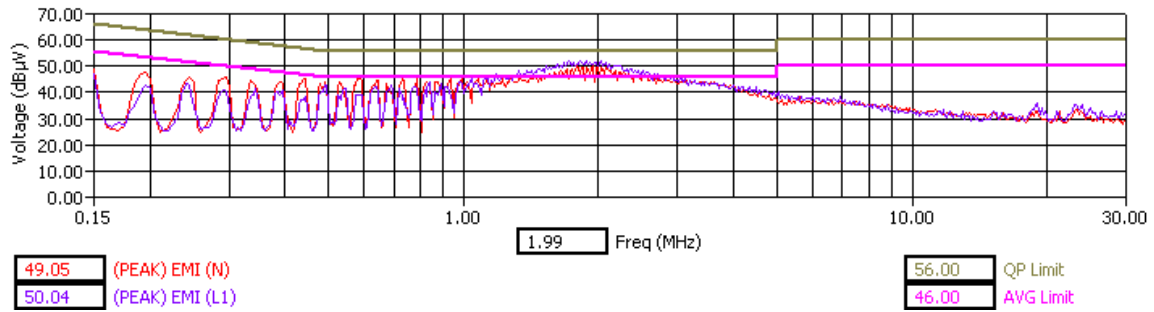


WLAN Channel 1 - Tx Mode – Peak Detector

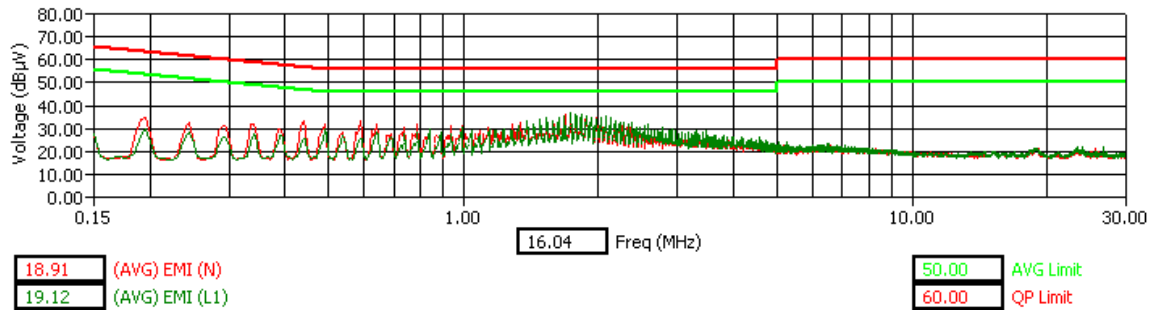


WLAN Channel 6 - Tx Mode - AVG Detector

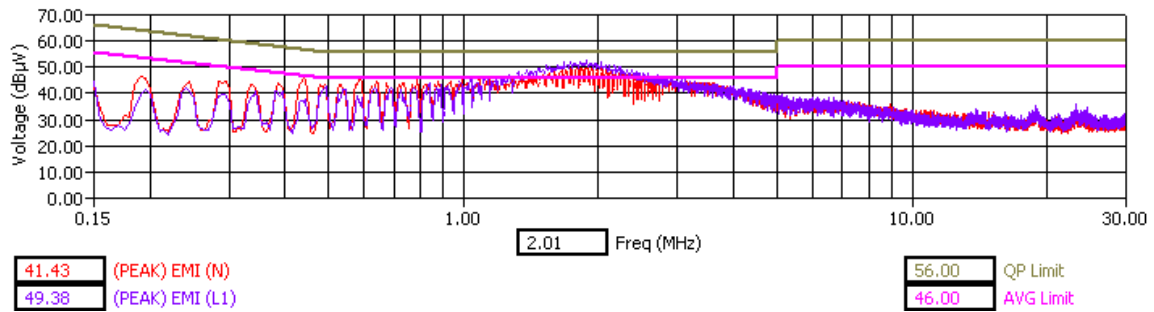

WLAN Channel 6 - Tx Mode - Peak Detector

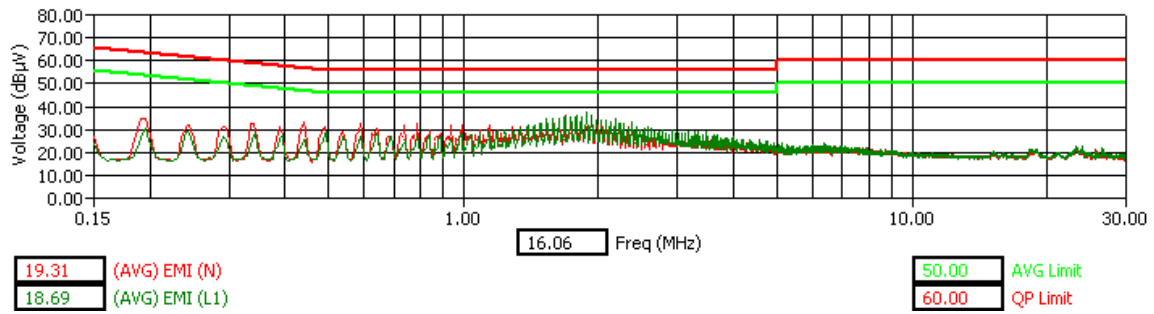


WLAN Channel 11 - Tx Mode - AVG Detector

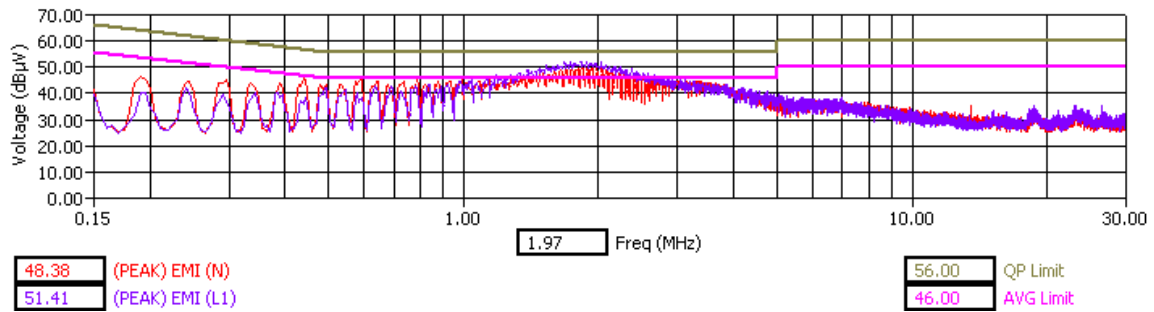


WLAN Channel 11 - Tx Mode - Peak Detector


802.11g @ 6 Mbps

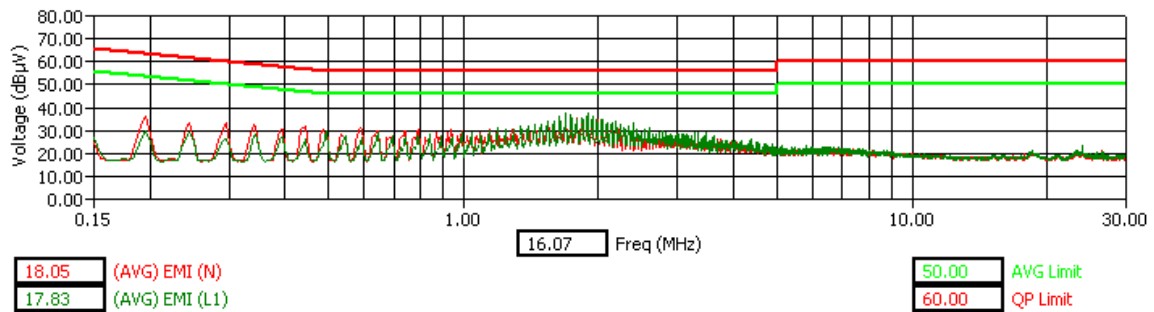


WLAN Channel 1 - Tx Mode - AVG Detector

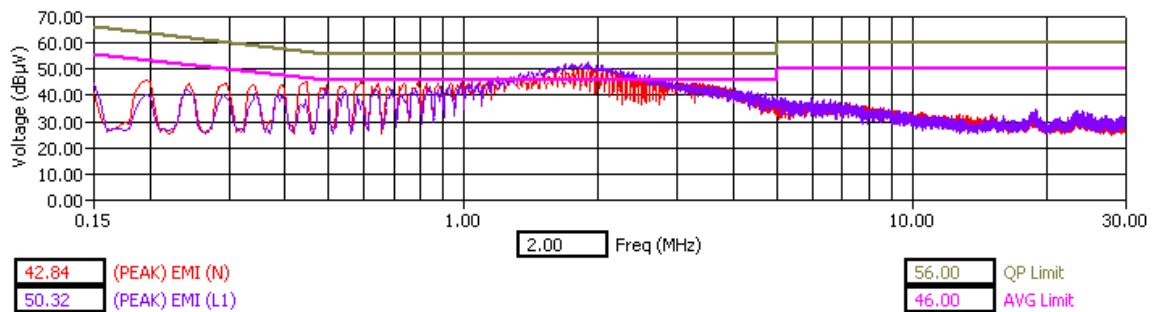


WLAN Channel 1 - Tx Mode - Peak Detector

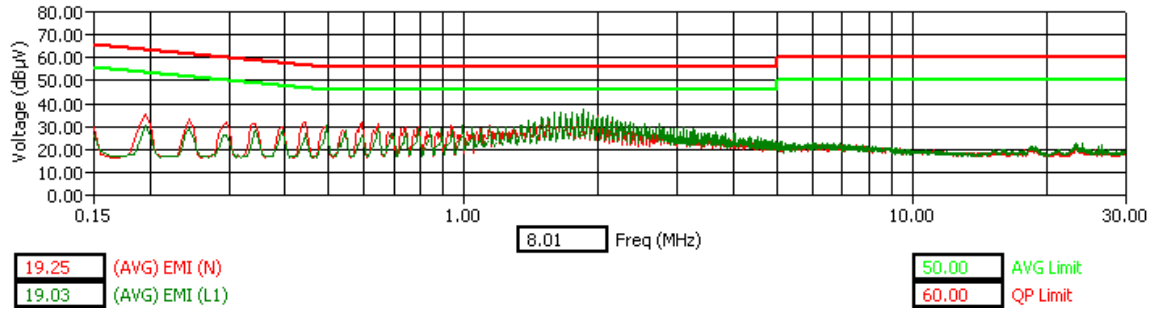


WLAN Channel 6 - Tx Mode - AVG Detector

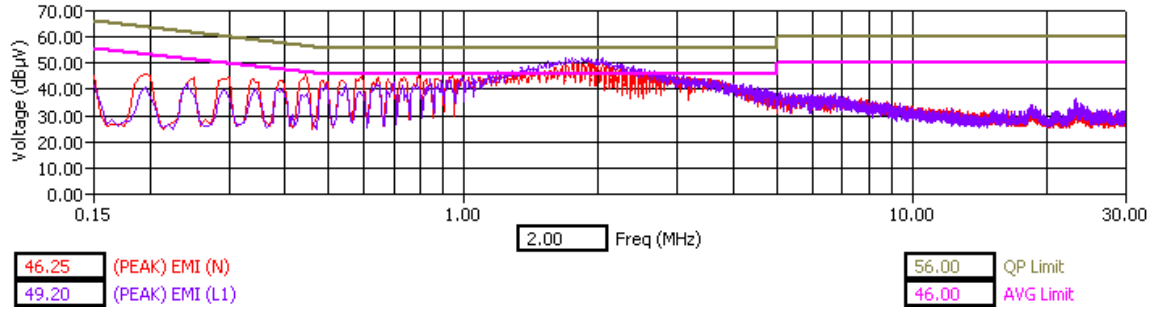

WLAN Channel 6 - Tx Mode - Peak Detector

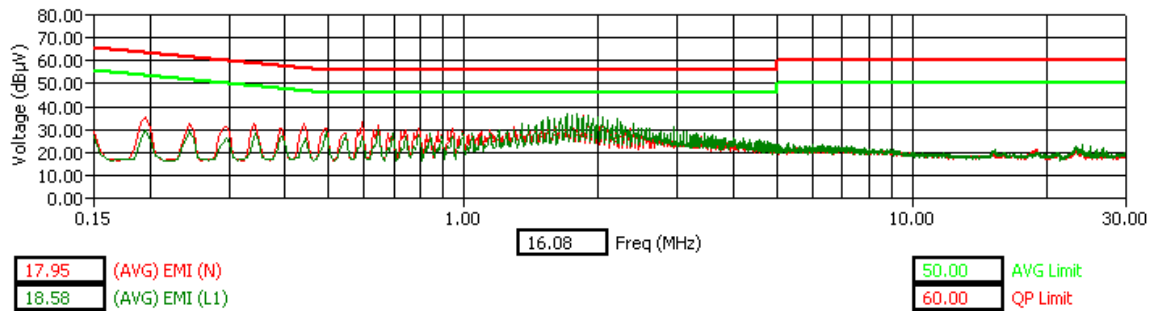

WLAN Channel 11 - Tx Mode - AVG Detector

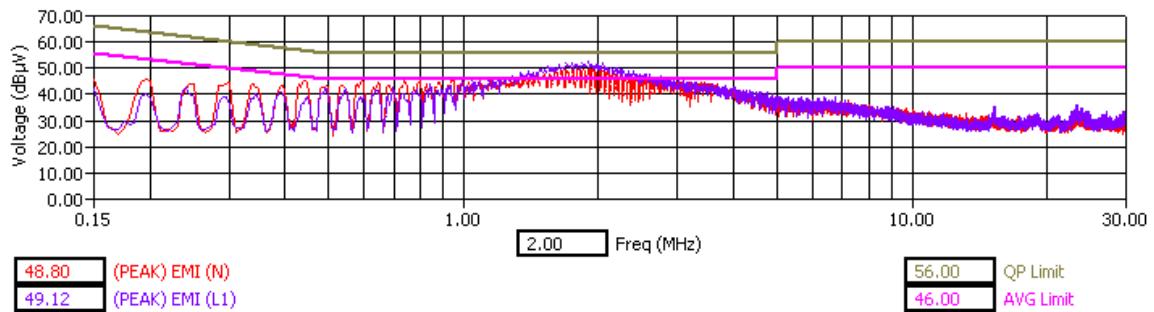

WLAN Channel 11 - Tx Mode - Peak Detector

End of Test Report