



MOTOROLA

Portable Cellular Phone SAR Test Report

Tests Requested By: Motorola Mobility, LLC
600 N. US Highway 45
Libertyville, IL 60048

Test Report #: 25388-1F Rev C
Date of Report: May 20, 2013
Date of Test: Apr 08, 2013 to Apr 18, 2013
FCC ID #: IHDT56PA2
IC ID #: 1090-T56PA2
Generic Name: M0DE2

Test Laboratory: Motorola Mobility, LLC - ADR Test Services Laboratory
600 N. US Highway 45
Libertyville, IL 60048

Report Author: Ketal Patel
RF Engineer

This laboratory is accredited to ISO/IEC 17025-2005 to perform the following tests:

Accreditation:



<p><u>Tests:</u> Electromagnetic Specific Absorption Rate</p>	<p><u>Procedures:</u> IEC 62209-1 RSS-102 IEEE 1528 - 2003 FCC OET Bulletin 65 (<i>including Supplement C</i>) Australian Communications Authority Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 2003 CENELEC EN 50360 ARIB Std. T-56 (2002)</p>
---	---

On the following products or types of products:

Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

Statement of Compliance:

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with IEEE 1528 / CENELEC EN62209-1 (2006), along with other published guidance indicated in the references at the end of this report, as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola Mobility, LLC 2013

This test report shall not be reproduced except in full, without written approval of the laboratory. The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report. Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

- 1 Introduction.....3
- 2 Details of the Device Under Test.....4
 - 2.1 Sample Information.....4
 - 2.2 Antenna Description.....4
 - 2.3 Transmission Band Summary5
 - 2.4 Device Test Setup, Operating Configurations, and Conducted Power Measurements.....6
 - 2.4.1 LTE.....6
 - 2.4.2 GSM.....12
 - 2.4.3 WCDMA14
 - 2.4.4 Wi-Fi 802.11.....16
 - 2.4.5 Bluetooth21
 - 2.4.6 Near-Field Communications.....22
 - 2.5 Transmitter power controlled conditions and modes23
 - 2.6 Accessories for the Device Under Test24
 - 2.6.1 Alternative Housings24
 - 2.6.2 Batteries24
 - 2.6.3 Body-Worn Carry Accessories24
- 3 Test Equipment Used.....25
 - 3.1 Dosimetric Measurement System.....25
 - 3.2 Additional Equipment26
 - 3.3 Test System Validations.....27
 - 3.4 Test System Verifications (System Performance Checks).....29
 - 3.5 Simulated Tissue Dielectric Properties31
- 4 Test Setup Information, SAR Measurement Results, and Analysis.....34
 - 4.1 Overview of Test Setup and Results34
 - 4.2 Head-Adjacent Exposure Results.....35
 - 4.3 Body-Worn Accessory Exposure Results37
 - 4.4 Mobile Hotspot Exposure Results.....38
 - 4.5 Measurement Variability Analysis.....42
 - 4.6 Description and Evaluation of Simultaneous Transmitters43
- 5 References to Test Standards and Guidance48

- Appendix 1: SAR Distribution Plots for Test System Verification
- Appendix 2: SAR Distribution Plots for Head-Adjacent Test Results
- Appendix 3: SAR Distribution Plots for Body-Worn Accessory Test Results
- Appendix 4: SAR Distribution Plots for Mobile Hotspot Test Results
- Appendix 5: Measurement Uncertainty Budget
- Appendix 6: Probe Calibration Certificates
- Appendix 7: Dipole Characterization Certificates

Revision History

Revision Version	Date	Notes
Rev. 0	May 20, 2013	Initial report release
Rev. A	25-Jun-2013	Updates for TCB inquiry
Rev. B	9 Jul-2013	Updates for Power Boost per FCC inquiry
Rev. C	25 Jul-2013	Updates for TCB inquiry

1 Introduction

The Motorola Mobility ADR Test Services Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4], [5], [9], and per FCC KDB 941225 D06 for mobile hotspot operation. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1 g average set in [3] and 2.0 W/kg in a 10 g average set in [2].

For ANSI / IEEE C95.1 (1 g), the final stand-alone SAR readings for this phone are given in the table below. These measurements were performed using a DASY52™ system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich Switzerland.

Transmit Band	Head SAR (1 g ^W / _{kg})	Body-Worn Accessory SAR (1 g ^W / _{kg})	Mobile Hotspot SAR (1 g ^W / _{kg})
LTE Band 2	0.72	0.75	1.32
LTE Band 4	0.39	0.50	1.02
LTE Band 17	0.25	0.08	0.28
GSM 850	0.81	0.66	0.58
GSM 1900	0.37	0.30	0.88
WCDMA 850	0.29	0.27	0.48
WCDMA 1700	0.48	0.47	1.14
WCDMA 1900	0.64	0.58	1.14
Wi-Fi 2.4 GHz	0.98	0.06	0.46
Wi-Fi 5.2 GHz	0.50	0.18	N/A
Wi-Fi 5.8 GHz	0.43	0.19	0.26
Bluetooth	No Testing Required		
Simultaneous SAR	1.53		

2 Details of the Device Under Test

2.1 Sample Information

Serial Number(s) (Functional Use)	LXTU1J0066 (GSM conducted power measurements and SAR testing) LXTU1J0017 (WCDMA Band 2/5 SAR testing) LXTU1J0020 (WCDMA Band 4/LTE Band 4 SAR testing) LXTU1J0003 (WCDMA conducted power measurements) LXTU1J0034 (LTE Band 2/17 conducted power measurements and SAR testing) LXAA1W0032 (Wi-Fi SAR testing) LXAA1W0004 (Wi-Fi conducted power measurements) LXAA1W0021 (Bluetooth conducted power measurements)
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype
Device Category	Portable (Mobile Station Class B)
RF Exposure Limits	General Population / Uncontrolled

2.2 Antenna Description

Main (835/1730/1880 MHz) Antenna


Type	Internal	
Location	Bottom Edge of Transceiver	
Dimensions	Width	6.94 mm
	Length	49.4 mm

LTE (710 MHz) Antenna

Type	Internal	
Location	Bottom-Left Edge of Transceiver	
Dimensions	Width	11.53 mm
	Length	24.9 mm

Bluetooth/Wi-Fi GHz Antenna

Type	Internal	
Location	Left Edge of Transceiver	
Dimensions	Width	11.0 mm
	Length	25.22 mm

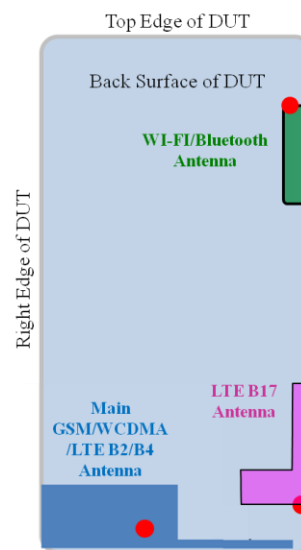

2.3 Transmission Band Summary

Mode(s) of Operation	Modulation Mode(s)	Target Output Power Setting	Maximum Output Power Setting	Duty Cycle	Transmitting Frequency Range(s)
LTE Band 2	QPSK, 16QAM	23.0 dBm	24.0 dBm	1:1	1850.0 - 1910.0 MHz
LTE Band 4	QPSK, 16QAM	23.0 dBm	24.0 dBm	1:1	1710.0 - 1755.0 MHz
LTE Band 17	QPSK, 16QAM	22.9 dBm	24.0 dBm	1:1	704.0 - 716.0 MHz
GSM 850	GMSK	32.5 dBm	33.5 dBm	1:8.3	824.2 - 848.8 MHz
GPRS/EDGE 850	GMSK	32.5 dBm	33.5 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	824.2 - 848.8 MHz
EDGE 850	8PSK	26.0 dBm	28.0 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	824.2 - 848.8 MHz
GSM 900	GMSK	32.5 dBm	33.5 dBm	1:8.3	880.2 - 914.8 MHz
GPRS/EDGE 900	GMSK	32.5 dBm	33.5 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	880.2 - 914.8 MHz
EDGE 900	8PSK	26.0 dBm	28.0 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	880.2 - 914.8 MHz
GSM 1800	GMSK	29.5 dBm	30.5 dBm	1:8.3	1710.2 - 1784.8 MHz
GPRS/EDGE 1800	GMSK	29.5 dBm	30.5 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	1710.2 - 1784.8 MHz
EDGE 1800	8PSK	25.0 dBm	27.0 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	1710.2 - 1784.8 MHz
GSM 1900	GMSK	29.5 dBm	30.5 dBm	1:8.3	1850.2 - 1909.8 MHz
GPRS/EDGE 1900	GMSK	29.5 dBm	30.5 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	1850.2 - 1909.8 MHz
EDGE 1900	8PSK	25.0 dBm	27.0 dBm	1:8.3, 2:8.3, 3:8.3, 4:8.3	1850.2 - 1909.8 MHz
WCDMA 850	QPSK	22.9 dBm	24.0 dBm	1:1	826.4 - 846.6 MHz
WCDMA 900	QPSK	22.9 dBm	24.0 dBm	1:1	882.4 - 912.6 MHz
WCDMA 1700	QPSK	22.9 dBm	24.0 dBm	1:1	1712.0 - 1752.0 MHz
WCDMA 1900	QPSK	22.9 dBm	24.0 dBm	1:1	1852.4 - 1907.6 MHz
WCDMA 2100	QPSK	22.9 dBm	24.0 dBm	1:1	1922.4 - 1977.6 MHz
Wi-Fi 802.11b/g/n	BPSK	19.35 dBm		1:1	2412.0 - 2462.0 MHz
Wi-Fi 802.11a/n/ac	BPSK	15.60 dBm		1:1	5180.0 - 5240.0 MHz
Wi-Fi 802.11a/n/ac	BPSK	20.13 dBm		1:1	5745.0 - 5825.0 MHz
Bluetooth	GFSK	10.59 dBm		1:1	2402.0 - 2480.0 MHz

2.4 Device Test Setup, Operating Configurations, and Conducted Power Measurements

2.4.1 LTE

Technical Description

LTE Summary Information

FCC ID			IHDT56PA2
Form Factor			Portable Handset
Frequency Range(s)			See Section 2.3
Channel Bandwidth(s)			Band 2: 20, 15, 10, 5, 3, 1.4 MHz Band 4: 20, 15, 10, 5, 3, 1.4 MHz Band 17: 10, 5 MHz
Low, Middle, High Channel Numbers and Frequencies			
Low	Mid	High	Band: Channel Bandwidth
18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)	Band 2: 20 MHz
18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)	Band 2: 15 MHz
18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)	Band 2: 10 MHz
18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)	Band 2: 5 MHz
18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)	Band 2: 3 MHz
18606 (1850.6 MHz)	18900 (1880.0 MHz)	19194 (1909.4 MHz)	Band 2: 1.4 MHz
--	20175 (1732.5 MHz)	--	Band 4: 20 MHz
20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)	Band 4: 15 MHz
20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)	Band 4: 10 MHz
19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)	Band 4: 5 MHz
19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)	Band 4: 3 MHz
19956 (1710.6 MHz)	20175 (1732.5 MHz)	20394 (1754.4 MHz)	Band 4: 1.4 MHz
--	23790 (710.0 MHz)	--	Band 17: 10 MHz
--	23790 (710.0 MHz)	--	Band 17: 5 MHz
UE Category			3
Modulations Supported			QPSK, 16QAM
Description of LTE Tx and Antenna Implementation			Band 2: 1 TX/RX Antenna, 1 RX Antenna Band 4: 1 TX/RX Antenna, 1 RX Antenna Band 17: 1 TX/RX Antenna, 1 RX Antenna
LTE Voice Available?			Yes (3 rd Party VOIP clients Only)
Hotspot with LTE + Wi-Fi?			Yes
Hotspot with LTE + Wi-Fi active with Voice sessions?			No (SVLTE not supported)
LTE MPR Permanently Implemented per 3GPP TS 36.101?			Yes
A-MPR disabled for SAR Testing?			Yes
Conducted power table providing measurements across 1 RB, 50% RB and 100% RB allocations?			Yes
Table provided specifying other US wireless operating modes?			Yes
Table provided specifying maximum average conducted power for these other wireless modes?			Yes
Table provided identifying simultaneous transmission conditions?			Yes
Power Reduction used for SAR compliance?			Yes
Power Reduction used for GSM/WCDMA?			Yes
Power Reduction used for LTE?			Yes
Power Reduction used for SVLTE?			N/A
Test Equipment used			CMW500 SW version 2.1.28.9

LTE Maximum Power Reduction (MPR) conditions are defined in 3GPP 36-521, section 6.2.3.3:

6.2.3.3 Minimum conformance requirements

For UE Power Class 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2.3-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1.

Table 6.2.3.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5.3 apply. The normative reference for this requirement is TS 36.101 clause 6.2.3.

For the device's architecture, MPR is permanently implemented. Per the chart above, the following MPR is used:

Modulation	1.4 MHz		3 MHz		5 MHz		10 MHz		15 MHz		20 MHz	
	# of RBs	MPR (dB)	# of RBs	MPR (dB)	# of RBs	MPR (dB)	# of RBs	MPR (dB)	# of RBs	MPR (dB)	# of RBs	MPR (dB)
QPSK	> 5	1	> 4	1	> 8	1	> 12	1	> 16	1	> 18	1
16 QAM	≤ 5	1	≤ 4	1	≤ 8	1	≤ 12	1	≤ 16	1	≤ 18	1
16 QAM	> 5	2	> 4	2	> 8	2	> 12	2	> 16	2	> 18	2

The table applies for any RB start value. RBs are assigned contiguously. Thus, given the maximum power limits stated in 2.2 and the MPR described above, the maximum power for the SAR test cases in channel bandwidths greater than 1.4 MHz is as follows:

Test Case	Band 2	Band 4	Band 17
	Max Power (dBm)	Max Power (dBm)	Max Power (dBm)
QPSK, 1 RB Allocation	24.0	24.0	24.0
QPSK, 50% RB Allocation	23.0	23.0	23.0
QPSK, 100% RB Allocation	23.0	23.0	23.0
16QAM, 1 RB Allocation	23.0	23.0	23.0
16QAM, 50% RB Allocation	22.0	22.0	22.0
16QAM, 100% RB Allocation	22.0	22.0	22.0

The maximum power for the SAR test cases in a 1.4 MHz channel bandwidth is as follows:

Test Case	Band 2	Band 4
	Max Power (dBm)	Max Power (dBm)
QPSK, 1 RB Allocation	24.0	24.0
QPSK, 50% RB Allocation	24.0	24.0
QPSK, 100% RB Allocation	23.0	23.0
16QAM, 1 RB Allocation	23.0	23.0
16QAM, 50% RB Allocation	23.0	23.0
16QAM, 100% RB Allocation	22.0	22.0

Exposure Conditions and Test Exclusions

Mode	Type	Head-Adjacent	Body-Worn Accessory	Mobile Hotspot
All Modes, QPSK modulation	Data	Tested (1) (3)	Tested (1) (3)	Tested(3)
All Modes, 16QAM modulation	Data	Excluded (2) (3)	Excluded (2) (3)	Excluded (2) (3)

Notes:

- (1) QPSK modulation, as a data-only mode, was tested against the Head and in Body-Worn Accessory exposure conditions to support evaluation for 3rd Party VOIP applications potentially installed and used by the end-user.
- (2) 16QAM modulation was excluded from testing per FCC KDB 941225 D05, as the maximum output power in this mode is not more than ½ dB higher than each comparable mode in QPSK and the *reported* SAR results for QPSK mode testing were less than 1.45 W/kg.
- (3) The device does not support SvLTE, despite the Band 17 LTE architecture. This is a software limitation specified by the carrier customer.

Device Test Setup

For LTE modes, the test sample was operated using transmission to a base station simulator. The base station simulator was configured per the guidance provided in FCC KDB 941225 D05, with closed-loop power control enforced to ensure the phone transmits at maximum output power.

Conducted Power Measurements

LTE Band 2

LTE Band 2 (20 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	50	99	0	25	50	0	0	50	99	0	25	50	0		
RB Allocation	1	1	1	50	50	50	100	1	1	1	50	50	50	100		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
20 MHz	1860.0	18700	22.84	22.78	22.93	21.82	21.88	21.92	21.89	21.65	21.50	21.68	21.02	21.05	21.09	21.10
20 MHz	1880.0	18900	22.87	23.19	23.06	22.10	22.26	22.22	22.25	21.93	22.09	22.04	21.26	21.35	21.22	21.22
20 MHz	1900.0	19100	23.09	23.02	23.11	22.05	22.03	22.11	22.09	22.20	22.06	22.15	21.10	21.05	21.12	21.04

LTE Band 2 (15 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	37	74	0	19	39	0	0	37	74	0	19	39	0		
RB Allocation	1	1	1	36	36	36	75	1	1	1	36	36	36	75		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
15 MHz	1857.5	18675	23.12	22.89	23.11	21.92	21.97	21.89	21.99	22.20	21.87	22.00	20.93	20.91	20.87	21.02
15 MHz	1880.0	18900	23.22	23.25	23.12	22.22	22.29	22.23	22.25	21.78	21.79	21.74	21.22	21.36	21.29	21.15
15 MHz	1902.5	19125	23.10	23.06	23.04	22.02	21.94	21.98	21.97	22.21	22.12	22.10	21.13	21.02	21.08	21.14

LTE Band 2 (10 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	25	49	0	12	25	0	0	25	49	0	12	25	0		
RB Allocation	1	1	1	25	25	25	50	1	1	1	25	25	25	50		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
10 MHz	1855.0	18650	23.08	22.96	22.93	22.13	21.97	21.90	21.91	21.58	21.46	21.49	21.13	21.07	20.96	21.01
10 MHz	1880.0	18900	23.16	23.19	23.09	22.25	22.25	22.25	22.28	21.86	21.80	21.78	21.24	21.31	21.21	21.21
10 MHz	1905.0	19150	23.03	23.02	22.97	22.00	21.98	22.05	21.88	22.06	22.05	22.11	21.10	21.07	21.15	21.00

LTE Band 2 (5 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	12	24	0	6	13	0	0	12	24	0	6	13	0		
RB Allocation	1	1	1	12	12	12	25	1	1	1	12	12	12	25		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
5 MHz	1852.5	18625	23.07	23.05	22.86	22.00	22.11	21.94	22.00	22.31	22.38	22.29	21.07	21.08	20.98	21.00
5 MHz	1880.0	18900	23.27	23.27	23.19	22.29	22.27	22.20	22.25	21.85	21.80	21.74	21.23	21.22	21.24	21.27
5 MHz	1907.5	19175	22.99	23.03	22.99	21.95	21.97	22.05	22.00	22.16	22.17	22.09	21.10	21.12	21.11	21.07

LTE Band 2 (3 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	7	14	0	3	7	0	0	7	14	0	3	7	0		
RB Allocation	1	1	1	8	8	8	15	1	1	1	8	8	8	15		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
3 MHz	1851.5	18615	23.10	23.06	23.10	22.07	22.03	22.04	22.05	22.11	22.15	22.22	21.05	21.02	21.06	21.14
3 MHz	1880.0	18900	23.13	23.17	23.07	22.27	22.27	22.34	22.32	21.79	21.84	21.81	21.24	21.24	21.30	21.21
3 MHz	1908.5	19185	22.94	22.86	22.81	21.99	21.99	21.93	21.93	21.63	21.52	21.50	21.13	21.09	21.10	21.03

LTE Band 2 (1.4 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	3	5	0	1	3	0	0	3	5	0	1	3	0		
RB Allocation	1	1	1	3	3	3	6	1	1	1	3	3	3	6		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00		
Channel BW	Frequency (MHz)	Channel														
1.4 MHz	1850.6	18606	23.04	22.97	23.03	22.94	22.94	23.00	22.00	21.82	21.84	21.84	21.97	21.98	21.97	21.12
1.4 MHz	1880.0	18900	23.13	23.21	23.24	23.19	23.21	23.22	22.33	21.83	21.80	21.85	22.46	22.47	22.44	21.41
1.4 MHz	1909.4	19194	22.91	23.27	22.86	22.98	22.96	22.92	21.89	22.12	22.10	22.05	21.94	21.93	21.88	20.83

LTE Band 4

LTE Band 4 (20 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	50	99	0	25	50	0	0	0	50	99	0	25	50	0	
RB Allocation	1	1	1	50	50	50	100	1	1	1	50	50	50	100		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
20 MHz	1732.5	20175	22.60	22.60	22.62	21.47	21.59	21.55	21.59	21.39	21.43	21.49	20.64	20.57	20.57	20.64

LTE Band 4 (15 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	37	74	0	19	39	0	0	0	37	74	0	19	39	0	
RB Allocation	1	1	1	36	36	36	75	1	1	1	36	36	36	75		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
15 MHz	1717.5	20025	22.55	22.51	22.70	21.41	21.43	21.51	21.47	21.60	21.61	21.56	20.33	20.43	20.44	20.42
15 MHz	1732.5	20175	22.55	22.54	22.62	21.45	21.54	21.61	21.55	21.15	21.08	21.22	20.55	20.52	20.53	20.45
15 MHz	1747.5	20325	22.70	22.77	22.56	21.53	21.58	21.59	21.42	21.73	21.75	21.65	20.47	20.62	20.56	20.44

LTE Band 4 (10 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	25	49	0	12	25	0	0	0	25	49	0	12	25	0	
RB Allocation	1	1	1	25	25	25	50	1	1	1	25	25	25	50		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
10 MHz	1715.0	20000	22.60	22.49	22.59	21.47	21.45	21.40	21.39	21.65	21.63	21.70	20.53	20.49	20.44	20.48
10 MHz	1732.5	20175	22.39	22.49	22.48	21.59	21.53	21.60	21.54	21.06	21.16	21.11	20.56	20.58	20.57	20.49
10 MHz	1750.0	20350	22.58	22.64	22.55	21.54	21.53	21.57	21.50	21.64	21.71	21.66	20.58	20.58	20.52	20.49

LTE Band 4 (5 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	12	24	0	6	13	0	0	0	12	24	0	6	13	0	
RB Allocation	1	1	1	12	12	12	25	1	1	1	12	12	12	25		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
5 MHz	1712.5	19975	22.54	22.48	22.45	21.54	21.51	21.60	21.50	21.80	21.80	21.77	20.47	20.49	20.49	20.39
5 MHz	1732.5	20175	22.55	22.54	22.52	21.63	21.59	21.59	21.57	21.15	21.13	21.04	20.52	20.50	20.53	20.61
5 MHz	1752.5	20375	22.65	22.51	22.57	21.54	21.44	21.53	21.50	21.67	21.60	21.63	20.55	20.54	20.55	20.53

LTE Band 4 (3 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	7	14	0	3	7	0	0	7	14	0	3	7	0		
RB Allocation	1	1	1	8	8	8	15	1	1	1	8	8	8	15		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
3 MHz	1711.5	19965	22.55	22.54	22.58	21.54	21.50	21.53	21.51	21.57	21.68	21.65	20.49	20.47	20.40	20.57
3 MHz	1732.5	20175	22.52	22.46	22.43	21.53	21.58	21.51	21.54	21.15	21.20	21.06	20.53	20.54	20.55	20.54
3 MHz	1753.5	20385	22.42	22.43	22.44	21.43	21.46	21.46	21.52	21.58	21.09	21.02	20.37	20.42	20.41	20.38

LTE Band 4 (1.4 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	3	5	0	1	3	0	0	3	5	0	1	3	0		
RB Allocation	1	1	1	3	3	3	6	1	1	1	3	3	3	6		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00		
Channel BW	Frequency (MHz)	Channel														
1.4 MHz	1710.6	19956	22.49	22.52	22.51	22.44	22.43	22.39	21.54	21.58	21.60	21.59	21.45	21.46	21.47	20.36
1.4 MHz	1732.5	20175	22.49	22.49	22.50	22.54	22.56	22.57	21.59	21.58	21.74	21.69	21.53	21.53	21.48	20.42
1.4 MHz	1754.4	20394	22.65	22.41	22.47	22.52	22.53	22.52	21.54	21.31	21.28	21.33	21.48	21.48	21.47	20.51

LTE Band 17

LTE Band 17 (10 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	25	49	0	12	25	0	0	25	49	0	12	25	0		
RB Allocation	1	1	1	25	25	25	50	1	1	1	25	25	25	50		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
10 MHz	710.0	23790	23.12	22.98	23.16	22.07	22.03	22.12	22.04	22.28	22.19	22.29	21.05	21.12	21.12	21.00

LTE Band 17 (5 MHz Channel Bandwidth) - Measured Conducted Power (dBm)																
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM		
Start RB	0	12	24	0	6	13	0	0	12	24	0	6	13	0		
RB Allocation	1	1	1	12	12	12	25	1	1	1	12	12	12	25		
Max Limit (dBm)	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00		
MPR Target (dB)	0	0	0	-1	-1	-1	-1	-1	-1	-1	-2	-2	-2	-2		
Max Limit with MPR (dBm)	24.00	24.00	24.00	23.00	23.00	23.00	23.00	23.00	23.00	23.00	22.00	22.00	22.00	22.00		
Channel BW	Frequency (MHz)	Channel														
5 MHz	710.0	23790	23.13	23.07	23.03	22.07	22.04	22.09	22.10	22.26	22.13	22.15	21.09	21.06	21.11	21.03

2.4.2 GSM

Technical Description

The phone under test contains a GSM transmitter that supports voice (circuit-switched) capability, and data (packet-switched) capabilities over GPRS/EDGE (GMSK) or EDGE (8PSK).

Exposure Conditions and Test Exclusions

Mode	Type	Head-Adjacent	Body-Worn Accessory	Mobile Hotspot
GSM (GMSK 1-Slot)	Voice	Tested	Tested	N/A
GPRS/EDGE (GMSK Multi-Slot)	Data	Tested (1) (3)	Tested (1) (3)	Tested (3)
EDGE (8PSK Multi-Slot)	Data	Excluded (2) (3)	Excluded (2) (3)	Excluded (2) (3)

Notes:

- (1) GPRS/EDGE (GMSK Multi-Slot), as a data-only mode, was tested against the Head and in Body-Worn Accessory exposure conditions to support evaluation for 3rd Party VOIP applications potentially installed and used by the end-user.
- (2) EDGE (8PSK Multi-Slot) was excluded from testing per FCC KDB 941225 D03, as the source-based time-averaged output power in this mode is lower than that measured in normal GSM voice mode and GPRS/EDGE (GMSK Multi-Slot) data modes.
- (3) GPRS/EDGE (GMSK Multi-Slot) and EDGE (8PSK Multi-Slot) utilize reduced output power as additional time slots are transmitted in the uplink frame, as demonstrated in the following table. The values noted are maximum limits, and conform to the same power tune-up tolerances noted in section 2.3 above. The multi-slot configuration that results in the highest source-based time-averaged output power from the device was chosen for testing when testing of these modes is required.

GSM Data Functionality	GPRS/EDGE Class 12 (4 uplink timeslots; 4 downlink timeslots; 5 total timeslots per frame)							
	Class B (DTM not supported)							
Mode(s) of Operation	GPRS/EDGE 850				GPRS/EDGE 1900			
Modulation	GMSK				GMSK			
Maximum TX Burst Output Power Setting (dBm)	33.5	31.0	28.75	28.0	30.5	28.0	25.75	25.0
Maximum Time Average Output Power Setting (dBm)	24.5	25.0	24.55	25.0	21.5	22.0	21.55	22.0
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				1850.2 - 1909.8 MHz			
Mode(s) of Operation	EDGE 850				EDGE 1900			
Modulation	8PSK				8PSK			
Maximum TX Burst Output Power Setting (dBm)	28.0	25.5	24.0	22.5	27.0	24.5	22.75	21.5
Maximum Time Average Output Power Setting (dBm)	19.0	19.5	19.8	19.5	18.0	18.5	18.55	18.5
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				1850.2 - 1909.8 MHz			

Device Test Setup

For GSM modes, the test sample was operated using transmission to a base station simulator. The base station simulator was set up for the proper channel and transmit mode of operation on the phone's uplink. The transmitter power level and power control were set to maximum at power step 5 for GSM 850 band, and power step 0 for GSM 1900 band.

Conducted Power Measurements

Band	Channel	Conducted power (dBm) for GSM modes (Burst Average Power)								
		GSM CS Voice (1 Slot)	GPRS PS Data (1 Slot)	GPRS PS Data (2 Slots)	GPRS PS Data (3 Slots)	GPRS PS Data (4 Slots)	EDGE PS Data (1 Slot)	EDGE PS Data (2 Slots)	EDGE PS Data (3 Slots)	EDGE PS Data (4 Slots)
GSM 850	128	32.98	32.97	29.34	27.65	26.30	25.54	22.96	21.79	20.94
	190	32.93	32.92	29.37	27.68	26.54	25.61	22.86	21.78	21.16
	251	33.18	33.16	29.49	27.85	26.08	25.62	22.92	22.15	20.98
GSM 1900	512	30.43	30.25	27.06	25.17	23.92	25.51	22.81	21.78	20.66
	661	30.27	30.12	26.71	24.93	23.67	25.20	22.51	21.54	20.42
	810	30	29.85	26.57	24.88	23.54	25.10	22.35	21.81	20.36

Band	Channel	Conducted power (dBm) for GSM modes (Source-Based Time-Averaged Power)								
		GSM CS Voice (1 Slot)	GPRS PS Data (1 Slot)	GPRS PS Data (2 Slots)	GPRS PS Data (3 Slots)	GPRS PS Data (4 Slots)	EDGE PS Data (1 Slot)	EDGE PS Data (2 Slots)	EDGE PS Data (3 Slots)	EDGE PS Data (4 Slots)
GSM 850	128	23.79	23.78	23.16	23.23	23.13	16.35	16.78	17.37	17.77
	190	23.74	23.73	23.19	23.26	23.37	16.42	16.68	17.36	17.99
	251	23.99	23.97	23.31	23.43	22.91	16.43	16.74	17.73	17.81
GSM 1900	512	21.24	21.06	20.88	20.75	20.75	16.32	16.63	17.36	17.49
	661	21.08	20.93	20.53	20.51	20.50	16.01	16.33	17.12	17.25
	810	20.81	20.66	20.39	20.46	20.37	15.91	16.17	17.39	17.19

Burst Average Power was measured using a power meter set to the appropriate profile to capture average power in the transmitting timeslot(s). Source-Based Time-Averaged Power, being related to the Burst Average Power by a fixed factor dependent on the number of time slots active in the frame, was calculated as follows (in dB), where x is the number of time slots active:

$$P_{Source} = P_{Burst} - 10 * \log \left(\frac{x}{8.3} \right)$$

CS Voice denotes circuit-switched transmission for voice call operation, and PS Data denotes packet-switched transmission for data sessions.

2.4.3 WCDMA

Technical Description

The phone under test contains a WCDMA transmitter designed per 3GPP TS 25.101, that supports both voice and data capabilities.

Exposure Conditions and Test Exclusions

Mode	Type	Head-Adjacent	Body-Worn Accessory	Mobile Hotspot
RMC	Voice/ Data	Tested	Tested	Tested
AMR	Voice/ Data	Excluded (1)	Excluded (1)	Excluded (1)
HSDPA (Rel 5) Modes	Data	Excluded (1)	Excluded (1)	Excluded (1)
HSPA (Rel 6) Modes	Data	Excluded (1)	Excluded (1)	Excluded (1)

Notes:

(1) AMR, HSDPA (Rel. 5), and HSPA (Rel. 6) were excluded from testing per FCC KDB 941225 D01, as the measured output power in these modes is not more than ¼ dB higher than that measured in RMC.

Device Test Setup

For WCDMA modes, the test sample was operated using transmission to a base station simulator. The base station simulator was set up for the proper channel and transmit mode of operation on the phone's uplink. The transmitter power level and transmit power control were set to "All 1's" for RMC and AMR modes in WCDMA or HSDPA, or inner loop power control procedures were applied to maintain maximum output power while HSUPA was active.

Conducted Power Measurements

Power measurements were executed per FCC KDB 941225 D01:

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes				Conducted Power (dBm) for WCDMA – HSPA (HSUPA/HSDPA-Rel 6) Modes				
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
WCDMA 850	4132	22.43	22.47	21.40	20.82	20.82	20.82	20.70	20.89	21.31	21.41	21.31
	4180	22.51	22.54	21.49	20.92	20.91	20.85	21.04	21.01	21.20	21.63	21.41
	4233	22.45	22.53	21.50	20.87	20.89	20.86	20.77	20.88	21.31	21.52	21.42
WCDMA 1700	1312	22.31	22.39	21.49	20.90	20.88	20.80	21.01	20.91	21.36	21.47	21.30
	1413	22.35	22.38	21.47	20.90	20.92	20.92	20.87	20.88	21.39	21.40	21.33
	1513	22.52	22.59	21.59	21.13	21.08	21.05	20.91	21.03	21.26	21.52	21.45
WCDMA 1900	9262	22.63	22.68	21.75	21.14	21.04	21.14	20.76	21.14	21.66	21.67	21.55
	9400	22.43	22.44	21.58	21.06	21.03	21.06	20.94	20.92	21.52	21.41	21.37
	9538	22.21	22.26	21.29	20.81	20.76	20.82	20.66	20.62	21.09	21.11	21.01

Maximum Power Reduction (MPR)

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE transmit channel configuration	CM (dB)	MPR (dB)
For all combinations of; DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX (CM-1, 0)
Note 1: CM = 1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to-average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present, the beta gains on those channels are reduced first to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a mechanism to compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the device's output power is identical to the case where there is no MPR in the device.

2.4.4 Wi-Fi 802.11

Technical Description

The phone under test contains a Wi-Fi 802.11b/g/n transmitter capable of data transmission in the 2.45 GHz ISM band, and contains a Wi-Fi 802.11a/n/ac transmitter capable of data transmission in the 5 GHz U-NII bands.

Exposure Conditions and Test Exclusions

Mode	Type	Head-Adjacent	Body-Worn Accessory	Mobile Hotspot
802.11b / 802.11a	Data	Tested (1)	Tested (1)	Tested (1) (2)
802.11g / 802.11n / 802.11ac	Data	Excluded (1)	Excluded (1)	Excluded (1) (2)

Notes:

- (1) Per FCC KDB 248227 D01 and the April 2010 FCC/TCB Meeting Notes, the highest average output power channel for the lowest data rate for 802.11b or 802.11a was selected for SAR evaluation. Other 802.11 modes (including 802.11g, 802.11n, and 802.11ac) were not investigated when the average output powers over all channels and data rates were not more than ¼ dB higher than the tested channel in the lowest data rate of the 802.11b or 802.11a mode. The **bolded** data rates and channels in the following conducted power tables were used for SAR testing. For cases where alternate channels, higher data rates, or 802.11 modes resulted in output power more than ¼ dB higher than the tested configuration, additional SAR tests were conducted.
- (2) Transmission in the U-NII-1 Band (5.180 to 5.240 GHz) is disabled for Mobile Hotspot operation.

Device Test Setup

For Wi-Fi 802.11 modes, the test sample was operated using manufacturer test mode software per guidance provided in FCC KDB 248227. The test software was set up for the proper channel, transmitter power level and transmit modes of operation on the phone's uplink.

Conducted Power Measurements

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	18.13	17.98	18.49	18.37
			PEAK	20.57	20.44	20.58	20.62
802.11b	2437	6	AVG	19.14	19.19	19.35	19.29
			PEAK	21.77	21.78	21.74	21.80
802.11b	2457	10	AVG	17.20	17.16	17.36	17.31
			PEAK	19.85	19.85	19.87	19.94
802.11b	2462	11	AVG	17.24	17.21	17.39	17.35
			PEAK	19.89	19.89	19.95	19.90

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	10.84	10.80	10.77	10.79	10.81	10.78	10.79	10.76
			PEAK	19.45	19.48	19.49	19.49	19.54	19.53	19.51	19.56
802.11g	2417	2	AVG	12.67	12.67	12.65	12.64	12.68	12.66	12.64	12.64
			PEAK	20.65	20.67	20.72	20.74	20.69	20.77	20.78	20.85
802.11g	2422	3	AVG	14.73	14.79	14.81	14.82	14.76	14.81	14.79	14.82
			PEAK	22.23	22.31	22.32	22.34	22.29	22.27	22.30	22.28
802.11g	2427	4	AVG	16.00	16.01	15.96	15.98	15.97	15.99	15.97	15.96
			PEAK	22.97	23.01	23.04	22.99	23.01	23.05	23.08	23.06
802.11g	2437	6	AVG	17.03	16.99	16.98	16.95	16.99	16.97	17.02	16.95
			PEAK	23.56	23.57	23.59	23.58	23.65	23.59	23.54	23.55
802.11g	2447	8	AVG	16.10	16.14	16.11	16.13	16.12	16.15	16.10	16.08
			PEAK	23.29	23.19	23.25	23.28	23.20	23.25	23.30	23.23
802.11g	2452	9	AVG	14.04	14.10	14.09	14.07	14.08	14.06	14.10	14.05
			PEAK	22.06	22.20	22.25	22.21	22.20	22.27	22.28	22.28
802.11g	2457	10	AVG	12.66	12.68	12.65	12.64	12.68	12.68	12.67	12.69
			PEAK	21.09	21.19	21.11	21.14	21.18	21.08	21.14	21.15
802.11g	2462	11	AVG	11.88	11.90	11.92	11.91	11.89	11.90	11.92	11.91
			PEAK	20.49	20.53	20.47	20.51	20.52	20.54	20.50	21.51

Mode	Freq	Channel	Detector	20MHz 802.11n (2.4GHz - 400ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				7.2	14.4	21.7	28.9	43.4	57.8	65.0	72.2	
	[MHz]											
802.11n	2412	1	AVG	8.48	8.52	8.51	8.47	8.48	8.45	8.44	8.44	
			PEAK	17.88	17.84	17.79	17.89	17.85	17.78	17.84	17.82	
802.11n	2417	2	AVG	11.68	11.70	11.72	11.69	11.73	11.71	11.73	11.67	
			PEAK	20.12	20.12	20.02	20.07	20.06	20.02	20.10	20.06	
802.11n	2422	3	AVG	13.78	13.75	13.83	13.76	13.74	13.70	13.77	13.72	
			PEAK	21.68	21.60	21.63	21.71	21.66	21.71	21.61	21.67	
802.11n	2427	4	AVG	14.93	14.95	14.93	14.89	14.97	14.87	14.94	14.93	
			PEAK	22.62	22.64	22.67	22.68	22.64	22.59	22.61	22.59	
802.11n	2432	5	AVG	15.95	15.88	15.91	16.00	15.94	15.95	15.93	15.99	
			PEAK	23.13	23.08	23.22	23.16	23.21	23.10	23.07	23.04	
802.11n	2437	6	AVG	17.07	17.04	17.01	17.02	17.11	17.08	17.04	17.05	
			PEAK	23.55	23.48	23.61	23.50	23.57	23.47	23.59	23.53	
802.11n	2447	8	AVG	15.13	15.05	15.14	15.10	15.16	15.07	15.16	15.08	
			PEAK	22.81	22.80	22.88	22.90	22.78	22.84	22.82	22.73	
802.11n	2452	9	AVG	12.86	12.90	12.87	12.90	12.86	12.85	12.82	12.82	
			PEAK	21.31	21.24	21.37	21.34	21.23	21.33	21.33	21.33	
802.11n	2457	10	AVG	11.71	11.68	11.68	11.76	11.64	11.66	11.64	11.73	
			PEAK	20.43	20.42	20.37	20.52	20.40	20.44	20.48	20.50	
802.11n	2462	11	AVG	10.94	10.99	10.90	10.93	10.91	10.94	10.87	10.89	
			PEAK	19.82	19.84	19.89	19.90	19.81	19.72	19.86	19.83	

Mode	Freq	Channel	Detector	20MHz 802.11n (2.4GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0
	[MHz]										
802.11n	2412	1	AVG	8.46	8.41	8.45	8.44	8.49	8.40	8.38	8.50
			PEAK	17.66	17.61	17.59	17.68	17.58	17.56	17.65	17.58
802.11n	2417	2	AVG	11.66	11.64	11.63	11.60	11.61	11.66	11.71	11.68
			PEAK	20.10	20.05	20.10	20.14	20.01	20.07	20.15	20.06
802.11n	2422	3	AVG	13.71	13.76	13.74	13.64	13.73	13.76	13.69	13.64
			PEAK	21.61	21.53	21.66	21.57	21.51	21.67	21.64	21.67
802.11n	2427	4	AVG	14.92	14.84	14.90	14.96	14.86	14.85	14.85	14.96
			PEAK	22.57	22.59	22.50	22.54	22.50	22.48	22.54	22.61
802.11n	2432	5	AVG	15.96	15.90	15.92	15.93	15.96	15.91	15.95	15.97
			PEAK	23.07	23.05	23.01	23.07	23.01	23.00	22.99	22.99
802.11n	2437	6	AVG	16.94	16.90	16.91	16.90	16.89	16.92	16.87	16.93
			PEAK	23.50	23.52	23.41	23.50	23.54	23.57	23.54	23.48
802.11n	2447	8	AVG	15.09	15.06	15.06	15.12	15.02	15.12	15.10	15.09
			PEAK	22.76	22.82	22.80	22.77	22.67	22.70	22.79	22.79
802.11n	2452	9	AVG	12.73	12.78	12.74	12.69	12.74	12.75	12.65	12.65
			PEAK	21.19	21.27	21.24	21.17	21.14	21.17	21.11	21.27
802.11n	2457	10	AVG	11.86	11.79	11.89	11.83	11.82	11.89	11.85	11.87
			PEAK	20.45	20.52	20.51	20.42	20.51	20.36	20.38	20.52
802.11n	2462	11	AVG	10.91	10.95	10.93	10.95	10.95	10.83	10.87	10.96
			PEAK	19.73	19.65	19.66	19.78	19.74	19.82	19.82	19.77

Mode	Freq	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
	[MHz]										
802.11a	5180	36	AVG	15.56	15.55	15.54	15.52	15.50	15.51	15.49	15.47
802.11a	5200	40	AVG	15.35	15.33	15.34	15.31	15.31	15.32	15.30	15.31
802.11a	5220	44	AVG	15.48	15.47	15.45	15.49	15.46	15.45	15.43	15.47
802.11a	5240	48	AVG	15.52	15.48	15.47	15.50	15.49	15.45	15.41	15.43

Mode	Freq	Channel	Detector	20MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				7.2	14.4	21.7	28.9	43.3	57.8	65.0	72.2
	[MHz]										
802.11n	5180	36	AVG	15.59	15.56	15.55	15.60	15.59	15.58	15.55	15.57
802.11n	5200	40	AVG	15.31	15.28	15.35	15.35	15.30	15.30	15.31	15.26
802.11n	5220	44	AVG	15.43	15.44	15.40	15.49	15.44	15.48	15.44	15.47
802.11n	5240	48	AVG	15.49	15.50	15.47	15.46	15.53	15.43	15.41	15.40

Mode	Freq	Channel	Detector	20MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0
	[MHz]										
802.11n	5180	36	AVG	15.57	15.52	15.51	15.52	15.53	15.56	15.46	15.52
802.11n	5200	40	AVG	15.32	15.29	15.37	15.32	15.27	15.32	15.31	15.28
802.11n	5220	44	AVG	15.52	15.44	15.49	15.47	15.50	15.44	15.42	15.48
802.11n	5240	48	AVG	15.55	15.46	15.45	15.46	15.48	15.46	15.43	15.38

Mode	Freq	Channel	Detector	20MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				7.2	14.4	21.7	28.9	43.3	57.8	65.0	72.2	MCS8	
	[MHz]												
802.11ac	5180	36	AVG	15.41	15.43	15.40	15.42	15.46	15.45	15.41	15.42	15.40	
802.11ac	5200	40	AVG	15.46	15.40	15.48	15.49	15.50	15.52	15.44	15.42	15.43	
802.11ac	5220	44	AVG	15.48	15.44	15.48	15.48	15.55	15.50	15.41	15.49	15.46	
802.11ac	5240	48	AVG	15.41	15.41	15.37	15.42	15.53	15.46	15.45	15.46	15.46	

Mode	Freq	Channel	Detector	20MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0	MCS8
	[MHz]											
802.11ac	5180	36	AVG	15.59	15.58	15.69	15.65	15.61	15.74	15.44	15.59	14.58
802.11ac	5200	40	AVG	15.29	15.41	15.48	15.46	15.42	15.48	15.32	15.32	14.26
802.11ac	5220	44	AVG	15.37	15.43	15.54	15.55	15.52	15.63	15.38	15.49	14.51
802.11ac	5240	48	AVG	15.54	15.57	15.65	15.59	15.57	15.72	15.42	15.47	14.49

Mode	Freq	Channel	Detector	40MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0	
	[MHz]											
802.11n	5190	38	AVG	14.18	14.16	14.14	14.15	14.16	14.16	14.15	14.17	
802.11n	5230	46	AVG	14.17	14.14	14.15	14.17	14.15	14.18	14.13	14.16	

Mode	Freq	Channel	Detector	40MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	
	[MHz]											
802.11n	5190	38	AVG	14.15	14.20	14.16	14.19	14.19	14.16	14.15	14.16	
802.11n	5230	46	AVG	14.20	14.14	14.14	14.13	14.19	14.16	14.17	14.12	

Mode	Freq	Channel	Detector	40MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0	MCS8	MCS9
	[MHz]												
802.11ac	5190	38	AVG	14.01	13.94	13.91	13.92	13.82	13.85	13.90	13.89	13.02	12.01
802.11ac	5230	46	AVG	13.99	13.97	13.94	13.93	13.90	13.89	13.89	13.87	13.05	11.99

Mode	Freq	Channel	Detector	40MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	MCS8	MCS9
	[MHz]												
802.11ac	5190	38	AVG	14.11	14.17	14.06	14.03	13.93	14.05	13.91	13.99	13.19	12.17
802.11ac	5230	46	AVG	13.99	14.08	14.03	14.01	13.98	14.04	13.97	13.95	13.23	12.21

Mode	Freq	Channel	Detector	80MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				32.5	65	97.5	130	195	260	292.5	325	390	433.3
	[MHz]												
802.11ac	5210	42	AVG	14.25	14.28	14.27	14.31	14.30	14.26	14.28	14.29	14.25	12.28

Mode	Freq	Channel	Detector	80MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
	[MHz]												
802.11ac	5210	42	AVG	14.33	14.29	14.32	14.30	14.28	14.31	14.30	14.28	14.29	12.47

Mode	Freq	Channel	Detector	802.11a Conducted Power [dBm]								
				Data Rate [Mbps]								
				6	9	12	18	24	36	48	54	
	[MHz]											
802.11a	5745	149	AVG	20.07	20.03	19.24	19.17	19.15	18.19	17.11	16.29	
			PEAK	24.12	24.10	23.81	23.80	23.84	23.49	23.02	22.63	
802.11a	5765	153	AVG	20.07	20.13	19.07	19.14	19.09	18.07	17.07	16.25	
			PEAK	24.05	24.05	23.72	23.82	23.78	23.41	23.01	22.56	
802.11a	5785	157	AVG	20.09	20.13	19.11	19.13	19.06	18.01	16.98	16.11	
			PEAK	24.02	24.02	23.72	23.71	23.72	23.43	22.92	22.45	
802.11a	5805	161	AVG	20.07	20.10	19.06	19.09	19.08	18.13	17.11	16.12	
			PEAK	24.01	24.04	23.71	23.74	23.73	23.42	22.96	22.51	
802.11a	5825	165	AVG	20.02	20.01	19.05	19.08	19.09	18.03	17.01	16.05	
			PEAK	24.01	24.02	23.73	23.75	23.72	23.37	22.95	22.47	

Mode	Freq	Channel	Detector	20MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				7.2	14.4	21.7	28.9	43.4	57.8	65.0	72.2	
	[MHz]											
802.11n	5745	149	AVG	19.23	19.34	19.32	19.16	18.26	17.14	16.20	15.23	
			PEAK	24.44	24.49	24.49	24.47	24.13	23.64	23.03	22.35	
802.11n	5765	153	AVG	19.28	19.26	19.23	19.20	18.19	17.05	16.15	15.18	
			PEAK	24.42	24.48	24.49	24.38	24.07	23.51	22.97	22.24	
802.11n	5785	157	AVG	19.17	19.18	19.24	19.22	18.08	16.96	16.15	15.11	
			PEAK	24.35	24.36	24.40	24.40	23.98	23.41	22.93	22.25	
802.11n	5805	161	AVG	19.23	19.22	19.23	19.21	18.26	17.05	16.25	15.28	
			PEAK	24.30	24.34	24.32	24.30	24.01	23.43	22.97	22.31	
802.11n	5825	165	AVG	19.25	19.26	19.23	19.22	18.21	17.01	16.26	15.26	
			PEAK	24.32	24.35	24.32	24.31	23.98	23.40	22.99	22.27	

Mode	Freq	Channel	Detector	20MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0	
	[MHz]											
802.11n	5745	149	AVG	19.00	19.13	19.14	19.04	18.06	17.04	16.18	15.13	
			PEAK	24.20	24.24	24.26	24.18	23.92	23.46	22.92	22.22	
802.11n	5765	153	AVG	19.08	19.04	19.02	19.02	18.09	17.00	16.11	15.12	
			PEAK	24.04	24.06	24.08	24.07	23.78	23.31	22.87	22.29	
802.11n	5785	157	AVG	19.14	19.07	18.99	19.08	18.09	16.84	16.05	15.08	
			PEAK	24.16	24.16	24.15	24.21	23.88	23.32	22.86	22.11	
802.11n	5805	161	AVG	19.15	19.13	19.14	19.07	18.19	16.95	16.14	15.06	
			PEAK	24.37	24.35	24.41	24.39	24.08	23.46	22.90	22.15	
802.11n	5825	165	AVG	19.14	19.06	19.17	19.15	18.15	16.95	16.03	15.08	
			PEAK	24.32	24.27	24.27	24.28	23.90	23.39	22.75	22.12	

Mode	Freq	Channel	Detector	20MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	
	[MHz]												
802.11ac	5745	149	AVG	18.90	18.98	18.94	18.98	18.02	17.01	15.98	14.92	13.93	
			PEAK	23.75	23.72	23.69	23.82	23.52	23.19	22.64	21.97	21.28	
802.11ac	5765	153	AVG	18.88	18.94	18.95	19.02	17.99	17.02	15.98	14.88	13.94	
			PEAK	23.79	23.74	23.72	23.83	23.52	23.25	22.67	21.94	21.30	
802.11ac	5785	157	AVG	18.94	18.94	18.99	18.99	18.00	16.98	16.02	14.90	13.93	
			PEAK	23.77	23.67	23.65	23.87	23.48	23.14	22.69	21.92	21.31	
802.11ac	5805	161	AVG	18.87	18.99	18.93	18.96	18.03	17.00	15.98	14.93	13.97	
			PEAK	23.78	23.67	23.68	23.86	23.58	23.14	22.68	22.03	21.29	
802.11ac	5825	165	AVG	18.87	19.00	18.93	18.94	18.06	17.06	15.94	14.89	13.92	
			PEAK	23.80	23.73	23.67	23.81	23.58	23.14	22.58	21.93	21.25	

Mode	Freq	Channel	Detector	20MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	
	[MHz]												
802.11ac	5745	149	AVG	18.94	18.97	18.90	18.99	18.00	17.06	15.97	14.91	13.95	
			PEAK	23.80	23.79	23.76	23.75	23.51	23.26	22.59	21.96	21.33	
802.11ac	5765	153	AVG	18.95	19.02	18.91	19.03	18.04	17.02	15.97	14.90	13.91	
			PEAK	23.69	23.78	23.62	23.76	23.47	23.22	22.69	21.99	21.24	
802.11ac	5785	157	AVG	18.92	18.95	18.96	18.99	18.00	16.97	16.00	14.97	13.89	
			PEAK	23.78	23.75	23.64	23.80	23.58	23.15	22.63	21.97	21.29	
802.11ac	5805	161	AVG	18.87	18.99	18.96	18.97	17.98	17.02	15.94	14.89	13.93	
			PEAK	23.81	23.72	23.68	23.78	23.59	23.13	22.68	22.00	21.28	
802.11ac	5825	165	AVG	18.90	18.95	18.99	19.03	18.06	17.05	15.95	14.97	13.96	
			PEAK	23.73	23.69	23.65	23.76	23.56	23.23	22.64	21.96	21.27	

Mode	Freq	Channel	Detector	40MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0
	[MHz]										
802.11n	5755	151	AVG	18.72	18.69	18.56	18.63	17.63	16.72	15.53	14.47
			PEAK	23.78	23.73	23.70	23.70	23.32	22.87	22.12	21.43
802.11n	5775	155	AVG	18.72	18.67	18.72	18.69	17.60	16.67	15.65	14.32
			PEAK	23.74	23.71	23.76	23.74	23.22	22.74	22.23	21.29
802.11n	5795	159	AVG	18.69	18.67	18.71	18.57	17.67	16.71	15.51	14.43
			PEAK	23.73	23.74	23.74	23.67	23.30	22.85	22.14	21.40
802.11n	5815	163	AVG	18.57	18.73	18.72	18.70	17.64	16.69	15.67	14.38
			PEAK	23.66	23.77	23.76	23.76	23.29	22.84	22.19	21.40

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0
802.11n	5755	151	AVG	18.55	18.54	18.54	18.55	17.65	16.63	15.48	14.52
			PEAK	23.69	23.67	23.73	23.73	23.30	22.76	22.06	21.47
802.11n	5775	155	AVG	18.58	18.59	18.55	18.58	17.64	16.72	15.56	14.37
			PEAK	23.70	23.70	23.69	23.71	23.33	22.84	22.07	21.36
802.11n	5795	159	AVG	18.71	18.73	18.74	18.52	17.63	16.68	15.62	14.38
			PEAK	23.76	23.73	23.74	23.68	23.30	22.77	22.13	21.37
802.11n	5815	163	AVG	18.66	18.69	18.67	18.64	17.70	16.62	15.64	14.31
			PEAK	23.69	23.73	23.72	23.74	23.34	22.79	22.21	21.25

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0	MCS8	MCS9
802.11ac	5755	151	AVG	17.72	17.73	17.76	17.78	16.57	15.49	14.58	13.59	12.65	10.86
			PEAK	23.42	23.34	23.42	23.41	22.85	22.42	22.01	21.61	20.55	18.61
802.11ac	5775	155	AVG	17.73	17.73	17.80	17.79	16.58	15.55	14.55	13.59	12.68	10.85
			PEAK	23.36	23.38	23.37	23.38	22.82	22.42	22.02	21.65	20.48	18.72
802.11ac	5795	159	AVG	17.70	17.71	17.81	17.83	16.58	15.52	14.55	13.63	12.63	10.85
			PEAK	23.34	23.45	23.46	23.46	22.79	22.53	21.93	21.72	20.61	18.66
802.11ac	5815	163	AVG	17.77	17.75	17.73	17.75	16.56	15.54	14.62	13.65	12.70	10.85
			PEAK	23.48	23.29	23.39	23.42	22.92	22.51	21.94	21.62	20.49	18.57

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	MCS8	MCS9
802.11ac	5755	151	AVG	17.87	17.95	17.87	17.85	16.78	15.69	14.78	13.72	12.76	11.96
			PEAK	24.09	24.25	24.11	24.04	23.60	23.14	23.15	22.06	21.70	21.02
802.11ac	5775	155	AVG	17.83	17.86	17.84	17.85	16.82	15.68	14.78	13.64	12.68	11.93
			PEAK	24.05	24.09	24.00	24.02	23.63	23.10	23.11	22.01	21.73	21.05
802.11ac	5795	159	AVG	17.88	17.93	17.90	17.84	16.70	15.69	14.76	13.76	12.81	11.98
			PEAK	24.05	23.98	24.04	24.07	23.59	23.04	23.19	22.09	21.64	21.07
802.11ac	5815	163	AVG	17.82	17.76	17.76	17.85	16.80	15.63	14.78	13.66	12.79	11.89
			PEAK	24.01	24.01	24.07	23.96	23.50	23.14	23.14	22.06	21.69	20.98

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				32.5	65	97.5	130	195	260	292.5	325	MCS8	MCS9
802.11ac	5775	155	AVG	17.67	17.31	16.89	16.61	15.44	14.38	13.53	12.60	11.46	9.72
			PEAK	26.19	25.76	25.90	26.40	24.89	23.77	22.89	21.90	20.49	18.99
802.11ac	5795	159	AVG	17.59	17.19	17.01	16.63	15.32	14.27	13.69	12.56	11.50	9.59
			PEAK	26.07	25.98	26.02	26.36	25.08	23.69	22.91	21.97	20.63	18.89

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	MCS8	MCS9
802.11ac	5775	155	AVG	17.55	17.20	16.87	16.53	15.36	14.31	13.56	12.46	11.47	9.61
			PEAK	26.12	25.81	25.92	26.23	24.92	23.72	22.88	21.82	20.49	18.89
802.11ac	5795	159	AVG	17.53	17.10	16.81	16.59	15.38	14.24	13.55	12.37	11.42	9.66
			PEAK	26.22	25.67	25.86	26.22	24.91	23.79	22.93	21.79	20.46	18.80

2.4.5 Bluetooth

Technical Description

The phone under test contains a Bluetooth transmitter capable of data transmission in the 2.4 GHz ISM band.

Exposure Conditions and Test Exclusions

Mode	Type	Head-Adjacent	Body-Worn Accessory	Mobile Hotspot
All Modes	Data	Excluded (1) (3)	Excluded (2) (3)	Excluded (2) (3)

Notes:

- (1) Bluetooth mode was tested in the worst case Head-Adjacent configuration for the 2.4 GHz band to evaluate for simultaneous use cases.
- (2) Per FCC KDB 447498 D01, standalone SAR measurements of the Bluetooth transmitter in this phone were not required based on the maximum conducted power and the Bluetooth antenna-to-user separation distance. As detailed by the KDB publication, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{[maximum\ power\ of\ channel,\ including\ tune - up\ tolerance]_{(mW)}}{[minimum\ test\ separation\ distance]_{(mm)}} \times \sqrt{f_{(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth and the most conservative antenna-to-user separation distance used in testing, standalone SAR measurements for Bluetooth were not required.

$$\frac{[11.468]_{(mW)}}{[25]_{(mm)}} \times \sqrt{2.48_{(GHz)}} = 0.72 \leq 3.0$$

Note that simultaneous SAR evaluations include estimations for Bluetooth SAR, as detailed in section 4.6 below.

- (3) Per IC RSS-102 section 2.5.1, routine SAR evaluation of the Bluetooth transmitter in this phone was not required as the maximum conducted power of this transmitter is below 20 mW for a device operating between 2.2 GHz and 3 GHz.

Conducted Power Measurements

Frequency [MHz]	Data Rate [Mbps]	Channel Number	Peak Conducted Power [mW]
2402	1.0	0	6.285
2441	1.0	39	8.352
2480	1.0	78	7.091
2402	2.0	0	7.982
2441	2.0	39	10.551
2480	2.0	78	8.886
2402	3.0	0	8.650
2441	3.0	39	11.468
2480	3.0	78	9.685

Frequency [MHz]	Mode	Channel Number	Peak Conducted Power [mW]
2402	LE	0	6.233
2441	LE	39	8.232
2480	LE	78	6.759

2.4.6 Near-Field Communications

Technical Description

This device contains an integrated Near Field Communications (NFC) module.

Test Exclusion Evaluation

Evaluation of SAR test requirements for the NFC transmitter was performed per the guidance in FCC KDB 447498, FCC KDB 865664 and FCC KDB 648474. FCC KDB 865664 specifies that the FCC SAR test requirements are applicable to 100 MHz - 6 GHz only, but states that numerical SAR simulation may be appropriate for transmit frequencies below 100 MHz. Additionally, KDB 447498 provides guidance on test exclusion based on maximum transmit power capabilities, which this NFC transmitter falls into. Finally, KDB 648474 states that "phones with built-in NFC, wireless charging or similar functions that do not require separate SAR testing for these specific capabilities can generally be tested according to the normally required SAR measurement procedures. The SAR influence of the additional accessory hardware and functionality to the transmitters and antennas that require SAR Testing are considered during the required SAR testing; therefore, it is transparent to the testing process." Therefore, no SAR measurements of the NFC transmitter are required.

2.5 Transmitter power controlled conditions and modes

The phone utilizes reduced limits for the maximum transmit power for its transmitters when operating under the following noted conditions to ensure SAR exposure compliance is maintained. Tables of the reduced limits used for testing are given below. This phone also utilizes an increased limit for maximum transmit power in specific conditions. Complete descriptions of these functionalities are provided in the “Operational Description” contained within Exhibit 12. The implementation to trigger the power conditions requires the device to be radiating, which prevents conducted power measurements of this functionality without modification to the unit. These implementations of the reduced power limits are not relative to the maximum power limits. The DUT is set to a maximum power via the firmware settings for the reduced power modes and there is no factory tolerance (other than normal part to part manufacturing variances) to be scaled for.

While operating simultaneously with any other transmitters active, a reduced maximum power limit is enforced on the Wi-Fi transmitter. Tables of the reduced limits used for testing are given below.

Mode(s) of Operation	Wi-Fi 2.4 GHz	Wi-Fi 5.8 GHz
Channel Ranges	1-11	149-165
Maximum Output Power (dBm)	19.35	20.13
Reduced Maximum Output Power Setting (dBm)	17	16

While operating body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the LTE Bands 2/4, WCDMA 1700/1900, and GSM/GPRS/EDGE 1900 transmitters. Tables of the reduced limits used for testing are given below.

Mode(s) of Operation	LTE Band 2					
Test Channel	Applicable to all channels/channel bandwidths					
Modulation	QPSK			16QAM		
RB Allocation	1 RB	50%	100%	1 RB	50%	100%
Maximum Output Power Setting (dBm)	24.0	24.0	24.0	24.0	24.0	24.0
Output Power with MPR (dBm)	24.0	23.0	23.0	23.0	22.0	22.0
Reduced Maximum Output Power Setting (dBm)	17.5	17.5	17.5	17.5	17.5	17.5

Mode(s) of Operation	LTE Band 4					
Test Channel	Applicable to all channels/channel bandwidths					
Modulation	QPSK			16QAM		
RB Allocation	1 RB	50%	100%	1 RB	50%	100%
Maximum Output Power (dBm)	24.0	24.0	24.0	24.0	24.0	24.0
Output Power with MPR (dBm)	24.0	23.0	23.0	23.0	22.0	22.0
Reduced Maximum Output Power Setting (dBm)	19.5	19.5	19.5	19.5	19.5	19.5

Mode(s) of Operation	WCDMA 1700	WCDMA 1900
Channel Ranges	1312-1513	9262-9538
Maximum Output Power Setting (dBm)	24	24
Reduced Maximum Output Power Setting (dBm)	19.5	17.5

Mode(s) of Operation	GPRS 1900				EDGE 1900			
Channel Range	512-810				512-810			
Modulation	GMSK				8PSK			
Duty Cycle	1:8.3	2:8.3	3:8.3	4:8.3	1:8.3	2:8.3	3:8.3	4:8.3
Maximum Output Power Setting (dBm)	30.5	28.0	25.75	25.0	27.0	24.5	22.75	21.5
Time Average Output Power Setting (dBm)	21.5	22.0	21.55	22.0	18.0	18.5	18.55	18.5
Reduced Maximum Output Power Setting (dBm)	26.5	24	21.75	21	23	20.5	18.75	17.5
Reduced Time Average Output Power Setting (dBm)	17.5	18	17.55	18	14	14.5	14.55	14.5

While operating against the head adjacent configurations, an increased limit for maximum transmit power is enforced on the GSM 1900 transmitter. A table of the increased limits used for testing is given below. Complete descriptions of these functionalities are provided in the “Operational Description” contained within Exhibit 12.

Mode(s) of Operation	GSM/GPRS 1900				EDGE 1900			
Channel Range	512-810				512-810			
Modulation	GMSK				8PSK			
Duty Cycle	1:8.3	2:8.3	3:8.3	4:8.3	1:8.3	2:8.3	3:8.3	4:8.3
Increased Maximum Output Power Setting (dBm)	31.5	29.0	26.75	26.0	28.0	25.5	23.75	22.5
Increased Time Average Output Power Setting (dBm)	22.5	23.0	22.55	23.0	19.0	19.5	19.55	19.5

Band	Channel	Conducted power (dBm) for GSM 1900 in head adjacent configurations								
		GSM CS Voice (1 Slot)	GPRS PS Data (1 Slot)	GPRS PS Data (2 Slots)	GPRS PS Data (3 Slots)	GPRS PS Data (4 Slots)	EDGE PS Data (1 Slot)	EDGE PS Data (2 Slots)	EDGE PS Data (3 Slots)	EDGE PS Data (4 Slots)
Burst-Average	512	31.43	31.25	28.06	26.17	24.92	26.51	23.81	22.78	21.66
	661	31.27	31.12	27.71	25.93	24.67	26.2	23.51	22.54	21.42
	810	31	30.85	27.57	25.88	24.54	26.1	23.35	22.81	21.36
Time-Average	512	22.24	22.06	21.88	21.75	21.75	17.32	17.63	18.36	18.49
	661	22.08	21.93	21.53	21.51	21.5	17.01	17.33	18.12	18.25
	810	21.81	21.66	21.39	21.46	21.37	16.91	17.17	18.39	18.19

See section 4.6 for tables detailing the complete interoperation of this power limit reduction schema.

2.6 Accessories for the Device Under Test

2.6.1 Alternative Housings

The front and rear housings and other associated components (bezel, button covers and graphics) will be available in multiple colors and a couple different types of materials. These alternate housings do not have any metallic content differences, pearl content, carbon loading or other significant dielectric loading impact. Testing will be performed on one representative sample and is reflective of the other options.

2.6.2 Batteries

The phone tested in this report has the following battery options:

Model SNN5923A - 2200 mAh battery

The model SNN5923A battery is an internally-sealed battery contained within the DUT, and may not be removed by the end-user. This battery was used to do all of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery.

2.6.3 Body-Worn Carry Accessories

There are no body-worn accessories available for this phone at the time of testing thus the device was tested per the Supplement C testing guidelines for devices that do not have body-worn accessories. A separation distance of 25 mm between the device and the flat phantom was used for testing body-worn accessory SAR. The chosen separation distance of 25 mm is utilized in order to support any case or holder accessories offered or to be offered by Motorola for this product. The device was tested with the front and back of the device facing the phantom. Both sides of the device were tested for Body SAR for the purpose of including the SAR evaluation for body-worn accessories that support the device with either side facing the user.

Other carry accessories may become available after the testing of this product. These accessories will maintain reported compliance if they either; only intended to protect the phone when it is in an idle mode (a protect case), or as use as a body worn accessory with a separation distance of 25 mm. All potential carry accessories shall not be allowed to have metal components between the phone and the user. Also, these accessories shall not contain any clips, snaps, belt loops, arm / body bands or lanyards that result in a use condition with less than 25 mm separation distance.

3 Test Equipment Used

3.1 Dosimetric Measurement System

The Motorola Mobility ADR Test Services Laboratory utilizes a DASY52™ Dosimetric Assessment System manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All SAR measurements are taken within a shielded enclosure. The overall 10 g RSS uncertainty of the measurement system is $\pm 11\%$ ($K=1$) with an expanded uncertainty of $\pm 22\%$ ($K=2$). The overall 1 g RSS uncertainty of the measurement system is $\pm 11\%$ ($K=1$) with an expanded uncertainty of $\pm 22\%$ ($K=2$). The measurement uncertainty budget is given in Appendix 5. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg.

The list of calibrated equipment used for the measurements is shown in the following table. All equipment was brought into service and used only during its noted calibration period, except where indicated. Equipment without a calibration period was in service for the entirety of the test period.

Description	Serial Number	Cal Date	Cal Due Date	Service Notes
DASY™ DAE V1	656	7-Feb-2012	7-Feb-2013	Measurement System 1
E-Field Probe ES3DV3	3180	11-Feb-2012	11-Feb-2013	Measurement System 1
Twin SAM Phantom V4.0	TP-1156			Measurement System 1
Twin SAM Phantom V4.0	TP-1319			Measurement System 1
MFP V5.1 C Triple Modular Flat Phantom	1101			Measurement System 1
DASY™ DAE V1	376	3-Sep-2012	3-Sep-2013	Measurement System 2
E-Field Probe ES3DV3	3124	20-Aug-2012	20-Aug-2013	Measurement System 2
Twin SAM Phantom V4.0	TP-1235			Measurement System 2
Twin SAM Phantom V4.0	TP-1136			Measurement System 2
MFP V5.1 C Triple Modular Flat Phantom	1102			Measurement System 2
DASY™ DAE V1	699	12-Sep-2012	12-Sep-2013	Measurement System 3 Removed from service 28-Mar-2013
DASY™ DAE V1	784	6-Mar-2013	6-Mar-2014	Measurement System 3 Placed into service 28-Mar-2013
E-Field Probe EX3DV4	3730	24-Aug-2012	24-Aug-2013	Measurement System 3
Twin SAM Phantom V4.0	TP-1106			Measurement System 3
Twin SAM Phantom V4.0	TP-1153			Measurement System 3
MFP V5.1 C Triple Modular Flat Phantom	1103			Measurement System 3
DASY™ DAE V1	703	11-Sep-2012	11-Sep-2013	Measurement System 4
E-Field Probe ES3DV3	3037	13-Sep-2012	13-Sep-2013	Measurement System 4
Twin SAM Phantom V4.0	TP-1132			Measurement System 4
Twin SAM Phantom V4.0	TP-1162			Measurement System 4
MFP V5.1 C Triple Modular Flat Phantom	1104			Measurement System 4
Dipole Validation Kit, D750V3	1040	10-Aug-2011	10-Aug-2012	Calibration extension, see note.
Dipole Validation Kit, D835V2	436tr	18-Mar-2011	18-Mar-2012	Calibration extension, see note.
Dipole Validation Kit, D1800V2	2d190	5-Jan-2012	5-Jan-2013	Calibration extension, see note.
Dipole Validation Kit, D1800V2	2d191	5-Jan-2012	5-Jan-2013	Calibration extension, see note.
Dipole Validation Kit, D1800V2	259tr	20-Oct-2011	20-Oct-2012	Calibration extension, see note.
Dipole Validation Kit, D2450V2	740	7-Feb-2012	7-Feb-2013	Calibration extension, see note.
Dipole Validation Kit, D2450V2	863	17-Mar-2011	17-Mar-2012	Calibration extension, see note.
Dipole Validation Kit, D2600V2	1054	7-Nov-2012	7-Nov-2013	
Dipole Validation Kit, D2600V2	1055	7-Nov-2012	7-Nov-2013	
Dipole Validation Kit, D5GHzV2	1088	20-May-2011	20-May-2012	Calibration extension, see note.

Note: Per FCC KDB 865664 D01, evaluation for the extension of the dipole calibration was carried out. Results are provided in Appendix 7 in addition to the original calibration certificate.

3.2 Additional Equipment

Description	Serial Number	Cal Date	Cal Due Date	Service Notes
Power Meter 437B	3125U08032	28-Aug-2012	28-Aug-2013	
Power Sensor 8481A	US37296470	2-Nov-2012	2-Nov-2013	
10 dB Attenuator 8491A	62165	24-Sep-2011	27-Sep-2013	
Signal Generator HP8648C	3847A04810	26-Sep-2011	26-Sep-2013	
Power Meter E4419B	GB39511090	12-Aug-2011	12-Aug-2013	
Power Sensor #1 - E9301A	US39211009	28-Aug-2012	28-Aug-2013	
Power Sensor #2 - E9301A	US39211013	2-Nov-2012	2-Nov-2013	
3 dB Attenuator 8491A	50577	15-Aug-2011	15-Aug-2013	
Dual Directional Coupler 778D	50790	2-Nov-2012	2-Nov-2014	
Amplifier ZHL-42-SMA	N120299-25			
Power Meter 437B	3125U08939	12-Aug-2011	12-Aug-2013	
Power Sensor 8481A	US37296475	2-Nov-2012	2-Nov-2013	
10 dB Attenuator 8491A	3929M50702	12-Sep-2011	12-Sep-2013	
Signal Generator HP8648C	3847M01245	23-Aug-2011	23-Aug-2013	
Power Meter E4419B	GB39511087	28-Aug-2012	28-Aug-2014	
Power Sensor #1 - E9301A	US39210915	14-Jan-2013	14-Jan-2014	
Power Sensor #2 - E9301A	US39210916	14-Jan-2013	14-Jan-2014	
3 dB Attenuator 8491A	MY39267604	13-Oct-2011	13-Oct-2013	
Dual Directional Coupler 778D	18376	29-Aug-2012	29-Aug-2014	
Amplifier ZHL-42-SMA	N120299-23			
Signal Generator HP8648C	3847A04632	13-Aug-2011	13-Aug-2013	
Power Meter E4419B	GB39511086	4-Nov-2011	4-Nov-2013	
Power Sensor #1 - E9301A	US39211007	28-Aug-2012	28-Aug-2013	
Power Sensor #2 - E9301A	US39211008	28-Aug-2012	28-Aug-2013	
3 dB Attenuator 8491A	50555	13-Sep-2011	13-Sep-2013	
Dual Directional Coupler 778D	18621	18-Aug-2011	18-Aug-2013	
Amplifier ZHL-42-SMA	N120299-26			
Network Analyzer E5071C	MY46212851	10-May-2012	10-May-2013	
Dielectric Probe Kit DAK-3.5	1072			

3.3 Test System Validations

Per [5] and FCC KDB 865664 D01, each SAR system (including probes, system components, and software) used for device testing was validated against its performance specifications prior to deployment. These validation measurements are taken to ensure the accuracy of device test results. Validation measurements utilize reference dipoles and the required tissue-equivalent media, and include assessments of system sensitivity, probe linearity, and probe isotropy. Per FCC KDB 865664 D02, a tabulated summary of the validation results for each SAR system used in testing is given below.

DASY52™ Measurement System 1												
System Validation Measurements												
Probe	Tissue Type	f (MHz)	CW Validations				Modulated Validations					
			Date	Dielectric Parameters		Result	Date	Mod. Type	Dielectric Parameters		Duty Factor Linearity Results	High PAR Linearity Results
				Measured σ (S/m)	Measured ϵ_r				Measured σ (S/m)	Measured ϵ_r		
3180	Head	750	21-Feb-13	0.8599	41.52	pass						
3180	Head	835	21-Feb-13	0.941	41.98	pass	3/7/2013	GMSK	0.912	39.6	PASS	N/A
3180	Head	1800	21-Feb-13	1.37	39.23	pass	3/7/2013	GMSK	1.384	38.24	PASS	N/A
3180	Head	1900	21-Feb-13	1.476	38.79	pass						
3180	Head	2450	25-Feb-13	1.75	36.59	pass	3/14/2013	OFDM	1.807	37.8	N/A	PASS
3180	Head	2600	25-Feb-13	1.897	36.17	pass						
3180	Body	750	21-Feb-13	0.9525	54.36	pass						
3180	Body	835	21-Feb-13	1	55.04	pass	3/7/2013	GMSK	0.996	54.068	PASS	N/A
3180	Body	1800	21-Feb-13	1.445	49.43	pass	3/7/2013	GMSK	1.582	49.18	PASS	N/A
3180	Body	1900	21-Feb-13	1.561	49.05	pass						
3180	Body	2450	25-Feb-13	1.926	49.22	pass	3/12/2013	OFDM	1.999	50.5	N/A	PASS
3180	Body	2600	25-Feb-13	2.097	48.83	pass						

DASY52™ Measurement System 2												
System Validation Measurements												
Probe	Tissue Type	f (MHz)	CW Validations				Modulated Validations					
			Date	Dielectric Parameters		Result	Date	Mod. Type	Dielectric Parameters		Duty Factor Linearity Results	High PAR Linearity Results
				Measured σ (S/m)	Measured ϵ_r				Measured σ (S/m)	Measured ϵ_r		
3124	Head	750	1/16/2013	0.876	42.29	PASS						
3124	Head	835	1/16/2013	0.895	39.11	PASS	1/14/2013	GMSK	0.914	40.63	PASS	N/A
3124	Head	1800	1/15/2013	1.365	38.34	PASS	1/14/2013	GMSK	1.373	39.61	PASS	N/A
3124	Head	1900	1/15/2013	1.457	38.20	PASS						
3124	Head	2450	1/16/2013	1.812	39.28	PASS	3/12/2013	OFDM	1.795	37.65	N/A	PASS
3124	Head	2600	1/16/2013	1.971	38.77	PASS						
3124	Body	750	1/16/2013	0.967	54.55	PASS						
3124	Body	835	1/15/2013	0.989	53.55	PASS	1/15/2013	GMSK	0.99	53.547	PASS	N/A
3124	Body	1800	1/15/2013	1.448	51.40	PASS	1/14/2013	GMSK	1.45	52.38	PASS	N/A
3124	Body	1900	1/15/2013	1.568	51.03	PASS						
3124	Body	2450	1/16/2013	1.992	50.89	PASS	3/12/2013	OFDM	1.999	50.5	N/A	PASS
3124	Body	2600	1/16/2013	2.179	50.40	PASS						

DASY52™ Measurement System 3												
System Validation Measurements												
Probe	Tissue Type	f (MHz)	CW Validations				Modulated Validations					
			Date	Dielectric Parameters			Date	Mod. Type	Dielectric Parameters		Duty Factor Linearity Results	High PAR Linearity Results
				Measured σ (S/m)	Measured ϵ_r	Result			Measured σ (S/m)	Measured ϵ_r		
3730	Head	2450	1/16/2013	1.812	39.28	PASS	3/12/2013	OFDM	1.795	37.65	N/A	PASS
3730	Head	2600	1/16/2013	1.972	38.77	PASS						
3730	Head	5200	1/15/2013	4.547	35.00	PASS	3/18/2013	OFDM	4.562	35.362	N/A	PASS
3730	Head	5300	1/15/2013	4.663	34.79	PASS	3/18/2013	OFDM	4.679	35.123	N/A	PASS
3730	Head	5600	1/15/2013	4.981	34.10	PASS	3/18/2013	OFDM	5.014	34.448	N/A	PASS
3730	Head	5800	1/14/2013	5.204	33.67	PASS	3/19/2013	OFDM	5.243	34.016	N/A	PASS
3730	Body	2450	1/16/2013	1.992	50.89	PASS	3/12/2013	OFDM	1.999	50.5	N/A	PASS
3730	Body	2600	1/16/2013	2.179	50.40	PASS						
3730	Body	5200	1/14/2013	5.204	46.23	PASS	3/18/2013	OFDM	5.233	47.237	N/A	PASS
3730	Body	5300	1/14/2013	5.353	46.00	PASS	3/18/2013	OFDM	5.386	46.995	N/A	PASS
3730	Body	5600	1/14/2013	5.766	45.24	PASS	3/18/2013	OFDM	5.815	46.248	N/A	PASS
3730	Body	5800	1/14/2013	6.061	44.77	PASS	3/19/2013	OFDM	6.114	45.753	N/A	PASS

DASY52™ Measurement System 4												
System Validation Measurements												
Probe	Tissue Type	f (MHz)	CW Validations				Modulated Validations					
			Date	Dielectric Parameters			Date	Mod. Type	Dielectric Parameters		Duty Factor Linearity Results	High PAR Linearity Results
				Measured σ (S/m)	Measured ϵ_r	Result			Measured σ (S/m)	Measured ϵ_r		
3037	Head	750	1/8/2013	0.861	43.20	PASS						
3037	Head	835	1/7/2013	0.936	42.10	PASS	1/10/2013	GMSK	0.936	41.632	PASS	N/A
3037	Head	1800	1/7/2013	1.352	38.58	PASS	1/8/2013	GMSK	1.345	38.568	PASS	N/A
3037	Head	1900	1/7/2013	1.459	38.05	PASS						
3037	Head	2450	1/8/2013	1.822	37.87	PASS	3/12/2013	OFDM	1.795	37.65	N/A	PASS
3037	Head	2600	1/8/2013	1.974	37.32	PASS						
3037	Body	750	1/8/2013	0.911	54.83	PASS						
3037	Body	835	1/7/2013	0.997	53.94	PASS	1/8/2013	GMSK	1.00	54.83	PASS	N/A
3037	Body	1800	1/7/2013	1.443	52.70	PASS	1/8/2013	GMSK	1.43	52.459	PASS	N/A
3037	Body	1900	1/7/2013	1.567	52.25	PASS						
3037	Body	2450	1/8/2013	1.999	51.31	PASS	3/12/2013	OFDM	1.999	50.5	N/A	PASS
3037	Body	2600	1/8/2013	2.177	50.77	PASS						

3.4 Test System Verifications (System Performance Checks)

System accuracy verifications of the DASY52™ were performed using the measurement equipment listed in Section 3.1. The daily system performance check occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within ±10% from the target SAR indicated in Appendix 7. These frequencies are within ±10% of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted within 24 hours prior to the measurement of the phone. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1 W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). For frequencies below 3 GHz, the simulated tissue depth was verified to be 15.0 cm ± 0.5 cm. For frequencies above 3 GHz, the simulated tissue depth was verified to be 10 cm ± 0.5 cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

DASY52™ Measurement System 1											
System Verification Measurements for Head SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
1800	Measured, 18-Apr-2013	3180	259tr	7.46	37.3	1.34	-4.3%	37.1	-7.3%	22.1	19.4
	Recommended Limits	3180	259tr		38.1	1.40	±10%	40.0	±10%	18-25	18-25

DASY52™ Measurement System 2											
System Verification Measurements for Head SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
835	Measured, 9-Apr-2013	3124	436tr	2.0	10.0	0.94	4.5%	41.8	0.9%	22.3	20.3
	Measured, 12-Apr-2013	3124	436tr	2.0	10.0	0.93	3.4%	41.0	-1.3%	21.4	19.8
	Recommended Limits	3124	436tr		9.73	0.90	±10%	41.5	±10%	18-25	18-25
1800	Measured, 10-Apr-2013	3124	2d190	7.45	37.25	1.35	-3.6%	36.6	-8.5%	21.8	19.3
	Recommended Limits	3124	2d190		39.3	1.40	±10%	40.0	±10%	18-25	18-25

DASY52™ Measurement System 3											
System Verification Measurements for Head SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (%)	Measured ϵ_r	Deviation ϵ_r (%)		
2450	Measured, 21-Mar-2013	3730	863	5.64	56.4	1.813	+0.7%	37.16	-5.2%	21.6	19.3
	Recommended Limits	3730	863		54.2	1.80	±10%	39.2	±10%	18-25	18-25
	Measured, 24-Jul-2013	3730	740	5.32	53.2	1.776	+1.2%	37.24	-5.0%	21.2	20.7
	Recommended Limits	3730	740		52.3	1.80	±10%	39.2	±10%	18-25	18-25
2600	Measured, 20-Mar-2013	3730	1055	6.08	60.8	1.957	-0.2%	37.08	-4.9%	21.4	19.4
	Recommended Limits	3730	1055		57.8	1.96	±10%	39.0	±10%	18-25	18-25
5200	Measured, 27-Mar-2013	3730	1088	8.19	81.9	4.656	+0.1%	34.42	-4.4%	20.9	19.1
	Measured, 29-Mar-2013	3730	1088	7.85	78.5	4.707	+1.2%	34.83	-3.3%	21.5	19.3
	Recommended Limits	3730	1088		80.2	4.65	-5%/+10%	36.0	-10%/+5%	18-25	18-25
5800	Measured, 27-Mar-2013	3730	1088	8.26	82.6	5.346	+1.4%	33.00	-6.8%	21.2	19.1
	Recommended Limits	3730	1088		79.0	5.27	-5%/+10%	35.4	-10%/+5%	18-25	18-25

DASY52™ Measurement System 4											
System Verification Measurements for Head SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
750	Measured, 10-Apr-2013	3037	1040	1.6	8.0	0.89	0%	42.6	1.7%	22.2	19.5
	Recommended Limits	3037	1040		8.4	0.89	±10%	41.9	±10%	18-25	18-25
1800	Measured, 8-Apr-2013	3037	2d191	7.56	37.8	1.33	-5.0%	37.0	-7.6%	22.1	20.2
	Measured, 9-Apr-2013	3037	2d191	7.63	38.15	1.35	-3.6%	37.0	-7.6%	22.1	19.9
	Recommended Limits	3037	2d191		39.2	1.40	±10%	40.0	±10%	18-25	18-25

DASY52™ Measurement System 1											
System Verification Measurements for Body SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
1800	Measured, 12-Apr-2013	3180	259tr	7.58	37.9	1.42	-6.6%	49.4	-7.3%	21.8	18.6
	Measured, 17-Apr-2013	3180	259tr	7.72	38.6	1.46	-4.0%	48.9	-8.2%	21.6	19.2
	Recommended Limits	3180	259tr		39.1	1.52	±10%	53.3	±10%	18-25	18-25

DASY52™ Measurement System 2											
System Verification Measurements for Body SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
835	Measured, 9-Apr-2013	3124	436tr	1.95	9.75	1.00	3.1%	53.7	-2.8%	21.5	20.1
	Measured, 11-Apr-2013	3124	436tr	1.97	9.85	1.00	3.1%	53.3	-3.5%	21.7	19.8
	Measured, 12-Apr-2013	3124	436tr	1.97	9.85	1.00	3.1%	53.0	-4.1%	22.0	19.5
	Measured, 23-Jul-2013	3124	436tr	1.96	9.80	0.99	2.1%	54.1	-2.1%	21.5	20.5
	Recommended Limits	3124	436tr		10.1	0.97	±10%	55.2	±10%	18-25	18-25
1800	Measured, 9-Apr-2013	3124	2d190	7.62	38.1	1.44	-5.3%	48.9	-8.2%	21.0	19.0
	Measured, 10-Apr-2013	3124	2d190	7.79	38.95	1.44	-5.3%	48.8	-8.5%	21.4	18.9
	Measured, 15-Apr-2013	3124	2d190	7.75	38.75	1.44	-5.3%	49.4	-7.4%	21.2	18.8
	Recommended Limits	3124	2d190		37.8	1.52	±10%	53.3	±10%	18-25	18-25

DASY52™ Measurement System 4											
System Verification Measurements for Body SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (S/m)	Measured ϵ_r	Deviation ϵ_r		
750	Measured, 10-Apr-2013	3037	1040	1.7	8.5	0.98	1.8%	53.5	-3.7%	22.2	19.5
	Measured, 10-Apr-2013	3037	1040	1.68	8.4	0.98	1.8%	53.5	-3.7%	21.6	19.1
	Recommended Limits	3037	1040		8.80	0.96	±10%	55.5	±10%	18-25	18-25
1800	Measured, 8-Apr-2013	3037	2d191	8.04	40.2	1.43	-6.0%	49.0	-8.1%	21.6	20.0
	Measured, 9-Apr-2013	3037	2d191	8.06	40.3	1.59	4.7%	50.4	-5.4%	21.6	19.6
	Measured, 12-Apr-2013	3037	2d191	7.91	39.55	1.42	-6.6%	49.4	-7.3%	21.9	19.7
	Recommended Limits	3037	2d191		37.8	1.52	±10%	53.3	±10%	18-25	18-25

DASY52™ Measurement System 3											
System Verification Measurements for Body SAR Measurements											
<i>f</i> (MHz)	Description	Probe	Dipole	Measured SAR (W/kg), 1 gram	Normalized SAR (W/kg), 1 gram	Dielectric Parameters				Ambient Temp (°C)	Tissue Temp (°C)
						Measured σ (S/m)	Deviation σ (%)	Measured ϵ_r	Deviation ϵ_r (%)		
2450	Measured, 23-Mar-2013	3730	863	5.35	53.5	2.014	+3.3%	50.24	-4.7%	21.3	19.5
	Recommended Limits	3730	863		52.8	1.95	±10%	52.7	±10%	18-25	18-25
	Measured, 25-Mar-2013	3730	740	5.02	50.2	1.970	+1.0%	50.49	-4.2%	21.6	19.6
	Recommended Limits	3730	740		49.5	1.95	±10%	52.7	±10%	18-25	18-25
2600	Measured, 15-Mar-2013	3730	1055	5.87	58.7	2.145	-0.7%	50.22	-4.3%	21.8	20.7
	Measured, 20-Mar-2013	3730	1055	5.89	58.9	2.162	+0.1%	50.01	-4.7%	21.3	19.2
	Recommended Limits	3730	1055		55.6	2.16	±10%	52.5	±10%	18-25	18-25
	Measured, 2-Apr-2013	3730	1054	5.92	59.2	2.158	-0.1%	49.94	-4.9%	21.8	20.0
	Recommended Limits	3730	1054		54.5	2.16	±10%	52.5	±10%	18-25	18-25
5200	Measured, 27-Mar-2013	3730	1088	7.94	79.4	5.341	+0.8%	46.61	-4.9%	21.2	19.2
	Measured, 29-Mar-2013	3730	1088	7.92	79.2	5.339	+0.7%	46.60	-4.9%	21.1	19.3
	Recommended Limits	3730	1088		75.5	5.30	-5%/+10%	49.0	-10%/+5%	18-25	18-25
5800	Measured, 29-Mar-2013	3730	1088	7.38	73.8	6.220	+3.6%	45.04	-6.6%	21.1	19.3
	Measured, 30-Mar-2013	3730	1088	7.26	72.6	6.242	+4.0%	44.60	-7.5%	21.7	20.0
	Recommended Limits	3730	1088		75.4	6.00	-5%/+10%	48.2	-10%/+5%	18-25	18-25

3.5 Simulated Tissue Dielectric Properties

Validation, System Performance Check, and device SAR measurements are performed using the DASY52™ system along with liquids specified to simulate head and body tissues subjected to electromagnetic exposure. The list of ingredients and the percent composition of the tissue-simulating liquids used for testing are indicated in the following table.

Ingredient	782 / 835 / 900 MHz Head	782 / 835 / 900 MHz Body	1800 MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450 MHz Head	2450 MHz Body	5 GHz Head	5 GHz Body
Sugar	57.0	44.9	--	--	--	--	--	--
DGBE	--	--	47.0	30.8	6.89	8.0	--	--
Water	40.45	53.06	52.62	68.8	57.95	71.8	65.52	78.66
Salt	1.45	0.94	0.38	0.4	0.15	0.2	--	--
HEC	1.0	1.0	--	--	--	--	--	--
Bact.	0.1	0.1	--	--	--	--	--	--
Triton X-100	--	--	--	--	35.02	20.0	17.24	10.67
Di(ethylene glycol) Hexyl Ether	--	--	--	--	--	--	17.24	10.67

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and conductivity, σ , of the tissue-simulating liquids were measured with a SPEAG™ DAK-3.5 Dielectric Assessment Kit across the frequency ranges of interest. These values, along with recommended targets, percent deviation from the targets, and the temperature of the simulated tissue are shown in the tables below.

Note: while the SPEAG user guide states 5% dielectric tolerance requirements for frequencies above 3 GHz, we have confirmed with SPEAG that their compensation algorithm is effective above 3 GHz, and shared this with the FCC. The FCC has permitted this exception to their KDB 865664 requirements in light of this, while SPEAG undertakes an update to their documentation.

For SAR measurements, the dielectric measurements from the DAK-3.5 are imported into the DASY software which performs interpolation to determine the dielectric parameters at the specific frequencies used for device testing. The DASY software also implements SAR error compensation algorithms to automatically correct the measured SAR results for deviations between the measured and target dielectric parameters. This error compensation has been verified by the lab to meet the requirements in FCC KDB 865664 D01. Therefore, where frequencies of test fall within ± 50 MHz of a calibration point of the probe used for test, the acceptable range of tissue variation is $\pm 10\%$ per FCC KDB 865664 D01 section 2.4. For test frequencies outside of ± 50 MHz of a probe calibration point, the range of tissue variation is reduced per section 2.6 part 2 of the same KDB, to ensure that tissues used in testing are within the required specification regardless of device performance. A mass density of $\rho = 1 \text{ g/cm}^3$ was entered into the system for all cases. It can be seen that the measured parameters are within tolerance of the recommended targets specified in [1] and [5].

Head Simulated-Tissue Dielectric Parameters									
Index	Date Measured	f (MHz)	Target σ (S/m)	Target ϵ_r	Measured σ (S/m)	Deviation σ (%)	Measured ϵ_r	Deviation ϵ_r (%)	Temp (°C)
710	10-Apr-2013	699.6	0.89 ±10%	42.20 ±10%	0.86	-3.4%	43.0	2.0%	19.5
		710.0	0.89 ±10%	42.15 ±10%	0.87	-2.3%	42.9	1.9%	
		716.0	0.89 ±10%	42.12 ±10%	0.87	-2.4%	42.9	1.9%	
835	9-Apr-2013	820.0	0.90 ±10%	41.58 ±10%	0.92	2.4%	42.0	1.1%	20.2
		835.0	0.90 ±10%	41.50 ±10%	0.94	4.5%	41.8	0.9%	
		849.0	0.92 ±10%	41.50 ±10%	0.95	3.9%	41.7	0.5%	
835	12-Apr-2013	820.0	0.90 ±10%	41.58 ±10%	0.92	2.4%	41.2	-1.0%	19.8
		835.0	0.90 ±10%	41.50 ±10%	0.93	3.4%	41.0	-1.3%	
		849.0	0.92 ±10%	41.50 ±10%	0.94	2.8%	40.8	-1.7%	
1730	8-Apr-2013	1709.0	1.35 -5%/+10%	40.13 -10%/+5%	1.31	-2.9%	37.0	-7.8%	19.7
		1730.0	1.36 -5%/+10%	40.10 -10%/+5%	1.33	-2.3%	36.9	-7.9%	
		1755.0	1.37 -5%/+10%	40.06 -10%/+5%	1.35	-1.8%	36.8	-8.2%	
1750	18-Apr-2013	1709.0	1.35 -5%/+10%	40.13 -10%/+5%	1.33	-1.4%	37.6	-6.3%	19.5
		1730.0	1.36 -5%/+10%	40.10 -10%/+5%	1.35	-0.8%	37.5	-6.5%	
		1755.0	1.37 -5%/+10%	40.06 -10%/+5%	1.37	-0.4%	37.4	-6.7%	
1880	9-Apr-2013	1850.0	1.40 ±10%	40.00 ±10%	1.40	0.0%	36.7	-8.3%	19.9
		1880.0	1.40 -5%/+10%	40.00 -10%/+5%	1.43	2.2%	36.5	-8.7%	
		1915.0	1.40 -5%/+10%	40.00 -10%/+5%	1.47	5.0%	36.4	-9.1%	
1880	10-Apr-2013	1850.0	1.40 ±10%	40.00 ±10%	1.41	0.8%	36.3	-9.2%	19.1
		1880.0	1.40 -5%/+10%	40.00 -10%/+5%	1.44	2.9%	36.2	-9.5%	
		1915.0	1.40 -5%/+10%	40.00 -10%/+5%	1.47	5.0%	36.0	-10.0%	
2450	21-Mar-2013	2412.0	1.77 ±10%	39.27 ±10%	1.77	0.3%	37.3	-5.1%	20.6
		2450.0	1.80 ±10%	39.20 ±10%	1.81	0.6%	37.2	-5.3%	
		2462.0	1.81 ±10%	39.18 ±10%	1.83	1.0%	37.1	-5.3%	
2450	24-Jul-2013	2412.0	1.77 ±10%	39.27 ±10%	1.73	-2.1%	37.3	-5.0%	20.7
		2450.0	1.80 ±10%	39.20 ±10%	1.78	-1.2%	37.2	-5.0%	
		2462.0	1.81 ±10%	39.18 ±10%	1.79	-1.3%	37.2	-5.1%	
2535	20-Mar-2013	2502.0	1.86 -5%/+10%	39.13 -10%/+5%	1.86	0.2%	37.4	-4.4%	19.7
		2535.0	1.89 -5%/+10%	39.09 -10%/+5%	1.89	-0.2%	37.3	-4.5%	
		2568.0	1.93 ±10%	39.05 ±10%	1.92	-0.5%	37.2	-4.8%	
5500	27-Mar-2013	5180.0	4.63 -5%/+10%	36.02 -10%/+5%	4.63	-0.1%	34.5	-4.4%	19.7
		5500.0	4.96 -5%/+10%	35.65 -10%/+5%	5.00	0.9%	33.7	-5.5%	
		5825.0	5.30 -5%/+10%	35.36 -10%/+5%	5.38	1.6%	33.0	-6.9%	
	29-Mar-2013	5180.0	4.63 -5%/+10%	36.02 -10%/+5%	4.69	1.3%	34.9	-3.2%	19.2
		5500.0	4.96 -5%/+10%	35.65 -10%/+5%	5.05	1.9%	34.1	-4.4%	
		5825.0	5.30 -5%/+10%	35.36 -10%/+5%	5.43	2.6%	33.3	-5.8%	

Body Simulated-Tissue Dielectric Parameters									
Index	Date Measured	f (MHz)	Target σ (S/m)	Target ϵ_r	Measured σ (S/m)	Deviation σ (%)	Measured ϵ_r	Deviation ϵ_r (%)	Temp (°C)
710	10-Apr-2013	699.6	0.96 ±10%	55.73 ±10%	0.94	-2.1%	53.8	-3.5%	19.3
		710.0	0.96 ±10%	55.69 ±10%	0.95	-1.1%	53.7	-3.5%	
		716.0	0.96 ±10%	55.66 ±10%	0.95	-1.2%	53.7	-3.6%	
710	11-Apr-2013	699.6	0.96 ±10%	55.73 ±10%	0.94	-2.1%	53.8	-3.5%	19.6
		710.0	0.96 ±10%	55.69 ±10%	0.95	-1.1%	53.8	-3.5%	
		716.0	0.96 ±10%	55.66 ±10%	0.95	-1.2%	53.7	-3.5%	
835	9-Apr-2013	820.0	0.97 ±10%	55.26 ±10%	0.99	2.2%	53.8	-2.6%	19.8
		835.0	0.97 ±10%	55.20 ±10%	1.00	3.1%	53.7	-2.8%	
		849.0	0.99 ±10%	55.16 ±10%	1.02	3.4%	53.5	-3.0%	
835	11-Apr-2013	820.0	0.97 ±10%	55.26 ±10%	0.98	1.2%	53.5	-3.3%	19.8
		835.0	0.97 ±10%	55.20 ±10%	1.00	3.1%	53.3	-3.5%	
		849.0	0.99 ±10%	55.16 ±10%	1.01	2.4%	53.2	-3.7%	
835	13-Apr-2013	820.0	0.97 ±10%	55.26 ±10%	0.99	2.2%	53.1	-3.9%	19.5
		835.0	0.97 ±10%	55.20 ±10%	1.00	3.1%	53.0	-4.1%	
		849.0	0.99 ±10%	55.16 ±10%	1.01	2.4%	52.8	-4.3%	
835	23-Jul-2013	820.0	0.97 ±10%	55.26 ±10%	0.98	1.2%	54.3	-1.8%	20.8
		835.0	0.97 ±10%	55.20 ±10%	0.99	2.1%	54.1	-2.1%	
		849.0	0.99 ±10%	55.16 ±10%	1.01	2.4%	53.9	-2.3%	
1730	8-Apr-2013	1709.0	1.47 -5%/+10%	53.55 -10%/+5%	1.45	-1.1%	50.9	-5.0%	19.7
		1730.0	1.48 -5%/+10%	53.50 -10%/+5%	1.48	0.0%	50.8	-5.1%	
		1755.0	1.49 -5%/+10%	53.39 -10%/+5%	1.51	1.2%	50.7	-5.1%	
1730	12-Apr-2013	1709.0	1.47 -5%/+10%	53.55 -10%/+5%	1.47	0.3%	50.5	-5.7%	19.2
		1730.0	1.48 -5%/+10%	53.50 -10%/+5%	1.50	1.4%	50.4	-5.8%	
		1755.0	1.49 -5%/+10%	53.39 -10%/+5%	1.52	1.9%	50.3	-5.8%	
1730	17-Apr-2013	1709.0	1.47 -5%/+10%	53.55 -10%/+5%	1.49	1.7%	49.9	-6.8%	19.1
		1730.0	1.48 -5%/+10%	53.50 -10%/+5%	1.52	2.8%	49.8	-6.9%	
		1755.0	1.49 -5%/+10%	53.39 -10%/+5%	1.55	3.9%	49.7	-6.9%	
1730	18-Apr-2013	1709.0	1.47 -5%/+10%	53.55 -10%/+5%	1.48	1.0%	50.2	-6.3%	19.1
		1730.0	1.48 -5%/+10%	53.50 -10%/+5%	1.50	1.4%	50.1	-6.3%	
		1755.0	1.49 -5%/+10%	53.39 -10%/+5%	1.53	2.5%	50.0	-6.3%	
1880	10-Apr-2013	1850.0	1.52 ±10%	53.30 ±10%	1.50	-1.4%	48.6	-8.9%	19.2
		1880.0	1.52 -5%/+10%	53.30 -10%/+5%	1.54	1.4%	48.5	-9.1%	
		1915.0	1.52 -5%/+10%	53.30 -10%/+5%	1.58	4.0%	48.3	-9.4%	
1880	11-Apr-2013	1850.0	1.52 ±10%	53.30 ±10%	1.49	-2.0%	48.5	-9.0%	19.0
		1880.0	1.52 -5%/+10%	53.30 -10%/+5%	1.53	0.7%	48.4	-9.2%	
		1915.0	1.52 -5%/+10%	53.30 -10%/+5%	1.58	4.0%	48.3	-9.5%	
1880	15-Apr-2013	1850.0	1.52 ±10%	53.30 ±10%	1.49	-2.0%	49.2	-7.8%	19.2
		1880.0	1.52 -5%/+10%	53.30 -10%/+5%	1.53	0.7%	49.1	-8.0%	
		1915.0	1.52 -5%/+10%	53.30 -10%/+5%	1.57	3.3%	48.9	-8.3%	
1880	17-Apr-2013	1850.0	1.52 ±10%	53.30 ±10%	1.52	0.0%	48.7	-8.7%	19.2
		1880.0	1.52 -5%/+10%	53.30 -10%/+5%	1.55	2.0%	48.6	-8.9%	
		1915.0	1.52 -5%/+10%	53.30 -10%/+5%	1.59	4.7%	48.4	-9.2%	
2450	23-Mar-2013	2412.0	1.91 ±10%	52.75 ±10%	1.97	2.9%	50.4	-4.6%	19.5
		2450.0	1.95 ±10%	52.70 ±10%	2.01	3.1%	50.2	-4.7%	
		2462.0	1.97 ±10%	52.68 ±10%	2.03	3.3%	50.2	-4.8%	
2450	25-Mar-2013	2412.0	1.91 ±10%	52.75 ±10%	1.92	0.3%	50.6	-4.2%	19.7
		2450.0	1.95 ±10%	52.70 ±10%	1.97	1.1%	50.5	-4.2%	
		2462.0	1.97 ±10%	52.68 ±10%	1.98	0.7%	50.5	-4.3%	
2535	15-Mar-2013	2502.0	2.02 -5%/+10%	52.63 -10%/+5%	2.03	0.4%	50.5	-4.0%	20.7
		2535.0	2.07 -5%/+10%	52.59 -10%/+5%	2.07	0.1%	50.4	-4.1%	
		2568.0	2.12 ±10%	52.54 ±10%	2.11	-0.3%	50.3	-4.3%	
2535	20-Mar-2013	2502.0	2.02 -5%/+10%	52.63 -10%/+5%	2.04	0.9%	50.3	-4.4%	19.7
		2535.0	2.07 -5%/+10%	52.59 -10%/+5%	2.08	0.6%	50.2	-4.5%	
		2568.0	2.12 ±10%	52.54 ±10%	2.12	0.3%	50.1	-4.7%	
2535	2-Apr-2013	2502.0	2.02 -5%/+10%	52.63 -10%/+5%	2.04	0.9%	50.2	-4.6%	20.0
		2535.0	2.07 -5%/+10%	52.59 -10%/+5%	2.08	0.6%	50.1	-4.7%	
		2568.0	2.12 ±10%	52.54 ±10%	2.12	0.3%	50.0	-4.8%	
5500	27-Mar-2013	5180.0	5.28 -5%/+10%	49.05 -10%/+5%	5.32	0.8%	46.7	-4.9%	19.5
		5500.0	5.65 -5%/+10%	48.61 -10%/+5%	5.78	2.3%	45.8	-5.8%	
		5825.0	6.03 -5%/+10%	48.17 -10%/+5%	6.29	4.4%	45.0	-6.6%	
5500	29-Mar-2013	5180.0	5.28 -5%/+10%	49.05 -10%/+5%	5.32	0.8%	46.6	-5.0%	19.4
		5500.0	5.65 -5%/+10%	48.61 -10%/+5%	5.77	2.2%	45.8	-5.8%	
		5825.0	6.03 -5%/+10%	48.17 -10%/+5%	6.27	4.0%	45.0	-6.6%	
5500	30-Mar-2013	5180.0	5.28 -5%/+10%	49.05 -10%/+5%	5.31	0.6%	46.1	-6.0%	20.0
		5500.0	5.65 -5%/+10%	48.61 -10%/+5%	5.79	2.5%	45.3	-6.8%	
		5825.0	6.03 -5%/+10%	48.17 -10%/+5%	6.28	4.2%	44.5	-7.6%	

4 Test Setup Information, SAR Measurement Results, and Analysis

4.1 Overview of Test Setup and Results

The phone was tested in the exposure configurations stipulated in [1], [4], [5], [9], and per FCC KDB 941225 D06 for mobile hotspot operation. The phone was positioned into these configurations using the device holder supplied with the DASY52™ SAR measurement system. The default settings for the SAR scans are set in accordance with FCC KDB 865664 D01 for all area scan resolutions, zoom scan resolutions and volumes, and probe positioning. Please refer to the DASY52™ manual for additional information on SAR scanning procedures and algorithms used.

The SAR measurements were performed using the SAM and Flat phantoms listed in section 3.1. The same phantoms and simulated tissues were used for the system performance checks and the device SAR measurements. Consequently the Z-axis scans included in Appendix 1 are applicable for verification of the required simulated tissue depths of 15.0 cm ± 0.5 cm for frequencies less than 3 GHz, or 10.0 cm ± 0.5 cm for frequencies greater than 3 GHz.

The SAR results shown in following tables are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to [6]. Also shown are the maximum device power, measured device power, temperature of the simulated tissue after the test, the measured drift and the scaled SAR. The exact method of scaling is:

$$\text{Scaled SAR} = (\text{Measured SAR}) * 10^{\left(\frac{(\text{Maximum Power}) - (\text{Measured Power})}{10}\right)} * 10^{\left(\frac{-\text{Drift}}{10}\right)}$$

The SAR reported at the end of the measurement process by the DASY52™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. Note that measured SAR is scaled only in the manner which results in a more conservative scaled value, i.e. to a higher SAR value as a consequence of measured power being below the maximum allowed power, or for negative drift values.

The test conditions that produced the highest SAR values for each combination of DUT mode and exposure condition are indicated as **bold** numbers in the following tables. Plots of these tests are included in Appendices 2 through 4.

4.2 Head-Adjacent Exposure Results

Left Cheek-Touch Position												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	19.2	0.020	0.199	0.24	0.327	0.39	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	19.2	0.000	0.126	0.15	0.207	0.25	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	19	-0.100	0.175	0.25	0.281	0.39	A45
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	18.8	-0.090	0.106	0.15	0.184	0.26	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.2	-0.330	0.143	0.19	0.193	0.25	A46
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.1	0.060	0.098	0.12	0.132	0.16	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	20	-0.02	0.246	0.27	0.327	0.35	
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	31.43	18.7	0.08	0.142	0.14	0.227	0.23	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.7	-0.06	0.168	0.22	0.223	0.29	A41
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	-0.13	0.234	0.30	0.377	0.48	A42
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	18.9	0.12	0.182	0.22	0.289	0.35	
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	18.3	0.06	0.118	0.12	0.236	0.24	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.8	0.03	0.109	0.11	0.217	0.22	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	19.3	-0.01	0.0876	0.09	0.275	0.28	
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	19.0	-0.09	0.101	0.10	0.275	0.28	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		19.1	-0.11	0.0565	0.06	0.155	0.16	

Table 4-1: SAR measurement results in a head-adjacent position against the ICNIRP and ANSI SAR Limit.

Right Cheek-Touch Position												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	19.2	0.080	0.359	0.43	0.594	0.72	A44
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	19.2	0.130	0.226	0.27	0.373	0.44	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	19.6	-0.060	0.162	0.23	0.257	0.36	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	19.1	0.120	0.077	0.11	0.130	0.18	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	18.7	0.080	0.081	0.10	0.104	0.13	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	18.8	0.050	0.057	0.07	0.073	0.09	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	19.6	-0.03	0.291	0.32	0.389	0.42	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	128	824.2	28.0	26.30	19.6	-0.10	0.166	0.25	0.22	0.33	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.6	0.08	0.282	0.39	0.38	0.53	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	251	848.8	28.0	26.08	19.6	-0.14	0.375	0.60	0.503	0.81	A39
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	31.43	18.7	0.32	0.224	0.23	0.364	0.37	A40
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	25.0	24.92	18.7	0.14	0.093	0.12	0.149	0.19	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.7	0.03	0.162	0.21	0.216	0.28	
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	0.02	0.144	0.18	0.241	0.30	
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	18.9	0.36	0.325	0.40	0.525	0.64	A43
802.11b, 1 Mbps	SNN5923A	6	2412.0		18.13	20.5	0.05	0.34	0.34	0.751	0.75	
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	19.3	-0.066	0.430	0.44	0.965	0.98	A47
802.11b, 1 Mbps	SNN5923A	6	2462.0		17.24	20.5	0.00	0.271	0.27	0.601	0.60	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.8	-0.22	0.311	0.33	0.687	0.72	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	19.0	-0.314	0.143	0.15	0.470	0.50	A48
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	18.8	-0.117	0.142	0.15	0.419	0.43	A49
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		18.4	-0.16	0.0696	0.07	0.214	0.22	
Bluetooth, 3 Mbps	SNN5923A	39	2441.0		10.59	20.7	-0.86	0.0112	0.01	0.0226	0.03	A50

Table 4-2: SAR measurement results in a head-adjacent position against the ICNIRP and ANSI SAR Limit.

Left 15° Tilt Position												
Mode	Battery/ Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	19.3	0.140	0.036	0.04	0.060	0.07	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	19.3	0.030	0.094	0.11	0.156	0.18	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	19.2	0.270	0.142	0.20	0.236	0.32	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	19.1	0.000	0.080	0.11	0.138	0.19	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.2	-0.340	0.049	0.06	0.062	0.08	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.2	-0.060	0.035	0.04	0.045	0.06	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	20	0.23	0.123	0.13	0.16	0.17	
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	31.43	18.7	0.19	0.089	0.09	0.144	0.15	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.7	-0.02	0.102	0.13	0.134	0.17	
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	0.06	0.119	0.15	0.208	0.26	
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	18.9	-0.04	0.11	0.14	0.18	0.22	
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	18.3	-0.04	0.0755	0.08	0.145	0.15	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.8	0.11	0.0664	0.07	0.13	0.13	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	19.1	0.00	0.101	0.10	0.318	0.32	
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	19	-0.07	0.11	0.11	0.295	0.30	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		18.7	-0.16	0.0561	0.06	0.138	0.14	

Table 4-3: SAR measurement results in a head-adjacent position against the ICNIRP and ANSI SAR Limit.

Right 15° Tilt Position												
Mode	Battery/ Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	19.3	0.020	0.132	0.16	0.223	0.27	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	19.3	-0.060	0.083	0.10	0.141	0.17	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	19	0.030	0.137	0.19	0.221	0.30	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	19.1	-0.080	0.083	0.12	0.145	0.20	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.2	18.6	-0.210	0.038	0.05	0.047	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.2	18.7	-0.030	0.028	0.04	0.037	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	19.6	0.00	0.176	0.19	0.23	0.25	
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	31.43	18.7	-0.13	0.0821	0.09	0.132	0.14	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.7	0.09	0.095	0.12	0.125	0.16	
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	0.03	0.141	0.18	0.248	0.31	
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	18.9	-0.05	0.0962	0.12	0.161	0.20	
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	18.3	-0.16	0.149	0.15	0.319	0.33	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.8	-0.14	0.112	0.12	0.226	0.23	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	19.0	0.01	0.103	0.10	0.350	0.35	
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	18.8	-0.01	0.0718	0.07	0.203	0.20	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		20	-0.12	0.0394	0.04	0.117	0.12	

Table 4-4: SAR measurement results in a head-adjacent position against the ICNIRP and ANSI SAR Limit.

4.3 Body-Worn Accessory Exposure Results


Body-Worn Accessory Position, Front of Phone 25 mm from Phantom												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	18.5	-0.110	0.212	0.26	0.347	0.43	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	18.5	0.010	0.137	0.16	0.223	0.26	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	18.5	-0.070	0.137	0.19	0.220	0.31	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	19.4	-0.070	0.093	0.13	0.154	0.22	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	20	-0.460	0.032	0.04	0.044	0.06	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.9	0.050	0.016	0.02	0.022	0.03	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	19.6	-0.07	0.156	0.17	0.207	0.23	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	251	848.8	28.0	26.08	20.4	0.03	.316	0.49	0.422	0.66	A51
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	30.43	18.6	-0.02	0.0891	0.09	0.142	0.14	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	20.1	-0.02	0.155	0.20	0.205	0.27	A53
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	-0.03	0.175	0.22	0.304	0.38	
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	19.6	-0.03	0.166	0.20	0.266	0.33	
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	19.6	-0.55	0.0147	0.02	0.0243	0.03	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.6	-0.30	0.00515	0.01	0.01	0.01	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	18.3	0.00	0.0165	0.02	0.0436	0.04	
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	19.2	-0.20	0.0276	0.03	0.0693	0.07	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		20.2	-0.09	0.0152	0.02	0.0325	0.03	

Table 4-5: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Body-Worn Accessory Position, Back of Phone 25 mm from Phantom												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	24.0	23.19	18.6	-0.040	0.371	0.45	0.615	0.75	A56
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	23.0	22.26	18.6	-0.030	0.237	0.28	0.393	0.47	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	24.0	22.62	18.9	-0.120	0.219	0.31	0.355	0.50	A57
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	23.0	21.59	19.4	-0.070	0.142	0.20	0.239	0.34	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.9	-0.173	0.045	0.06	0.063	0.08	A58
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.9	-0.020	0.021	0.03	0.029	0.04	
GSM 850, CS Voice	SNN5923A	251	848.8	33.5	33.18	19.6	-0.07	0.125	0.14	0.166	0.18	
GSM 1900, CS Voice	SNN5923A	512	1850.2	30.5	30.43	18.6	-0.03	0.178	0.18	0.29	0.30	A52
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	25.0	23.92	20.4	-0.05	0.0853	0.11	0.138	0.18	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	20.1	-0.03	0.148	0.19	0.196	0.25	
WCDMA 1700, RMC	SNN5923A	1513	1752	24.0	23.05	19.7	-0.06	0.229	0.29	0.374	0.47	A54
WCDMA 1900, RMC	SNN5923A	9400	1880	24.0	23.14	19.6	-0.03	0.289	0.35	0.471	0.58	A55
802.11b, 1 Mbps	SNN5923A	6	2437.0		19.14	19.6	-0.0013	0.0348	0.03	0.0602	0.06	A59
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.6	-0.12	0.0266	0.03	0.0452	0.05	
802.11a, 6 Mbps	SNN5923A	36	5180.0		15.56	18.1	0.043	0.0787	0.08	0.184	0.18	A60
802.11a, 6 Mbps	SNN5923A	157	5785.0		20.09	19.2	-0.006	0.0625	0.06	0.189	0.19	A61
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		20.2	0.15	0.0245	0.02	0.0596	0.06	

Table 4-6: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

4.4 Mobile Hotspot Exposure Results

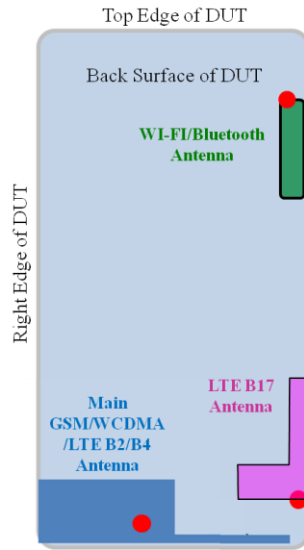

Mobile Hotspot Surfaces/Edges for SAR testing						
Mode	Front	Back	Left	Right	Top	Bottom
LTE Bands 2/4	Yes	Yes	Yes	Yes	No	Yes
LTE Band 17	Yes	Yes	Yes	No	No	Yes
GSM	Yes	Yes	Yes	Yes	No	Yes
WCDMA	Yes	Yes	Yes	Yes	No	Yes
Wi-Fi	Yes	Yes	Yes	No	Yes	No

Mobile Hotspot Position, Front of Phone 10 mm from Phantom												
Mode	Battery/ Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	-0.020	0.237	0.24	0.447	0.45	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	0.010	0.232	0.23	0.436	0.44	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	-0.040	0.249	0.25	0.467	0.47	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	-0.070	0.249	0.25	0.461	0.47	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.3	-0.120	0.089	0.11	0.138	0.17	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.5	0.110	0.043	0.05	0.066	0.08	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.7	0.07	0.306	0.43	0.412	0.58	A63
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	19.1	-0.06	0.146	0.15	0.272	0.28	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.5	-0.10	0.245	0.32	0.319	0.42	
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.1	-0.07	0.25	0.25	0.465	0.47	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	19.2	-0.03	0.167	0.17	0.306	0.31	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.5	-0.22	0.052	0.05	0.101	0.11	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		20	-0.76	0.0107	0.01	0.0558	0.07	

Table 4-7: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Mobile Hotspot Position, Back of Phone 10 mm from Phantom												
Mode	Battery/ Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	-0.110	0.393	0.40	0.756	0.78	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	0.170	0.411	0.41	0.792	0.79	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	-0.110	0.352	0.36	0.668	0.69	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	-0.100	0.353	0.36	0.668	0.68	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.3	0.090	0.145	0.18	0.228	0.28	A70
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.5	-0.090	0.069	0.09	0.108	0.14	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.6	0.34	0.3	0.42	0.407	0.57	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	19.1	-0.06	0.268	0.27	0.506	0.51	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.4	0.00	0.271	0.35	0.355	0.46	A65
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.1	0.03	0.401	0.40	0.771	0.77	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	19.1	0.00	0.307	0.31	0.577	0.58	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.5	-0.06	0.116	0.12	0.242	0.25	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		19.1	-0.08	0.047	0.05	0.141	0.14	

Table 4-8: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Mobile Hotspot Position, Left Edge of Phone 10 mm from Phantom												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	-0.02	0.018	0.018	0.03	0.03	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	0.08	0.019	0.019	0.04	0.04	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	0.060	0.071	0.07	0.126	0.13	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.5	-0.070	0.075	0.08	0.133	0.14	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.3	-0.120	0.127	0.16	0.182	0.23	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.4	-0.010	0.067	0.08	0.096	0.12	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.7	0.12	0.134	0.19	0.195	0.27	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	19.1	-0.06	0.0111	0.01	0.0187	0.02	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.5	-0.05	0.191	0.25	0.276	0.36	
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.2	0.00	0.0688	0.07	0.123	0.12	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	19.2	0.15	0.0135	0.01	0.0205	0.02	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.5	0.041	0.210	0.21	0.455	0.46	A71
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		19	-0.047	0.0752	0.08	0.255	0.26	A72

Table 4-9: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Mobile Hotspot Position, Right Edge of Phone 10 mm from Phantom												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	0.100	0.061	0.06	0.104	0.10	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.2	0.000	0.062	0.06	0.106	0.11	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	19.5	See supplemental	18.6	0.140	0.025	0.02	0.042	0.04	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.7	-0.100	0.027	0.03	0.045	0.05	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.7	-0.03	0.216	0.30	0.314	0.44	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	19.1	-0.11	0.0261	0.03	0.0432	0.04	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.4	0.03	0.177	0.23	0.256	0.33	
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.2	0.02	0.0294	0.03	0.0495	0.05	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	19.1	-0.03	0.0486	0.05	0.0811	0.08	

Table 4-10: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Mobile Hotspot Position, Top Edge of Phone 10 mm from Phantom												
Mode	Battery/Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
802.11b, 1 Mbps	SNN5923A	6	2437.0	17		19.5	0.02	0.0208	0.02	0.0361	0.04	
802.11a, 6 Mbps	SNN5923A	157	5785.0	16		19	-0.03	0.0229	0.02	0.0665	0.07	

Table 4-11: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom												
Mode	Battery/ Accessory	Channel	f (MHz)	DUT Power		Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value		Plot Page
				Maximum (dBm)	Measured (dBm)			Measured (W/kg)	Corrected (W/kg)	Measured (W/kg)	Corrected (W/kg)	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18700	1860.0	17.5	See supplemental	18.7	0.010	0.389	0.39	0.762	0.76	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18700	1860.0	17.5	See supplemental	18.7	0.010	0.568	0.57	1.110	1.11	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.1	0.020	0.653	0.65	1.300	1.30	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.1	0.090	0.658	0.66	1.320	1.32	A68
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	18900	1880.0	17.5	See supplemental	18.1	0.070	0.650	0.65	1.300	1.30	
LTE B2, 20 MHz BW QPSK (100% RB)	SNN5923A	18900	1880.0	17.5	See supplemental	18.7	-0.050	0.580	0.59	1.150	1.16	
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	SNN5923A	19100	1900.0	17.5	See supplemental	18.7	0.390	0.528	0.53	1.050	1.05	
LTE B2, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	19100	1900.0	17.5	See supplemental	18.7	-0.050	0.528	0.53	1.040	1.05	
LTE B4, 20 MHz BW QPSK (1 RB @ High)	SNN5923A	20175	1732.5	19.5	See supplemental	18.6	-0.040	0.494	0.50	0.999	1.01	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.6	0.010	0.499	0.50	1.020	1.02	
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	SNN5923A	20175	1732.5	19.5	See supplemental	18.6	0.030	0.500	0.50	1.020	1.02	A69
LTE B4, 20 MHz BW QPSK (100% RB)	SNN5923A	20175	1732.5	19.5	See supplemental	18.6	-0.050	0.494	0.50	1.010	1.02	
LTE B17, 10 MHz BW QPSK (1 RB @ High)	SNN5923A	23790	710.0	24.0	23.16	19.3	0.000	0.048	0.06	0.071	0.09	
LTE B17, 10 MHz BW QPSK (50% RB @ High)	SNN5923A	23790	710.0	23.0	22.12	19.4	0.170	0.022	0.03	0.034	0.04	
GPRS 850, Class 12 (4 Uplink Timeslots)	SNN5923A	190	836.6	28.0	26.54	19.7	-0.02	0.0236	0.03	0.0421	0.06	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	19.1	0.03	0.441	0.44	0.852	0.85	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	512	1850.2	21.0	See supplemental	18.7	-0.07	0.427	0.43	0.868	0.88	A64
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	661	1880	21.0	See supplemental	19.2	-0.03	0.365	0.37	0.714	0.72	
GPRS 1900, Class 12 (4 Uplink Timeslots)	SNN5923A	810	1909.8	21.0	See supplemental	19.2	0.05	0.343	0.34	0.699	0.70	
WCDMA 850, RMC	SNN5923A	4132	826.4	24.0	22.89	19.5	0.05	0.0152	0.02	0.0272	0.04	
WCDMA 1700, RMC	SNN5923A	1312	1712	19.5	See supplemental	19.1	0.06	0.365	0.37	0.73	0.73	
WCDMA 1700, RMC	SNN5923A	1413	1732	19.5	See supplemental	19.2	-0.08	0.522	0.53	1.05	1.07	
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.1	0.01	0.566	0.57	1.14	1.14	A66
WCDMA 1700, RMC	SNN5923A	1513	1752	19.5	See supplemental	19.1	0.01	0.533	0.53	1.07	1.07	
WCDMA 1900, RMC	SNN5923A	9262	1852.4	17.5	See supplemental	19.2	0.04	0.419	0.42	0.821	0.82	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	19.1	0.03	0.531	0.53	1.05	1.05	
WCDMA 1900, RMC	SNN5923A	9400	1880	17.5	See supplemental	18.7	0.01	0.577	0.58	1.14	1.14	A67
WCDMA 1900, RMC	SNN5923A	9538	1907.6	17.5	See supplemental	19.2	0.04	0.477	0.48	0.943	0.94	

Table 4-12: SAR measurement results in a body-adjacent position against the ICNIRP and ANSI SAR Limit.

4.5 Measurement Variability Analysis

Per FCC KDB 865664 D01, SAR measurement variability was assessed for each frequency band as determined by the SAR probe calibration points and tissue-equivalent mediums used for the device measurements. These additional measurements are executed after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The phone was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for these measurements, to minimize any unexpected variations in the repeated results.

SAR measurement variability was assessed using the following procedures for each frequency band:

1. If the original highest measured SAR is $< 0.8 \text{ W/kg}$, the following steps do not apply and no repeat measurements were executed.
2. If the original highest measured SAR is $\geq 0.8 \text{ W/kg}$, that measurement was repeated once.
3. If the ratio of the largest to smallest SAR for the original and first repeated measurement was > 1.2 , or if the original or first repeated measurement was $\geq 1.45 \text{ W/kg}$, the measurement was repeated a second time.
4. If the ratio of the largest to smallest SAR for the original, first repeated, or second repeated measurement was > 1.2 , and one of those measurements was $\geq 1.5 \text{ W/kg}$, the measurement was repeated a third time.



SAR Measurement Variability Results										
Mode	Exposure Condition	Channel	f (MHz)	Original Measured SAR (W/kg)	1st Repeated SAR (W/kg)	Ratio	2nd Repeated SAR (W/kg)	Ratio	3rd Repeated SAR (W/kg)	Ratio
LTE B2, 20 MHz BW QPSK (1 RB @ Mid)	Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom	18900	1880.0	1.30	1.32	1.02	N/A	N/A	N/A	N/A
LTE B4, 20 MHz BW QPSK (50% RB @ Mid)	Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom	20175	1732.5	1.02	1.02	1.00	N/A	N/A	N/A	N/A
GPRS 1900, Class 12 (4 Uplink Timeslots)	Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom	512	1850.2	0.852	0.868	1.02	N/A	N/A	N/A	N/A
WCDMA 1700, RMC	Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom	1513	1752	1.14	1.07	1.07	N/A	N/A	N/A	N/A
WCDMA 1900, RMC	Mobile Hotspot Position, Bottom Edge of Phone 10 mm from Phantom	9400	1880	1.05	1.14	1.09	N/A	N/A	N/A	N/A

Table 4-13: SAR measurement results for Variability Analysis

4.6 Description and Evaluation of Simultaneous Transmitters

Per FCC KDB 447498 D01, the necessity of simultaneous SAR testing was evaluated for the licensed and unlicensed transmitters of the phone under test.

By design some or all of the transmitters built into the phone may operate simultaneously, as described in the tables on the following pages. A simplified model of the transmit paths and a diagram of the separation distances between the transmitting antennas are provided below.

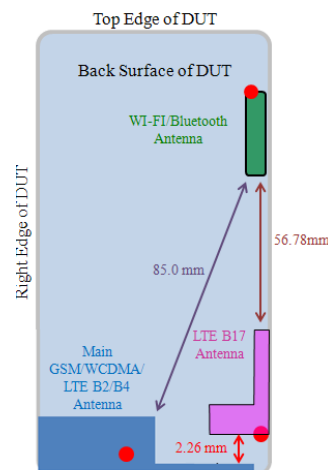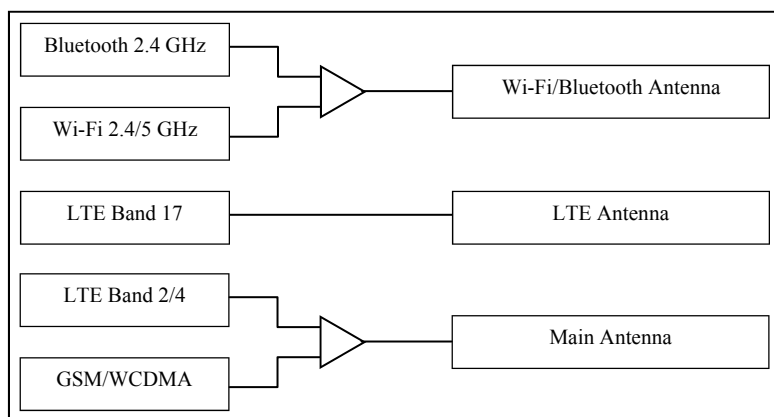

When standalone SAR test exclusion applies to a mode and antenna that transmits simultaneously with other modes and antennas, the KDB directs that the standalone SAR of that mode must be estimated for evaluation in the SAR summations.

For simultaneous SAR evaluation, Bluetooth SAR was estimated and included in all applicable SAR summations. For Body-Worn Accessory simultaneous SAR evaluation, the value used for inclusion in these summations was found to be:

$$\frac{[11.468]_{(mW)}}{[25]_{(mm)}} \times \frac{\sqrt{2.44(GHz)}}{7.5} = 0.1 W/kg_{(estimated)}$$

For simultaneous SAR evaluation, Bluetooth mode was testing in the worst case Head-Adjacent configuration for the 2.4 GHz band to evaluate for simultaneous use cases.

Further, Bluetooth and Wi-Fi share the same transmit path, and cannot transmit simultaneously.

A description of the power conditions or reduced limits for simultaneous transmit modes is provided in section 2.5 and in expanded detail in Exhibit 12. The notation used in the “Exposure Condition” tables is as follows for the PWR column:

- N/A indicates the transmitter in this case has no reduced power limit enforced and may operate up to its maximum power, and no conditions are contingent on this transmitter’s operation.
- 16, 17, 17.5, 19.5, and 26.5 indicate an enforced power limit, at the value stated in dBm, on the noted transmitter for this simultaneous transmit case.

Per FCC KDB 447498 D01 section 4.3.2, when the sum of the 1 g SAR values of all simultaneously transmitting antennas and device modes in an exposure condition is within the SAR limit, that simultaneous transmission configuration may be excluded from SAR measurements. Simultaneous SAR summations for the head-adjacent, body-worn accessory, and mobile hotspot exposure conditions with the worst-case SAR transmitter configurations are presented in the following tables.

Head Exposure Conditions; Simultaneous Transmit Configurations, including Power Conditions or Reduced Limits					
Case	Transmitter #1		Transmitter #2		Notes
	Transmitter Configuration	PWR	Transmitter Configuration	PWR	
H1	GSM 850 CS Voice	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	Voice + Background Data
H2	GSM 1900 CS Voice	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	Voice + Background Data
H3	WCDMA 850	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	Voice + Background Data
H4	WCDMA 1700	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	Voice + Background Data
H5	WCDMA 1900	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	Voice + Background Data
H6	GSM 850 CS Voice	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
H7	GSM 1900 CS Voice	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
H8	WCDMA 850	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
H9	WCDMA 1700	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
H10	WCDMA 1900	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
H11	LTE Band 17	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	VoIP + Mobile Hotspot session
H12	LTE Band 4	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	VoIP + Mobile Hotspot session
H13	LTE Band 2	N/A	Wi-Fi/Bluetooth 2.4 GHz	17	VoIP + Mobile Hotspot session
H14	LTE Band 17	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
H15	LTE Band 4	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
H16	LTE Band 2	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session

For Cases H1-H5 and H11-H13, worst case SAR measurements of Wi-Fi and Bluetooth in 2.4 GHz are used to evaluate for simultaneous use cases.

		Transmitter Stand-Alone 1 g SAR Values (W/kg)				1 g SAR Summations (W/kg)			
		GSM 850	GSM 1900	Wi-Fi/BT 2.4 GHz	Wi-Fi 5 GHz	Case H1	Case H2	Case H6	Case H7
Band						GSM 850 + Wi-Fi/BT 2.4 GHz	GSM 1900 + Wi-Fi/BT 2.4 GHz	GSM 850 + Wi-Fi 5 GHz	GSM 1900 + Wi-Fi 5 GHz
Power Condition or Reduced Limit		N/A	N/A	17	16				
Position	Left Head Cheek	0.35	0.23	0.22	0.28	0.57	0.45	0.63	0.51
	Left Head 15° Tilt	0.17	0.15	0.13	0.32	0.3	0.28	0.49	0.47
	Right Head Cheek	0.81	0.37	0.72	0.5	1.53	1.09	1.31	0.87
	Right Head 15° Tilt	0.25	0.14	0.23	0.35	0.48	0.37	0.6	0.49

Table 4-14: SAR summations for simultaneous evaluation – GSM in Head Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		WCDMA 850	WCDMA 1700	WCDMA 1900	Wi-Fi/BT 2.4 GHz	Wi-Fi 5 GHz	Case H3	Case H4	Case H5	Case H8	Case H9	Case H10
Band							WCDMA 850 + Wi-Fi/BT 2.4 GHz	WCDMA 1700 + Wi-Fi/BT 2.4 GHz	WCDMA 1900 + Wi-Fi/BT 2.4 GHz	WCDMA 850 + Wi-Fi 5 GHz	WCDMA 1700 + Wi-Fi 5 GHz	WCDMA 1900 + Wi-Fi 5 GHz
Power Condition or Reduced Limit		N/A	N/A	N/A	17	16						
Position	Left Head Cheek	0.29	0.48	0.35	0.22	0.28	0.51	0.7	0.57	0.57	0.76	0.63
	Left Head 15° Tilt	0.17	0.26	0.22	0.13	0.32	0.3	0.39	0.35	0.49	0.58	0.54
	Right Head Cheek	0.28	0.3	0.64	0.72	0.5	1	1.02	1.36	0.78	0.8	1.14
	Right Head 15° Tilt	0.16	0.31	0.2	0.23	0.35	0.39	0.54	0.43	0.51	0.66	0.55

Table 4-15: SAR summations for simultaneous evaluation – WCDMA in Head Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		LTE Band 17	LTE Band 4	LTE Band 2	Wi-Fi/BT 2.4 GHz	Wi-Fi 5.785 GHz	Case H11	Case H12	Case H13	Case H14	Case H15	Case H16
Band							LTE Band 17 + Wi-Fi/BT 2.4 GHz	LTE Band 4 + Wi-Fi/BT 2.4 GHz	LTE Band 2 + Wi-Fi/BT 2.4 GHz	LTE Band 17 + Wi-Fi 5 GHz	LTE Band 4 + Wi-Fi 5 GHz	LTE Band 2 + Wi-Fi 5 GHz
Power Condition or Reduced Limit		N/A	N/A	N/A	17	16						
Position	Left Head Cheek	0.25	0.39	0.39	0.22	0.16	0.47	0.61	0.61	0.41	0.55	0.55
	Left Head 15° Tilt	0.08	0.32	0.18	0.13	0.14	0.21	0.45	0.31	0.22	0.46	0.32
	Right Head Cheek	0.13	0.36	0.72	0.72	0.22	0.85	1.08	1.44	0.35	0.58	0.94
	Right Head 15° Tilt	0.06	0.3	0.27	0.23	0.12	0.29	0.53	0.5	0.18	0.42	0.39

Table 4-16: SAR summations for simultaneous evaluation – Positions during a Mobile Hotspot session

Body Exposure Conditions; Simultaneous Transmit Configurations, including Power Conditions or Reduced Limits					
Case	Transmitter #1		Transmitter #2		Notes
	Transmitter Configuration	PWR	Transmitter Configuration	PWR	
B1	GSM 850 CS Voice	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
B2	GSM 1900 CS Voice	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
B3	WCDMA 850	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
B4	WCDMA 1700	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
B5	WCDMA 1900	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
B6	GSM 850 CS Voice	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
B7	GSM 1900 CS Voice	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
B8	WCDMA 850	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
B9	WCDMA 1700	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
B10	WCDMA 1900	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
B11	GSM 850 CS Voice	N/A	Bluetooth 2 GHz	N/A	Voice + BT (Estimated)
B12	GSM 1900 CS Voice	N/A	Bluetooth 2 GHz	N/A	Voice + BT (Estimated)
B13	WCDMA 850	N/A	Bluetooth 2 GHz	N/A	Voice + BT (Estimated)
B14	WCDMA 1700	N/A	Bluetooth 2 GHz	N/A	Voice + BT (Estimated)
B15	WCDMA 1900	N/A	Bluetooth 2 GHz	N/A	Voice + BT (Estimated)
B16	LTE Band 17	N/A	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
B17	LTE Band 4	N/A	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
B18	LTE Band 2	N/A	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
B19	LTE Band 17	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
B20	LTE Band 4	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
B21	LTE Band 2	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
B22	LTE Band 17	N/A	Bluetooth 2 GHz	N/A	VoIP + BT (Estimated)
B23	LTE Band 4	N/A	Bluetooth 2 GHz	N/A	VoIP + BT (Estimated)
B24	LTE Band 2	N/A	Bluetooth 2 GHz	N/A	VoIP + BT (Estimated)

		Transmitter Stand-Alone 1 g SAR Values (W/kg)				1 g SAR Summations (W/kg)			
		GSM 850	GSM 1900	Wi-Fi 2.4 GHz	Wi-Fi 5 GHz	Case B1	Case B2	Case B6	Case B7
Band		N/A	N/A	17	16	GSM 850 + Wi-Fi 2.4 GHz	GSM 1900 + Wi-Fi 2.4 GHz	GSM 850 + Wi-Fi 5 GHz	GSM 1900 + Wi-Fi 5 GHz
Position	Body Worn, Front of Phone 25 mm from Phantom	0.66	0.14	0.01	0.04	0.67	0.15	0.70	0.18
	Body Worn, Back of Phone 25 mm from Phantom	0.18	0.3	0.05	0.18	0.23	0.35	0.36	0.48

Table 4-17: SAR summations for simultaneous evaluation – GSM in Head Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		WCDMA 850	WCDMA 1700	WCDMA 1900	Wi-Fi 2.4 GHz	Wi-Fi 5 GHz	Case B3	Case B4	Case B5	Case B8	Case B9	Case B10
Band		N/A	N/A	N/A	17	16	WCDMA 850 + Wi-Fi 2.4 GHz	WCDMA 1700 + Wi-Fi 2.4 GHz	WCDMA 1900 + Wi-Fi 2.4 GHz	WCDMA 850 + Wi-Fi 5 GHz	WCDMA 1700 + Wi-Fi 5 GHz	WCDMA 1900 + Wi-Fi 5 GHz
Position	Body Worn, Front of Phone 25 mm from Phantom	0.27	0.38	0.33	0.01	0.04	0.28	0.39	0.34	0.31	0.42	0.37
	Body Worn, Back of Phone 25 mm from Phantom	0.25	0.47	0.58	0.05	0.18	0.3	0.52	0.63	0.43	0.65	0.76

Table 4-18: SAR summations for simultaneous evaluation – WCDMA in Head Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)						1 g SAR Summations (W/kg)				
		GSM 850	GSM 1900	WCDMA 850	WCDMA 1700	WCDMA 1900	Bluetooth	Case B11	Case B12	Case B13	Case B14	Case B15
Band		N/A	N/A	N/A	N/A	N/A	N/A	GSM 850 + Bluetooth	GSM 1900 + Bluetooth	WCDMA 850 + Bluetooth	WCDMA 1700 + Bluetooth	WCDMA 1900 + Bluetooth
Position	Body Worn, Front of Phone 25 mm from Phantom	0.23	0.14	0.27	0.38	0.33	0.1	0.33	0.24	0.37	0.48	0.43
	Body Worn, Back of Phone 25 mm from Phantom	0.18	0.3	0.25	0.47	0.58	0.1	0.28	0.4	0.35	0.57	0.68

Table 4-19: SAR summations for simultaneous evaluation – GSM & WCDMA in Body-Worn Accessory Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		LTE Band 17	LTE Band 4	LTE Band 2	Wi-Fi 2.4 GHz	Wi-Fi 5.875 GHz	Case B16	Case B17	Case B18	Case B19	Case B20	Case B21
Band		N/A	N/A	N/A	17	16	LTE Band 17 + Wi-Fi 2.4 GHz	LTE Band 4 + Wi-Fi 2.4 GHz	LTE Band 2 + Wi-Fi 2.4 GHz	LTE Band 17 + Wi-Fi 5.785 GHz	LTE Band 4 + Wi-Fi 5.785 GHz	LTE Band 2 + Wi-Fi 5.785 GHz
Position	Body Worn, Front of Phone 25 mm from Phantom	0.06	0.31	0.43	0.01	0.03	0.07	0.32	0.44	0.09	0.34	0.46
	Body Worn, Back of Phone 25 mm from Phantom	0.08	0.5	0.75	0.05	0.06	0.13	0.55	0.8	0.14	0.56	0.81

Table 4-20: SAR summations for simultaneous evaluation – LTE in Body-Worn Accessory Positions

		Transmitter Stand-Alone 1 g SAR Values (W/kg)				1 g SAR Summations (W/kg)		
						Case B16	Case B17	Case B18
Band		LTE Band 17	LTE Band 4	LTE Band 2	Bluetooth	LTE Band 17 + Bluetooth	LTE Band 4 + Bluetooth	LTE Band 2 + Bluetooth
Power Condition or Reduced Limit		N/A	N/A	N/A	N/A			
Position	Body Worn, Front of Phone 25 mm from Phantom	0.06	0.31	0.43	0.1	0.07	0.32	0.44
	Body Worn, Back of Phone 25 mm from Phantom	0.08	0.5	0.75	0.1	0.09	0.6	0.85

Table 4-21: SAR summations for simultaneous evaluation – LTE in Body-Worn Accessory Positions

Mobile Hotspot Exposure Conditions; Simultaneous Transmit Configurations, including Power Conditions or Reduced Limits					
Case	Transmitter #1		Transmitter #2		Notes
	Transmitter Configuration	PWR	Transmitter Configuration	PWR	
M1	GPRS 850	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
M2	GPRS 1900	26.5	Wi-Fi 2.4 GHz	17	Voice + Background Data
M3	WCDMA 850	N/A	Wi-Fi 2.4 GHz	17	Voice + Background Data
M4	WCDMA 1900	17.5	Wi-Fi 2.4 GHz	17	Voice + Background Data
M5	WCDMA 1700	19.5	Wi-Fi 2.4 GHz	17	Voice + Background Data
M6	GPRS 850	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
M7	GPRS 1900	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
M8	WCDMA 850	N/A	Wi-Fi 5 GHz	16	Voice + Background Data
M9	WCDMA 1900	17.5	Wi-Fi 5 GHz	16	Voice + Background Data
M10	WCDMA 1700	19.5	Wi-Fi 5 GHz	16	Voice + Background Data
M11	LTE Band 17	N/A	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
M12	LTE Band 4	19.5	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
M13	LTE Band 2	17.5	Wi-Fi 2.4 GHz	17	VoIP + Mobile Hotspot session
M14	LTE Band 17	N/A	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
M15	LTE Band 4	19.5	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session
M16	LTE Band 2	17.5	Wi-Fi 5.785 GHz	16	VoIP + Mobile Hotspot session

		Transmitter Stand-Alone 1 g SAR Values (W/kg)				1 g SAR Summations (W/kg)			
		GPRS 850	GPRS 1900	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	Case M1	Case M2	Case M6	Case M7
Band		GPRS 850	GPRS 1900	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	GPRS 850 + Wi-Fi 2.4 GHz	GPRS 1900 + Wi-Fi 2.4 GHz	GPRS 850 + Wi-Fi 5.785 GHz	GPRS 1900 + Wi-Fi 5.785 GHz
Power Condition or Reduced Limit		N/A	26.5	N/A	N/A				
Position	Front of Phone 10 mm from Phantom	0.58	0.28	0.11	0.07	0.69	0.39	0.65	0.35
	Back of Phone 10 mm from Phantom	0.57	0.51	0.25	0.14	0.82	0.76	0.71	0.65
	Left Edge of Phone 10 mm from Phantom	0.27	0.02	0.46	0.26	0.73	0.48	0.53	0.28
	Right Edge of Phone 10 mm from Phantom	0.44	0.04	0	0	0.44	0.04	0.44	0.04
	Top Edge of Phone 10 mm from Phantom	0	0	0.04	0.07	0.04	0.04	0.07	0.07
	Bottom Edge of Phone 10 mm from Phantom	0.06	0.88	0	0	0.06	0.88	0.06	0.88

Table 4-21: SAR summations for simultaneous evaluation – Positions during a Mobile Hotspot session

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		WCDMA 850	WCDMA 1900	WCDMA 1700	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	Case M3	Case M4	Case M5	Case M8	Case M9	Case M10
Band		WCDMA 850	WCDMA 1900	WCDMA 1700	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	WCDMA 850 + Wi-Fi 2.4 GHz	WCDMA 1900 + Wi-Fi 2.4 GHz	WCDMA 1700 + Wi-Fi 2.4 GHz	WCDMA 850 + Wi-Fi 5.785 GHz	WCDMA 1900 + Wi-Fi 5.785 GHz	WCDMA 1700 + Wi-Fi 5.785 GHz
Power Condition or Reduced Limit		N/A	17.5	19.5	N/A	N/A						
Position	Front of Phone 10 mm from Phantom	0.42	0.31	0.47	0.11	0.07	0.53	0.42	0.58	0.49	0.38	0.54
	Back of Phone 10 mm from Phantom	0.46	0.58	0.77	0.25	0.14	0.71	0.83	1.02	0.6	0.72	0.91
	Left Edge of Phone 10 mm from Phantom	0.36	0.02	0.12	0.46	0.26	0.82	0.48	0.58	0.62	0.28	0.38
	Right Edge of Phone 10 mm from Phantom	0.33	0.05	0.08	0	0	0.33	0.05	0.08	0.33	0.05	0.08
	Top Edge of Phone 10 mm from Phantom	0	0	0	0.04	0.07	0.04	0.04	0.04	0.07	0.07	0.07
	Bottom Edge of Phone 10 mm from Phantom	0.04	1.14	1.14	0	0	0.04	1.14	1.14	0.04	1.14	1.14

Table 4-22: SAR summations for simultaneous evaluation – Positions during a Mobile Hotspot session

		Transmitter Stand-Alone 1 g SAR Values (W/kg)					1 g SAR Summations (W/kg)					
		LTE Band 17	LTE Band 4	LTE Band 2	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	Case M11	Case M12	Case M13	Case M14	Case M15	Case M16
Band		LTE Band 17	LTE Band 4	LTE Band 2	Wi-Fi 2.4 GHz	Wi-Fi 5.785 GHz	LTE Band 17 + Wi-Fi 2.4 GHz	LTE Band 4 + Wi-Fi 2.4 GHz	LTE Band 2 + Wi-Fi 2.4 GHz	LTE Band 17 + Wi-Fi 5.785 GHz	LTE Band 4 + Wi-Fi 5.785 GHz	LTE Band 2 + Wi-Fi 5.785 GHz
Power Condition or Reduced Limit		N/A	19.5	17.5	N/A	N/A						
Position	Front of Phone 10 mm from Phantom	0.17	0.47	0.45	0.11	0.07	0.28	0.58	0.56	0.24	0.54	0.52
	Back of Phone 10 mm from Phantom	0.28	0.69	0.79	0.25	0.14	0.53	0.94	1.04	0.42	0.83	0.93
	Left Edge of Phone 10 mm from Phantom	0.23	0.14	0.04	0.46	0.26	0.69	0.6	0.5	0.49	0.4	0.3
	Right Edge of Phone 10 mm from Phantom	0	0.05	0.11	0	0	0	0.05	0.11	0	0.05	0.11
	Top Edge of Phone 10 mm from Phantom	0	0	0	0.04	0.07	0.04	0.04	0.04	0.07	0.07	0.07
	Bottom Edge of Phone 10 mm from Phantom	0.09	1.02	1.32	0	0	0.09	1.02	1.32	0.09	1.02	1.32

Table 4-23: SAR summations for simultaneous evaluation – Positions during a Mobile Hotspot session

Simultaneous Evaluation Conclusion

As no summation of transmitter SAR values results in a value greater than the compliance limit, no measurements for simultaneous SAR are required.

5 References to Test Standards and Guidance

- [1] CENELEC, EN 62209-1:2006 “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)”
- [2] CENELEC, EN 50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)”.
- [3] ANSI / IEEE, C95.1 1992 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”
- [7] IC RSS-102 “Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
- [8] IC Notice 2012-DRS1203 “RE: Applicability of Latest FCC RF Exposure KDB Procedures (Publication Date: October 24, 2012) and Other Procedures”
- [9] CENELEC, EN 62209-2:2010 “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)”
- [10] FCC KDB Publication 248227 D01 v01r02 “SAR Measurement Procedures for 802.11 a/b/g Transmitters”
- [11] FCC KDB Publication 447498 D01 v05r01 “Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies”
- [12] FCC KDB Publication 648474 D04 v01r01 “SAR Evaluation Considerations for Wireless Handsets”
- [13] FCC KDB Publication 865664 D01 v01r01 “SAR Measurement Requirements for 100 MHz to 6 GHz”
- [14] FCC KDB Publication 865664 D02 v01r01 “RF Exposure Compliance Reporting and Documentation Considerations”
- [15] FCC KDB Publication 941225 D01 v02r02 “SAR Measurement Procedures for 3G Devices”
- [16] FCC KDB Publication 941225 D03 v01 “Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE”
- [17] FCC KDB Publication 941225 D05 v02r02 “SAR Evaluation Considerations for LTE Devices”
- [18] FCC KDB Publication 941225 D06 v01r01 “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”