



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 25380-1

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature:

A handwritten signature in black ink that reads 'Albert J. Patapack'.

Name: Albert J. Patapack

Title: EMC Engineer

Date: May 9, 2013

This report must not be reproduced, except in full, without written approval from this laboratory.



2404

**Table of Contents**

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	4
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
Radiated Power	6
Measurement results	7
Occupied Bandwidth	9
Measurement results	10
Spurious Emissions at Antenna Terminals	16
Measurement results	17
Field Strength of Spurious Emissions	23
Measurement results	24
Frequency Stability	27
Measurement results	28

**Test Report Details**

Tests Performed By: ADR Testing Service  
 Location Code: ADR LV  
 Motorola Mobility LLC  
 Product Safety and Compliance Group  
 600 North US Hwy 45  
 Libertyville, IL 60048  
 PH (847) 523-6167 Fax (847) 523-4538  
 FCC Registration Number: 316588  
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Mobility LLC  
 600 North US Hwy 45  
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 2100/1900/850, CDMA 1900/800/800  
 BC10, GSM 1800/1900/850/900, LTE Band 25,  
 HSDPA 21.1 Mbps (Category 14), HSUPA 5.76  
 Mbps, CDMA 1X/EV-DO Release A/LTE, GPRS  
 Class 12, aGPS , NFC,  
 Bluetooth Class 2, Version 4.0 LE+EDR,  
 802.11b/802.11g/802.11a/802.11n/802.11ac

**Note:** The GSM/EDGE/WCDMA network  
 functions have been disabled by firmware and are  
 SIM locked for all US operators.

FCC ID: IHDT56PB2

Serial Numbers: LXSZ1V0015, LXSZ1V0029,  
 LXSZ1V0017, LXSZ1V0038

Testing Complete Date: May 7, 2013

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X   Part 2
- X   Part 22 Subpart H - Public Mobile Services
- X   Part 24 Subpart E – Personal Communications Services
- X   Part 90

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004,

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	ERP (Effective Radiated Power)	Pass
2	EIRP (Effective Isotropic Radiated Power)	Pass
3	Occupied Bandwidth	Pass
4	Spurious Emissions at Antenna Terminal	Pass
5	Field Strength of Spurious Emissions	Pass
6	Frequency Stability	Pass

Test #	Test Name	Margin with respect to the Limit
1	ERP (Effective Radiated Power)	See results
2	EIRP (Effective Isotropic Radiated Power)	See results
3	Occupied Bandwidth	See Plots
4	Spurious Emissions at Antenna Terminal	See results
5	Field Strength of Spurious Emissions	See results
6	Frequency Stability	See results

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

This product utilizes an internal battery that is not removable. When applicable, EMC testing was performed with the internal battery fully charged. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

For all testing performed by ADR Testing Service

<b>Manufacturer</b>	<b>Equipment Type</b>	<b>Model No.</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	Receiver	ESIB40	100226	5/15/2013
Hewlett Packard	EMC Analyzer	E7405	US40240219	7/30/2013
Agilent	MXA Signal Analyzer	N9020A	US46470586	1/20/2014
Agilent	Signal Generator	83712A	3429A00286	4/10/2015
Agilent	Signal Generator	83623B	3844A00935	5/11/2014
ETS-Lindgren	Horn Antenna	3115	6222	7/26/2013
A. H. Systems	Horn Antenna	SAS 200/571	365	9/4/2013
ETS	Log-Periodic Antenna	3148	1188	9/6/2013
ETS	Biconical Antenna	3110B	3369	9/5/2013
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
Thermotron	Environmental Chamber	S-4	31580	11/15/2013
Agilent	Power Meter	E4416A	GB41293258	7/15/2013
Agilent	Power Sensor	E9323A	US40412067	8/29/2013
Rohde & Schwarz	Amplifier	TS-PR18	100073	9/5/2013

Note that the Agilent power meter, the Signal Generator and the MXA signal analyzer are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

## **RADIATED POWER (EIRP AND ERP)**

### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center 3 meters from the receive antenna. The antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain the same maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

An RMS detector was used for all measurements.

The EUT was tested in all configurations and the highest power level is reported.


**Measurement Results**

Band	ERP dBm	Limit dBm
CDMA 800	22.67	38.45
CDMA Band Class 10	22.61	50.00


Band	EIRP dBm	Limit dBm
CDMA 1900	24.93	33.01

The CCDF plots are also shown below. The conducted port of the EUT is connected to the spectrum analyzer. The spectrum analyzer’s Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.


The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

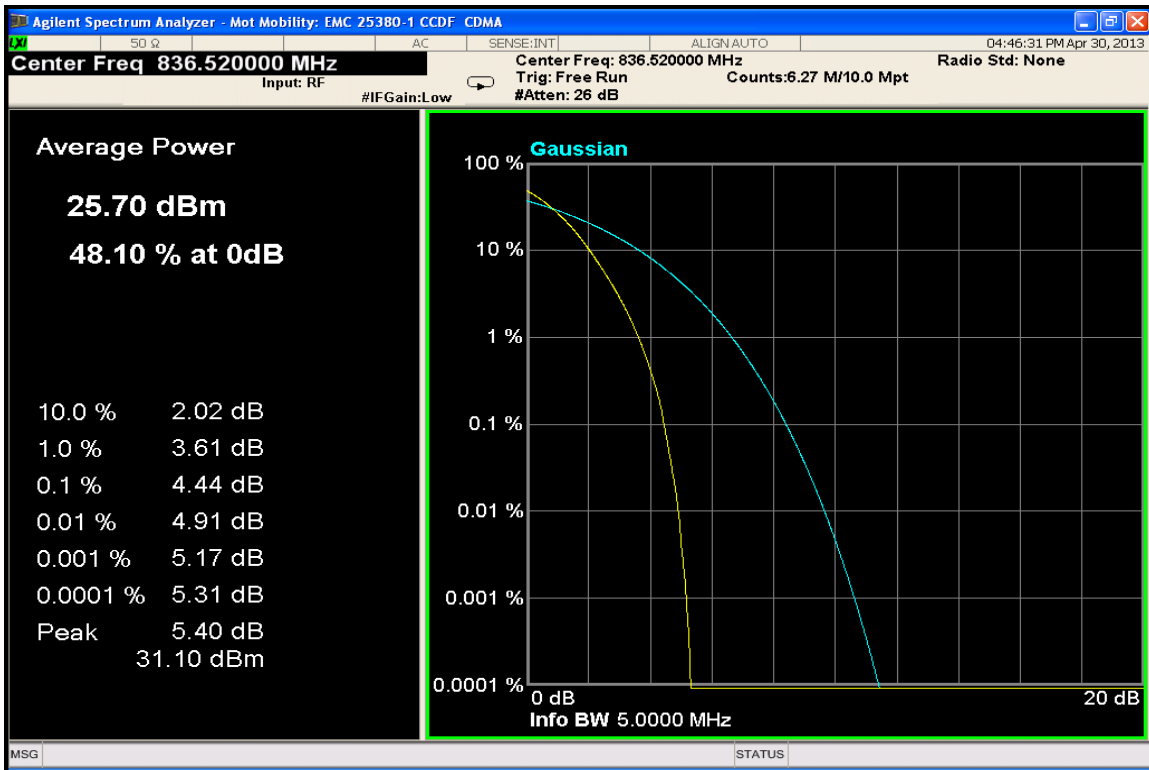

**CDMA 800 – CCDF Plot**

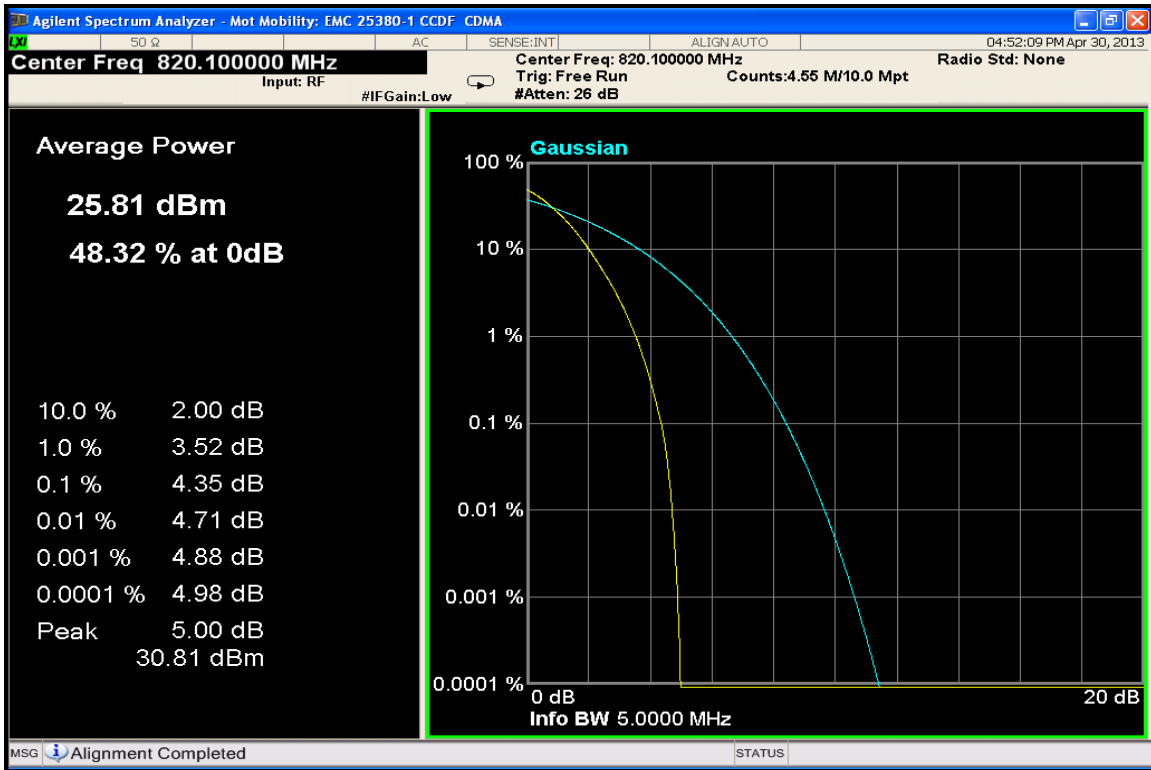

CDMA Band Class 10 – CCDF Plot

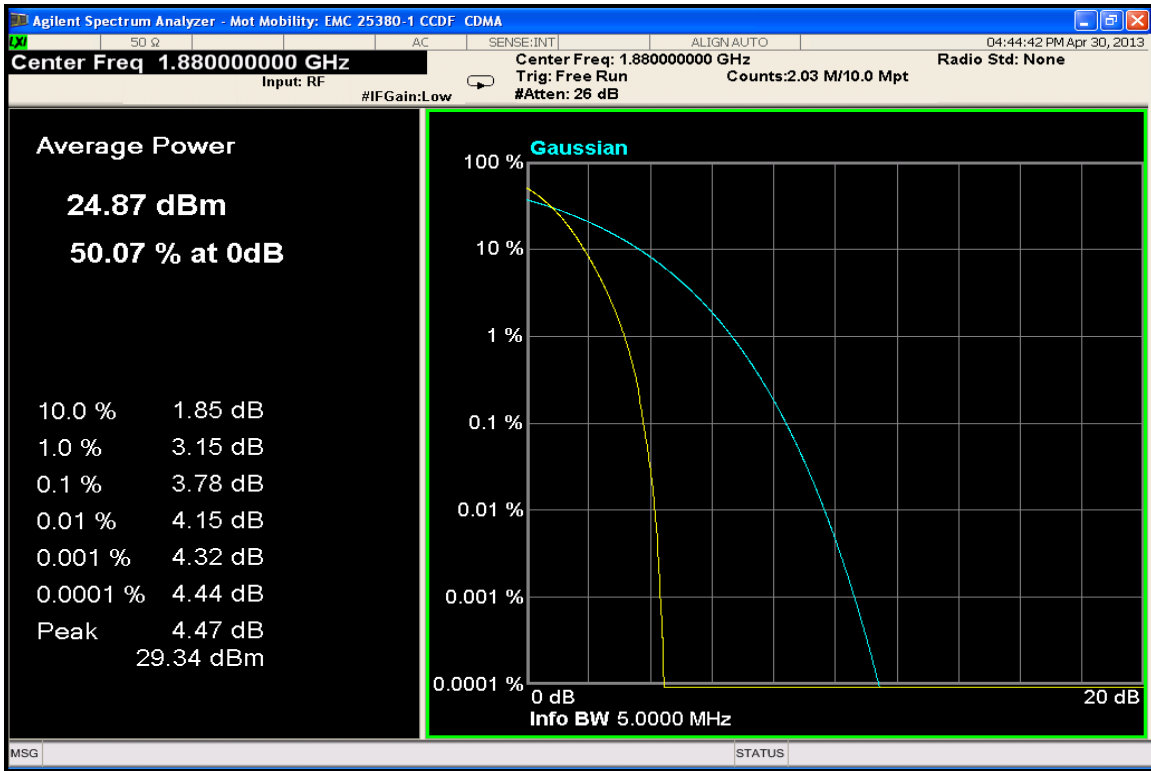

CDMA 1900 – CCDF Plot

## OCCUPIED BANDWIDTH

### Measurement Procedure


The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.


Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples ( $\geq$ #)
Reference Plot – CDMA 800	3000	Auto	2001	Max Hold	Peak	100
OCBW – CDMA 800	30	Auto	1601	Max Hold	Peak	100
Lower Band Edge – CDMA 800	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge – CDMA 800	1	Auto	2004	Max Hold	Peak	30

- Notes:
- 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for <sup>3</sup> the resolution bandwidth.
  - 2) The plotted data shown for the band edge measurements is representative of data taken with a true 13 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 13 kHz resolution bandwidth filter.


**Measurement Results – CDMA 800**

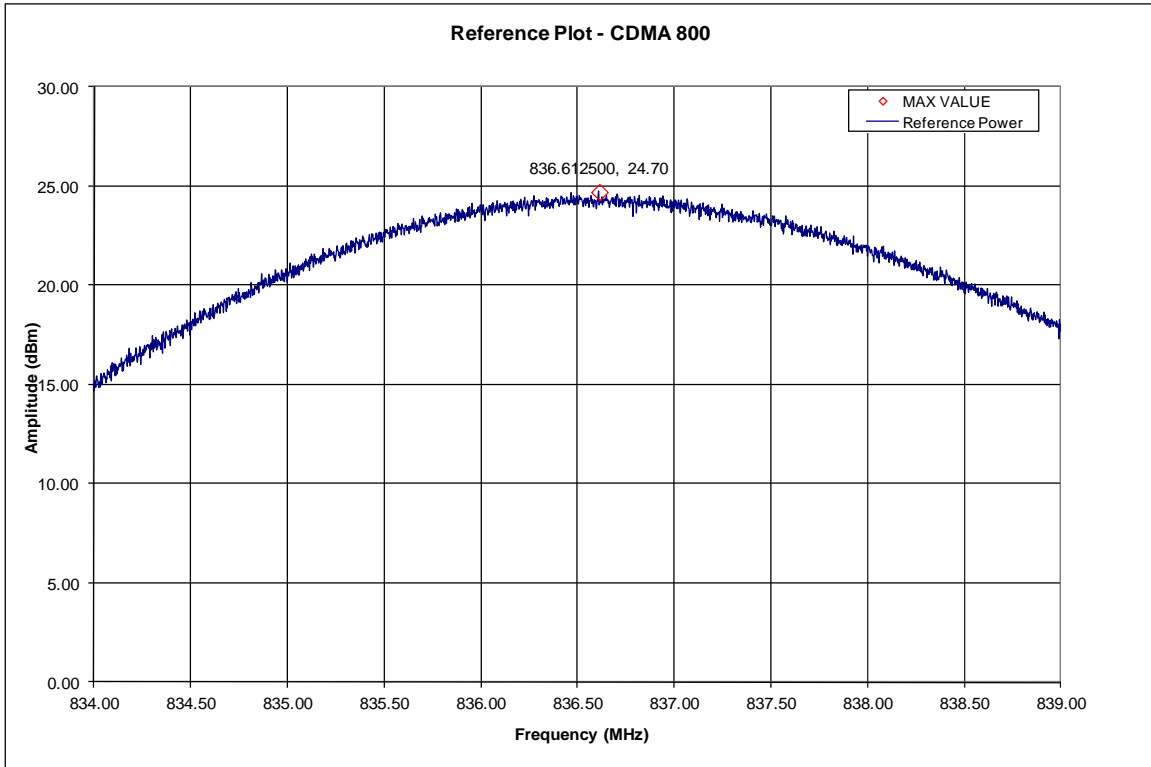


**CDMA 800 – Reference Level Plot – Channel 384 (836.52MHz)**

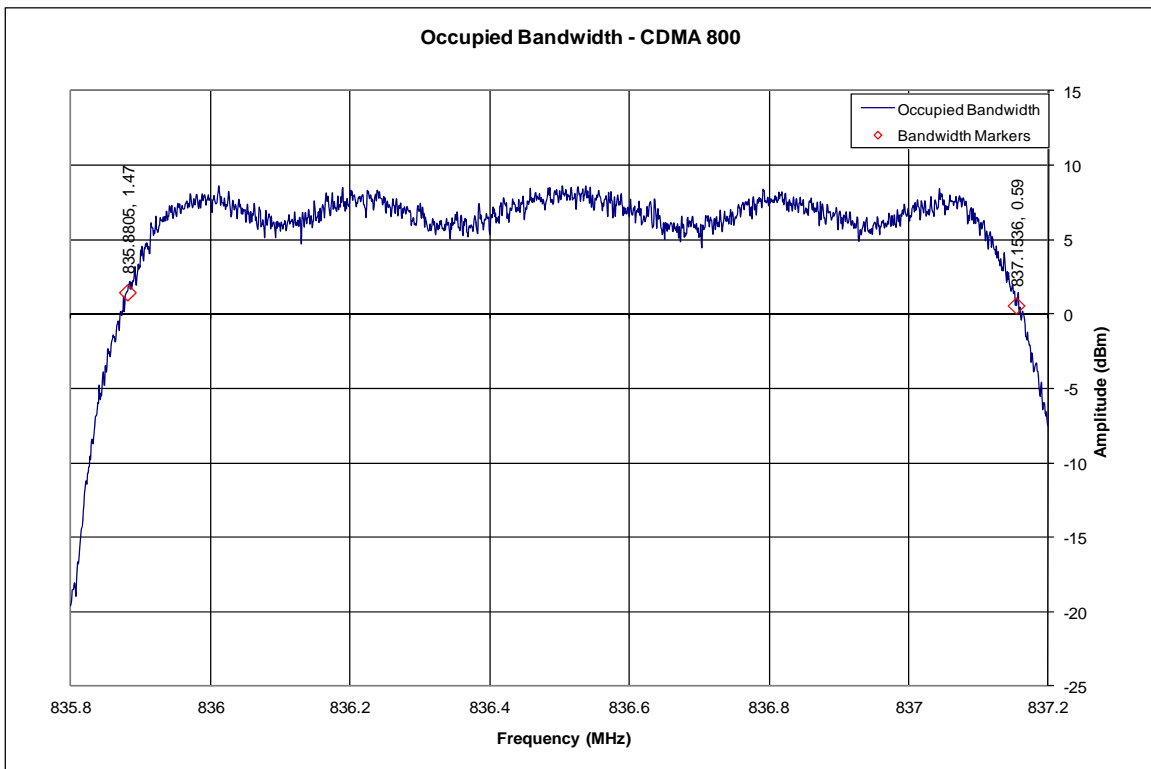

**CDMA 800 – Occupied Bandwidth – Channel 384 (836.52MHz)**

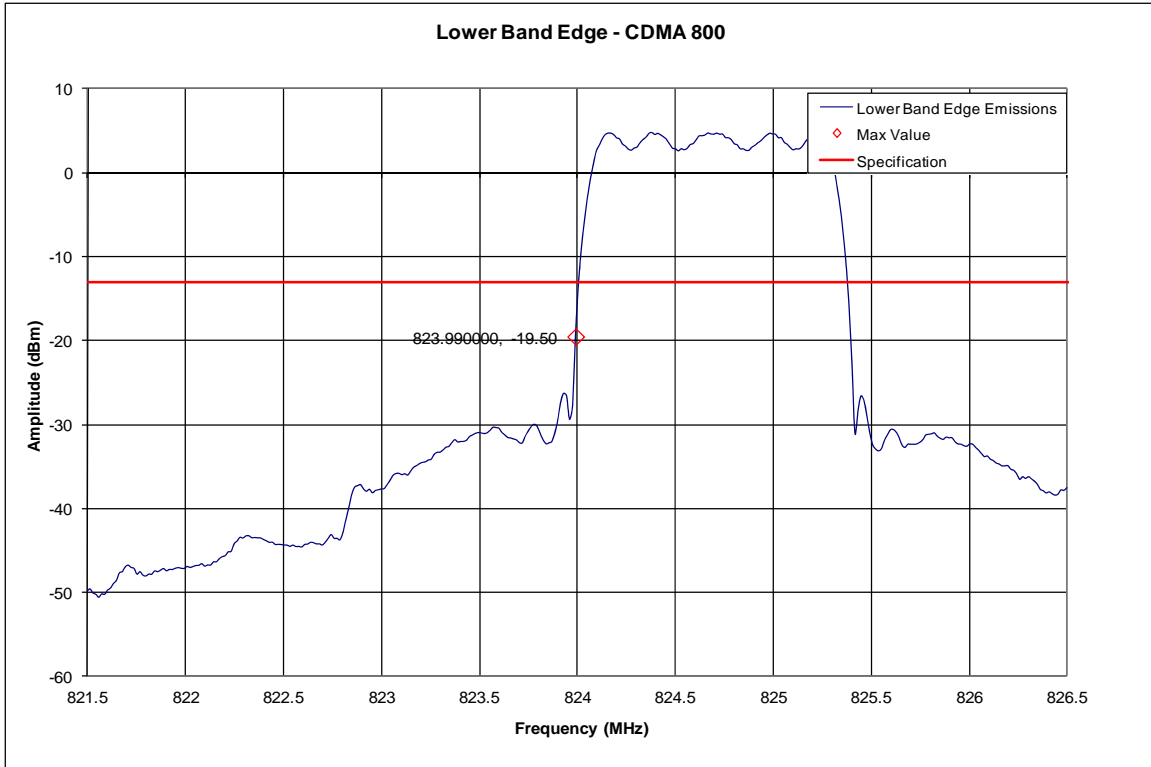


**CDMA 800 – Lower Band Edge – Channel 1013 (824.702MHz)**

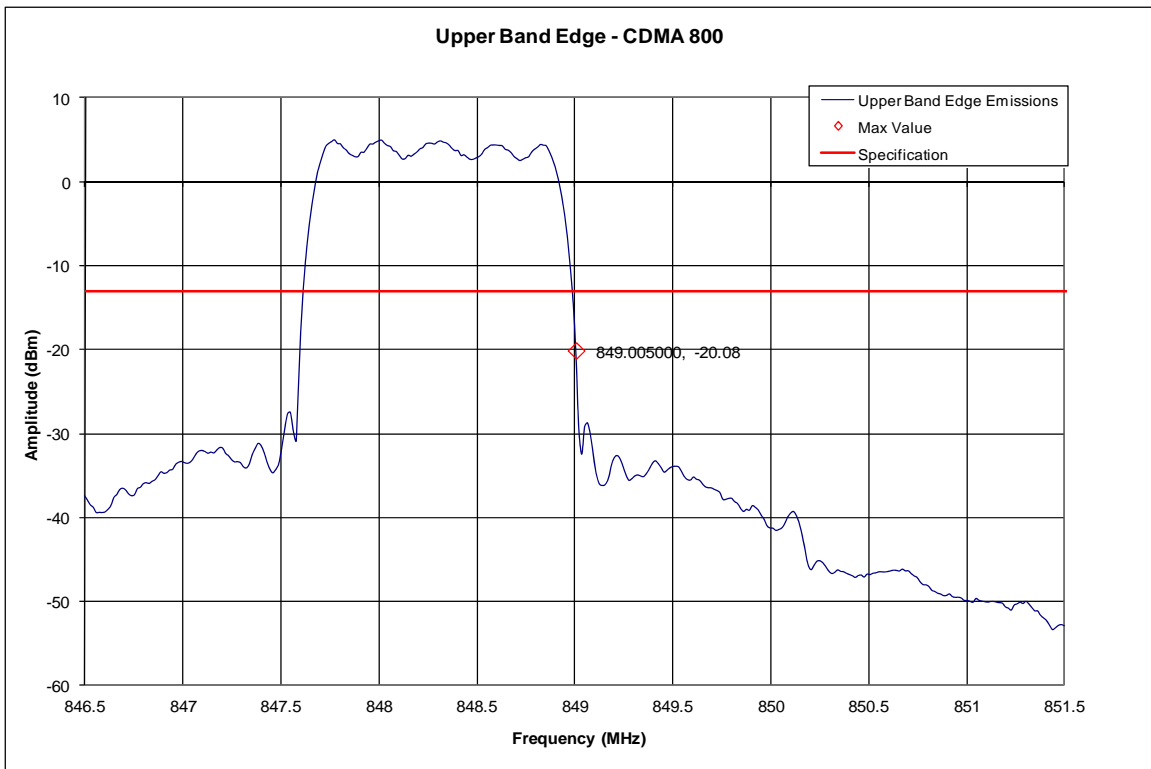


**CDMA 800 – Upper Band Edge – Channel 777 (848.31MHz)**


**Measurement Results – CDMA Band Class 10**

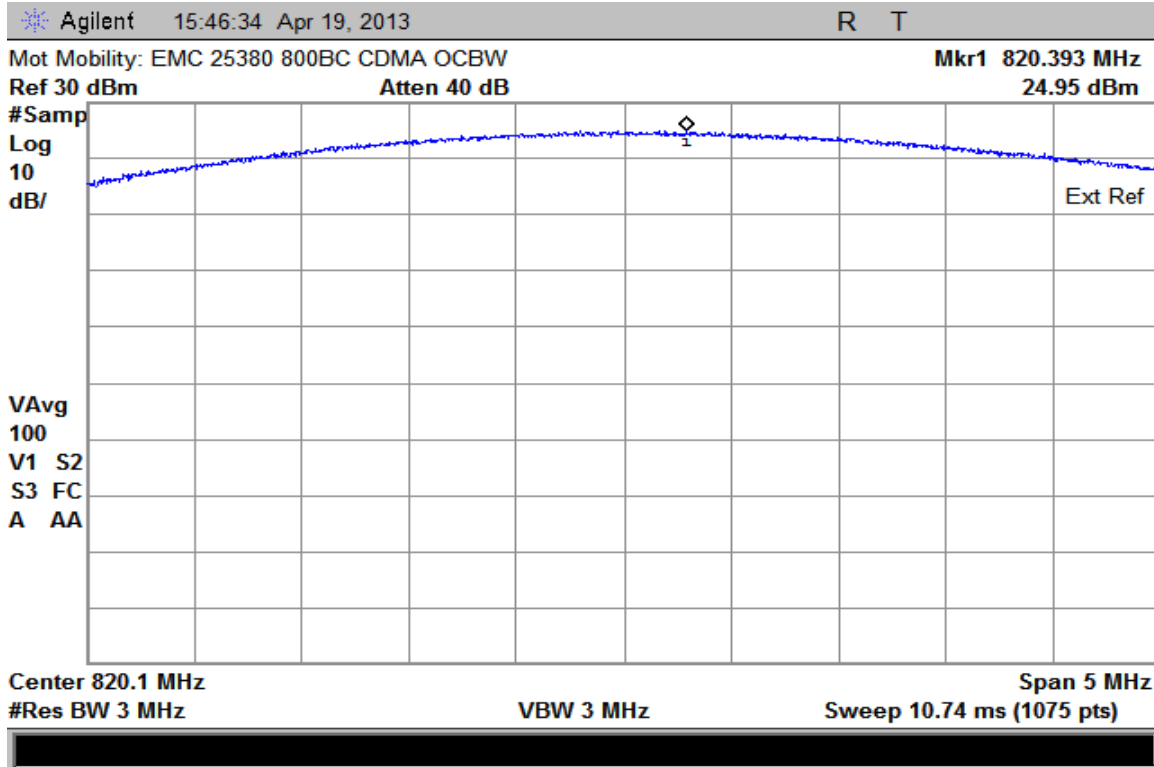


**CDMA Band Class 10 – Reference Level Plot – Channel 564 (820.1 MHz)**

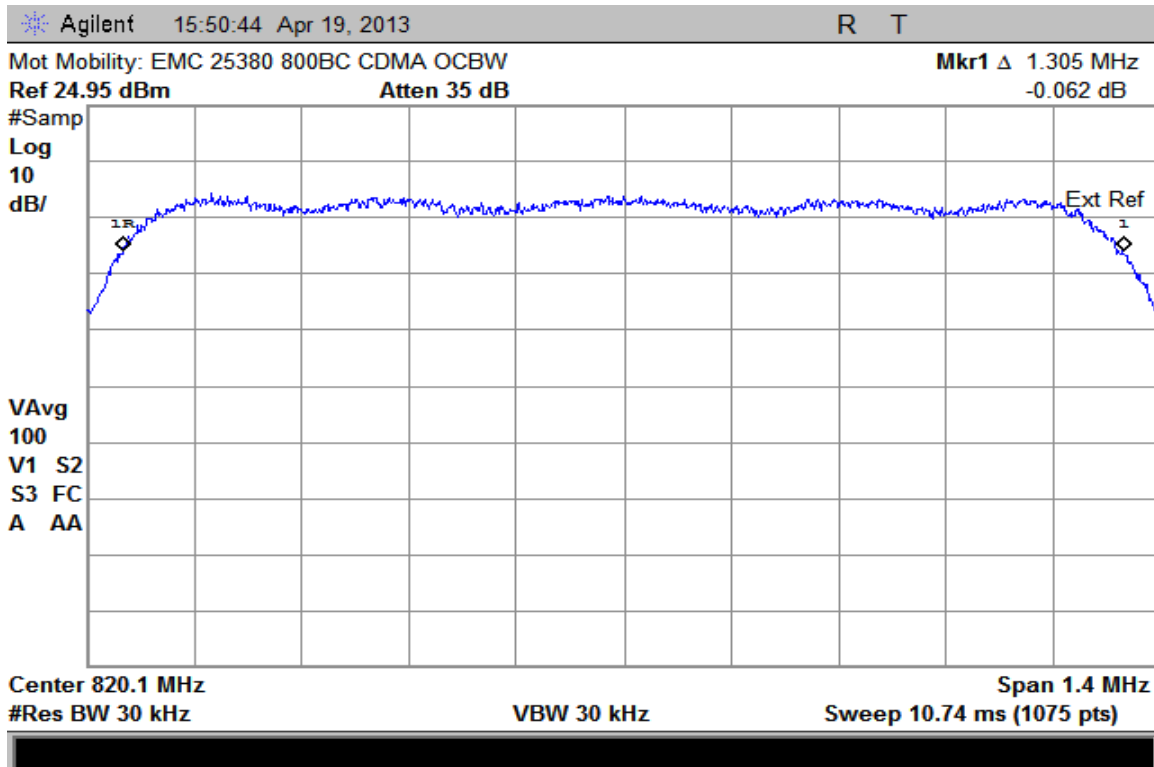

**CDMA Band Class 10 – Occupied Bandwidth – Channel 564 (820.1 MHz)**

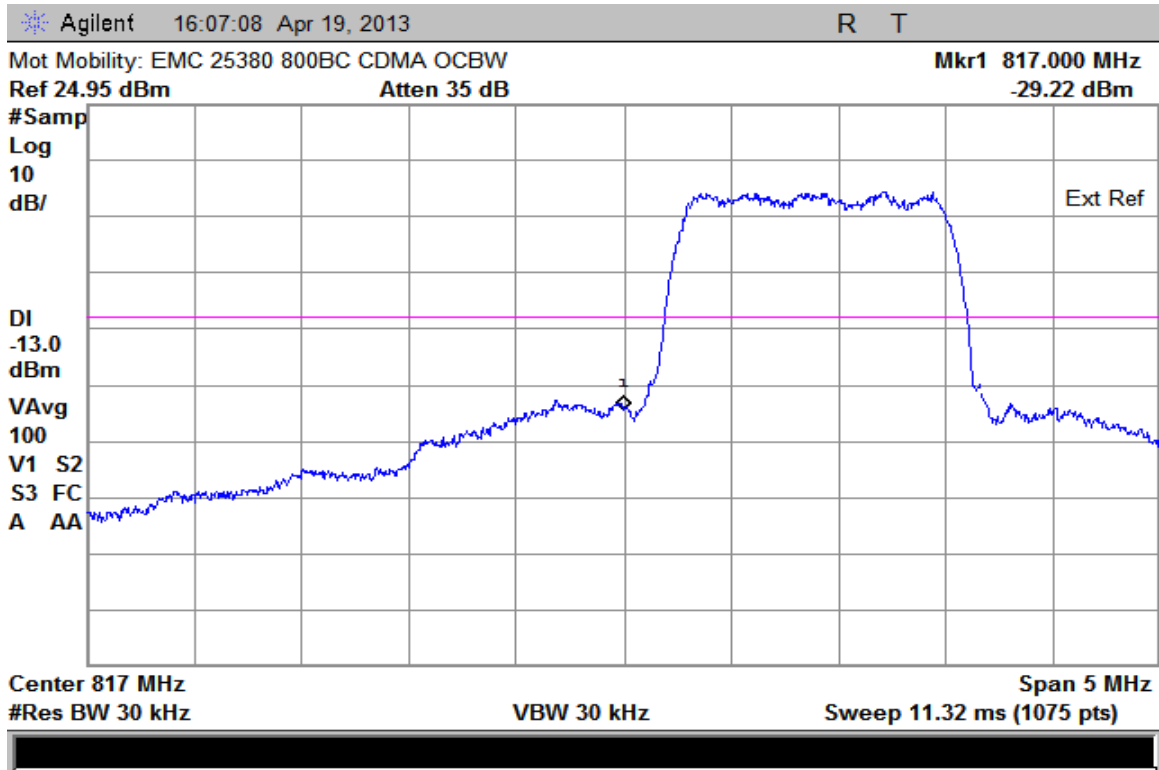


CDMA Band Class 10 – Lower Band Edge – Channel 476 (817.9 MHz)

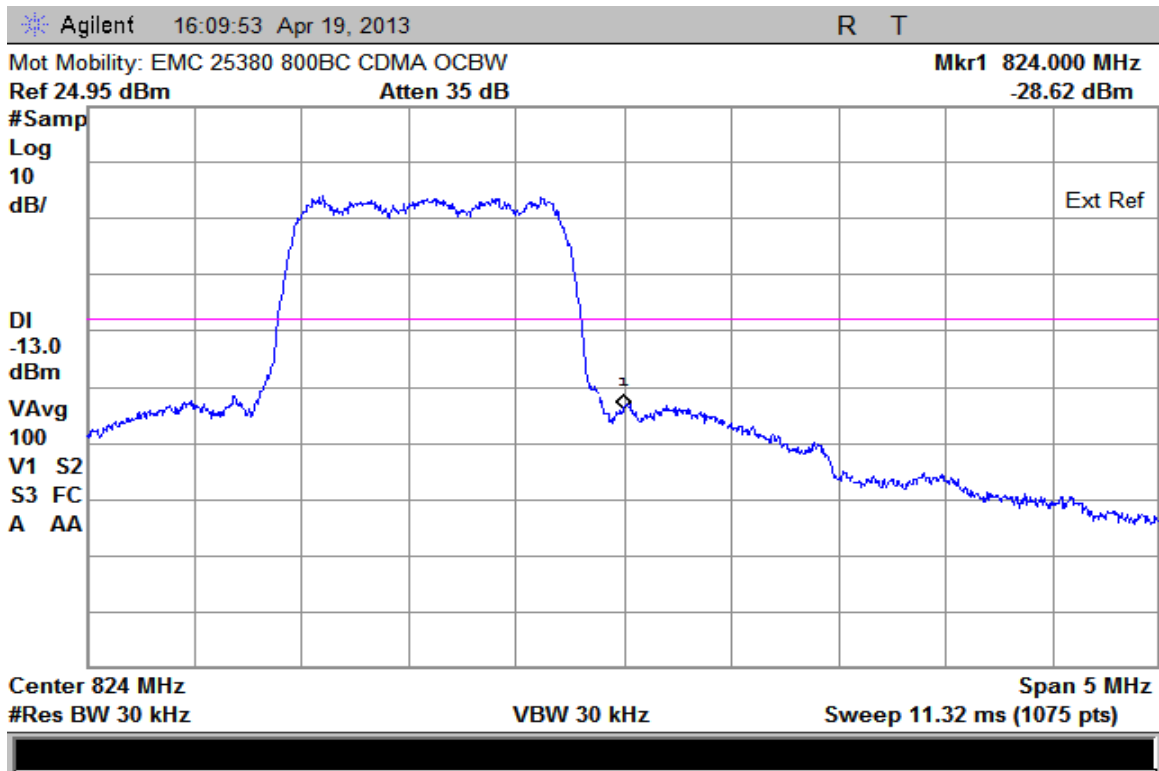


CDMA Band Class 10 – Upper Band Edge – Channel 684 (823.1 MHz)


**Measurement Results – CDMA 1900**

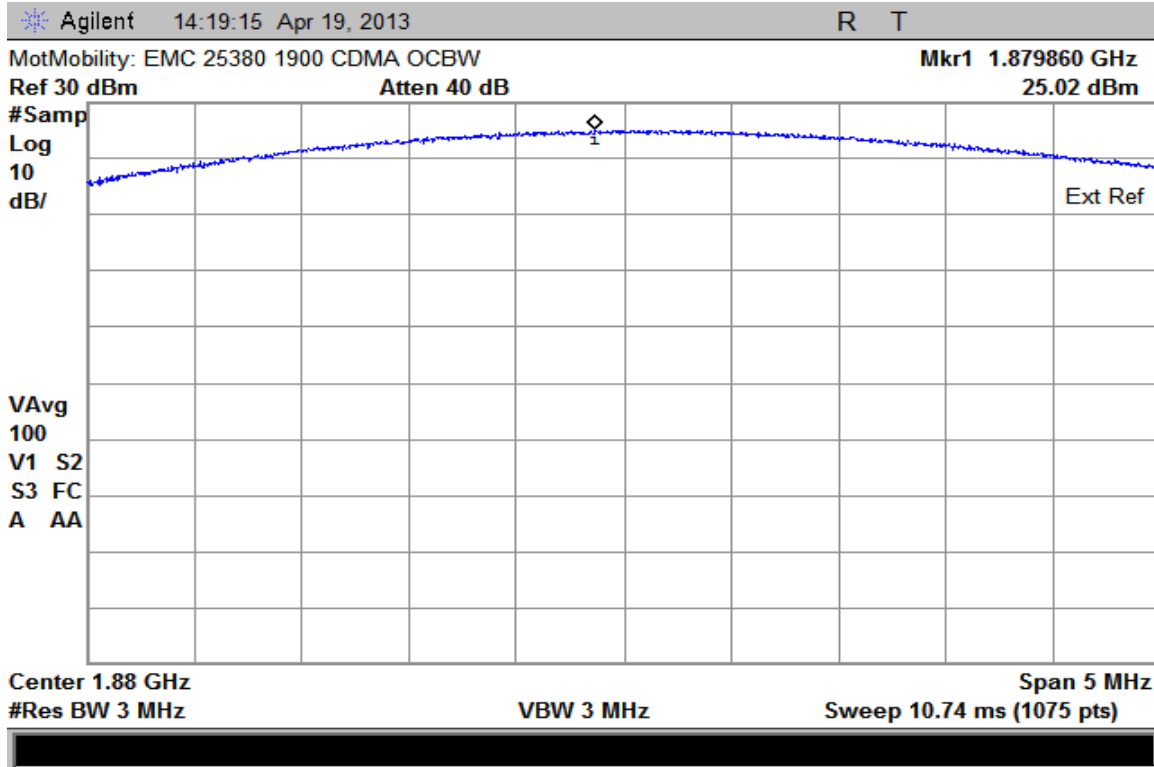


**CDMA 1900 – Reference Level Plot – Channel 600 (1880.00 MHz)**

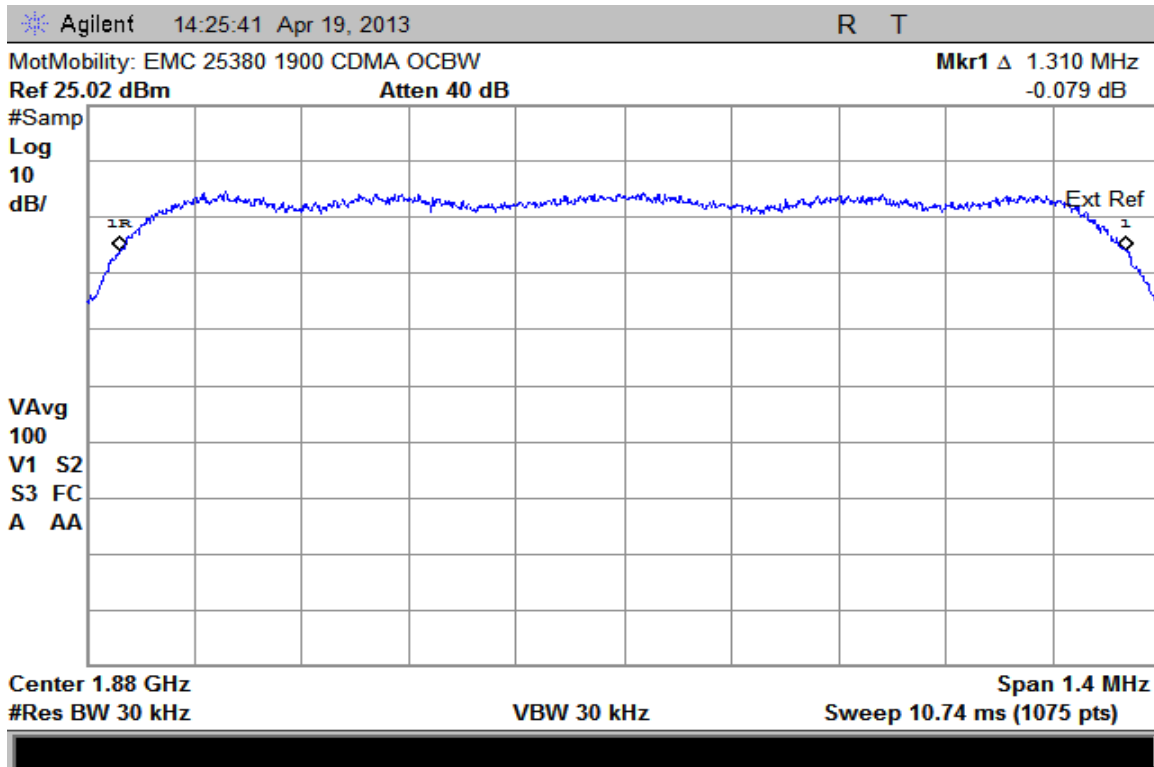

**CDMA 1900 – Occupied Bandwidth – Channel 600 (1880.00 MHz)**

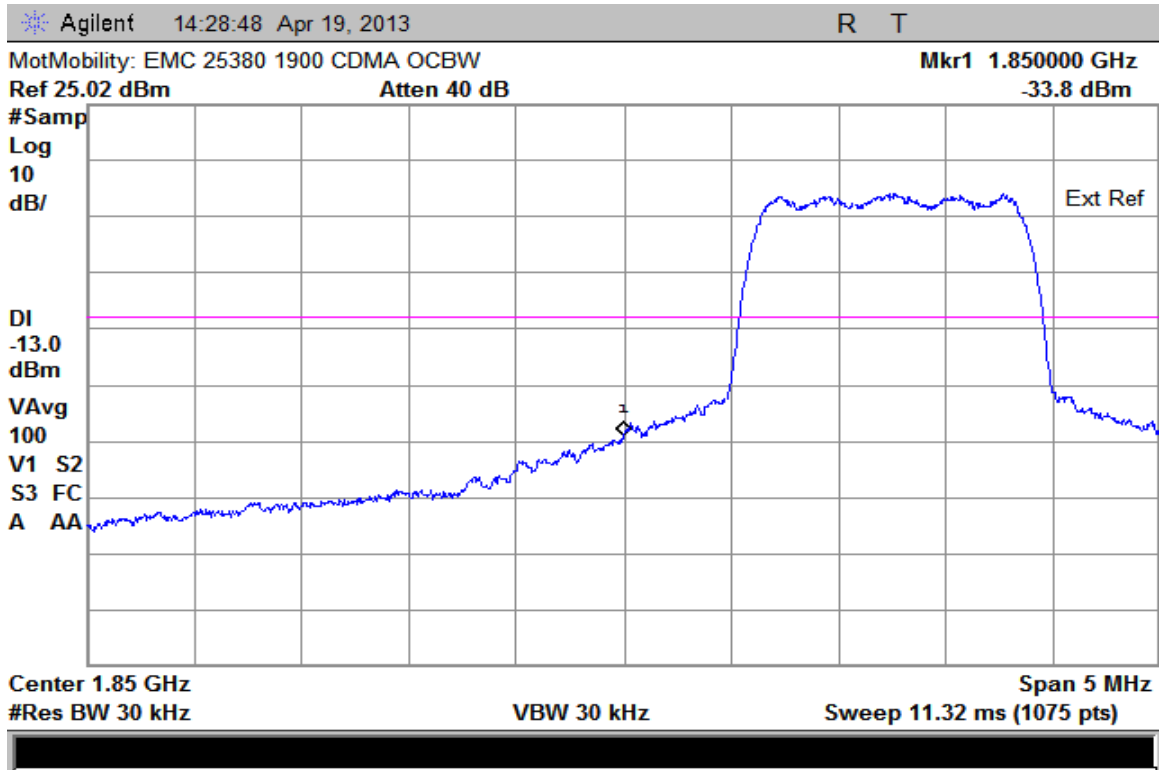

**CDMA 1900 – Lower Band Edge – Channel 25 (1851.25MHz)**

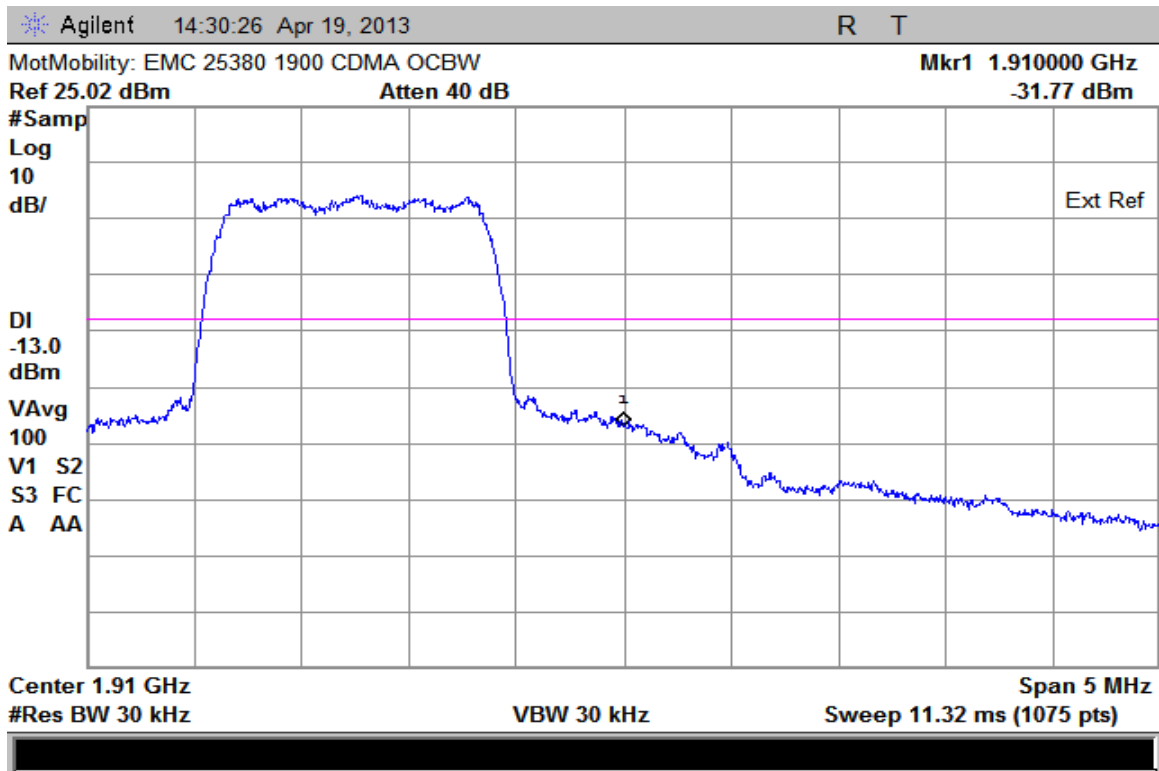

**CDMA 1900 – Upper Band Edge – Channel 1175 (1908.75MHz)**

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **Measurement Procedure**

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:


Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

### **Measurement Results**

Attached

**Measurement Results**  
**Modulation: CDAM 800**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-56.29
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

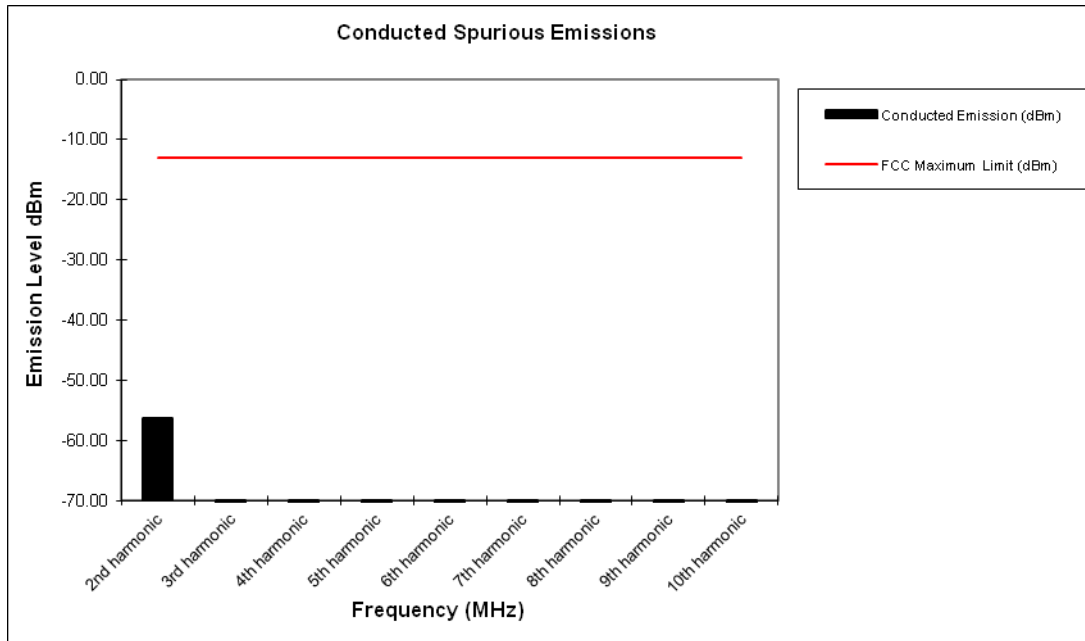

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.



800 CDMA Conducted Spurious Emissions (Lower adjacent 1MHz band)




800 CDMA Conducted Spurious Emissions (Upper adjacent 1MHz band)

**Measurement Results**

**Modulation: CDMA Band Class 10**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-56.62
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

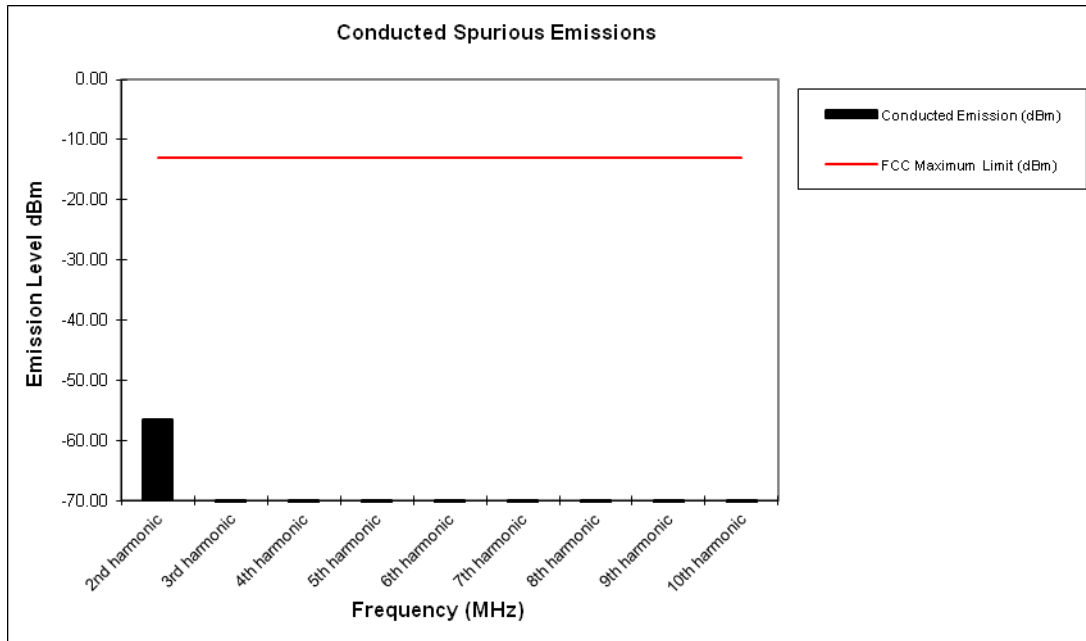


Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

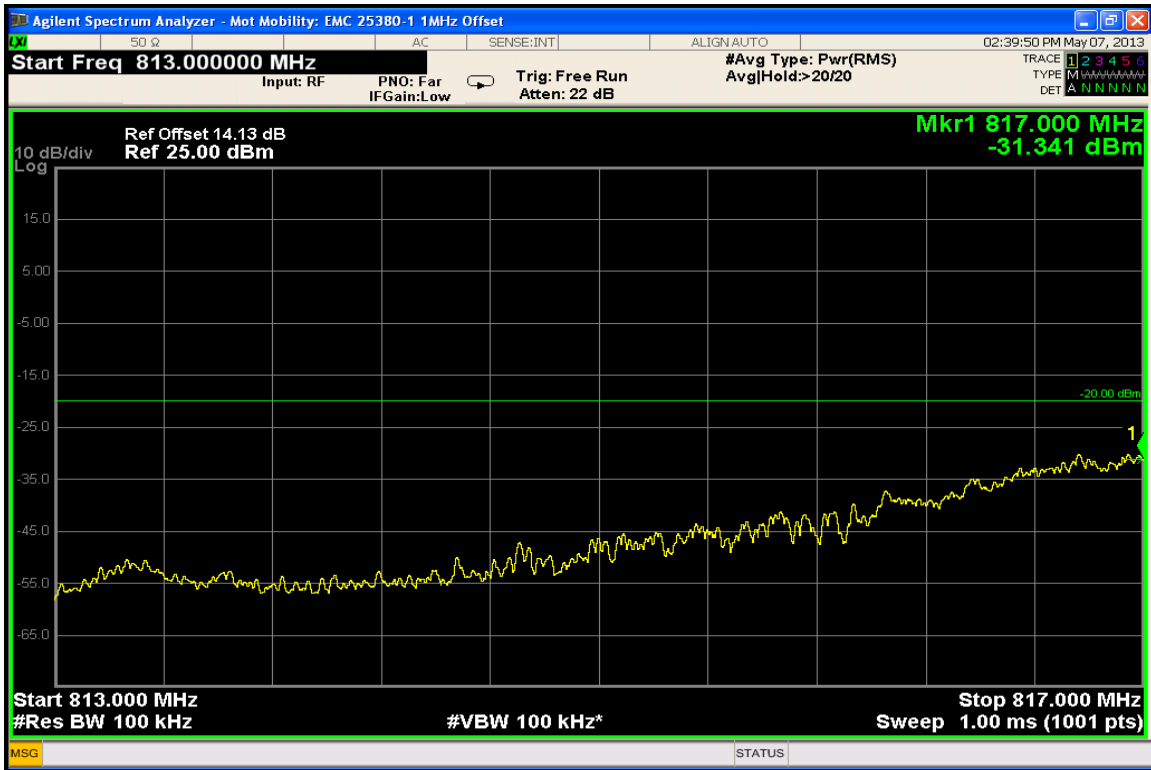


CDMA Band Class 10 Conducted Spurious Emissions (Lower adjacent 1MHz band)

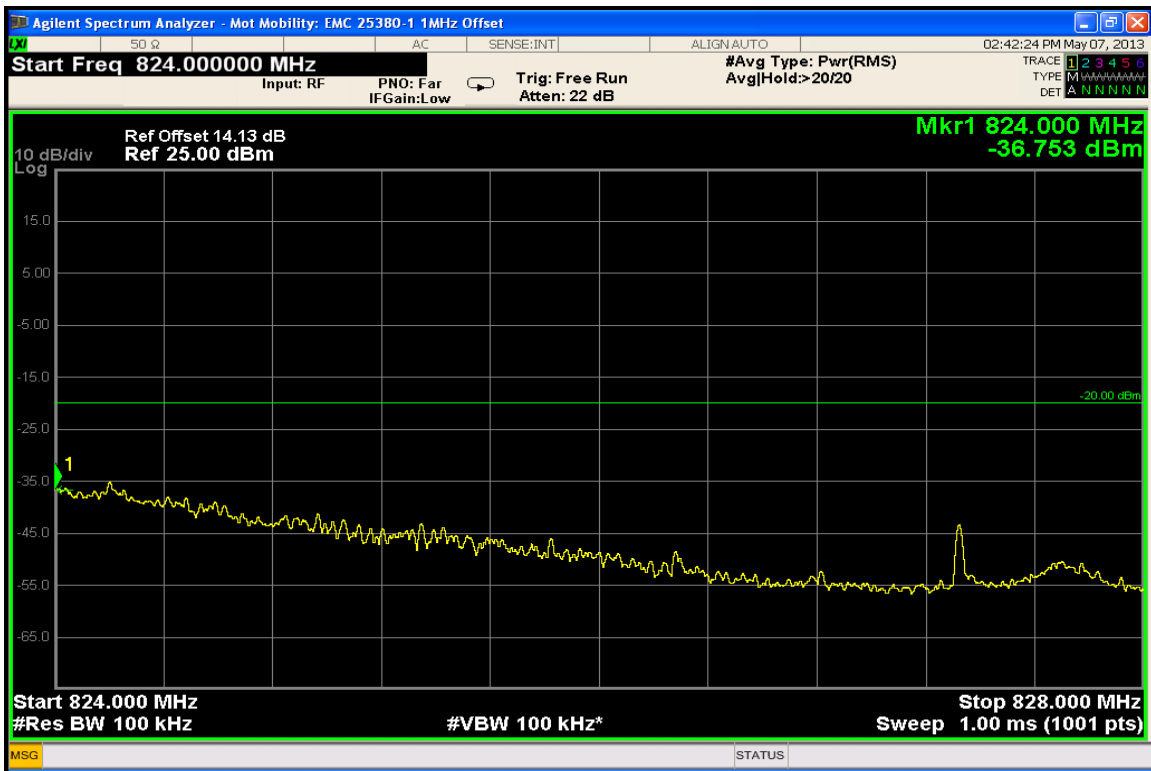

CDMA Band Class 10 Conducted Spurious Emissions (Upper adjacent 1MHz band)

**Measurement Results**  
**Modulation: CDMA 1900**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-40.94
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	-46.23
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

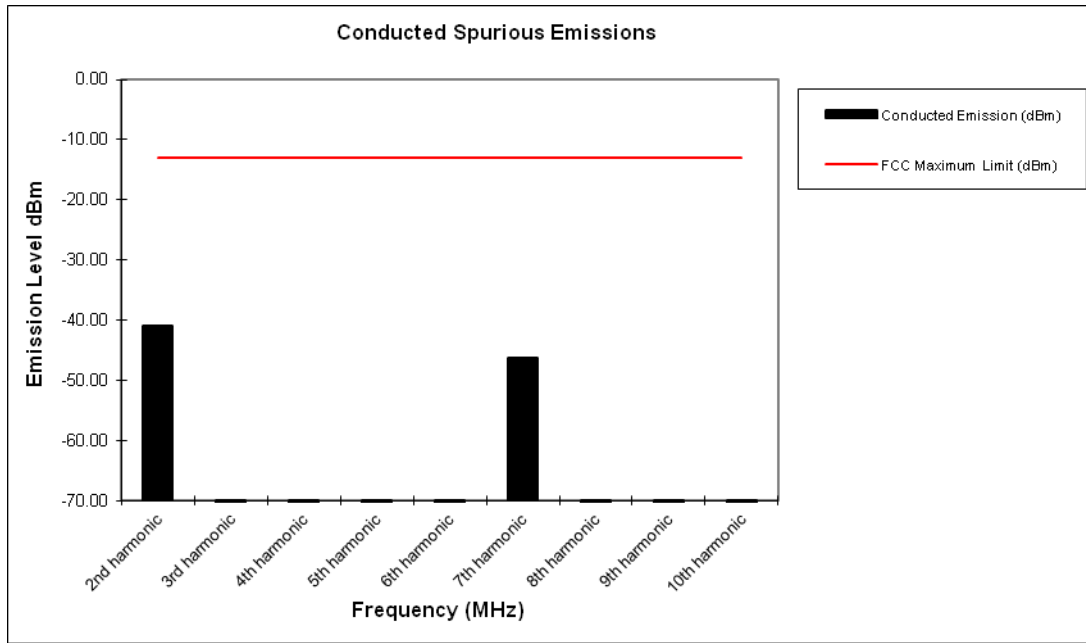

**Notes:**

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

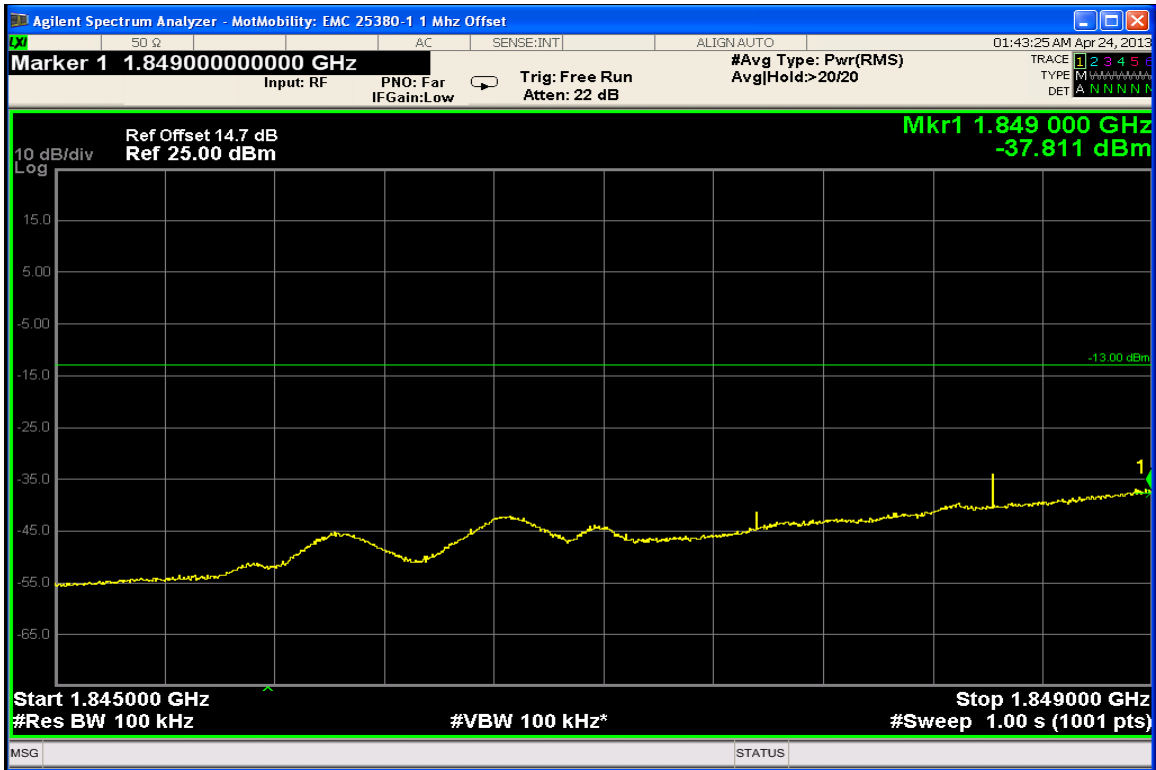

1900 CDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)



1900 CDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Measurement Procedure**

The EUT is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage. Testing was performed in three orthogonal planes where the X plane is with the EUT orientated vertically, the Y plane is with the EUT orientated on its side and the Z plane with the EUT laying flat on the table. The worst case emission is reported for each tested mode.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


**Measurement Results**

Attached

**Measurement Results –CDMA 800**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-60.3	-55.5
3rd harmonic	-13	-49.4	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

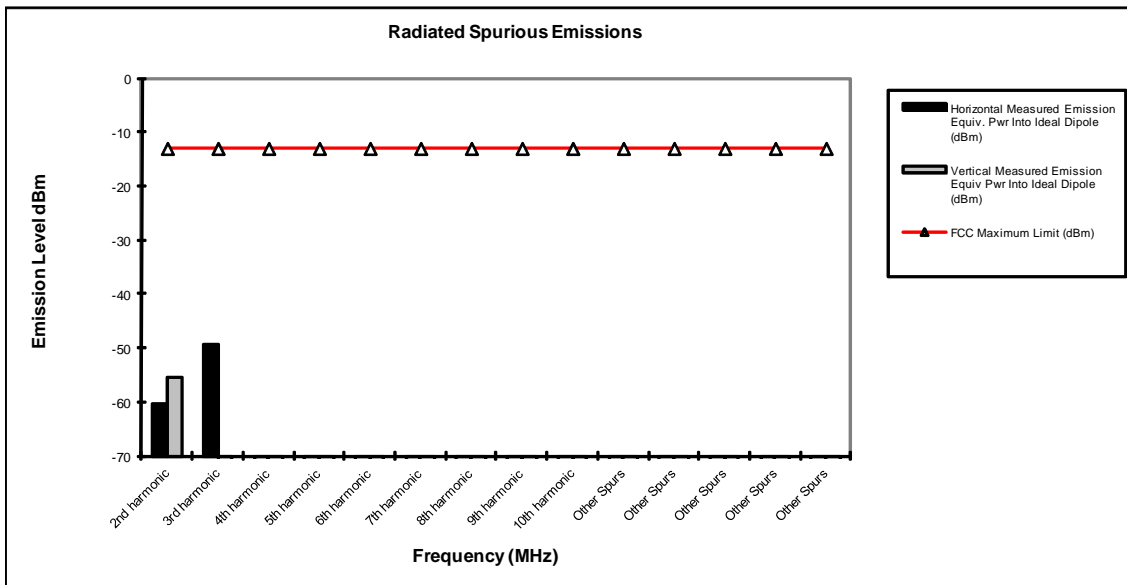

Notes:


- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –CDMA Band Class 10**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-56.3	-61.4
3rd harmonic	-13	-52.4	-47.2
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

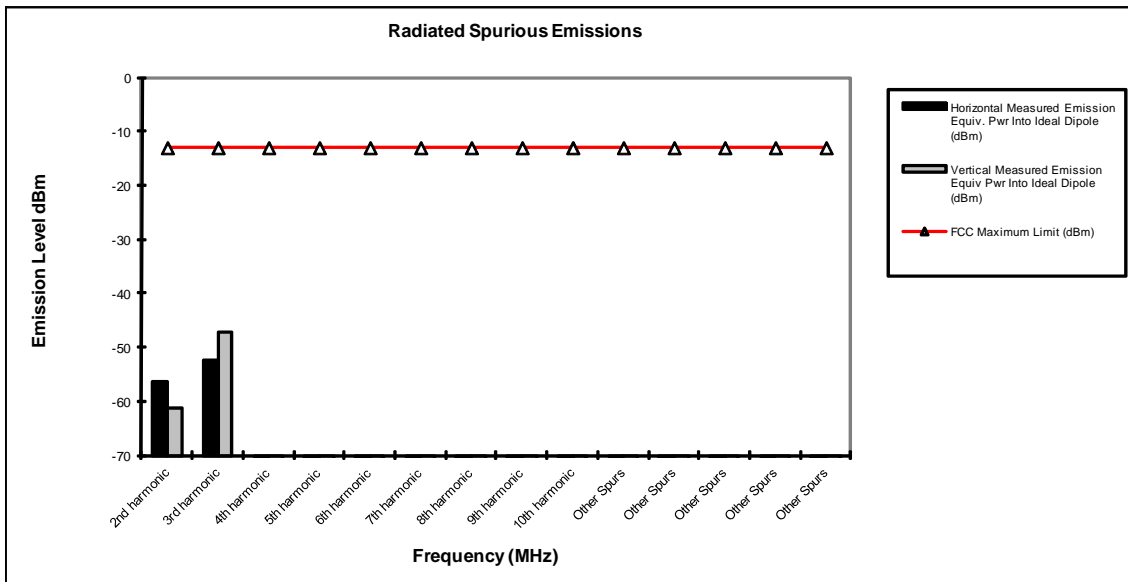

Notes:


- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –CDMA 1900**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-61.8	-54.8
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

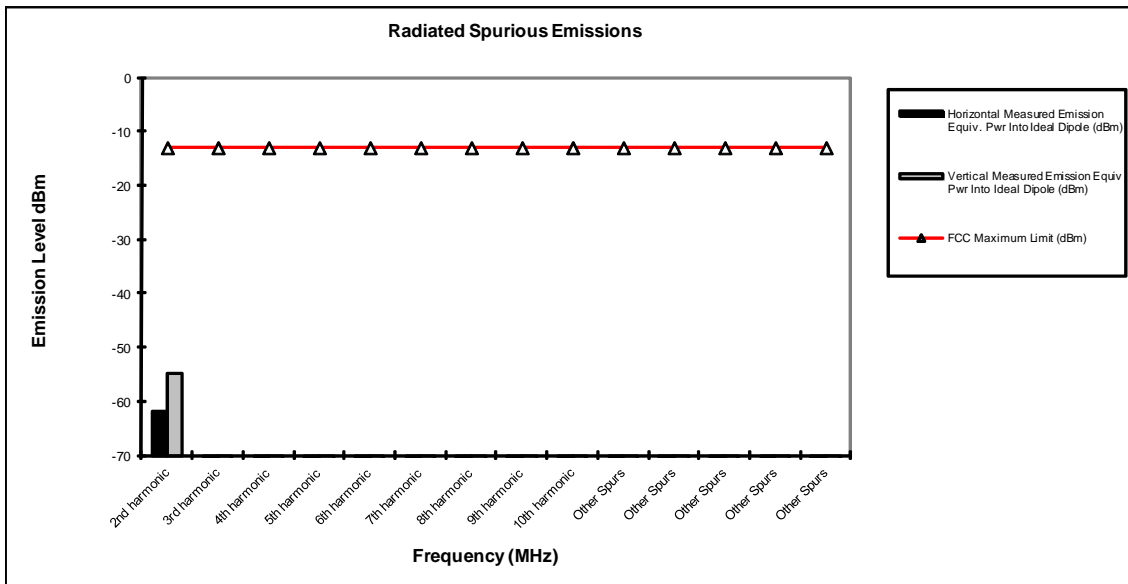

Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

## **FREQUENCY STABILITY**

### **Measurement Procedure**

The EUT is placed in an environmental chamber. The antenna port of the EUT is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

### **Measurement Results**


Attached

**Measurement Results**  
**Modulation: CDMA 800**

# Frequency Stability

Mode: CDMA 800      Operating Frequency: 824.7 MHz  
 Channel: 1013      Deviation Limit (PPM): ± 2.5 ppm

Temperature °C	Frequency Error Hz	Frequency Error (ppm)	Voltage (%)	Voltage (VDC)
-30 °C	-20.41	-0.025	100%	3.80
-20 °C	6.39	0.008	100%	3.80
-10 °C	5.84	0.007	100%	3.80
0 °C	6.99	0.008	100%	3.80
10 °C	-8.37	-0.010	100%	3.80
20 °C	-8.50	-0.010	100%	3.80
30 °C	-9.20	-0.011	100%	3.80
40 °C	-8.45	-0.010	100%	3.80
50 °C	-11.47	-0.014	100%	3.80
20 °C	-11.31	-0.014	Battery Endpoint	3.42

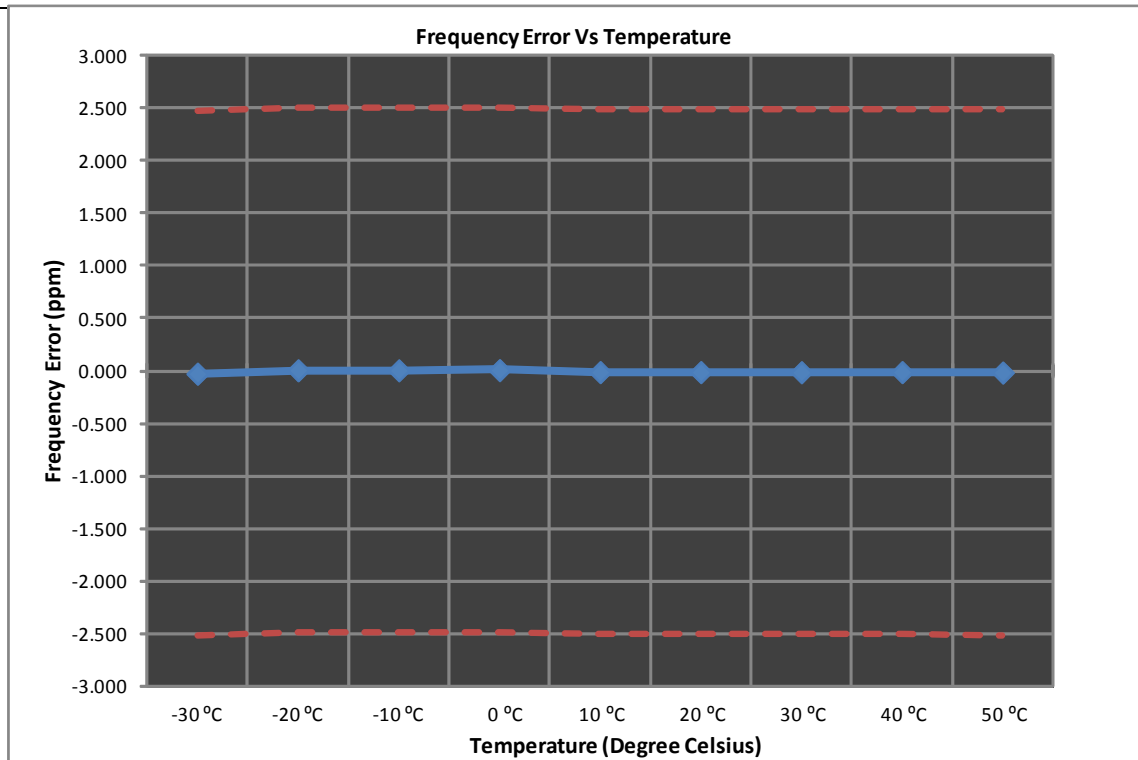


**Measurement Results**

**Modulation: CDMA Band Class 10**

# Frequency Stability

Mode: CDMA 800 BC10      Operating Frequency: 817.9 MHz  
 Channel: 476              Deviation Limit (PPM): ± 2.5 ppm

Temperature °C	Frequency Error Hz	Frequency Error (ppm)	Voltage (%)	Voltage (VDC)
-30 °C	-11.80	-0.014	100%	3.80
-20 °C	-7.95	-0.010	100%	3.80
-10 °C	-4.91	-0.006	100%	3.80
0 °C	-3.58	-0.004	100%	3.80
10 °C	-13.30	-0.016	100%	3.80
20 °C	-12.46	-0.015	100%	3.80
30 °C	-11.85	-0.014	100%	3.80
40 °C	-12.41	-0.015	100%	3.80
50 °C	-6.55	-0.008	100%	3.80
20 °C	-9.33	-0.011	Battery Endpoint	3.42

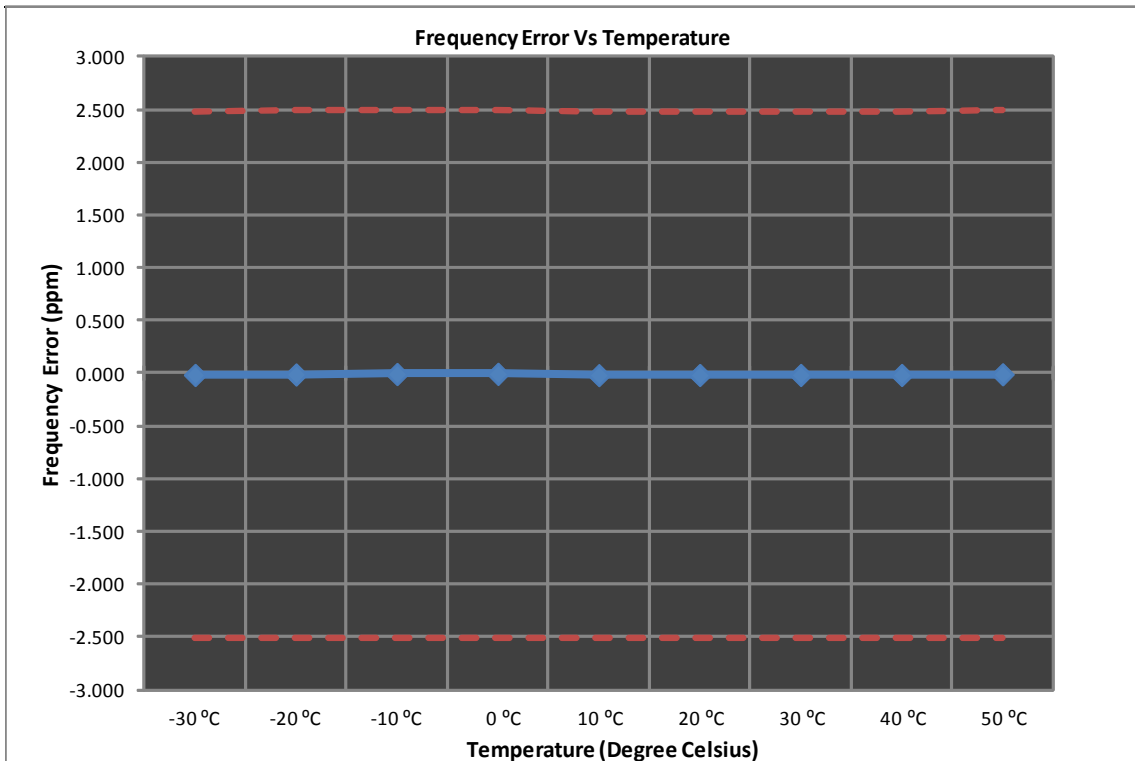


**Measurement Results**  
**Modulation: CDMA 1900**

# Frequency Stability

Mode: CDMA 1900      Operating Frequency: 1851.2 MHz  
 Channel: 25      Deviation Limit (PPM): ± 2.5 ppm

Temperature °C	Frequency Error Hz	Frequency Error (ppm)	Voltage (%)	Voltage (VDC)
-30 °C	8.35	0.005	100%	3.80
-20 °C	12.70	0.007	100%	3.80
-10 °C	11.94	0.006	100%	3.80
0 °C	-13.96	-0.008	100%	3.80
10 °C	10.73	0.006	100%	3.80
20 °C	9.80	0.005	100%	3.80
30 °C	14.97	0.008	100%	3.80
40 °C	15.46	0.008	100%	3.80
50 °C	10.04	0.005	100%	3.80
20 °C	15.87	0.009	Battery Endpoint	3.42

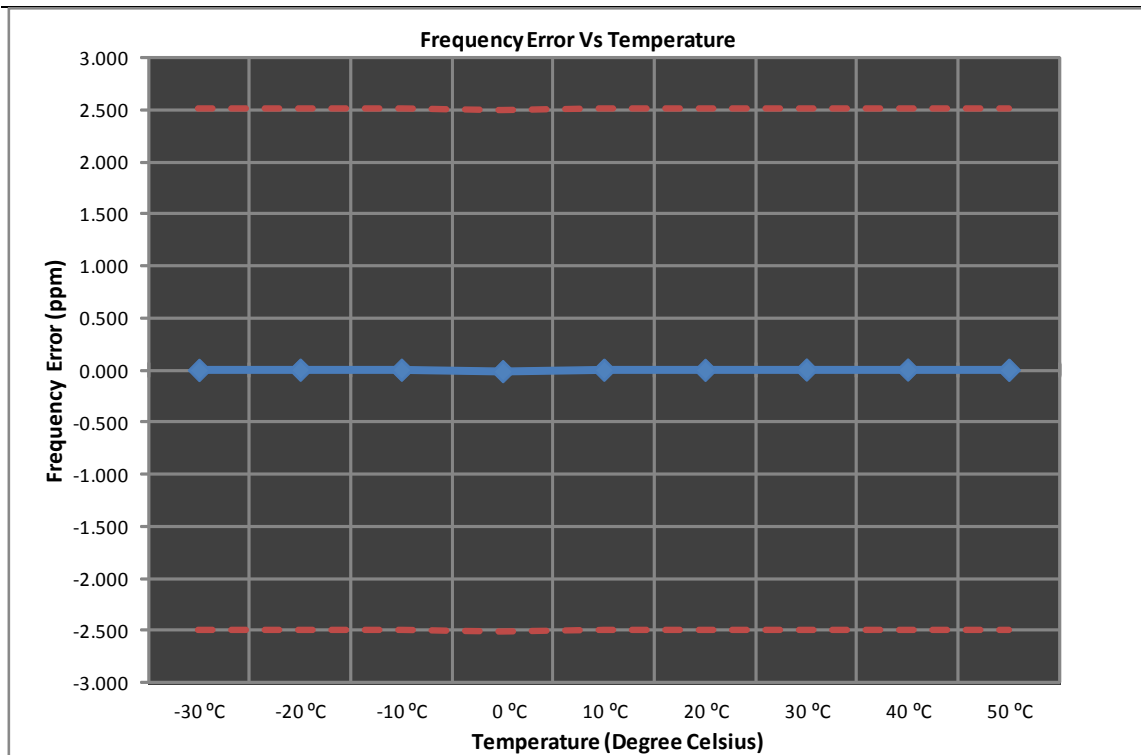

**End of Test Report**