



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



MEASUREMENT REPORT

FCC PART 15.247 / IC RSS-210 WLAN 802.11a/b/g/n/ac

Applicant Name:
Motorola Mobility LLC
8000 West Sunrise Blvd.
Plantation, FL 33322
United States

Date of Testing:
04/04 - 04/26/2013
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1305290918.IHD

FCC ID:	IHDT56PB3
APPLICANT:	Motorola Mobility LLC

Application Type: Certification
EUT Type: Portable Handset
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Procedure(s): KDB 558074 v03r01

Mode	Tx Frequency (MHz)	Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2462	86.10	19.35	151.36	21.80
802.11g	2412 - 2462	50.47	17.03	231.74	23.65
802.11n	2412 - 2462	51.40	17.11	229.62	23.61
802.11a	5745 - 5825	103.04	20.13	258.23	24.12
802.11n (20MHz)	5745 - 5825	85.90	19.34	281.19	24.49
802.11n (40MHz)	5755 - 5815	74.82	18.74	238.78	23.78
802.11ac (80MHz)	5775 - 5795	56.89	17.55	419.76	26.23

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 v03r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 1 of 81

TABLE OF CONTENTS


FCC PART 15.247 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST.....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 AC LINE CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS.....		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS.....		10
6.1 SUMMARY.....		10
6.2 6DB BANDWIDTH MEASUREMENT – 802.11A/B/G/N/AC.....		11
6.3 OUTPUT POWER MEASUREMENT – 802.11B/G/N (2.4GHZ).....		23
6.4 OUTPUT POWER MEASUREMENT – 802.11A/N/AC (5GHZ).....		26
6.5 POWER SPECTRAL DENSITY (802.11A/B/G/N/AC).....		29
6.6 CONDUCTED EMISSIONS AT THE BAND EDGE.....		41
6.7 CONDUCTED SPURIOUS EMISSIONS.....		49
6.8 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		57
6.9 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....		63
6.10 LINE-CONDUCTED TEST DATA.....		77
7.0 CONCLUSION.....		81

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 2 of 81



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Motorola Mobility LLC

APPLICANT ADDRESS: 8000 West Sunrise Blvd.
Plantation, FL 33322, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.247

FCC ID: IHDT56PB3

Test Device Serial No.: LXVE110040, LXVE110010 Production Pre-Production Engineering


FCC CLASSIFICATION: Digital Transmission System (DTS)

DATE(S) OF TEST: 04/04 - 04/26/2013



TEST REPORT S/N: 0Y1305290918.IHD

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 3 of 81	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

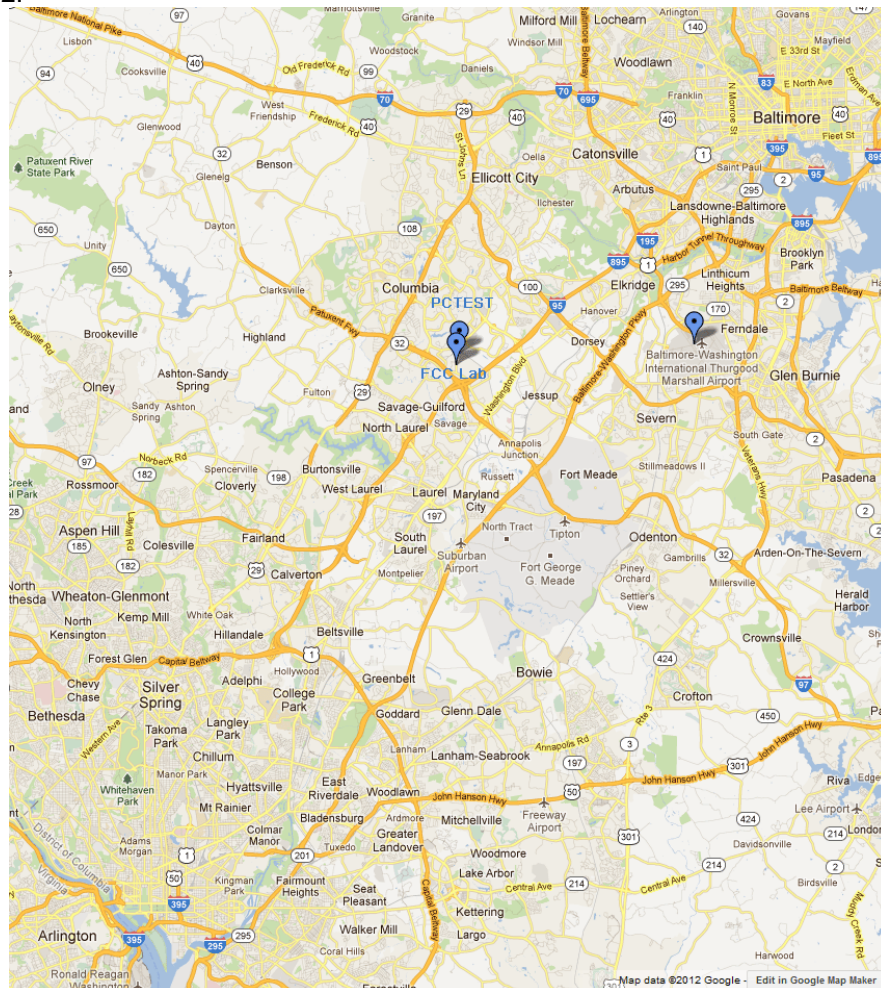




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 4 of 81

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Portable Handset FCC ID: IHDT56PB3**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

The test data shown in this report is re-used from a previously certified device (FCC ID: IHDT56PB1) whose circuitry is electrically identical.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), Band 4, 5, 12 LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), NFC

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 v03r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11b – 99.4%
- 802.11a/g/n 20MHz Bandwidth – 99.54%
- 802.11n 40MHz Bandwidth – 99.45%
- 802.11ac 80MHz Bandwidth – 98.05%

2.3 Test Configuration

The Motorola Portable Handset FCC ID: IHDT56PB3 was tested per the guidance of KDB 558074 v03r01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.



2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 5 of 81	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 v03r01 were used in the measurement of the **Motorola Portable Handset FCC ID: IHDT56PB3**.

Deviation from measurement procedure.....None



3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 6 of 81	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 7 of 81	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:



The **Motorola Portable Handset FCC ID: IHDT56PB3** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Ch.	BW (MHz)	Frequency (MHz)
149	20	5745
151	20 / 40	5755
153	20	5765
155	20/40/80	5775
157	20	5785

Ch.	BW (MHz)	Frequency (MHz)
159	20/40/80	5795
161	20	5805
163	20 /40	5815
165	20	5825

Table 4-1. Frequency/ Channel Operations



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 8 of 81

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
-	WL40-1	Conducted Cable Set (40GHz)	1/29/2013	Annual	1/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	5/10/2012	Annual	5/10/2013	121034
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/6/2012	Biennial	6/6/2014	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	3/1/2013	Annual	3/1/2014	251425001
K & L	6000/T18000	High Pass Filter	3/4/2013	Annual	3/4/2014	1
Mini-Circuits	VHF-3100+	High Pass Filter	1/21/2013	Annual	1/21/2014	31144
Mini-Circuits	VHF-8400+	3.4GHz - 9.9GHz High Pass Filter	1/17/2013	Annual	1/17/2014	31048
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	6/6/2012	Annual	6/6/2013	100037
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 9 of 81	

6.0 TEST RESULTS

6.1 Summary



Company Name: Motorola Mobility LLC
 FCC ID: IHDT56PB3
 FCC Classification: Digital Transmission System (DTS)
 Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)
13.5/15Mbps, 27/30Mbps, 40.5/45Mbps, 54/60Mbps, 81/90Mbps, 108/120Mbps,
121.5/135Mbps, 135/150Mbps (n – 40MHz)
29.3/32.5Mbps, 58.5/65Mbps, 87.8/97.5Mbps, 117/130Mbps, 175.5/195Mbps,
234/260Mbps, 263.3/292.5Mbps, 292.5/325Mbps, 351/390Mbps, 390/433.3Mbps
(ac – 80MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
15.247(a)(2)	RSS-210 [A8.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	RSS-210 [A8.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3, 6.4
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 6.5
15.247(d)	RSS-210 [A8.5]	Band Edge / Out-of-Band Emissions	Conducted ≥ 20dBc		PASS	Sections 6.6, 6.7
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 6.8, 6.9
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.10

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation”, Version 2.3.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 10 of 81	

6.2 6dB Bandwidth Measurement – 802.11a/b/g/n/ac

§15.247(a)(2); RSS-210 [A8.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

KDB 558074 v03r01 – Section 8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



Figure 6-1. Test Instrument & Measurement Setup



Test Notes


None

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 11 of 81	


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	9.051	0.500	Pass
2437	6	b	1	8.103	0.500	Pass
2462	11	b	1	8.556	0.500	Pass
2412	1	g	6	16.41	0.500	Pass
2437	6	g	6	16.38	0.500	Pass
2462	11	g	6	16.39	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.64	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	17.63	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	17.65	0.500	Pass
5745	149	a	6	16.37	0.500	Pass
5785	157	a	6	16.39	0.500	Pass
5825	165	a	6	16.39	0.500	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.62	0.500	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.64	0.500	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.61	0.500	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	34.22	0.500	Pass
5775	155	n (40MHz)	13.5/15 (MCS0)	35.59	0.500	Pass
5815	163	n (40MHz)	13.5/15 (MCS0)	35.52	0.500	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.12	0.500	Pass
5795	159	ac (80MHz)	29.3/32.5 (MCS0)	75.16	0.500	Pass

Table 6-2. Conducted Bandwidth Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 12 of 81	

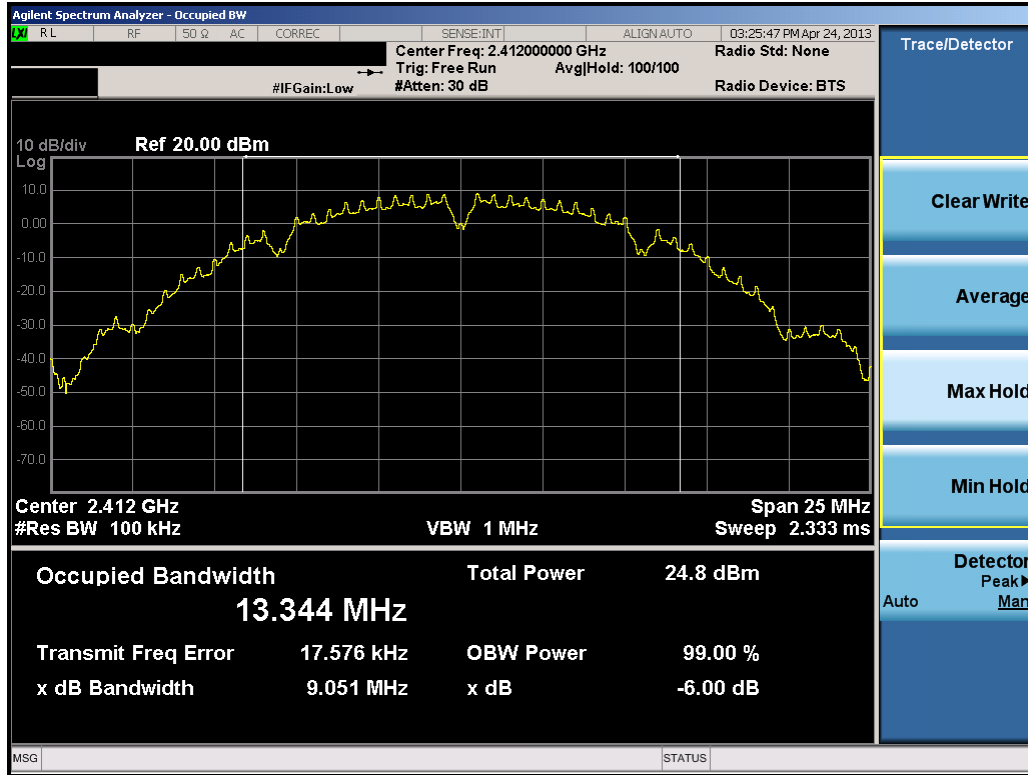


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

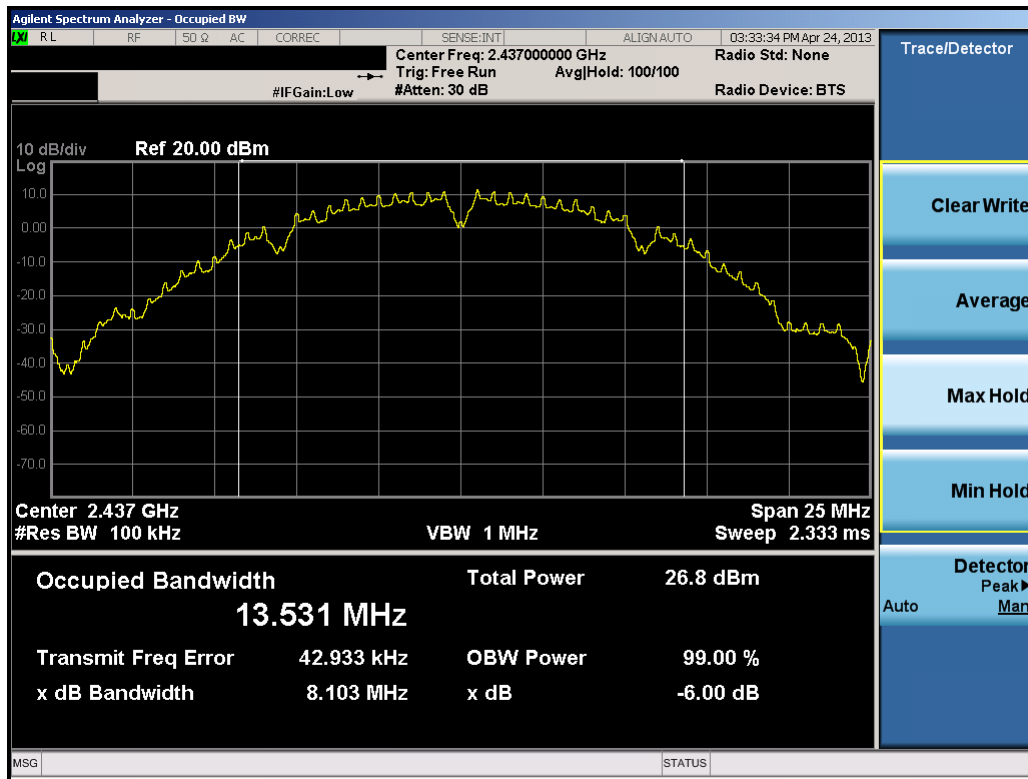


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 13 of 81

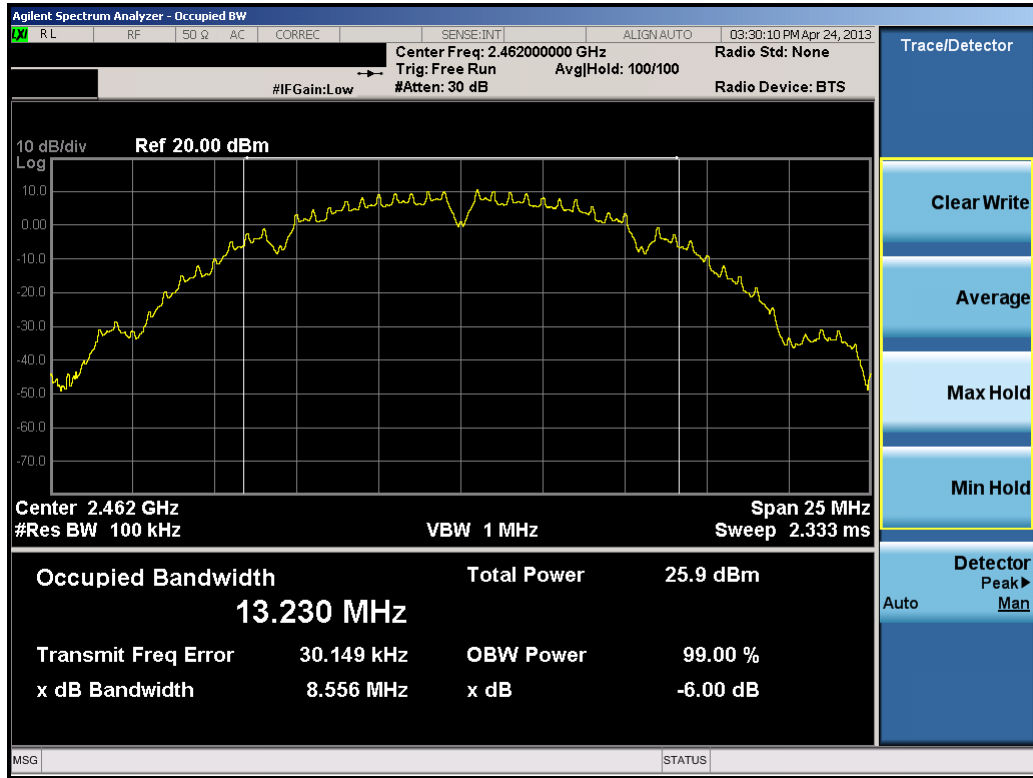


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

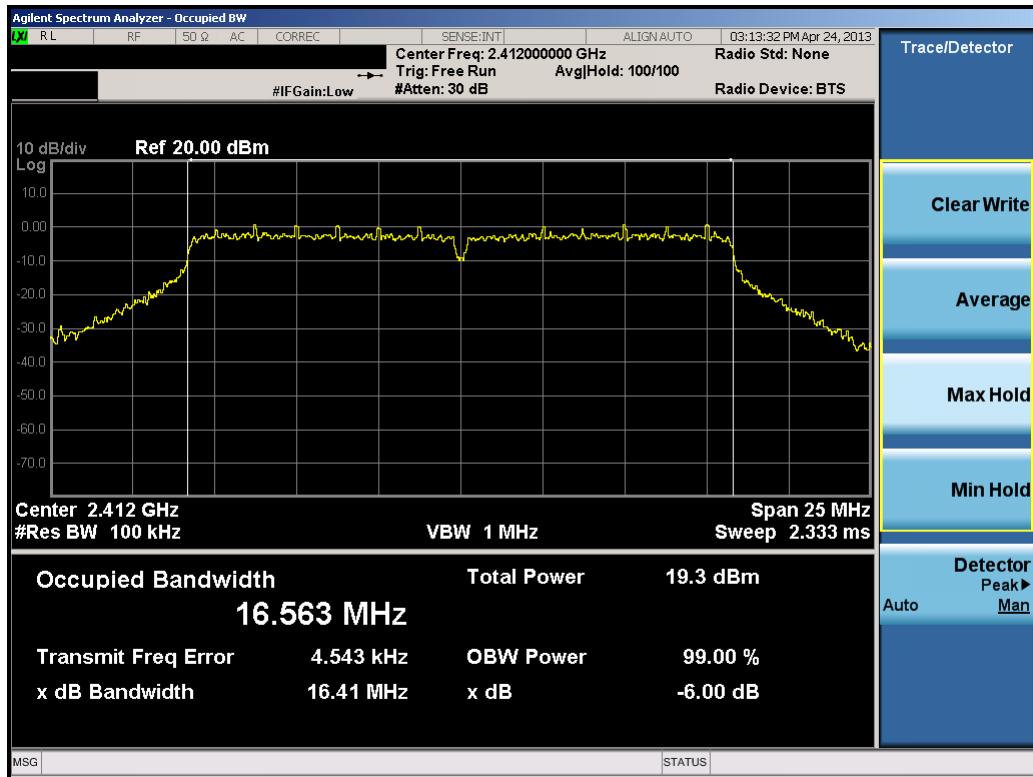


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 14 of 81

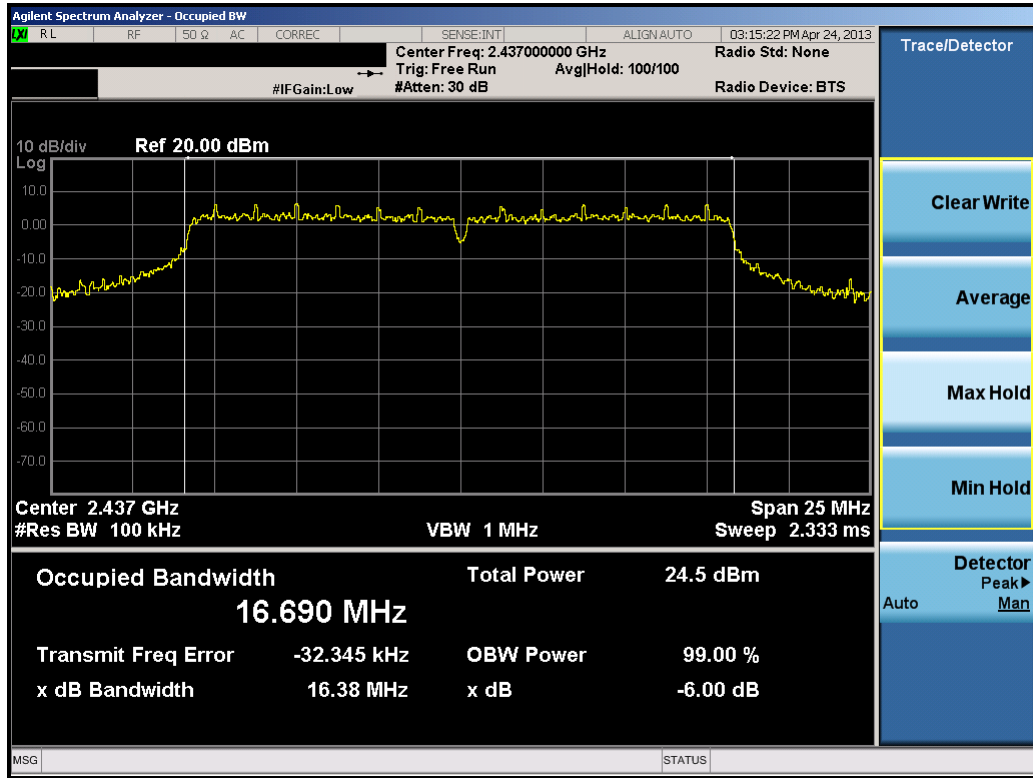


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

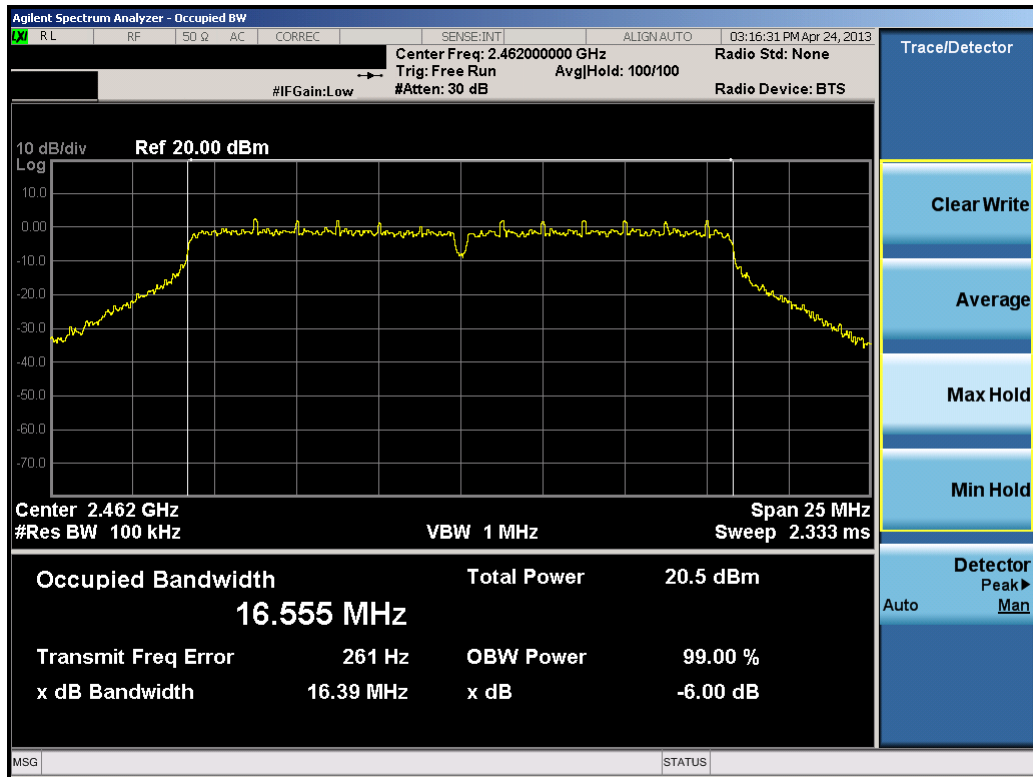


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 15 of 81

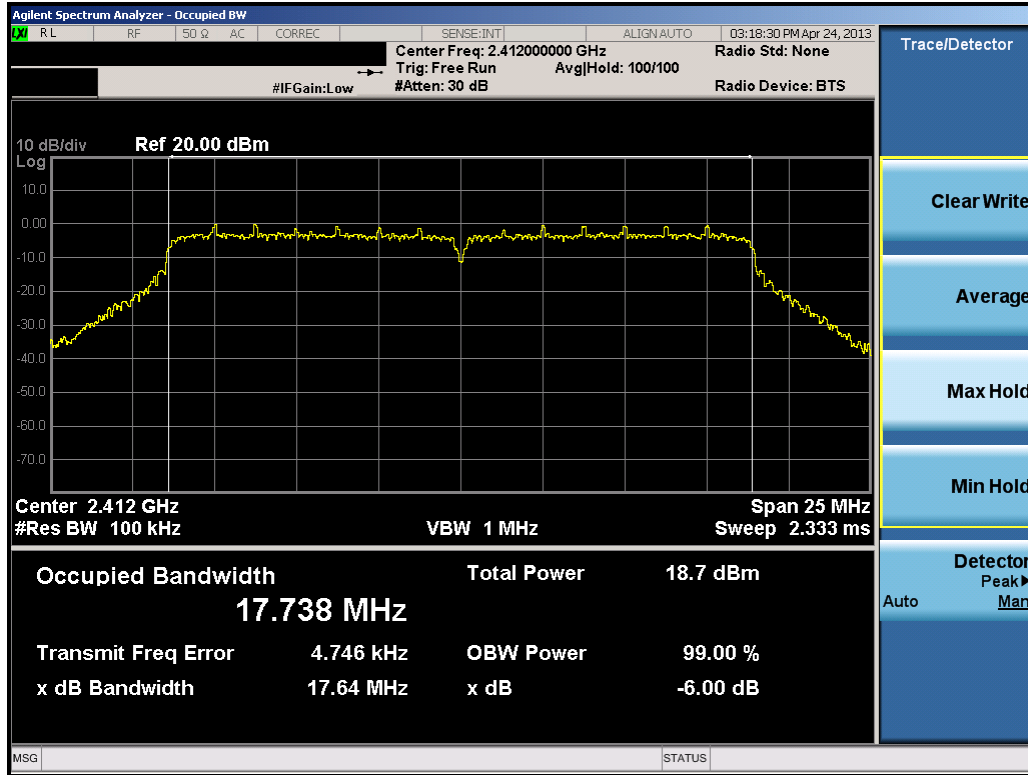


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

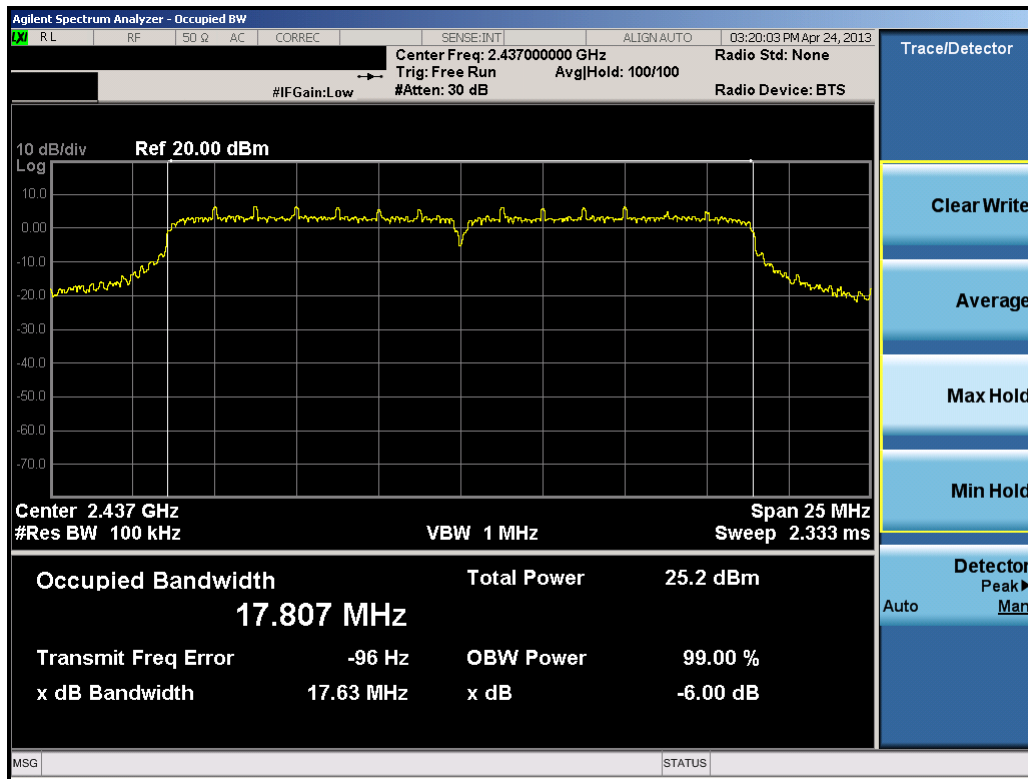


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 16 of 81

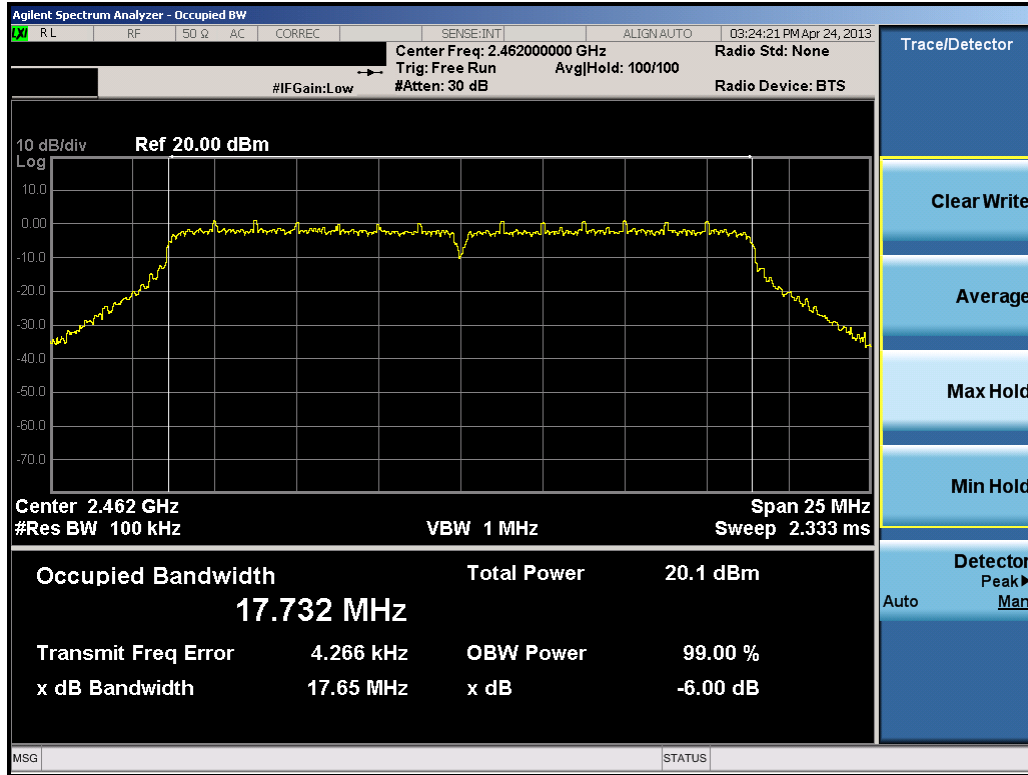


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

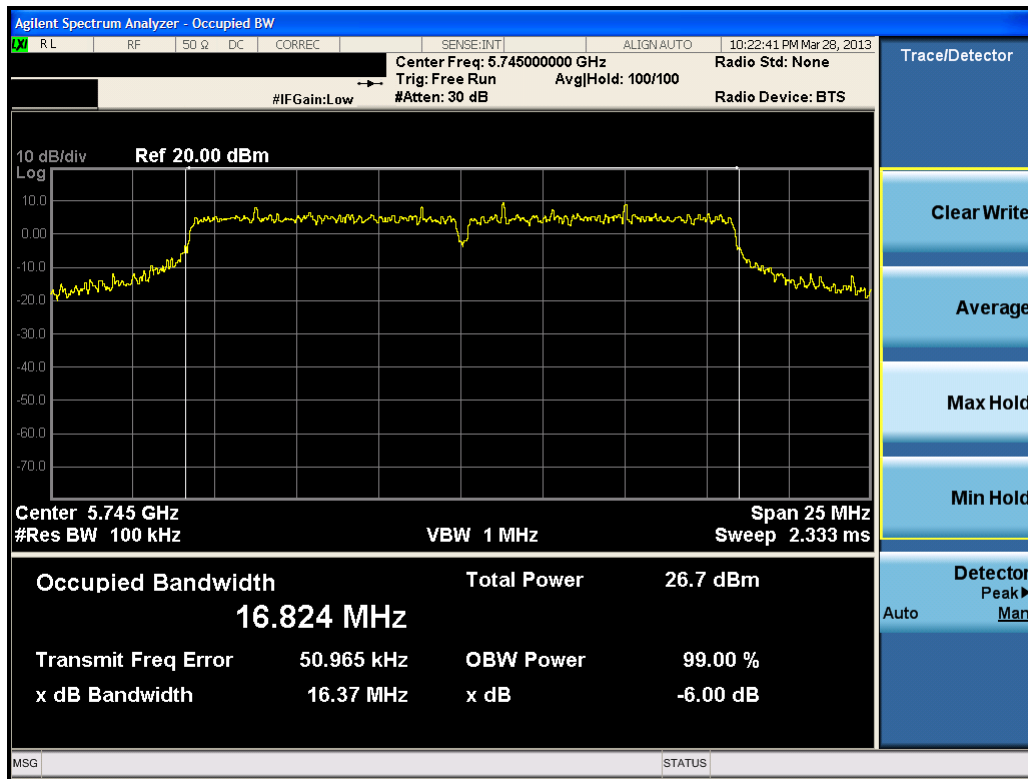


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 17 of 81

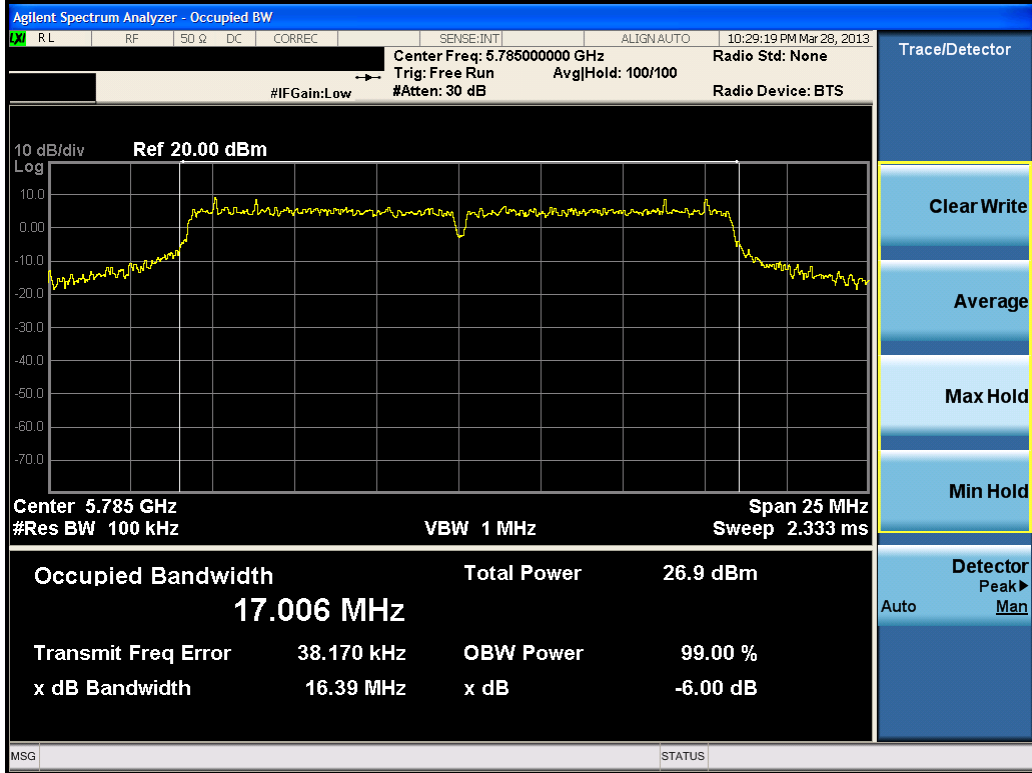


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

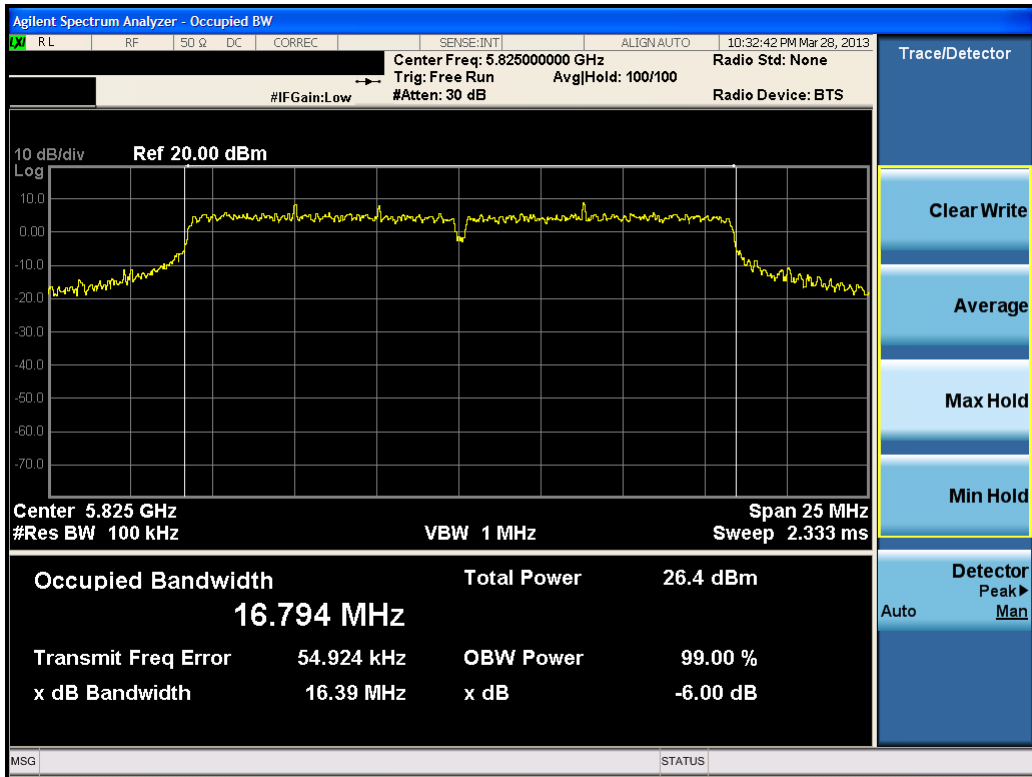


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 18 of 81

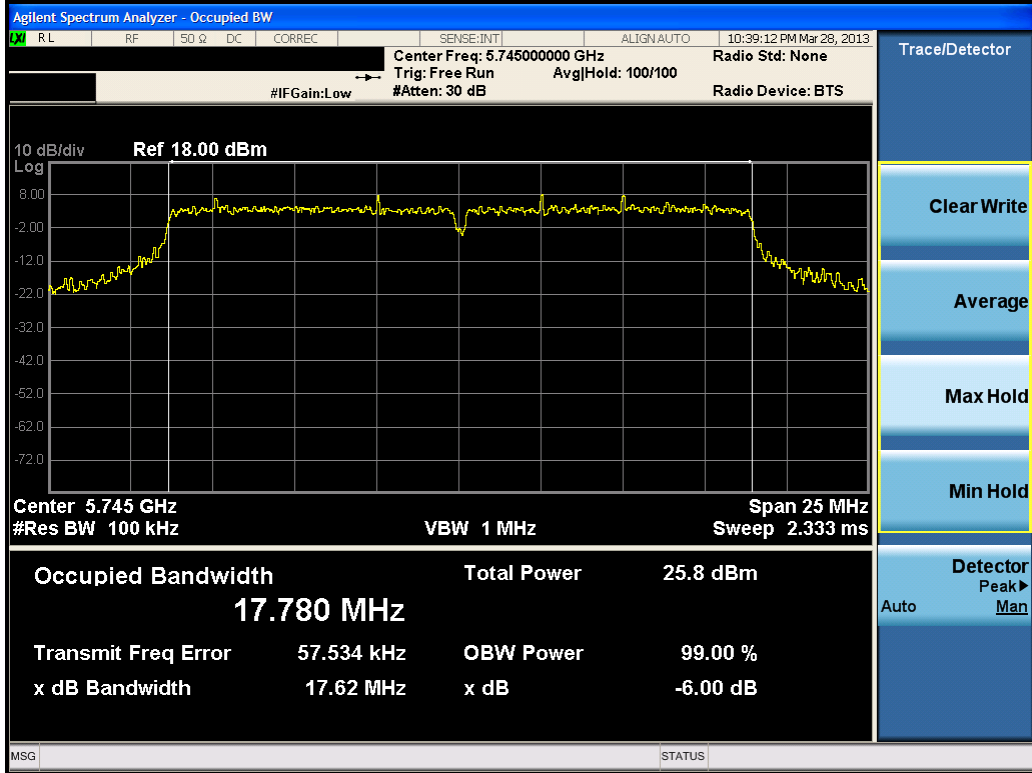


Plot 6-13. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

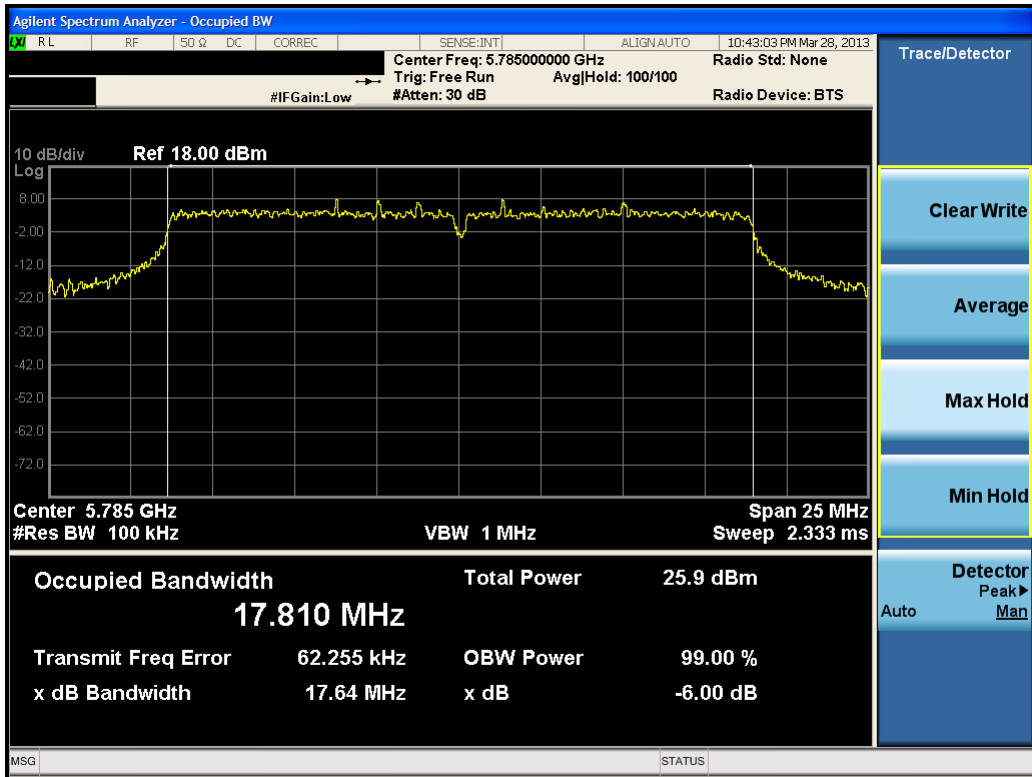


Plot 6-14. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 19 of 81

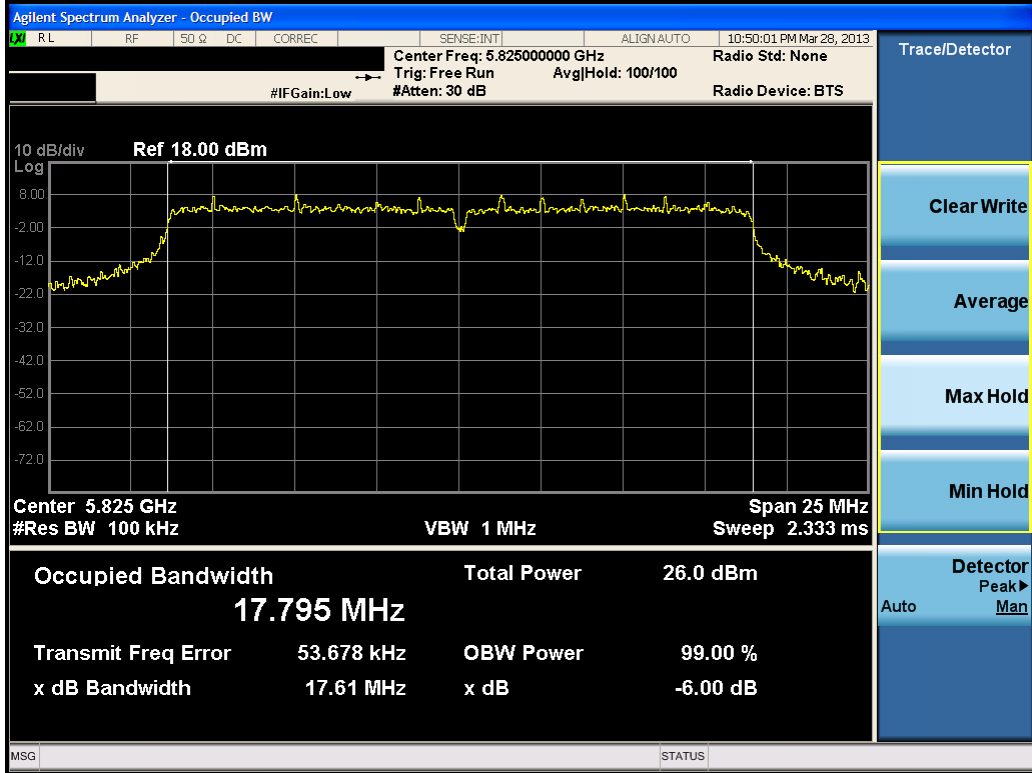


Plot 6-15. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

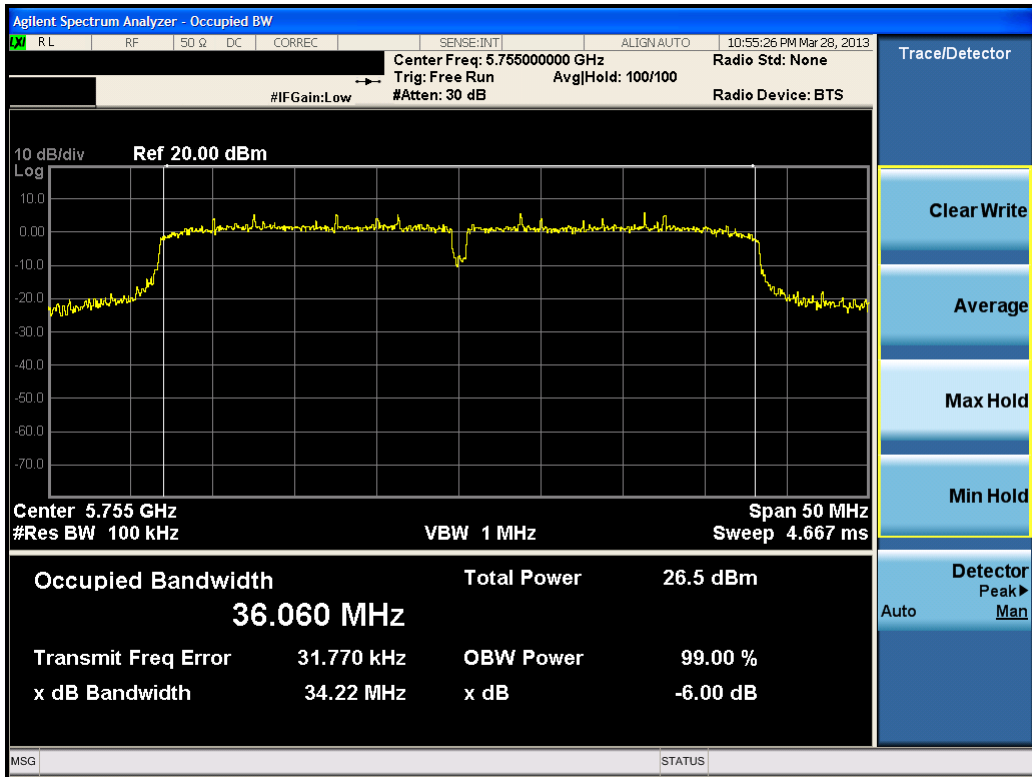


Plot 6-16. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 20 of 81

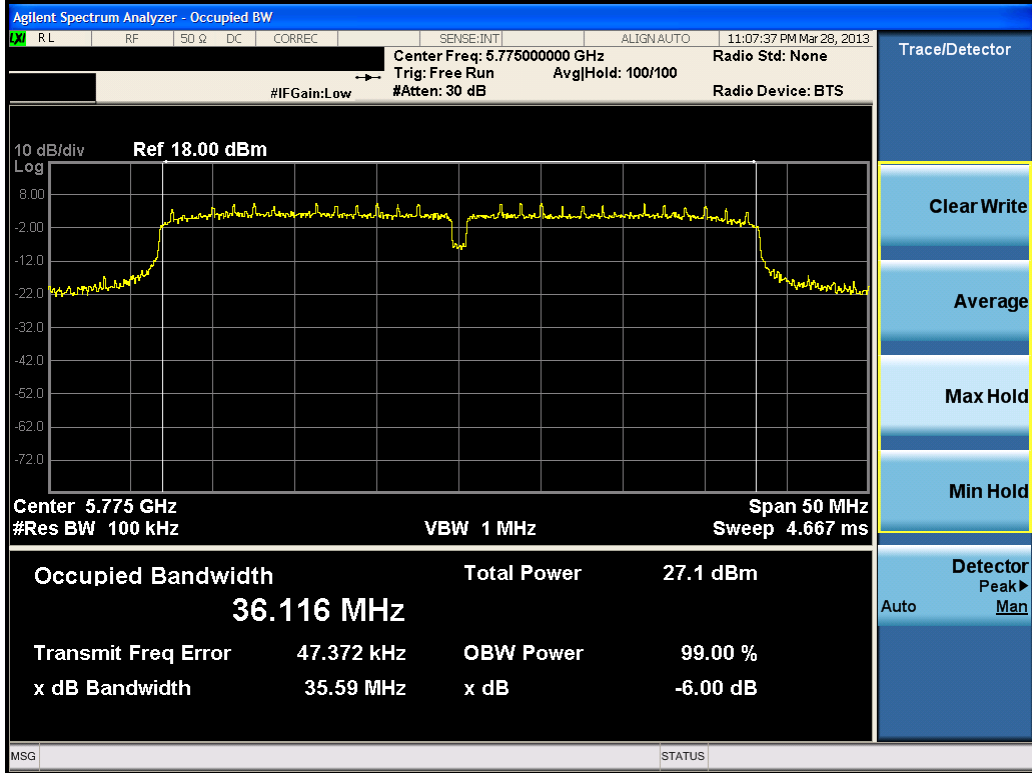


Plot 6-17. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 155)

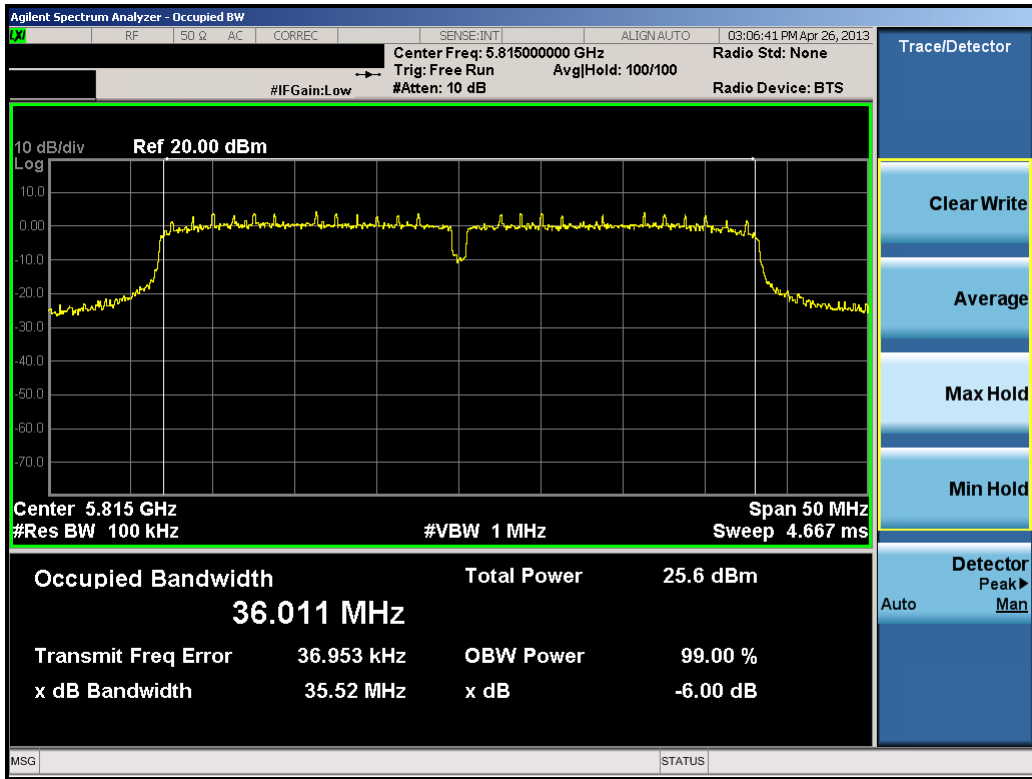


Plot 6-18. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 163)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 21 of 81

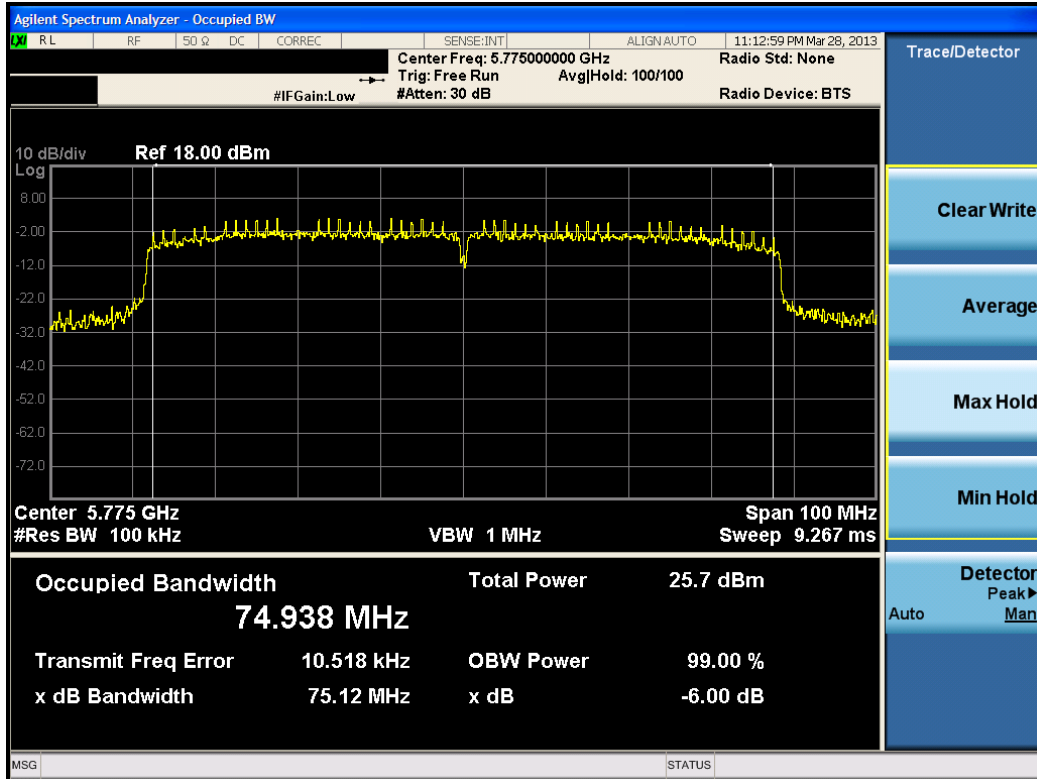

Plot 6-19. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

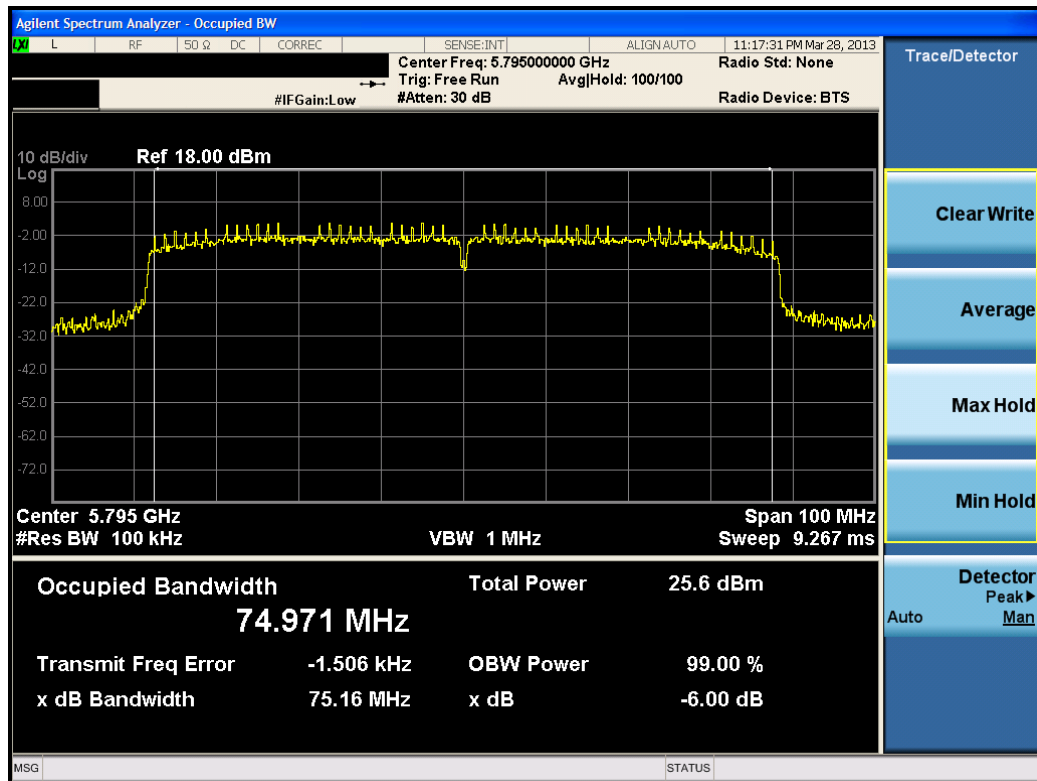

Plot 6-20. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 159)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 22 of 81

6.3 Output Power Measurement – 802.11b/g/n (2.4GHz) §15.247(b)(3); RSS-210 [A8.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

- KDB 558074 v03r01 – Section 9.1.3 PKPM1 Peak Power Method (for signals with BW ≤ 50MHz)
- KDB 558074 v03r01 – Section 9.1.2 Integrated Band Power Method (for signals with BW > 50MHz)
- KDB 558074 v03r01 – Section 9.2.3.2 Method AVGPM-G (for signals of all BWs)

Test Settings

Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.



Integrated Band Power Method (Peak Power Measurement of Signals with DTS BW > 50MHz)

Since the RF power meter used only implemented a VBW of 50MHz, a signal analyzer was required to perform power measurements for signals' whose bandwidth were > 50MHz. The following settings shown in the next two sub-sections were used on a signal analyzer:

1. The signal analyzers' channel power measurement function was enabled with the integration bandwidth set to the measured DTS bandwidth
2. RBW = 1MHz
3. VBW ≥ 3 x RBW
4. Span ≥ 1.5 x DTS BW
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to fully stabilize

Method AVGPM-G (Average Power Measurements for Signals With Any Channel BW)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 23 of 81	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

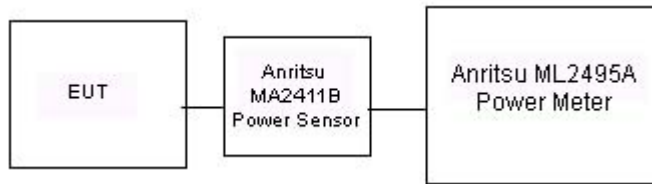


Figure 6-2. Test Instrument & Measurement Setup for Power Meter Measurements






Figure 6-3. Test Instrument & Measurement Setup for Signal Analyzer Measurements

Test Notes

The conducted power was measured for several channels, in addition to the standard low, middle, and high channels, due to compliance reasons with the respective restricted radiated band edge emission limits in the 2400 – 2483.5MHz band. The conducted power was lowered on all necessary band edge channels as well as other in-band channels (i.e. channels 2 – 10 in 802.11b/g/n operation) until compliance could be achieved. See Section 6.9 for radiated band edge measurements on all channels whose conducted power had to be reduced.

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	17.03	17.06	17.22	17.09
			PEAK	19.62	19.65	19.80	19.71
802.11b	2417	2	AVG	17.07	17.04	17.03	17.05
			PEAK	19.68	19.65	19.65	19.66
802.11b	2437	6	AVG	19.16	19.18	19.14	19.14
			PEAK	21.70	21.67	21.69	21.70
802.11b	2462	11	AVG	18.31	18.11	18.24	18.25
			PEAK	20.97	20.78	20.82	20.91

Table 6-3. 802.11b Conducted Output Power Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 24 of 81	

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	12.15	12.06	12.02	11.99	11.98	11.99	12.06	11.91
			PEAK	19.50	19.47	19.42	19.45	19.49	19.41	19.48	19.32
802.11g	2417	2	AVG	14.12	14.17	14.10	14.13	14.04	14.12	14.11	14.09
			PEAK	21.05	21.14	21.17	21.14	21.10	21.19	21.19	21.17
802.11g	2422	3	AVG	15.17	15.16	15.15	15.19	15.11	15.13	15.17	15.12
			PEAK	21.83	21.83	21.79	21.86	21.84	21.86	21.90	21.84
802.11g	2437	6	AVG	17.13	17.08	17.08	17.12	16.27	16.29	16.28	15.21
			PEAK	22.78	22.81	22.82	22.85	22.54	22.53	22.55	22.00
802.11g	2457	10	AVG	15.15	15.18	15.19	15.22	15.14	15.12	15.16	15.14
			PEAK	22.04	22.09	22.04	22.17	22.07	22.09	22.13	22.12
802.11g	2462	11	AVG	13.12	13.16	13.13	13.10	13.09	13.17	13.12	13.11
			PEAK	20.31	20.34	20.37	20.31	20.35	20.36	20.32	20.30



Table 6-4. 802.11g Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz 802.11n (2.4GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				7.2	14.4	21.7	28.9	43.4	57.8	65.0	72.2
802.11n	2412	1	AVG	10.95	10.91	10.94	10.92	10.94	10.95	10.93	10.99
			PEAK	18.39	18.42	18.35	18.39	18.38	18.40	18.43	18.44
802.11n	2417	2	AVG	13.14	13.12	13.09	13.09	13.13	13.16	13.11	13.18
			PEAK	20.32	20.37	20.42	20.31	20.34	20.36	20.28	20.38
802.11n	2422	3	AVG	14.23	14.22	14.19	14.19	14.18	14.23	14.27	14.18
			PEAK	21.17	21.15	21.17	21.26	21.27	21.23	21.15	21.25
802.11n	2437	6	AVG	17.13	16.31	16.31	16.28	15.43	15.34	14.26	13.19
			PEAK	22.79	22.49	22.47	22.47	22.00	22.01	21.32	20.47
802.11n	2457	10	AVG	14.28	14.27	14.24	14.25	14.30	14.28	14.23	14.24
			PEAK	21.52	21.57	21.49	21.57	21.62	21.61	21.50	21.56
802.11n	2462	11	AVG	12.00	11.95	11.96	11.98	12.02	12.03	11.96	11.99
			PEAK	19.57	19.63	19.57	19.61	19.64	19.56	19.53	19.60

Table 6-5. 20MHz BW 802.11n (2.4GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz 802.11n (2.4GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0
802.11n	2412	1	AVG	10.87	10.83	10.83	10.91	10.91	10.90	10.88	10.89
			PEAK	18.39	18.42	18.41	18.45	18.44	18.46	18.44	18.47
802.11n	2417	2	AVG	12.88	12.88	12.87	12.89	12.85	12.92	12.88	12.84
			PEAK	20.07	20.16	20.04	20.14	20.04	20.07	20.17	20.16
802.11n	2422	3	AVG	14.15	14.11	14.16	14.13	14.12	14.13	14.12	14.16
			PEAK	21.17	21.22	21.27	21.17	21.19	21.24	21.16	21.19
802.11n	2437	6	AVG	17.12	16.29	16.23	16.20	15.12	15.13	14.22	13.10
			PEAK	22.83	22.51	22.52	22.49	21.92	22.01	21.38	20.42
802.11n	2457	10	AVG	14.16	14.12	14.15	14.18	14.18	14.11	14.19	14.20
			PEAK	21.47	21.53	21.57	21.52	21.50	21.57	21.44	21.44
802.11n	2462	11	AVG	11.91	11.90	11.86	11.88	11.92	11.94	11.91	11.89
			PEAK	19.36	19.41	19.32	19.37	19.39	19.35	19.38	19.43

Table 6-6. 20MHz BW 802.11n (2.4GHz – 800ns GI) Conducted Output Power Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 25 of 81

6.4 Output Power Measurement – 802.11a/n/ac (5GHz)

§15.247(b)(3); RSS-210 [A8.4]

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	20.07	20.03	19.24	19.17	19.15	18.19	17.11	16.29
			PEAK	24.12	24.10	23.81	23.80	23.84	23.49	23.02	22.63
802.11a	5765	153	AVG	20.07	20.13	19.07	19.14	19.09	18.07	17.07	16.25
			PEAK	24.05	24.05	23.72	23.82	23.78	23.41	23.01	22.56
802.11a	5785	157	AVG	20.09	20.13	19.11	19.13	19.06	18.01	16.98	16.11
			PEAK	24.02	24.02	23.72	23.71	23.72	23.43	22.92	22.45
802.11a	5805	161	AVG	20.07	20.10	19.06	19.09	19.08	18.13	17.11	16.12
			PEAK	24.01	24.04	23.71	23.74	23.73	23.42	22.96	22.51
802.11a	5825	165	AVG	20.02	20.01	19.05	19.08	19.09	18.03	17.01	16.05
			PEAK	24.01	24.02	23.73	23.75	23.72	23.37	22.95	22.47



Table 6-7. 802.11a Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				7.2	14.4	21.7	28.9	43.4	57.8	65.0	72.2
802.11n	5745	149	AVG	19.23	19.34	19.32	19.16	18.26	17.14	16.20	15.23
			PEAK	24.44	24.49	24.49	24.47	24.13	23.64	23.03	22.35
802.11n	5765	153	AVG	19.28	19.26	19.23	19.20	18.19	17.05	16.15	15.18
			PEAK	24.42	24.48	24.49	24.38	24.07	23.51	22.97	22.24
802.11n	5785	157	AVG	19.17	19.18	19.24	19.22	18.08	16.96	16.15	15.11
			PEAK	24.35	24.36	24.40	24.40	23.98	23.41	22.93	22.25
802.11n	5805	161	AVG	19.23	19.22	19.23	19.21	18.26	17.05	16.25	15.28
			PEAK	24.30	24.34	24.32	24.30	24.01	23.43	22.97	22.31
802.11n	5825	165	AVG	19.25	19.26	19.23	19.22	18.21	17.01	16.26	15.26
			PEAK	24.32	24.35	24.32	24.31	23.98	23.40	22.99	22.27

Table 6-8. 20MHz BW 802.11n (5GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13.0	19.5	26.0	39.0	52.0	58.5	65.0
802.11n	5745	149	AVG	19.00	19.13	19.14	19.04	18.06	17.04	16.18	15.13
			PEAK	24.20	24.24	24.26	24.18	23.92	23.46	22.92	22.22
802.11n	5765	153	AVG	19.08	19.04	19.02	19.02	18.09	17.00	16.11	15.12
			PEAK	24.04	24.06	24.08	24.07	23.78	23.31	22.87	22.29
802.11n	5785	157	AVG	19.14	19.07	18.99	19.08	18.09	16.84	16.05	15.08
			PEAK	24.16	24.16	24.15	24.21	23.88	23.32	22.86	22.11
802.11n	5805	161	AVG	19.15	19.13	19.14	19.07	18.19	16.95	16.14	15.06
			PEAK	24.37	24.35	24.41	24.39	24.08	23.46	22.90	22.15
802.11n	5825	165	AVG	19.14	19.06	19.17	19.15	18.15	16.95	16.03	15.08
			PEAK	24.32	24.27	24.27	24.28	23.90	23.39	22.75	22.12

Table 6-9. 20MHz BW 802.11n (5GHz – 800ns GI) Conducted Output Power Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 26 of 81

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac	5745	149	AVG	18.90	18.98	18.94	18.98	18.02	17.01	15.98	14.92	13.93
			PEAK	23.75	23.72	23.69	23.82	23.52	23.19	22.64	21.97	21.28
802.11ac	5765	153	AVG	18.88	18.94	18.95	19.02	17.99	17.02	15.98	14.88	13.94
			PEAK	23.79	23.74	23.72	23.83	23.52	23.25	22.67	21.94	21.30
802.11ac	5785	157	AVG	18.94	18.94	18.99	18.99	18.00	16.98	16.02	14.90	13.93
			PEAK	23.77	23.67	23.65	23.87	23.48	23.14	22.69	21.92	21.31
802.11ac	5805	161	AVG	18.87	18.99	18.93	18.96	18.03	17.00	15.98	14.93	13.97
			PEAK	23.78	23.67	23.68	23.86	23.58	23.14	22.68	22.03	21.29
802.11ac	5825	165	AVG	18.87	19.00	18.93	18.94	18.06	17.06	15.94	14.89	13.92
			PEAK	23.80	23.73	23.67	23.81	23.58	23.14	22.58	21.93	21.25

Table 6-10. 20MHz BW 802.11ac (5GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]								
				Data Rate [Mbps]								
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac	5745	149	AVG	18.94	18.97	18.90	18.99	18.00	17.06	15.97	14.91	13.95
			PEAK	23.80	23.79	23.76	23.75	23.51	23.26	22.59	21.96	21.33
802.11ac	5765	153	AVG	18.95	19.02	18.91	19.03	18.04	17.02	15.97	14.90	13.91
			PEAK	23.69	23.78	23.62	23.76	23.47	23.22	22.69	21.99	21.24
802.11ac	5785	157	AVG	18.92	18.95	18.96	18.99	18.00	16.97	16.00	14.97	13.89
			PEAK	23.78	23.75	23.64	23.80	23.58	23.15	22.63	21.97	21.29
802.11ac	5805	161	AVG	18.87	18.99	18.96	18.97	17.98	17.02	15.94	14.89	13.93
			PEAK	23.81	23.72	23.68	23.78	23.59	23.13	22.68	22.00	21.28
802.11ac	5825	165	AVG	18.90	18.95	18.99	19.03	18.06	17.05	15.95	14.97	13.96
			PEAK	23.73	23.69	23.65	23.76	23.56	23.23	22.64	21.96	21.27



Table 6-11. 20MHz BW 802.11ac (5GHz – 800ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz - 400ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0
802.11n	5755	151	AVG	18.72	18.69	18.56	18.63	17.63	16.72	15.53	14.47
			PEAK	23.78	23.73	23.70	23.70	23.32	22.87	22.12	21.43
802.11n	5775	155	AVG	18.72	18.67	18.72	18.69	17.60	16.67	15.65	14.32
			PEAK	23.74	23.71	23.76	23.74	23.22	22.74	22.23	21.29
802.11n	5795	159	AVG	18.69	18.67	18.71	18.57	17.67	16.71	15.51	14.43
			PEAK	23.73	23.74	23.74	23.67	23.30	22.85	22.14	21.40
802.11n	5815	163	AVG	18.57	18.73	18.72	18.70	17.64	16.69	15.67	14.38
			PEAK	23.66	23.77	23.76	23.76	23.29	22.84	22.19	21.40

Table 6-12. 40MHz BW 802.11n (5GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz - 800ns GI) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0
802.11n	5755	151	AVG	18.55	18.54	18.54	18.55	17.65	16.63	15.48	14.52
			PEAK	23.69	23.67	23.73	23.73	23.30	22.76	22.06	21.47
802.11n	5775	155	AVG	18.58	18.59	18.55	18.58	17.64	16.72	15.56	14.37
			PEAK	23.70	23.70	23.69	23.71	23.33	22.84	22.07	21.36
802.11n	5795	159	AVG	18.71	18.73	18.74	18.52	17.63	16.68	15.62	14.38
			PEAK	23.76	23.73	23.74	23.68	23.30	22.77	22.13	21.37
802.11n	5815	163	AVG	18.66	18.69	18.67	18.64	17.70	16.62	15.64	14.31
			PEAK	23.69	23.73	23.72	23.74	23.34	22.79	22.21	21.25

Table 6-13. 40MHz BW 802.11n (5GHz – 800ns GI) Conducted Output Power Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 27 of 81

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				15.0	30.0	45.0	60.0	90.0	120.0	135.0	150.0	MCS8	MCS9
802.11ac	5755	151	AVG	17.72	17.73	17.76	17.78	16.57	15.49	14.58	13.59	12.65	10.86
			PEAK	23.42	23.34	23.42	23.41	22.85	22.42	22.01	21.61	20.55	18.61
802.11ac	5775	155	AVG	17.73	17.73	17.80	17.79	16.58	15.55	14.55	13.59	12.68	10.85
			PEAK	23.36	23.38	23.37	23.38	22.82	22.42	22.02	21.65	20.48	18.72
802.11ac	5795	159	AVG	17.70	17.71	17.81	17.83	16.58	15.52	14.55	13.63	12.63	10.85
			PEAK	23.34	23.45	23.46	23.46	22.79	22.53	21.93	21.72	20.61	18.66
802.11ac	5815	163	AVG	17.77	17.75	17.73	17.75	16.56	15.54	14.62	13.65	12.70	10.85
			PEAK	23.48	23.29	23.39	23.42	22.92	22.51	21.94	21.62	20.49	18.57

Table 6-14. 40MHz BW 802.11ac (5GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				13.5	27.0	40.5	54.0	81.0	108.0	121.5	135.0	MCS8	MCS9
802.11ac	5755	151	AVG	17.87	17.95	17.87	17.85	16.78	15.69	14.78	13.72	12.76	11.96
			PEAK	24.09	24.25	24.11	24.04	23.60	23.14	23.15	22.06	21.70	21.02
802.11ac	5775	155	AVG	17.83	17.86	17.84	17.85	16.82	15.68	14.78	13.64	12.68	11.93
			PEAK	24.05	24.09	24.00	24.02	23.63	23.10	23.11	22.01	21.73	21.05
802.11ac	5795	159	AVG	17.88	17.93	17.90	17.84	16.70	15.69	14.76	13.76	12.81	11.98
			PEAK	24.05	23.98	24.04	24.07	23.59	23.04	23.19	22.09	21.64	21.07
802.11ac	5815	163	AVG	17.82	17.76	17.76	17.85	16.80	15.63	14.78	13.66	12.79	11.89
			PEAK	24.01	24.01	24.07	23.96	23.50	23.14	23.14	22.06	21.69	20.98

Table 6-15. 40MHz BW 802.11ac (5GHz – 800ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 400ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				32.5	65	97.5	130	195	260	292.5	325	MCS8	MCS9
802.11ac	5775	155	AVG	17.67	17.31	16.89	16.61	15.44	14.38	13.53	12.60	11.46	9.72
			PEAK	26.19	25.76	25.90	26.40	24.89	23.77	22.89	21.90	20.49	18.99
802.11ac	5795	159	AVG	17.59	17.19	17.01	16.63	15.32	14.27	13.69	12.56	11.50	9.59
			PEAK	26.07	25.98	26.02	26.36	25.08	23.69	22.91	21.97	20.63	18.89

Table 6-16. 80MHz BW 802.11ac (5GHz – 400ns GI) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz - 800ns GI) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	MCS8	MCS9
802.11ac	5775	155	AVG	17.55	17.20	16.87	16.53	15.36	14.31	13.56	12.46	11.47	9.61
			PEAK	26.12	25.81	25.92	26.23	24.92	23.72	22.88	21.82	20.49	18.89
802.11ac	5795	159	AVG	17.53	17.10	16.81	16.59	15.38	14.24	13.55	12.37	11.42	9.66
			PEAK	26.22	25.67	25.86	26.22	24.91	23.79	22.93	21.79	20.46	18.80

Table 6-17. 80MHz BW 802.11ac (5GHz – 800ns GI) Conducted Output Power Measurements

6.5 Power Spectral Density (802.11a/b/g/n/ac) §15.247(e); RSS-210 [A8.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

KDB 558074 v03r01 – Section 10.2 Method PKPSD

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-4. Test Instrument & Measurement Setup



Test Notes


None

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 29 of 81	


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	1.44	8.000	-6.56	Pass
2437	6	b	1	2.96	8.000	-5.04	Pass
2462	11	b	1	1.84	8.000	-6.16	Pass
2412	1	g	6	-7.16	8.000	-15.16	Pass
2437	6	g	6	-1.69	8.000	-9.69	Pass
2462	11	g	6	-5.00	8.000	-13.00	Pass
2412	1	n	6.5/7.2 (MCS0)	-8.32	8.000	-16.32	Pass
2437	6	n	6.5/7.2 (MCS0)	-2.00	8.000	-10.00	Pass
2462	11	n	6.5/7.2 (MCS0)	-7.56	8.000	-15.56	Pass
5745	149	a	6	1.44	8.000	-6.56	Pass
5785	157	a	6	0.80	8.000	-7.20	Pass
5825	165	a	6	0.82	8.000	-7.18	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-0.49	8.000	-8.49	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.82	8.000	-8.82	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-0.32	8.000	-8.32	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-2.62	8.000	-10.62	Pass
5775	155	n (40MHz)	13.5/15 (MCS0)	-2.90	8.000	-10.90	Pass
5815	163	n (40MHz)	13.5/15 (MCS0)	-3.39	8.000	-11.39	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-6.38	8.000	-14.38	Pass
5795	159	ac (80MHz)	29.3/32.5 (MCS0)	-6.45	8.000	-14.45	Pass

Table 6-18. Conducted Power Density Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 30 of 81	

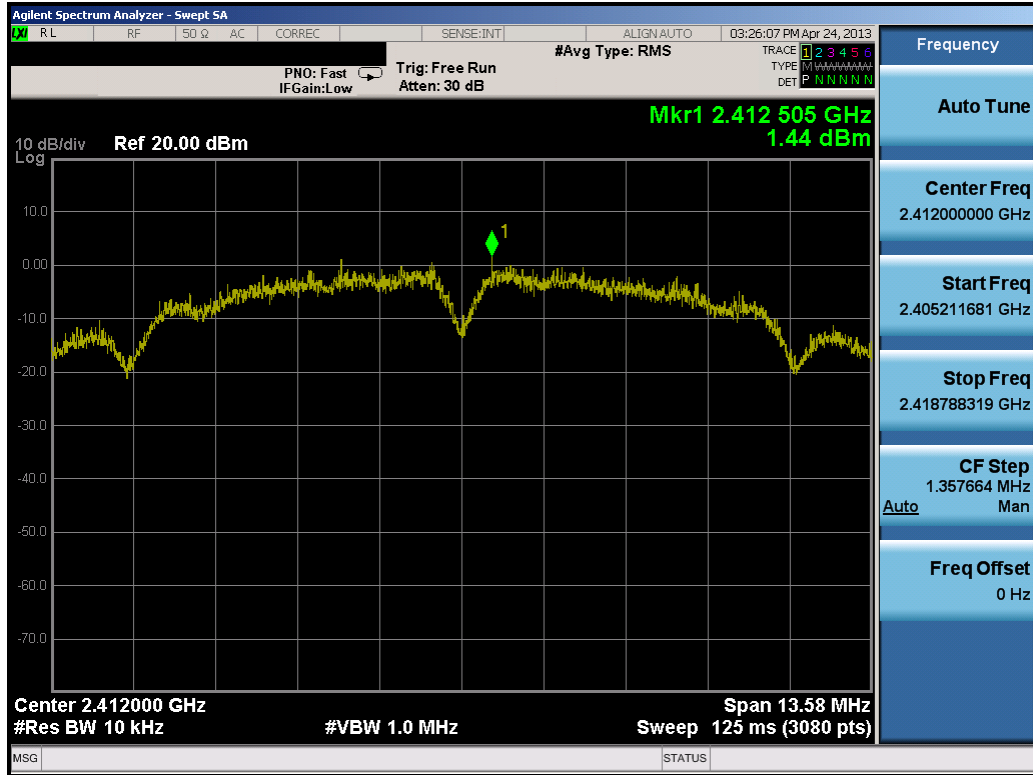


Plot 6-21. Power Spectral Density Plot (802.11b – Ch. 1)

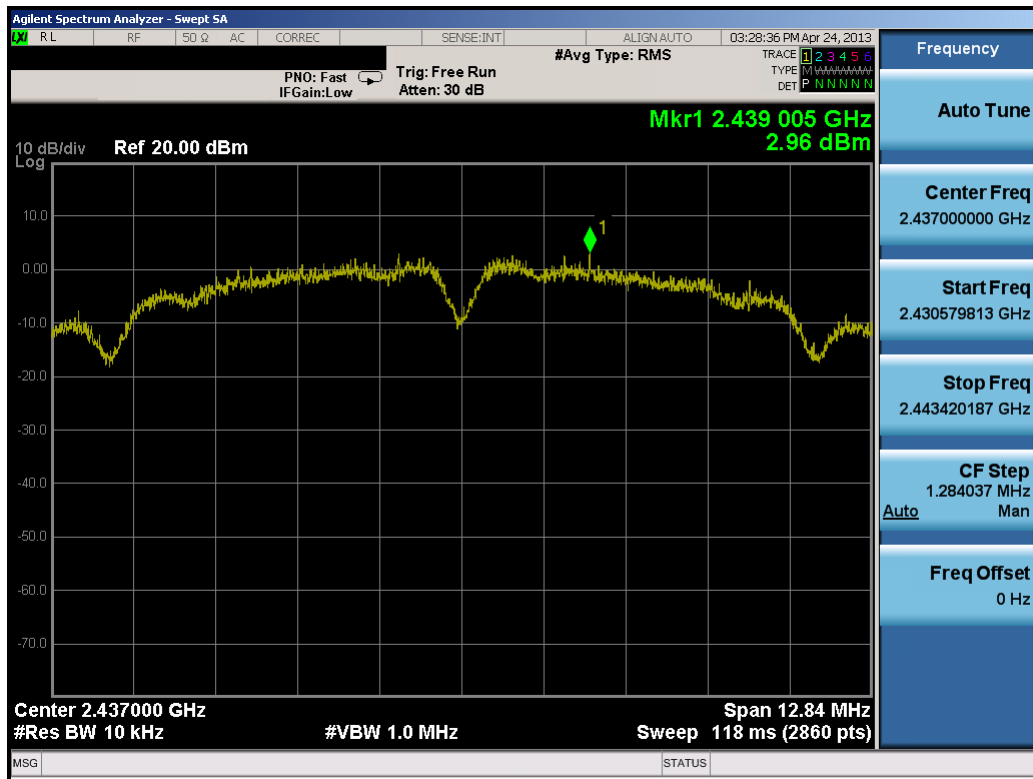


Plot 6-22. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 31 of 81

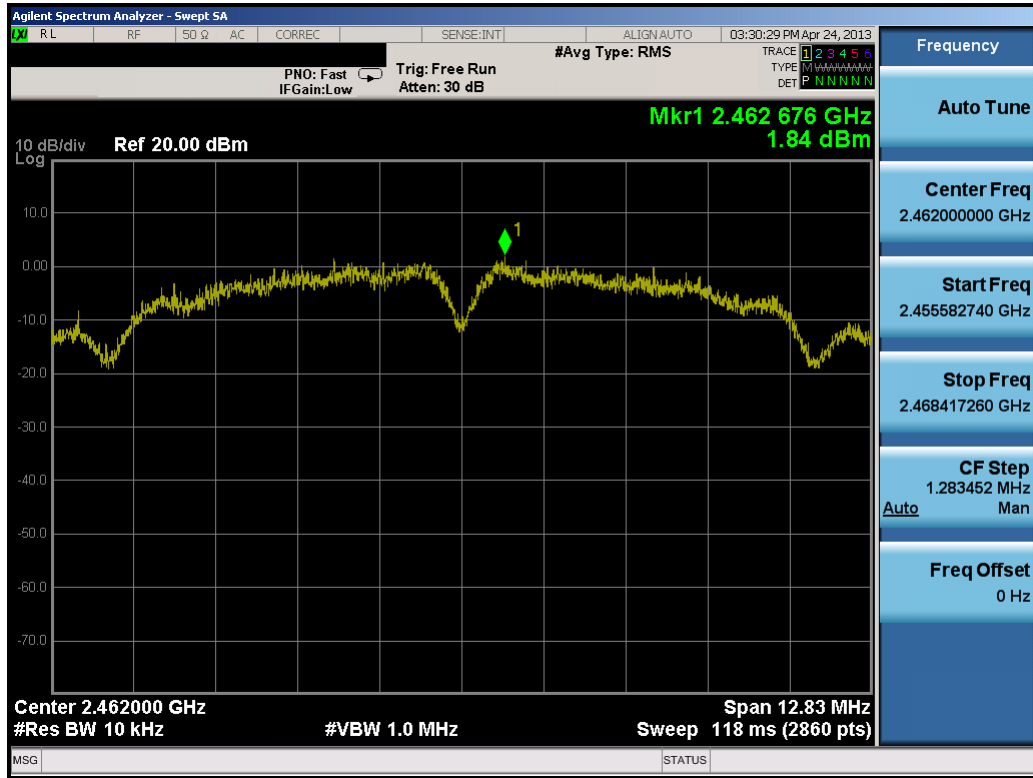


Plot 6-23. Power Spectral Density Plot (802.11b – Ch. 11)

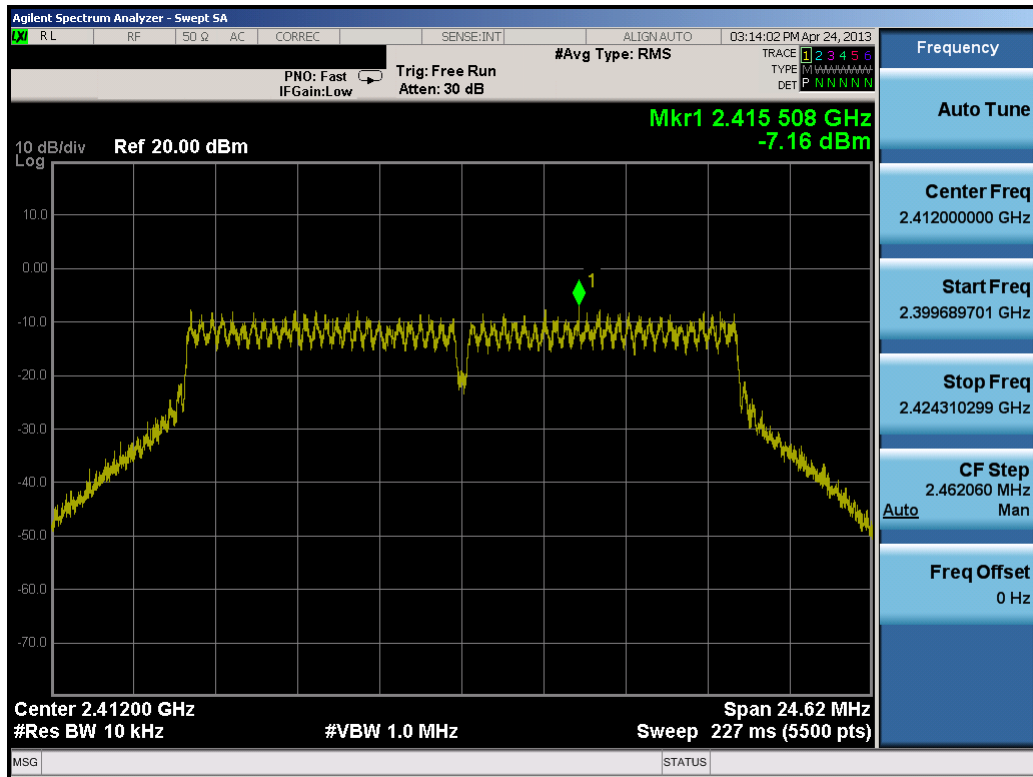


Plot 6-24. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 32 of 81

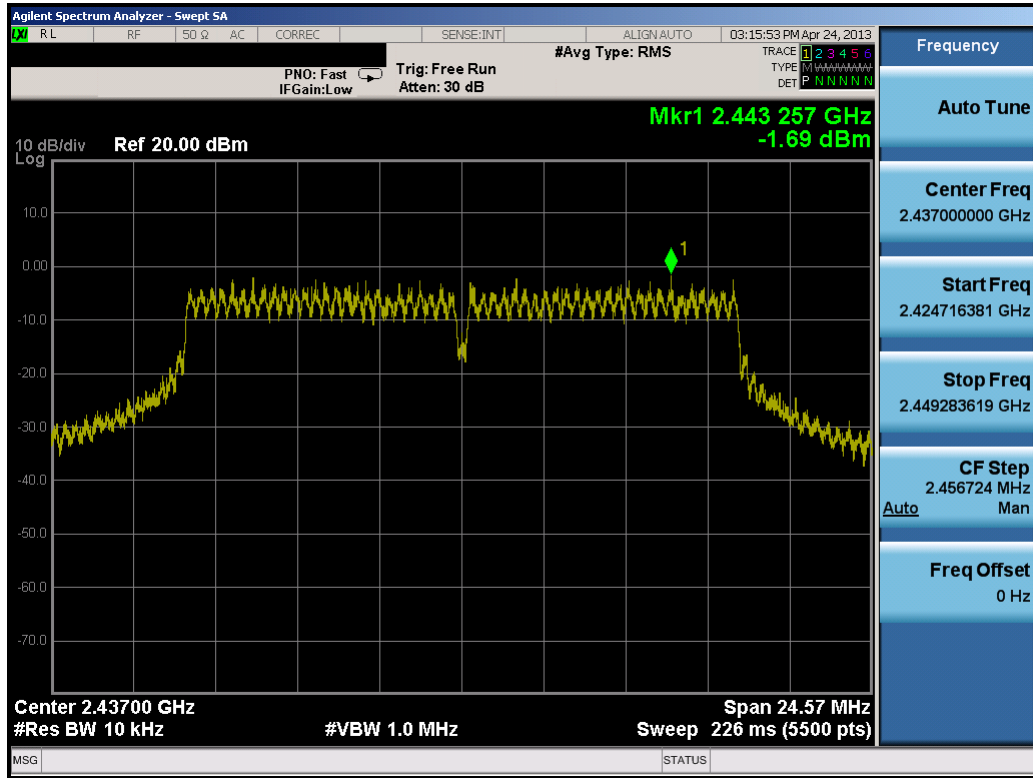


Plot 6-25. Power Spectral Density Plot (802.11g – Ch. 6)

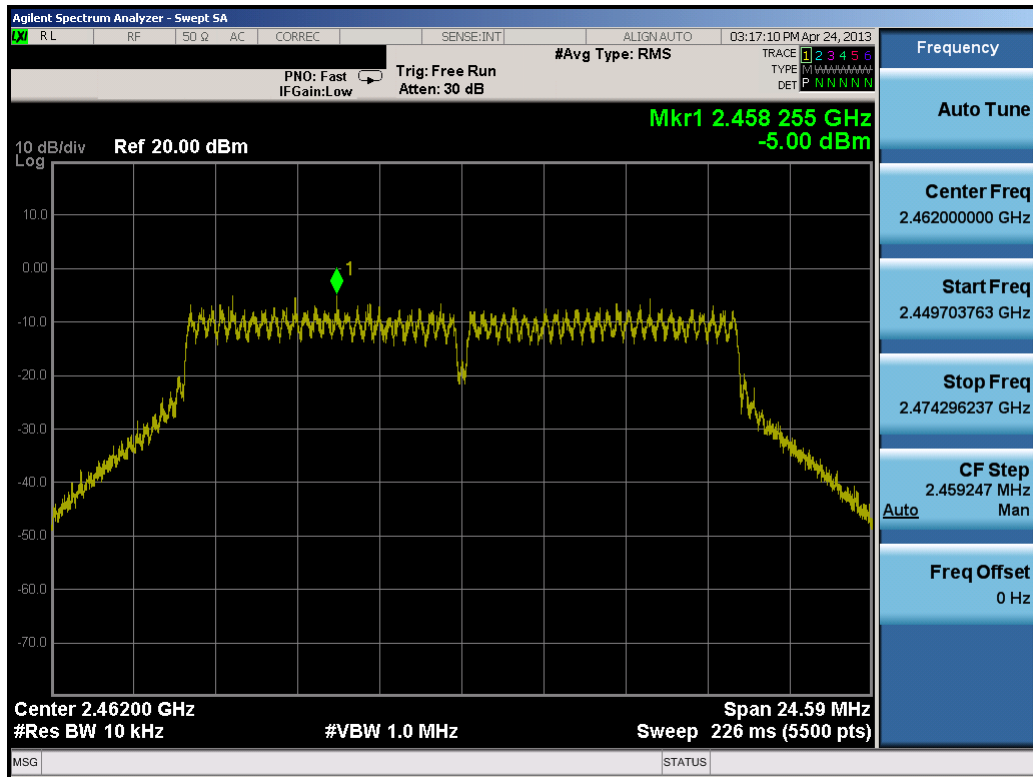


Plot 6-26. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 33 of 81

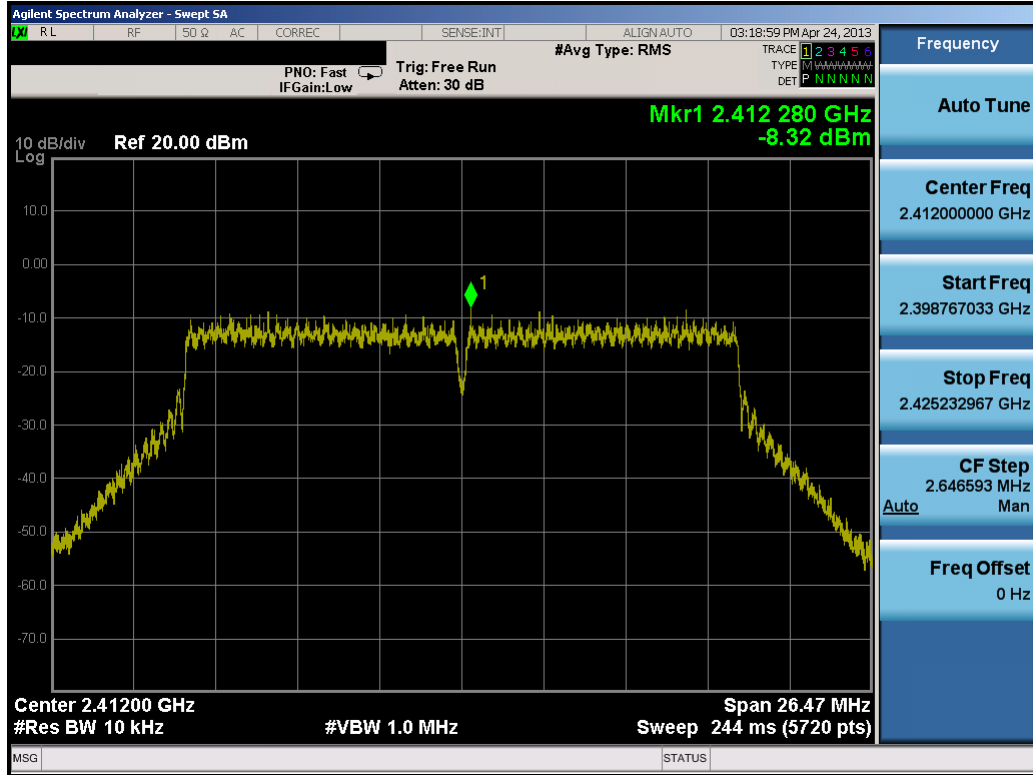


Plot 6-27. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

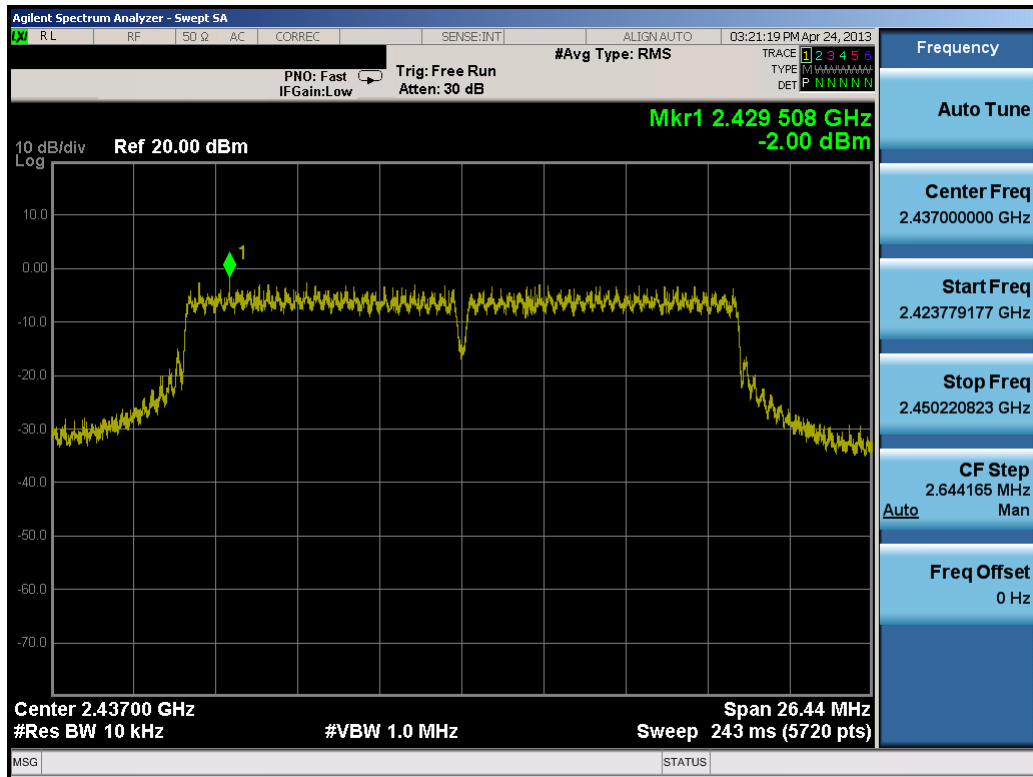


Plot 6-28. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 34 of 81

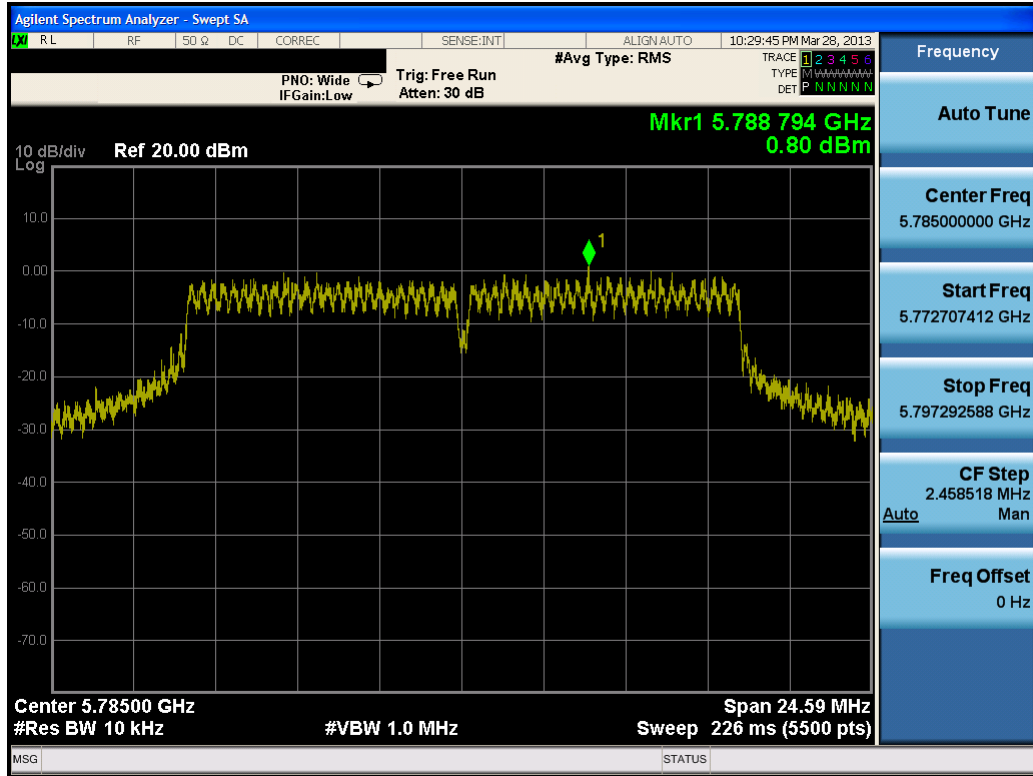


Plot 6-31. Power Spectral Density Plot (802.11a – Ch. 157)

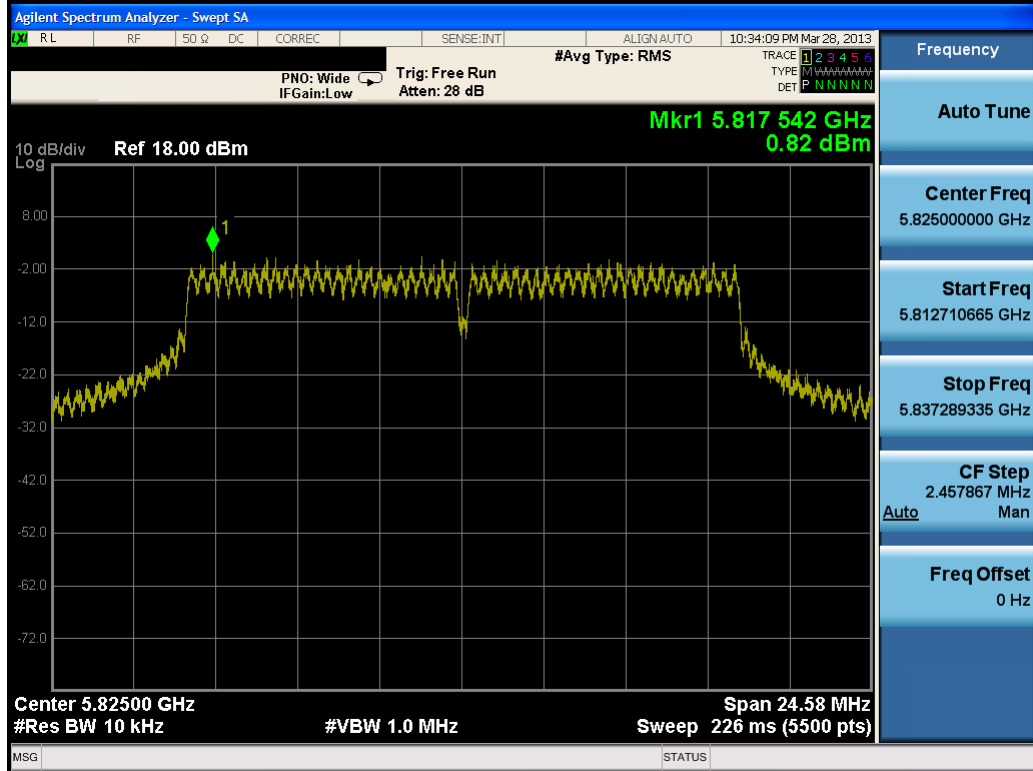


Plot 6-32. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 36 of 81

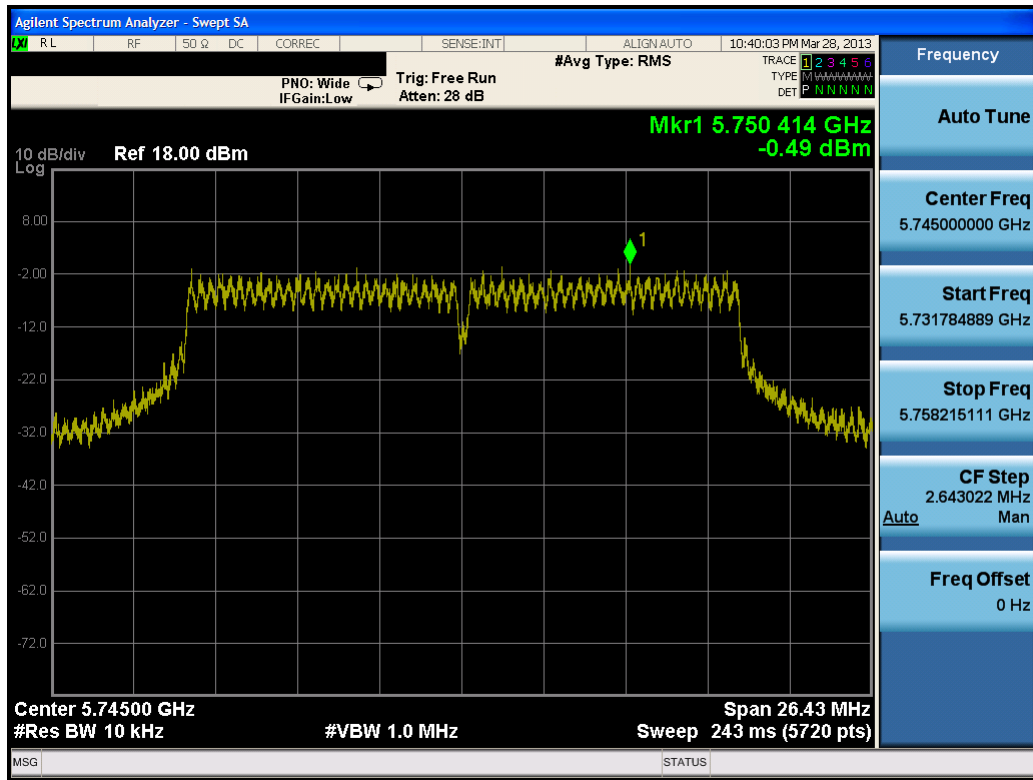


Plot 6-33. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

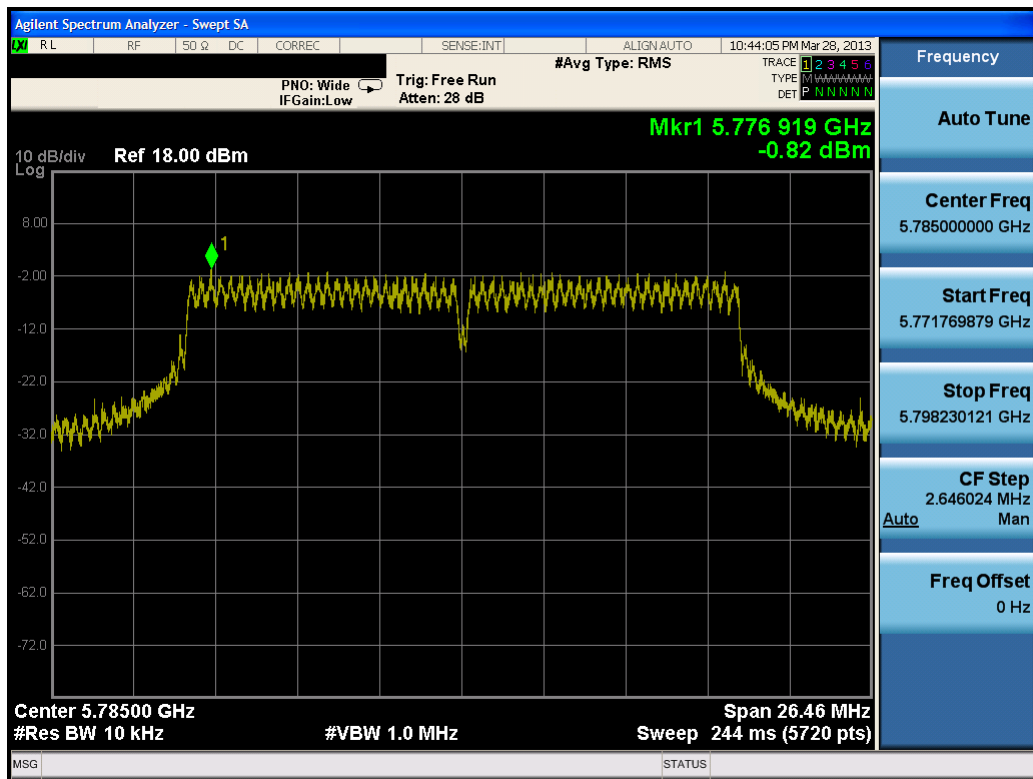


Plot 6-34. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 37 of 81

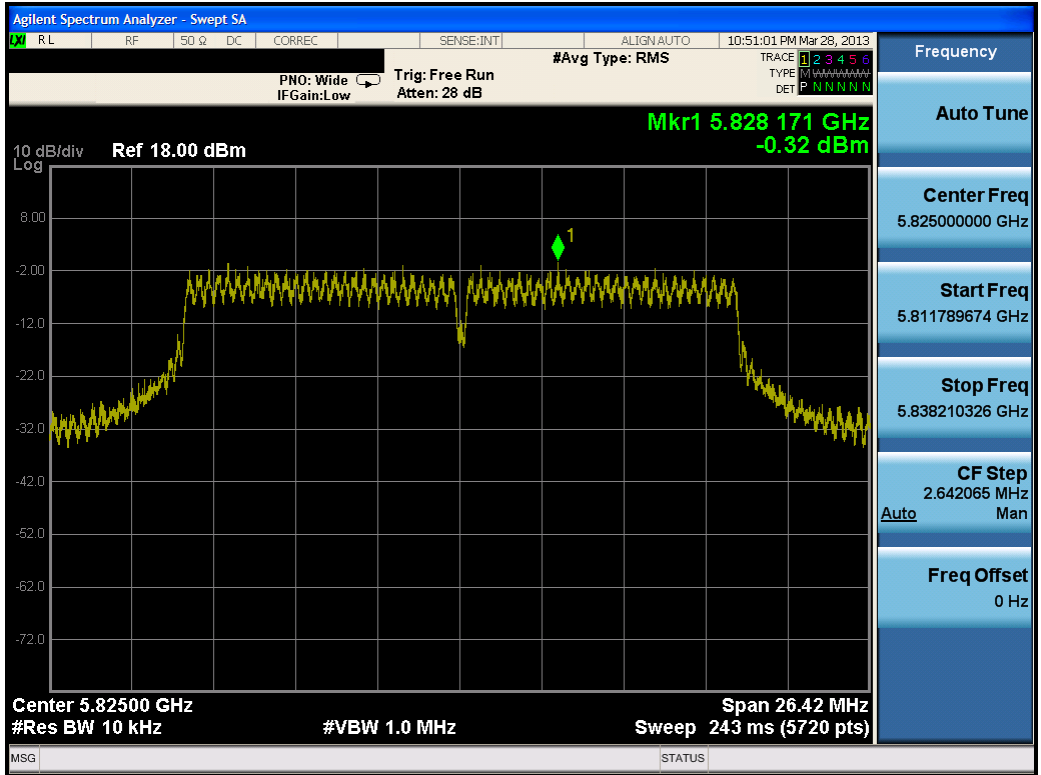


Plot 6-35. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

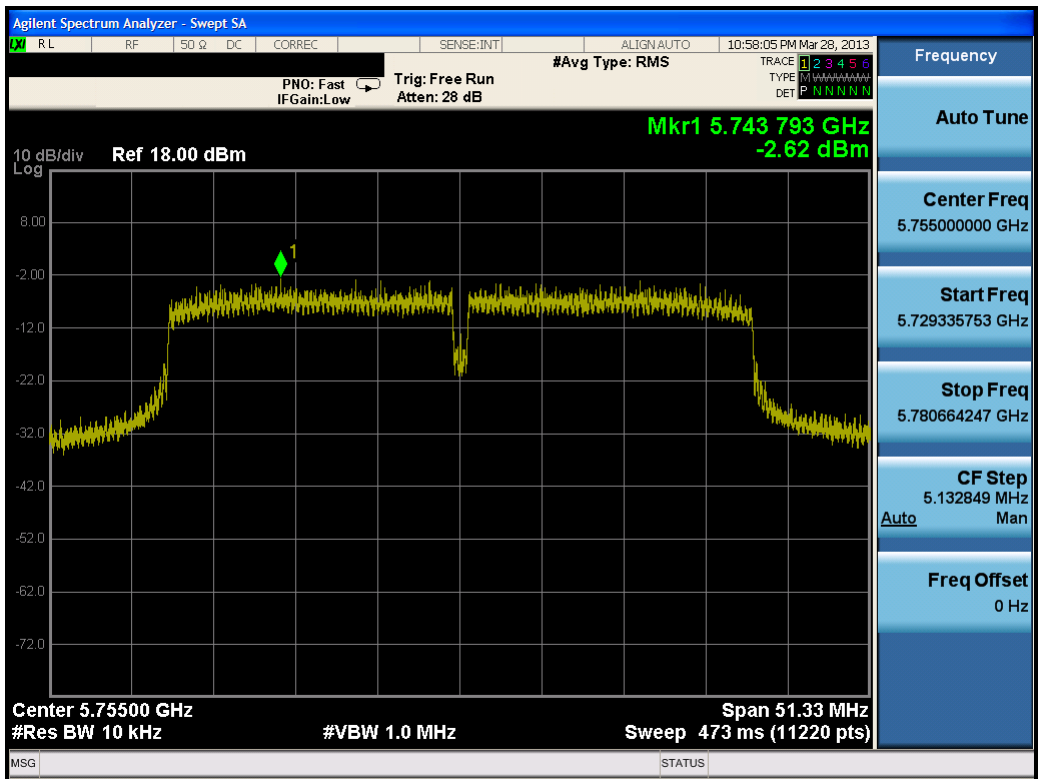


Plot 6-36. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 38 of 81

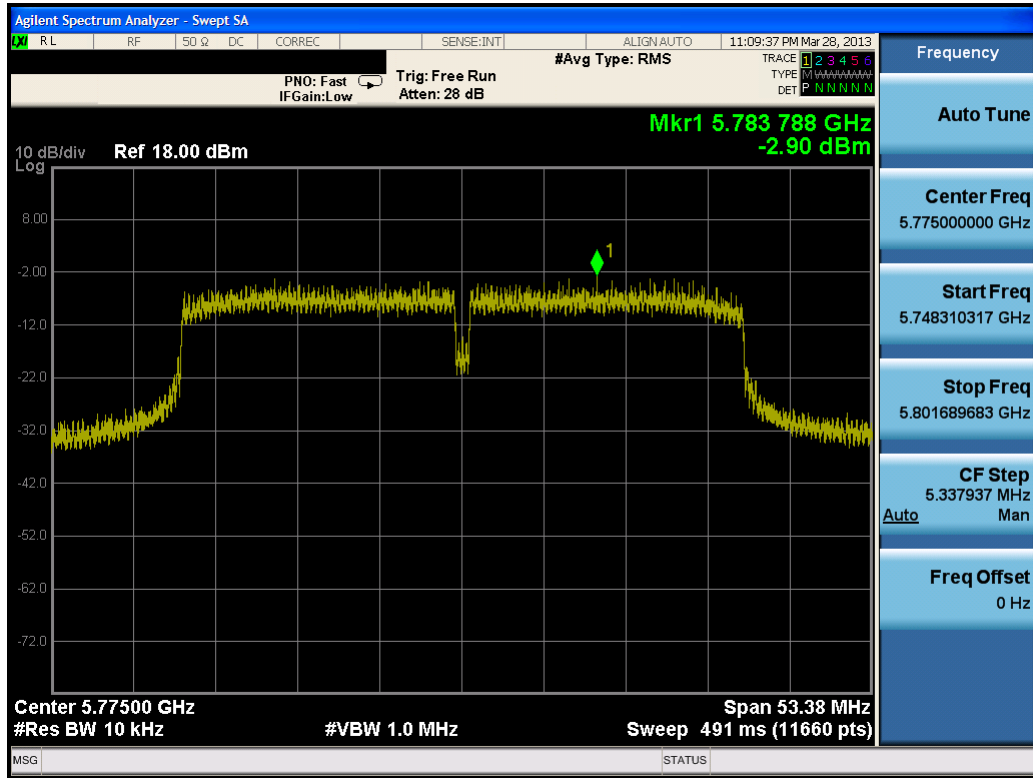


Plot 6-37. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

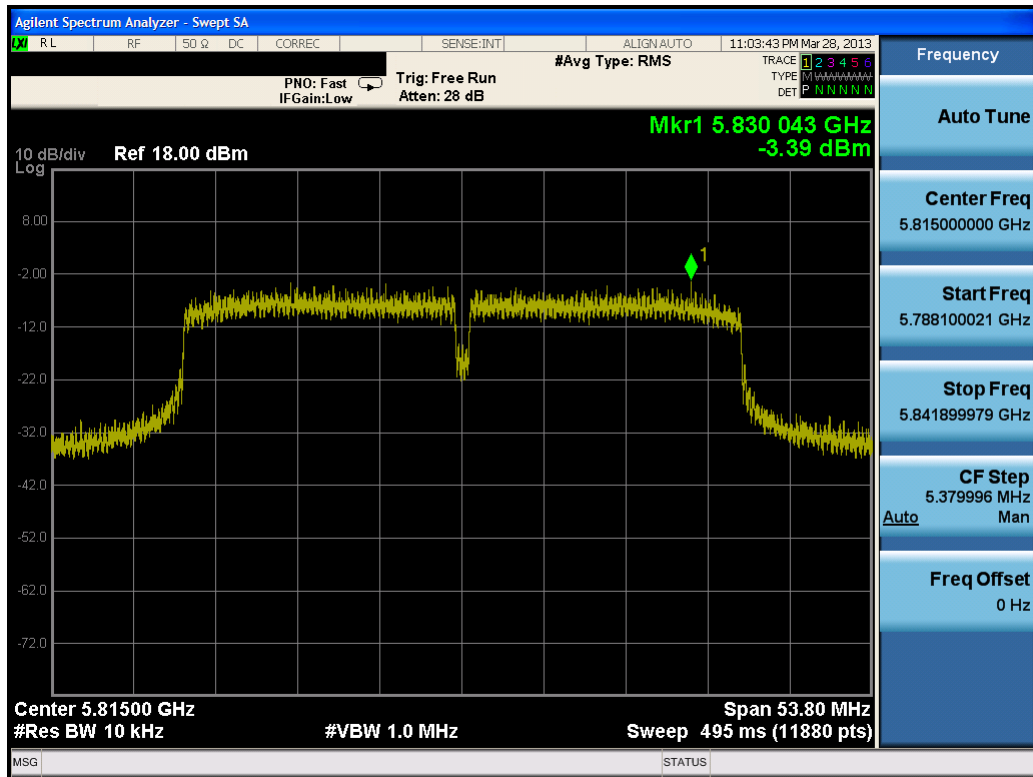


Plot 6-38. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 163)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 39 of 81

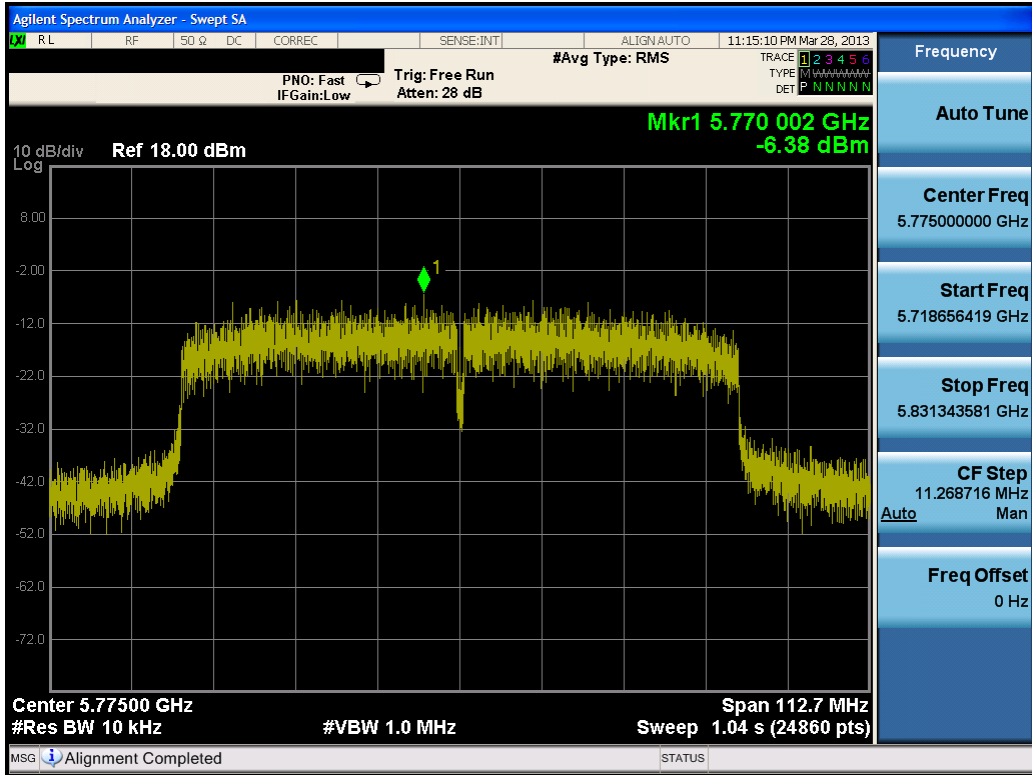

Plot 6-39. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

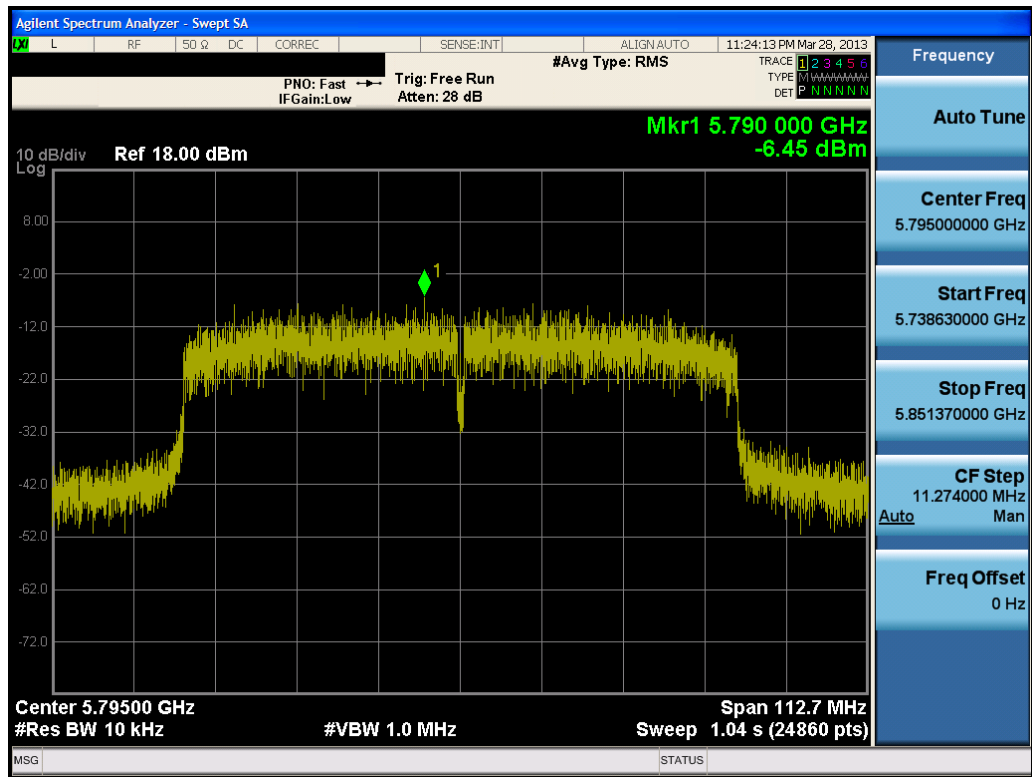

Plot 6-40. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 159)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 40 of 81

6.6 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, 6.5/7.2Mbps for 20MHz BW “n” mode, 13.5/15Mbps for 40MHz “n”, and 29.3/32.5Mbps for 80MHz “ac” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).

Test Procedure Used

KDB 558074 v03r01 – Section 11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




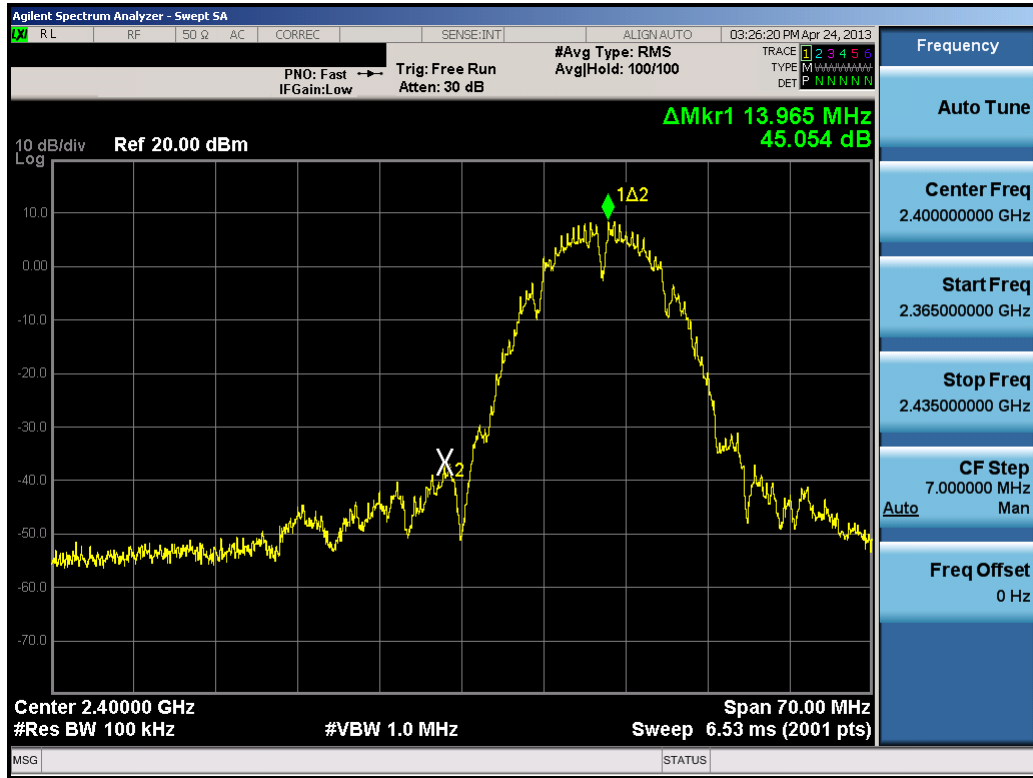


Figure 6-5. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 41 of 81	




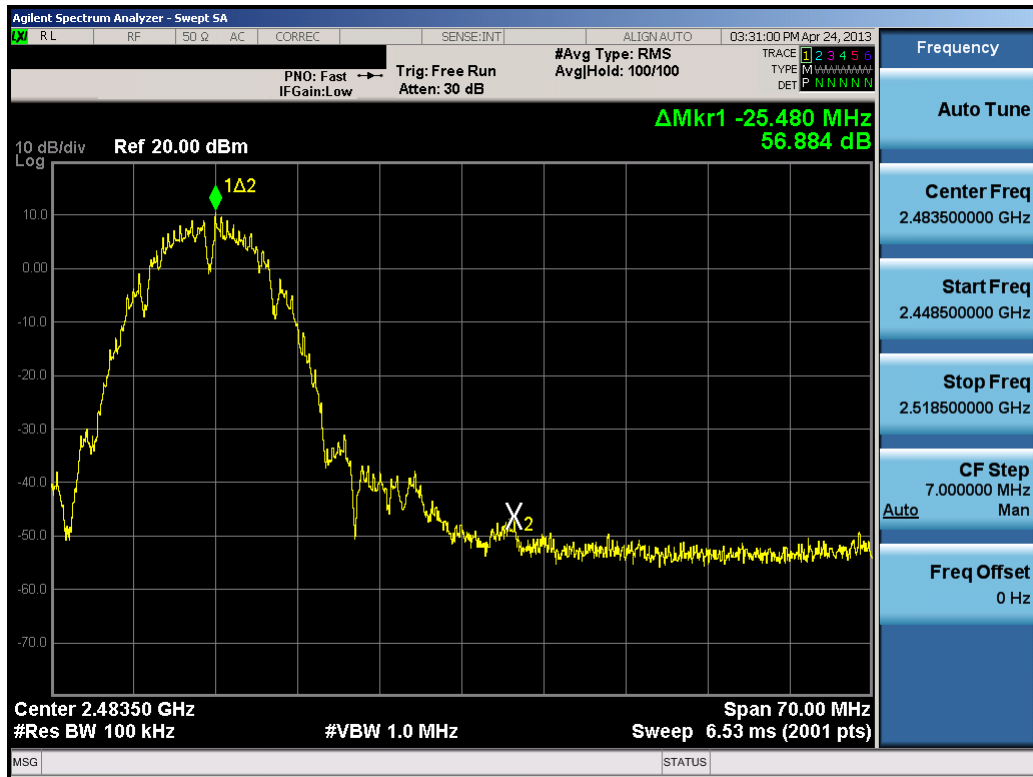Plot 6-41. Band Edge Plot (802.11b – Ch. 1)




Plot 6-42. Band Edge Plot (802.11b – Ch. 11)

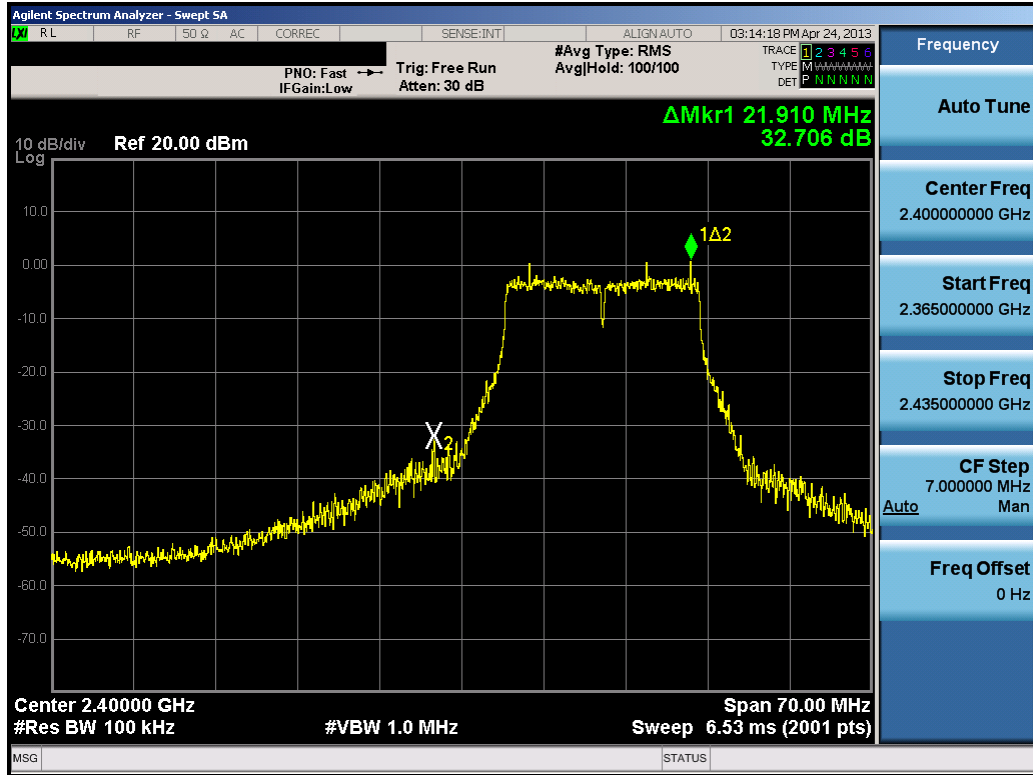

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 42 of 81

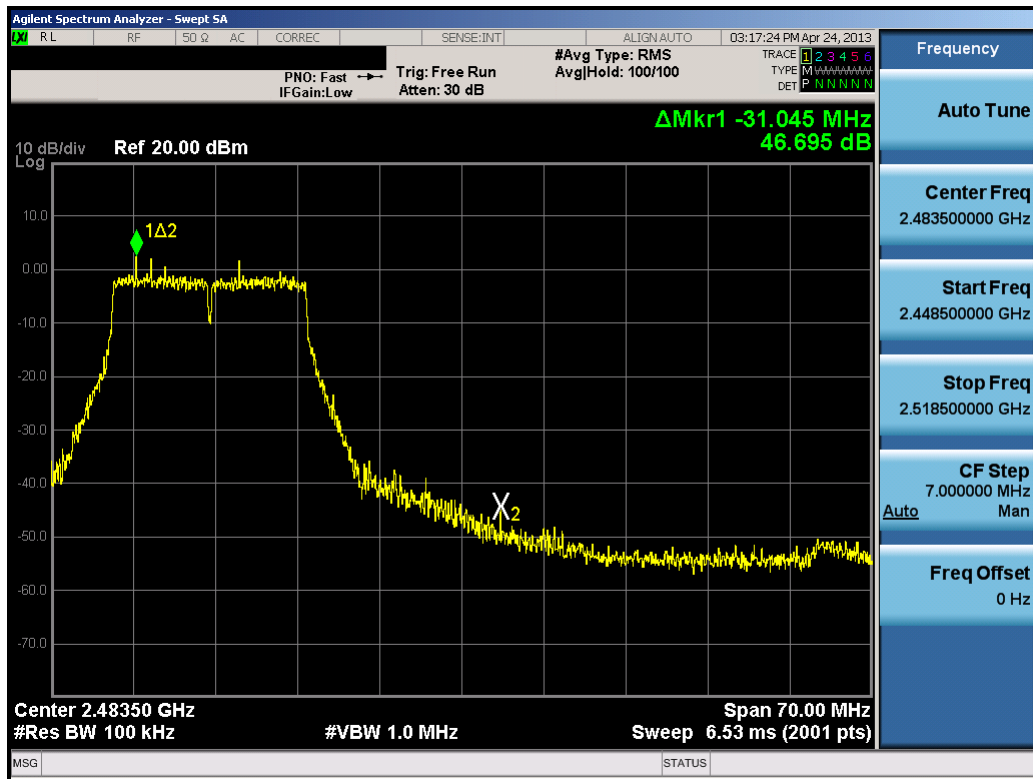


Plot 6-43. Band Edge Plot (802.11g– Ch. 1)




Plot 6-44. Band Edge Plot (802.11g – Ch. 11)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 43 of 81

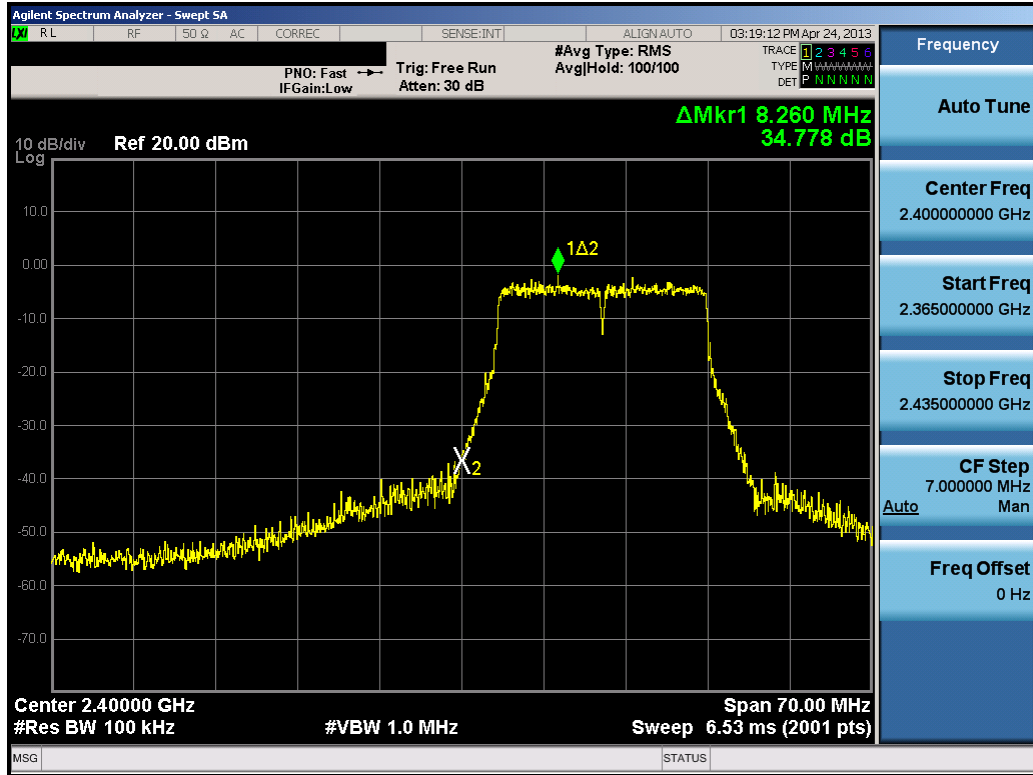


Plot 6-45. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

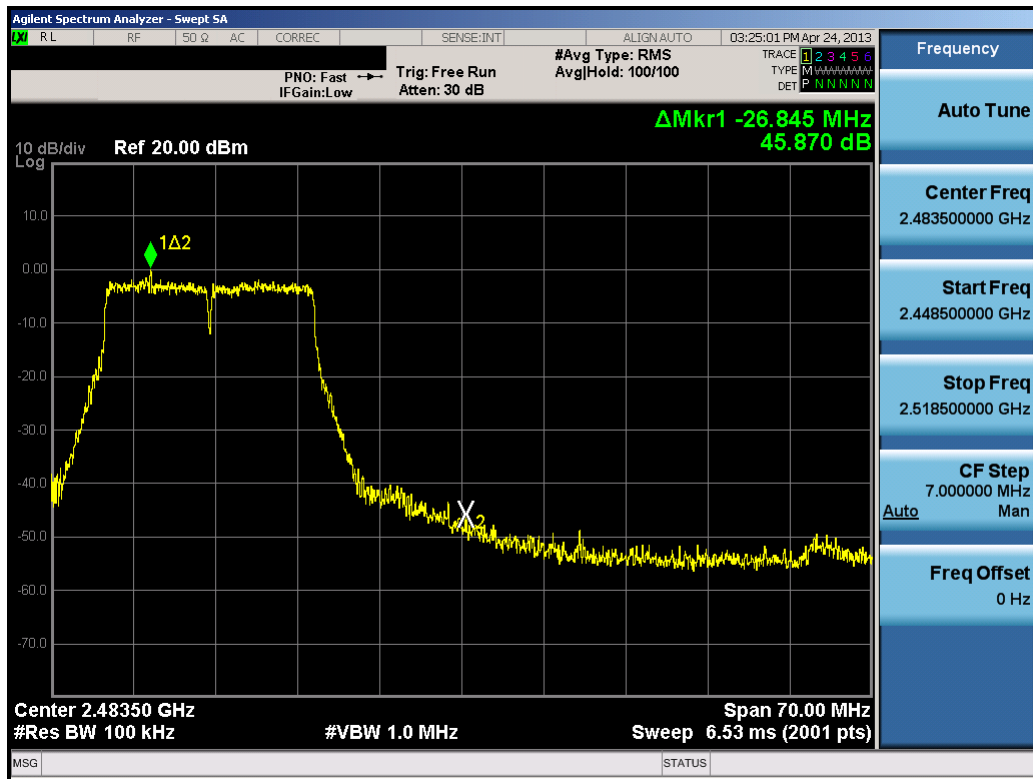


Plot 6-46. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 44 of 81

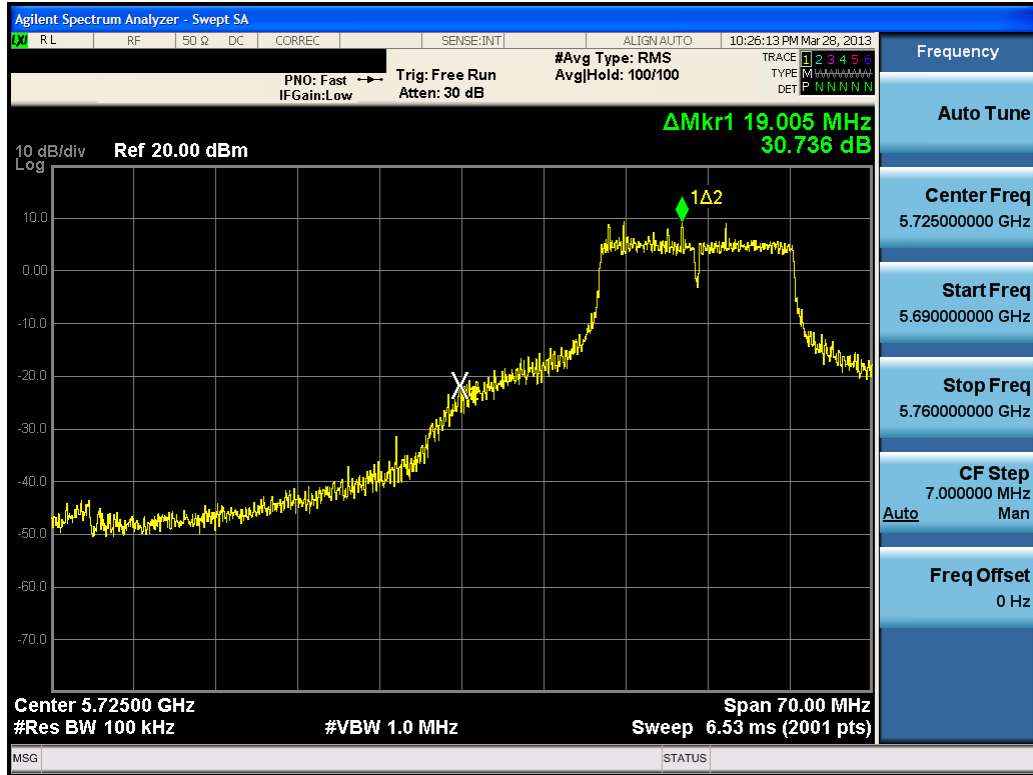


Plot 6-47. Band Edge Plot (802.11a – Ch. 149)

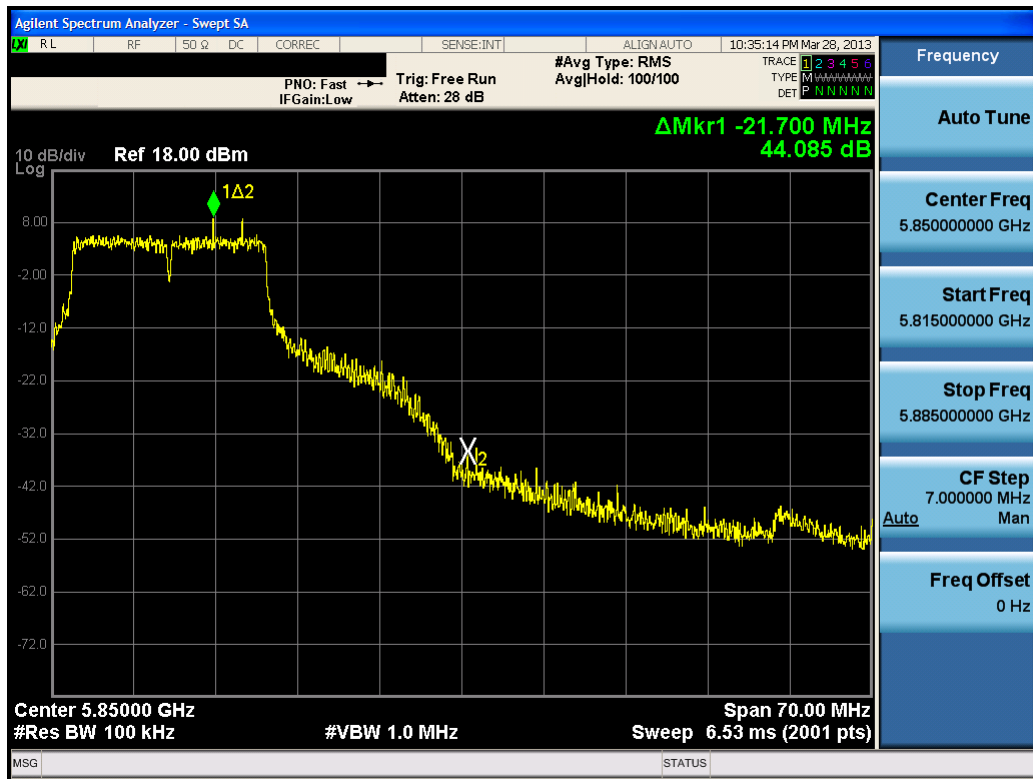


Plot 6-48. Band Edge Plot (802.11a – Ch. 165)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 45 of 81

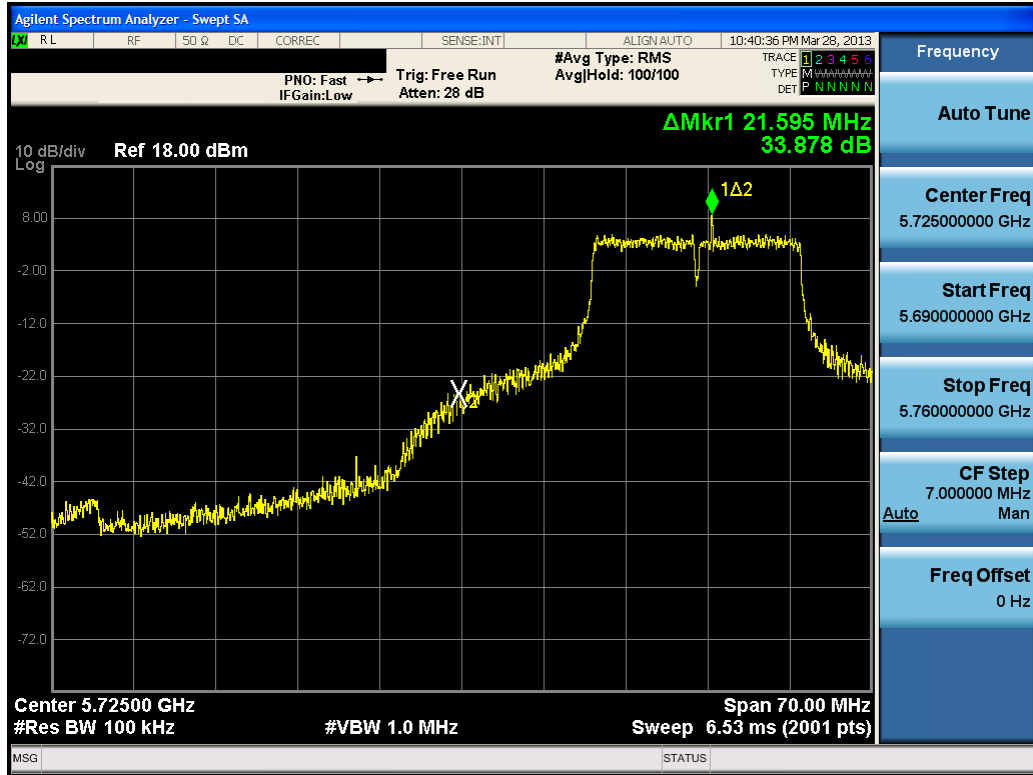


Plot 6-49. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

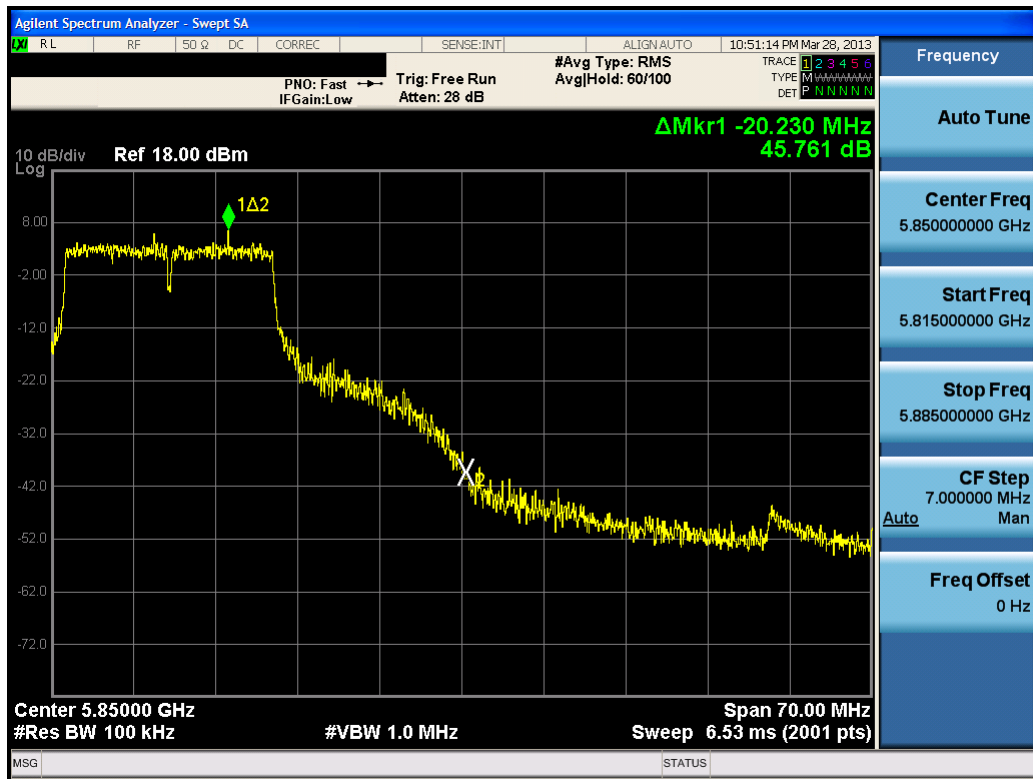


Plot 6-50. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 46 of 81

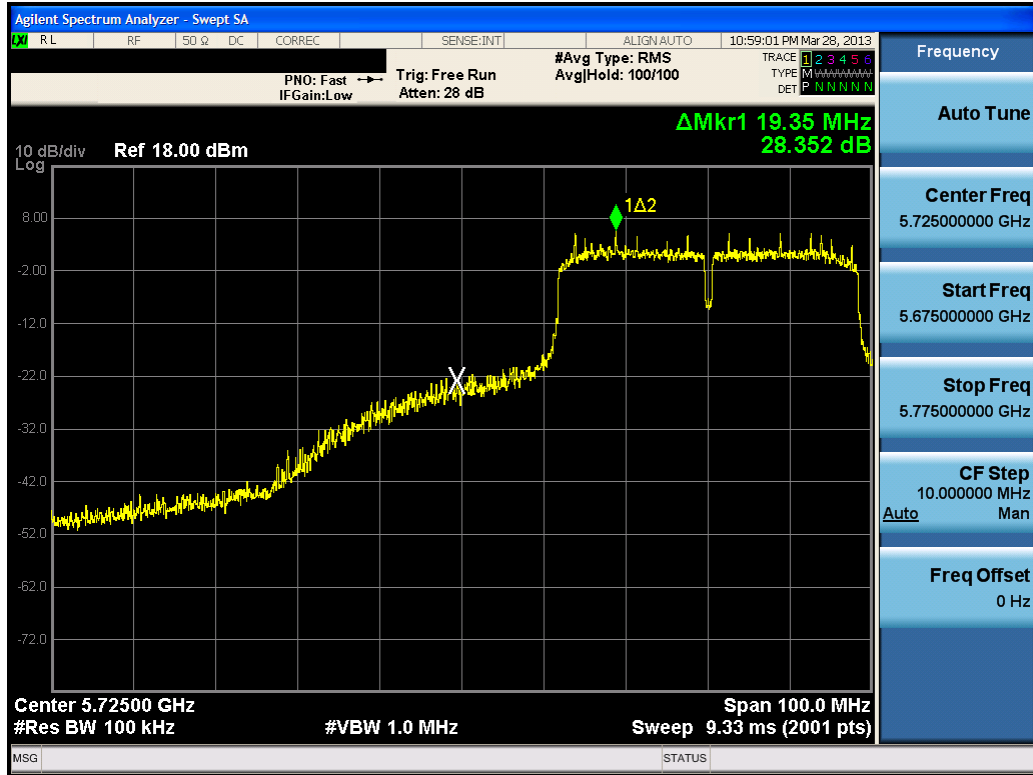


Plot 6-51. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

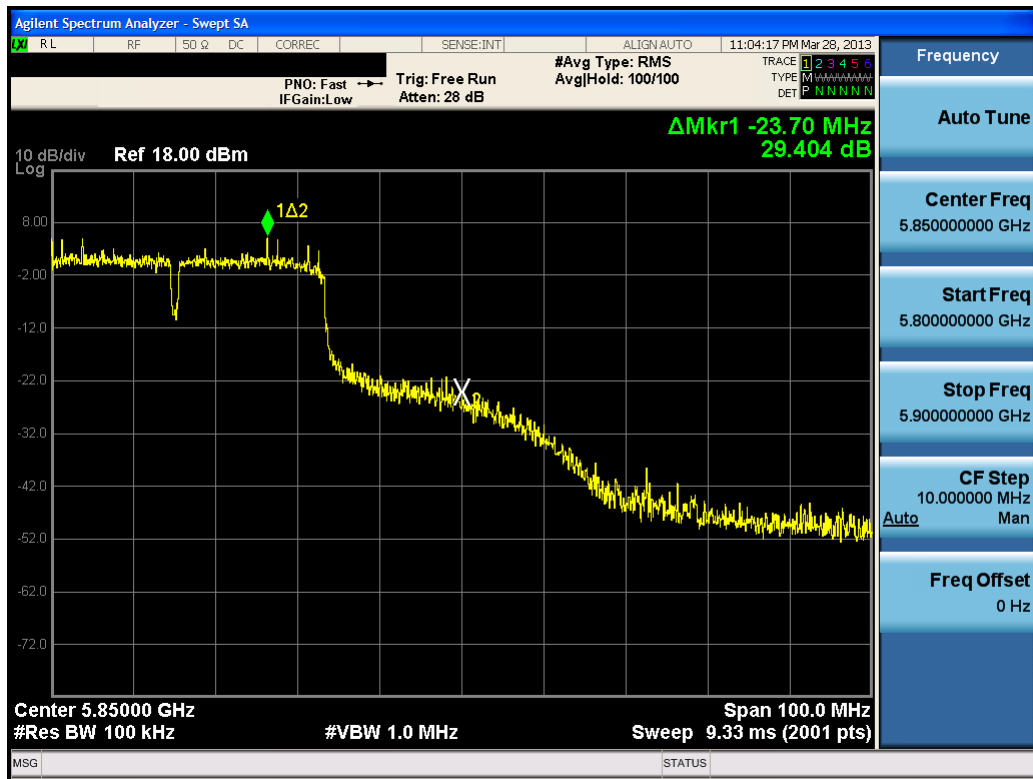


Plot 6-52. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 163)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 47 of 81

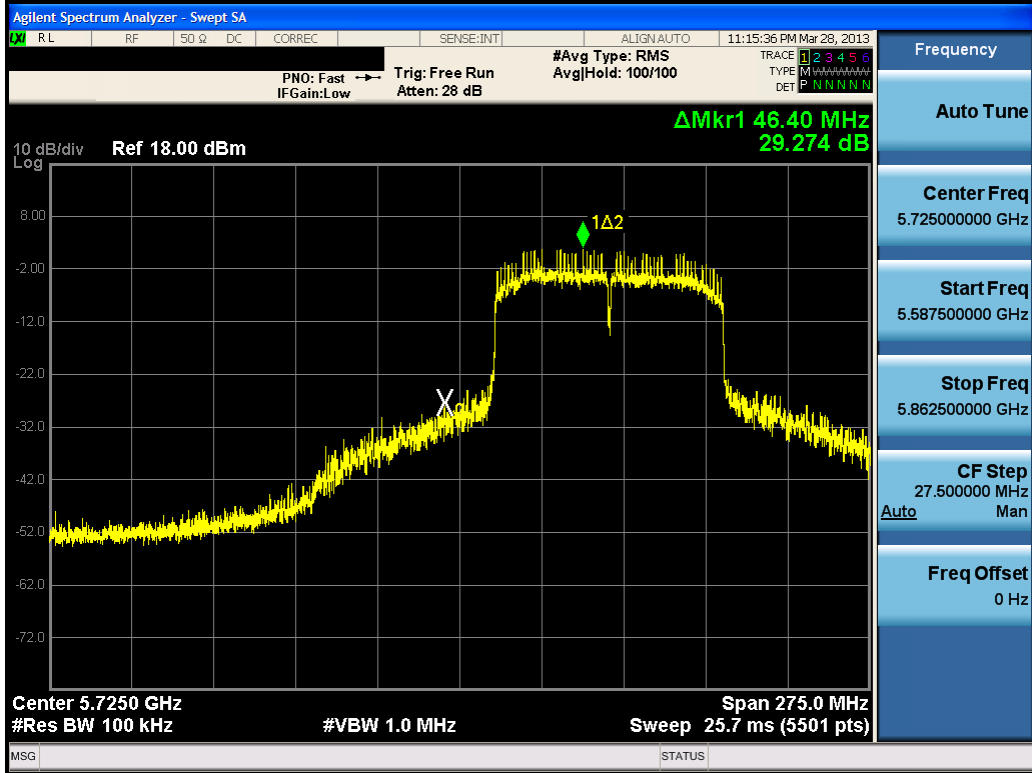

Plot 6-53. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

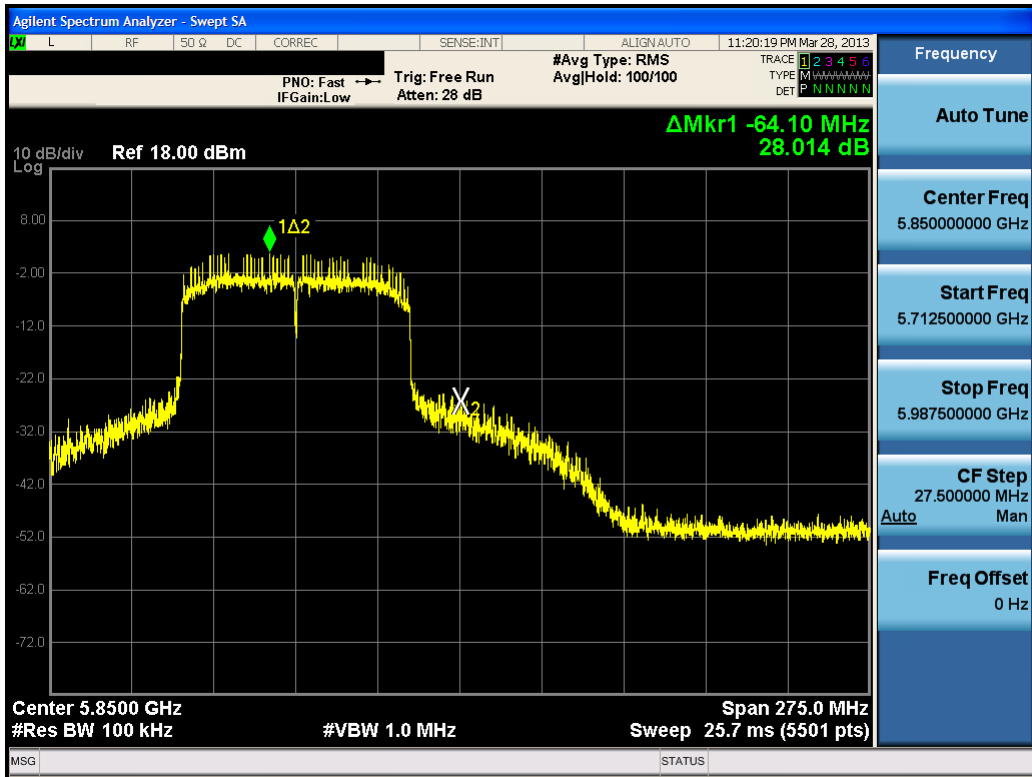

Plot 6-54. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 48 of 81

6.7 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, “n”, and “ac” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of KDB 558074 v03r01.

Test Procedure Used

KDB 558074 v03r01 – Section 11.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.









Figure 6-6. Test Instrument & Measurement Setup

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 49 of 81	


Test Notes

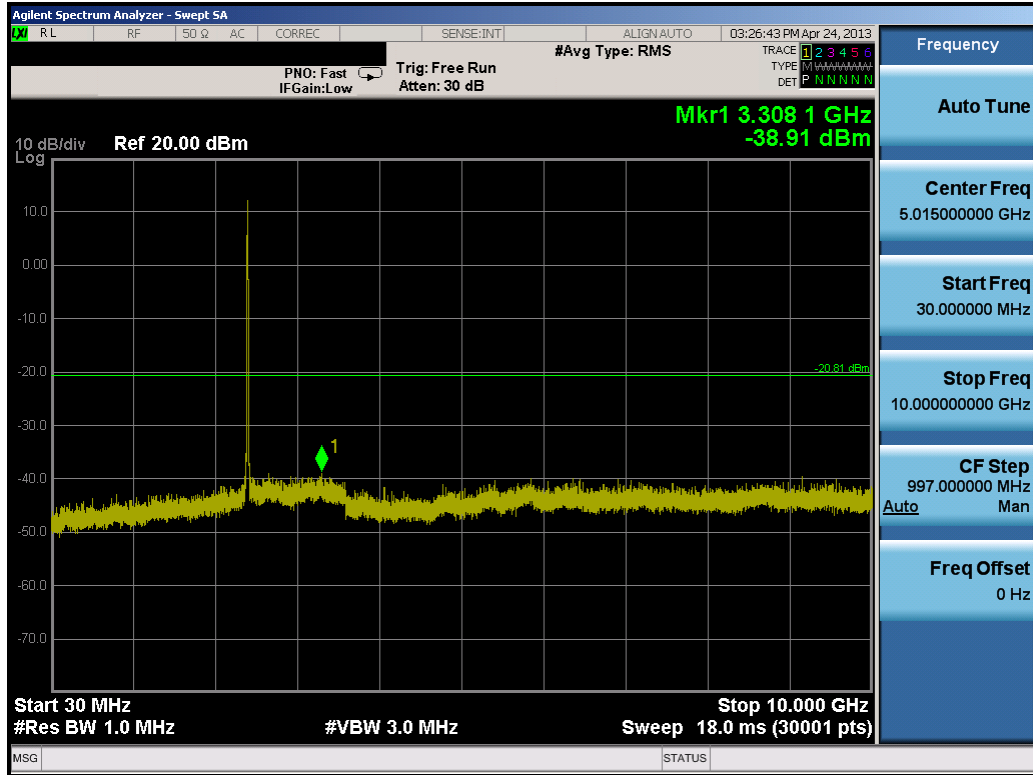1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 50 of 81	

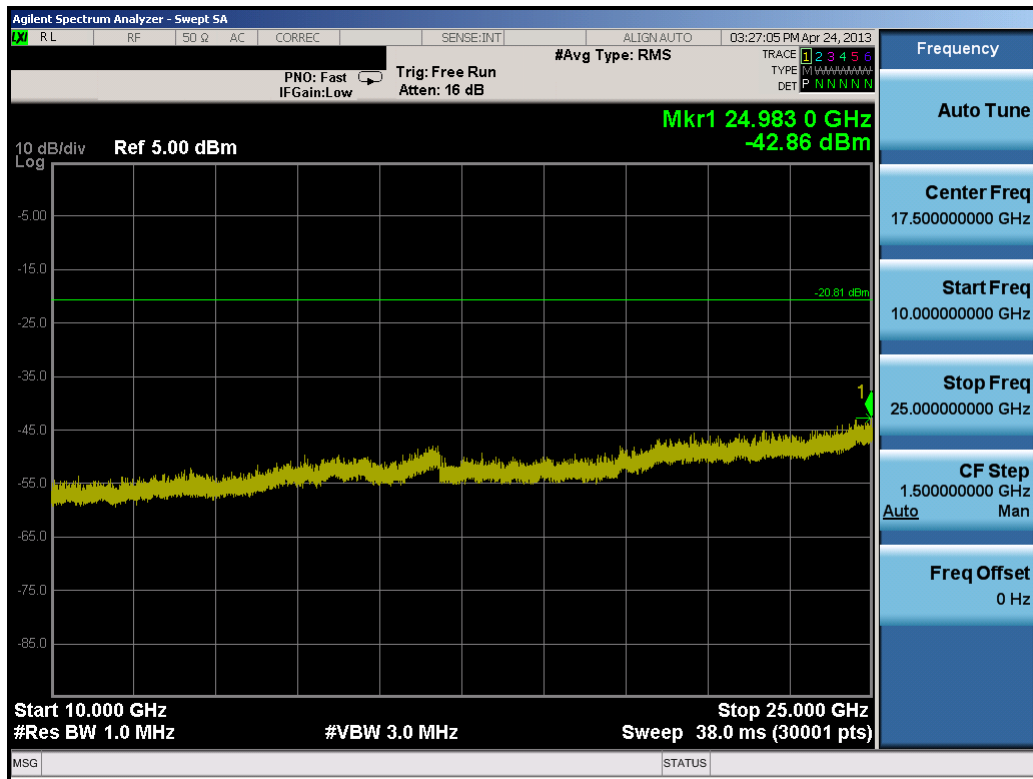


Plot 6-55. Conducted Spurious Plot (802.11b – Ch. 1)




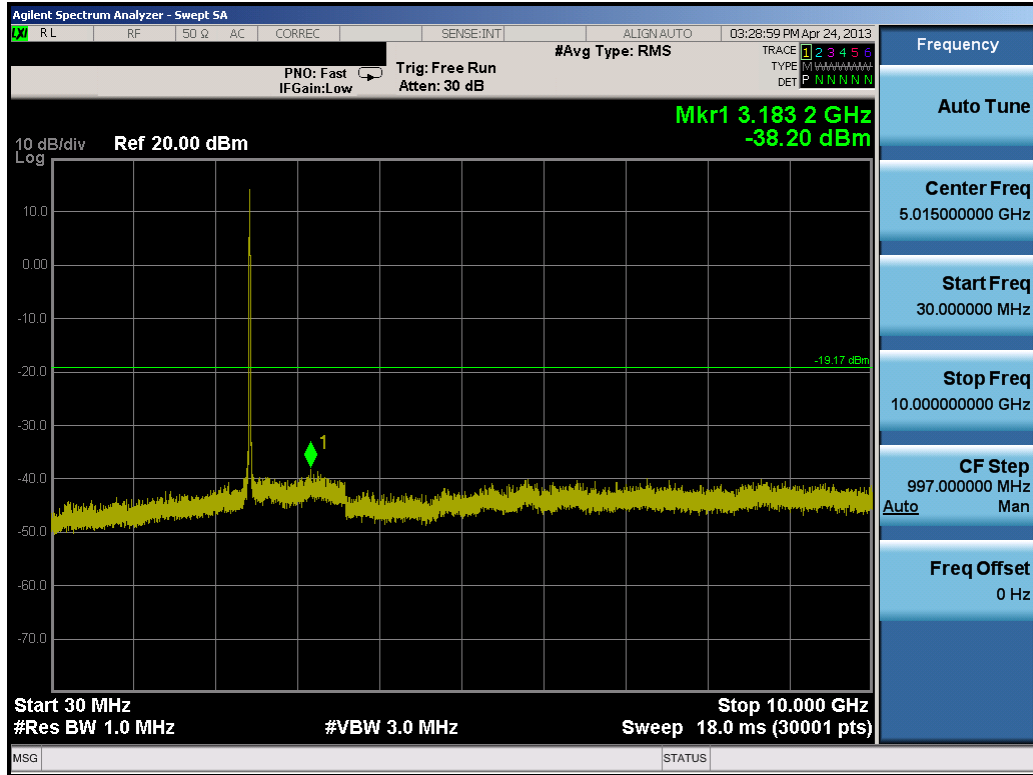Plot 6-56. Conducted Spurious Plot (802.11b – Ch. 1)



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 51 of 81

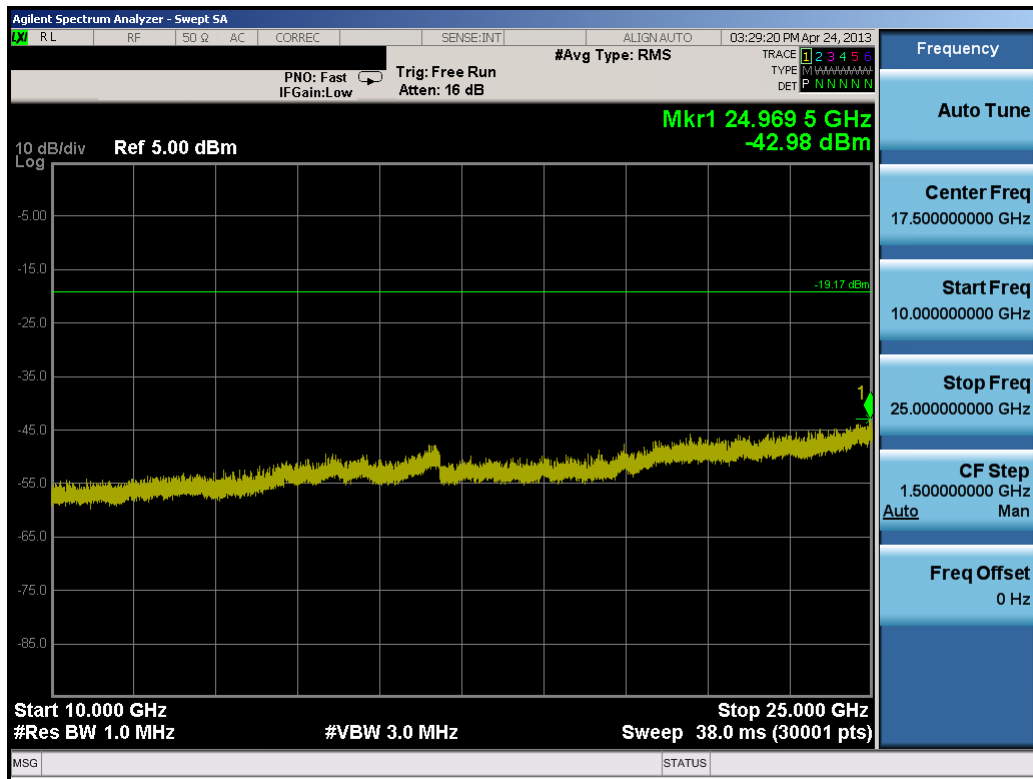


Plot 6-57. Conducted Spurious Plot (802.11b – Ch. 6)




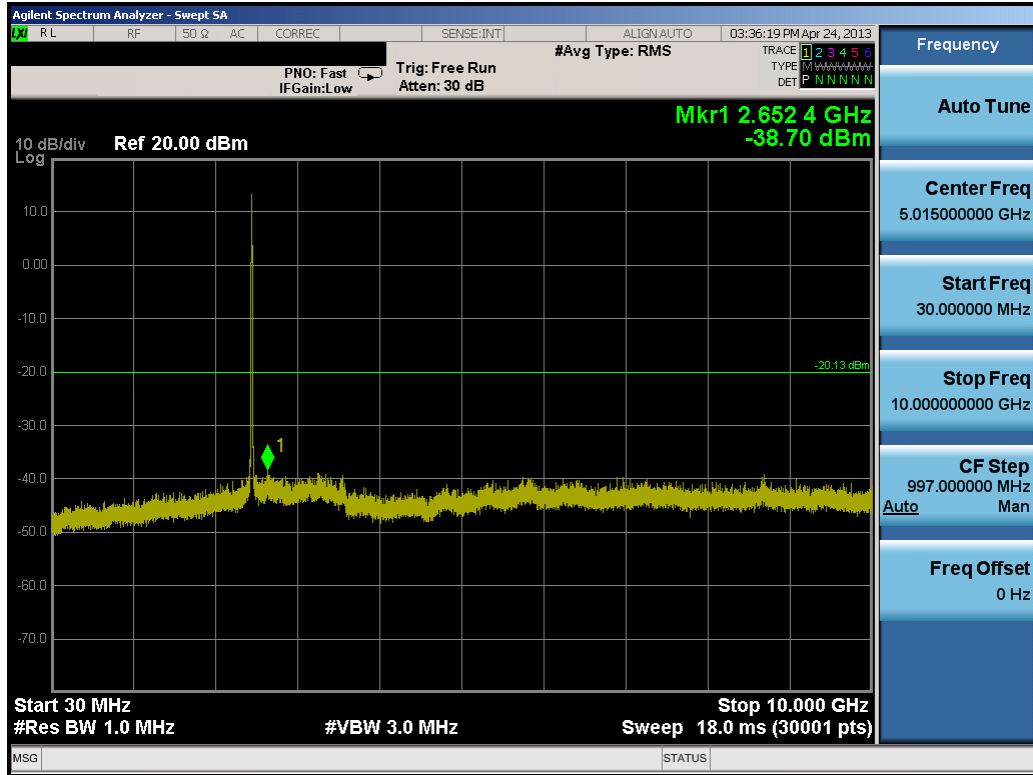Plot 6-58. Conducted Spurious Plot (802.11b – Ch. 6)



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 52 of 81

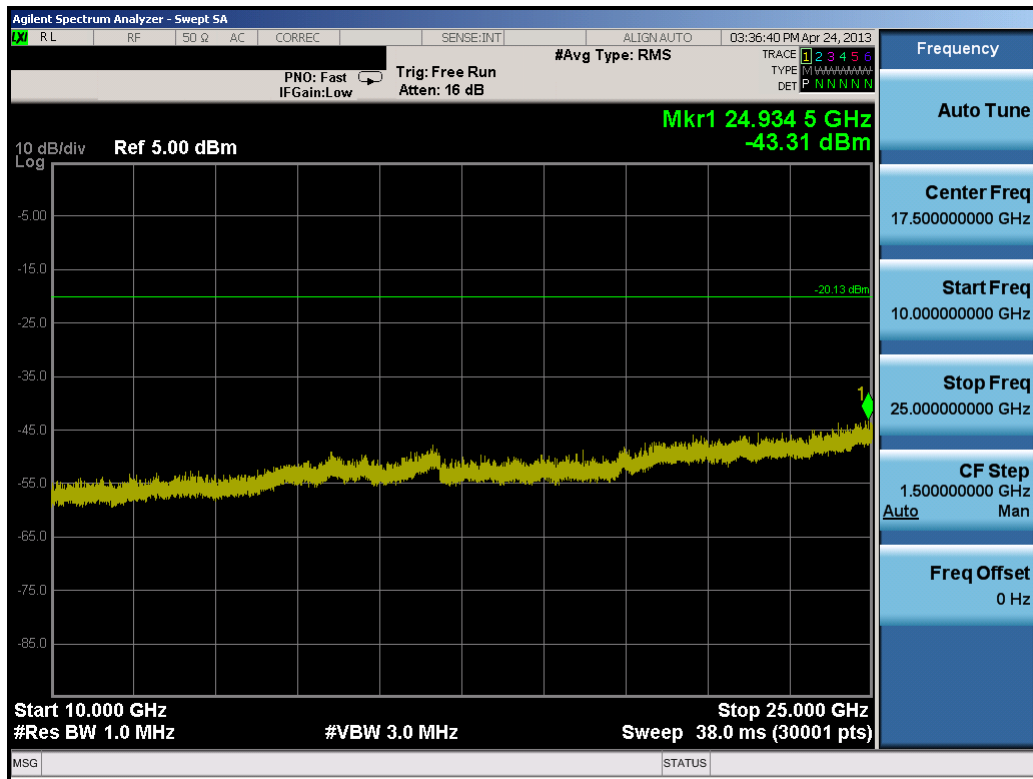


Plot 6-59. Conducted Spurious Plot (802.11b – Ch. 11)




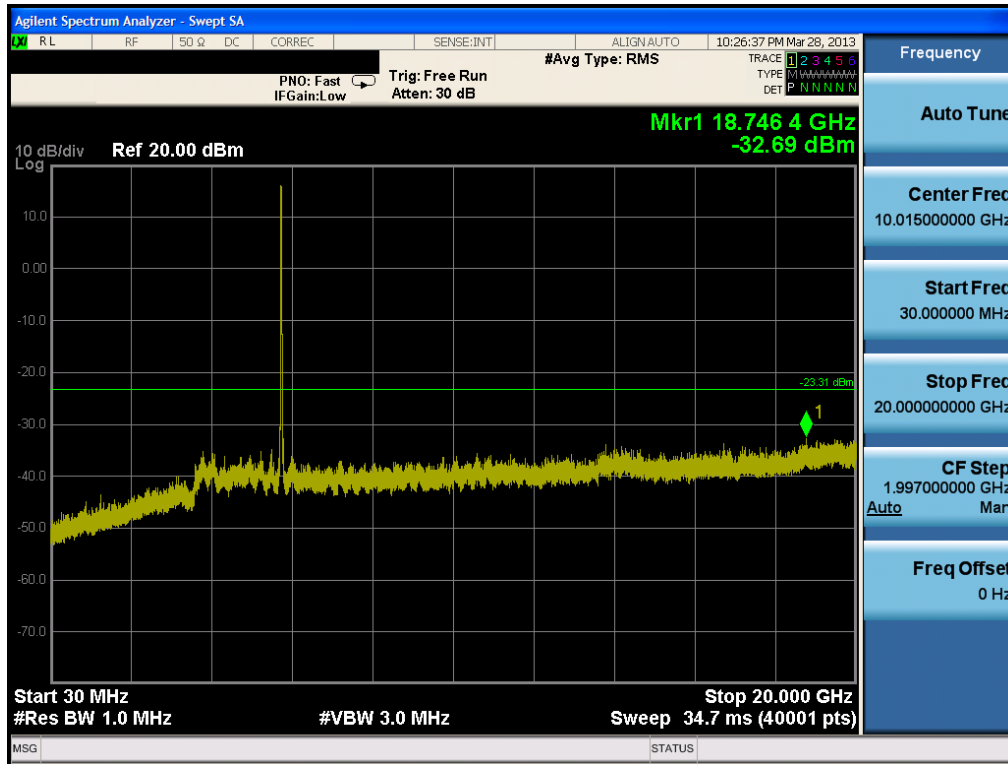Plot 6-60. Conducted Spurious Plot (802.11b – Ch. 11)



FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 53 of 81

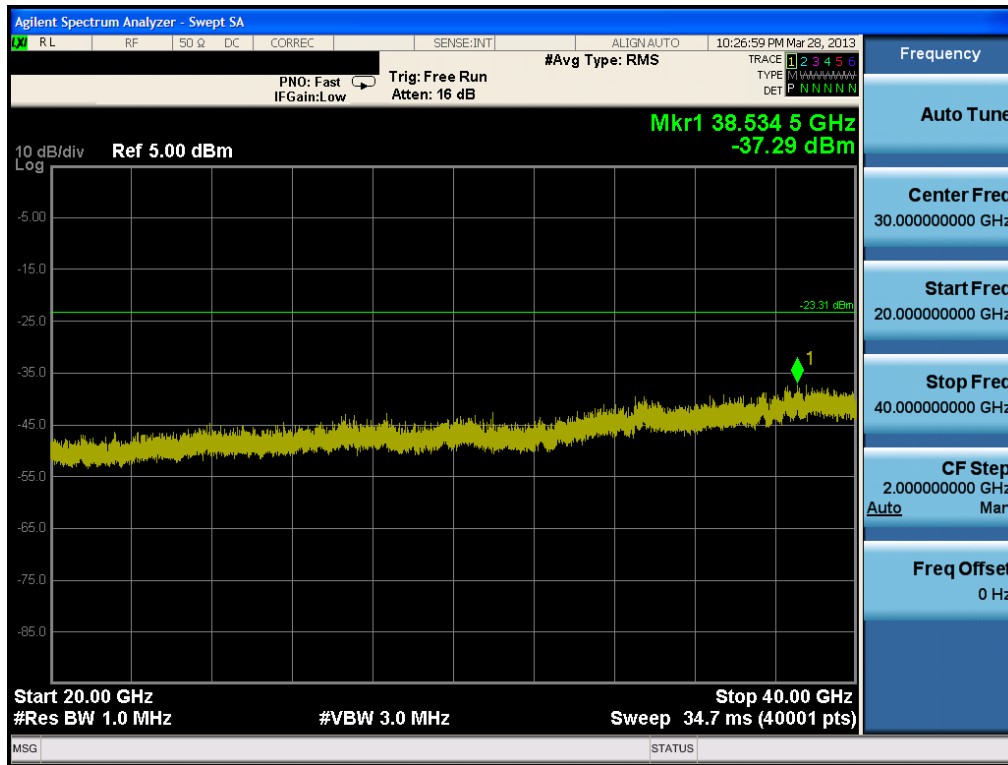


Plot 6-61. Conducted Spurious Plot (802.11a – Ch. 149)




Plot 6-62. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 54 of 81

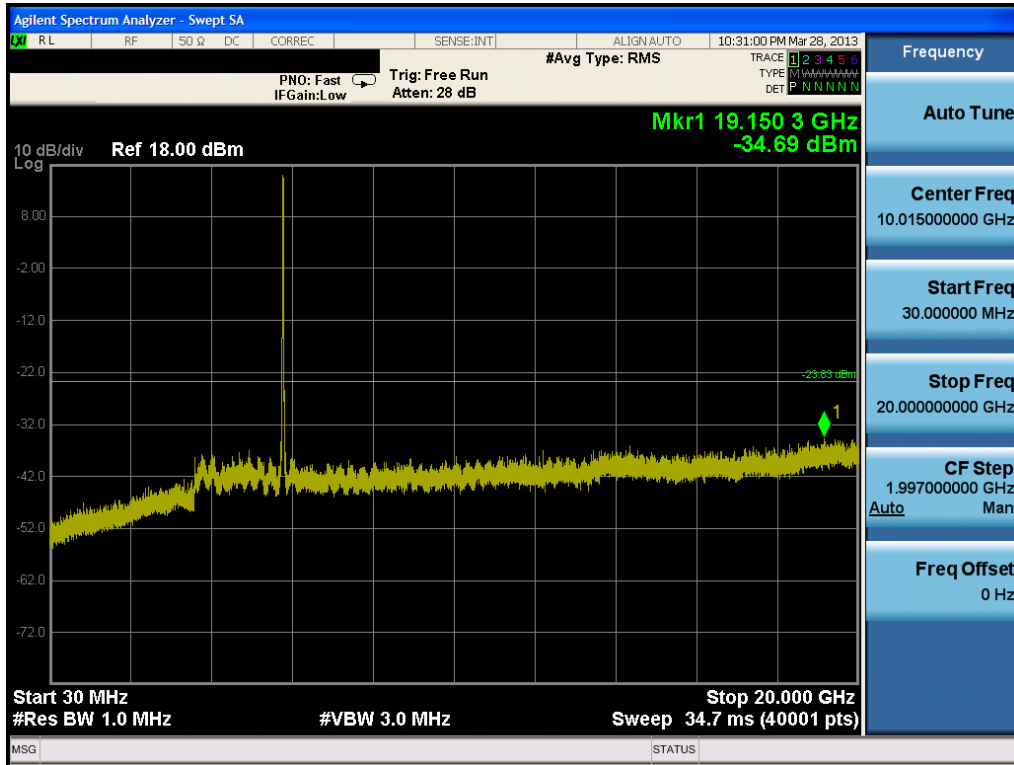


Plot 6-63. Conducted Spurious Plot (802.11a – Ch. 157)

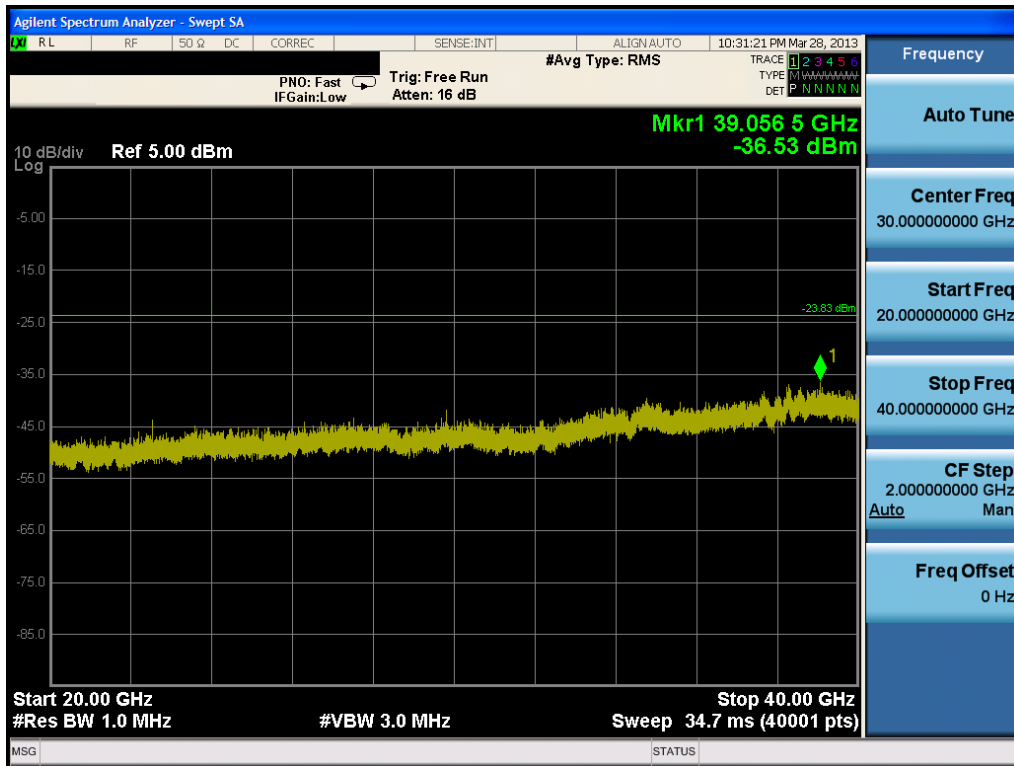


Plot 6-64. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 55 of 81

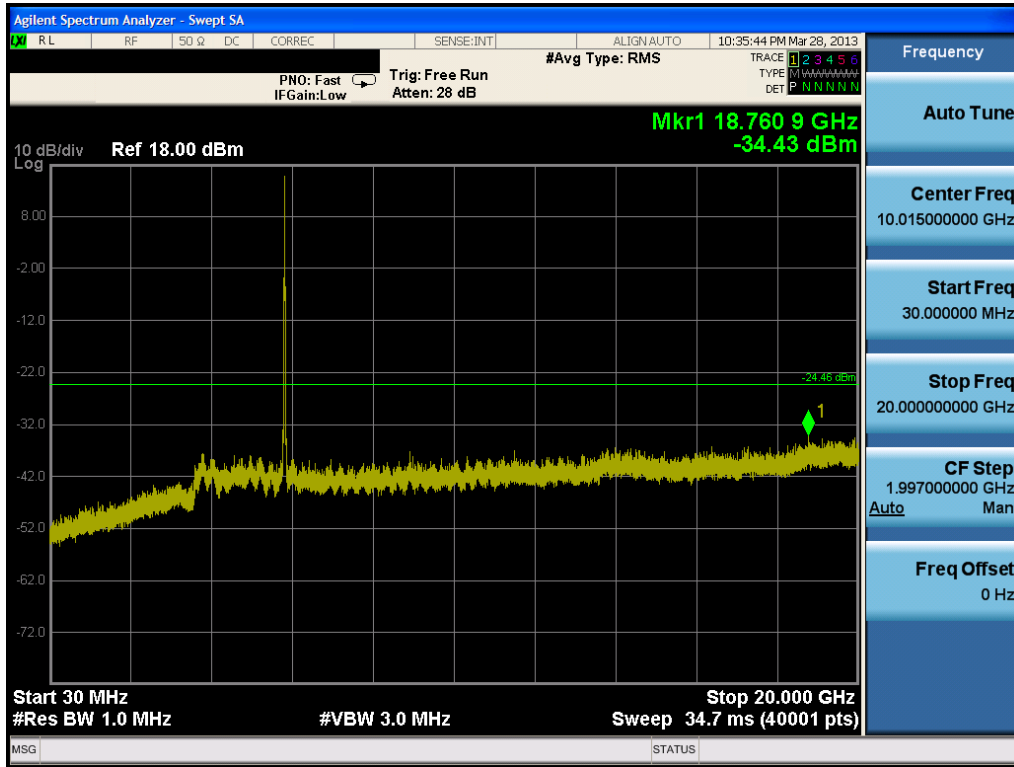

Plot 6-65. Conducted Spurious Plot (802.11a – Ch. 165)

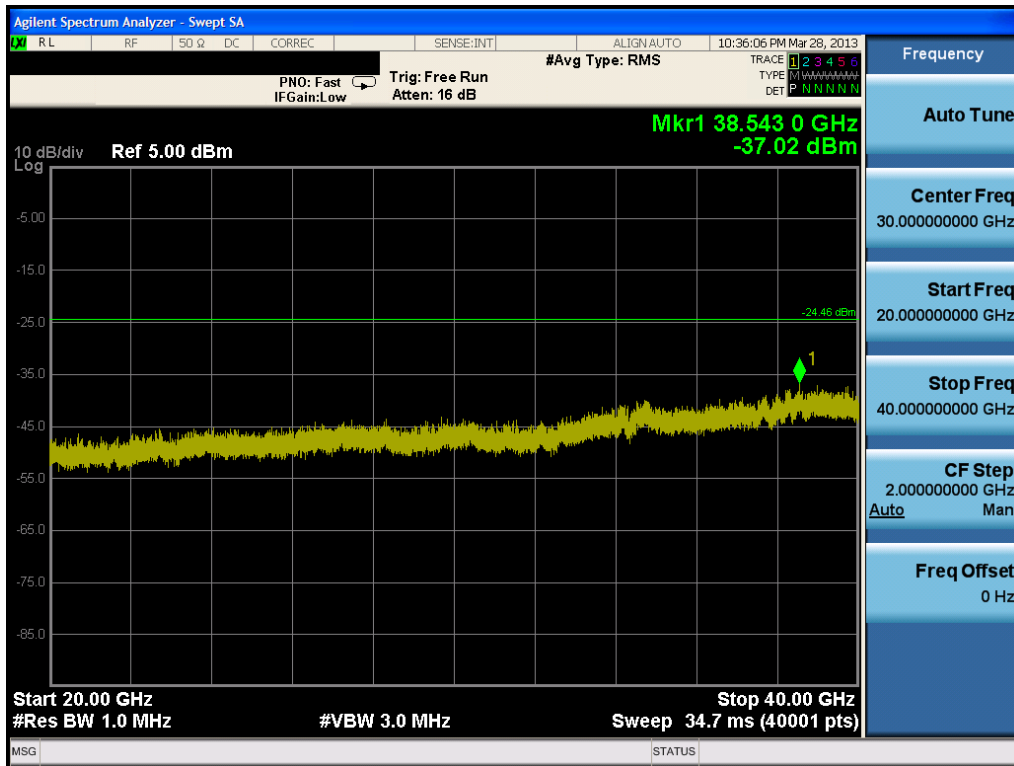

Plot 6-66. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 56 of 81

6.8 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-19 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-19. Radiated Limits

Test Procedures Used



KDB 558074 v03r01 – Section 12.2.5 (average power measurements)

KDB 558074 v03r01 – Section 12.2.4 (peak power measurements)

Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 57 of 81

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

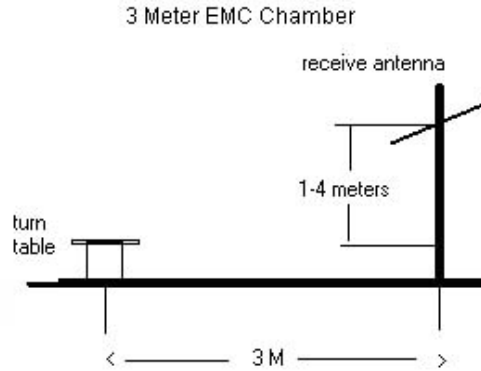




Figure 6-7. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r01 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 58 of 81	

6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
8. Some radiated band edge plots shown in this section were measured using the integration test method specified in Section 13.3.2 of KDB 558074 v03r01. Since continuous operation (duty cycle > 98%) was achievable with this device, the integration test method was used to show compliance to the radiated band edge spurious emission limits. The span was set to greater than 2MHz in order to show that the fundamental emission was transmitting at maximum power. The number of sweep points was set large enough in order to ensure that the bin-to-bin spacing is less than or equal to RBW/2 so that narrowband signals are not lost in between frequency bins.

Sample Calculations



Determining Spurious Emissions Levels

- o Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- o AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- o Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Pre-amplifier Gain}$$

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 59 of 81

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	-109.48	Avg	H	41.22	38.74	53.98	-15.24
4824.00	-100.17	Peak	H	41.22	48.05	73.98	-25.93
12060.00	-135.00	Avg	H	52.34	24.34	53.98	-29.64
12060.00	-125.00	Peak	H	52.34	34.34	73.98	-39.64

Table 6-20. Radiated Measurements

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	-112.24	Avg	H	41.20	35.96	53.98	-18.02
4874.00	-100.71	Peak	H	41.20	47.49	73.98	-26.49
7311.00	-108.91	Avg	H	44.83	42.92	53.98	-11.06
7311.00	-99.86	Peak	H	44.83	51.97	73.98	-22.01
12185.00	-135.00	Avg	H	52.51	24.51	53.98	-29.47
12185.00	-125.00	Peak	H	52.51	34.51	73.98	-39.47

Table 6-21. Radiated Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 60 of 81

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	-112.84	Avg	H	41.18	35.34	53.98	-18.64
4924.00	-101.55	Peak	H	41.18	46.63	73.98	-27.35
7386.00	-113.11	Avg	H	44.99	38.88	53.98	-15.10
7386.00	-101.55	Peak	H	44.99	50.44	73.98	-23.54
12310.00	-135.00	Avg	H	52.69	24.69	53.98	-29.29
12310.00	-125.00	Peak	H	52.69	34.69	73.98	-39.29

Table 6-22. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
11490.00	-117.78	Avg	H	47.47	0.00	36.69	53.98	-17.29
11490.00	-104.89	Peak	H	47.47	0.00	49.58	73.98	-24.40
22980.00	-135.00	Avg	H	45.70	-9.54	17.70	53.98	-36.28
22980.00	-125.00	Peak	H	45.70	-9.54	27.70	73.98	-46.28

Table 6-23. Radiated Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 61 of 81

Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
11570.00	-117.20	Avg	H	47.49	37.29	53.98	-16.69
11570.00	-104.54	Peak	H	47.49	49.95	73.98	-24.03

Table 6-24. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
11650.00	-117.37	Avg	H	47.55	37.18	53.98	-16.80
11650.00	-104.63	Peak	H	47.55	49.92	73.98	-24.06

Table 6-25. Radiated Measurements

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 62 of 81	

6.9 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

This section shows the radiated band edge plots for all channels whose conducted power was reduced for compliance purposes.

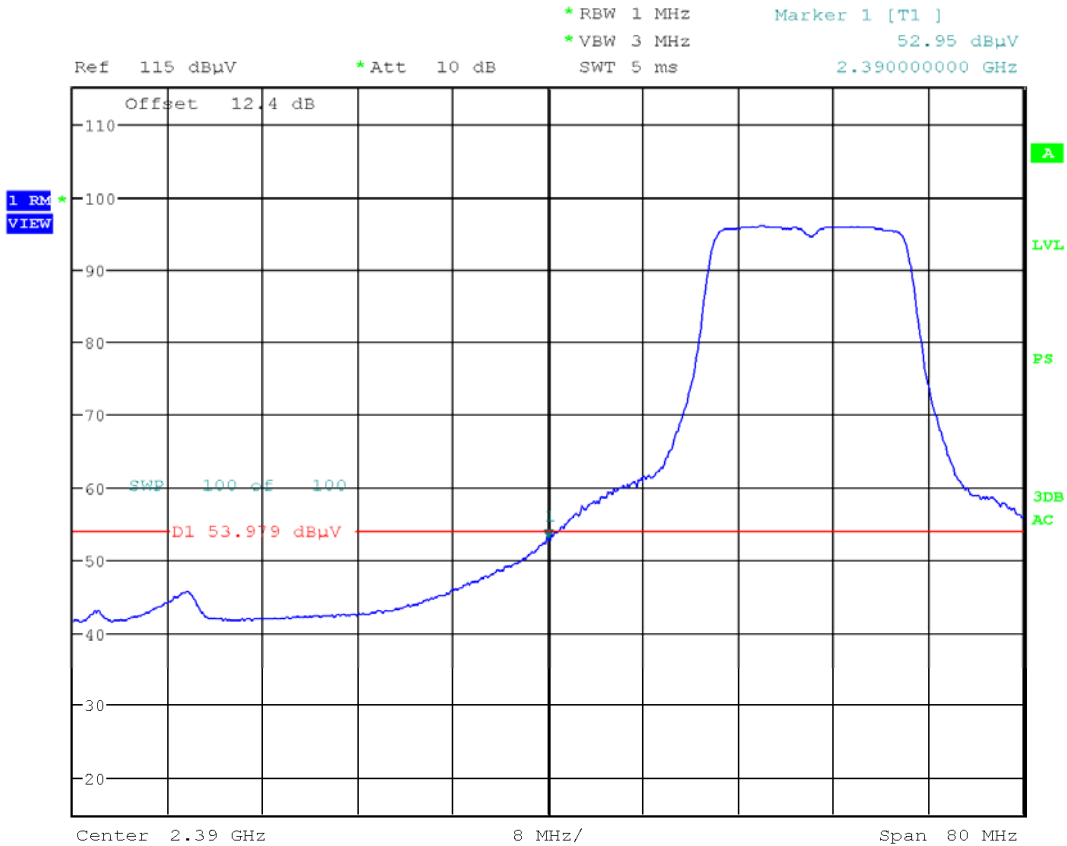
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1




Date: 24.APR.2013 14:50:59

Plot 6-67. Radiated Restricted Lower Band Edge Measurement (Average)



FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 63 of 81	

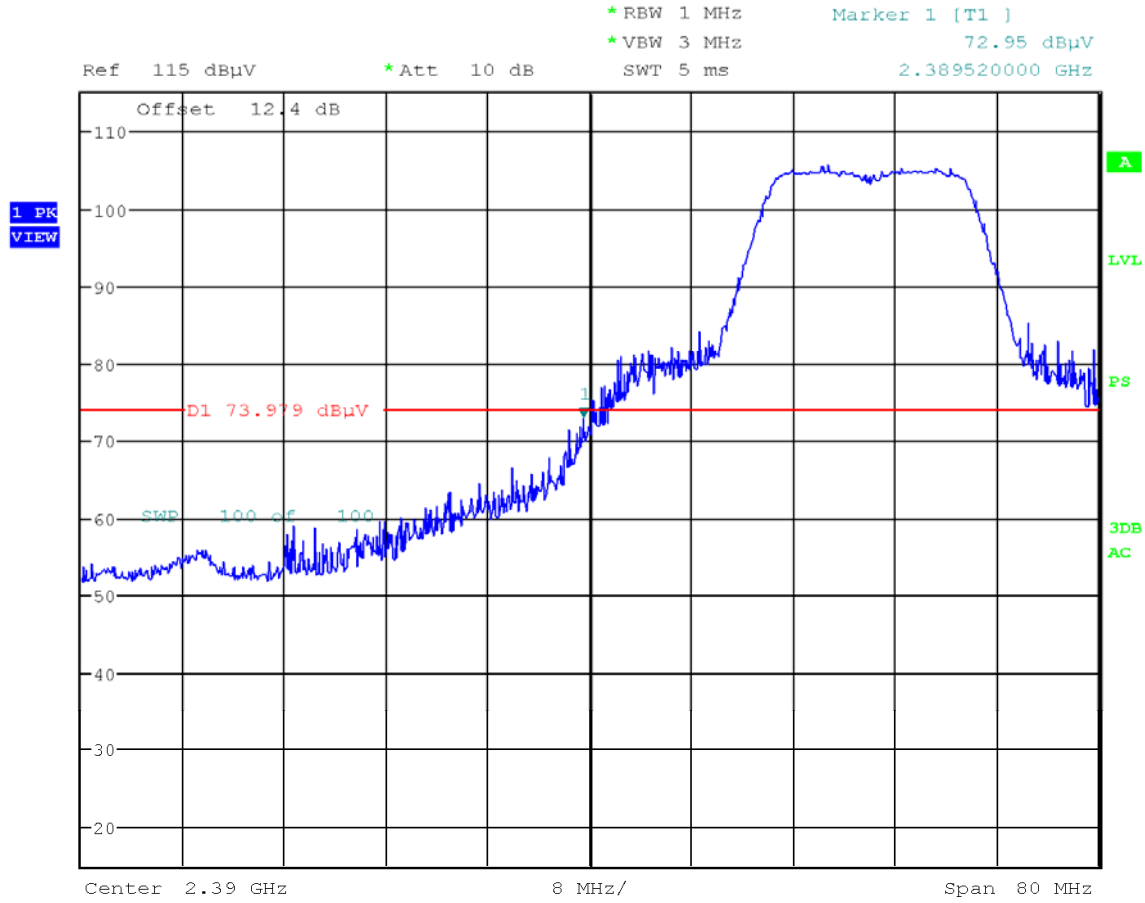Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 14:51:49

Plot 6-68. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 64 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

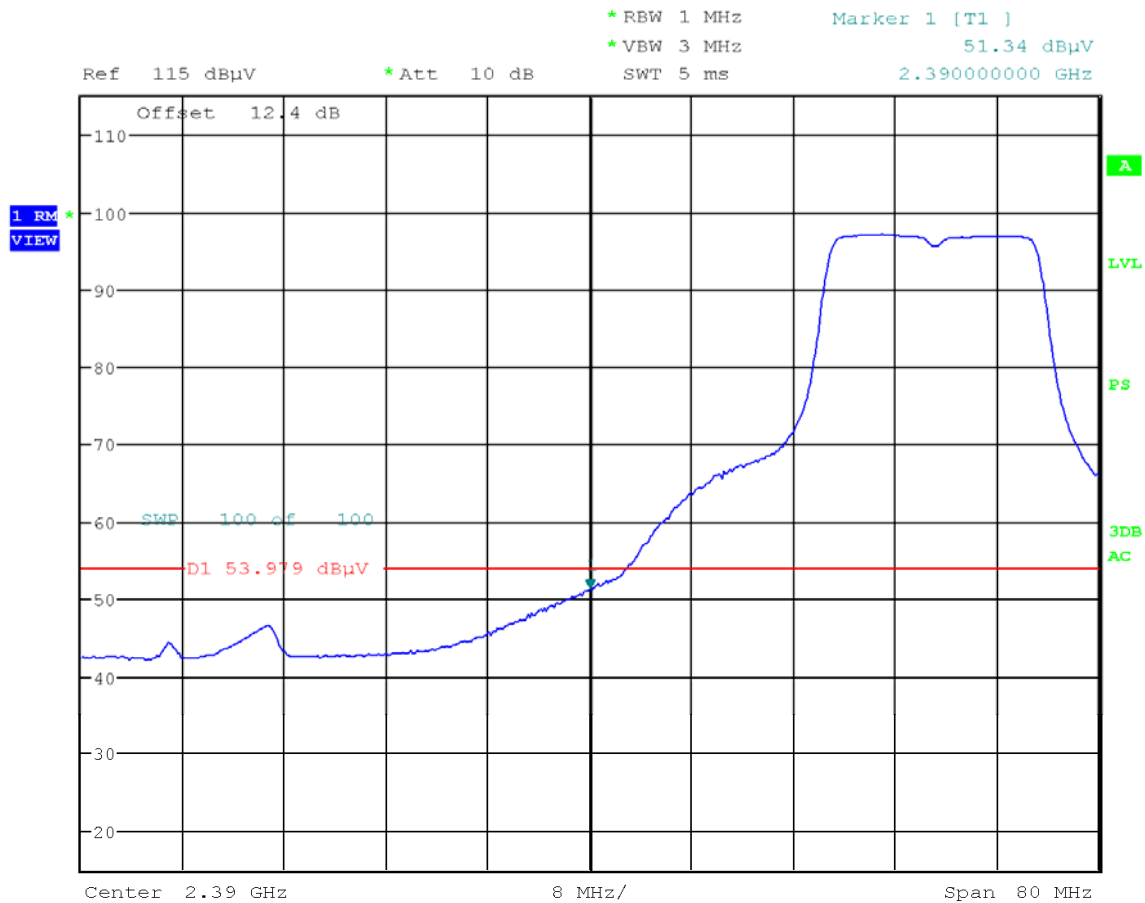
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2417MHz

Channel: 2




Date: 24.APR.2013 15:02:06

Plot 6-69. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 65 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

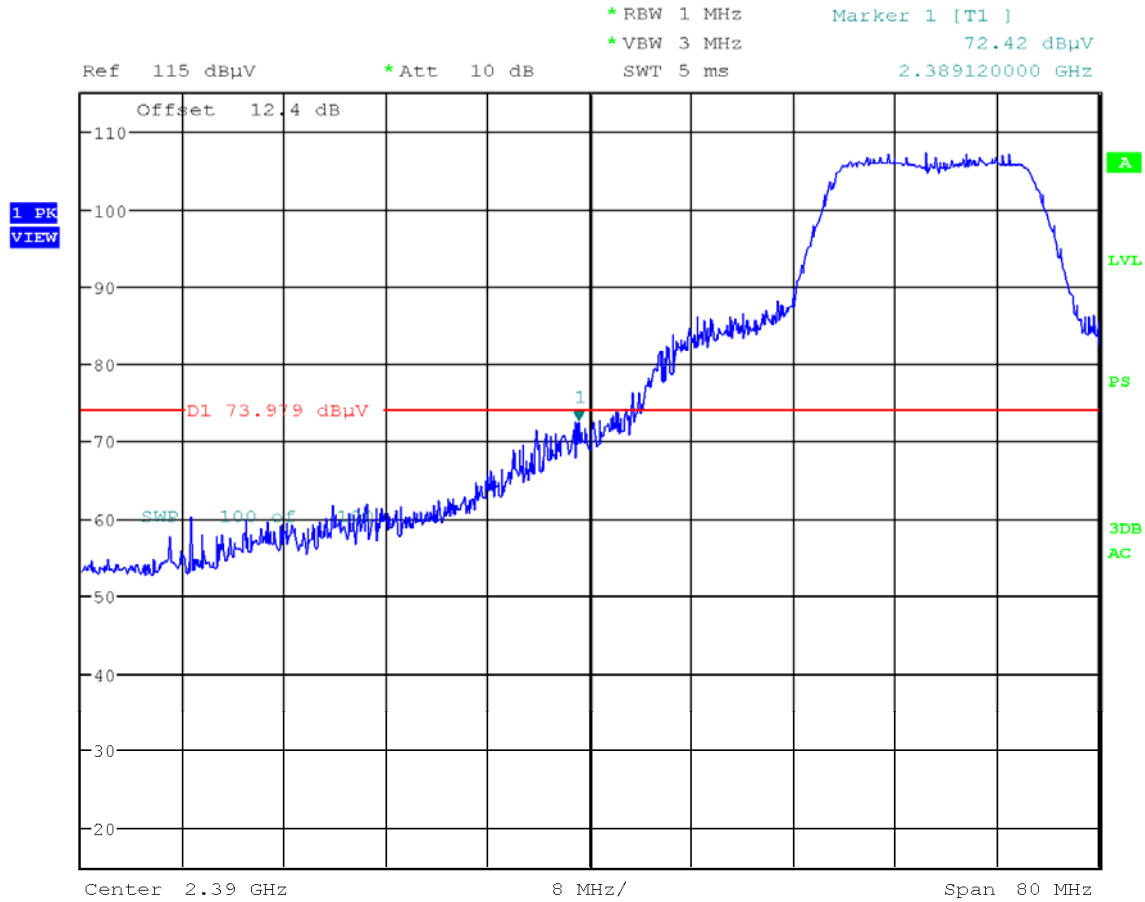§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 15:03:56

Plot 6-70. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 66 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

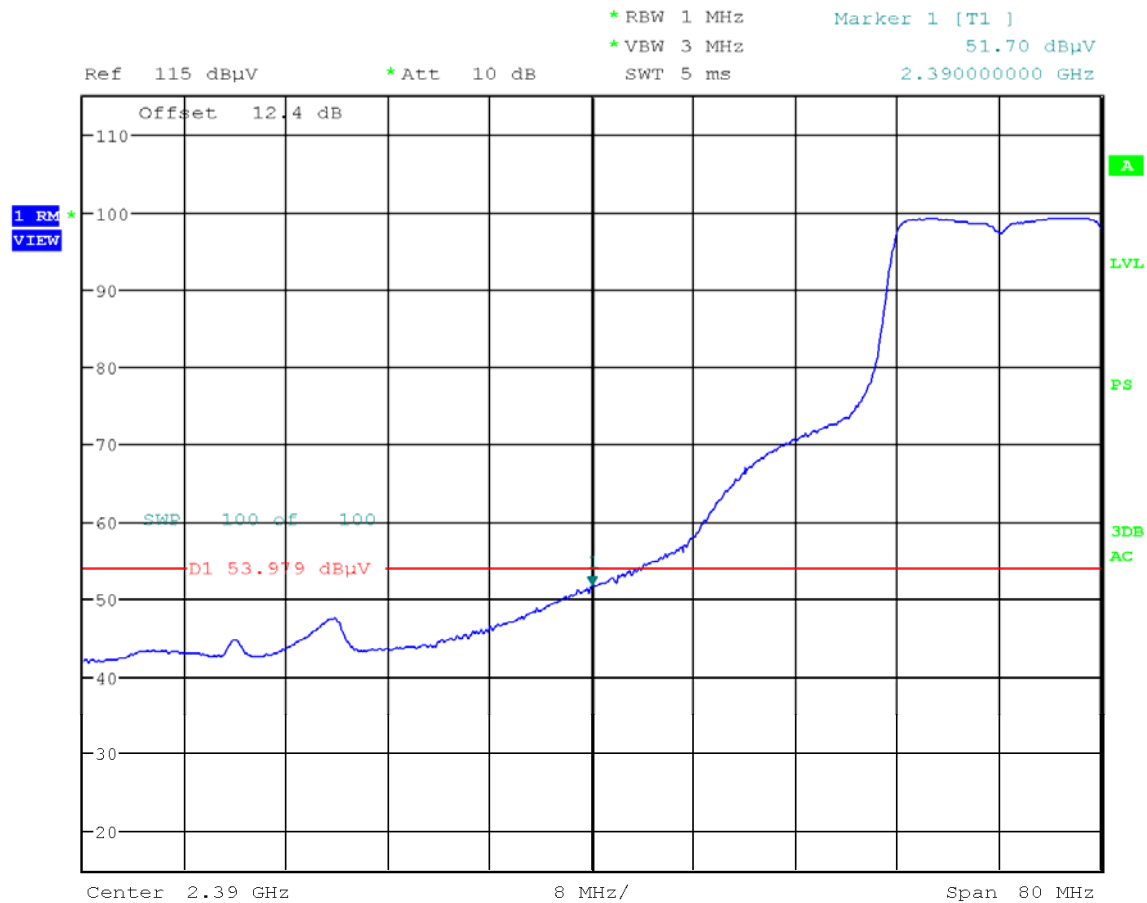
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2422MHz

Channel: 3




Date: 24.APR.2013 15:11:16

Plot 6-71. Radiated Restricted Lower Band Edge Measurement (Average)



FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 67 of 81	

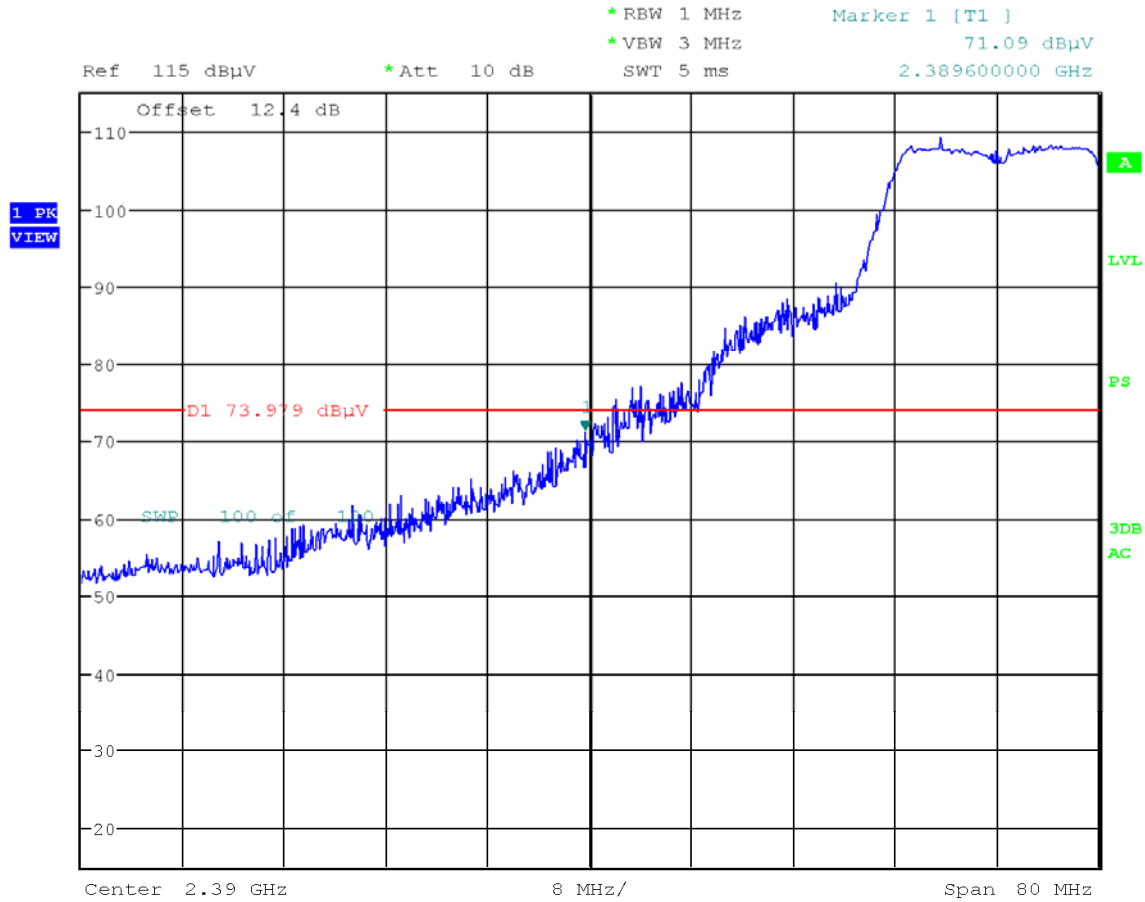Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 15:12:24

Plot 6-72. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 68 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

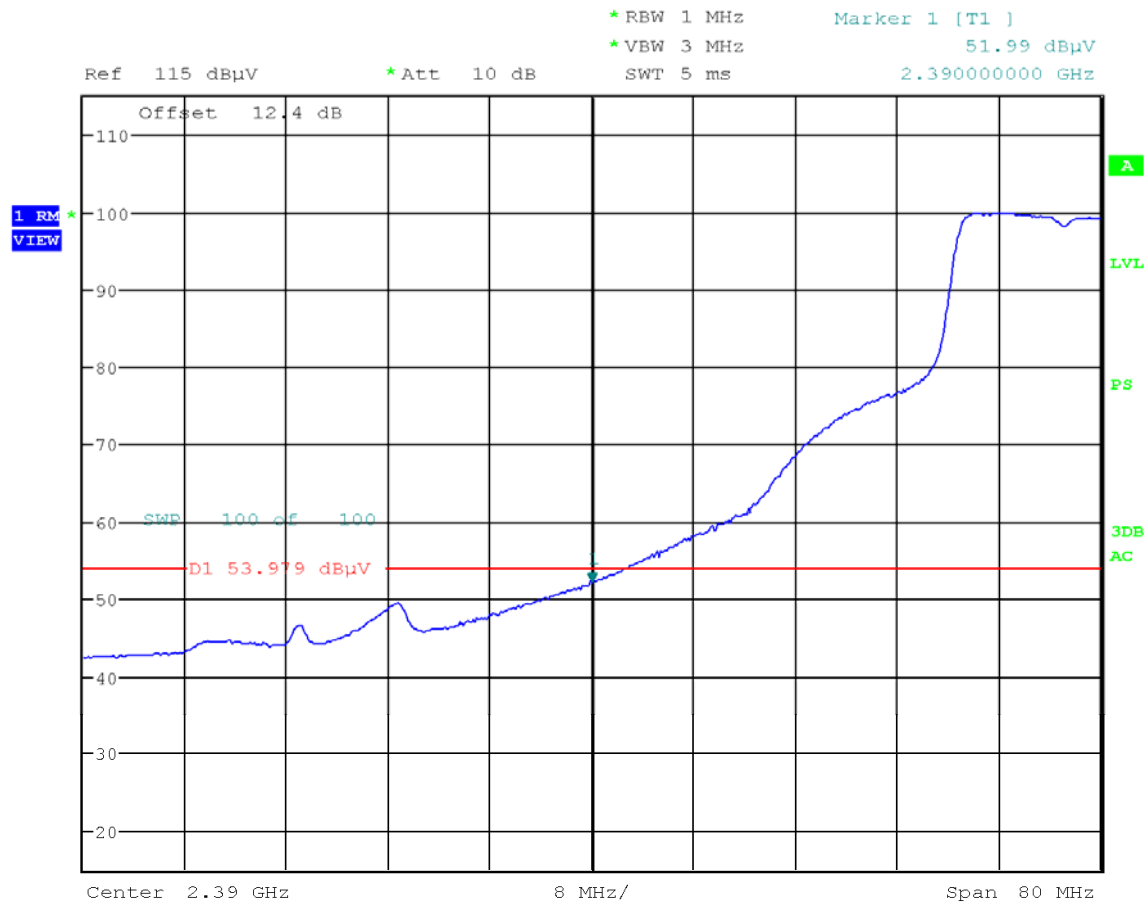
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2427MHz

Channel: 4




Date: 24.APR.2013 15:24:02

Plot 6-73. Radiated Restricted Lower Band Edge Measurement (Average)



FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 69 of 81	

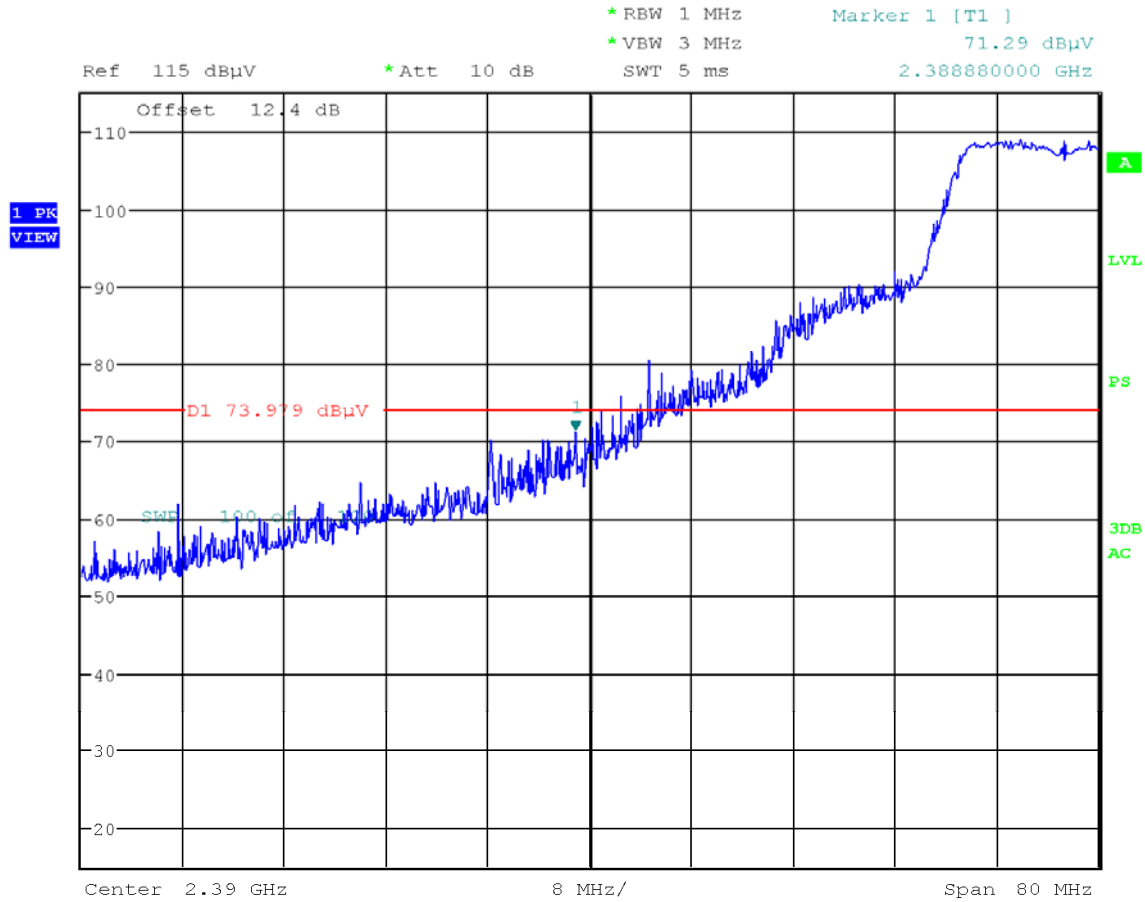Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 15:26:11

Plot 6-74. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 70 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

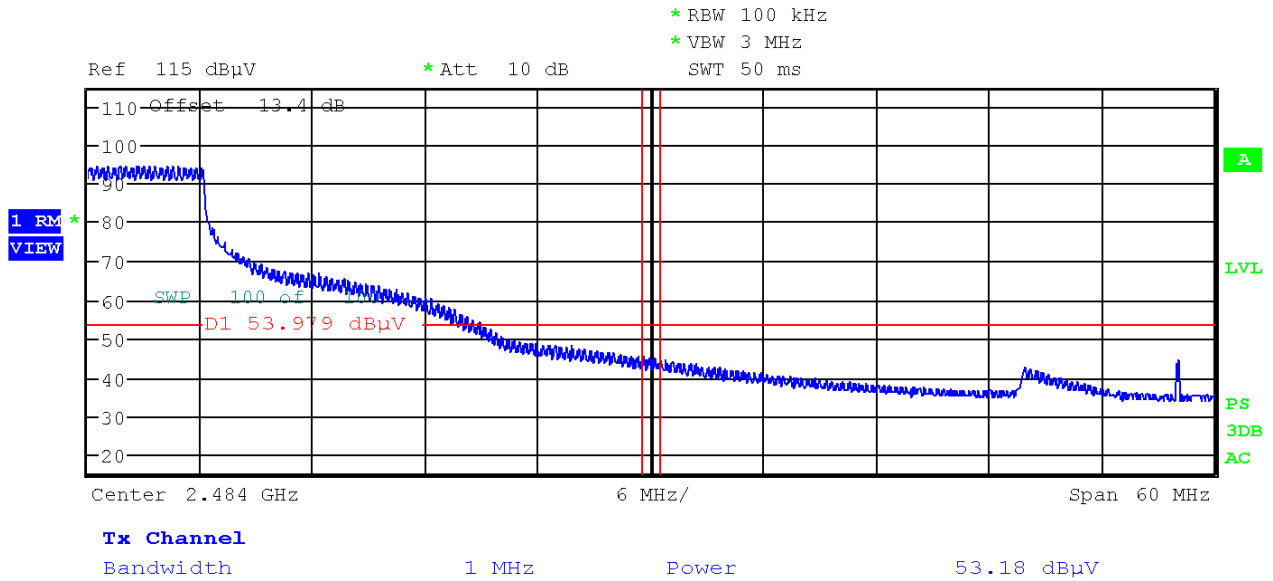
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2452MHz


Channel: 9



Plot 6-75. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 71 of 81

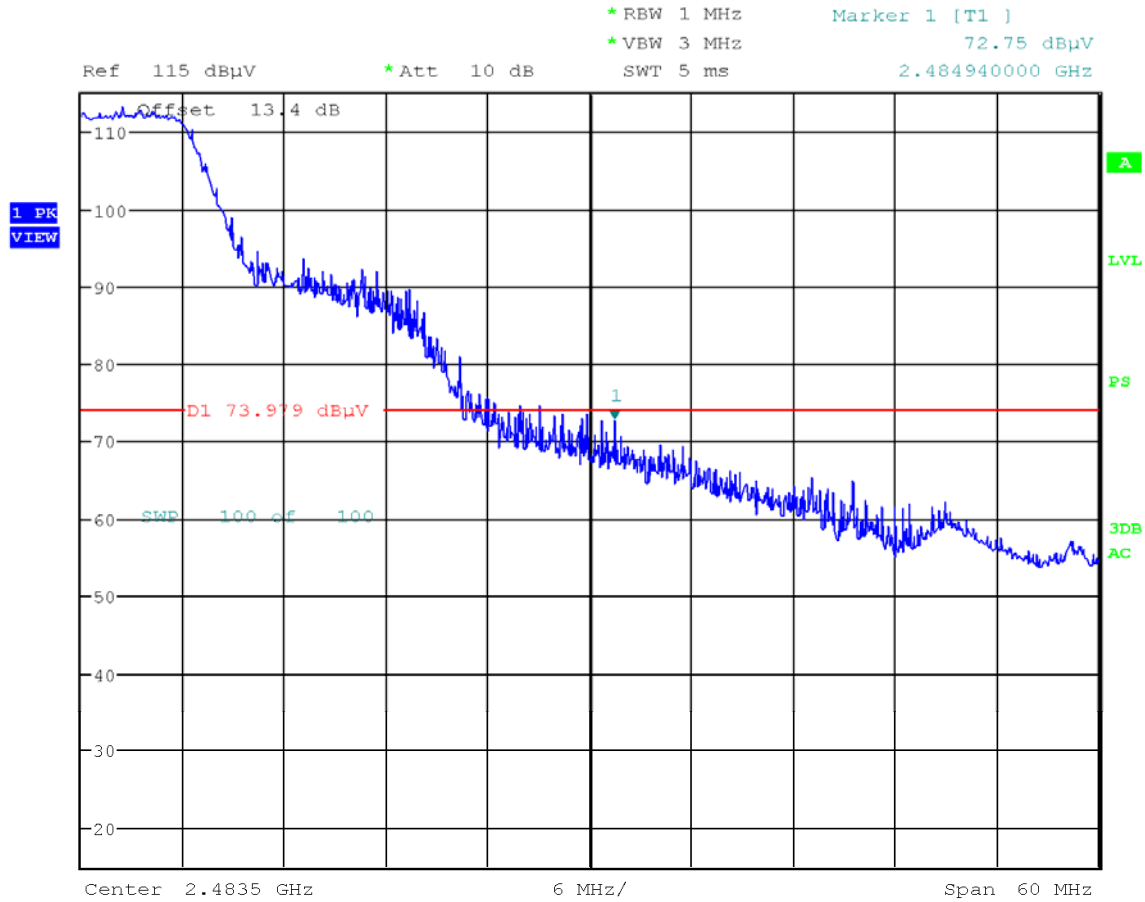Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 16:30:31

Plot 6-76. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 72 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

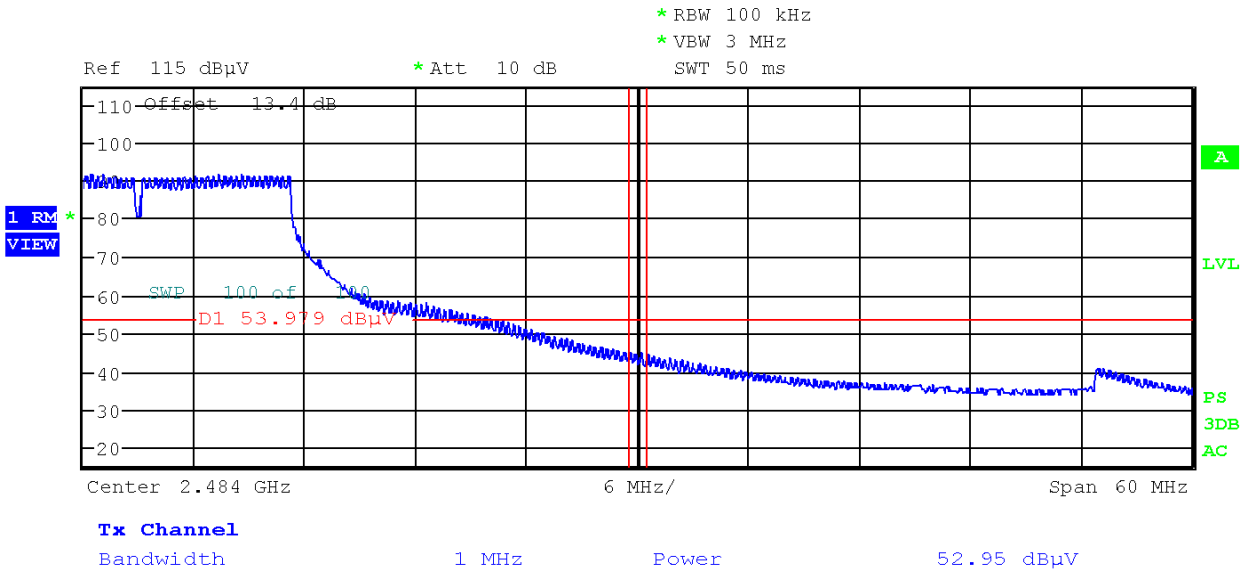
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2457MHz

Channel: 10




Plot 6-77. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 73 of 81	

Radiated Restricted Band Edge Measurements (Cont'd)

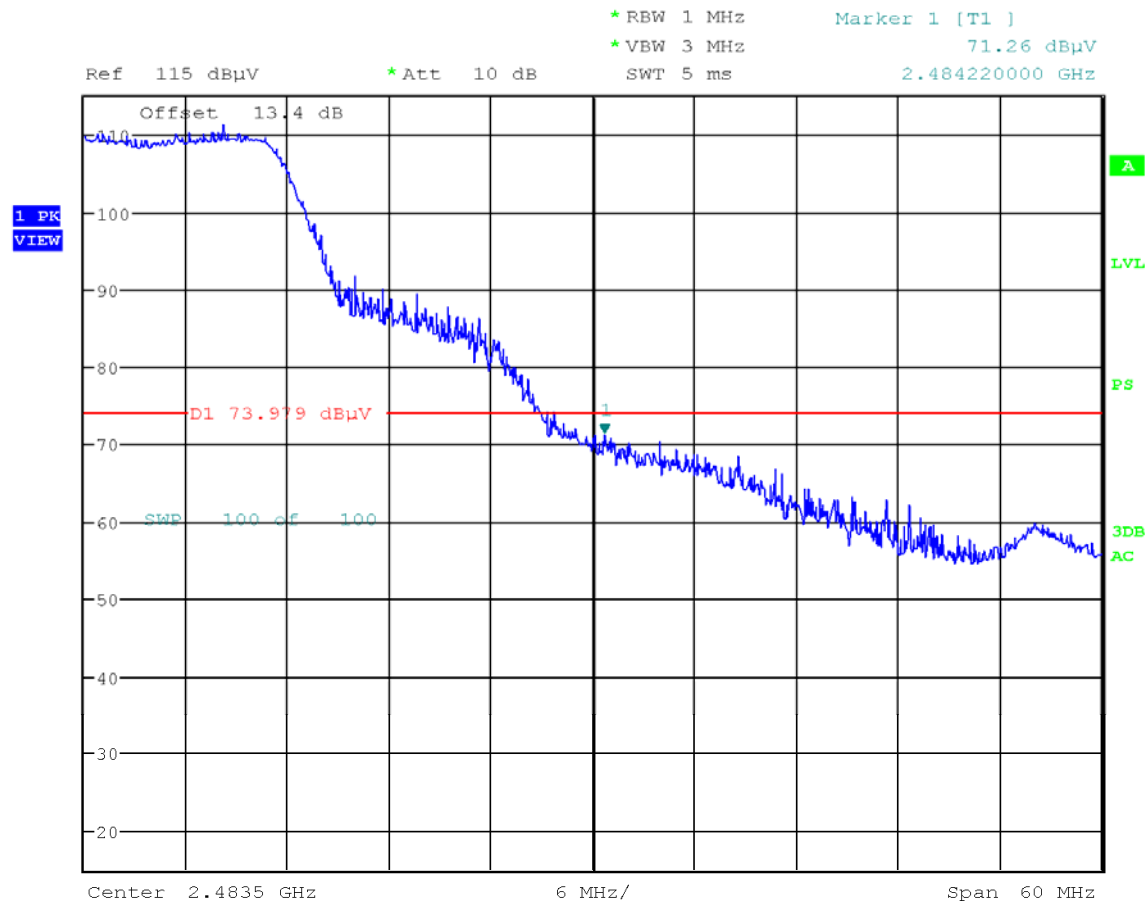§15.205 / §15.209; RSS-210 [A8.5]



Date: 24.APR.2013 16:22:18

Plot 6-78. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 74 of 81

Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

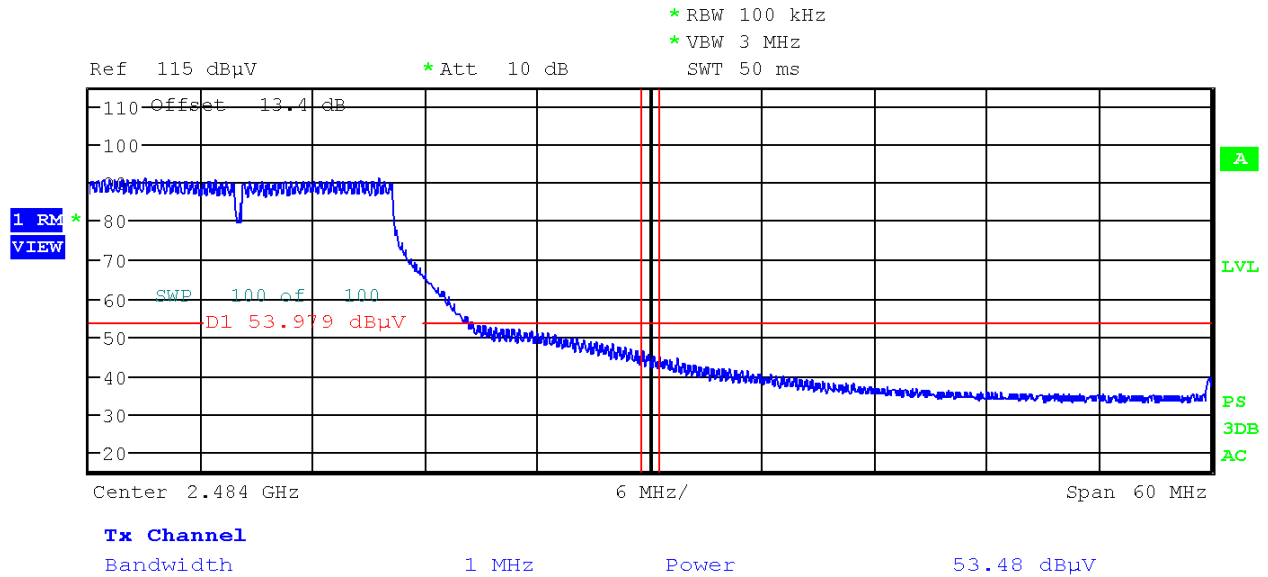
Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz


Channel: 11



Plot 6-79. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 75 of 81

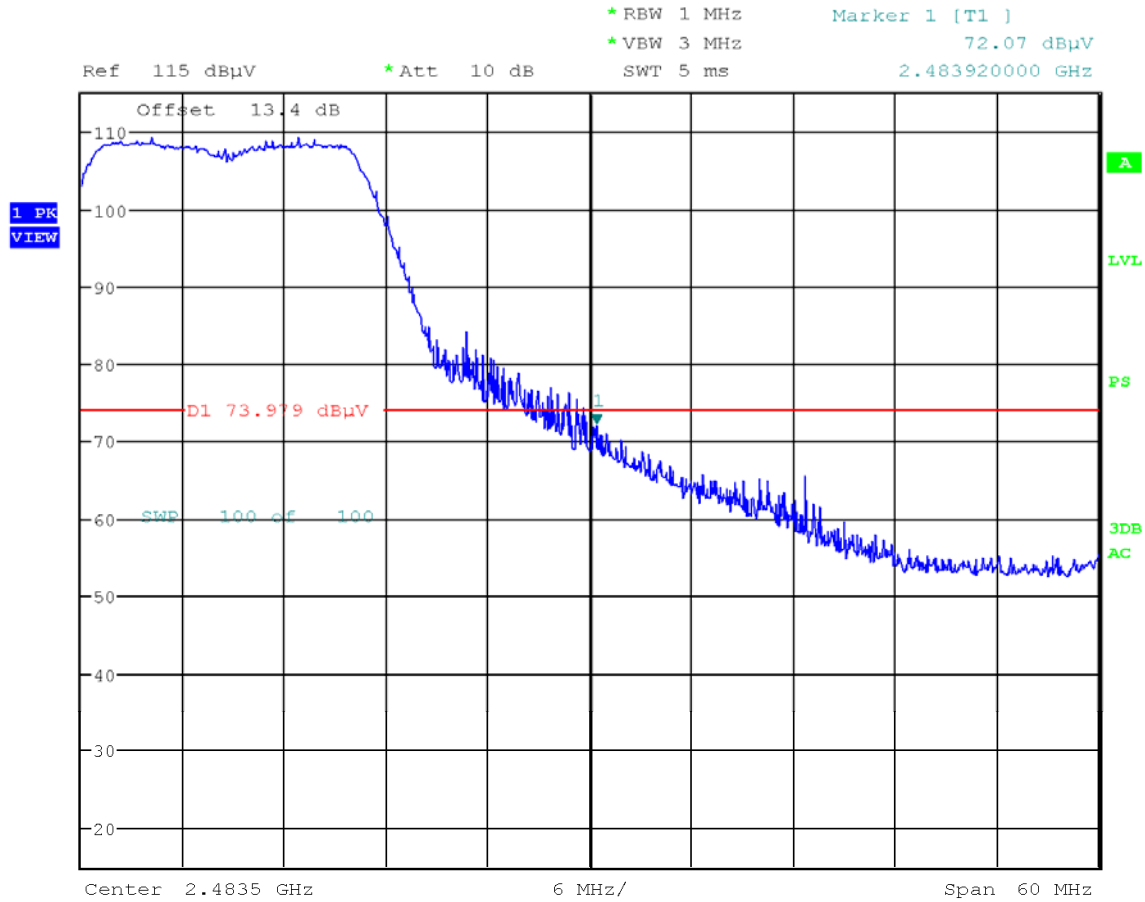Radiated Restricted Band Edge Measurements (Cont'd)
§15.205 / §15.209; RSS-210 [A8.5]




Date: 24.APR.2013 16:11:14

Plot 6-80. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: IHDT56PB3	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	MOTOROLA	Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 76 of 81	

6.10 Line-Conducted Test Data

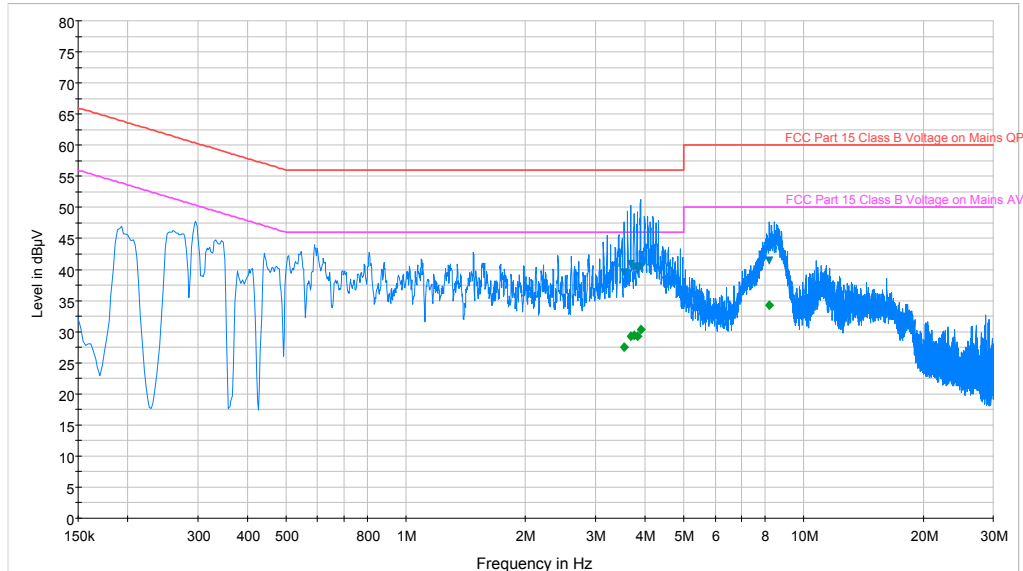§15.207; RSS-Gen [7.2.2]



— FCC Part 15 Class B Voltage on Mains QP.LimitLine — FCC Part 15 Class B Voltage on Mains AV.LimitLine — Preview Result 1-PK+
▼ Final Result 1-QPK ◆ Final Result 2-AVG

Plot 6-81. Line Conducted Plot with 802.11b (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
3.545	L1	0.2	39.60	56.00	16.40	27.50	46.00	18.50
3.683	L1	0.2	40.90	56.00	15.10	29.20	46.00	16.80
3.757	L1	0.2	40.50	56.00	15.50	29.40	46.00	16.60
3.827	L1	0.2	39.90	56.00	16.10	29.30	46.00	16.70
3.894	L1	0.2	40.50	56.00	15.50	30.30	46.00	15.70
8.219	L1	0.3	41.40	60.00	18.60	34.20	50.00	15.80

Table 6-26. Line Conducted Data with 802.11b (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 77 of 81

Line-Conducted Test Data (Cont'd)

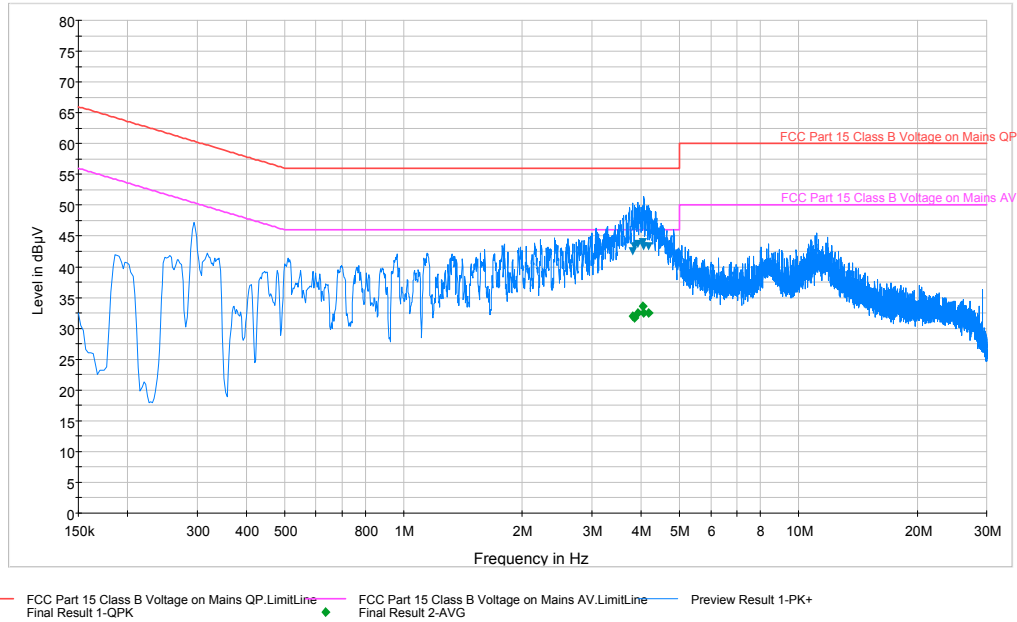§15.207; RSS-Gen [7.2.2]



Plot 6-82. Line Conducted Plot with 802.11b (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
3.809	N	0.2	42.50	56.00	13.50	31.90	46.00	14.10
3.851	N	0.2	43.30	56.00	12.70	31.60	46.00	14.40
3.926	N	0.2	43.70	56.00	12.30	32.50	46.00	13.50
4.031	N	0.2	44.00	56.00	12.00	33.60	46.00	12.40
4.065	N	0.2	43.40	56.00	12.60	32.50	46.00	13.50
4.182	N	0.2	43.30	56.00	12.70	32.50	46.00	13.50

Table 6-27. Line Conducted Data with 802.11b (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 78 of 81

Line-Conducted Test Data (Cont'd)

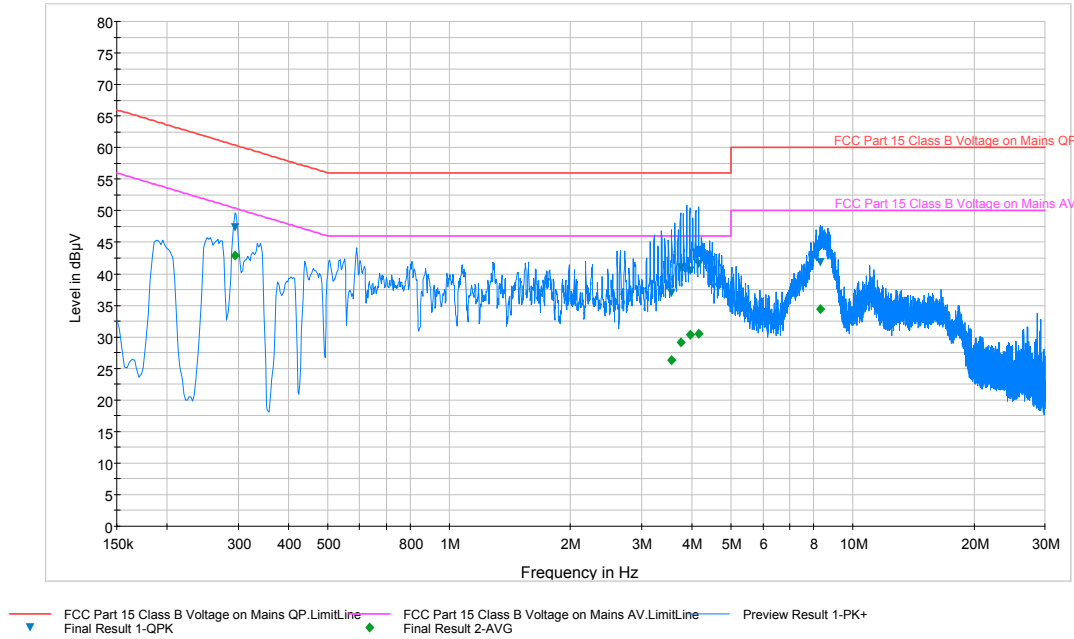§15.207; RSS-Gen [7.2.2]



Plot 6-83. Line Conducted Plot with 802.11a (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	47.40	60.40	13.00	42.90	50.40	7.50
3.561	L1	0.2	37.00	56.00	19.00	26.30	46.00	19.70
3.746	L1	0.2	41.10	56.00	14.90	29.20	46.00	16.80
3.950	L1	0.2	40.50	56.00	15.50	30.40	46.00	15.60
4.155	L1	0.2	41.50	56.00	14.50	30.40	46.00	15.60
8.336	L1	0.3	41.90	60.00	18.10	34.40	50.00	15.60

Table 6-28. Line Conducted Data with 802.11a (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 79 of 81

Line-Conducted Test Data (Cont'd)

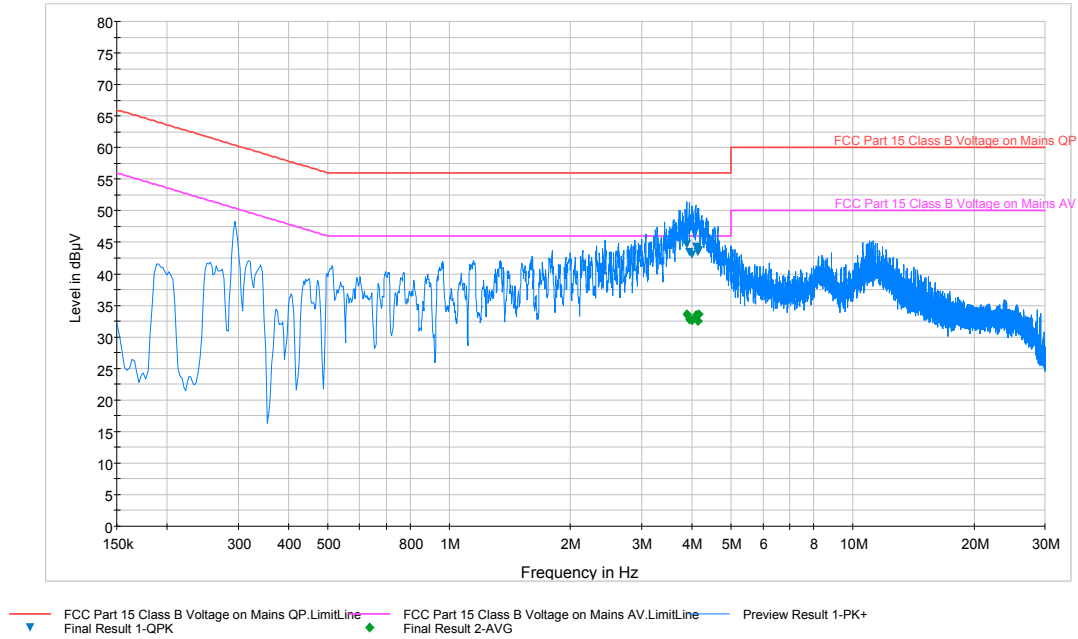§15.207; RSS-Gen [7.2.2]



Plot 6-84. Line Conducted Plot with 802.11a (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
3.887	N	0.2	44.60	56.00	11.40	33.70	46.00	12.30
3.935	N	0.2	43.40	56.00	12.60	32.80	46.00	13.20
3.998	N	0.2	43.00	56.00	13.00	32.60	46.00	13.40
4.088	N	0.2	44.20	56.00	11.80	33.50	46.00	12.50
4.142	N	0.2	43.40	56.00	12.60	32.60	46.00	13.40
4.162	N	0.2	43.80	56.00	12.20	33.60	46.00	12.40

Table 6-29. Line Conducted Data with 802.11a (N)



Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset		Page 80 of 81

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Motorola Portable Handset FCC ID: IHDT56PB3** is in compliance with Part 15C of the FCC Rules.

FCC ID: IHDT56PB3		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1305290918.IHD	Test Dates: 04/04 - 04/26/2013	EUT Type: Portable Handset	Page 81 of 81	