



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE**

**EMC LABORATORY**

**EMC TEST REPORT**

**TEST REPORT NUMBER – 25428-1 LTE**

The test results and statements contained herein relate only to the model(s) identified and tested. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature:

A handwritten signature in black ink that reads 'Albert J. Patapack'.

Name: Albert J. Patapack

Title: EMC Engineer

Date: June 27, 2013

This report must not be reproduced, except in full, without written approval from this laboratory.



2404

**Table of Contents**

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	4
Summary of Testing	4
General and Special Conditions	4
Equipment List	5
Measurement Procedures and Data	6
Radiated Power	6
Measurement results	7
Occupied Bandwidth	10
Measurement results	11
Band Edge Measurement	19
Measurement results	20
Spurious Emissions at Antenna Terminals	28
Measurement results	29
Field Strength of Spurious Emissions	45
Measurement results	46
Frequency Stability	52
Measurement results	53

**Test Report Details**

Tests Performed By: ADR Testing Service  
 Location Code: ADR LV  
 Motorola Mobility LLC  
 Product Safety and Compliance Group  
 600 North US Hwy 45  
 Libertyville, IL 60048  
 PH (847) 523-6167 Fax (847) 523-4538  
 FCC Registration Number: 316588  
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Mobility LLC  
 600 North US Hwy 45  
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 900/2100/1900/850, CDMA 1900/800,  
 GSM/EDGE 850/900/1800/1900, LTE Band 04/Band 13,  
 HSDPA 21.1 Mbps (Category 14), HSUPA 5.76 Mbps,  
 CDMA EV-DO Release A, GPRS Class 12, aGPS , NFC,  
 Bluetooth Class 2 Version 4.0 LE+EDR,  
 802.11b/802.11g/802.11a/802.11n

FCC ID: IHDT56PE1

Serial Numbers: LUME290019, LUME290021, LUME290002

Dates of Test: May 29 - June 26, 2013

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X   Part 2
- X   Part 27

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004, RSS-Gen Issue 3, RSS-132 Issue 3, RSS-133 Issue 6, RSS-139 Issue 2.

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	ERP (Effective Radiated Power)	Pass
2	EIRP (Effective Isotropic Radiated Power)	Pass
3	Occupied Bandwidth	Pass
4	Band Edge	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

This product utilizes an internal battery that is not removable. When applicable, EMC testing was performed with the internal battery fully charged. Where the internal battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

This product implements wireless charging capabilities based on the Wireless Power Consortium (WPC) protocol. Additional emissions tests were performed with the EUT placed on an appropriate wireless charging pad under normal operating conditions. The additional tests were performed per KDB 64847 D03 v01r02.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

**Equipment List**

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde & Schwarz	Receiver	ESIB26	838786/010	9/24/2013
Hewlett Packard	EMC Analyzer	E7405	US40240219	7/30/2013
Agilent	MXA Signal Analyzer	N9020A	US46470586	1/20/2014
Agilent	Signal Generator	83712A	3429A00286	4/10/2015
Agilent	Signal Generator	83623B	3844A00935	5/11/2014
ETS-Lindgren	Horn Antenna	3115	6222	7/26/2013
A. H. Systems	Horn Antenna	SAS 200/571	365	9/4/2013
ETS	Log-Periodic Antenna	3148	1188	9/6/2013
ETS	Biconical Antenna	3110B	3369	9/5/2013
TDK RF Solutions	Precision Log Periodic	PLP 3003C	130387	2/25/2014
Rohde & Schwarz	Wideband Communication Tester	CMW500	126211	7/27/2013
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
Thermotron	Environmental Chamber	S-4	31580	11/15/2013
Agilent	Power Meter	E4416A	GB41293258	7/15/2013
Agilent	Power Sensor	E9323A	US40412067	8/29/2013
Rohde & Schwarz	Amplifier	TS-PR18	100073	9/5/2013
LG	Wireless Charging Pad	WCP-700	A1102WP000279	NA
LG	AC Adaptor	WCA-D01WT	TA120008836	NA

Note that the Agilent power meter, the Signal Generator and the MXA signal analyzer are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

The FCC ID of the LG Wireless Charging Pad is BEJWCP700.

**RADIATED POWER**

§27.50 (b) (10), §27.50 (d) (4)

**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center 3 meters from the receive antenna. The antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain the same maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The EUT was tested in all configurations and the highest power level is reported.

All measurements were performed per KDB 971168 DO1 Power Meas License Digital Systems v02r01. Section 5.2.1 was used for LTE ERP/EIRP measurements.


**Measurement Results**

Band	BW	Modulation	RB Size/Offset	EIRP dBm	Limit dBm	
Band 4	20	QPSK	1/50	25.01	30.00	
	15	QPSK	1/37	24.08	30.00	
	10	QPSK	1/25	24.13	30.00	
	5	QPSK	1/12	24.24	30.00	
	3	QPSK	1/7	24.30	30.00	
	1.4	QPSK	1/3	24.40	30.00	
	20	16 QAM	1/50	23.40	30.00	
	15	16 QAM	1/37	22.56	30.00	
	10	16 QAM	1/25	22.55	30.00	
	5	16 QAM	1/12	22.65	30.00	
	3	16 QAM	1/7	22.77	30.00	
	1.4	16 QAM	1/3	22.73	30.00	


Band	BW	Modulation	RB Size/Offset	ERP dBm	Limit dBm	
Band 13	10	QPSK	1/25	18.53	34.77	
	5	QPSK	1/12	18.74	34.77	
	10	16 QAM	1/25	15.44	34.77	
	5	16 QAM	1/12	15.66	34.77	

The CCDF plots are also shown below. The conducted port of the EUT is connected to the spectrum analyzer. The spectrum analyzer’s Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.


The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

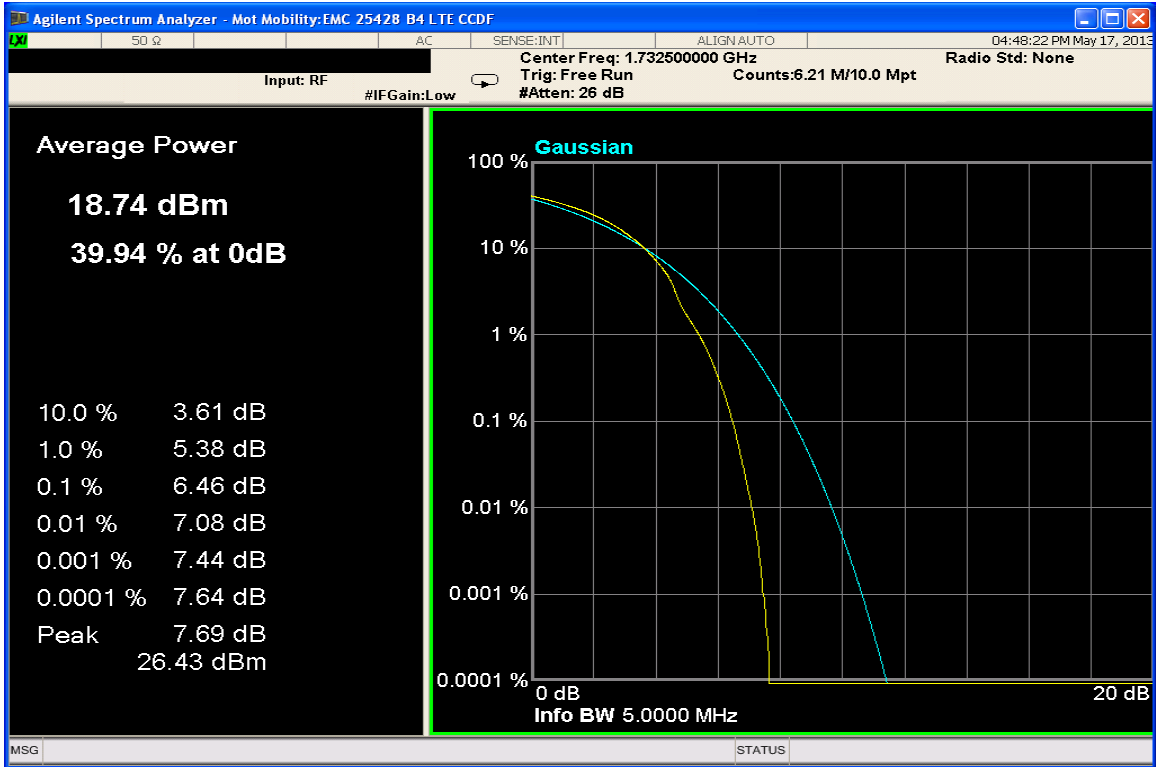


**LTE Band 4 CCDF Plot - 20 MHz BW, QPSK RB Size = 100 RB Start 0**

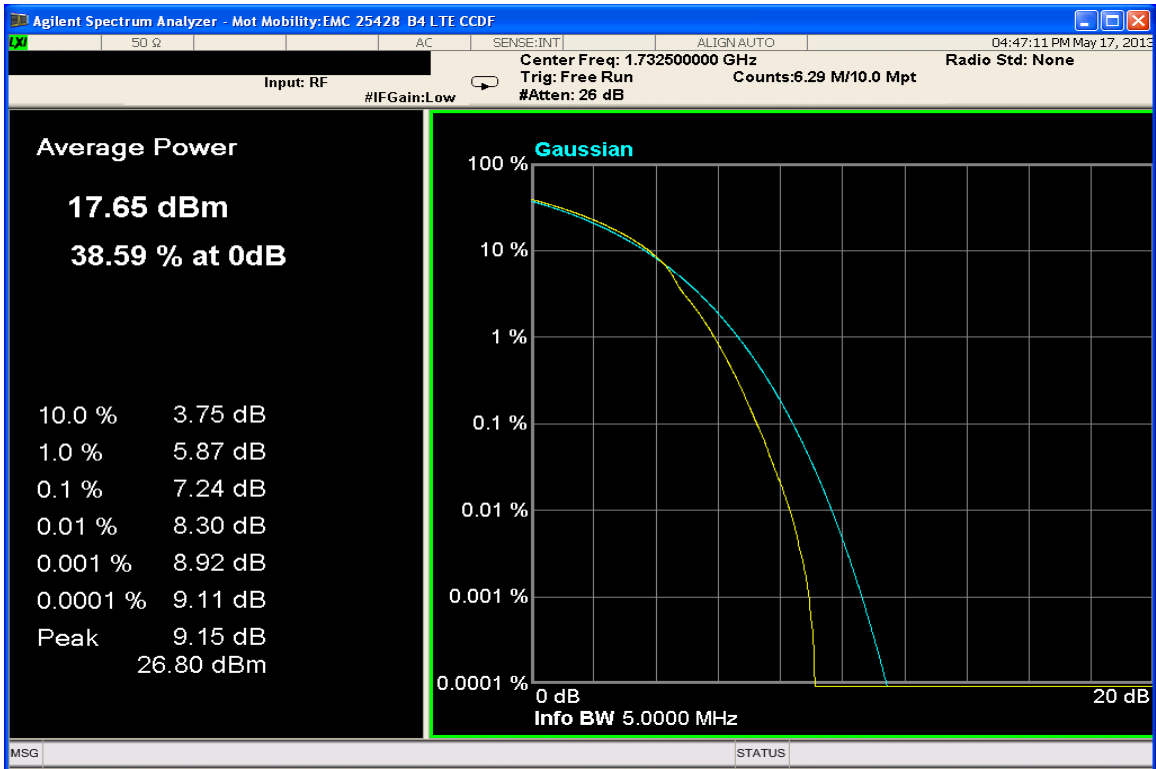

**LTE Band 4 CCDF Plot - 20 MHz BW, 16-QAM RB Size = 100 RB Start 0**

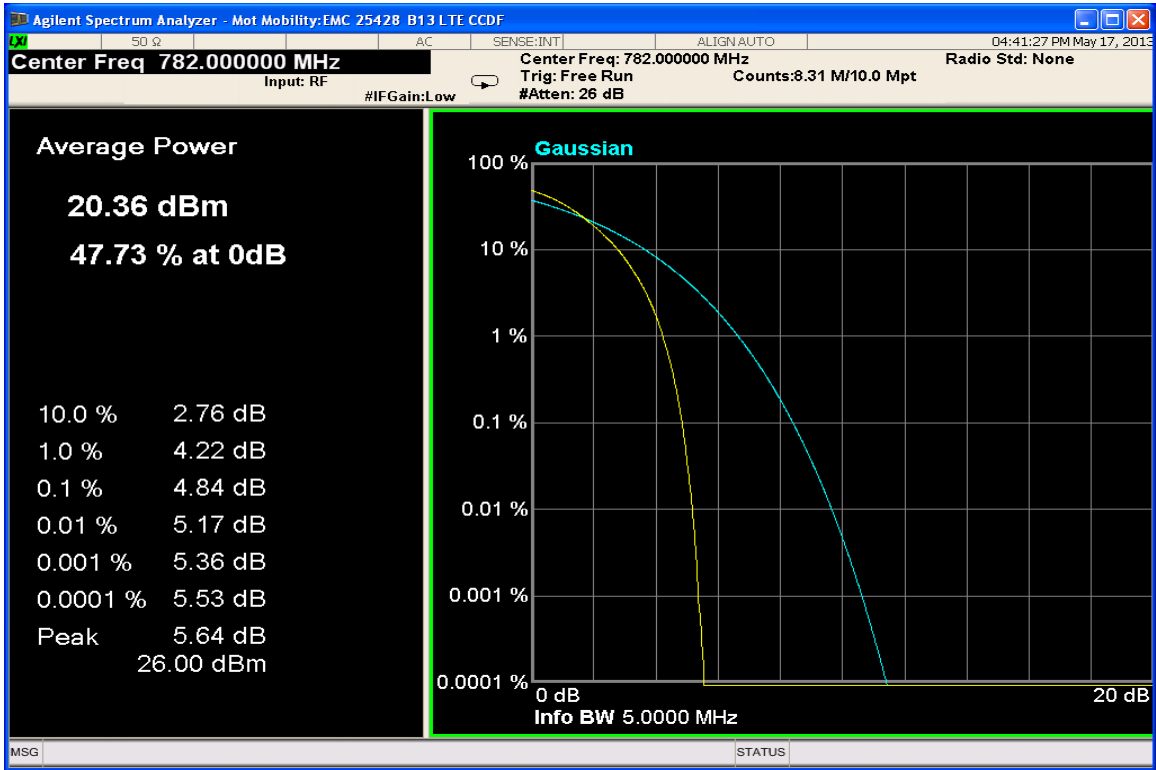

**LTE Band 13 CCDF Plot - 10 MHz BW, QPSK RB Size = 50 RB Start 0**

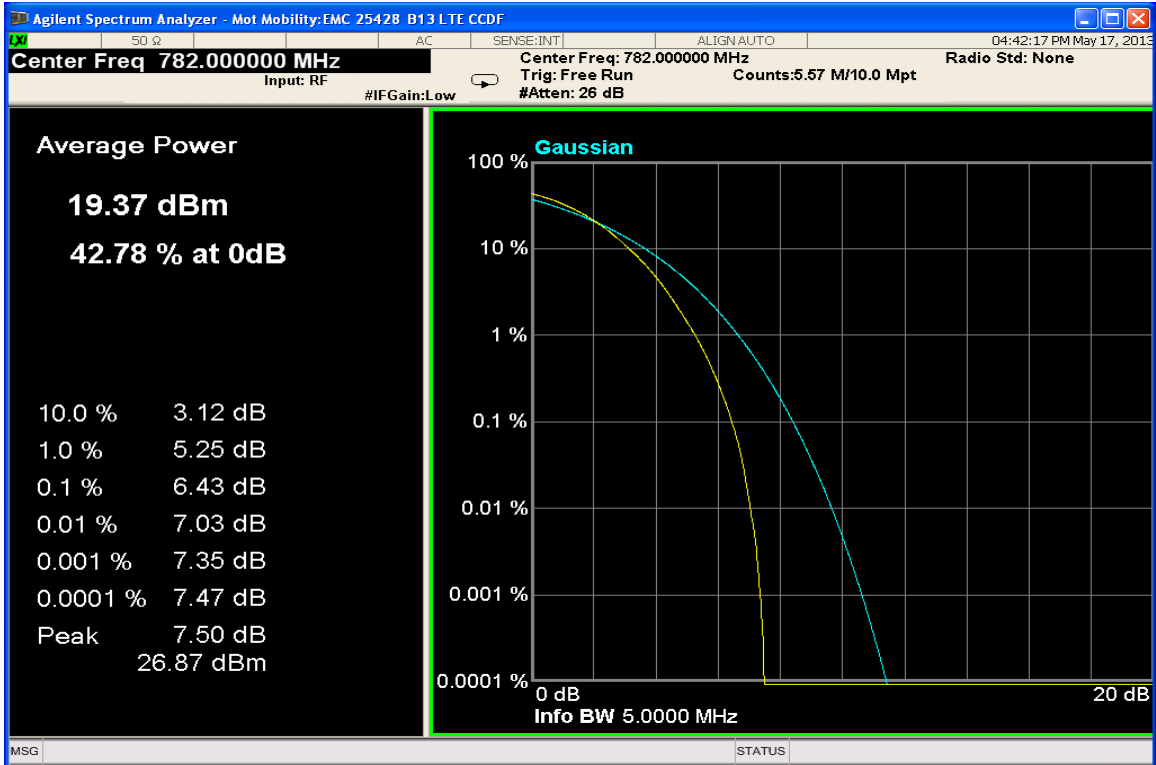

**LTE Band 13 CCDF Plot - 10 MHz BW, 16-QAM RB Size = 50 RB Start 0**

**OCCUPIED BANDWIDTH**

§ 2.1049

**Measurement Procedure**


The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The spectrum analyzer's Occupied Bandwidth measurement profile is used to determine the occupied bandwidth. The fully charged internal battery was used for the supply voltage.

The EUT was tested under all configurations and modulations.


**Measurement Results**

Attached


**Measurement Results: LTE Band 4 QPSK & 16-QAM Occupied Bandwidth**

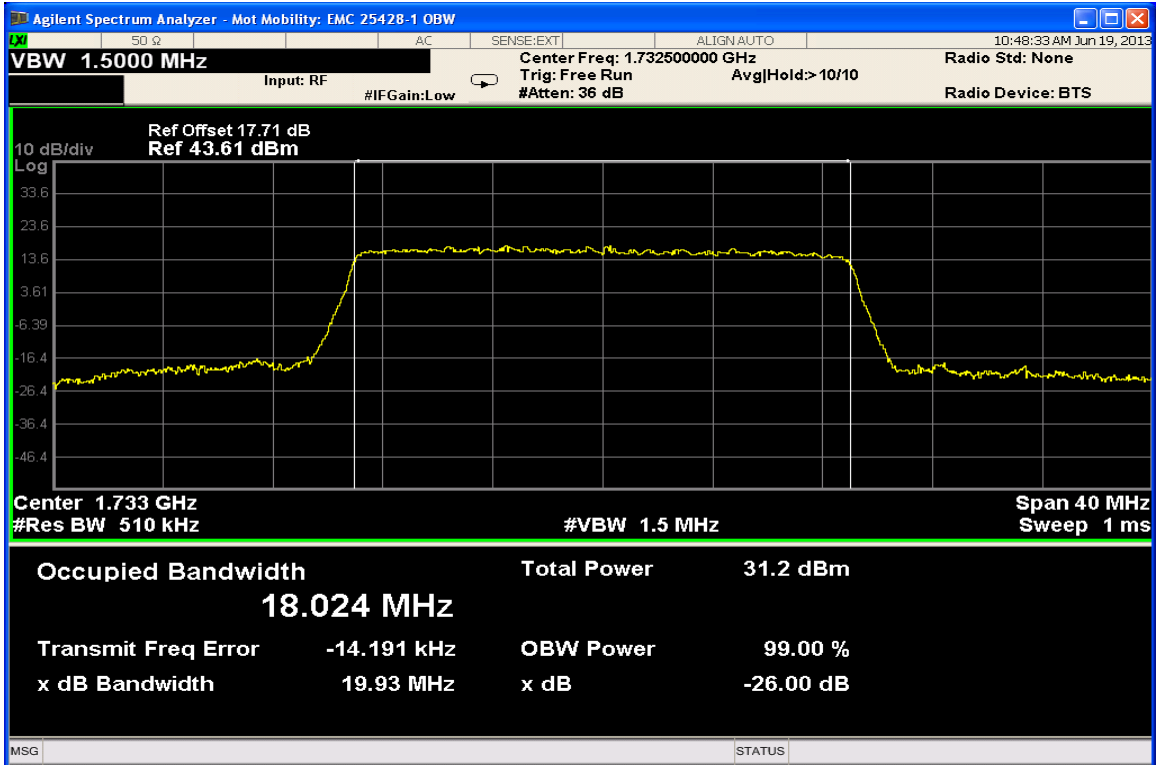


**Band 4 LTE – 20 MHz BW, QPSK RB Size = 100 RB Start 0**

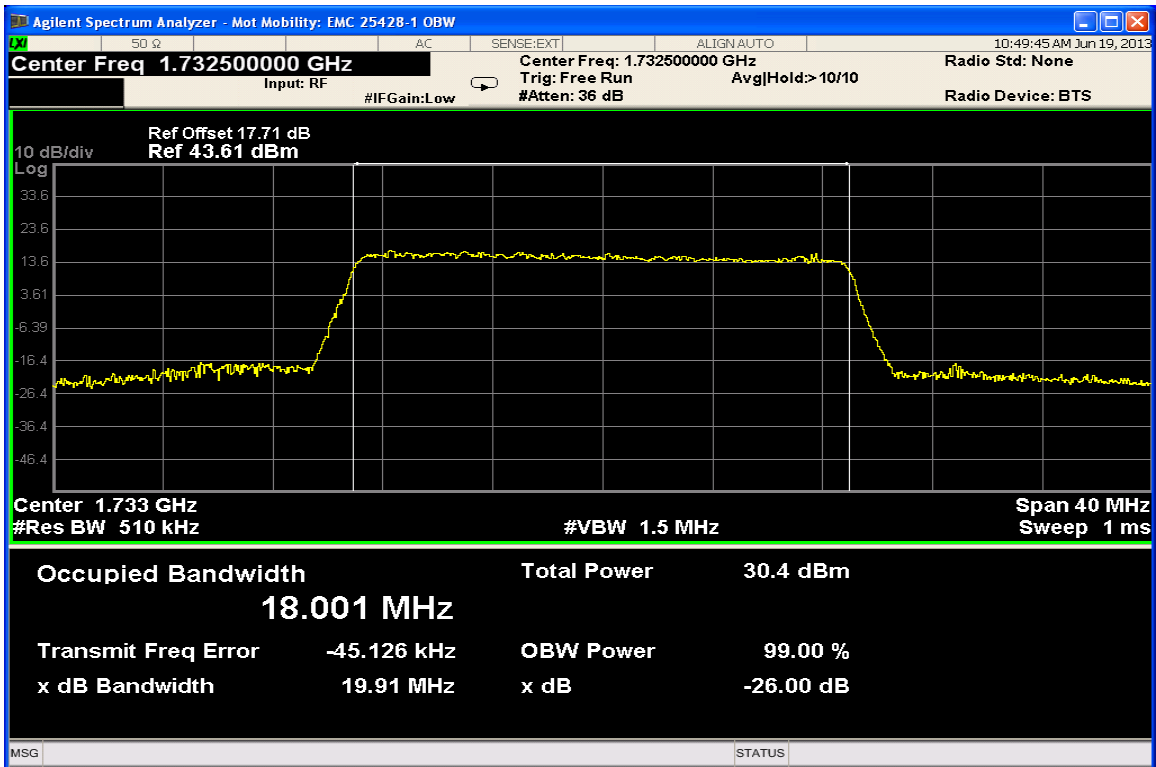


**Band 4 LTE – 20 MHz BW, 16-QAM RB Size = 100 RB Start 0**

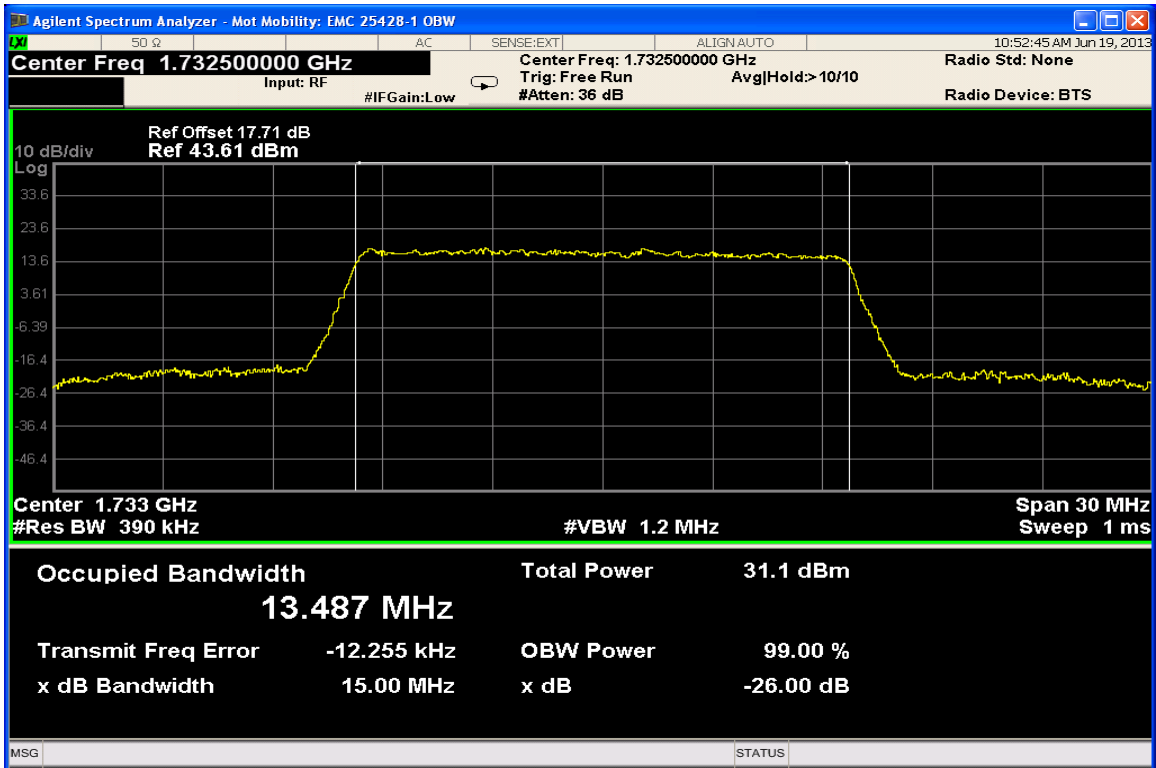


**Band 4 LTE – 15 MHz BW, QPSK RB Size = 75 RB Start 0**

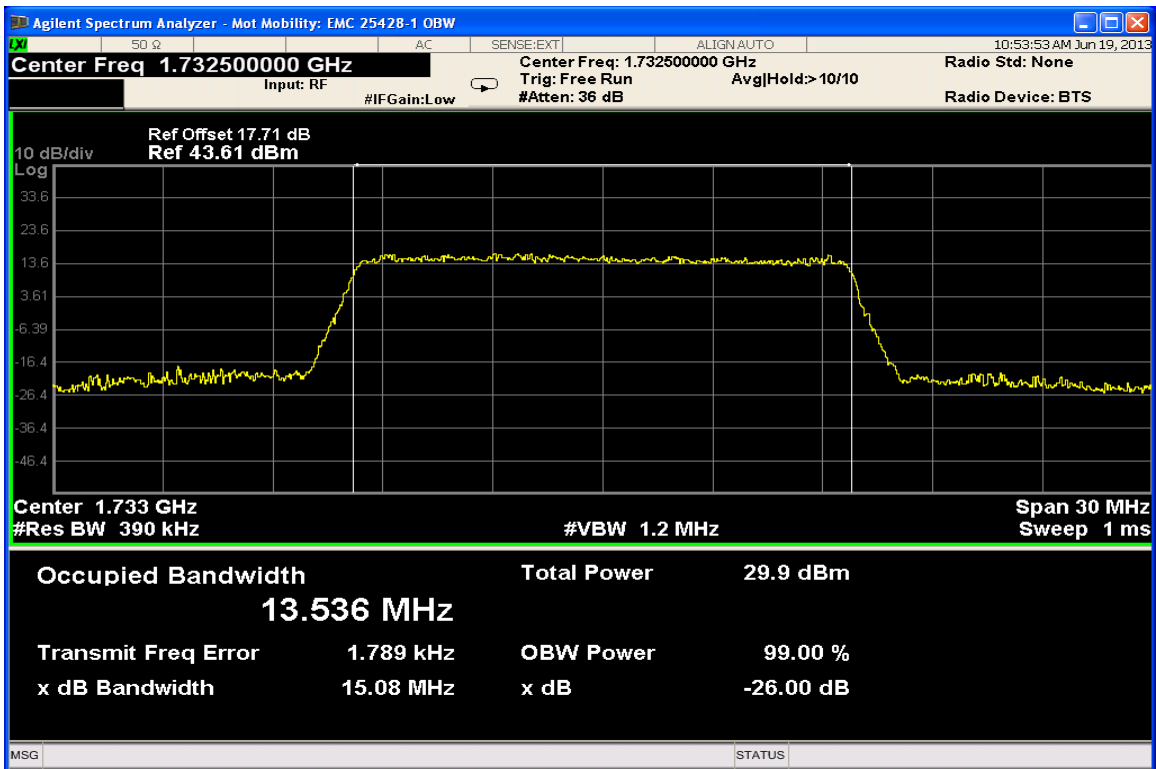


**Band 4 LTE – 15 MHz BW, 16QAM RB Size = 75 RB Start 0**

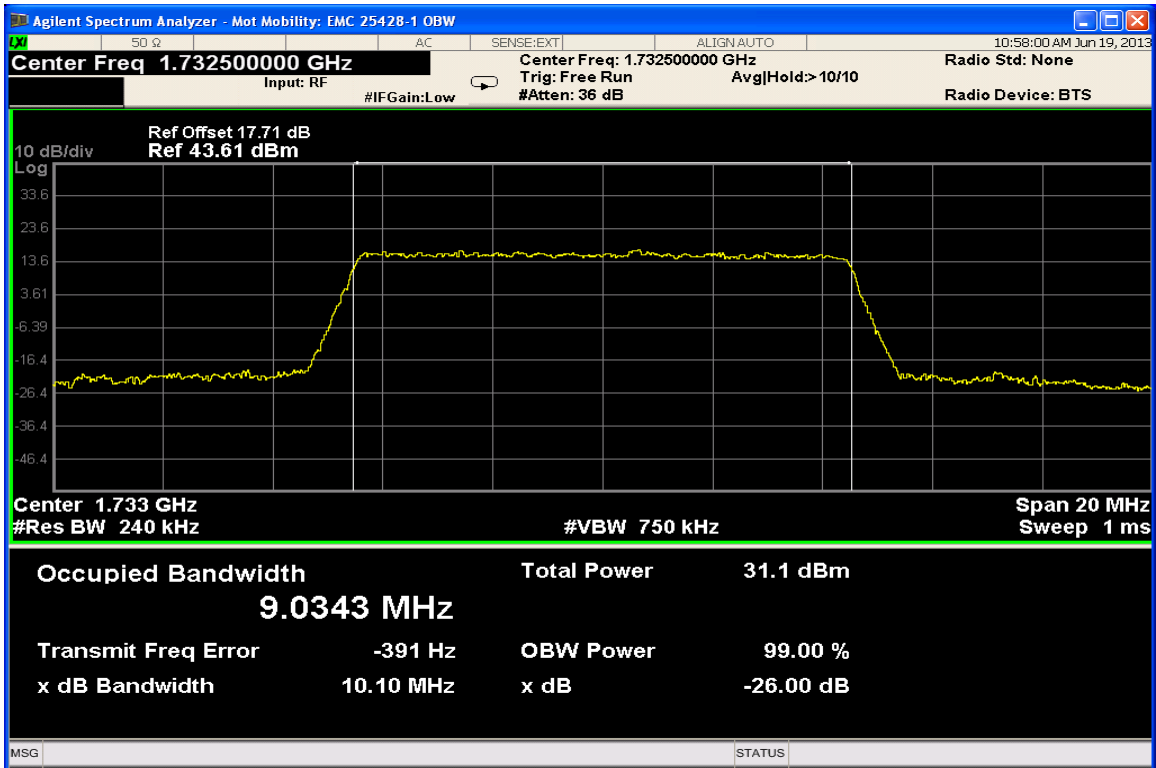


**Band 4 LTE – 10 MHz BW, QPSK RB Size = 50 RB Start 0**

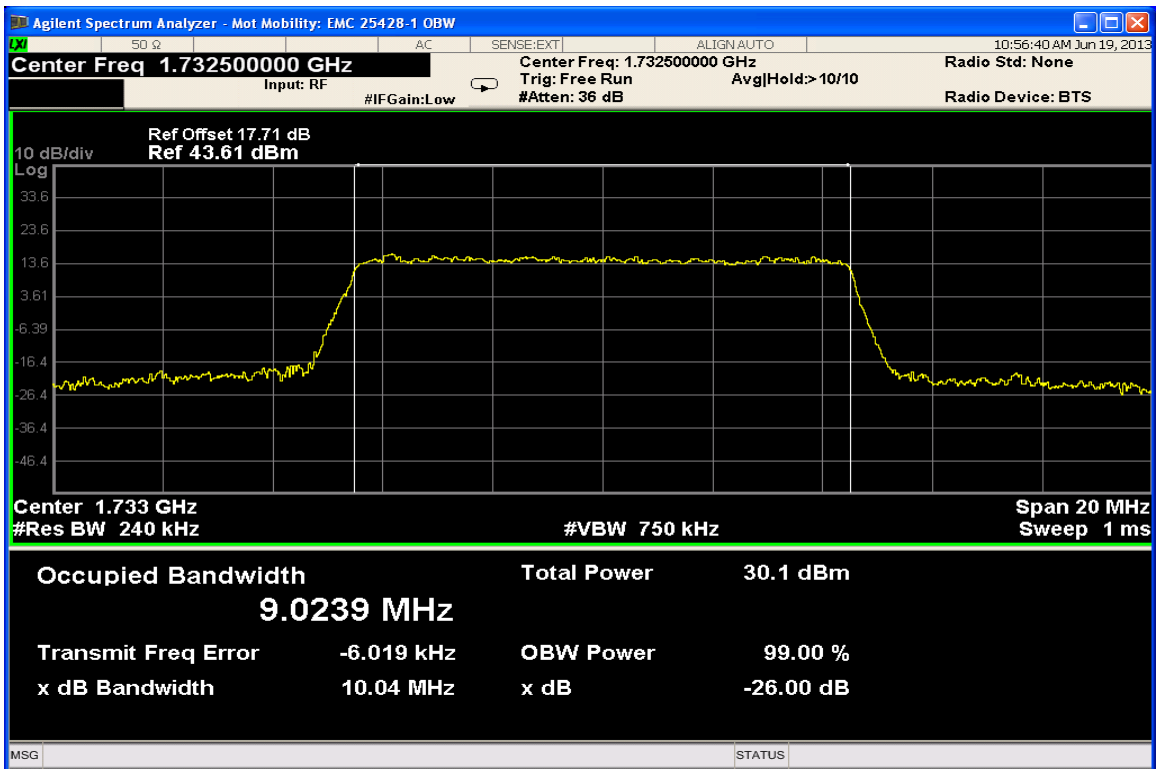


**Band 4 LTE – 10 MHz BW, 16QAM RB Size = 50 RB Start 0**

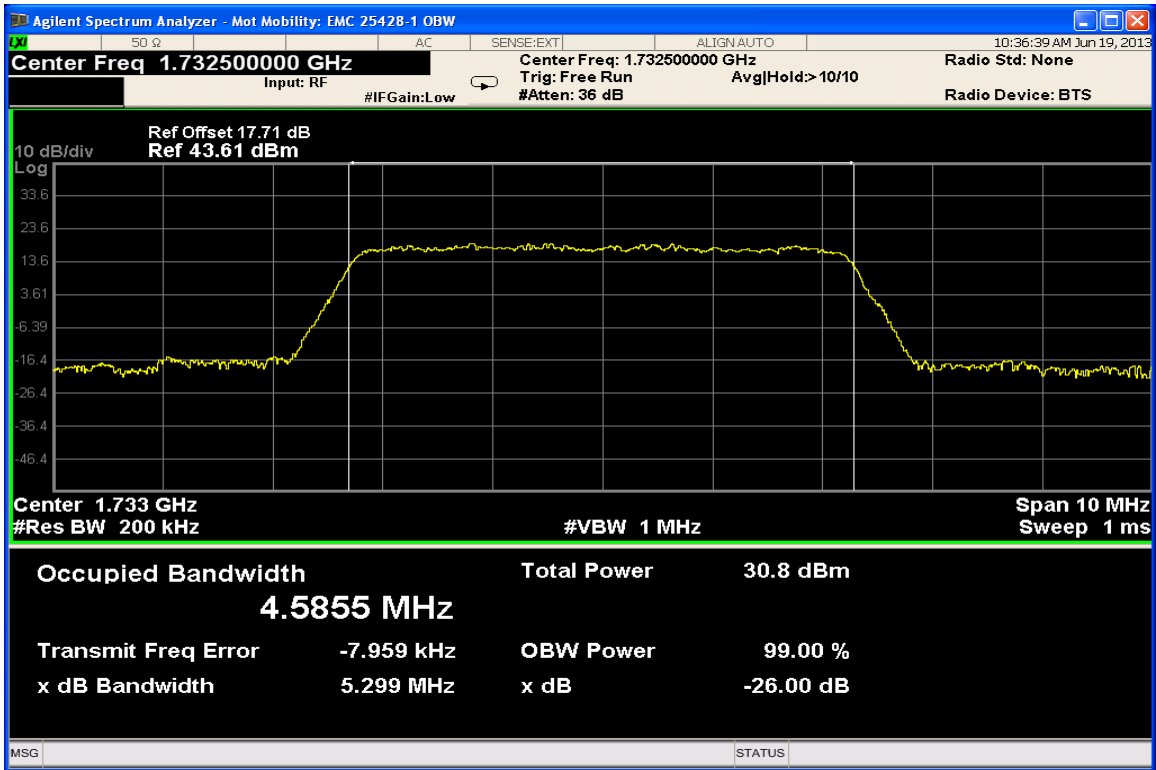


**Band 4 LTE – 5 MHz BW, QPSK RB Size = 25 RB Start 0**

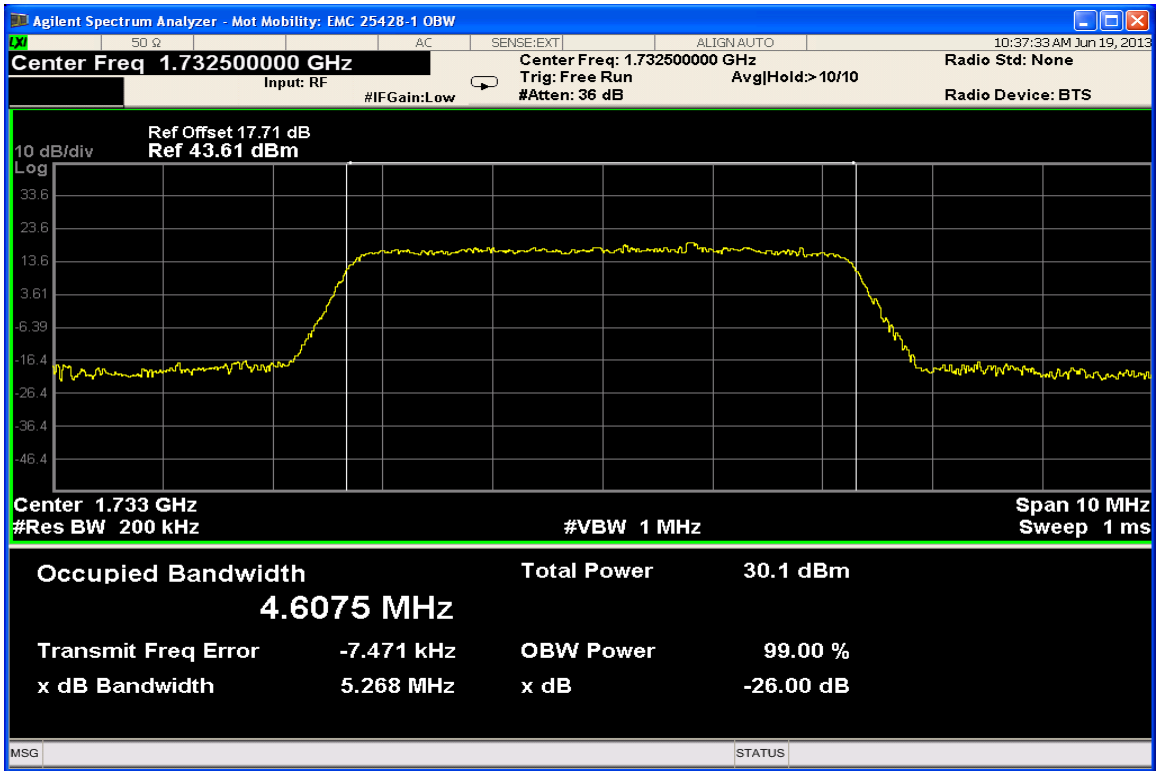


**Band 4 LTE – 5 MHz BW, 16QAM RB Size = 25 RB Start 0**

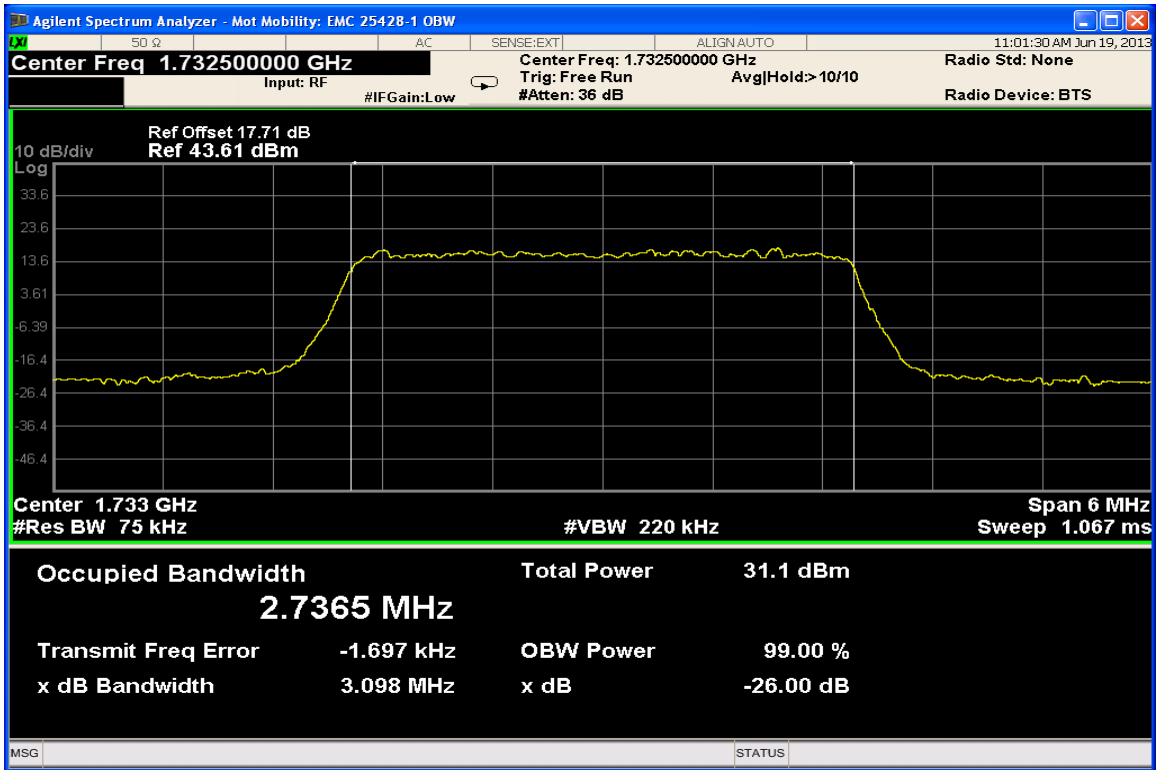


**Band 4 LTE – 3 MHz BW, QPSK RB Size = 15 RB Start 0**

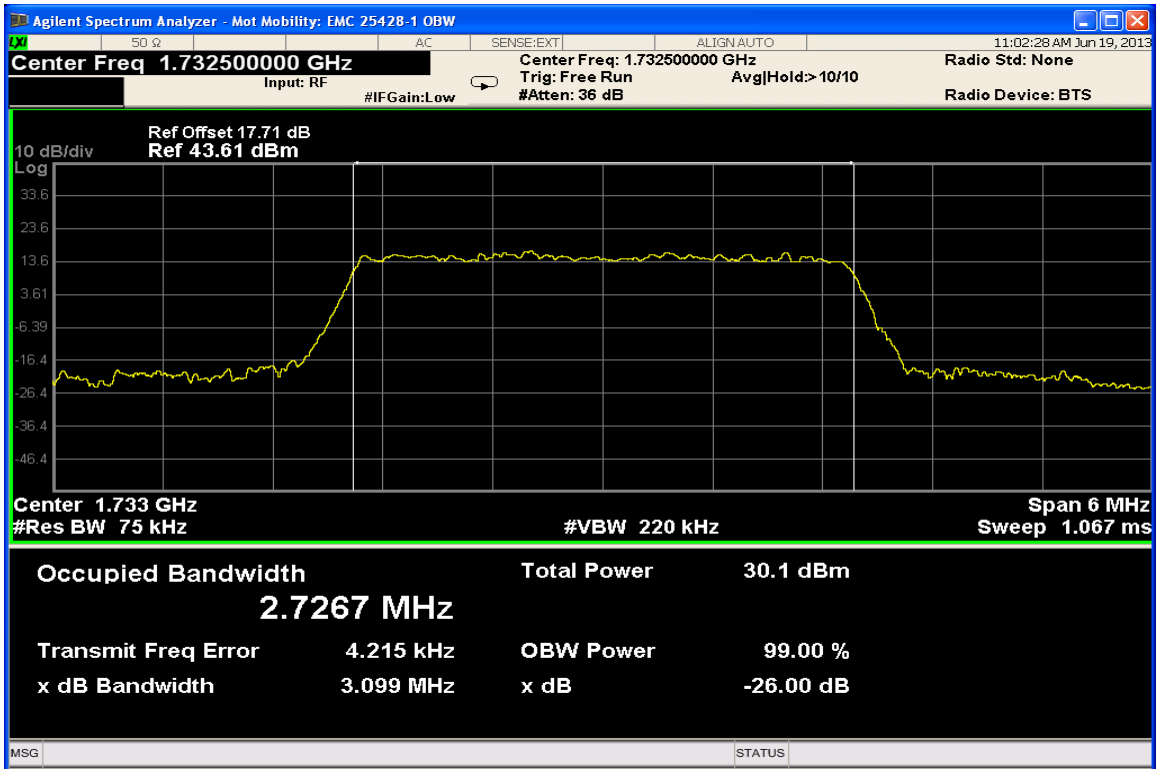

**Band 4 LTE – 3 MHz BW, 16QAM RB Size = 15 RB Start 0**

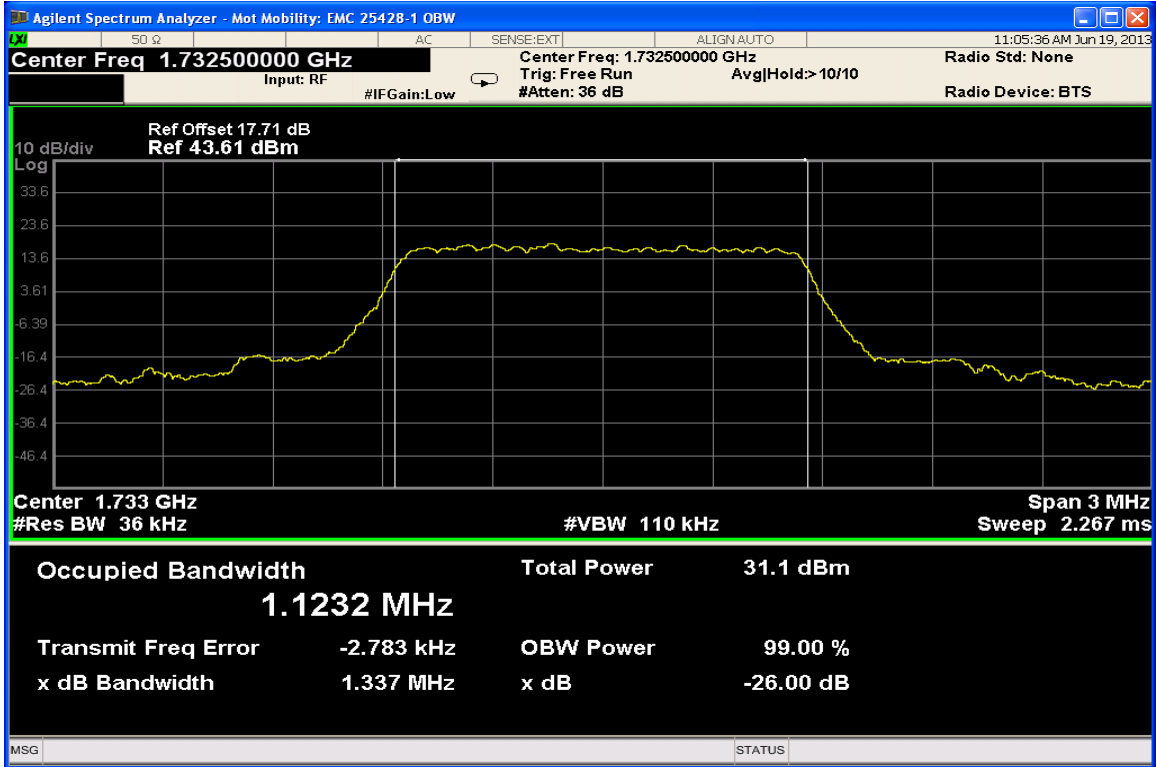


**Band 4 LTE – 1.4 MHz BW, QPSK RB Size = 6 RB Start 0**

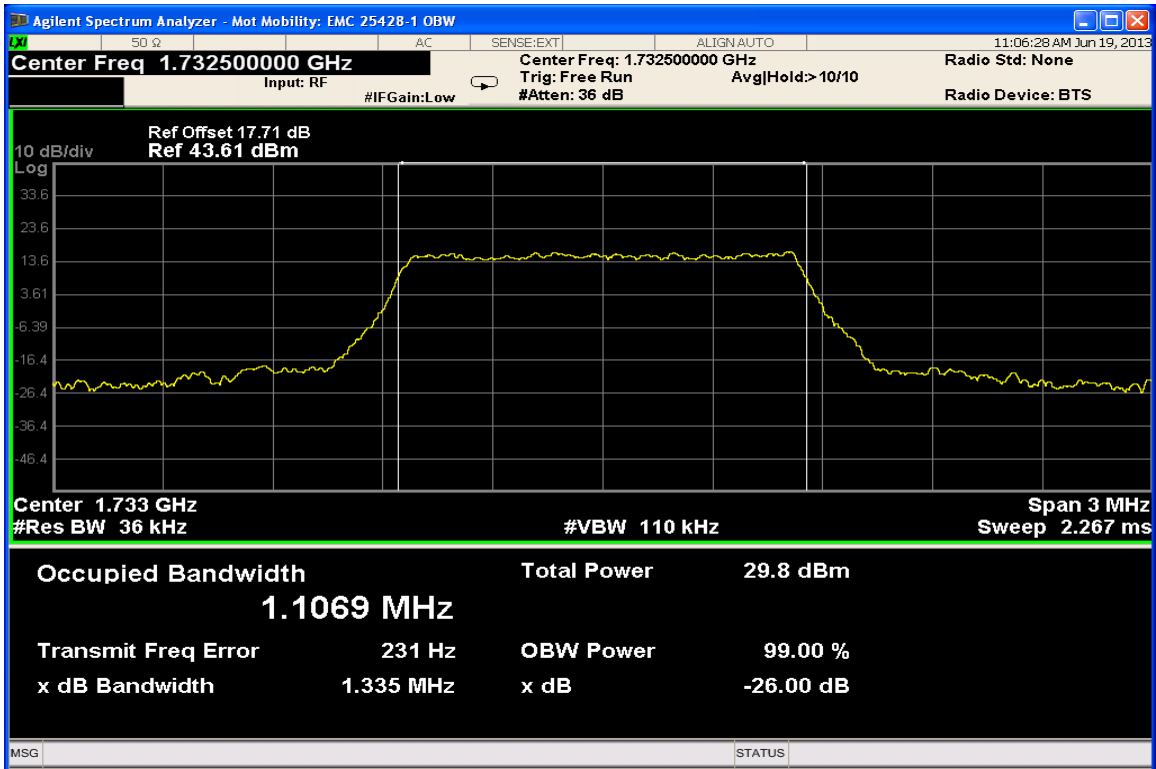


**Band 4 LTE – 1.4 MHz BW, 16QAM RB Size = 6 RB Start 0**


**Measurement Results: LTE Band 13 QPSK & 16-QAM Occupied Bandwidth**

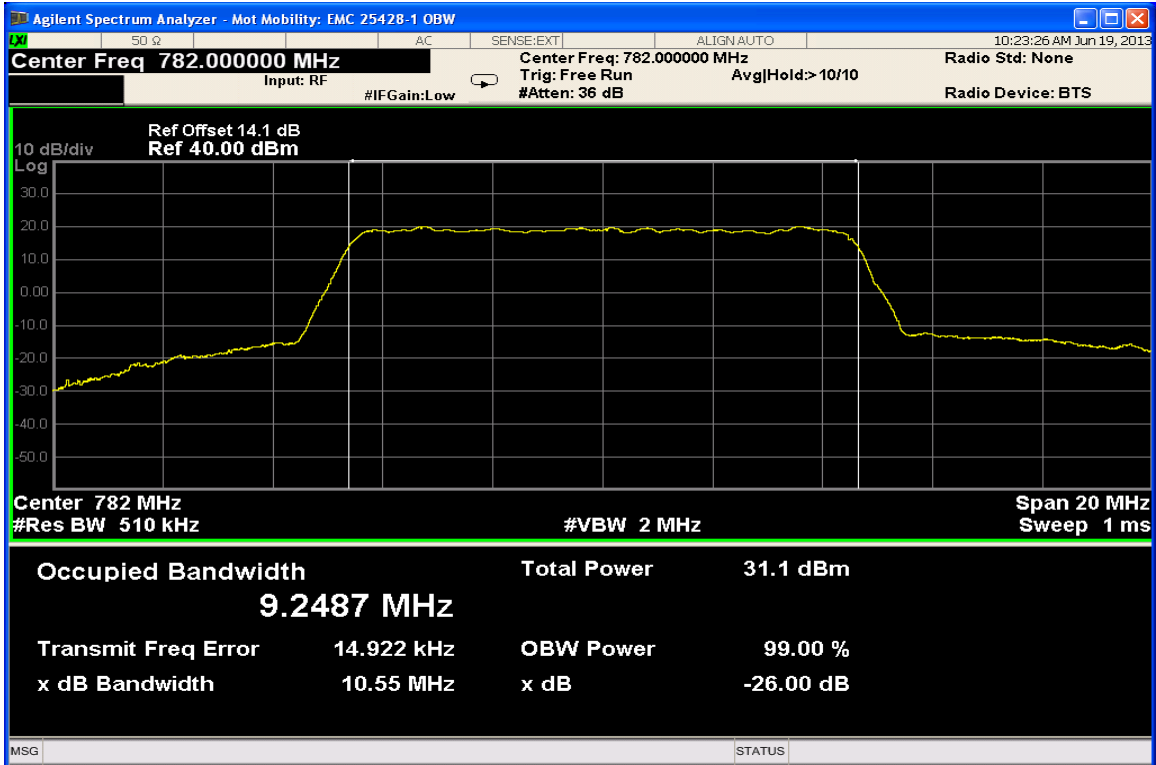


**Band 13 LTE – 10 MHz BW, QPSK RB Size = 50 RB Start 0**

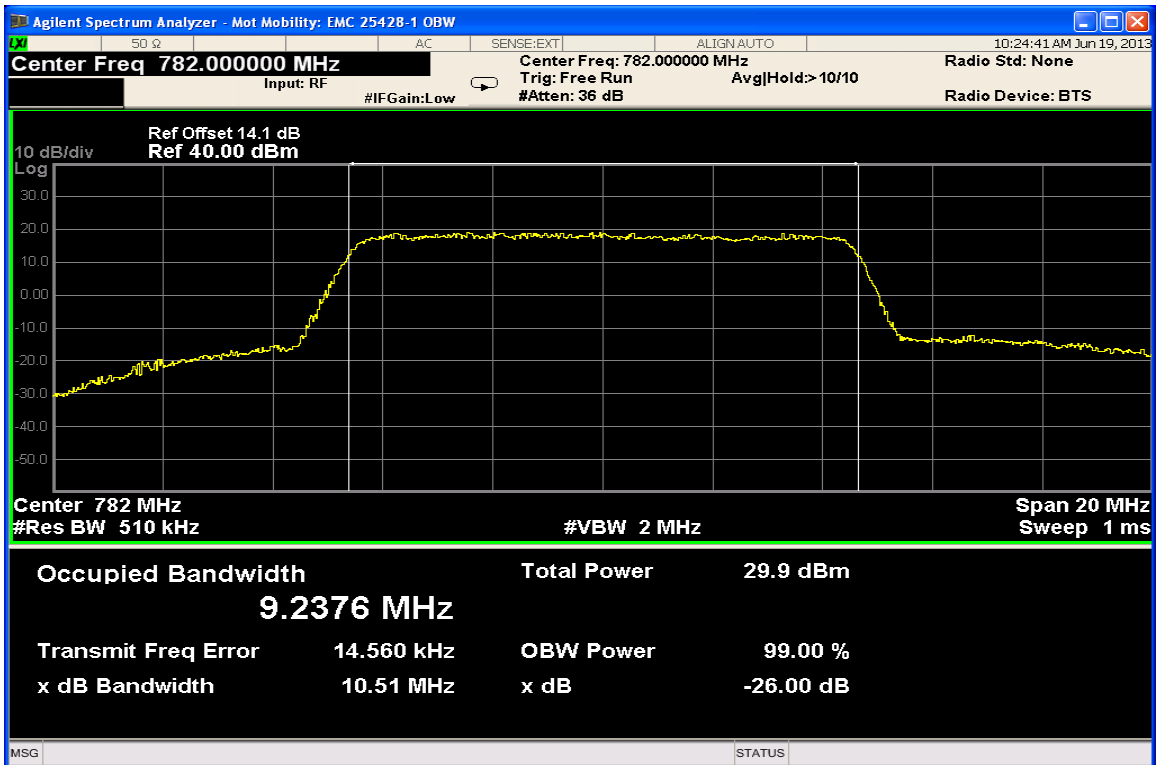

**Band 13 LTE – 10 MHz BW, 16QAM RB Size = 50 RB Start 0**

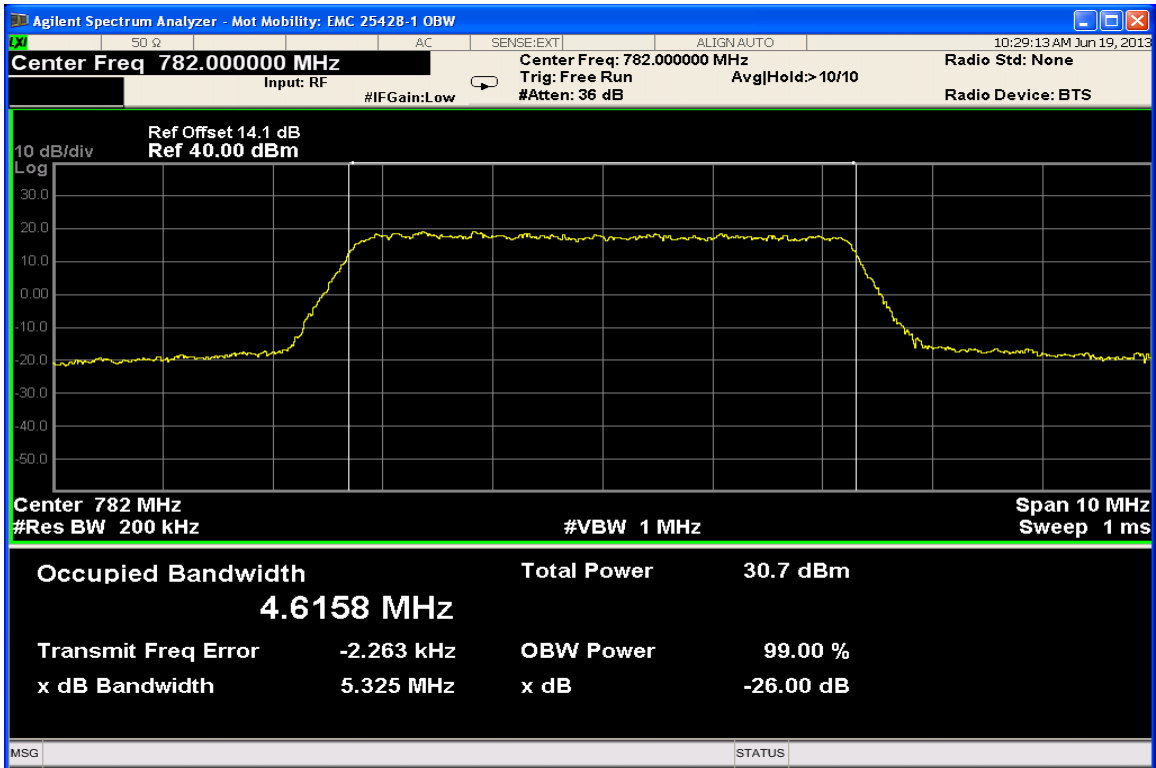

Band 13 LTE – 5 MHz BW, QPSK RB Size = 25 RB Start 0

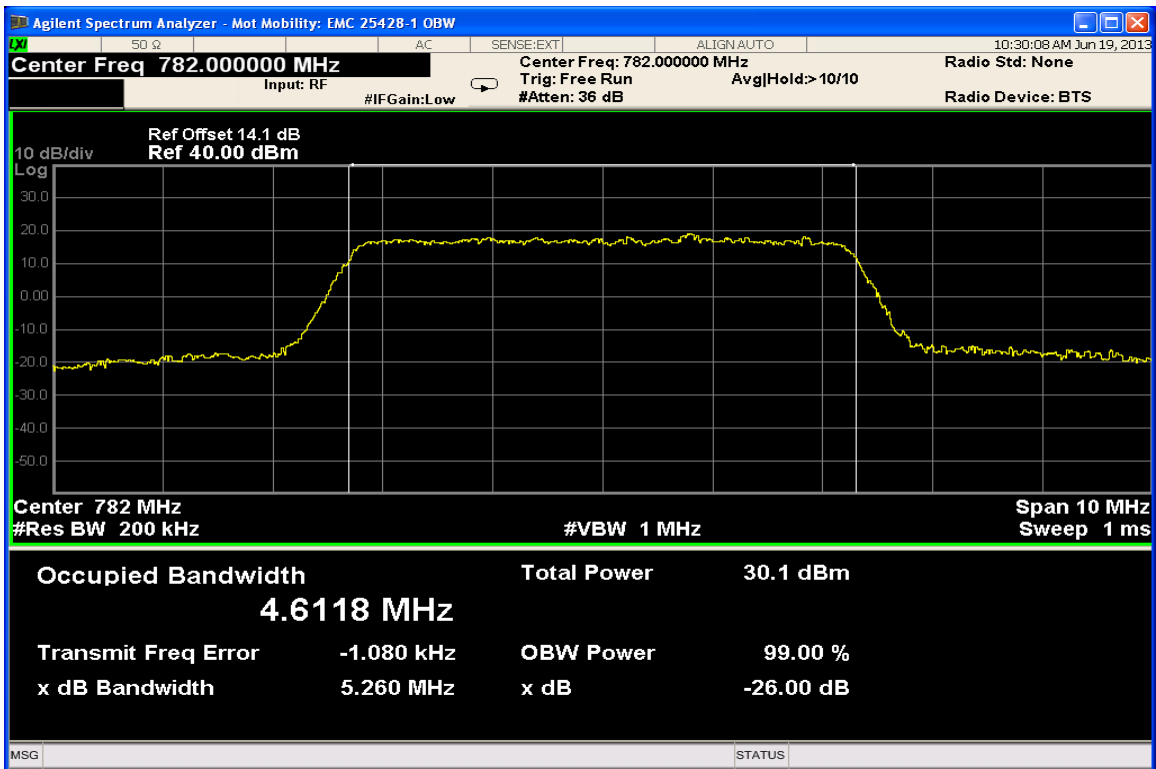

Band 13 LTE – 5 MHz BW, 16QAM RB Size = 25 RB Start 0

**BAND EDGE MEASUREMENTS**

§27.53 (c) (4), §27.53 (h)

**Measurement Procedure**

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Average Detector and each trace is set for Max Hold. The fully charged internal battery was used for the supply voltage.

(c) (4) For operations in the 763-775 MHz and 793-805 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.


(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

The EUT was tested in the all bandwidths and both modulations in each band and the worst case plots are reported below.


Measurement Results

Attached


**Measurement Results: Band 4 Low and High Band Edge**

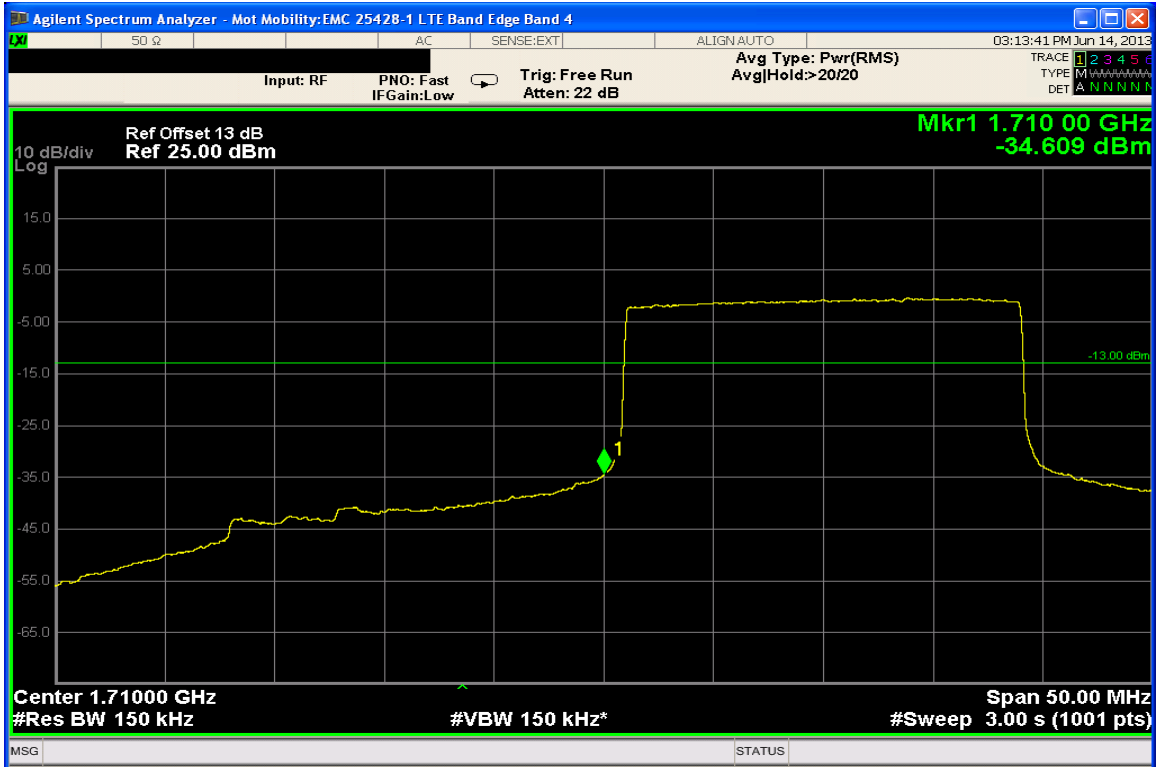


**Band 4 LTE – 20 MHz BW, QPSK RB Size = 100 RB Start 0**

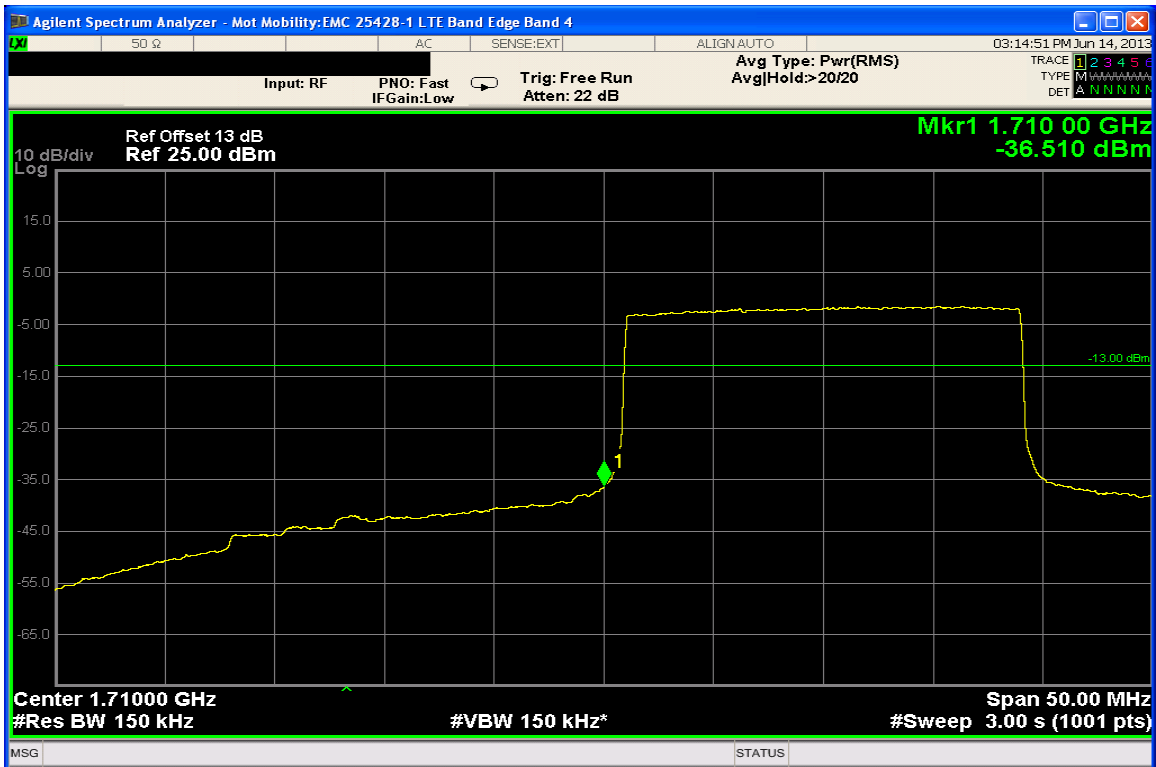


**Band 4 LTE – 20 MHz BW, 16-QAM RB Size = 100 RB Start 0**

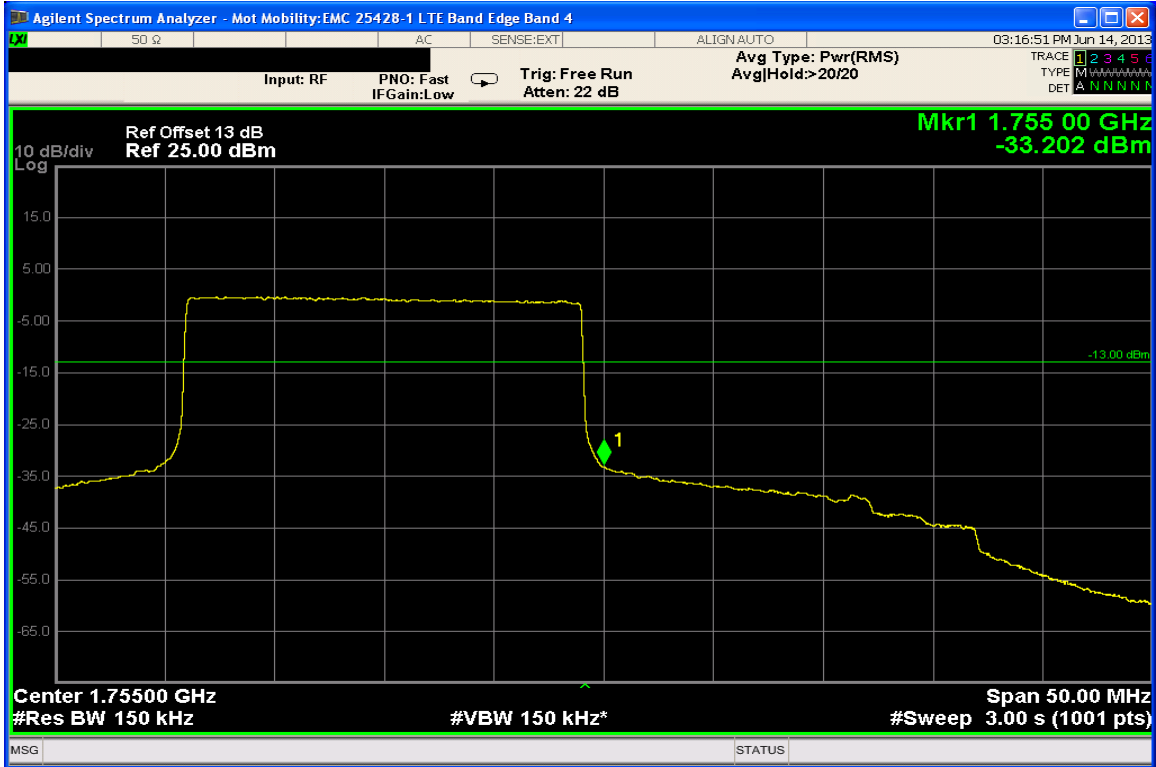


**Band 4 LTE – 20 MHz BW, QPSK RB Size = 100 RB Start 0**

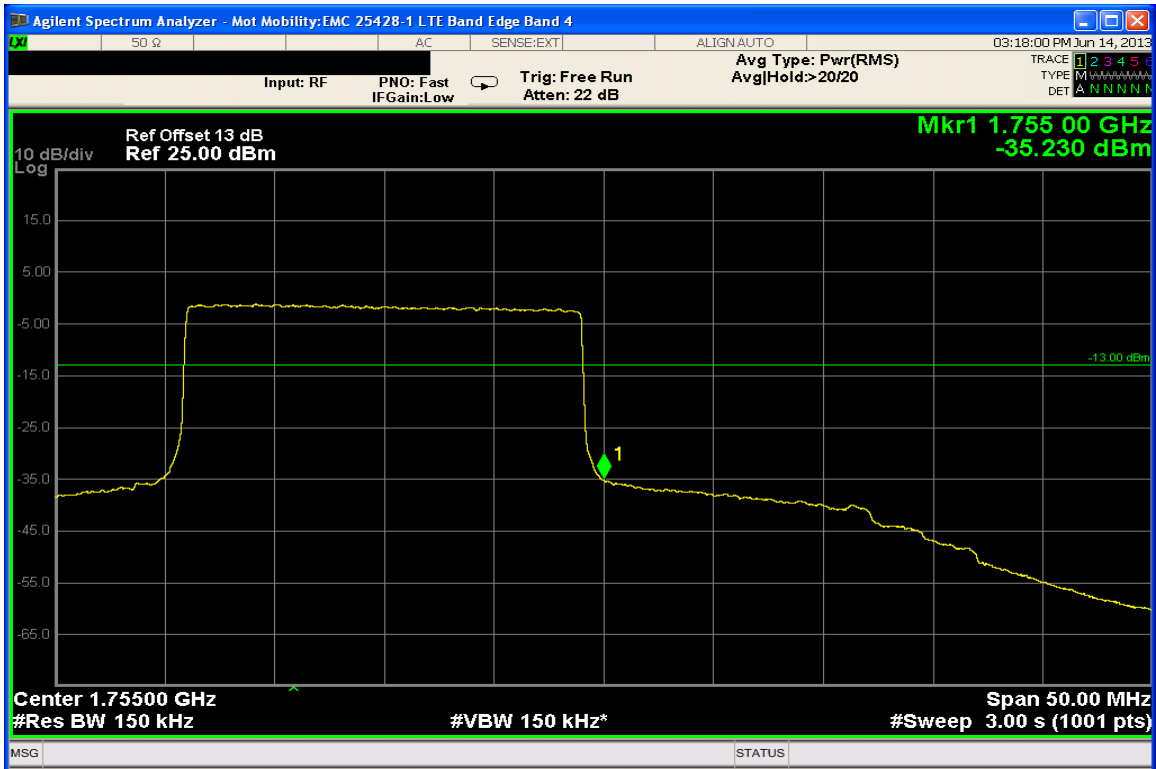


**Band 4 LTE – 20 MHz BW, 16-QAM RB Size = 100 RB Start 0**

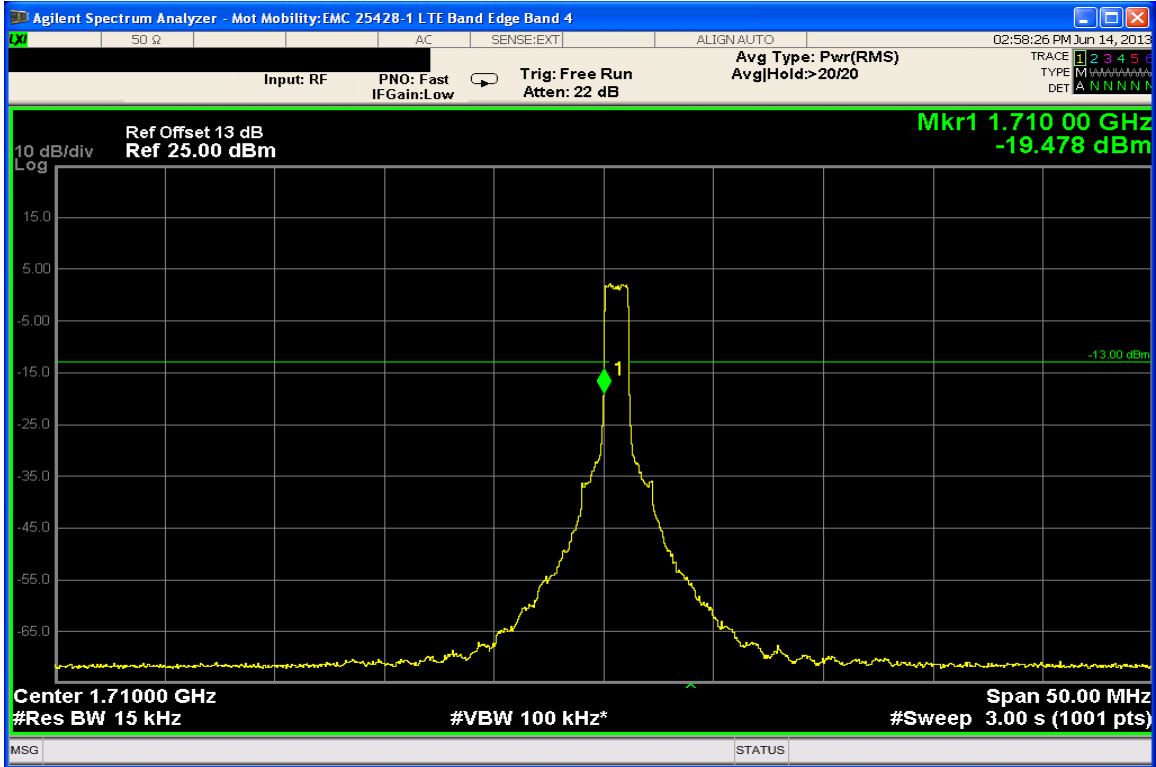


**Band 4 LTE – 1.4 MHz BW, QPSK RB Size = 6 RB Start 0**

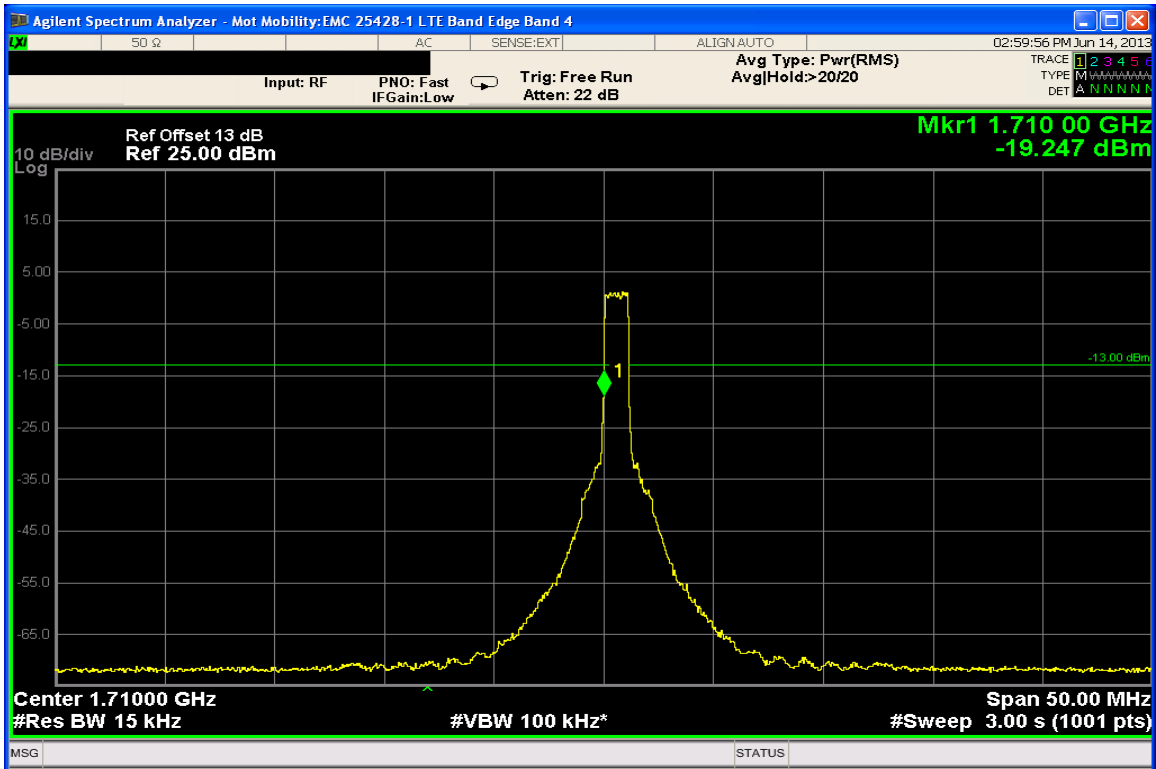

**Band 4 LTE – 1.4 MHz BW, 16-QAM RB Size = 6 RB Start 0**

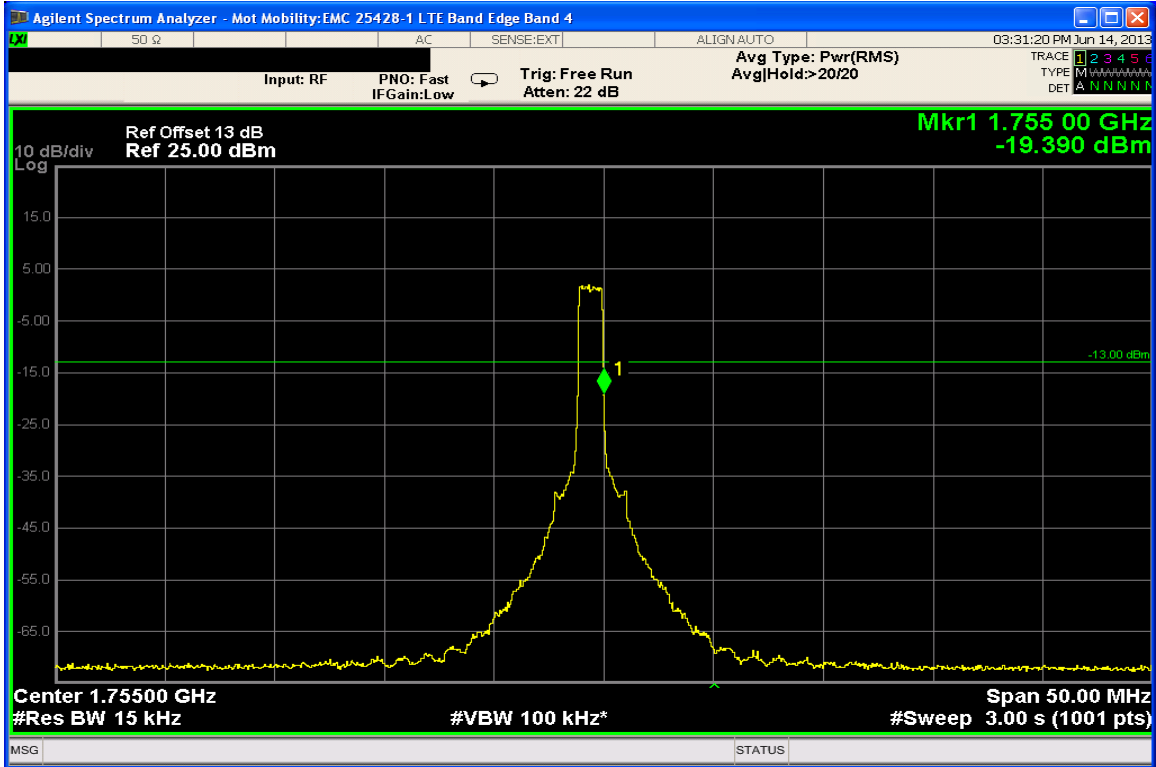


**Band 4 LTE – 1.4 MHz BW, QPSK RB Size = 6 RB Start 0**

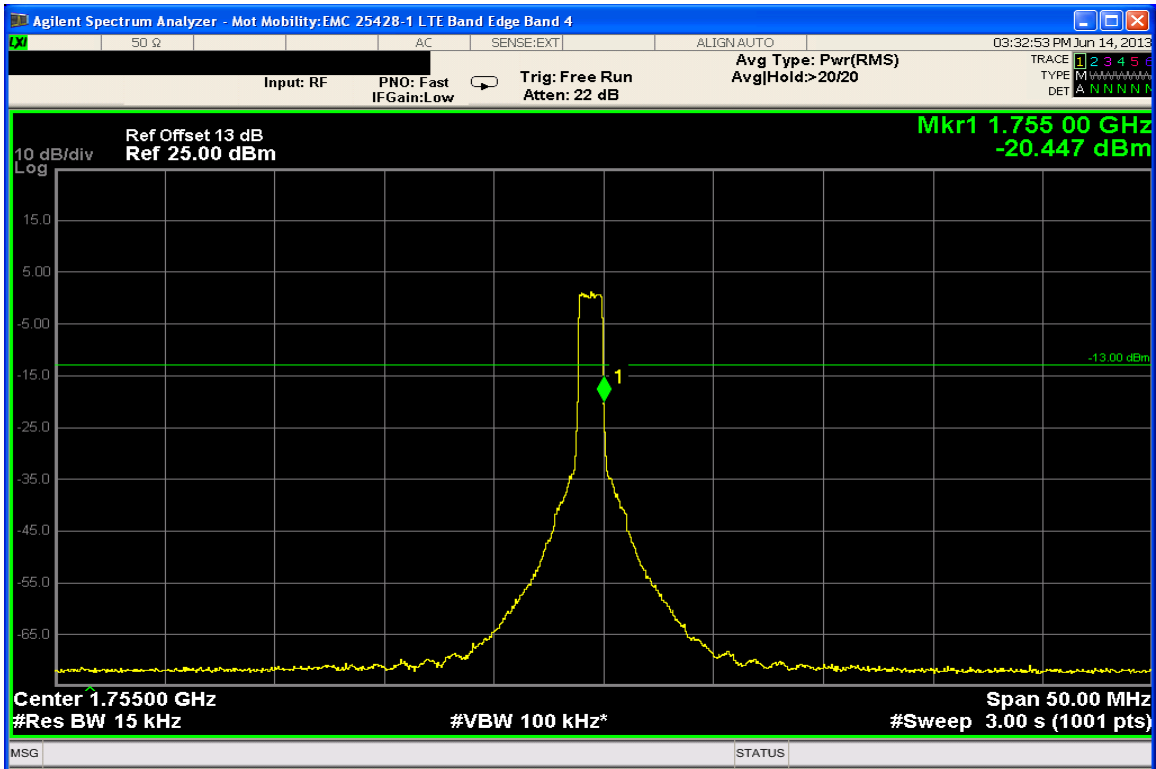


**Band 4 LTE – 1.4 MHz BW, 16-QAM RB Size = 6 RB Start 0**


**Measurement Results: Band 13 Low and High Band Edge**

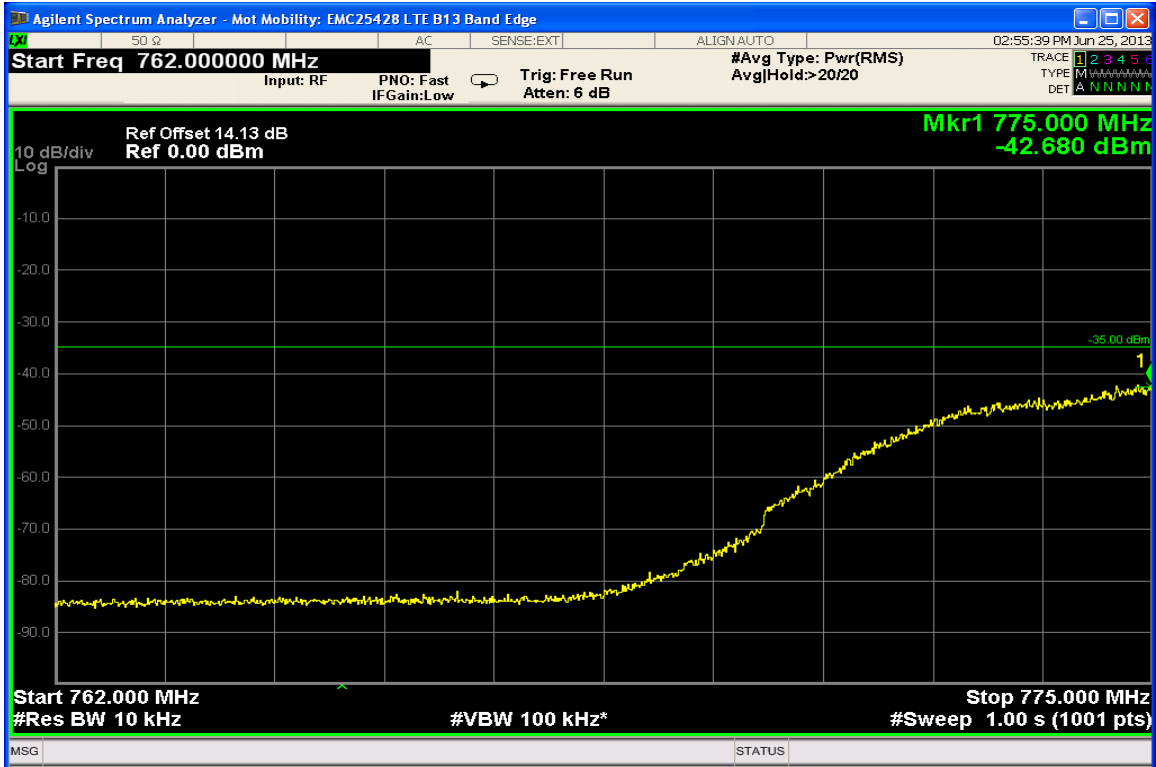


**Band 13 LTE – 10 MHz BW, QPSK RB Size = 50 RB Start 0**

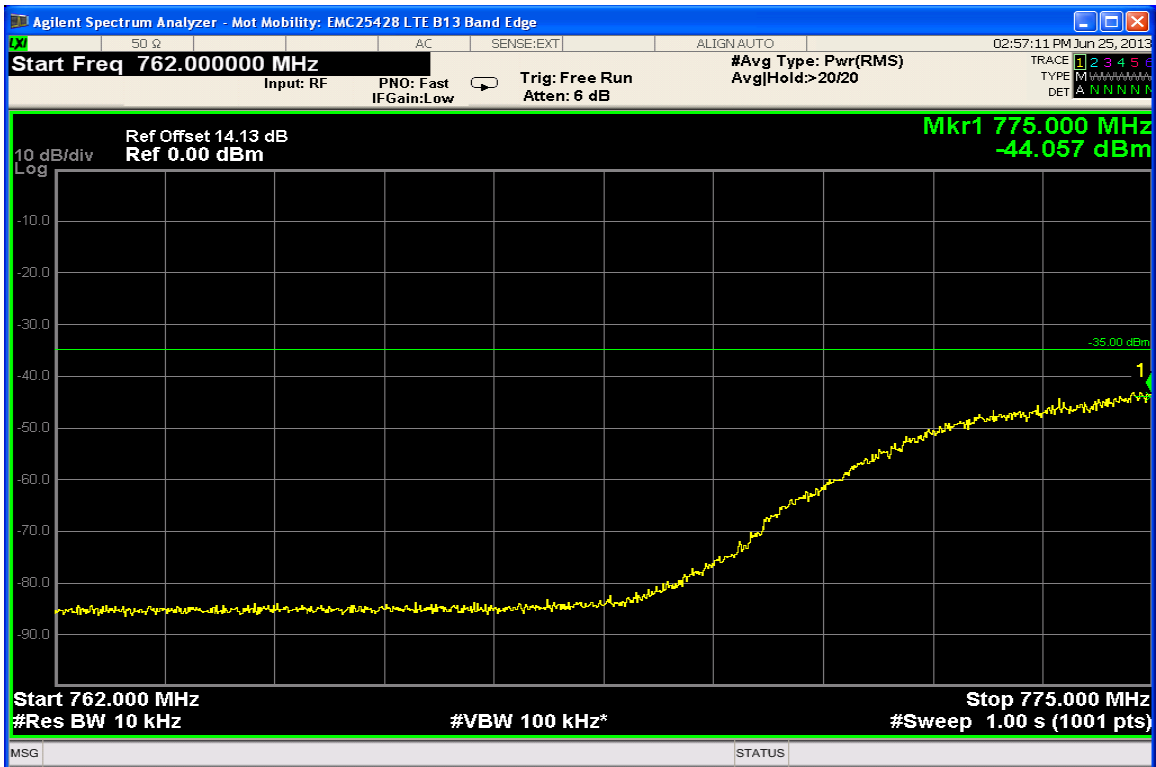


**Band 13 LTE – 10 MHz BW, 16-QAM RB Size = 50 RB Start 0**

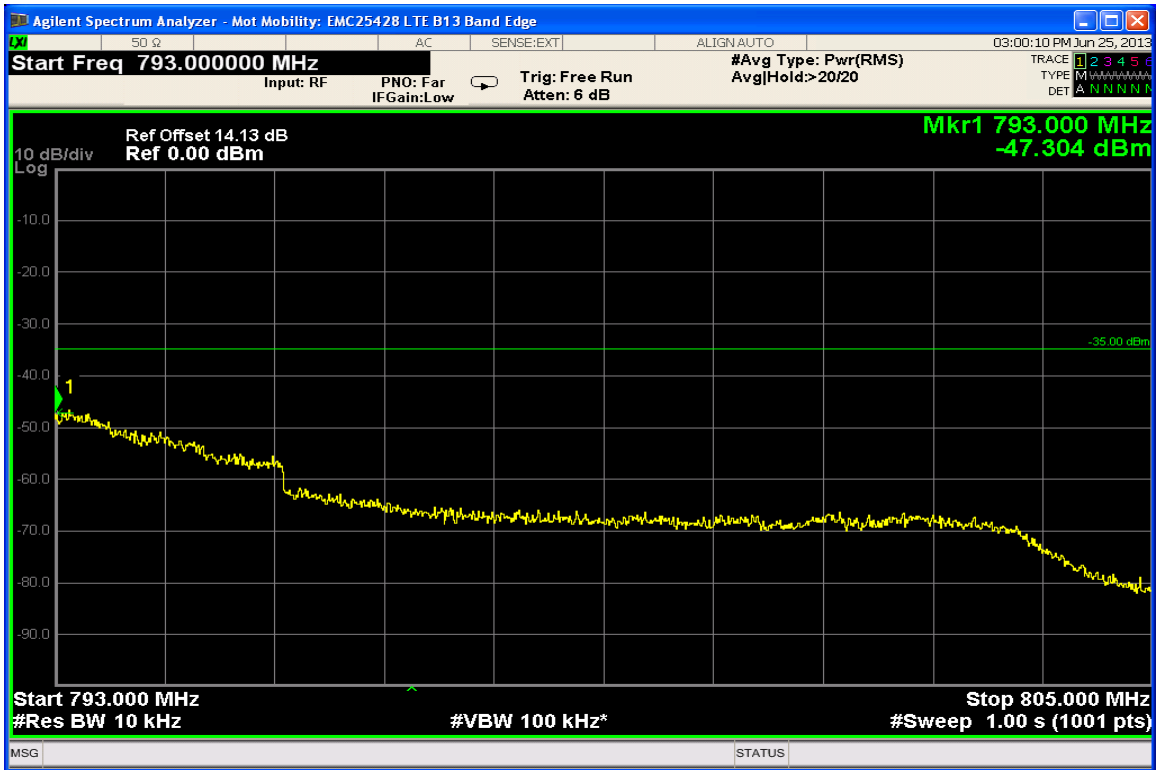


**Band 13 LTE – 10 MHz BW, QPSK RB Size = 50 RB Start 0**

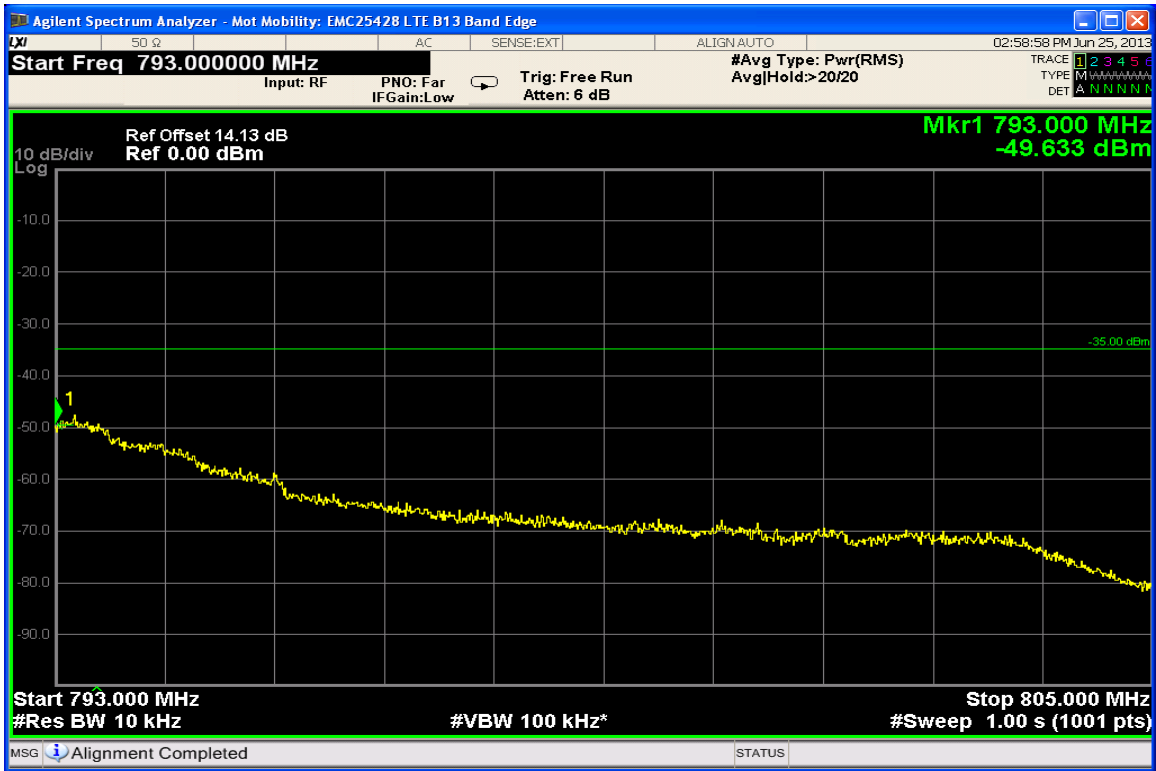


**Band 13 LTE – 10 MHz BW, 16-QAM RB Size = 50 RB Start 0**

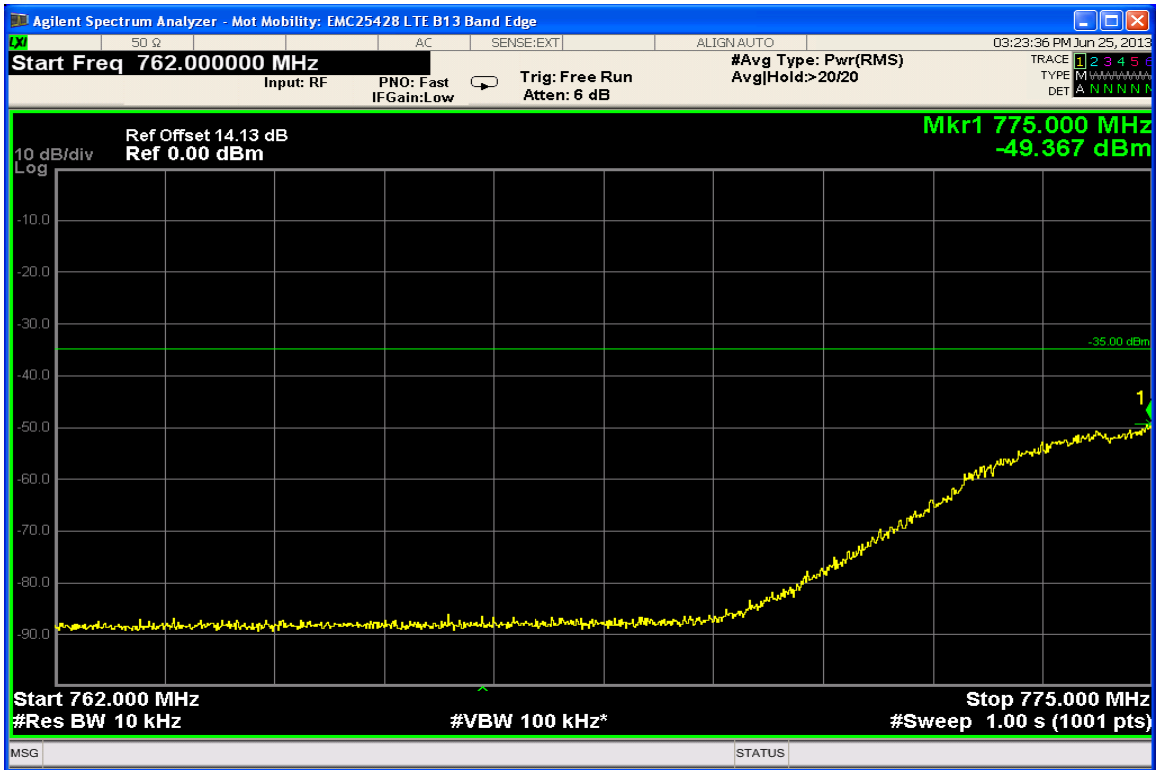


Band 13 LTE – 5 MHz BW, QPSK RB Size = 25 RB Start 0

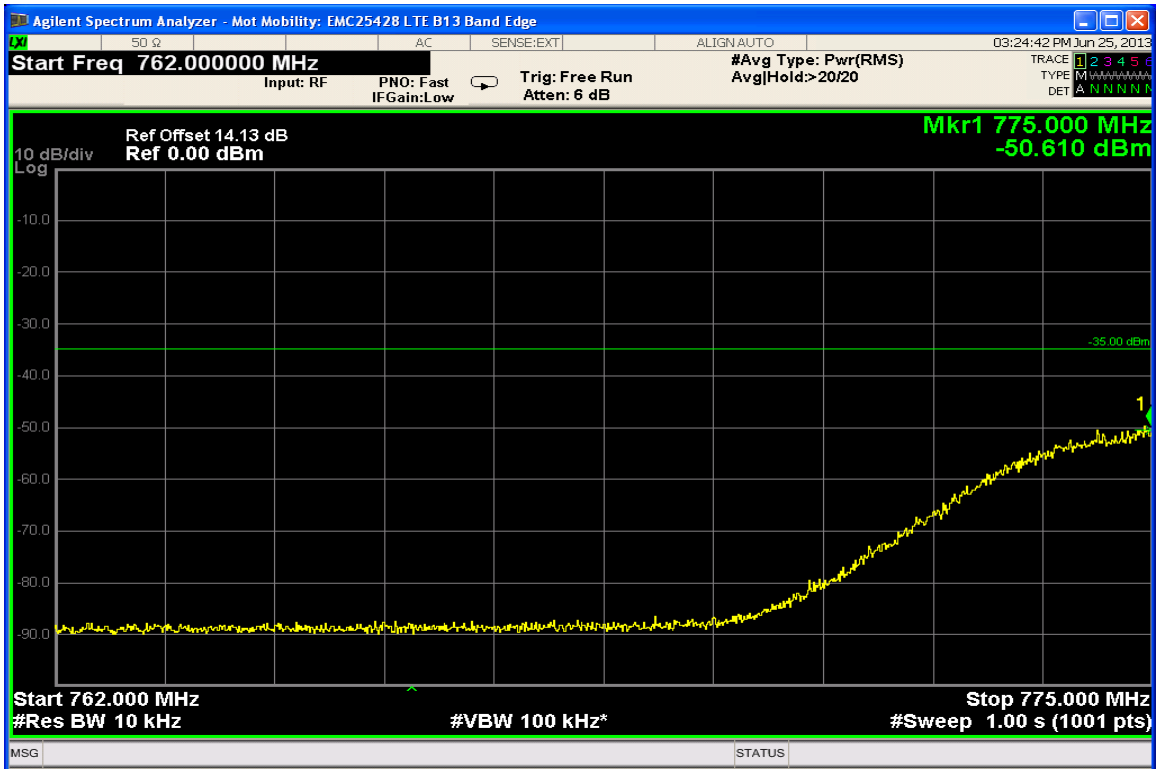

Band 13 LTE – 5 MHz BW, 16-QAM RB Size = 25 RB Start 0

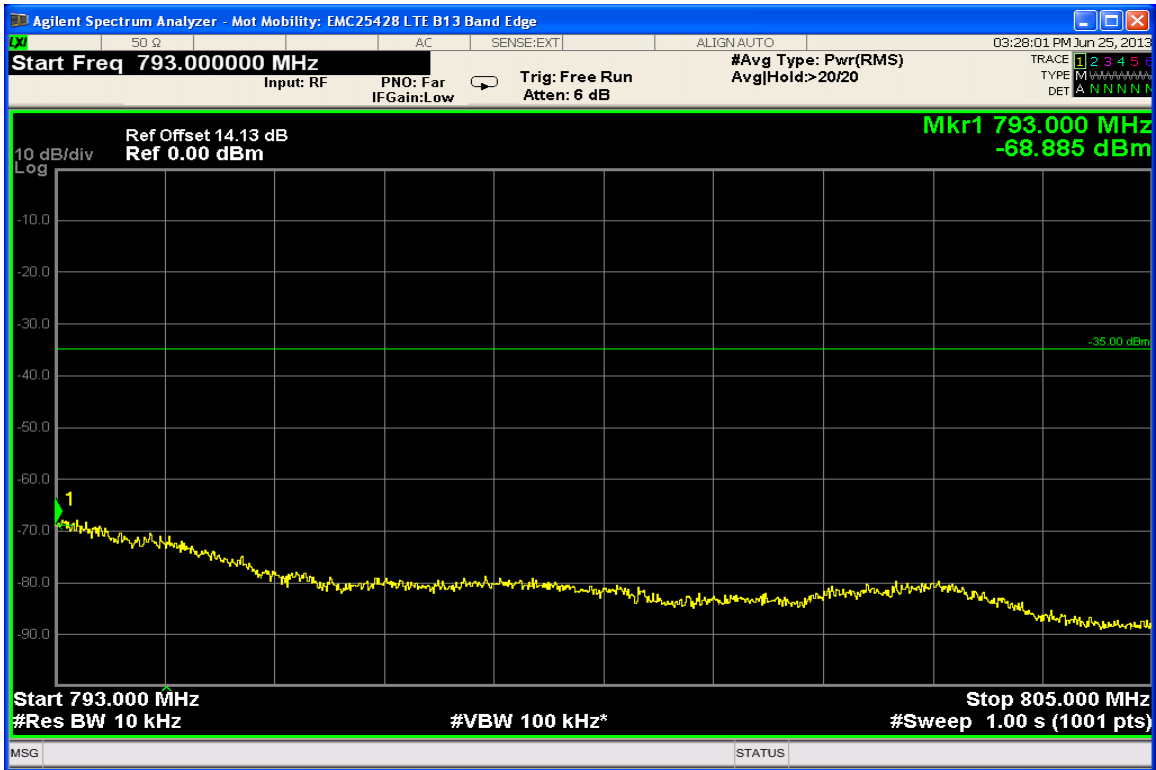

Band 13 LTE – 5 MHz BW, QPSK RB Size = 25 RB Start 0

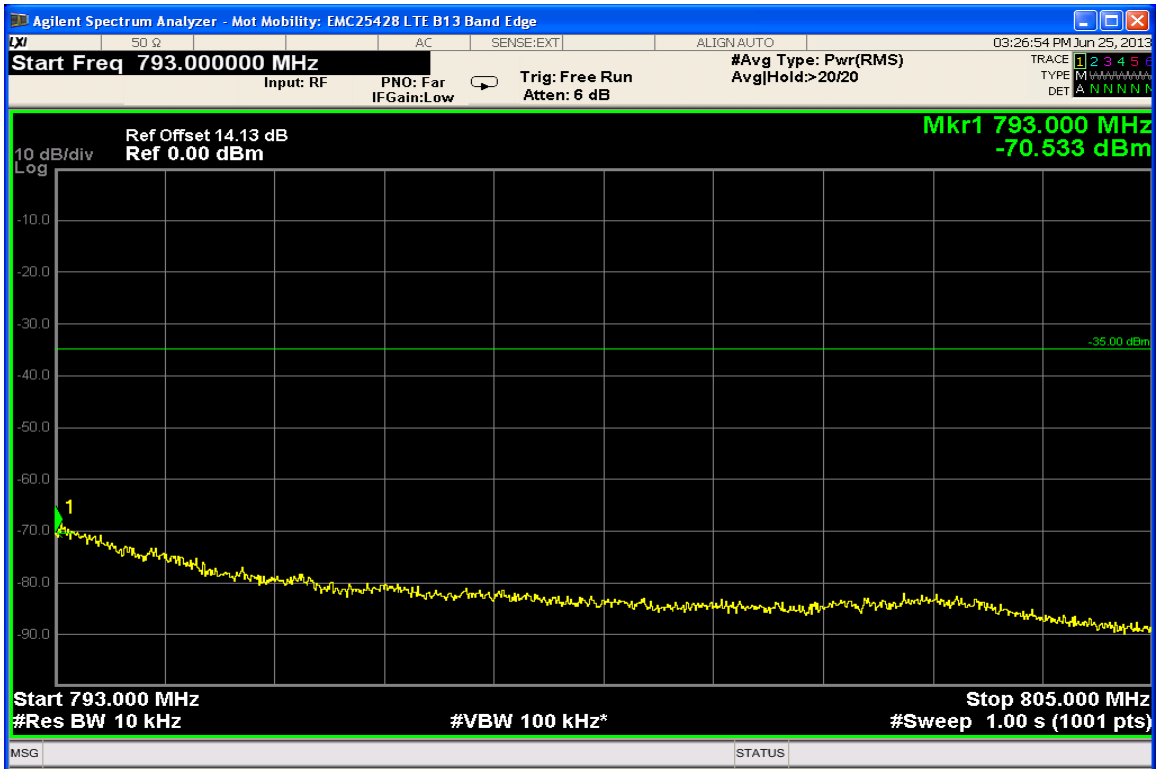

Band 13 LTE – 5 MHz BW, 16-QAM RB Size = 25 RB Start 0

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

§27.53 (c) (2), §27.53 (c) (5), §27.53 (h)

**Measurement Procedure**

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The fully charged internal battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

(c) (2) Any emissions outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB.


(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

The spectrum analyzer settings were as follows:


Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

The EUT was tested in the highest bandwidth and both modulations in each band and the plots are reported below.

**Measurement Results: LTE Band 4 QPSK Conducted Spurious Emissions**

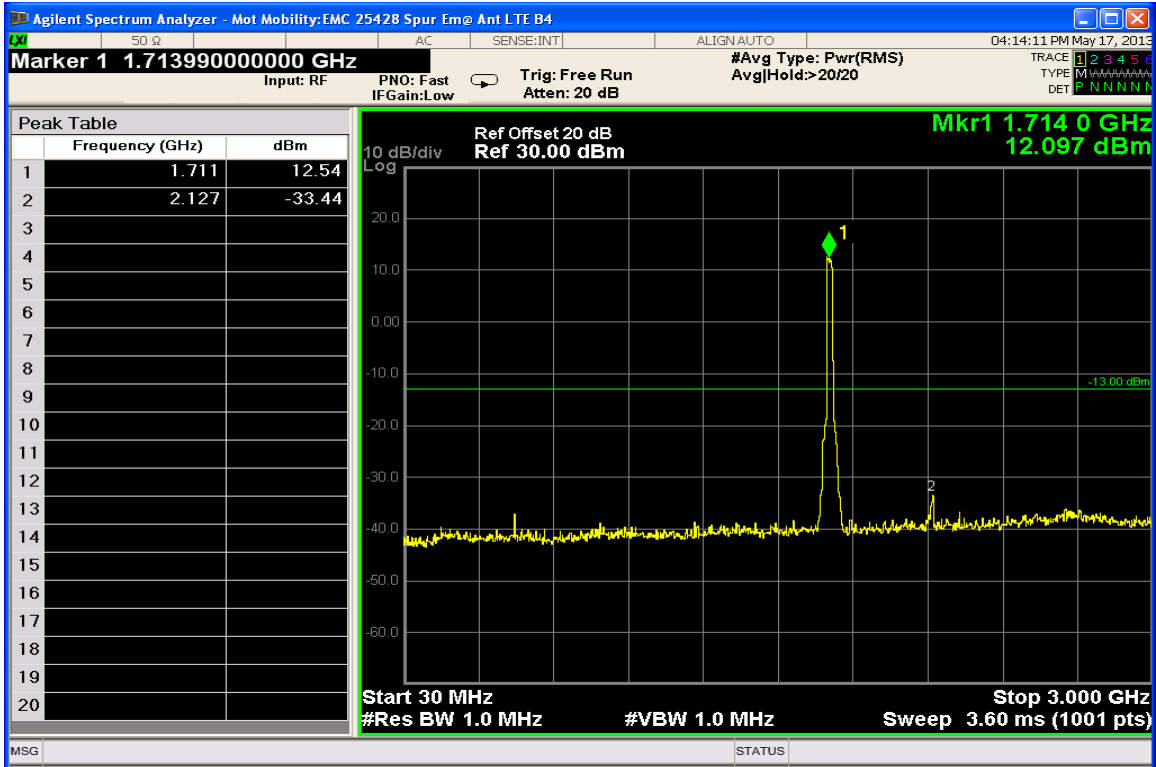


20 MHz BW, QPSK RB Size = 100RB Start 0, Low Channel

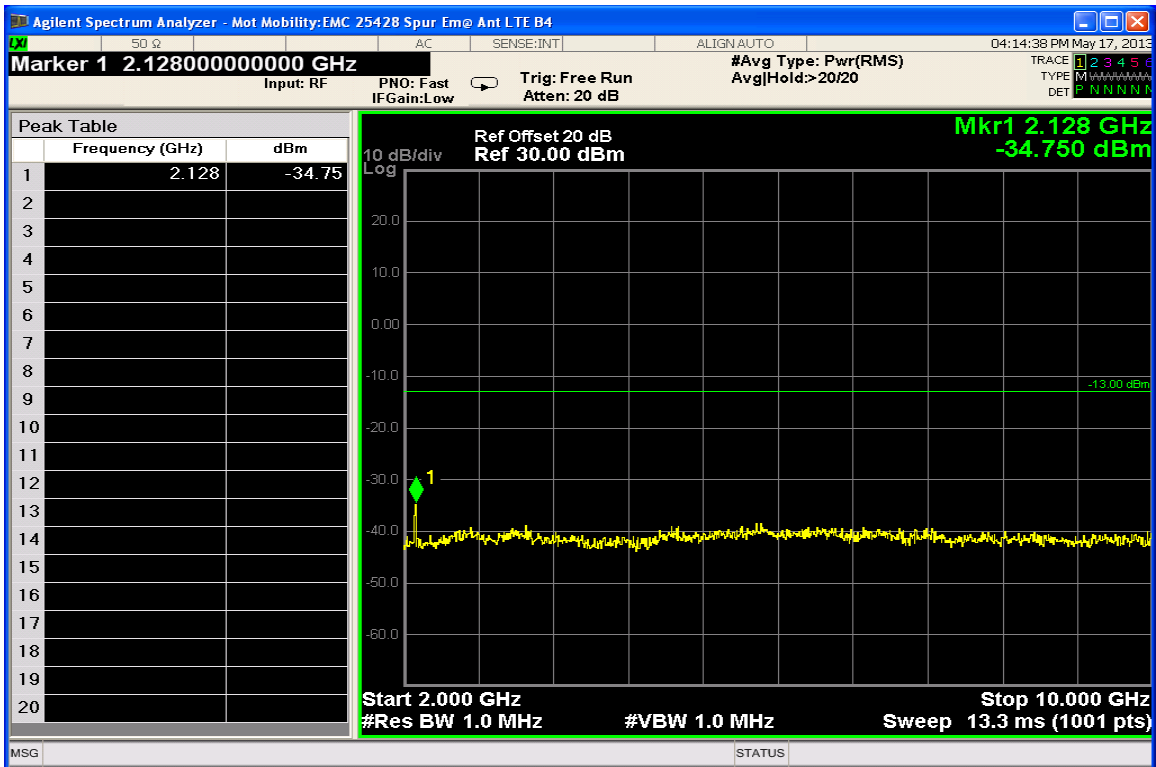


20 MHz BW, QPSK RB Size = 100RB Start 0, Low Channel




20 MHz BW, QPSK RB Size = 100RB Start 0, Low Channel

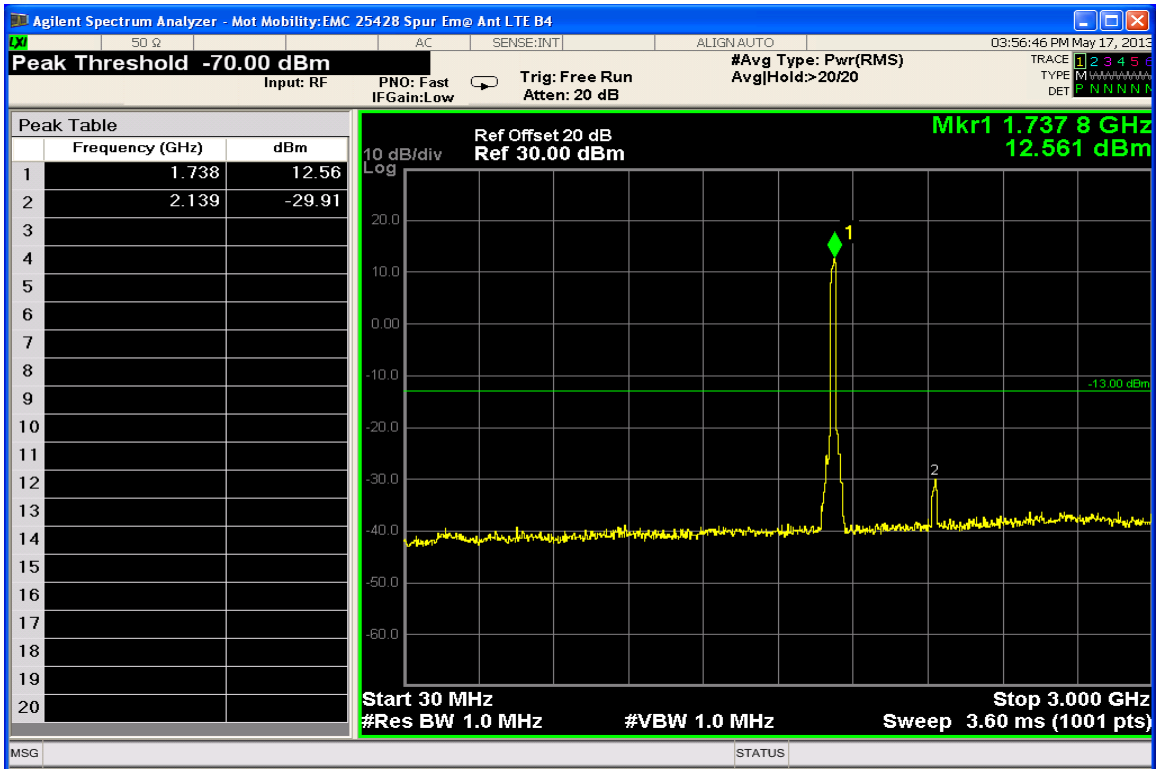


20 MHz BW, QPSK RB Size = 100RB Start 0, Mid Channel

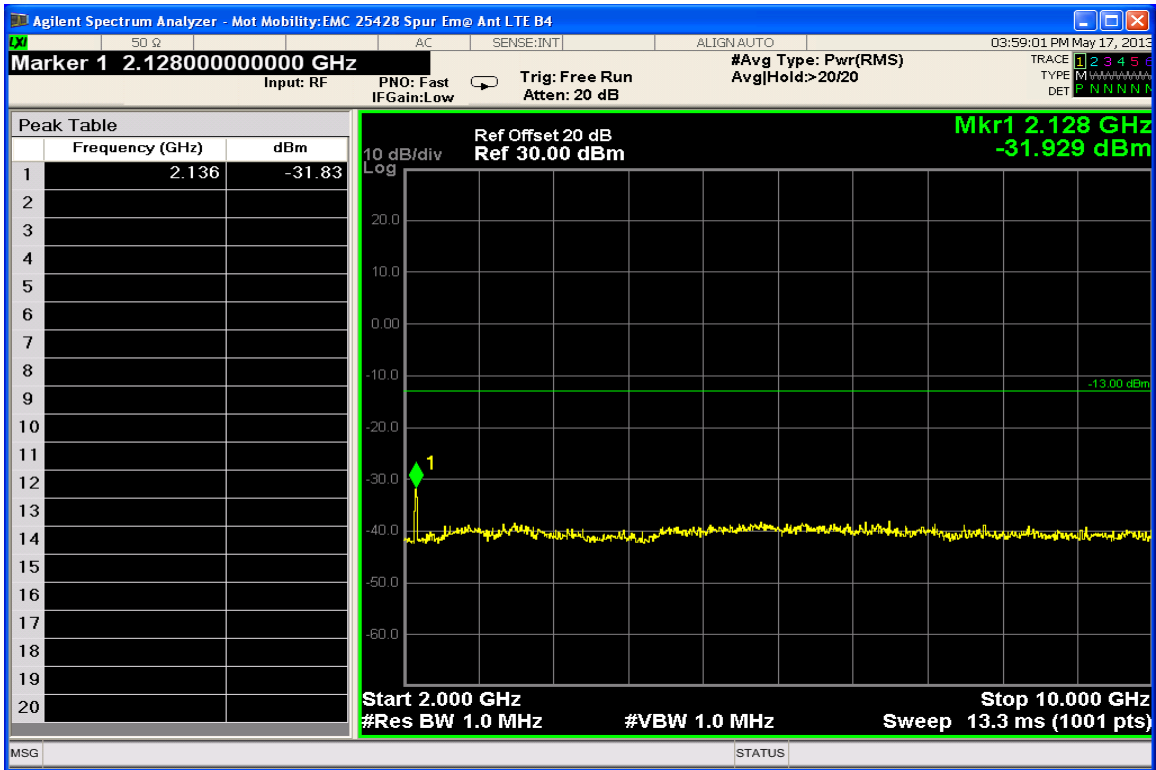


20 MHz BW, QPSK RB Size = 100RB Start 0, Mid Channel

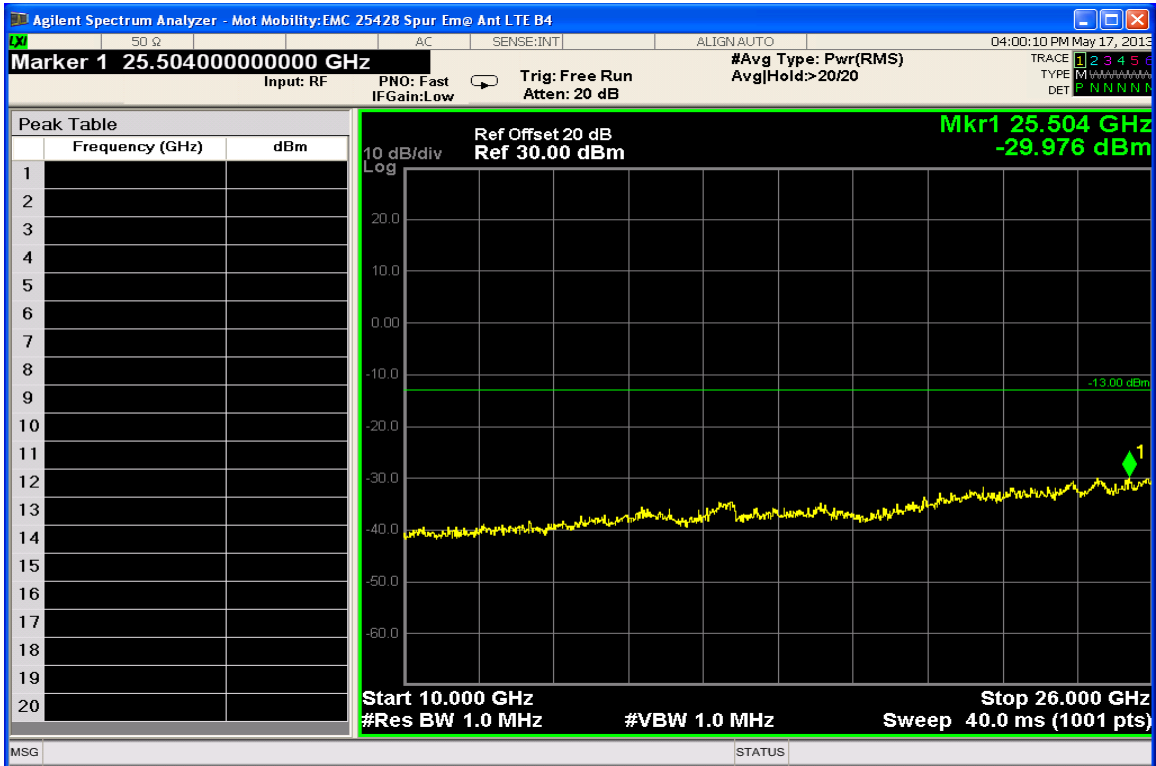


20 MHz BW, QPSK RB Size = 100RB Start 0, Mid Channel

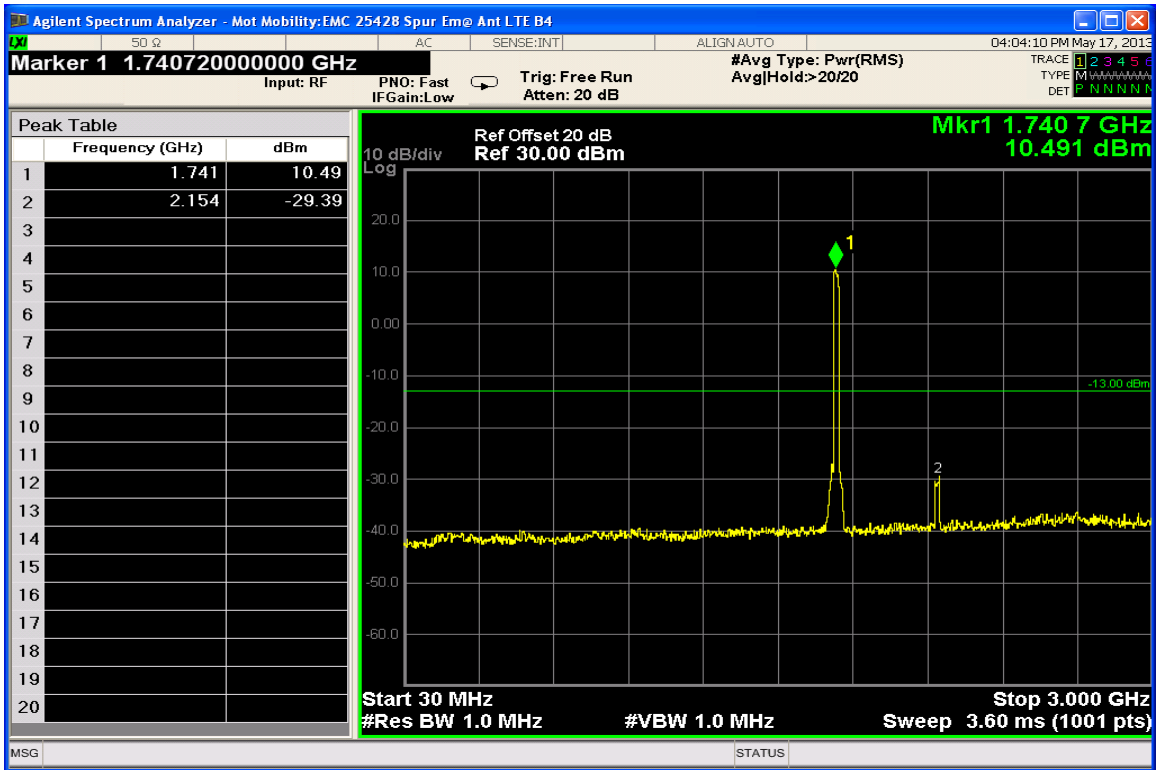

20 MHz BW, QPSK RB Size = 100RB Start 0, High Channel

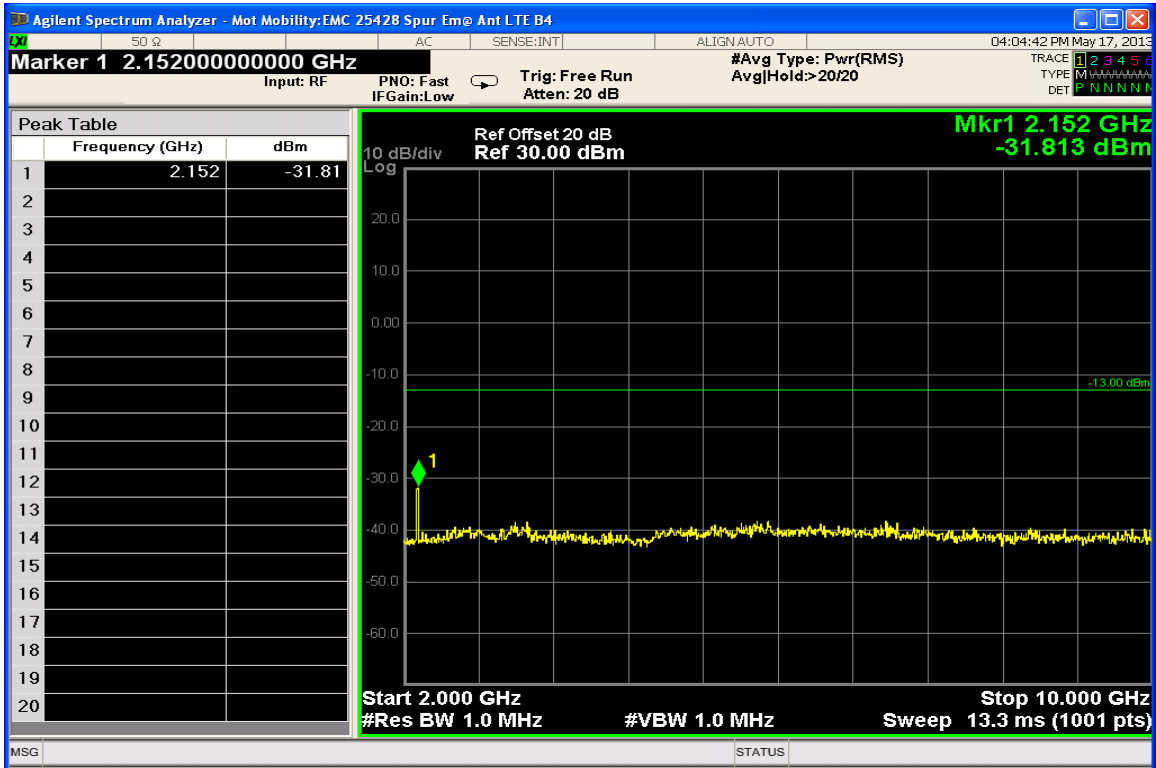


20 MHz BW, QPSK RB Size = 100RB Start 0, High Channel

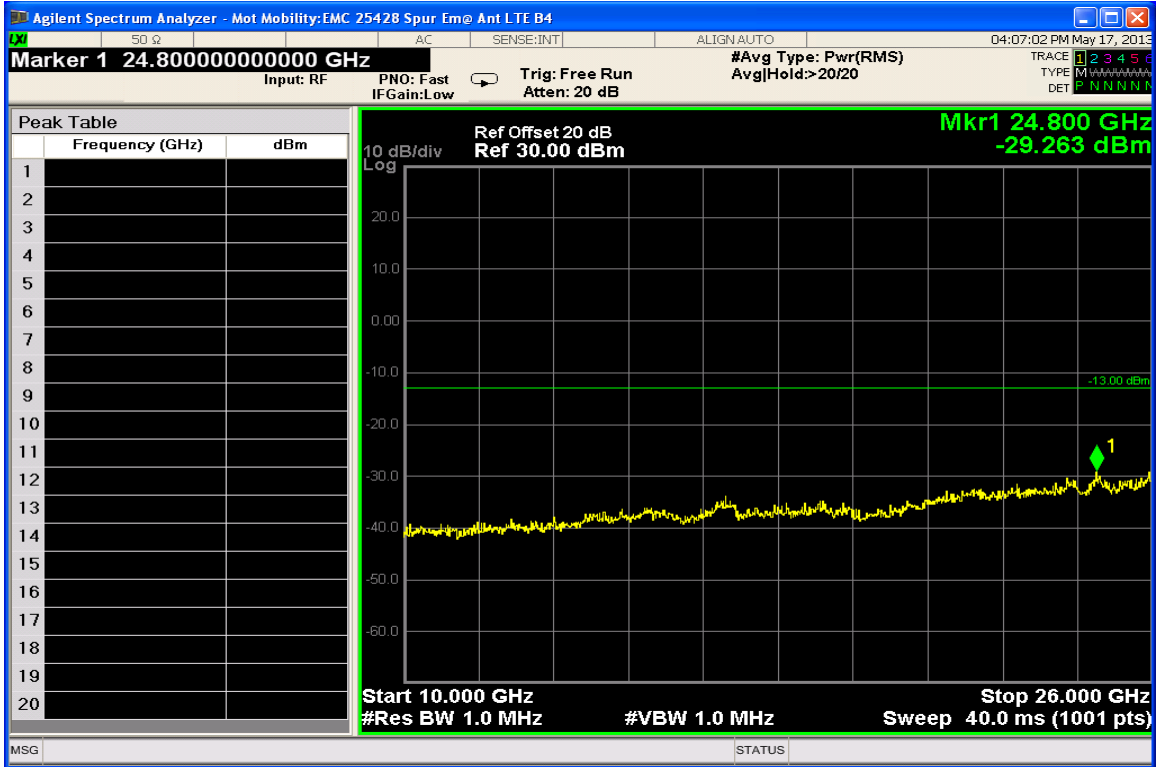


20 MHz BW, QPSK RB Size = 100RB Start 0, High Channel


**Measurement Results: LTE Band 4 16-QAM Conducted Spurious Emissions**

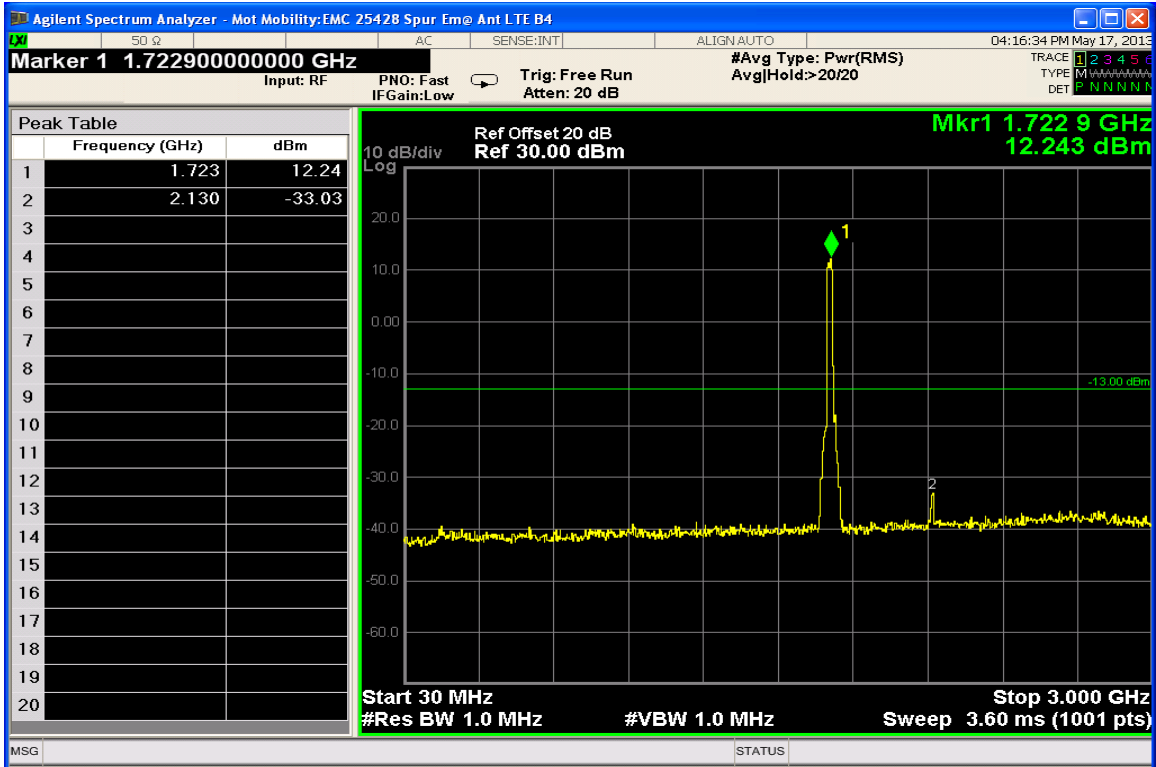


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Low Channel

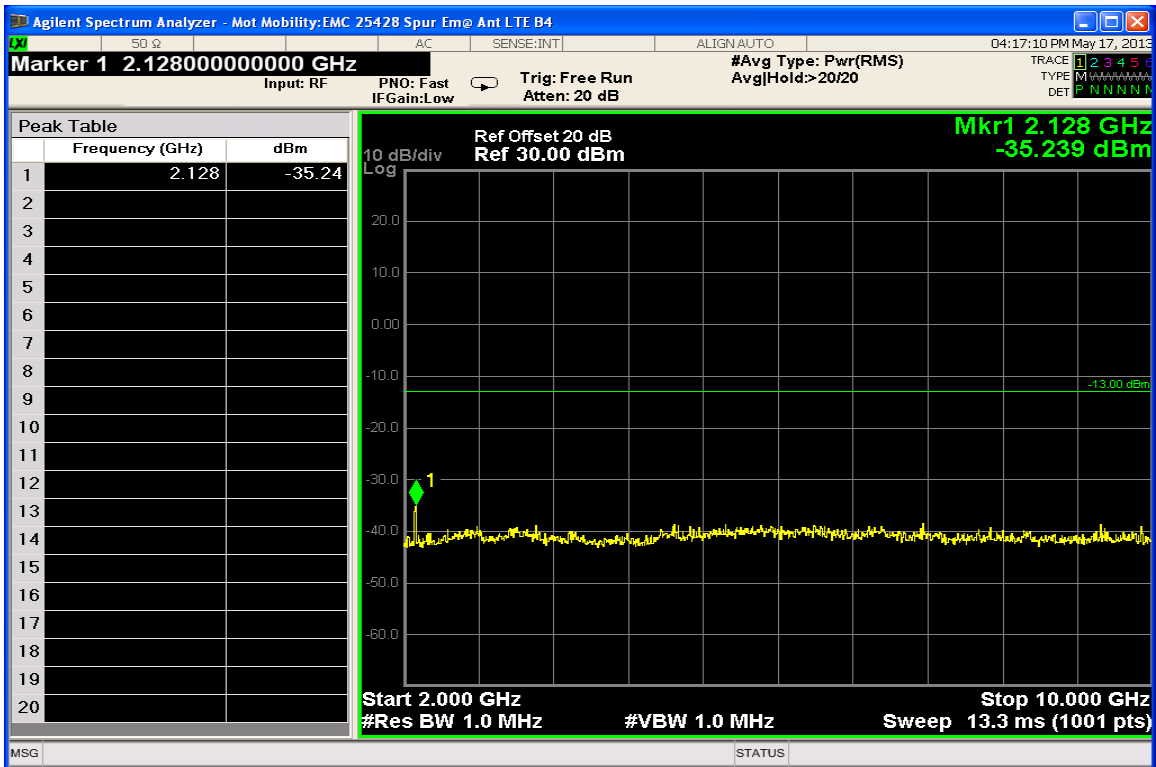


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Low Channel

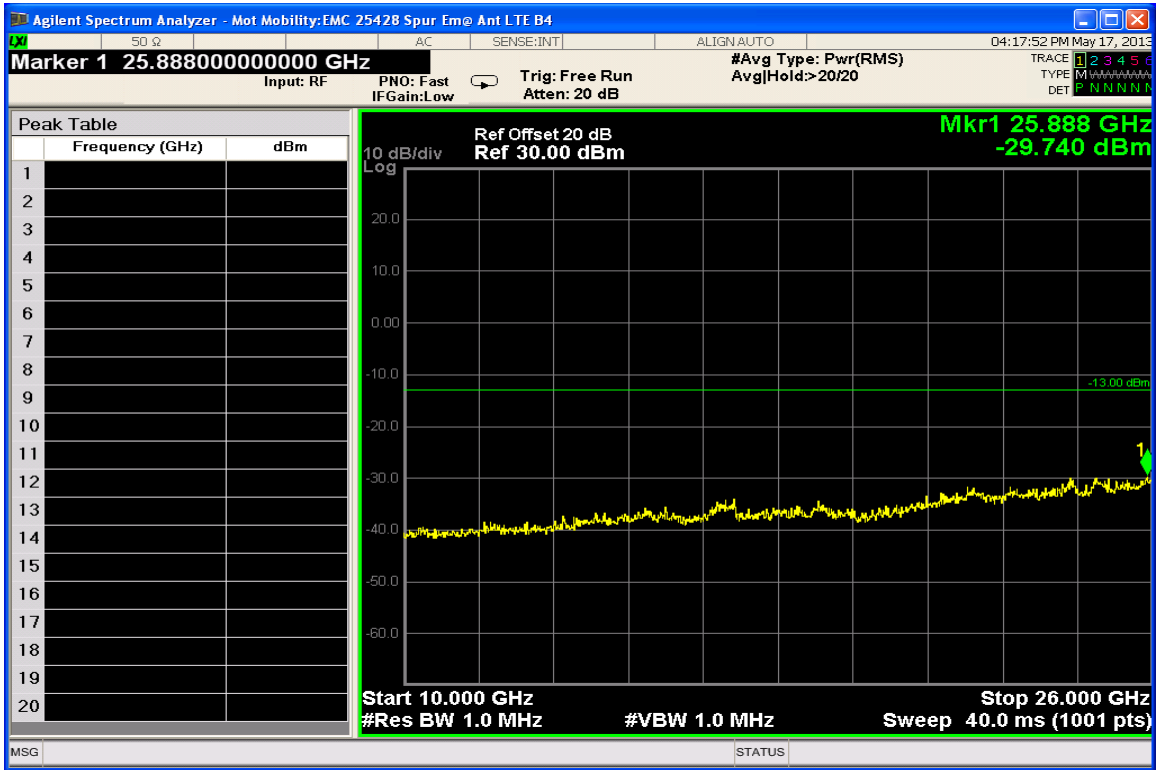


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Low Channel

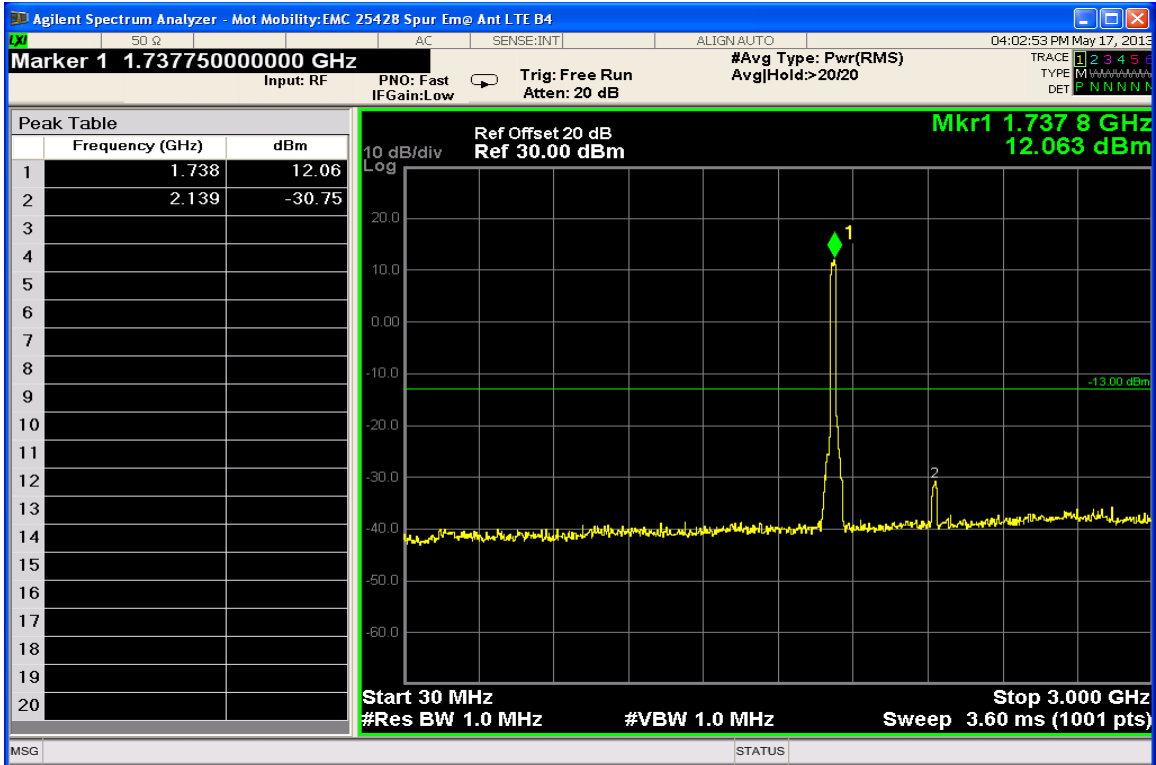


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Mid Channel

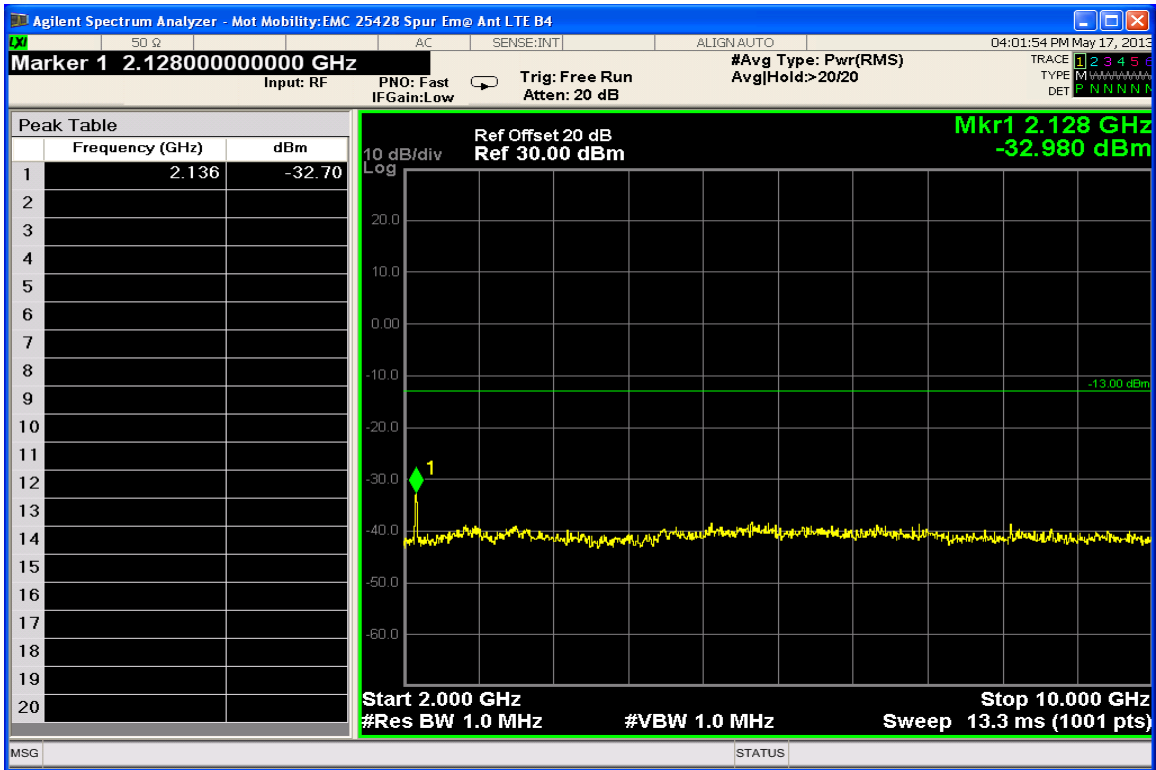


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Mid Channel

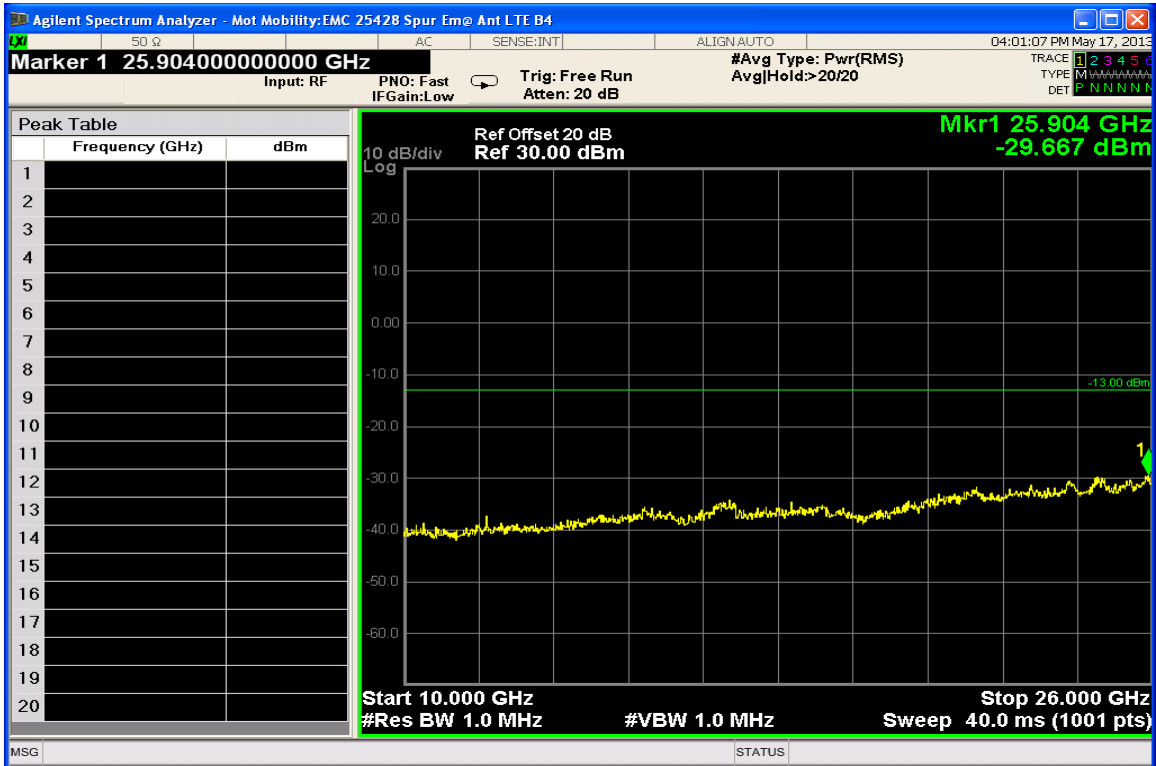


20 MHz BW, 16-QAM RB Size = 100RB Start 0, Mid Channel

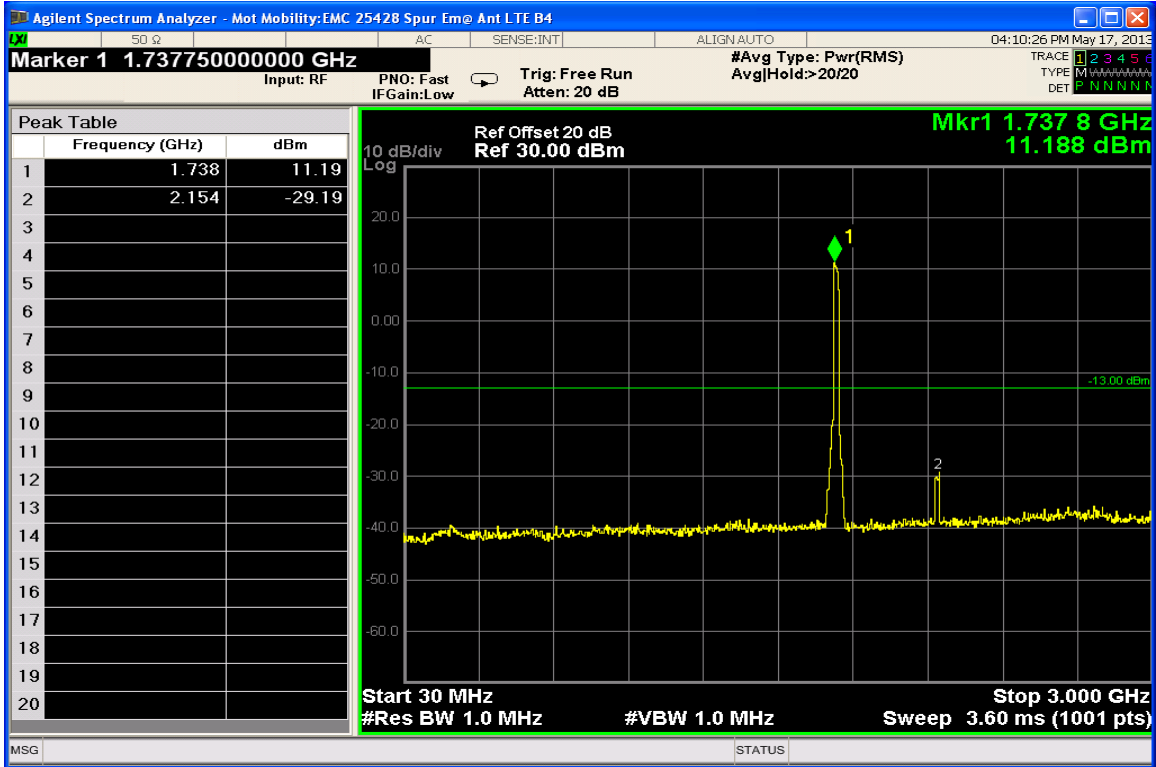

20 MHz BW, 16-QAM RB Size = 100RB Start 0, High Channel

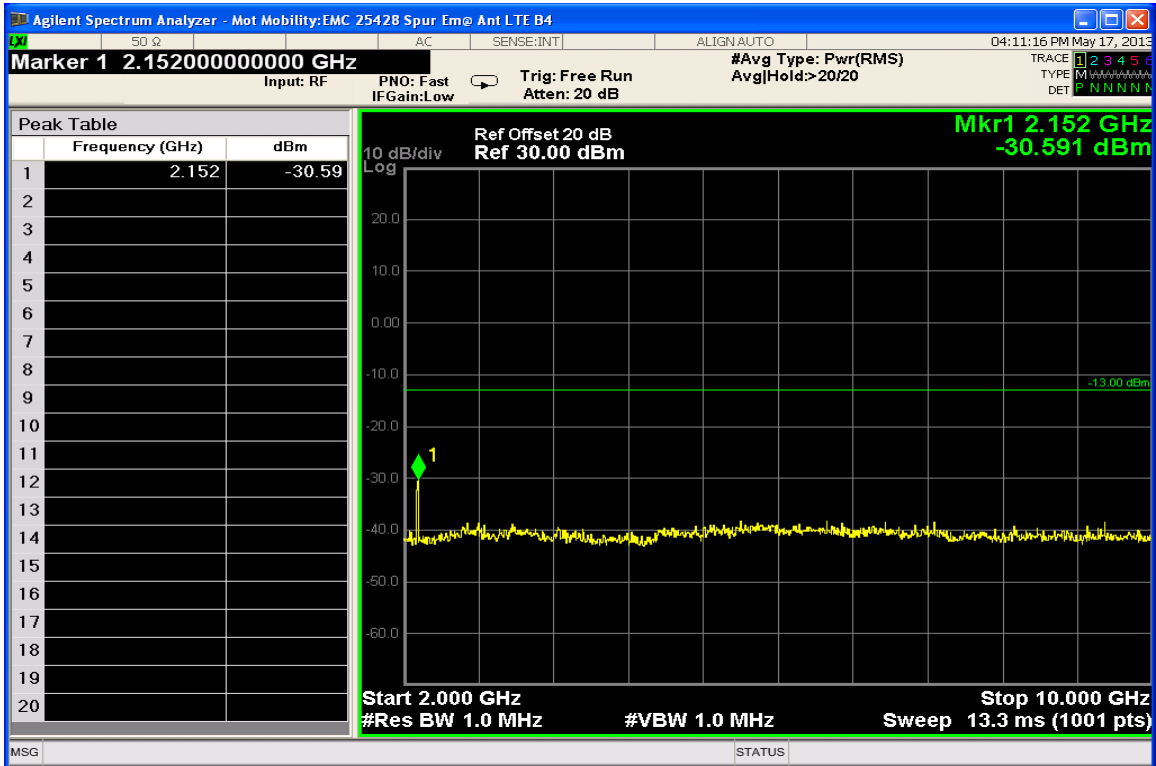


20 MHz BW, 16-QAM RB Size = 100RB Start 0, High Channel

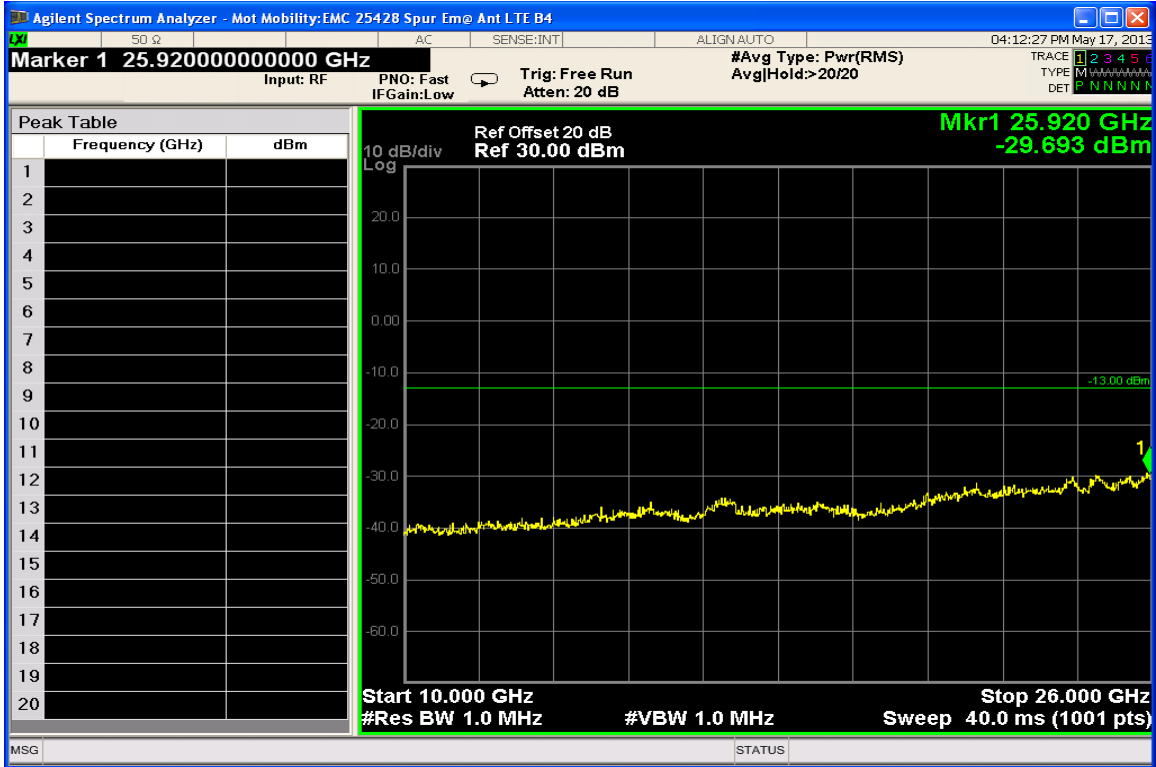


20 MHz BW, 16-QAM RB Size = 100RB Start 0, High Channel

**Measurement Results: LTE Band 13 QPSK Conducted Spurious Emissions**

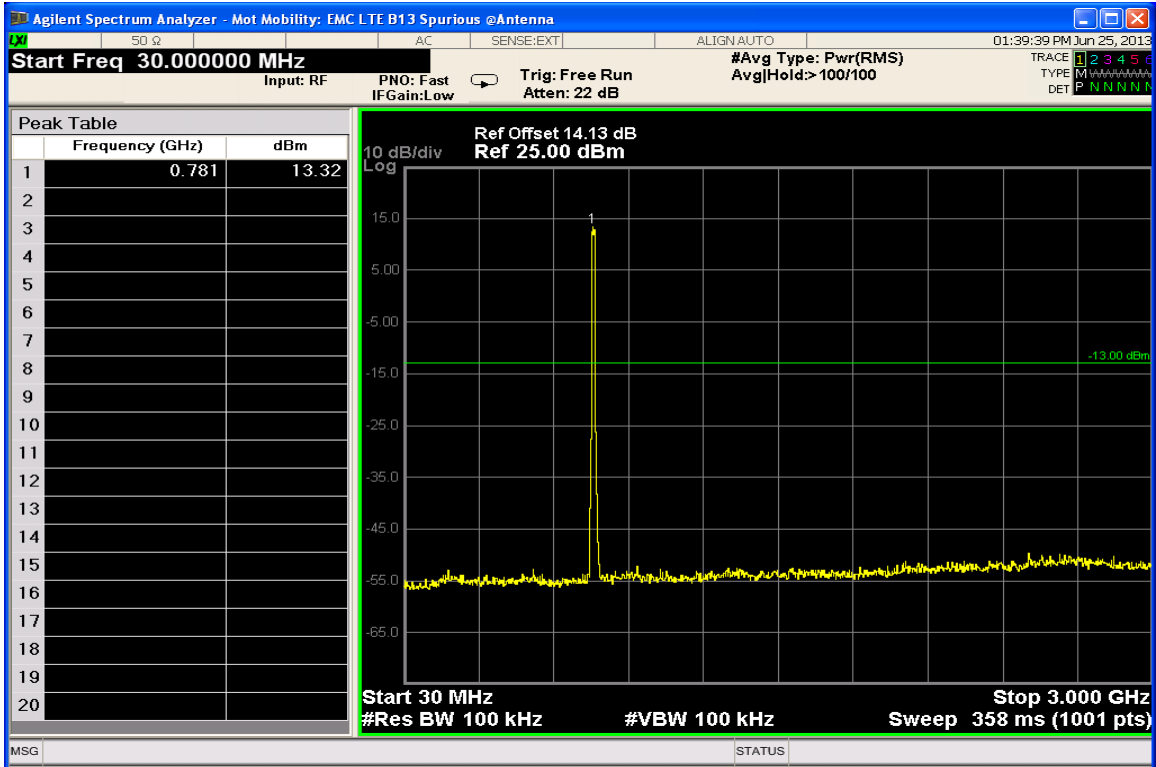


10 MHz BW, QPSK RB Size = 50RB Start 0, Low Channel

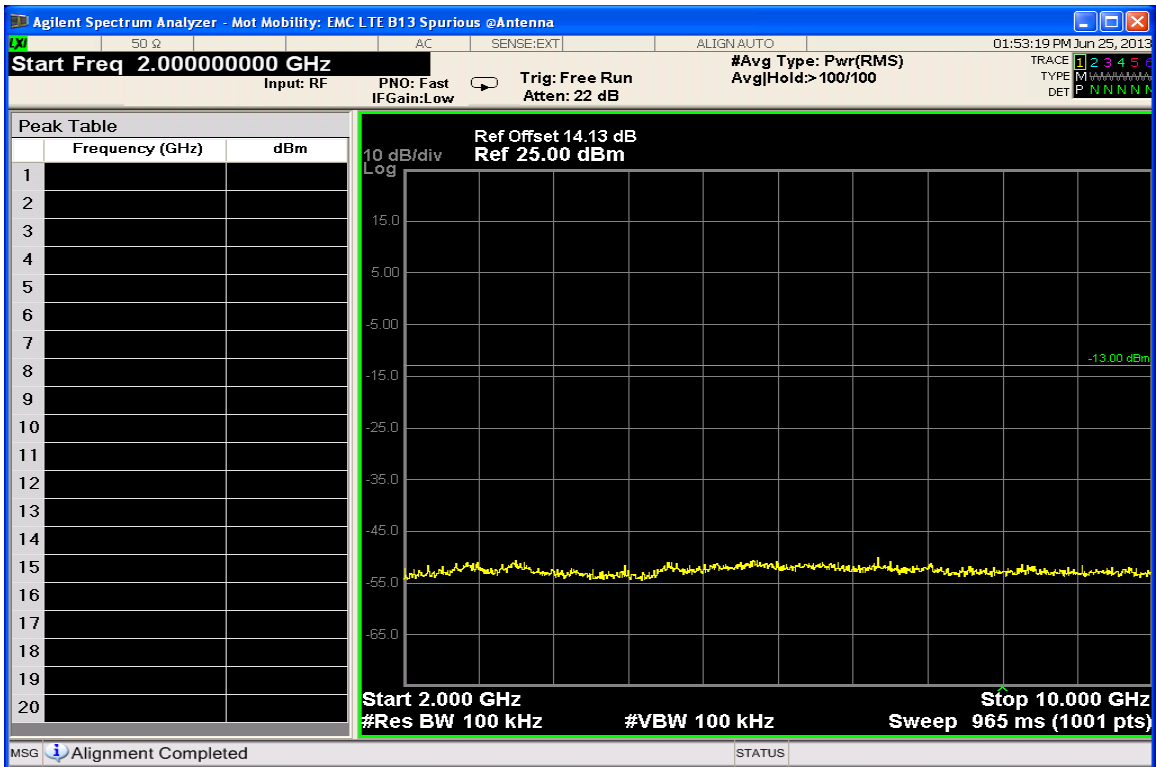


10 MHz BW, QPSK RB Size = 50RB Start 0, Low Channel

**Measurement Results: LTE Band 13 16-QAM Conducted Spurious Emissions**

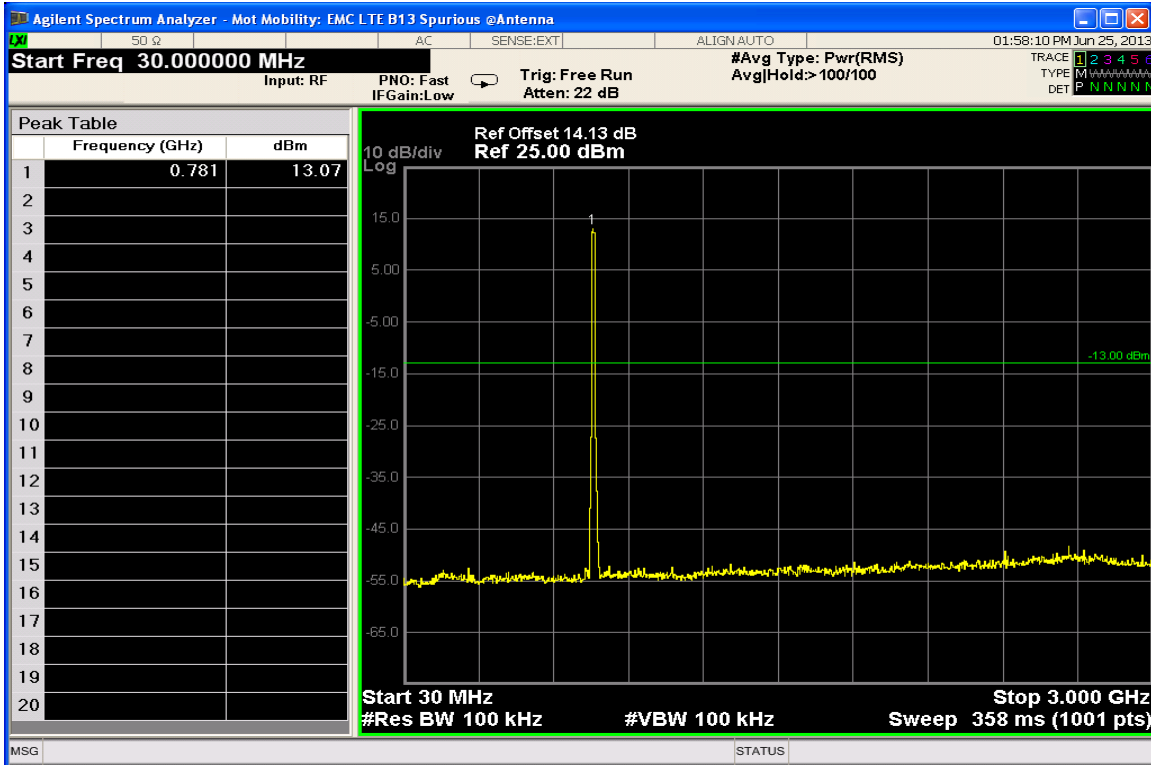


10 MHz BW, 16-QAM RB Size = 50RB Start 0, Low Channel

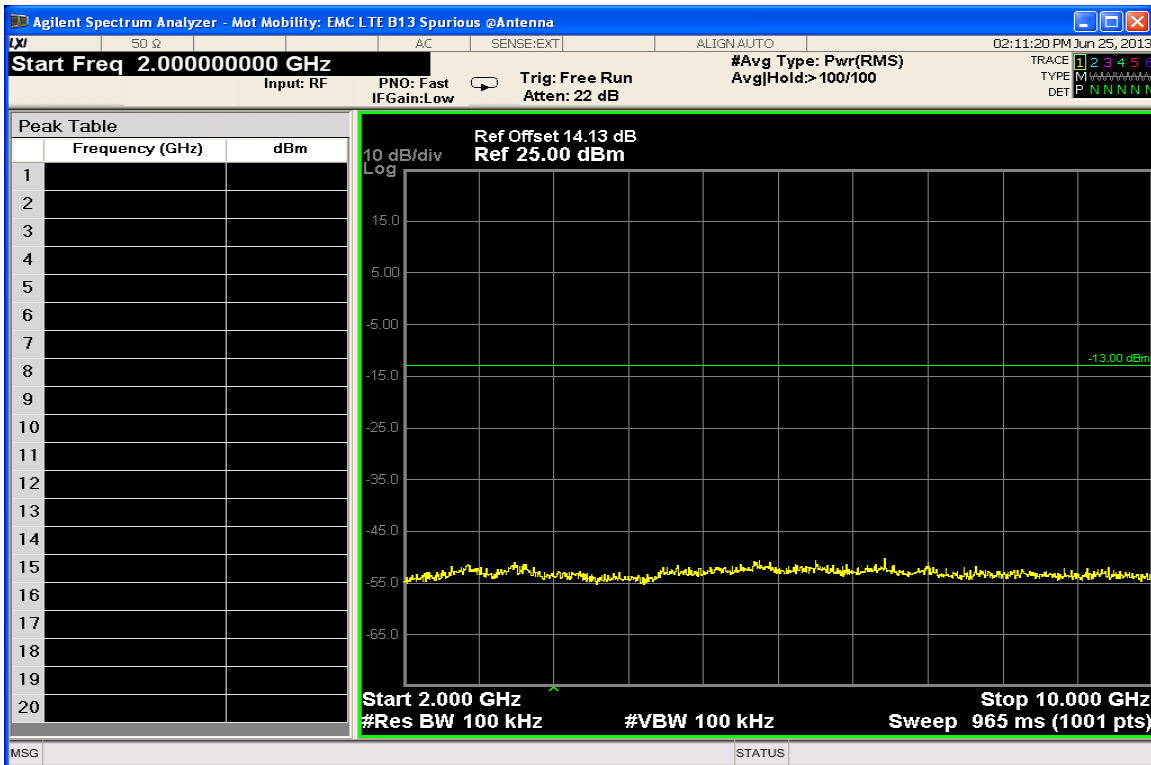


10 MHz BW, 16-QAM RB Size = 50RB Start 0, Low Channel


Low Band Edge

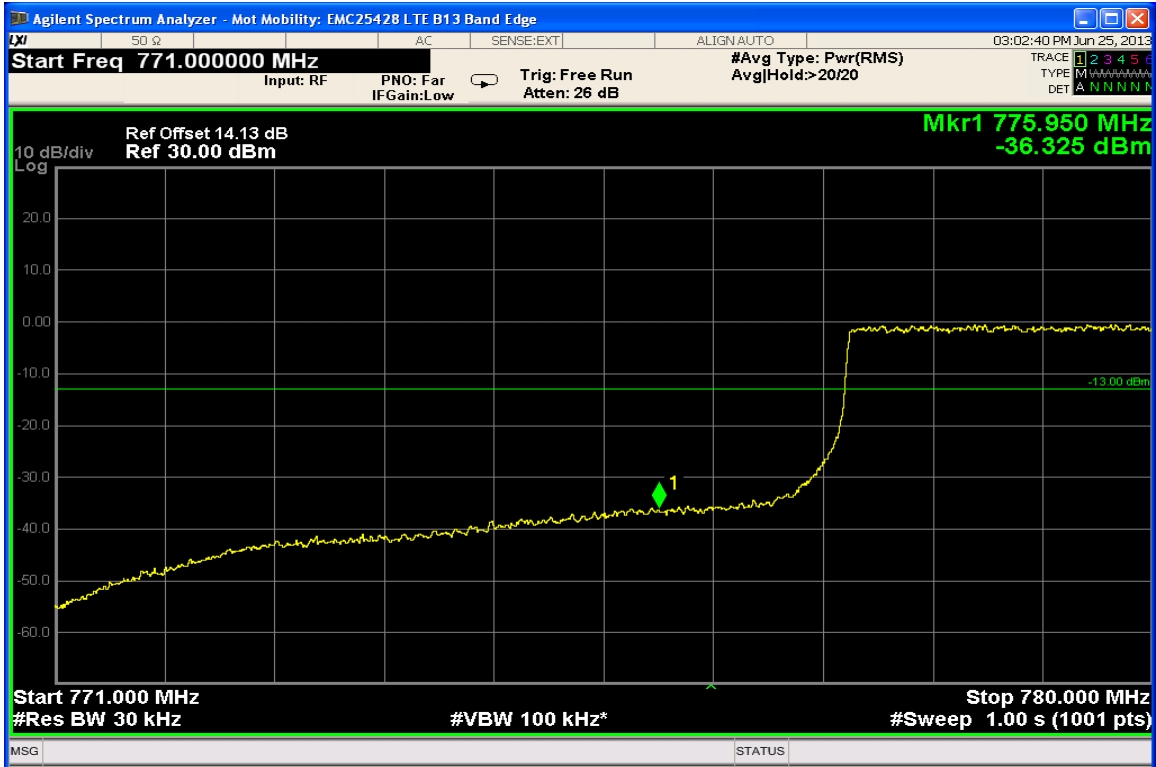


QPSK Start RB: 0, RB Allocation 100% 30kHz RBW

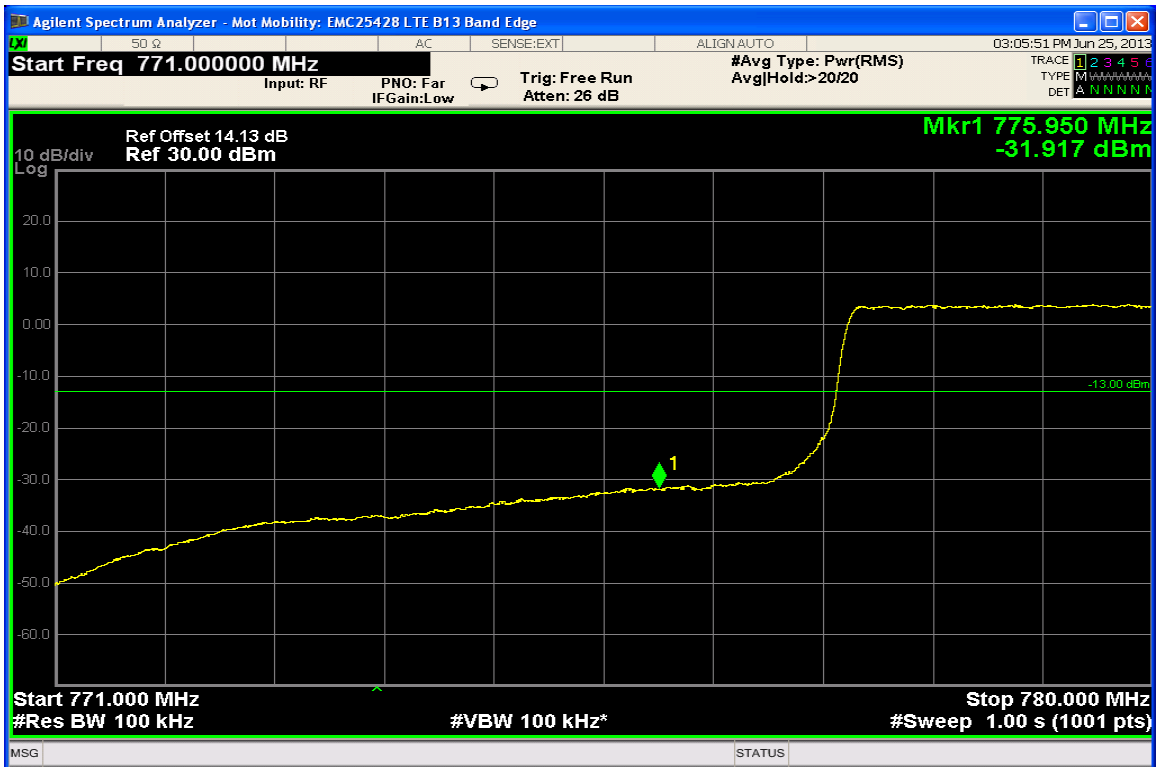

QPSK Start RB: 0, RB Allocation 100% 100kHz RBW

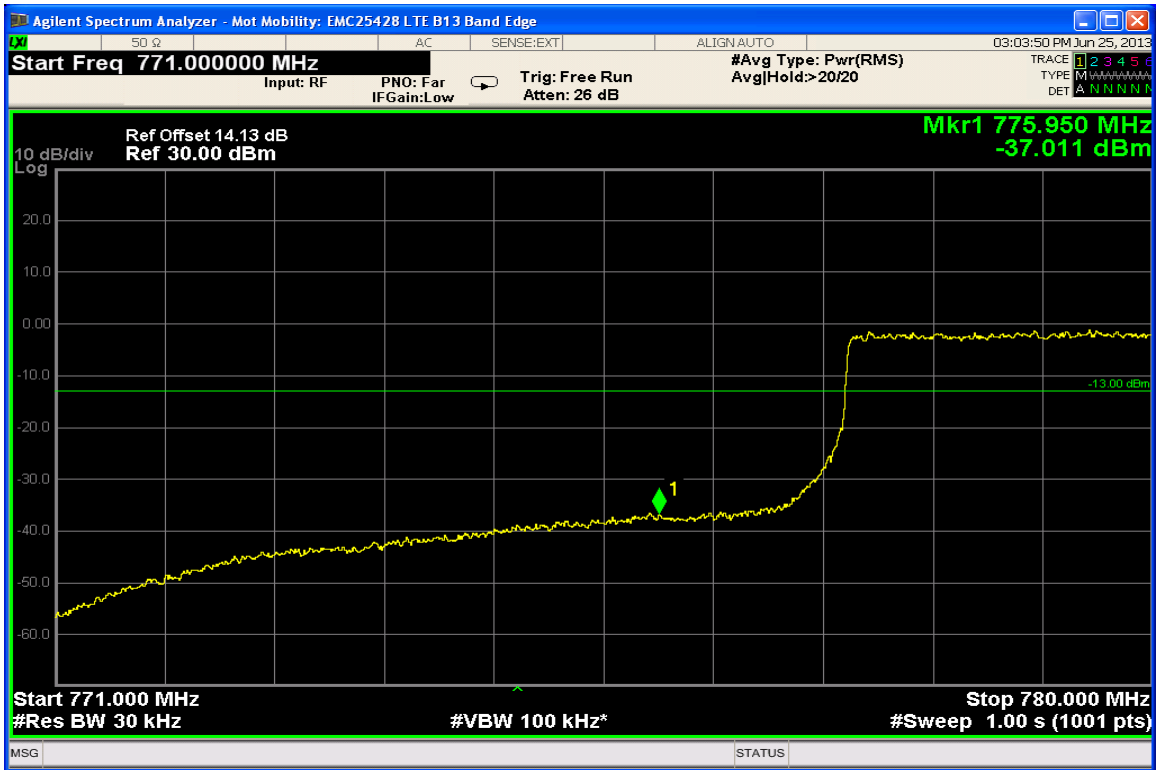


16QAM Start RB: 0, RB Allocation 100% 30kHz RBW

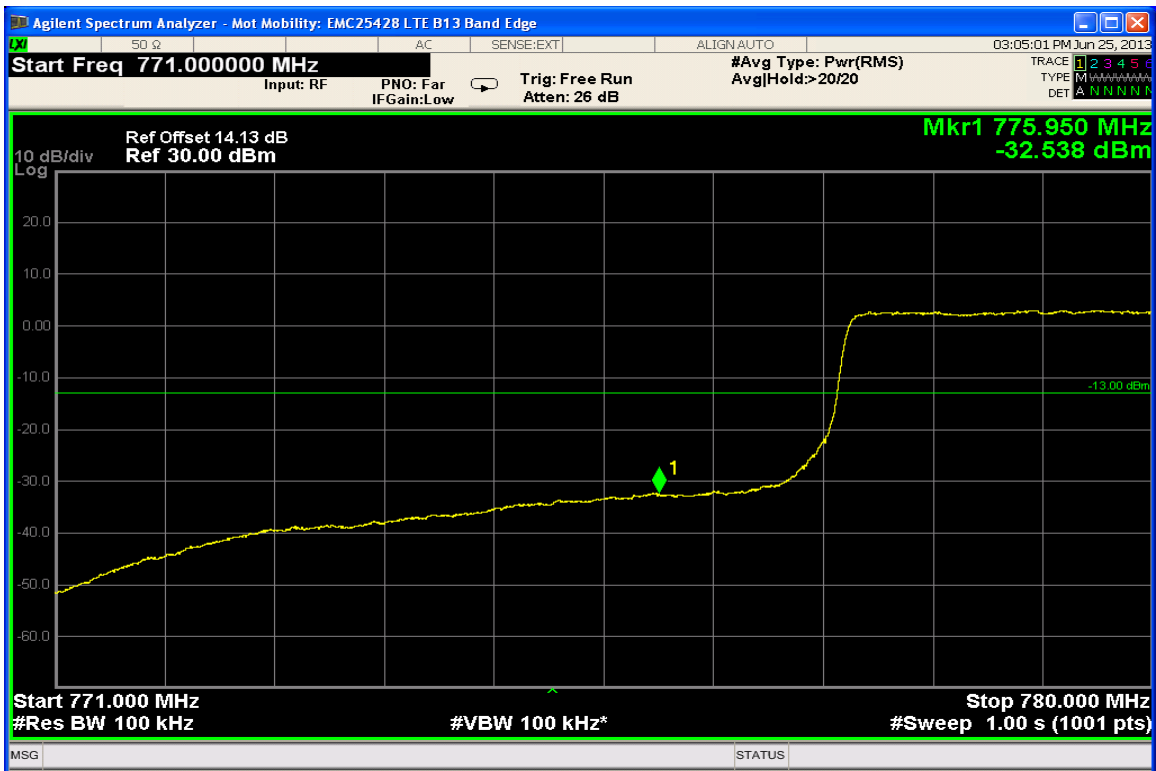


16QAM Start RB: 0, RB Allocation 100% 100kHz RBW

High Band Edge

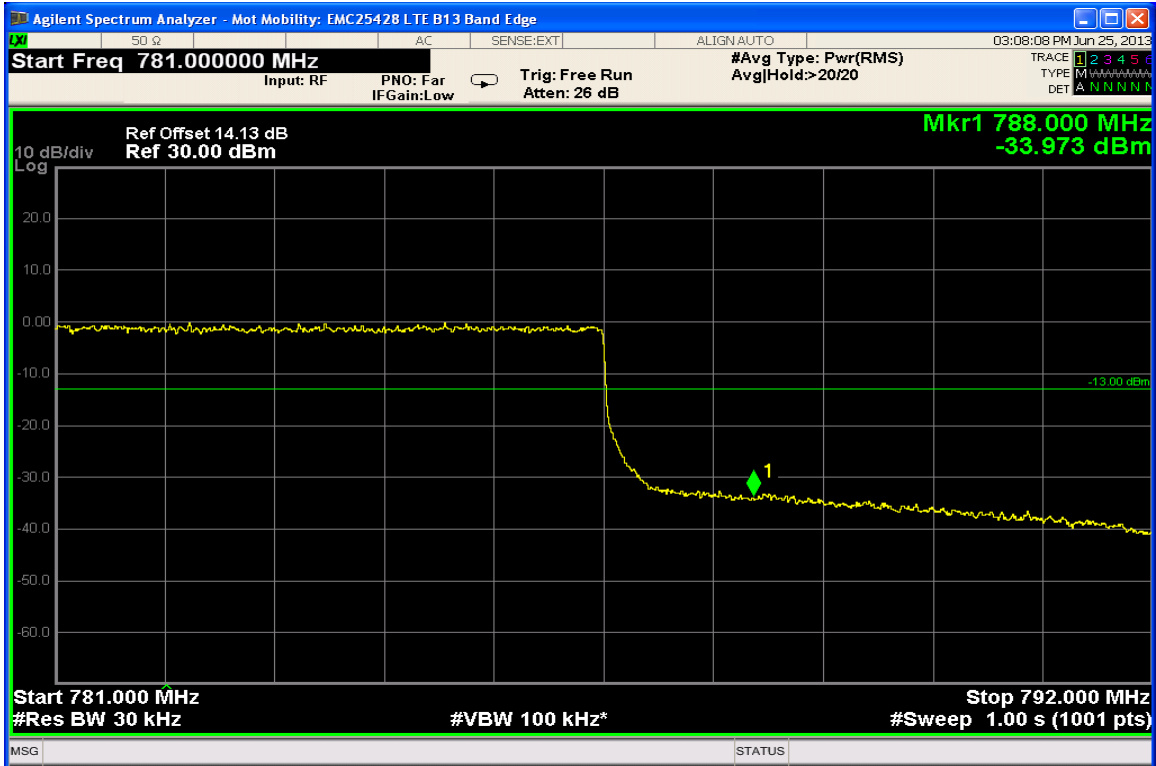

QPSK Start RB: 0, RB Allocation 100% 30kHz RBW

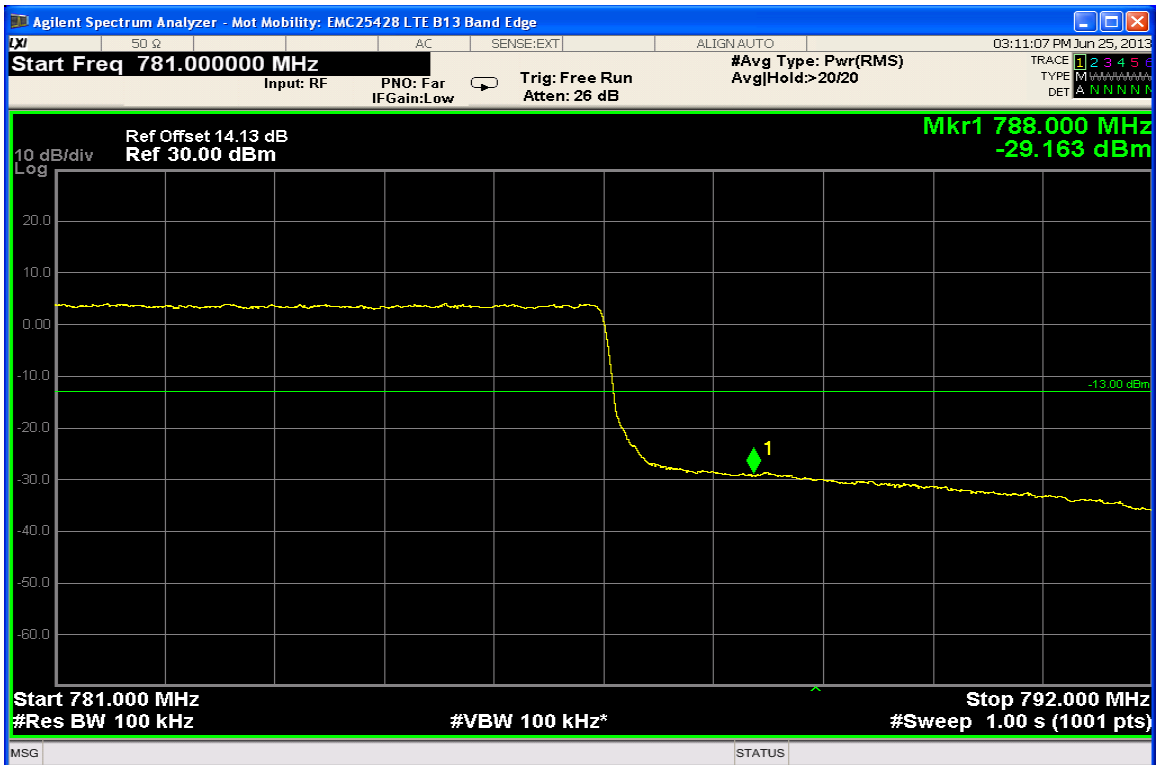

QPSK Start RB: 0, RB Allocation 100% 100kHz RBW



16QAM Start RB: 0, RB Allocation 100% 30kHz RBW



16QAM Start RB: 0, RB Allocation 100% 100kHz RBW

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

§27.53 (c) (2), §27.53 (h)

**Measurement Procedure**

The EUT is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage. Testing was performed in three orthogonal planes where the X plane is with the EUT orientated vertically, the Y plane is with the EUT orientated on its side and the Z plane with the EUT laying flat on the table.

Testing is again performed with the EUT placed on the wireless charging pad under normal charging conditions and in simulated call configurations.


The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	3 MHz
Sweep Time	Auto

The EUT was tested under all configurations and modulations in the largest BW available in multiple RB configurations. The worst cases data is reported in the plots below.

**Band: LTE Band 4**  
**Modulation: QPSK**  
**Channel: All Channels**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-47.2	-41.2
3rd harmonic	-13	-28.3	-30.1
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

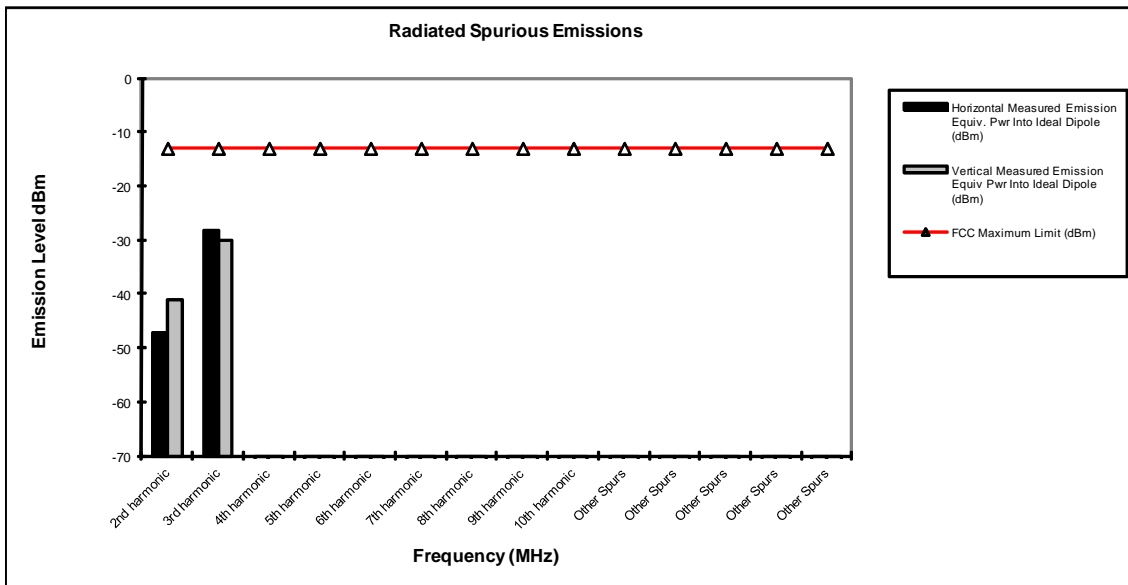


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Band: LTE Band 4 with wireless charging pad**  
**Modulation: QPSK**  
**Channel: All Channels**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	-35.0
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

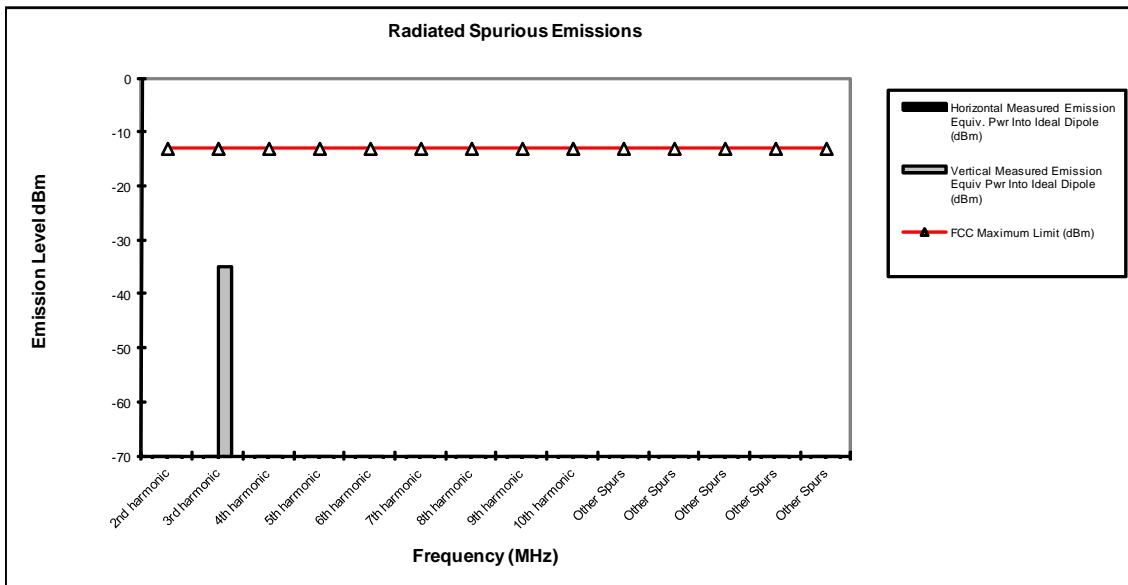


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Band: LTE Band 4**  
**Modulation: 16-QAM.**  
**Channel: All Channels**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-46.3	-44.1
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

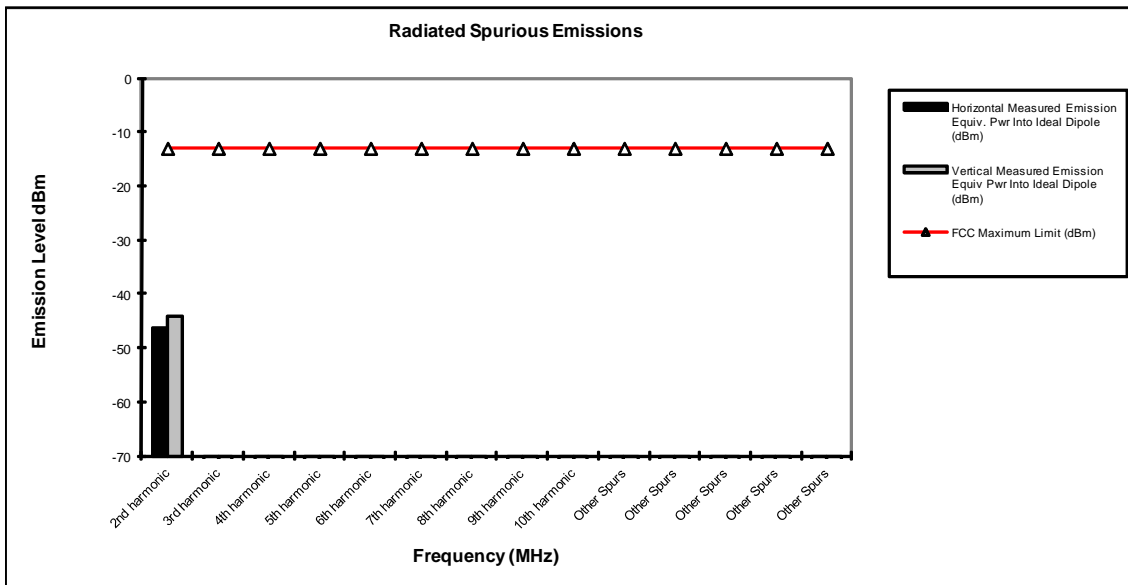


**Notes:**

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Band: LTE Band 4 with wireless charging pad**  
**Modulation: 16-QAM.**  
**Channel: All Channels**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

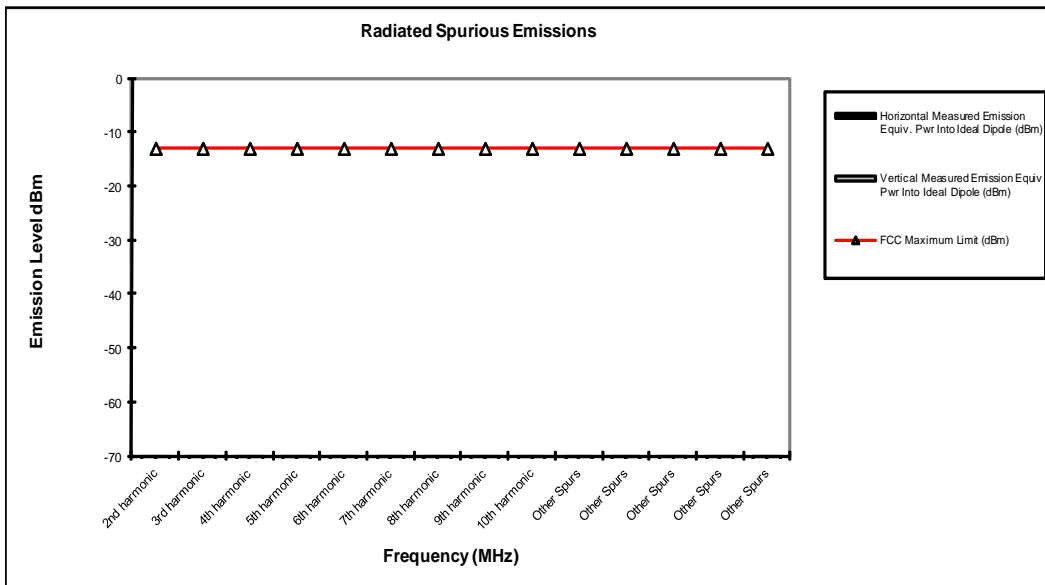


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Band: LTE Band 13 with and without wireless charging pad**  
**Modulation: QPSK and 16QAM.**  
**Channel: All Channels**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

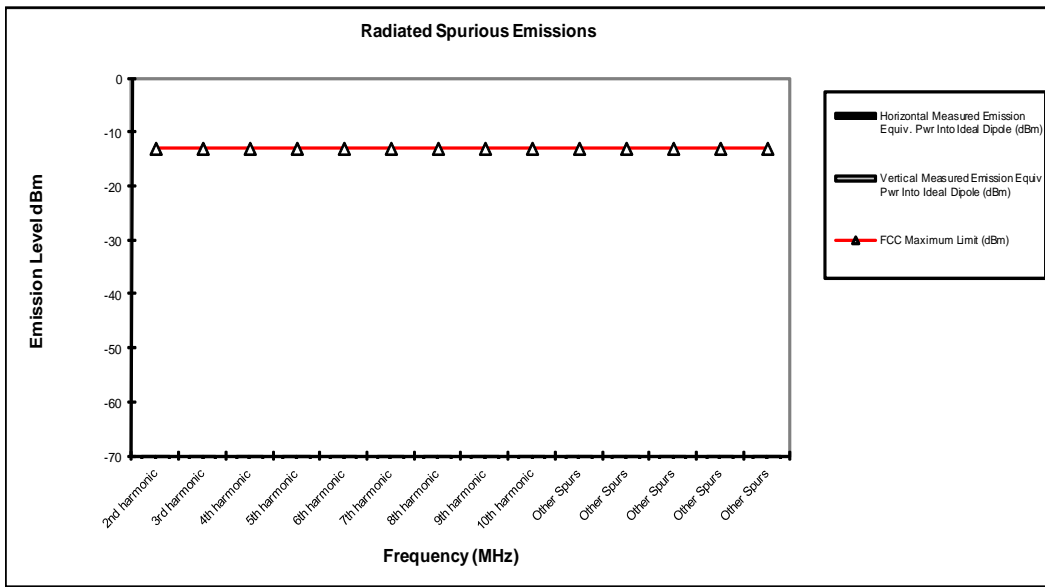

Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**FIELD STRENGTH OF SPURIOUS EMISSIONS IN 1559-1610 MHz**

§27.53 (f)

**Measurement Procedure**

The EUT is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. The fully charged internal battery was used for the supply voltage.

The power any emissions in the 1559-1610 MHz band shall be < - 40 dBm/MHz EIRP (Wideband) and < - 50dBm EIRP (narrowband).

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz for Wideband Emissions
Resolution bandwidth	1 kHz for Narrowband Emissions
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

**Measurement Results**

**Band: LTE Band 13.**  
**Modulation: QPSK and 16 QAM.**  
**RB configuration: all configurations**

No measureable emissions were found.

**FREQUENCY STABILITY**

§Part 2.1055 (a), §Part 2.1055 (d), §Part 27.54

**Measurement Procedure**

The EUT is placed in an environmental chamber. The antenna port of the EUT is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A power supply was used for the input supply voltage.

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.


The EUT was tested in the highest bandwidth and both modulations in each band and the plots are reported below.

**Measurement Results**

**Modulation: LTE Band 4 QPSK 20 MHz BW**

**Mode:** LTE Band 4-20 MHz      **Operating Frequency:** 1720 MHz  
**Channel:** 20050                      **Deviation Limit (PPM):** 2.5 ppm  
 100 RB QPSK


Temperature C	Frequency Error Hz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	13.93	0.008	100%	3.80
-20 C	7.50	0.004	100%	3.80
-10 C	-6.31	-0.004	100%	3.80
0 C	-6.62	-0.004	100%	3.80
10 C	-5.87	-0.003	100%	3.80
20 C	-9.71	-0.006	100%	3.80
30 C	-8.47	-0.005	100%	3.80
40 C	-8.55	-0.005	100%	3.80
50 C	-9.26	-0.005	100%	3.80
60 C	-9.86	-0.006	100%	3.80
20 C	-9.46	-0.006	Battery Endpoint	3.20

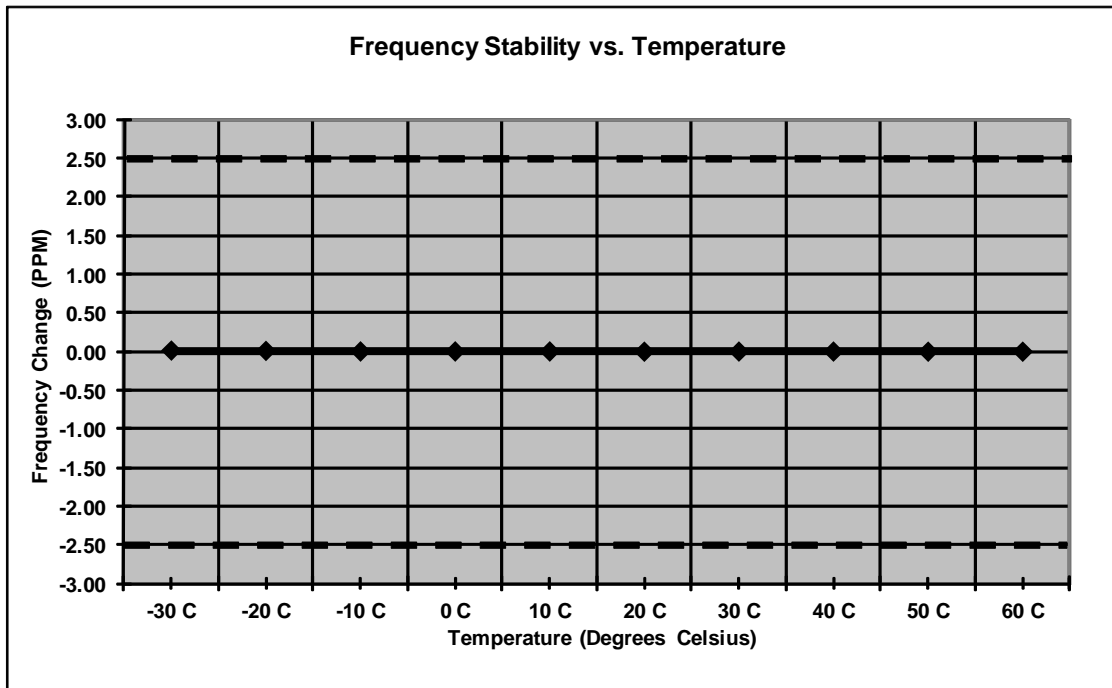

**Modulation: LTE Band 4 16-QAM 20 MHz BW**

**Mode:** LTE Band 4-20 MHz      **Operating Frequency:** 1720 MHz  
**Channel:** 20050                      **Deviation Limit (PPM):** 2.5 ppm  
 100 RB 16 QAM


Temperature C	Frequency Error Hz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-6.69	-0.004	100%	3.80
-20 C	-6.54	-0.004	100%	3.80
-10 C	5.62	0.003	100%	3.80
0 C	6.94	0.004	100%	3.80
10 C	7.78	0.005	100%	3.80
20 C	-9.56	-0.006	100%	3.80
30 C	7.82	0.005	100%	3.80
40 C	-8.58	-0.005	100%	3.80
50 C	-9.64	-0.006	100%	3.80
60 C	-12.42	-0.007	100%	3.80
20 C	-14.22	-0.008	Battery Endpoint	3.20

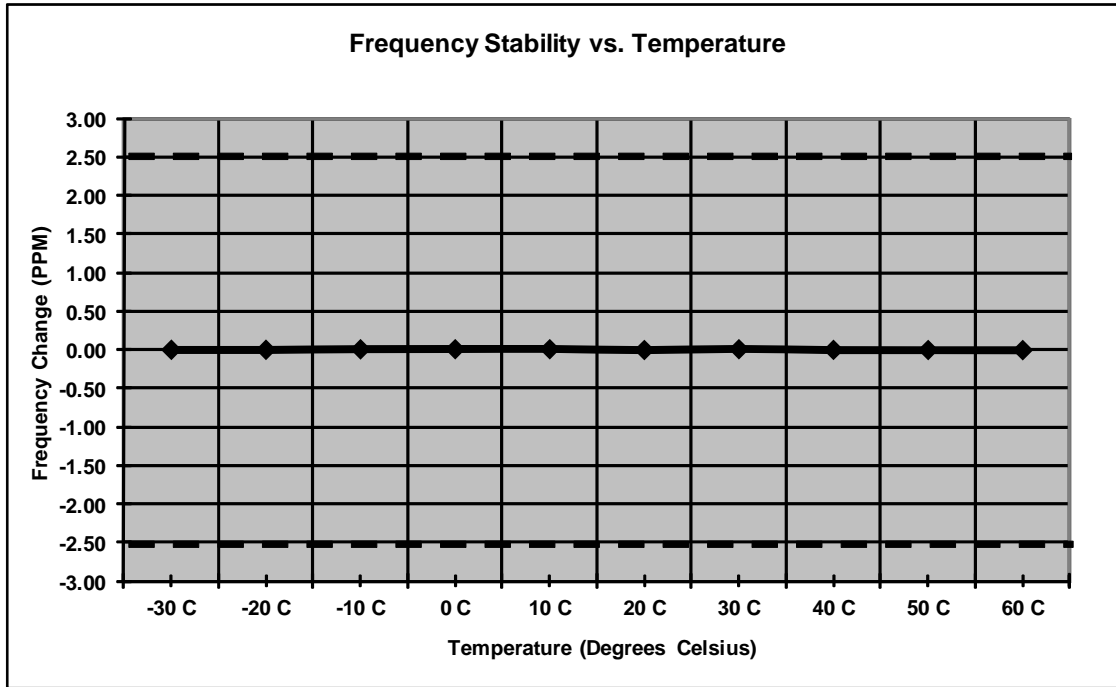

**Modulation: LTE Band 13 QPSK 10 MHz BW**

**Mode:** LTE Band 13-10 MHz    **Operating Frequency:** 782 MHz  
**Channel:** 23230    **Deviation Limit (PPM):** 2.5 ppm  
 50 RB QPSK


Temperature C	Frequency Error Hz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-4.68	-0.003	100%	3.80
-20 C	-5.18	-0.003	100%	3.80
-10 C	-5.19	-0.003	100%	3.80
0 C	4.02	0.002	100%	3.80
10 C	-4.78	-0.003	100%	3.80
20 C	-6.75	-0.004	100%	3.80
30 C	-5.71	-0.003	100%	3.80
40 C	-5.19	-0.003	100%	3.80
50 C	-5.41	-0.003	100%	3.80
60 C	-5.68	-0.003	100%	3.80
20 C	-7.01	-0.004	Battery Endpoint	3.20

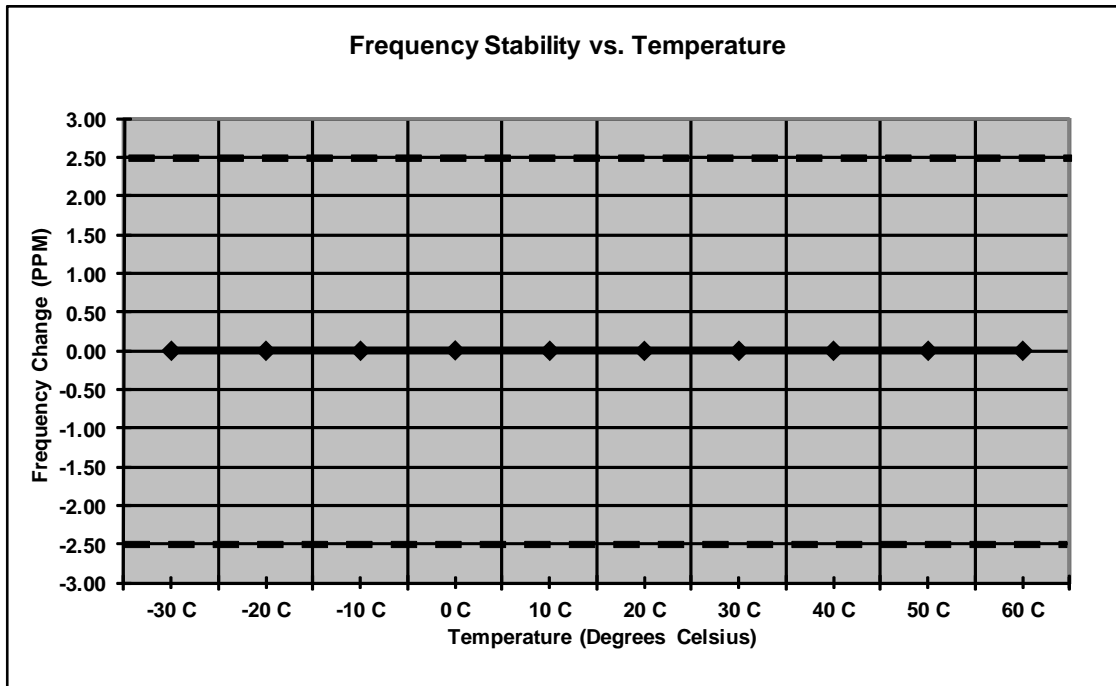

**Modulation: LTE Band 13 16-QAM 10 MHz BW**

**Mode:** LTE Band 13-10MHz      **Operating Frequency:** 782 MHz  
**Channel:** 23230                      **Deviation Limit (PPM):** 2.5 ppm  
 50RB 16 QAM

Temperature C	Frequency Error Hz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-5.19	-0.007	100%	3.80
-20 C	-5.18	-0.007	100%	3.80
-10 C	-4.26	-0.005	100%	3.80
0 C	-4.51	-0.006	100%	3.80
10 C	-5.52	-0.007	100%	3.80
20 C	-7.08	-0.009	100%	3.80
30 C	-5.49	-0.007	100%	3.80
40 C	-5.88	-0.008	100%	3.80
50 C	-5.39	-0.007	100%	3.80
60 C	-6.17	-0.008	100%	3.80
20 C	-7.12	-0.009	Battery Endpoint	3.20

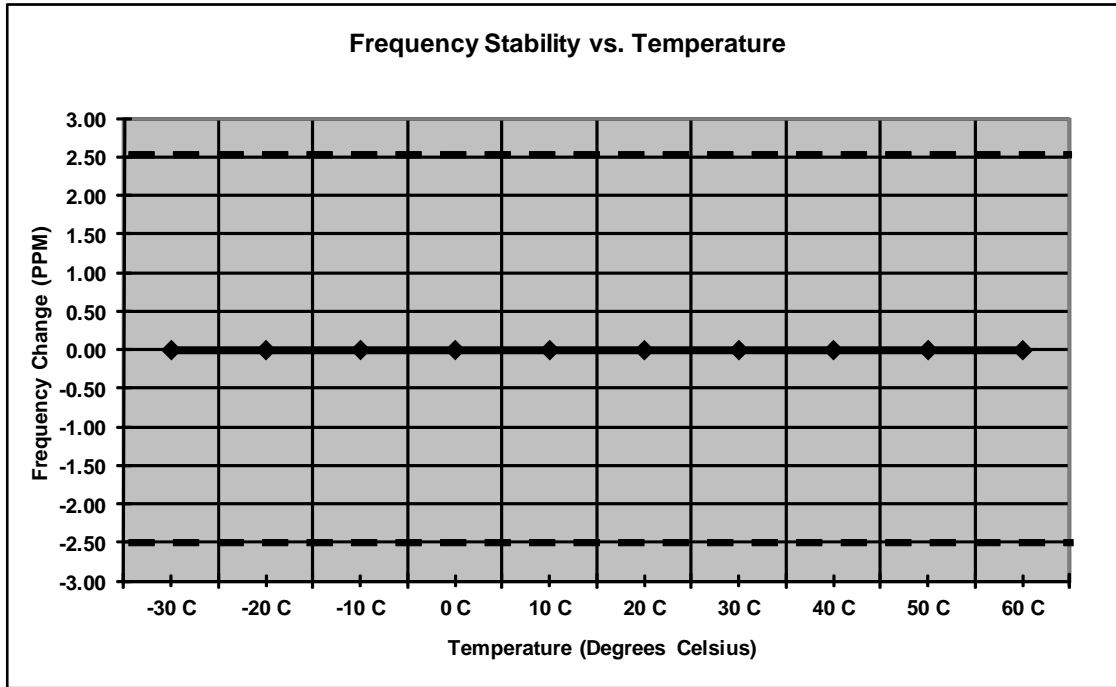

**End of Test Report**