


FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC.
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola Mobility, LLC
MODEL NAME : 3581
FCC ID : IHDT56PJ4
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance 4
2. Administration Data 4
3. Guidance Standard 5
4. Equipment Under Test (EUT) 5
4.1 General Information 5
4.2 Maximum Tune-up Limit 6
5. RF Exposure Limits 7
5.1 Uncontrolled Environment 7
5.2 Controlled Environment 7
6. Specific Absorption Rate (SAR) 8
6.1 Introduction 8
6.2 SAR Definition 8
7. System Description and Setup 9
8. Measurement Procedures 10
8.1 Spatial Peak SAR Evaluation 10
8.2 Power Reference Measurement 11
8.3 Area Scan 11
8.4 Zoom Scan 12
8.5 Volume Scan Procedures 12
8.6 Power Drift Monitoring 12
9. Test Equipment List 13
10. System Verification 14
10.1 Tissue Verification 14
10.2 System Performance Check Results 15
11. RF Exposure Positions 16
11.1 Ear and handset reference point 16
11.2 Definition of the cheek position 17
11.3 Definition of the tilt position 18
11.4 Body Worn Accessory 19
11.5 Wireless Router 19
12. Conducted RF Output Power (Unit: dBm) 20
13. Antenna Location 22
14. SAR Test Results 23
14.1 Head SAR 24
14.2 Hotspot SAR 25
14.3 Body Worn Accessory SAR 26
14.4 Repeated SAR Measurement 27
15. Simultaneous Transmission Analysis 27
15.1 Head Exposure Conditions 28
15.2 Hotspot Exposure Conditions 28
15.3 Body-Worn Accessory Exposure Conditions 29
15.4 SPLSR Evaluation and Analysis 30
16. Uncertainty Assessment 31
17. References 33
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility, LLC., Mobile Cellular Phone, 3581**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			
		Head (Separation 0mm) 1g SAR (W/kg)	Body-worn (Separation 15mm) 1g SAR (W/kg)	Wireless Router (Separation 10mm) 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
PCE	CDMA 2000 BC10	0.76	0.93	0.54	1.55
	CDMA 2000 BC0	0.98	0.93	0.60	
	CDMA 2000 BC1	1.41	1.50	1.55	
DTS	WLAN 2.4GHz Band	0.12	0.19	0.35	1.55
DSS	Bluetooth	0.02	0.03	0.05	1.55
Date of Testing:		05/03/2014 ~ 05/22/2014			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States



3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola Mobility, LLC
Model Name	3581
FCC ID	IHDT56PJ4
MEID Code	A000002CE1C966A
Wireless Technology and Frequency Range	CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) • 802.11b/g/n HT20 • Bluetooth v3.0+EDR , Bluetooth v4.0-LE
HW Version	P3
SW Version	4.4.2 KXC20.82.83
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> 1. This device supported VoIP in CDMA (e.g. 3rd party VoIP). 2. While operating in body-adjacent exposure configurations during a mobile hotspot session and body-worn accessory exposure conditions, reduced power limits are enforced on the CDMA BC1 transmitter. More detailed information which can be referred to "operational description". 	



4.2 Maximum Tune-up Limit

Band / Mode		Average Power (dBm)	
CDMA	BC 10	25.00	
	BC 0	25.00	
	BC 1	25.00	
2.4GHz WLAN	802.11b	19.00	
	802.11g	CH 01	9.00
		CH 06	15.00
		CH 11	10.00
	802.11n	CH 01	9.00
		CH 06	15.00
		CH 11	10.00
2.4GHz Bluetooth	v3.0+EDR	11.50	
	v4.0-LE	2.50	



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

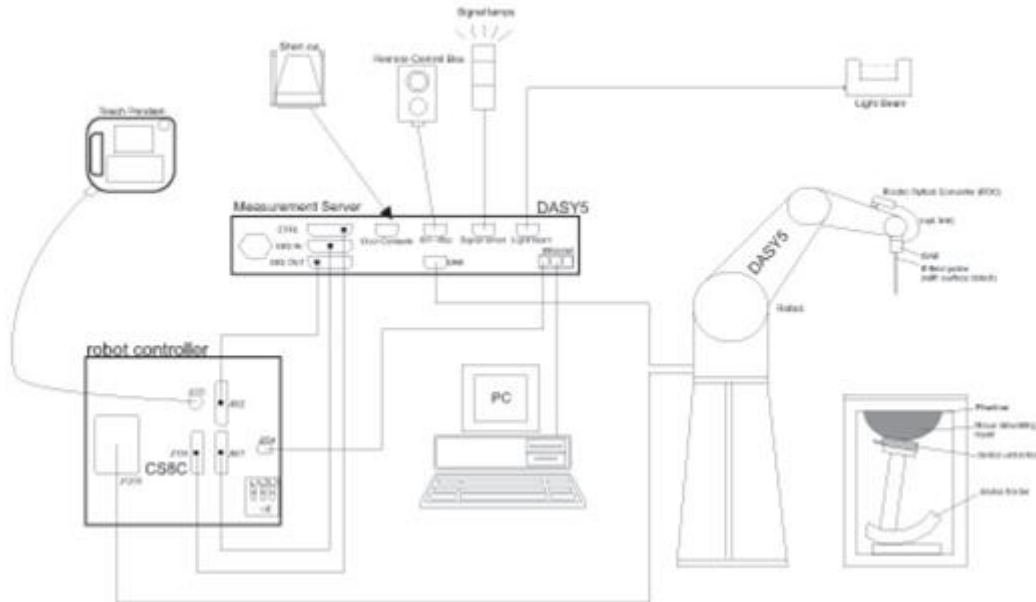

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 24, 2014	Mar. 23, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2014	Mar. 20, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 05, 2013	Nov. 04, 2014
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 10, 2014	Jan. 09, 2016
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 25, 2014	Mar. 24, 2015
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 2	
Woken	Attenuator	WK0602-XX	N/A	Note 2	
PE	Attenuator	PE7005-10	N/A	Note 2	
PE	Attenuator	PE7005- 3	N/A	Note 2	
AR	Power Amplifier	5S1G4M2	0328767	Note 2	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 2	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 2	

General Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler were measured by the network analyzer. The reading of the power meter was compensated by the path loss between the signal generator and the power meter, and offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.3	0.918	41.074	0.90	41.50	2.00	-1.03	±5	2014/5/12
835	Body	22.4	0.953	52.720	0.97	55.20	-1.75	-4.49	±5	2014/5/12
835	Body	22.5	0.963	54.541	0.97	55.20	-0.72	-1.19	±5	2014/5/18
1900	Head	22.6	1.432	39.131	1.40	40.00	2.29	-2.17	±5	2014/5/3
1900	Head	22.3	1.458	38.959	1.40	40.00	4.14	-2.60	±5	2014/5/14
1900	Body	22.3	1.544	51.591	1.52	53.30	1.58	-3.21	±5	2014/5/13
1900	Body	22.4	1.557	52.570	1.52	53.30	2.43	-1.37	±5	2014/5/16
2450	Head	22.5	1.850	38.600	1.80	39.20	2.78	-1.53	±5	2014/5/20
2450	Head	22.5	1.790	38.700	1.80	39.20	-0.56	-1.28	±5	2014/5/22
2450	Body	22.3	2.015	53.957	1.95	52.70	3.33	2.39	±5	2014/5/13
2450	Body	22.5	1.927	53.408	1.95	52.70	-1.18	1.34	±5	2014/5/20
2450	Body	22.5	2.000	54.000	1.95	52.70	2.56	2.47	±5	2014/5/22

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/5/12	835	Head	250	D835V2-499	3935	1338	2.39	9.13	9.56	4.71
2014/5/12	835	Body	250	D835V2-499	3935	1338	2.33	9.46	9.32	-1.48
2014/5/18	835	Body	250	D835V2-499	3270	778	2.41	9.46	9.64	1.90
2014/5/3	1900	Head	250	D1900V2-5d041	3270	778	9.70	41.00	38.80	-5.37
2014/5/14	1900	Head	250	D1900V2-5d041	3955	1399	10.40	41.00	41.60	1.46
2014/5/13	1900	Body	250	D1900V2-5d041	3935	1338	10.43	41.00	41.72	1.76
2014/5/16	1900	Body	250	D1900V2-5d041	3270	778	10.00	41.00	40.00	-2.44
2014/5/20	2450	Head	250	D2450V2-924	3935	1338	12.60	52.40	50.40	-3.82
2014/5/22	2450	Head	250	D2450V2-924	3935	1338	12.60	52.40	50.40	-3.82
2014/5/13	2450	Body	250	D2450V2-924	3935	1338	12.50	50.20	50.00	-0.40
2014/5/20	2450	Body	250	D2450V2-924	3935	1338	12.40	50.20	49.60	-1.20
2014/5/22	2450	Body	250	D2450V2-924	3270	778	11.90	50.20	47.60	-5.18

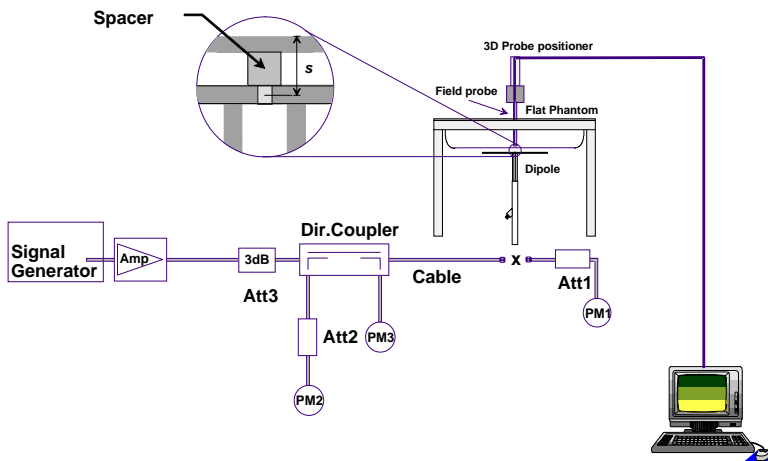


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

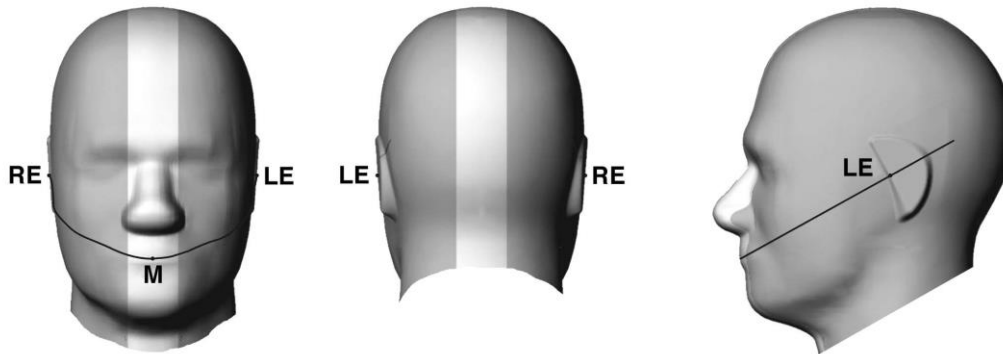


Fig 9.1.1 Front, back, and side views of SAM twin phantom

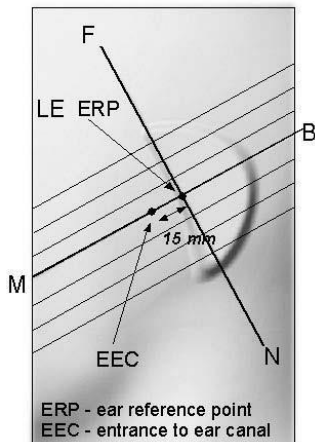


Fig 9.1.2 Close-up side view of phantom showing the ear region.

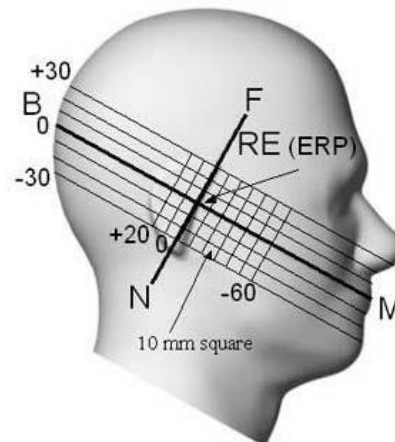


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

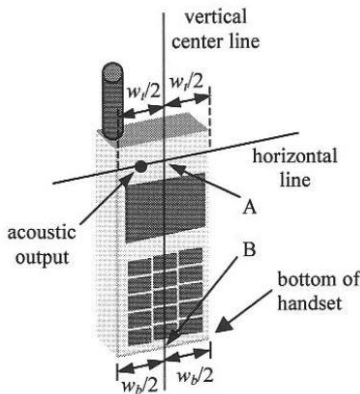


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

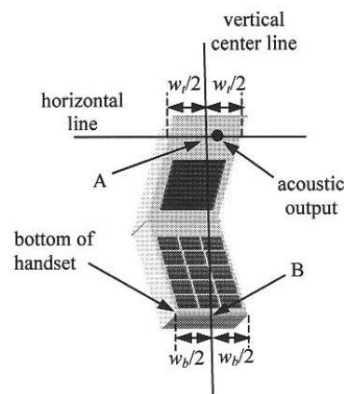


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

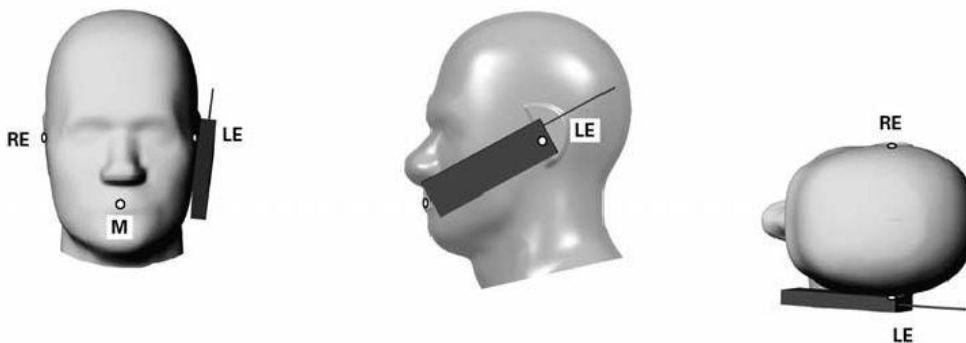


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

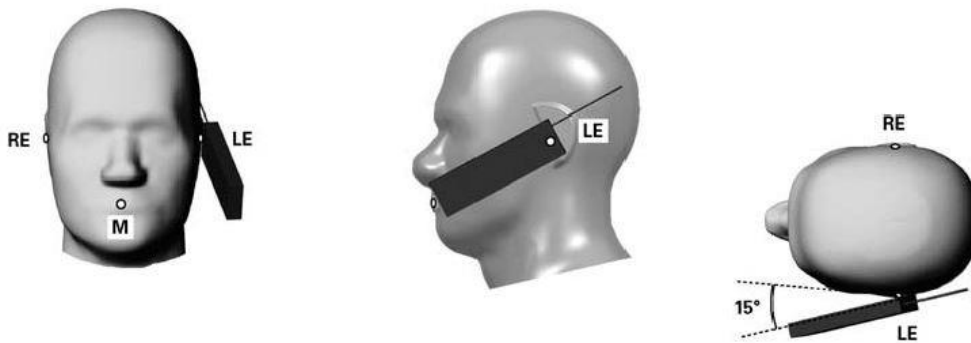


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

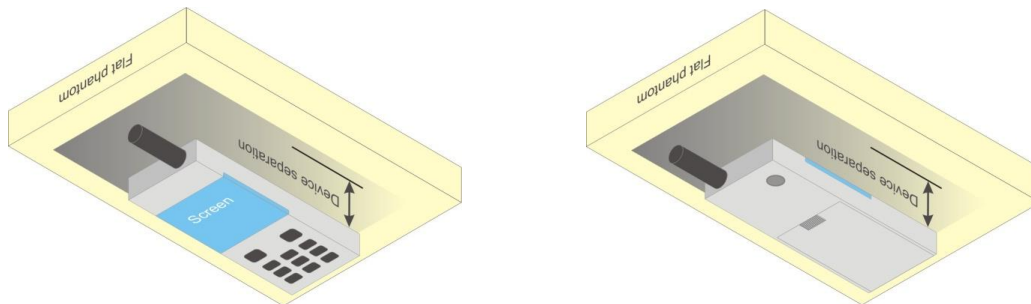


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06v01r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm \times 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<CDMA2000 Conducted Power>

General Note:

- Per KDB 941225 D01v02, Head SAR for RC1+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55.
- Per KDB 941225 D01v02, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is high than 1/4dB higher than Re v0, SAR tests with those settings are necessary.
- Per KDB 941225 D01v02, SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only.

Band	CDMA2000 BC10			CDMA2000 BC0			CDMA2000 BC1		
TX Channel	476	580	684	1013	384	777	25	600	1175
Frequency (MHz)	817.9	820.5	823.1	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	24.79	24.55	24.53	24.58	24.40	24.64	24.61	24.36	24.52
1xRTT RC3 SO55	24.80	24.58	24.55	24.48	24.42	24.68	24.66	24.41	24.60
1xRTT RC3 SO32(+ F-SCH)	24.75	24.53	24.67	24.58	24.42	24.65	24.65	24.55	24.61
1xRTT RC3 SO32(+SCH)	24.74	24.56	24.66	24.48	24.33	24.65	24.50	24.47	24.61
1xEVDO RTAP 153.6 Kbps	24.77	24.79	24.61	24.58	24.66	24.60	24.59	24.45	24.62
1xEVDO RETAP 4096 bits	24.77	24.54	24.59	24.62	24.50	24.56	24.57	24.42	24.64

<2.4GHz Bluetooth>

General Note:

- For 2.4GHz Bluetooth v3.0+EDR SAR testing was selected 1Mbps, due to its highest average power.
- The duty factor was used theoretical 83.3% perform Bluetooth v3.0+EDR SAR testing.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
v3.0+EDR	CH 00	2402	11.40	9.22	9.29
	CH 39	2441	10.59	8.58	8.67
	CH 78	2480	10.53	8.40	8.44

Mode	Maximum Average power(dBm)
v4.0+LE	2.5

General Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
2.50	5	2.48	0.63

General Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.63 which is ≤ 3, SAR testing is not required.



<2.4GHz WLAN>

General Note:


- For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.

Mode	Channel	Frequency (MHz)	Average power (dBm)			
			Data Rate			
			1Mbps	2Mbps	5.5Mbps	11Mbps
802.11b	CH 1	2412	18.70	18.65	18.57	18.55
	CH 6	2437	18.95	18.93	18.63	18.63
	CH 11	2462	18.50	18.46	18.41	18.31

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate							
			6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
802.11g	CH 1	2412	7.97	7.92	7.86	7.88	7.83	7.89	7.91	7.88
	CH 6	2437	13.87	13.84	13.78	13.76	13.72	13.86	13.77	13.84
	CH 11	2462	9.57	9.54	9.51	9.47	9.51	9.47	9.55	9.55

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n-HT20	CH 1	2412	7.44	7.42	7.38	7.38	7.37	7.40	7.34	7.44
	CH 6	2437	13.86	13.81	13.79	13.81	13.77	13.78	13.74	13.72
	CH 11	2462	9.18	9.14	9.13	9.09	9.14	9.12	9.08	9.06

13. Antenna Location

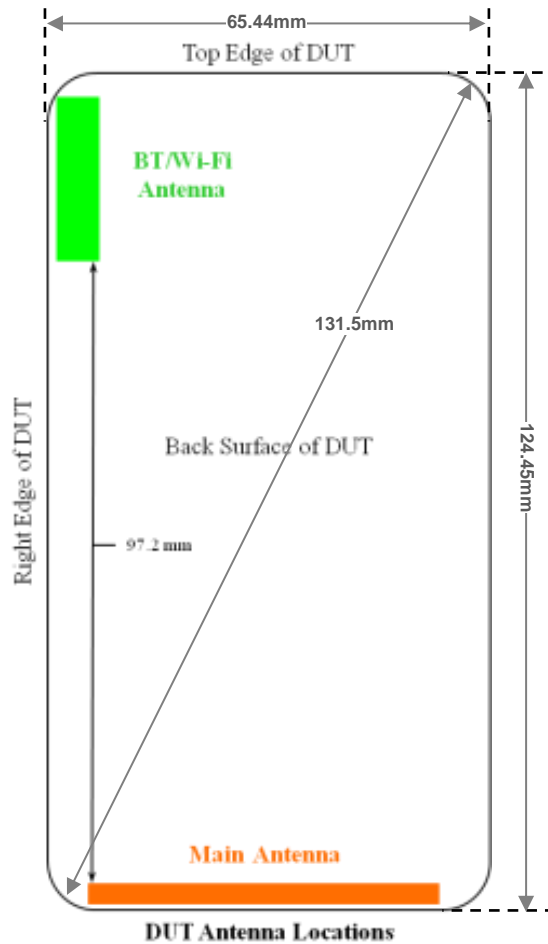

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 941225 D01v02, Head SAR for RC3+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55 and considering the possibility of e.g. 3rd party VoIP was additional Ev-Do Rev A (RETAP 4096 bits) SAR testing performed on RC3+SO55 worse case.
4. Per KDB 941225 D01v02, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is high than 1/4dB higher than Re v0, SAR tests with those settings are necessary.
5. Per KDB 941225 D01v02, SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. To account for VOIP operation, Ev-Do Rev. A (RETAP 4096 bits) SAR testing was performed at the worst position identified by 1xRTT SAR test results, for both head and body-worn accessory exposure conditions.
6. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC10	RC3+SO55	Right Cheek	476	817.9	24.80	25.00	1.047	-0.05	0.673	0.705
	CDMA BC10	RC3+SO55	Right Tilted	476	817.9	24.80	25.00	1.047	0.02	0.570	0.597
01	CDMA BC10	RC3+SO55	Left Cheek	476	817.9	24.80	25.00	1.047	-0.04	0.727	0.761
	CDMA BC10	RETAP 4096 bits	Left Cheek	476	817.9	24.77	25.00	1.054	-0.04	0.434	0.458
	CDMA BC10	RC3+SO55	Left Tilted	476	817.9	24.80	25.00	1.047	-0.04	0.555	0.581
	CDMA BC0	RC3+SO55	Right Cheek	777	848.31	24.68	25.00	1.076	-0.07	0.786	0.846
	CDMA BC0	RC3+SO55	Right Tilted	777	848.31	24.68	25.00	1.076	-0.08	0.621	0.668
02	CDMA BC0	RC3+SO55	Left Cheek	777	848.31	24.68	25.00	1.076	0.05	0.907	0.976
	CDMA BC0	RC3+SO55	Left Cheek	384	836.52	24.42	25.00	1.143	-0.01	0.820	0.937
	CDMA BC0	RC3+SO55	Left Cheek	1013	824.7	24.48	25.00	1.127	-0.04	0.621	0.700
	CDMA BC0	RETAP 4096 bits	Left Cheek	1013	824.04	24.62	25.00	1.091	-0.07	0.463	0.505
	CDMA BC0	RC3+SO55	Left Tilted	777	848.31	24.68	25.00	1.076	-0.03	0.594	0.639
	CDMA BC1	RC3+SO55	Right Cheek	25	1851.25	24.66	25.00	1.081	0.01	0.764	0.826
	CDMA BC1	RC3+SO55	Right Cheek	600	1880	24.41	25.00	1.146	0.01	1.050	1.203
03	CDMA BC1	RC3+SO55	Right Cheek	1175	1908.75	24.60	25.00	1.096	0.13	1.290	1.414
	CDMA BC1	RETAP 4096 bits	Right Cheek	1175	1908.75	24.64	25.00	1.086	0.03	1.190	1.293
	CDMA BC1	RETAP 4096 bits	Right Cheek	25	1851.25	24.57	25.00	1.104	0.02	0.751	0.829
	CDMA BC1	RETAP 4096 bits	Right Cheek	600	1880	24.42	25.00	1.143	-0.03	1.010	1.154
	CDMA BC1	RC3+SO55	Right Tilted	25	1851.25	24.66	25.00	1.081	0.06	0.261	0.282
	CDMA BC1	RC3+SO55	Left Cheek	25	1851.25	24.66	25.00	1.081	0.03	0.336	0.363
	CDMA BC1	RC3+SO55	Left Tilted	25	1851.25	24.66	25.00	1.081	0.03	0.290	0.314

<2.4GHz WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	18.95	19.00	1.012	0.021	0.038	0.038
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	18.95	19.00	1.012	-0.056	0.033	0.033
04	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	18.95	19.00	1.012	-0.113	0.123	0.124
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	6	2437	18.95	19.00	1.012	-0.094	0.086	0.087

<2.4GHz Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0	2402	11.40	11.50	1.023	-0.001	0.007	0.007
	Bluetooth	1Mbps	Right Tilted	0	2402	11.40	11.50	1.023	0.025	0.005	0.005
05	Bluetooth	1Mbps	Left Cheek	0	2402	11.40	11.50	1.023	-0.137	0.022	0.023
	Bluetooth	1Mbps	Left Tilted	0	2402	11.40	11.50	1.023	0.064	0.015	0.015



14.2 Hotspot SAR

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC10	RTAP 153.6 Kbps	Front	1cm	580	820.5	OFF	24.79	25.00	1.050	-0.04	0.415	0.436
06	CDMA BC10	RTAP 153.6 Kbps	Back	1cm	580	820.5	OFF	24.79	25.00	1.050	-0.01	0.514	0.539
	CDMA BC10	RTAP 153.6 Kbps	Left Side	1cm	580	820.5	OFF	24.79	25.00	1.050	-0.05	0.417	0.438
	CDMA BC10	RTAP 153.6 Kbps	Right Side	1cm	580	820.5	OFF	24.79	25.00	1.050	-0.07	0.371	0.389
	CDMA BC10	RTAP 153.6 Kbps	Bottom Side	1cm	580	820.5	OFF	24.79	25.00	1.050	-0.04	0.042	0.044
	CDMA BC0	RTAP 153.6 Kbps	Front	1cm	384	836.52	OFF	24.66	25.00	1.081	0.05	0.455	0.492
07	CDMA BC0	RTAP 153.6 Kbps	Back	1cm	384	836.52	OFF	24.66	25.00	1.081	-0.02	0.556	0.601
	CDMA BC0	RTAP 153.6 Kbps	Left Side	1cm	384	836.52	OFF	24.66	25.00	1.081	-0.05	0.352	0.381
	CDMA BC0	RTAP 153.6 Kbps	Right Side	1cm	384	836.52	OFF	24.66	25.00	1.081	-0.06	0.406	0.439
	CDMA BC0	RTAP 153.6 Kbps	Bottom Side	1cm	384	836.52	OFF	24.66	25.00	1.081	0.05	0.055	0.059
	CDMA BC1	RTAP 153.6 Kbps	Front	1cm	1175	1908.75	ON		19.00	1.000	-0.03	0.484	0.484
	CDMA BC1	RTAP 153.6 Kbps	Back	1cm	1175	1908.75	ON		19.00	1.000	0.09	0.956	0.956
	CDMA BC1	RTAP 153.6 Kbps	Back	1cm	25	1851.25	ON		19.00	1.000	0.06	0.723	0.723
	CDMA BC1	RTAP 153.6 Kbps	Back	1cm	600	1880	ON		19.00	1.000	0.05	0.820	0.820
	CDMA BC1	RTAP 153.6 Kbps	Left Side	1cm	1175	1908.75	ON		19.00	1.000	0.15	0.026	0.026
	CDMA BC1	RTAP 153.6 Kbps	Right Side	1cm	1175	1908.75	ON		19.00	1.000	-0.02	0.133	0.133
08	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	1175	1908.75	ON		19.00	1.000	-0.1	1.550	1.550
	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	25	1851.25	ON		19.00	1.000	-0.01	0.946	0.946
	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	600	1880	ON		19.00	1.000	-0.01	1.170	1.170

<2.4GHz WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	1cm	6	2437	18.95	19.00	1.012	-0.04	0.045	0.046
09	WLAN2.4GHz	802.11b 1Mbps	Back	1cm	6	2437	18.95	19.00	1.012	-0.08	0.350	0.354
	WLAN2.4GHz	802.11b 1Mbps	Right Side	1cm	6	2437	18.95	19.00	1.012	-0.06	0.177	0.179
	WLAN2.4GHz	802.11b 1Mbps	Top Side	1cm	6	2437	18.95	19.00	1.012	0.01	0.049	0.050

<2.4GHz Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	1cm	0	2402	11.40	11.50	1.023	0.053	0.005	0.005
10	Bluetooth	1Mbps	Back	1cm	0	2402	11.40	11.50	1.023	0.097	0.052	0.053
	Bluetooth	1Mbps	Right Side	1cm	0	2402	11.40	11.50	1.023	-0.02	0.034	0.035
	Bluetooth	1Mbps	Top Side	1cm	0	2402	11.40	11.50	1.023	0.054	0.009	0.009



14.3 Body Worn Accessory SAR

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC10	1xRTT RC3 SO32	Front	1.5cm		476	817.9	OFF	24.75	25.00	1.059	-0.06	0.668	0.708
11	CDMA BC10	1xRTT RC3 SO32	Back	1.5cm		476	817.9	OFF	24.75	25.00	1.059	-0.04	0.877	0.929
	CDMA BC10	RETAP 4096 bits	Back	1.5cm		476	817.9	OFF	24.77	25.00	1.054	-0.05	0.567	0.598
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm		777	848.31	OFF	24.65	25.00	1.084	-0.07	0.824	0.893
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm		1013	824.7	OFF	24.58	25.00	1.102	-0.03	0.662	0.729
	CDMA BC0	1xRTT RC3 SO32	Front	1.5cm		384	836.52	OFF	24.42	25.00	1.143	-0.03	0.642	0.734
12	CDMA BC0	1xRTT RC3 SO32	Back	1.5cm		777	848.31	OFF	24.65	25.00	1.084	-0.04	0.855	0.927
	CDMA BC0	1xRTT RC3 SO32	Back	1.5cm		1013	824.7	OFF	24.58	25.00	1.102	0	0.753	0.829
	CDMA BC0	1xRTT RC3 SO32	Back	1.5cm		384	836.52	OFF	24.42	25.00	1.143	0.01	0.674	0.770
	CDMA BC0	RETAP 4096 bits	Back	1.5cm		1013	824.7	OFF	24.62	25.00	1.091	0.07	0.484	0.528
	CDMA BC1	1xRTT RC3 SO32	Front	1.5cm		25	1851.25	ON		23.00	1.000	-0.05	0.652	0.652
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		25	1851.25	ON		23.00	1.000	0.02	1.130	1.130
13	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		600	1880	ON		23.00	1.000	0.02	1.500	1.500
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm		1175	1908.75	ON		23.00	1.000	-0.07	1.460	1.460
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		1175	1908.75	ON		23.00	1.000	-0.12	1.490	1.490
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		25	1851.25	ON		23.00	1.000	-0.03	1.150	1.150
	CDMA BC1	RETAP 4096 bits	Back	1.5cm		600	1880	ON		23.00	1.000	-0.12	1.450	1.450
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	25	1851.25	ON		23.00	1.000	0.02	1.150	1.150
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	600	1880	ON		23.00	1.000	0.02	1.490	1.490
	CDMA BC1	1xRTT RC3 SO32	Back	1.5cm	Headset	1175	1908.75	ON		23.00	1.000	0.05	1.450	1.450

<2.4GHz WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	1.5cm		6	2437		18.95	19.00	1.012	-0.01	0.028	0.028
14	WLAN2.4GHz	802.11b 1Mbps	Back	1.5cm		6	2437		18.95	19.00	1.012	-0.06	0.184	0.186
	WLAN2.4GHz	802.11b 1Mbps	Back	1.5cm	Headset	6	2437		18.95	19.00	1.012	-0.09	0.179	0.181

<2.4GHz Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	1.5cm		0	2402		11.40	11.50	1.023	0.061	0.002	0.002
15	Bluetooth	1Mbps	Back	1.5cm		0	2402		11.40	11.50	1.023	0.052	0.025	0.026
	Bluetooth	1Mbps	Back	1.5cm	Headset	0	2402		11.40	11.50	1.023	0.048	0.023	0.024

14.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Power Reduction	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
Original	CDMA BC0	RC3+SO55	Left Cheek		777	848.31	OFF	24.68	25.00	1.076	0.05	0.907	-	0.976
1st	CDMA BC0	RC3+SO55	Left Cheek		777	848.31	OFF	24.68	25.00	1.076	-0.04	0.892	1.02	0.960
Original	CDMA BC10	1xRTT RC3 SO32	Back	1.5cm	476	817.9	OFF	24.75	25.00	1.059	-0.04	0.877	-	0.929
1st	CDMA BC10	1xRTT RC3 SO32	Back	1.5cm	476	817.9	OFF	24.75	25.00	1.059	0.07	0.769	1.14	0.815
Original	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	1175	1908.75	ON		19.00	1.000	-0.1	1.550	-	1.550
1st	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	1175	1908.75	ON		19.00	1.000	-0.11	1.473	1.05	1.473
2nd	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	1175	1908.75	ON		19.00	1.000	-0.05	1.490	1.04	1.490
3rd	CDMA BC1	RTAP 153.6 Kbps	Bottom Side	1cm	1175	1908.75	ON		19.00	1.000	-0.05	1.436	1.09	1.436

General Note:

- Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$
- Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 W/kg$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	CDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	CDMA((Voice) + Bluetooth(data)	Yes	Yes		
3.	CDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
4.	CDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering

General Note:

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6W/kg$.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6W/kg$.
 - The SPLSR calculated results please refer to section 15.4.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed SAR (W/kg)	1+3 Summed SAR (W/kg)
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth		
			SAR (W/kg)	SAR (W/kg)	SAR (W/kg)		
CDMA	BC10	Right Cheek	0.705	0.038	0.007	0.74	0.71
		Right Tilted	0.597	0.033	0.005	0.63	0.60
		Left Cheek	0.761	0.124	0.023	0.89	0.78
		Left Tilted	0.581	0.087	0.015	0.67	0.60
	BC0	Right Cheek	0.846	0.038	0.007	0.88	0.85
		Right Tilted	0.668	0.033	0.005	0.70	0.67
		Left Cheek	0.976	0.124	0.023	1.10	1.00
		Left Tilted	0.639	0.087	0.015	0.73	0.65
	BC1	Right Cheek	1.414	0.038	0.007	1.45	1.42
		Right Tilted	0.282	0.033	0.005	0.32	0.29
		Left Cheek	0.363	0.124	0.023	0.49	0.39
		Left Tilted	0.314	0.087	0.015	0.40	0.33

15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed SAR (W/kg)	1+3 Summed SAR (W/kg)
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth		
			SAR (W/kg)	SAR (W/kg)	SAR (W/kg)		
CDMA	BC10	Front	0.436	0.046	0.005	0.48	0.44
		Back	0.539	0.354	0.053	0.89	0.59
		Left side	0.438			0.44	0.44
		Right side	0.389	0.179	0.035	0.57	0.42
		Top side		0.050	0.009	0.05	0.01
		Bottom side	0.044			0.04	0.04
	BC0	Front	0.492	0.046	0.005	0.54	0.50
		Back	0.601	0.354	0.053	0.96	0.65
		Left side	0.381			0.38	0.38
		Right side	0.439	0.179	0.035	0.62	0.47
		Top side		0.050	0.009	0.05	0.01
		Bottom side	0.059			0.06	0.06
	BC1	Front	0.484	0.046	0.005	0.53	0.49
		Back	0.956	0.354	0.053	1.31	1.01
		Left side	0.026			0.03	0.03
		Right side	0.133	0.179	0.035	0.31	0.17
		Top side		0.050	0.009	0.05	0.01
		Bottom side	1.550			1.55	1.55




15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	WWAN	2.4GHz WLAN	Summed SAR (W/kg)	SPLSR	Case No
			SAR (W/kg)	SAR (W/kg)			
CDMA	BC10	Front	0.708	0.028	0.74		
		Back	0.929	0.186	1.12		
	BC0	Front	0.893	0.028	0.92		
		Back	0.927	0.186	1.11		
	BC1	Front	0.652	0.028	0.68		
		Back	1.500	0.186	1.69	0.02	Case 1
		Back with Headset	1.490	0.181	1.67	0.02	Case 2


WWAN Band		Exposure Position	WWAN	2.4GHz Bluetooth	Summed SAR (W/kg)	SPLSR	Case No
			SAR (W/kg)	SAR (W/kg)			
CDMA	BC10	Front	0.708	0.002	0.71		
		Back	0.929	0.026	0.96		
	BC0	Front	0.893	0.002	0.90		
		Back	0.927	0.026	0.95		
	BC1	Front	0.652	0.002	0.65		
		Back	1.500	0.026	1.53		
		Back with Headset	1.490	0.024	1.51		

15.4 SPLSR Evaluation and Analysis

Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC1				X	Y	Z				
	2.4GHz WLAN	Back	1.500	1.5	-0.021	-0.062	-0.203	116.3	1.69	0.02	Not required
			0.186	1.5	-0.0398	0.0528	-0.205				

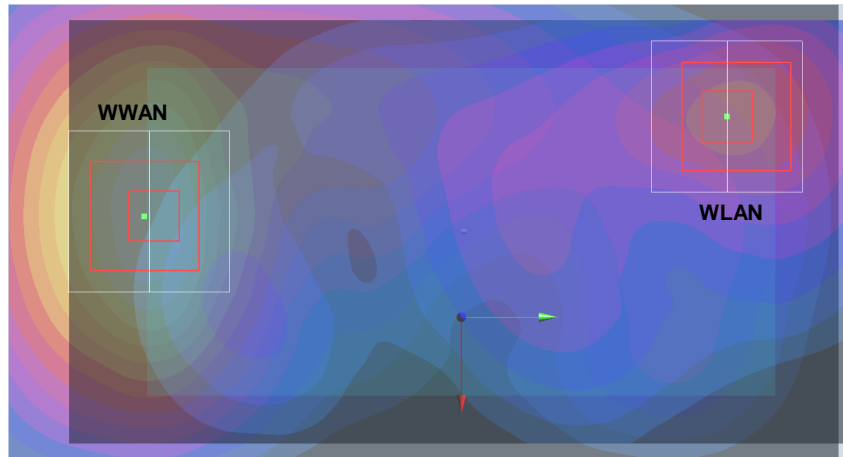

Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	CDMA BC1				X	Y	Z				
	2.4GHz WLAN	Back with Headset	1.490	1.5	-0.021	-0.062	-0.203	116.3	1.67	0.02	Not required
			0.181	1.5	-0.0398	0.0528	-0.205				

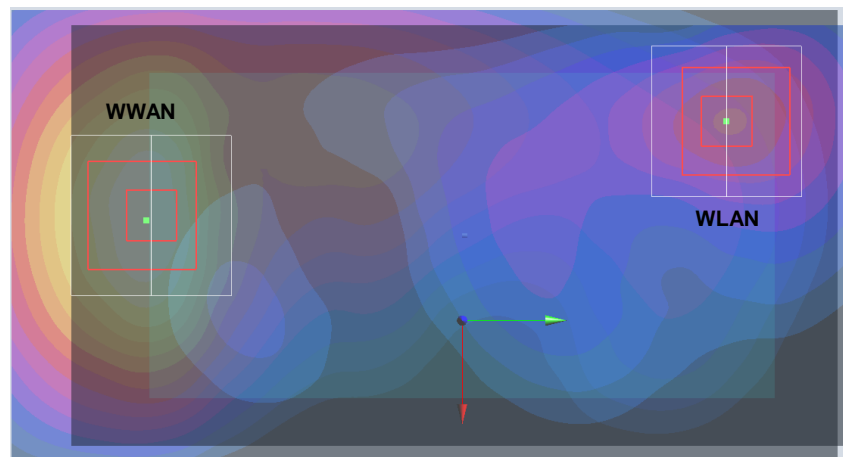

Test Engineer : Lawrence Chen, Tom Jiang, Aaron Chen, Tommy Chen, Iran Wang, San Lin, Mood Huang, and Domo Hsiao

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [9] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [10] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [11] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [12] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.