



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 3600
FCC ID : IHDT56QD2
STANDARD : 47 CFR Part 2, 22(H), 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 11, 2014 and completely tested on Oct. 02, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	4
SUMMARY OF TEST RESULT	5
1 GENERAL DESCRIPTION	7
1.1 Applicant	7
1.2 Manufacturer	7
1.3 Product Feature of Equipment Under Test.....	7
1.4 Product Specification subjective to this standard	8
1.5 Modification of EUT	8
1.6 Emission Designator	8
1.7 Testing Location	9
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example.....	12
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power and ERP/EIRP	14
3.5 Peak-to-Average Ratio	15
3.6 Occupied Bandwidth	16
3.7 Conducted Band Edge	17
3.8 Conducted Spurious Emission	19
3.9 Frequency Stability	20
4 RADIATED TEST ITEMS	21
4.1 Measuring Instruments	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test	21
4.4 Effective Radiated Power and Effective Isotropic Radiated Power	22
4.5 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 UNCERTAINTY OF EVALUATION	25

APPENDIX A. TEST RESULTS OF CONDUCTED TEST



APPENDIX B. TEST RESULTS OF RADIATED TEST



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG491144B	Rev. 01	Initial issue of report	Oct. 10, 2014

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049 §22.917(b) §27.53(m)(6)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(m)(4)	Conducted Band Edge Measurement	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.8	§2.1053 §22.917(a)	Conducted Spurious Emission	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
	§2.1053 §27.53(m)(4)	Conducted Spurious Emission	$< 55 + 10 \log_{10}(P[\text{Watts}])$		
3.9	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22.355 Emission must remain In-band for 27.54	PASS	



4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 5)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 10.52 dB at 10740.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission	$< 55 + 10 \log_{10}(P[\text{Watts}])$		
4.5	§22.913(a)(2)	Effective Radiated Power	ERP < 7 Watt	PASS	
	§27.50(h)(2)	Equivalent Isotropic Radiated Power	EIRP < 2Watt		



1 General Description

1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	3600
IMEI	359320050014850
FCC ID	IHDT56QD2
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC 2.4GHz WLAN 11b/g/n HT20 WLAN 11ac VHT20 5 GHz WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 EDR Bluetooth v4.0 - LE
HW Version	P2
EUT Stage	Identical Prototype

Accessory List	
AC Adapter	Brand Name : Motorola
	Model Name : SPN5864A
Earphone	Brand Name : Motorola
	Model Name : SJYN1305A
Battery	Brand Name : LG
	Model Name : SNN5953A
USB Cable	Brand Name : Motorola
	Model Name : SKN6466A

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
Rx Frequency	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 5 : 23.25 dBm LTE Band 41 : 23.17 dBm
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Emission Designator

LTE Band 5	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	1M10G7D	-	0.1035	1M10W7D	-	0.0571
3	2M72G7D	-	0.1035	2M72W7D	-	0.0551
5	4M50G7D	-	0.1047	4M50W7D	-	0.0569
10	9M08G7D	0.0127	0.1038	9M06W7D	-	0.0557
LTE Band 41	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	4M51G7D	-	0.3724	4M50W7D	-	0.2168
10	9M04G7D	0.0021	0.3758	9M00W7D	-	0.2188
15	13M5G7D	-	0.3846	13M4W7D	-	0.2153
20	18M4G7D	-	0.3855	18M4W7D	-	0.2193

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ KDB 648474 D03 Handset Wireless Chargers Battery Covers v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	5	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	5				✓	-	-	✓	✓	✓		✓	✓	✓	✓
	41						✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	5	✓	✓	✓	✓	-	-	✓	✓			✓	✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	5	✓	✓	✓	✓	-	-	✓	✓	✓		✓	✓		✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	5				✓	-	-	✓				✓		✓	
	41				✓			✓				✓		✓	
E.R.P./ E.I.R.P.	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	5	✓	✓	✓	✓	-	-	✓		✓			✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓		✓			✓	✓	✓
Note	- The mark "✓" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. - Wireless charger configuration was evaluated.														

2.2 Connection Diagram of Test System

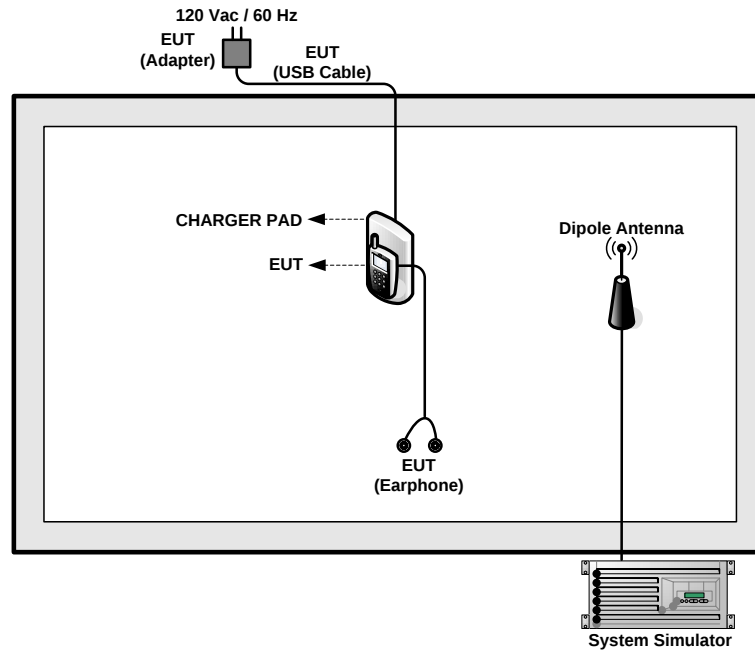

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	CHARGER PAD	SAMSUNG	EP-P100IEWE	A3LEPP100IJWU	N/A	shielded, 1.5 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

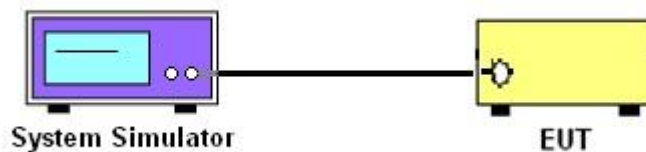

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability

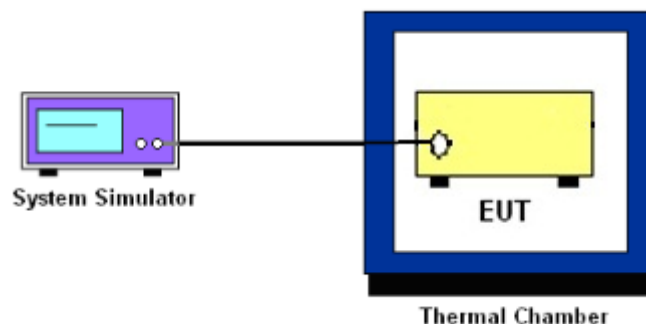

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a) and RSS – 132 for Band 5

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4) for Band 41:

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-199 for Band 41:

The emissions be operated in the 2496-2690 MHz band, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $55 + 10 \log (P)$ dB at 5.5 megahertz from the channel edges.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts})$
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$



$$\begin{aligned} &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13\text{dBm}. \end{aligned}$$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.
9. For Band 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

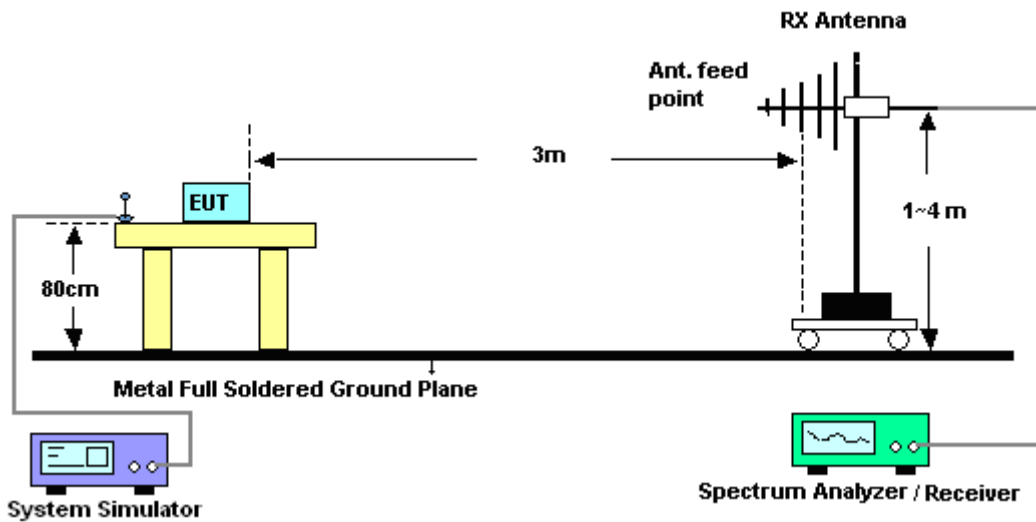

4.2.2 For radiated test above 1GHz

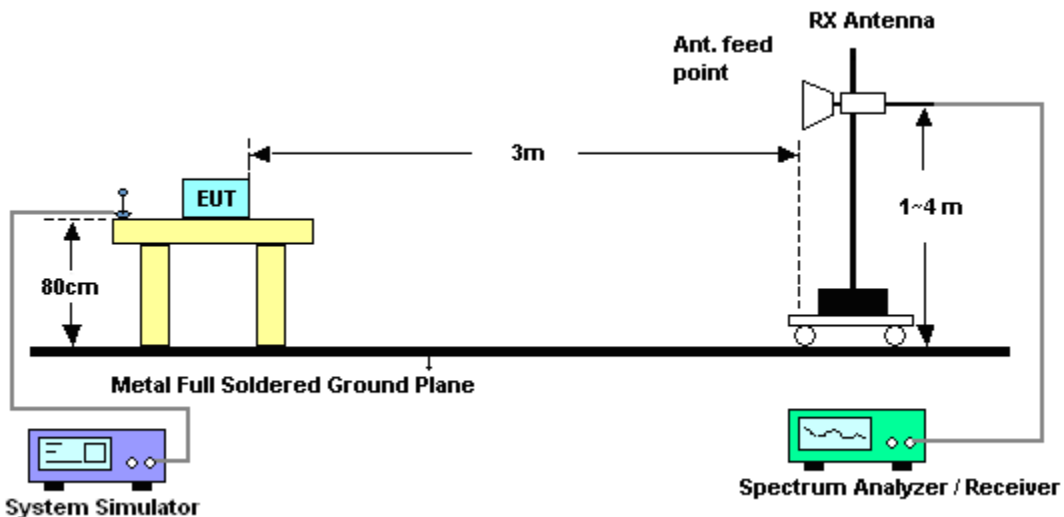

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5 and EIRP 2 watts with LTE band 41.

Note: Wireless charger configuration was evaluated.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r01 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm.}$$

For Band 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$$12. \text{ EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$13. \text{ ERP (dBm)} = \text{EIRP} - 2.15$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Jul. 29, 2014	Sep. 28, 2014 ~ Oct. 02, 2014	Jul. 28, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Sep. 28, 2014 ~ Oct. 02, 2014	Jun. 08, 2015	Conducted (TH02-HY)
LTE Base Station	Anritsu	MT8820C	6201026480	30MHz~2.7GHz SISO	Jan. 07, 2014	Sep. 28, 2014 ~ Oct. 02, 2014	Jan. 06, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Sep. 18, 2014 ~ Sep. 20, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Sep. 18, 2014 ~ Sep. 20, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Sep. 18, 2014 ~ Sep. 20, 2014	Aug. 18, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Sep. 18, 2014 ~ Sep. 20, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Sep. 18, 2014 ~ Sep. 20, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Sep. 18, 2014 ~ Sep. 20, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	Sep. 18, 2014 ~ Sep. 20, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 03, 2013	Sep. 18, 2014 ~ Sep. 20, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 23, 2014	Sep. 18, 2014 ~ Sep. 20, 2014	May 22, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066583	1GHz~18GHz	Jul. 24, 2014	Sep. 18, 2014 ~ Sep. 20, 2014	Jul. 23, 2015	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.98	23.05	22.96
1.4	1	2		22.99	23.02	23.00
1.4	1	5		23.00	23.04	22.99
1.4	3	0		22.94	23.05	22.96
1.4	3	1		22.99	23.02	23.01
1.4	3	2		23.00	23.02	22.93
1.4	6	0		22.05	22.06	22.05
1.4	1	0	16-QAM	21.94	22.04	21.94
1.4	1	2		21.93	22.00	21.97
1.4	1	5		21.95	22.01	21.96
1.4	3	0		21.98	22.01	21.99
1.4	3	1		21.95	21.98	21.98
1.4	3	2		21.96	22.00	21.98
1.4	6	0		20.89	20.92	20.95
3	1	0	QPSK	22.99	22.98	22.96
3	1	7		22.98	22.97	22.91
3	1	14		22.94	23.00	22.98
3	8	0		21.98	22.03	21.97
3	8	4		21.96	22.00	21.97
3	8	7		21.96	22.03	22.02
3	15	0		22.01	22.09	22.04
3	1	0	16-QAM	21.88	21.98	21.94
3	1	7		21.91	21.91	21.88
3	1	14		21.98	22.01	21.93
3	8	0		20.98	21.03	21.05
3	8	4		21.04	21.06	21.05
3	8	7		21.03	21.09	21.02
3	15	0		20.97	21.02	20.98



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.95	22.98	22.92
5	1	12		22.93	22.97	22.92
5	1	24		22.99	23.02	22.97
5	12	0		21.98	22.03	22.01
5	12	6		21.98	22.01	21.97
5	12	11		22.02	22.06	21.97
5	25	0		22.02	22.03	21.99
5	1	0	16-QAM	21.90	21.93	21.90
5	1	12		21.89	21.91	21.90
5	1	24		21.90	21.94	21.87
5	12	0		21.01	21.05	21.01
5	12	6		21.00	21.07	21.00
5	12	11		21.01	21.05	21.01
5	25	0		20.97	21.05	20.98
10	1	0	QPSK	23.25	23.14	23.09
10	1	24		23.23	23.22	23.09
10	1	49		23.16	23.09	23.14
10	25	0		22.23	22.21	22.10
10	25	12		22.14	22.22	22.12
10	25	24		22.19	22.20	22.18
10	50	0		22.35	22.31	22.24
10	1	0	16-QAM	22.18	22.14	22.05
10	1	24		22.23	22.16	22.06
10	1	49		22.14	22.08	22.10
10	25	0		21.24	21.21	21.14
10	25	12		21.17	21.24	21.15
10	25	24		21.22	21.23	21.18
10	50	0		21.19	21.24	21.20



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.02	22.59	22.72
5	1	12		22.90	22.57	22.70
5	1	24		23.00	22.56	22.71
5	12	0		21.84	21.76	21.65
5	12	6		21.96	21.68	21.65
5	12	11		21.98	21.63	21.61
5	25	0		21.94	21.66	21.72
5	1	0	16-QAM	21.78	21.41	21.43
5	1	12		21.64	21.31	21.34
5	1	24		21.76	21.39	21.39
5	12	0		20.94	20.65	20.65
5	12	6		20.94	20.56	20.66
5	12	11		21.11	20.68	20.69
5	25	0		20.93	20.65	20.75
10	1	0	QPSK	23.06	22.66	22.75
10	1	24		22.92	22.65	22.64
10	1	49		23.05	22.64	22.74
10	25	0		21.94	21.72	21.70
10	25	12		22.06	21.66	21.65
10	25	24		22.06	21.65	21.62
10	50	0		21.95	21.59	21.73
10	1	0	16-QAM	21.79	21.46	21.42
10	1	24		21.66	21.36	21.38
10	1	49		21.78	21.37	21.41
10	25	0		20.98	20.62	20.67
10	25	12		20.98	20.55	20.69
10	25	24		21.12	20.65	20.68
10	50	0		20.95	20.63	20.75



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.09	22.68	22.76
15	1	37		23.07	22.58	22.74
15	1	74		23.05	22.64	22.75
15	36	0		22.08	21.75	21.70
15	36	18		22.08	21.64	21.71
15	36	37		22.16	21.63	21.71
15	75	0		22.10	21.67	21.74
15	1	0	16-QAM	21.79	21.49	21.46
15	1	37		21.78	21.31	21.44
15	1	74		21.75	21.46	21.45
15	36	0		21.05	20.62	20.68
15	36	18		21.11	20.60	20.71
15	36	37		21.15	20.59	20.75
15	75	0		21.16	20.56	20.78
20	1	0	QPSK	23.17	22.70	22.79
20	1	49		23.10	22.67	22.73
20	1	99		23.15	22.68	22.68
20	50	0		21.94	21.77	21.70
20	50	24		22.03	21.71	21.64
20	50	49		22.07	21.65	21.67
20	100	0		22.08	21.67	21.69
20	1	0	16-QAM	21.84	21.51	21.47
20	1	49		21.79	21.38	21.42
20	1	99		21.82	21.47	21.41
20	50	0		20.92	20.66	20.68
20	50	24		21.05	20.61	20.69
20	50	49		21.10	20.68	20.69
20	100	0		21.15	20.66	20.72







Peak-to-Average Ratio







Mode	LTE Band 5 / 10MHz / QPSK		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	3.85	5.10	PASS
Middle CH	3.81	4.90	
Highest CH	4.68	4.90	


Mode	LTE Band 5 / 10MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	4.36	6.12	PASS
Middle CH	4.33	6.22	
Highest CH	5.51	6.12	

Mode	LTE Band 41 / 20MHz / QPSK		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	7.44	7.56	PASS
Middle CH	8.04	7.76	
Highest CH	7.82	7.76	


Mode	LTE Band 41 / 20MHz / 16QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	8.75	8.24	PASS
Middle CH	9.20	8.43	
Highest CH	9.01	8.46	

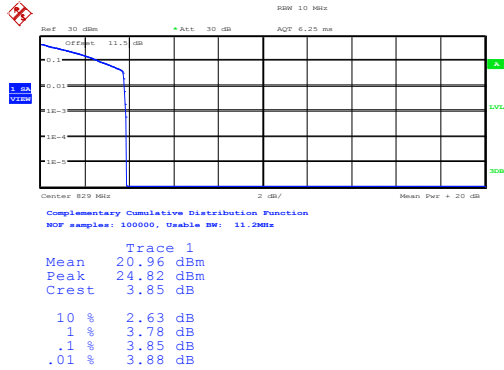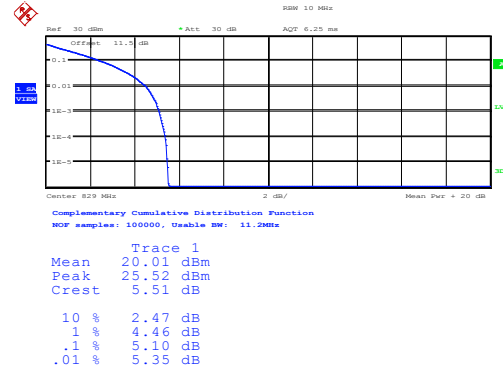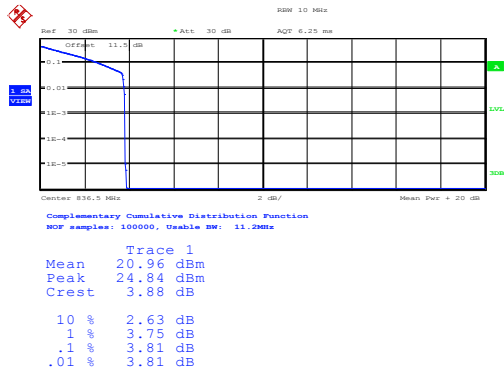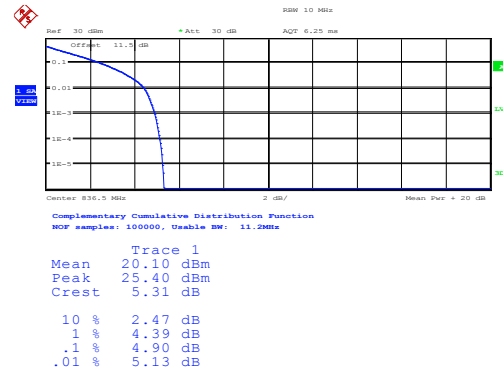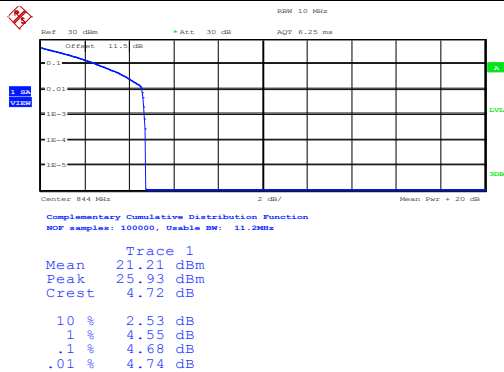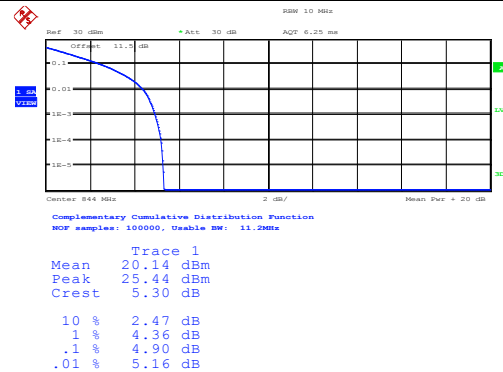**LTE Band 5 / 10MHz / QPSK****Lowest Channel / 1RB****Lowest Channel / Full RB****Middle Channel / 1RB****Middle Channel / Full RB****Highest Channel / 1RB****Highest Channel / Full RB**

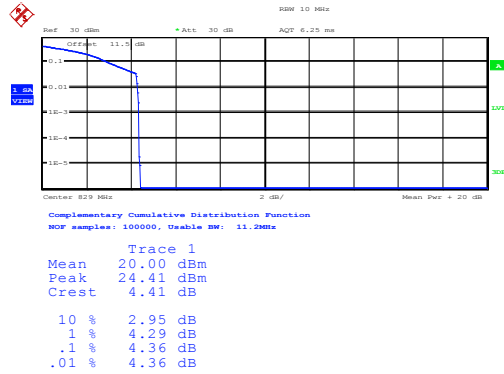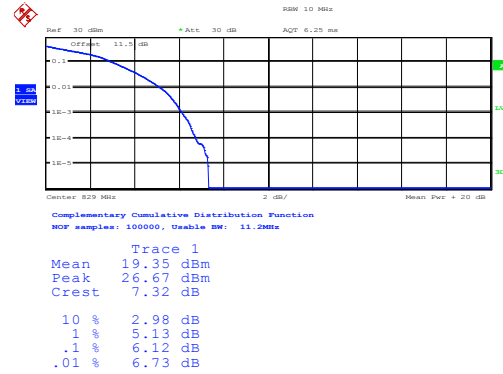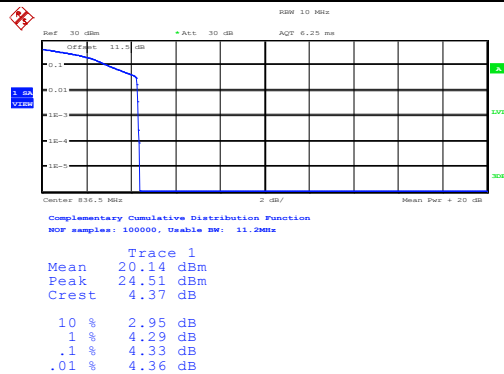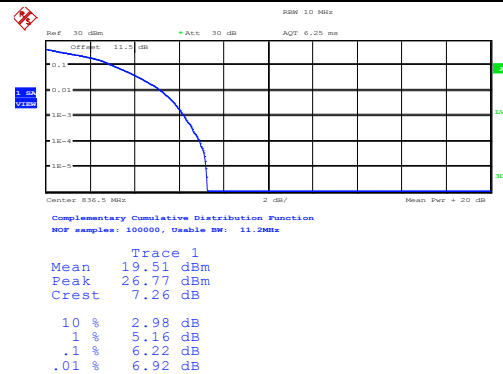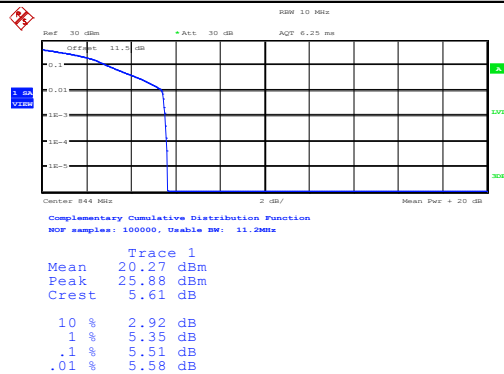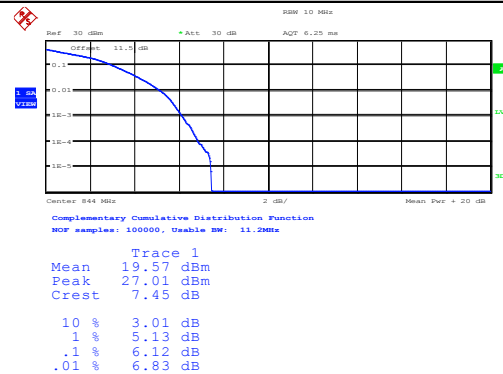
**LTE Band 5 / 10MHz / 16QAM****Lowest Channel / 1RB****Lowest Channel / Full RB****Middle Channel / 1RB****Middle Channel / Full RB****Highest Channel / 1RB****Highest Channel / Full RB**

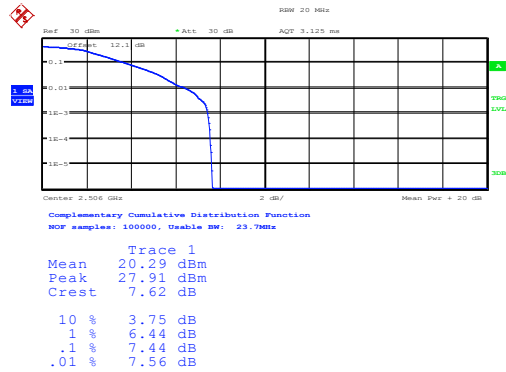**LTE Band 41 / 20MHz / QPSK****Lowest Channel / 1RB**


Date: 1.OCT.2014 16:55:01

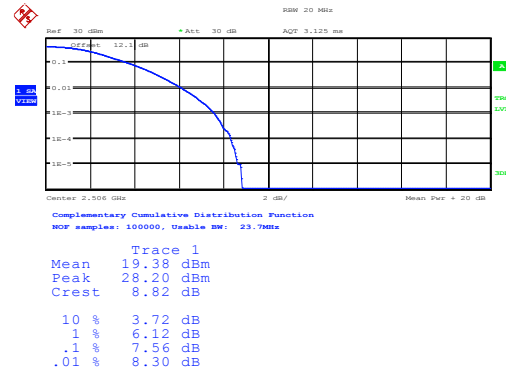Lowest Channel / Full RB


Date: 1.OCT.2014 16:55:25

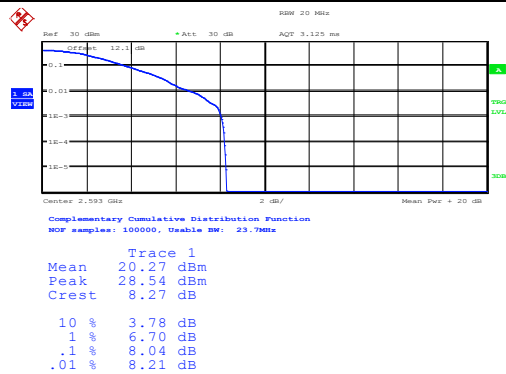Middle Channel / 1RB


Date: 1.OCT.2014 16:55:56

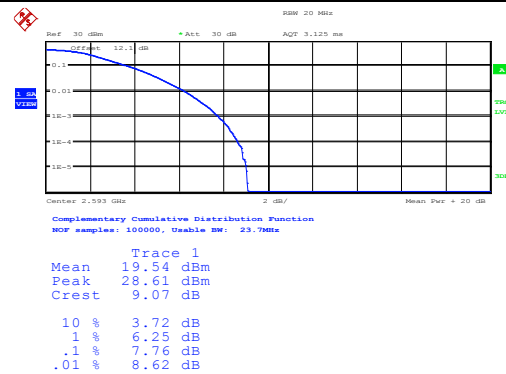Middle Channel / Full RB


Date: 1.OCT.2014 16:56:18

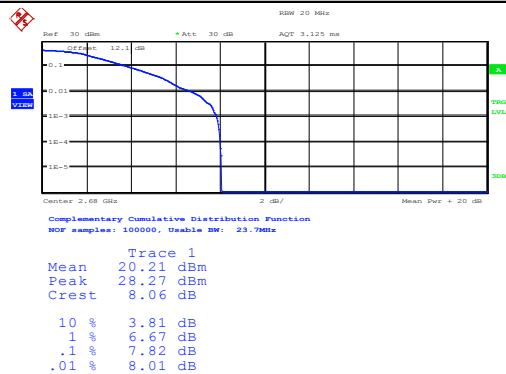Highest Channel / 1RB


Date: 1.OCT.2014 16:56:44

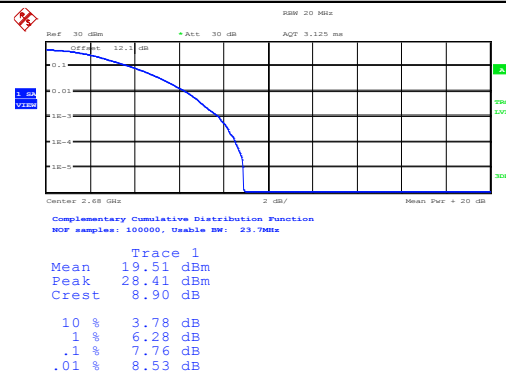Highest Channel / Full RB


Date: 1.OCT.2014 16:57:34

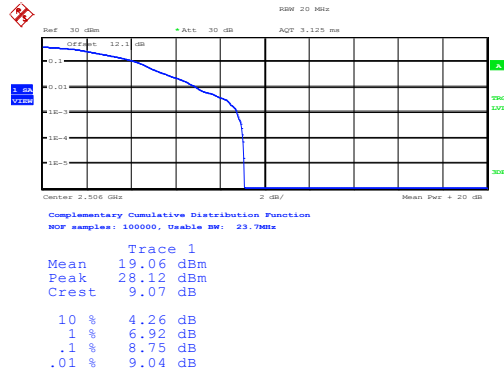**LTE Band 41 / 20MHz / 16QAM****Lowest Channel / 1RB**


Date: 1.OCT.2014 16:50:49

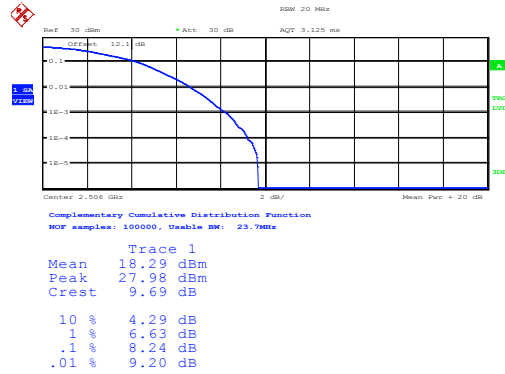Lowest Channel / Full RB


Date: 1.OCT.2014 16:52:08

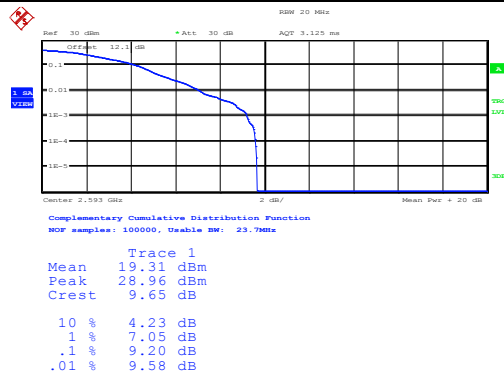Middle Channel / 1RB


Date: 1.OCT.2014 16:52:51

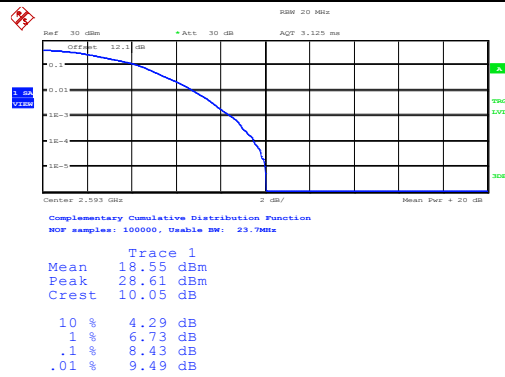Middle Channel / Full RB

Date: 1.OCT.2014 16:53:22

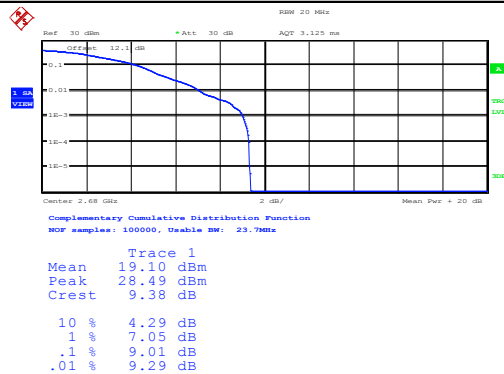Highest Channel / 1RB

Date: 1.OCT.2014 16:53:49

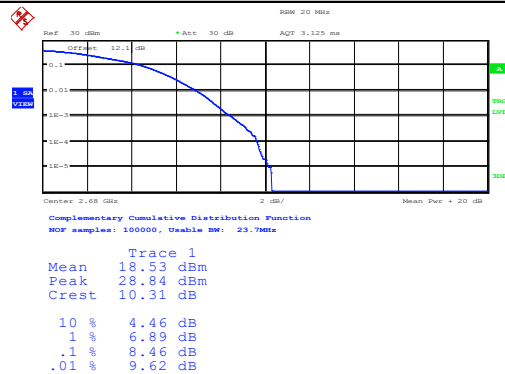Highest Channel / Full RB

Date: 1.OCT.2014 16:54:18

**26dB Bandwidth**


Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.28	1.29	3.04	3.05	4.98	4.94	10.1	10.04	-	-	-	-
Middle CH	1.27	1.29	3.01	3.01	4.93	4.92	10.1	10	-	-	-	-
Highest CH	1.28	1.27	3.01	3.04	4.92	4.94	10.12	10.1	-	-	-	-

Mode	LTE Band 41 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.85	4.94	9.8	9.92	14.61	14.61	20.84	20.8
Middle CH	-	-	-	-	4.91	4.93	9.94	9.84	14.58	14.43	20.96	20.96
Highest CH	-	-	-	-	4.92	4.95	10.04	9.94	14.58	14.4	20.84	20.84




LTE Band 5

Lowest Channel / 1.4MHz / QPSK

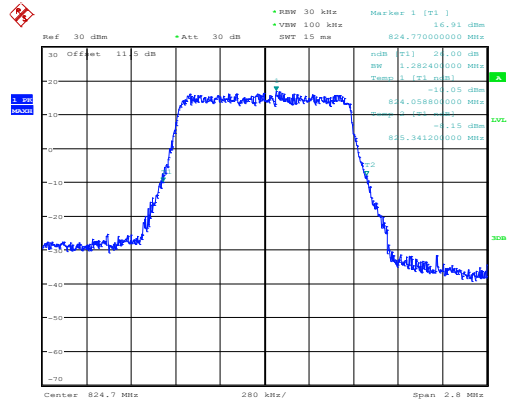


Date: 28.SEP.2014 15:22:45

Lowest Channel / 1.4MHz / 16QAM

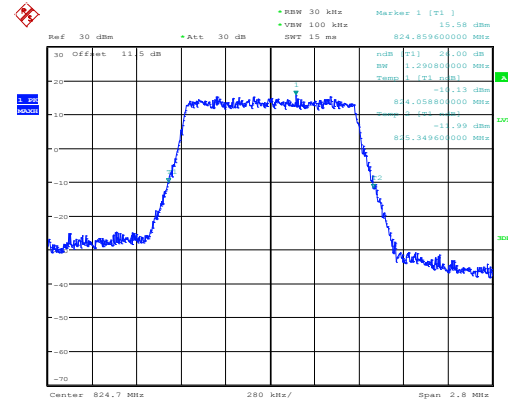


Date: 28.SEP.2014 15:22:29

Middle Channel / 1.4MHz / QPSK

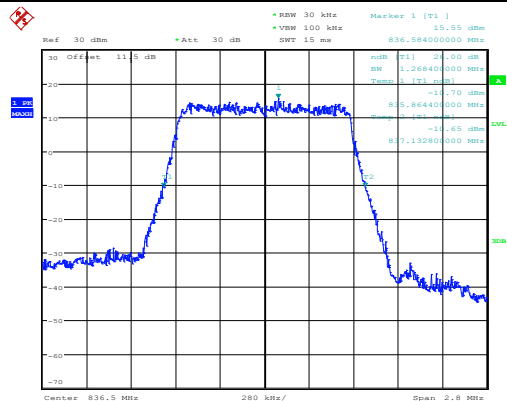


Date: 28.SEP.2014 15:28:10

Middle Channel / 1.4MHz / 16QAM

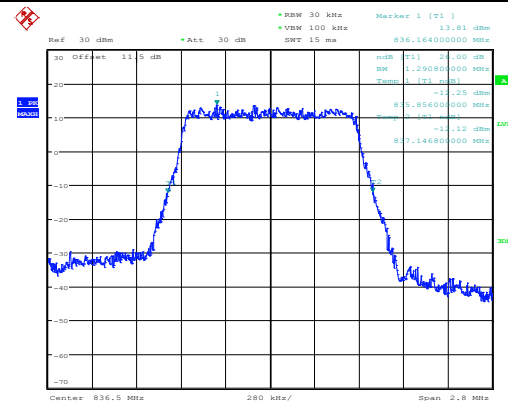


Date: 28.SEP.2014 15:28:26

Highest Channel / 1.4MHz / QPSK

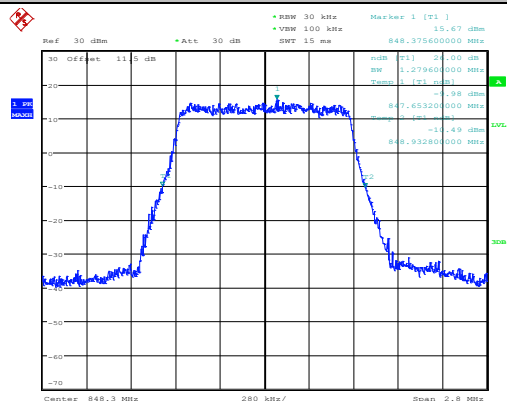

Date: 28.SEP.2014 15:30:52

Highest Channel / 1.4MHz / 16QAM

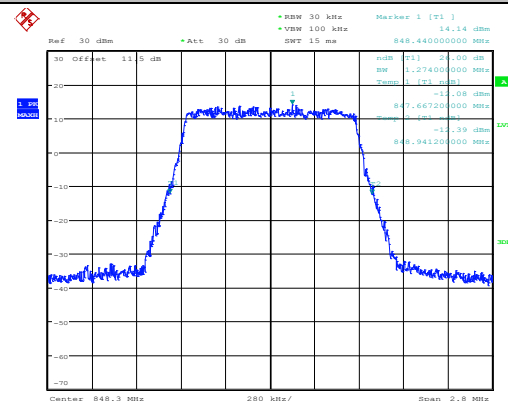


Date: 28.SEP.2014 15:31:08




LTE Band 5

Lowest Channel / 3MHz / QPSK

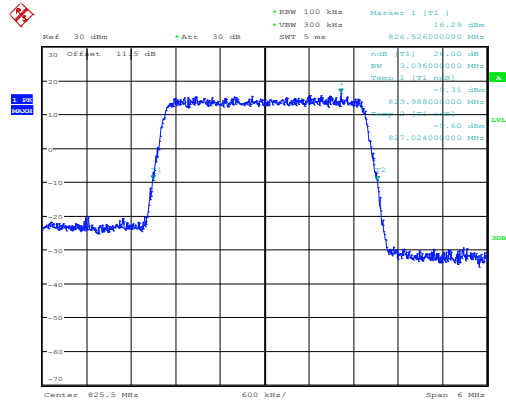


Date: 28.SEP.2014 16:11:58

Lowest Channel / 3MHz / 16QAM

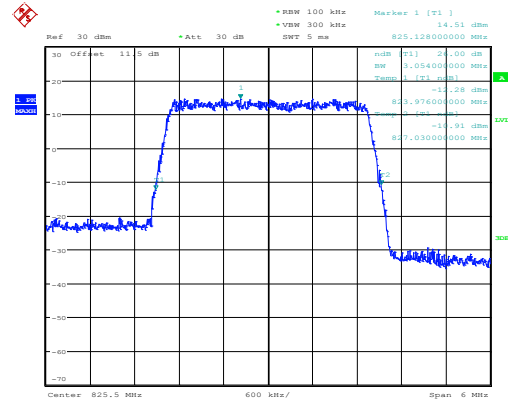


Date: 28.SEP.2014 16:12:15

Middle Channel / 3MHz / QPSK

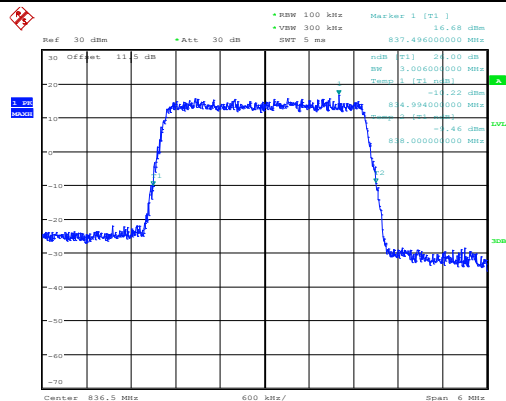


Date: 28.SEP.2014 16:17:38

Middle Channel / 3MHz / 16QAM

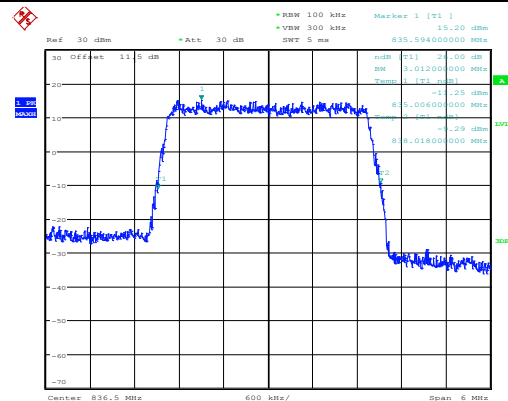


Date: 28.SEP.2014 16:17:54

Highest Channel / 3MHz / QPSK

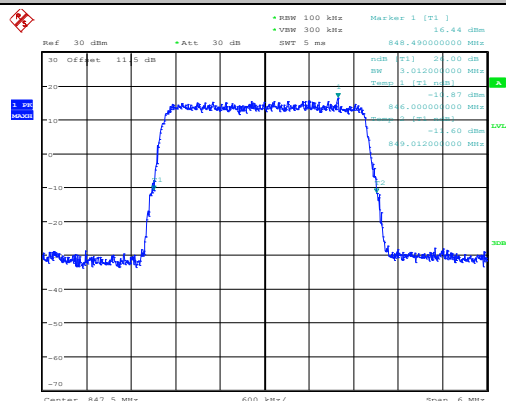

Date: 28.SEP.2014 16:20:19


Highest Channel / 3MHz / 16QAM

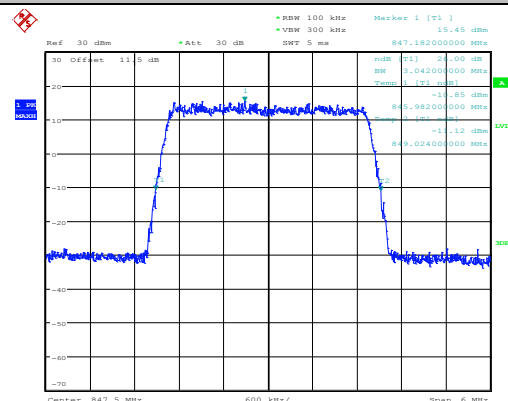

Date: 28.SEP.2014 16:20:35


LTE Band 5

Lowest Channel / 5MHz / QPSK

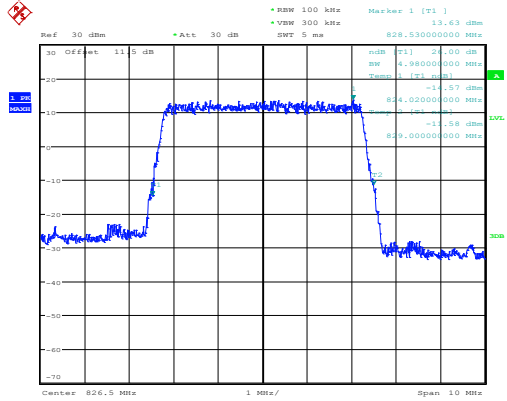


Date: 28.SEP.2014 16:26:56

Lowest Channel / 5MHz / 16QAM

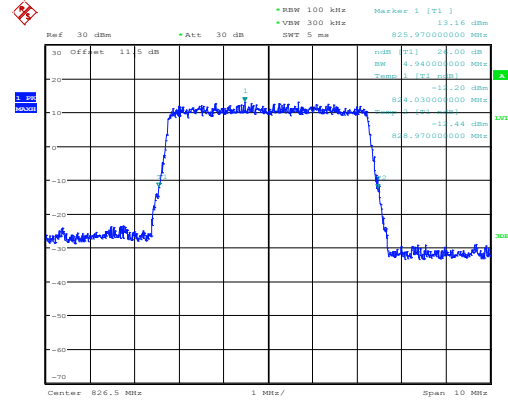


Date: 28.SEP.2014 16:27:12

Middle Channel / 5MHz / QPSK

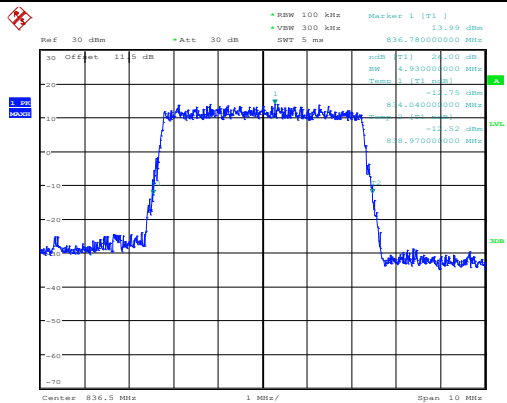


Date: 28.SEP.2014 16:32:34

Middle Channel / 5MHz / 16QAM

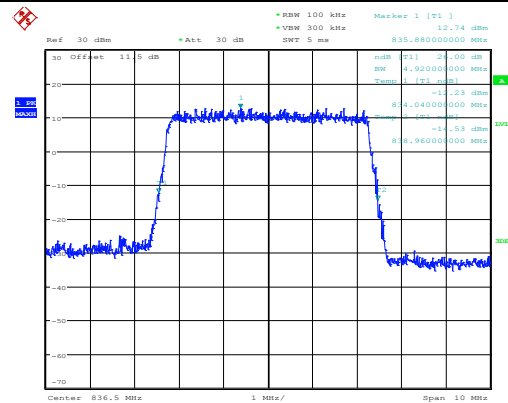


Date: 28.SEP.2014 16:32:50

Highest Channel / 5MHz / QPSK

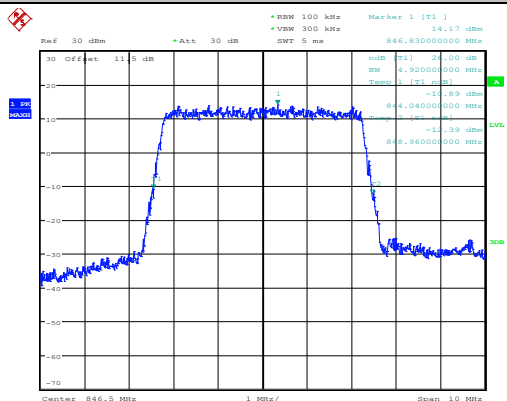

Date: 28.SEP.2014 16:35:14

Highest Channel / 5MHz / 16QAM

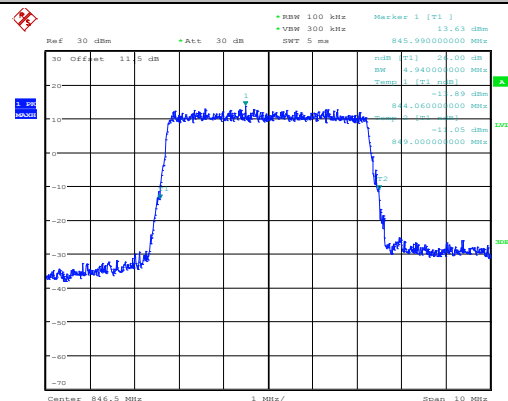


Date: 28.SEP.2014 16:35:30




LTE Band 5

Lowest Channel / 10MHz / QPSK

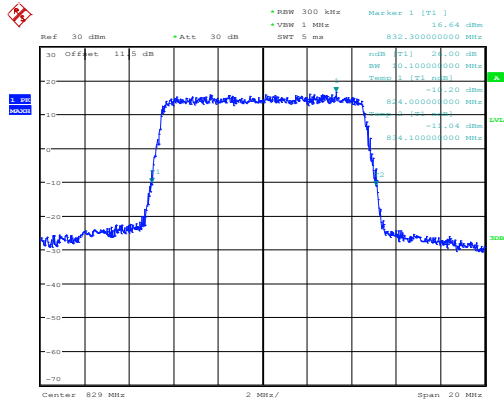


Date: 28.SEP.2014 16:40:56

Lowest Channel / 10MHz / 16QAM

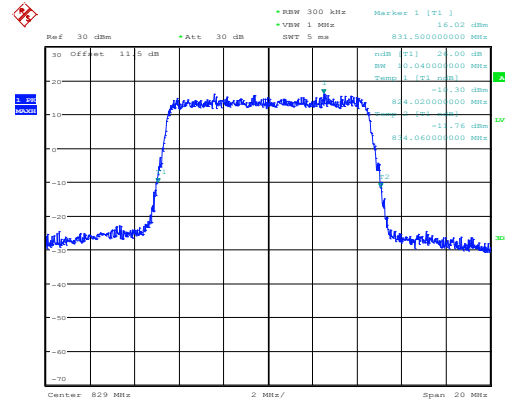


Date: 28.SEP.2014 16:41:12

Middle Channel / 10MHz / QPSK

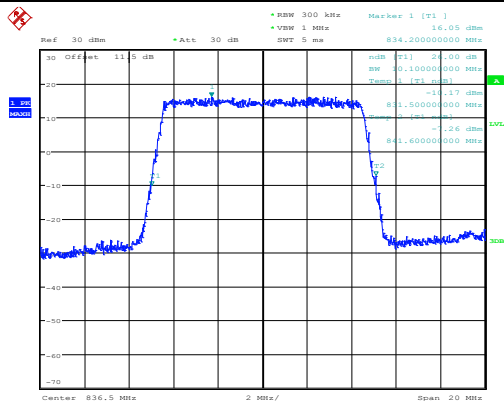


Date: 28.SEP.2014 16:46:34

Middle Channel / 10MHz / 16QAM

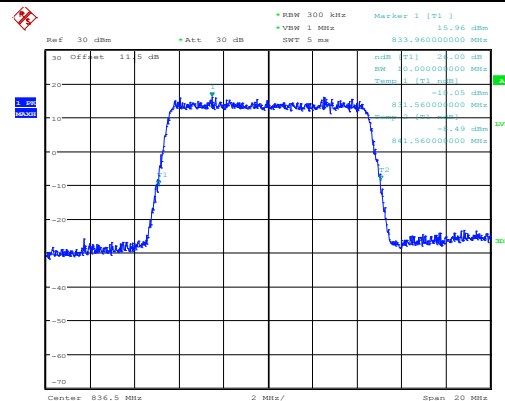


Date: 28.SEP.2014 16:46:50

Highest Channel / 10MHz / QPSK

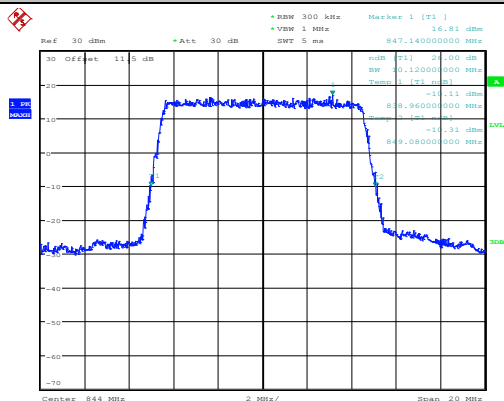

Date: 28.SEP.2014 16:49:14

Highest Channel / 10MHz / 16QAM

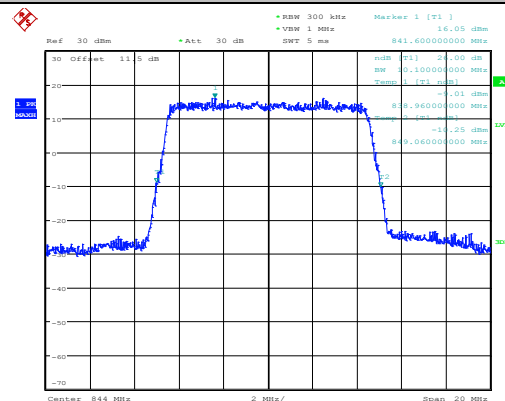


Date: 28.SEP.2014 16:49:30




LTE Band 41


Lowest Channel / 5MHz / QPSK

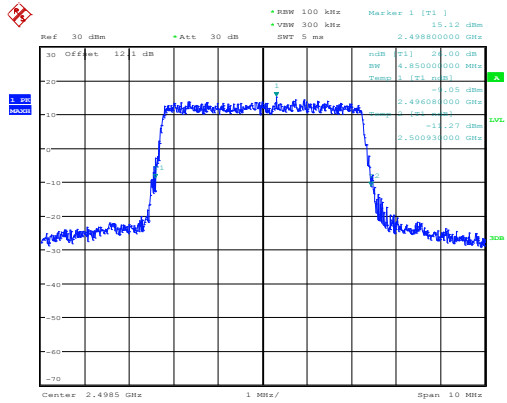


Lowest Channel / 5MHz / 16QAM

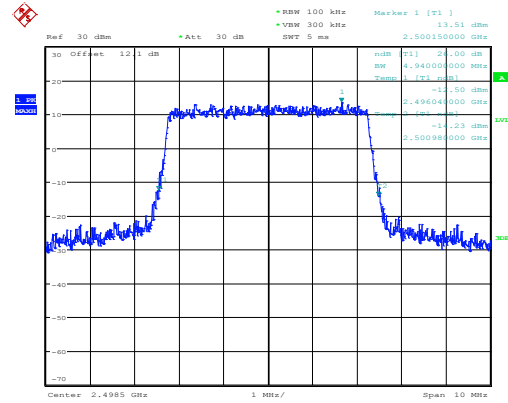


Middle Channel / 5MHz / QPSK

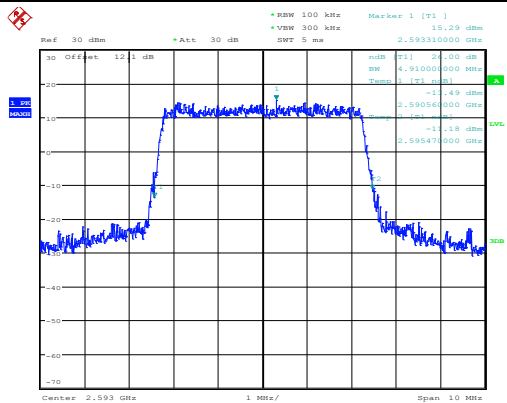


Middle Channel / 5MHz / 16QAM

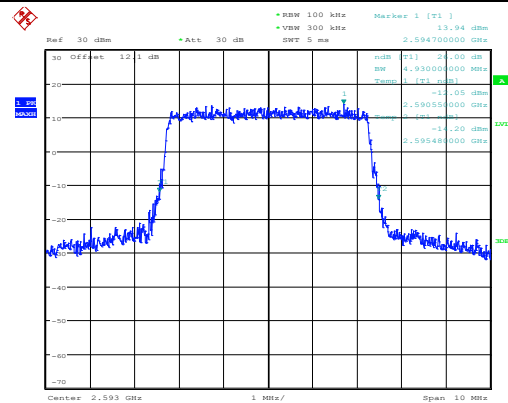

Highest Channel / 5MHz / QPSK

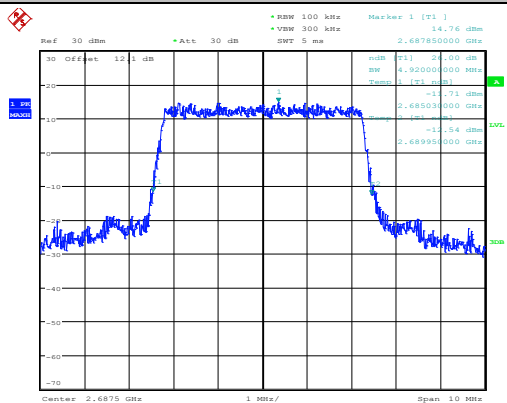


Highest Channel / 5MHz / 16QAM

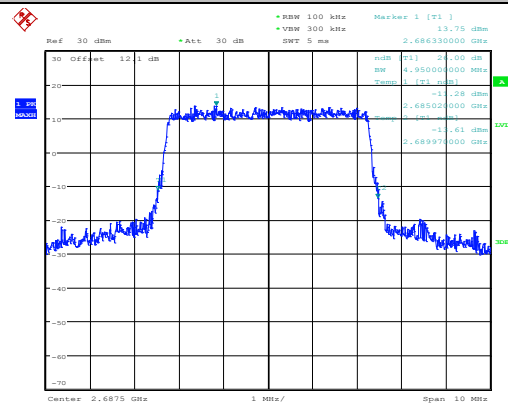




Lowest Channel / 10MHz / 16QAM

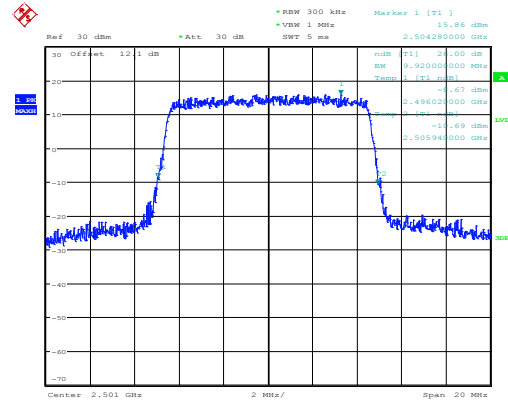


Date: 1.OCT.2014 15:51:47

Middle Channel / 10MHz / 16QAM

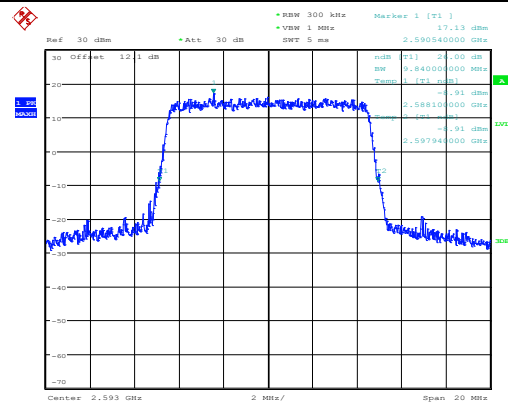

Date: 1.OCT.2014 15:59:30

Highest Channel / 10MHz / 16QAM

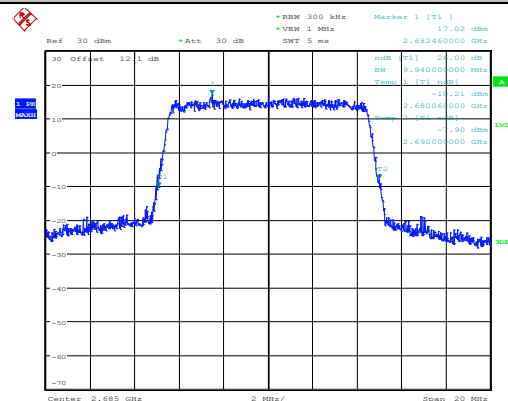


Date: 1.OCT.2014 16:02:34




LTE Band 41

Lowest Channel / 15MHz / QPSK

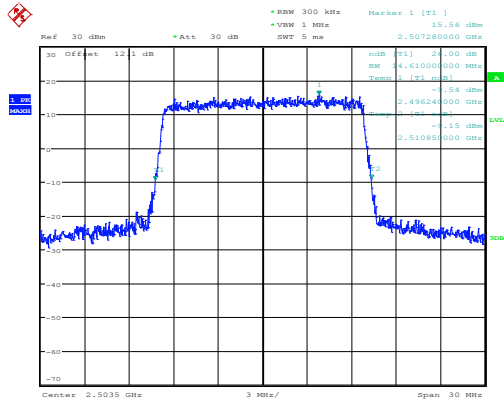


Date: 1.OCT.2014 16:10:10

Lowest Channel / 15MHz / 16QAM

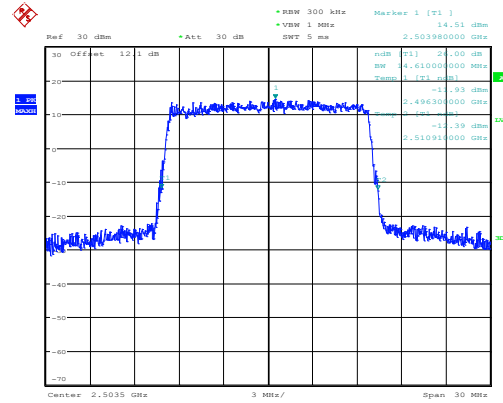


Date: 1.OCT.2014 16:10:22

Middle Channel / 15MHz / QPSK

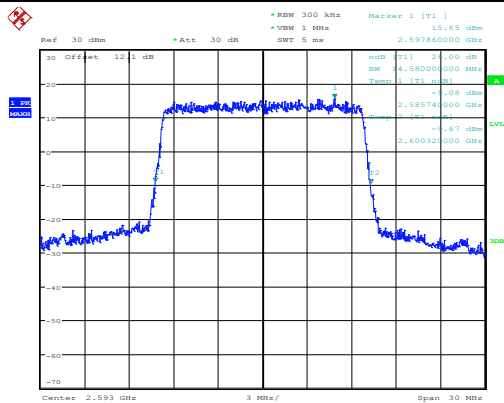


Date: 1.OCT.2014 16:17:57

Middle Channel / 15MHz / 16QAM

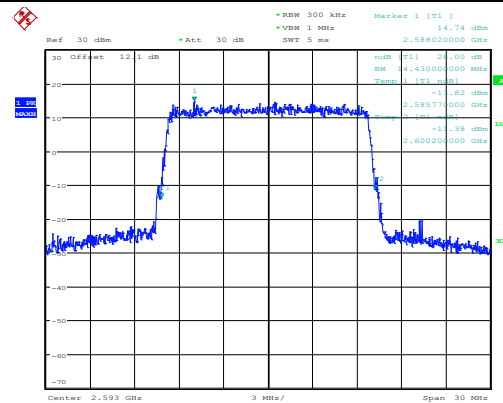


Date: 1.OCT.2014 16:18:10

Highest Channel / 15MHz / QPSK

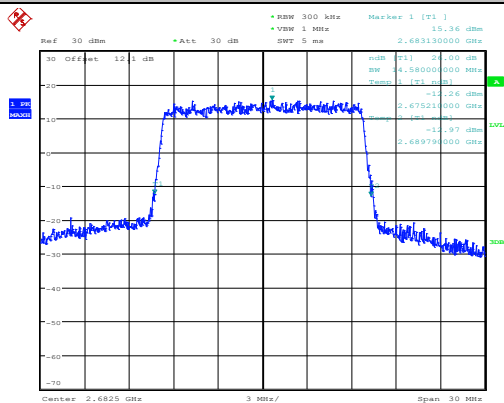

Date: 2.OCT.2014 09:58:00

Highest Channel / 15MHz / 16QAM

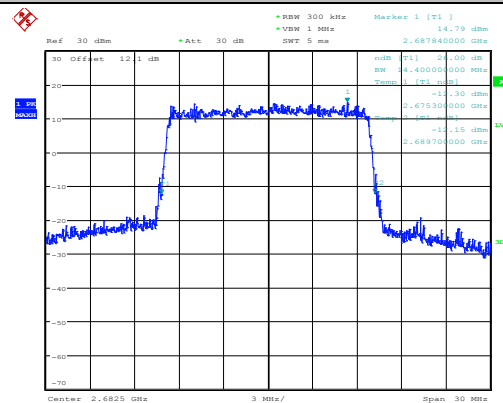


Date: 2.OCT.2014 09:58:12




LTE Band 41

Lowest Channel / 20MHz / QPSK

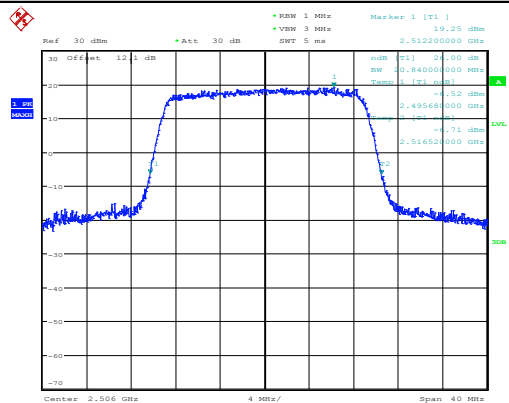


Date: 1.OCT.2014 16:27:46

Lowest Channel / 20MHz / 16QAM

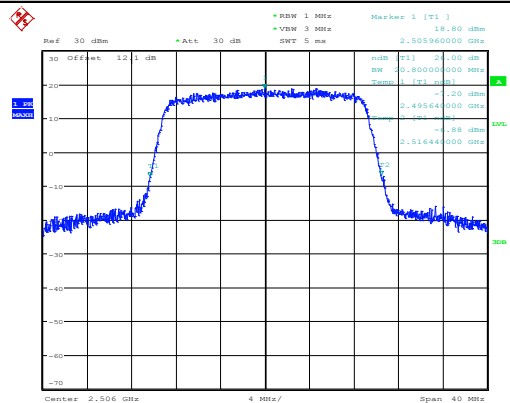


Date: 1.OCT.2014 16:27:58

Middle Channel / 20MHz / QPSK

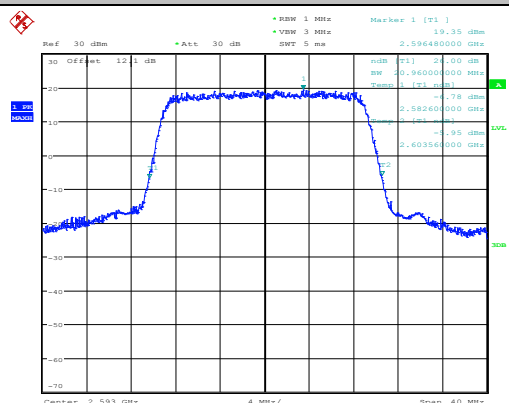


Date: 1.OCT.2014 16:35:29

Middle Channel / 20MHz / 16QAM

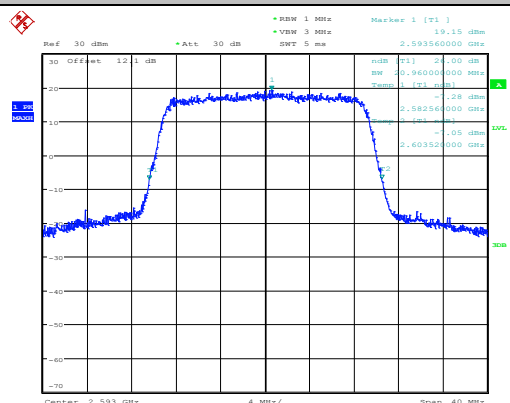


Date: 1.OCT.2014 16:35:41

Highest Channel / 20MHz / QPSK

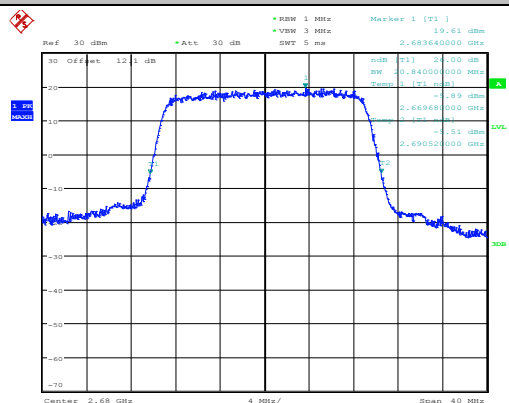

Date: 1.OCT.2014 16:38:33

Highest Channel / 20MHz / 16QAM

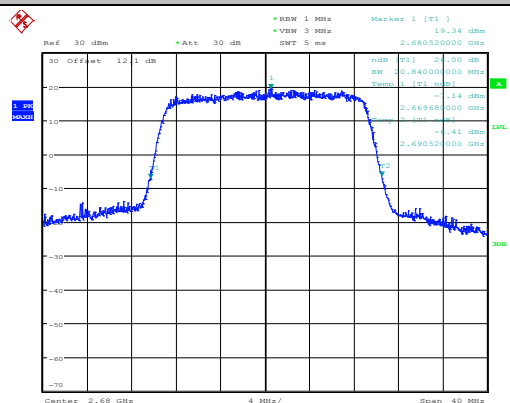


Date: 1.OCT.2014 16:38:45


**Occupied Bandwidth**

Mode	LTE Band 5 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.1	2.71	2.72	4.49	4.49	9.08	9.06	-	-	-	-
Middle CH	1.1	1.1	2.72	2.72	4.5	4.5	9.06	9.02	-	-	-	-
Highest CH	1.1	1.1	2.72	2.72	4.5	4.49	9.04	9.02	-	-	-	-


Mode	LTE Band 41 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.51	4.5	9.02	9	13.44	13.44	18.32	18.36
Middle CH	-	-	-	-	4.5	4.5	9	9	13.41	13.44	18.44	18.36
Highest CH	-	-	-	-	4.51	4.5	9.04	9	13.47	13.44	18.4	18.4

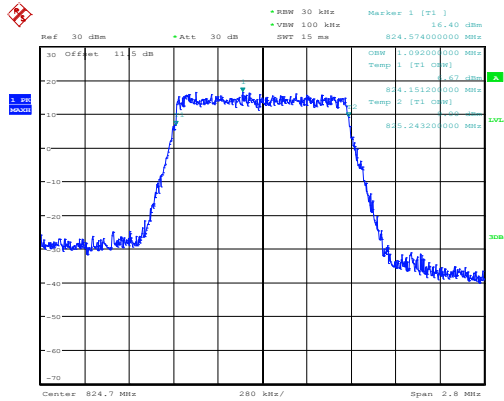**LTE Band 5****Lowest Channel / 1.4MHz / QPSK**


Date: 28.SEP.2014 15:21:58

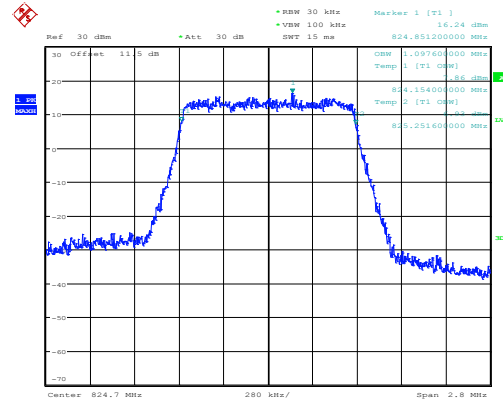Lowest Channel / 1.4MHz / 16QAM


Date: 28.SEP.2014 15:22:13

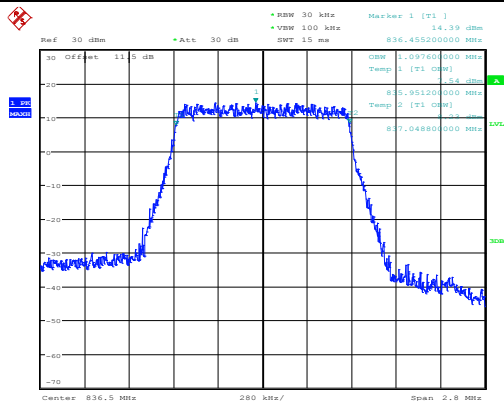Middle Channel / 1.4MHz / QPSK


Date: 28.SEP.2014 15:27:40

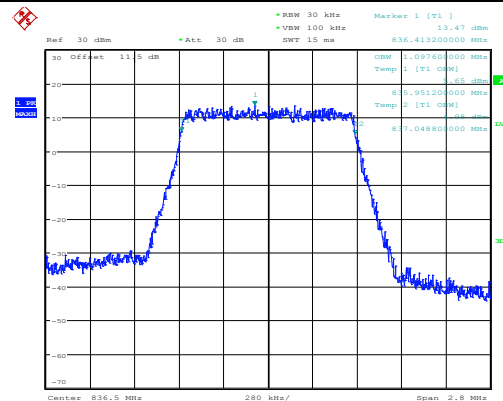Middle Channel / 1.4MHz / 16QAM

Date: 28.SEP.2014 15:27:54

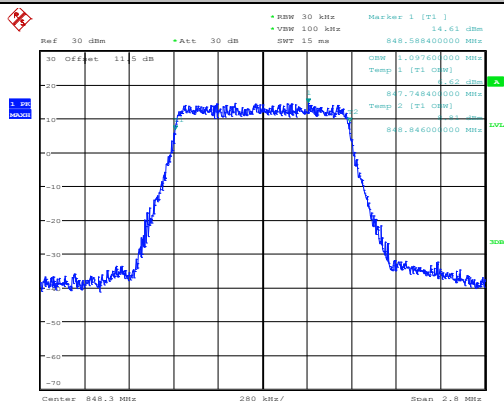Highest Channel / 1.4MHz / QPSK


Date: 28.SEP.2014 15:30:21

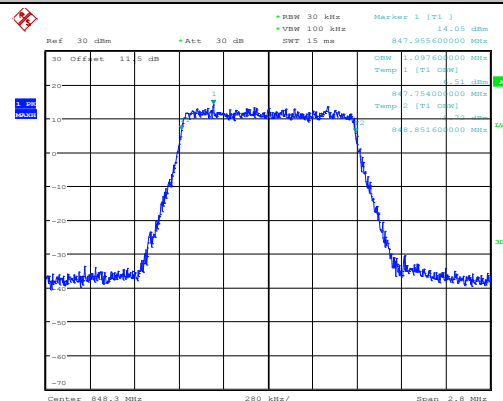Highest Channel / 1.4MHz / 16QAM

Date: 28.SEP.2014 15:30:35


LTE Band 5

Lowest Channel / 3MHz / QPSK

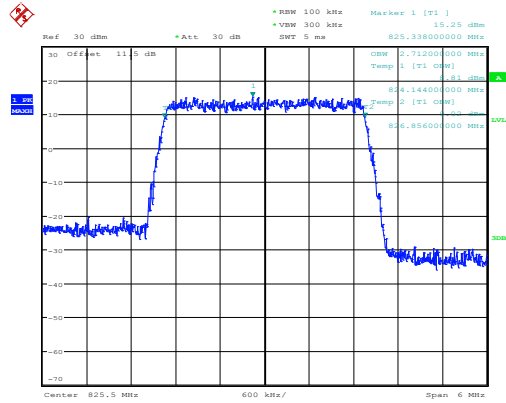


Date: 28.SEP.2014 17:02:52

Lowest Channel / 3MHz / 16QAM

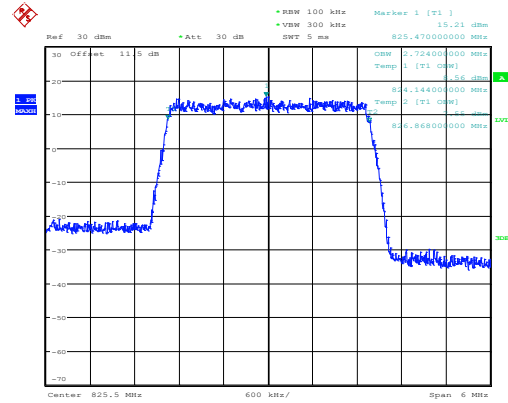


Date: 28.SEP.2014 16:11:42

Middle Channel / 3MHz / QPSK

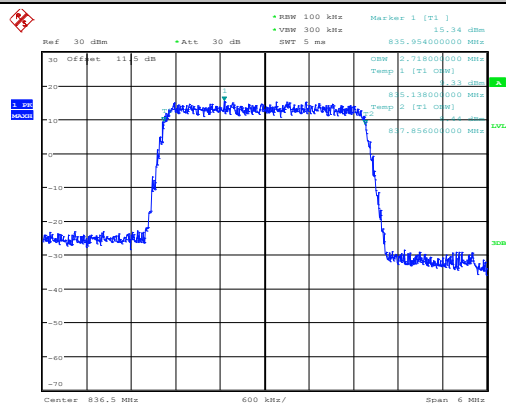


Date: 28.SEP.2014 16:17:08

Middle Channel / 3MHz / 16QAM

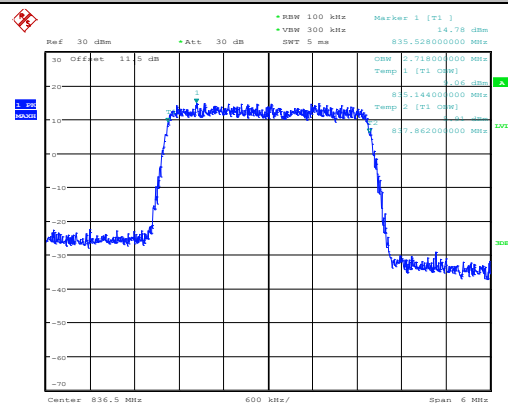


Date: 28.SEP.2014 16:17:22

Highest Channel / 3MHz / QPSK

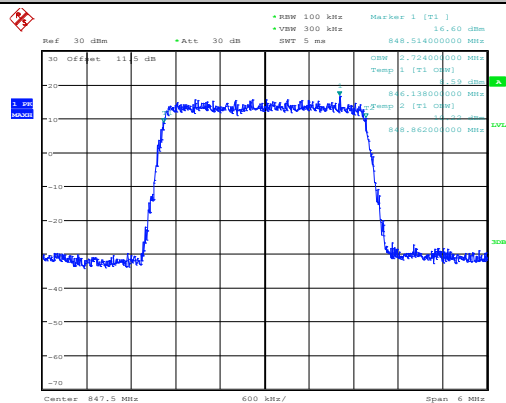

Date: 28.SEP.2014 16:19:48

Highest Channel / 3MHz / 16QAM

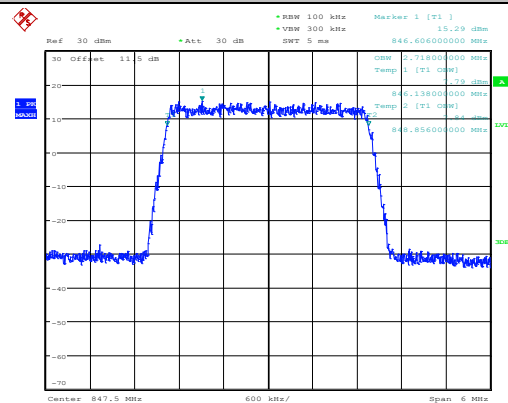


Date: 28.SEP.2014 16:20:03




LTE Band 5

Lowest Channel / 5MHz / QPSK

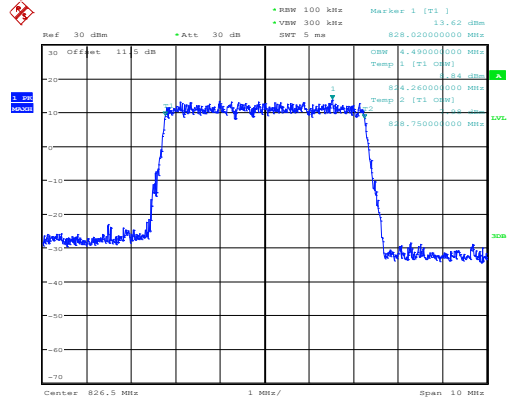


Date: 28.SEP.2014 16:26:25

Lowest Channel / 5MHz / 16QAM

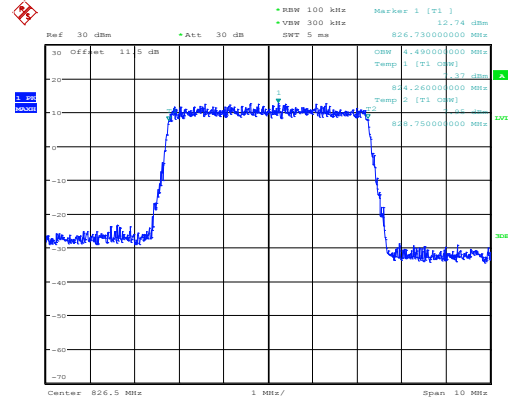


Date: 28.SEP.2014 16:26:39

Middle Channel / 5MHz / QPSK

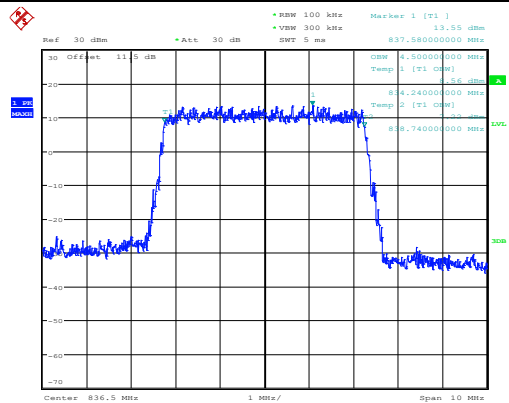


Date: 28.SEP.2014 16:32:04

Middle Channel / 5MHz / 16QAM

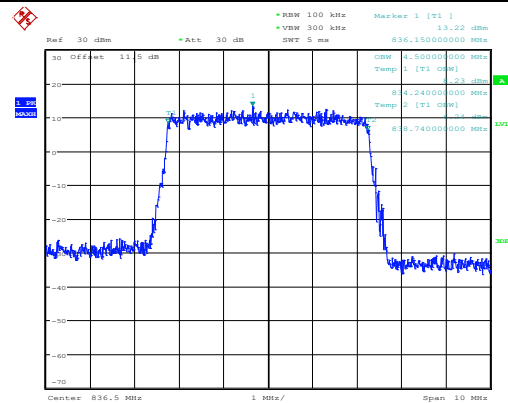


Date: 28.SEP.2014 16:32:18

Highest Channel / 5MHz / QPSK

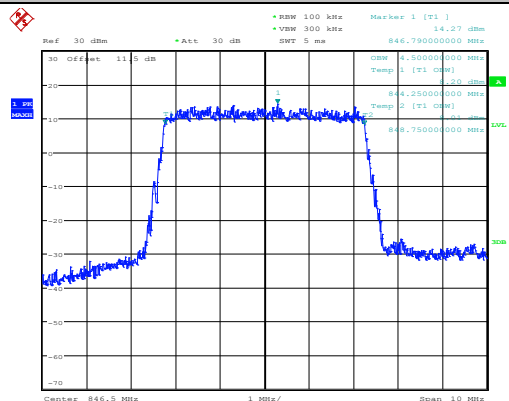

Date: 28.SEP.2014 16:34:44

Highest Channel / 5MHz / 16QAM

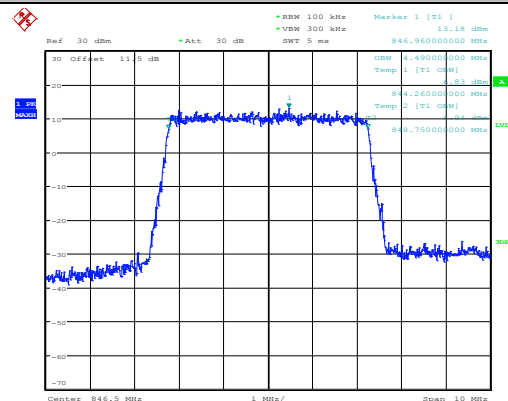

Date: 28.SEP.2014 16:34:58