

#01_GSM850_GPRS (2 Tx slots)_Right Cheek_Ch128

Communication System: GSM850 ; Frequency: 824.2 MHz;Duty Cycle: 1:4.15

Medium: HSL_850_141107 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.328$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.32, 10.32, 10.32); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Configuration/Ch128/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.457 W/kg


Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.480 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

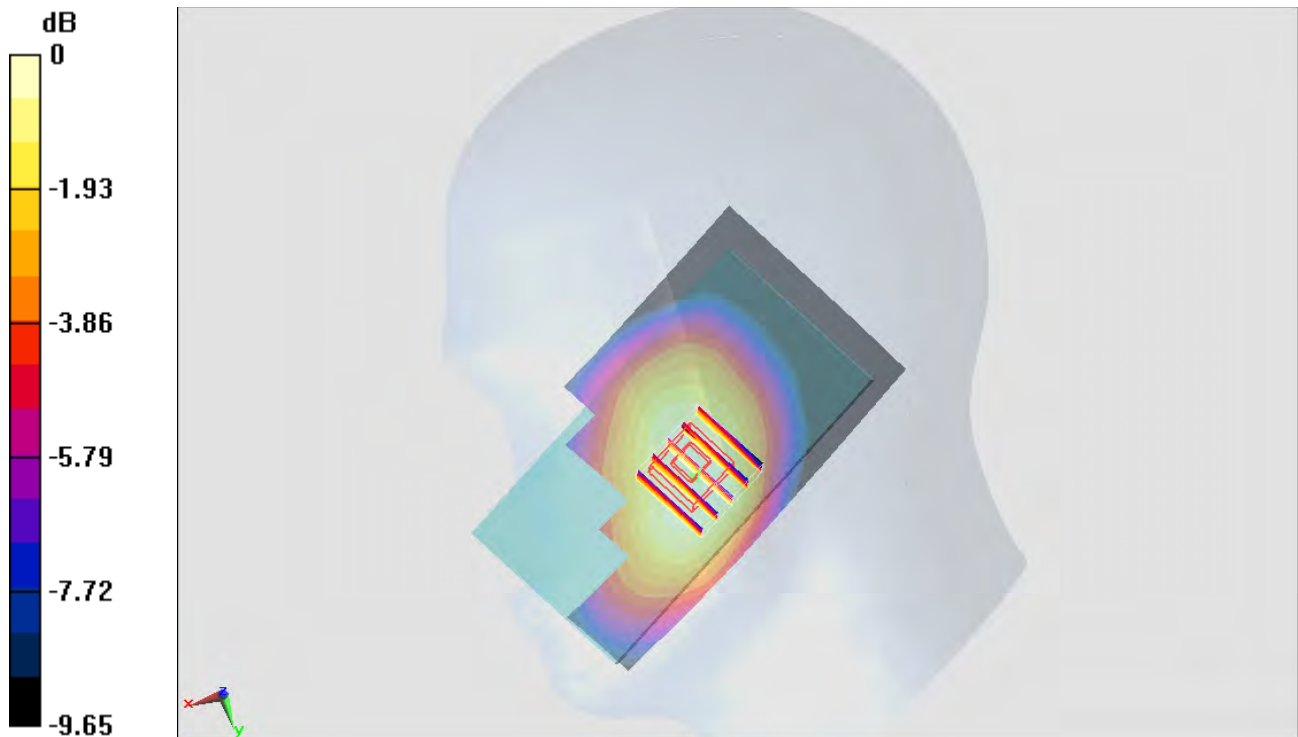

0 dB = 0.454 W/kg = -3.43 dBW/kg

#02_GSM1900_GPRS (2 Tx slots)_Right Cheek_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: HSL_1900_141107 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 38.773$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.26, 8.26, 8.26); Calibrated: 2014/5/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2014/5/19
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.584 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.850 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.559 W/kg

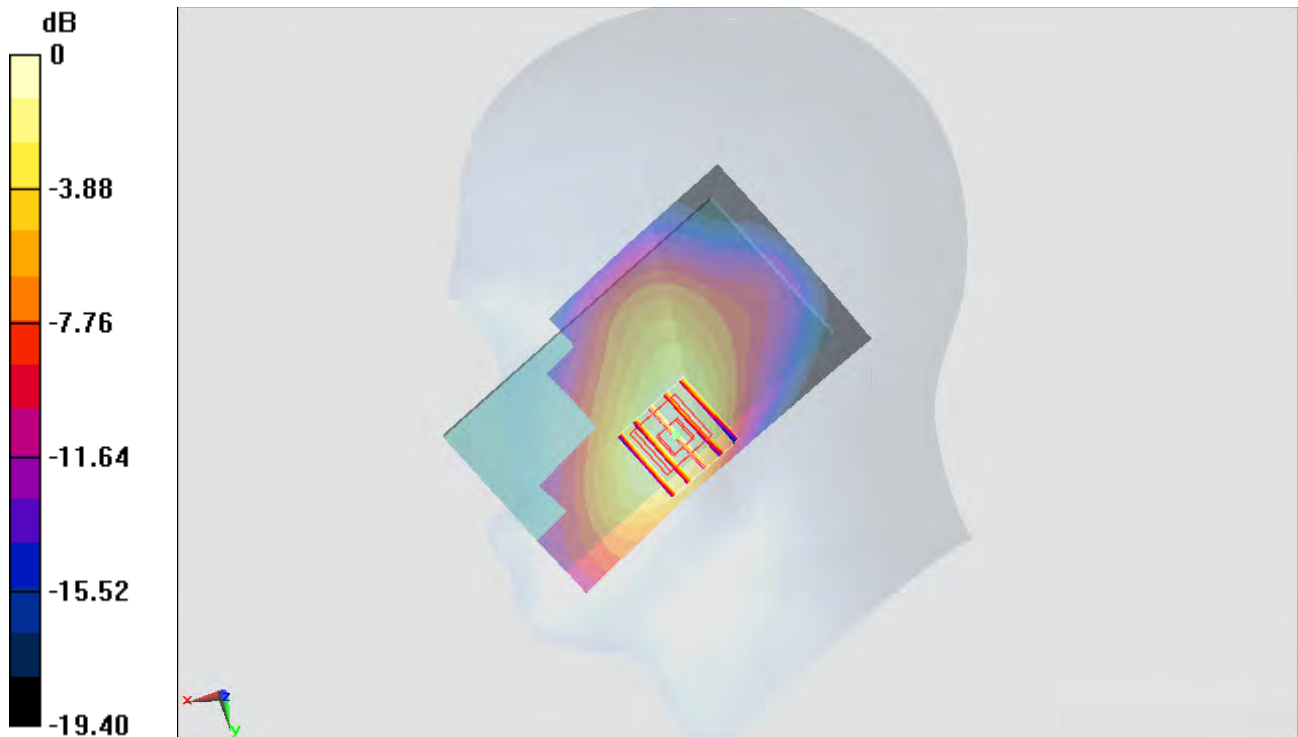

0 dB = 0.559 W/kg = -2.53 dBW/kg

#03_WCDMA V_RMC 12.2Kbps_Right Cheek_Ch4132

Communication System: WCDMA ; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_141027 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 42.652$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3955; ConvF(9.86, 9.86, 9.86); Calibrated: 2013/12/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2013/11/7
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4132/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.267 W/kg


Configuration/Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.114 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

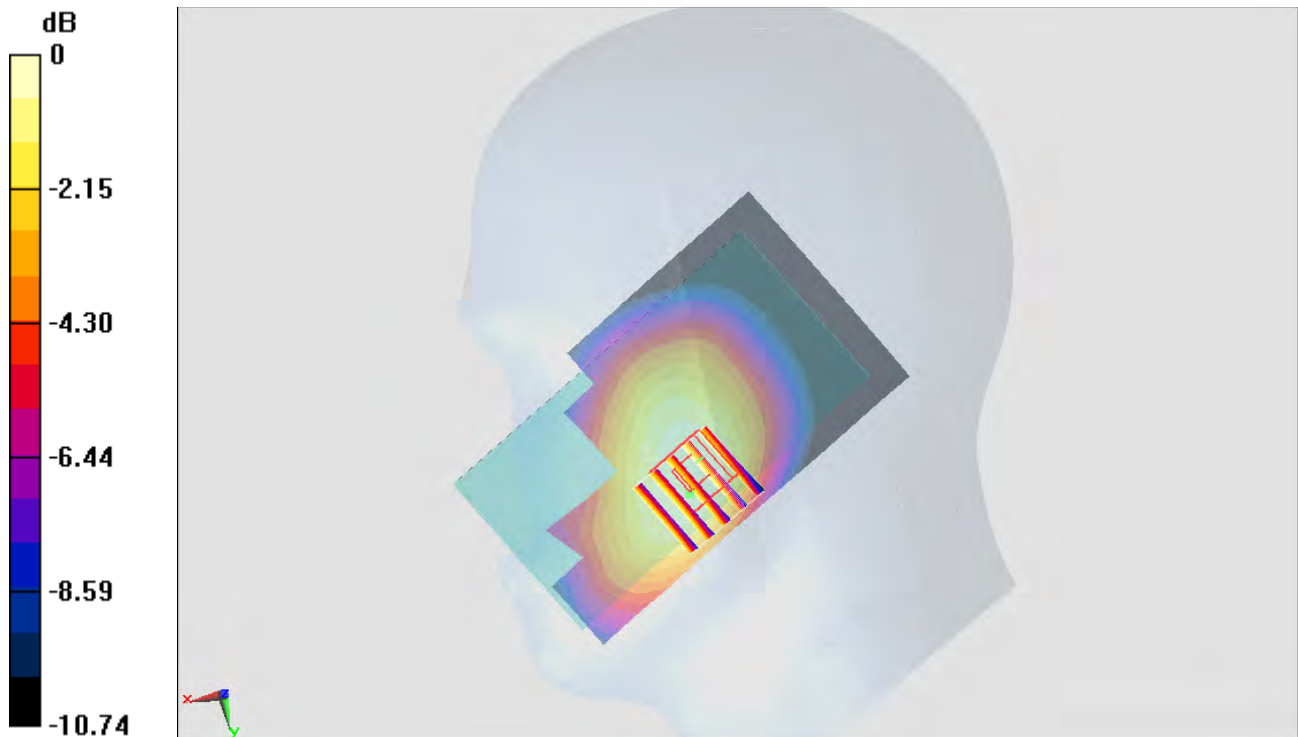

0 dB = $0.251 \text{ W/kg} = -6.00 \text{ dBW/kg}$

#04_WCDMA II_RMC 12.2Kbps_Right Cheek_Ch9538

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_141027 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.439 \text{ S/m}$; $\epsilon_r = 39.151$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3955; ConvF(8.23, 8.23, 8.23); Calibrated: 2013/12/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2013/11/7
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.11 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.438 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.821 W/kg ; SAR(10 g) = 0.508 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

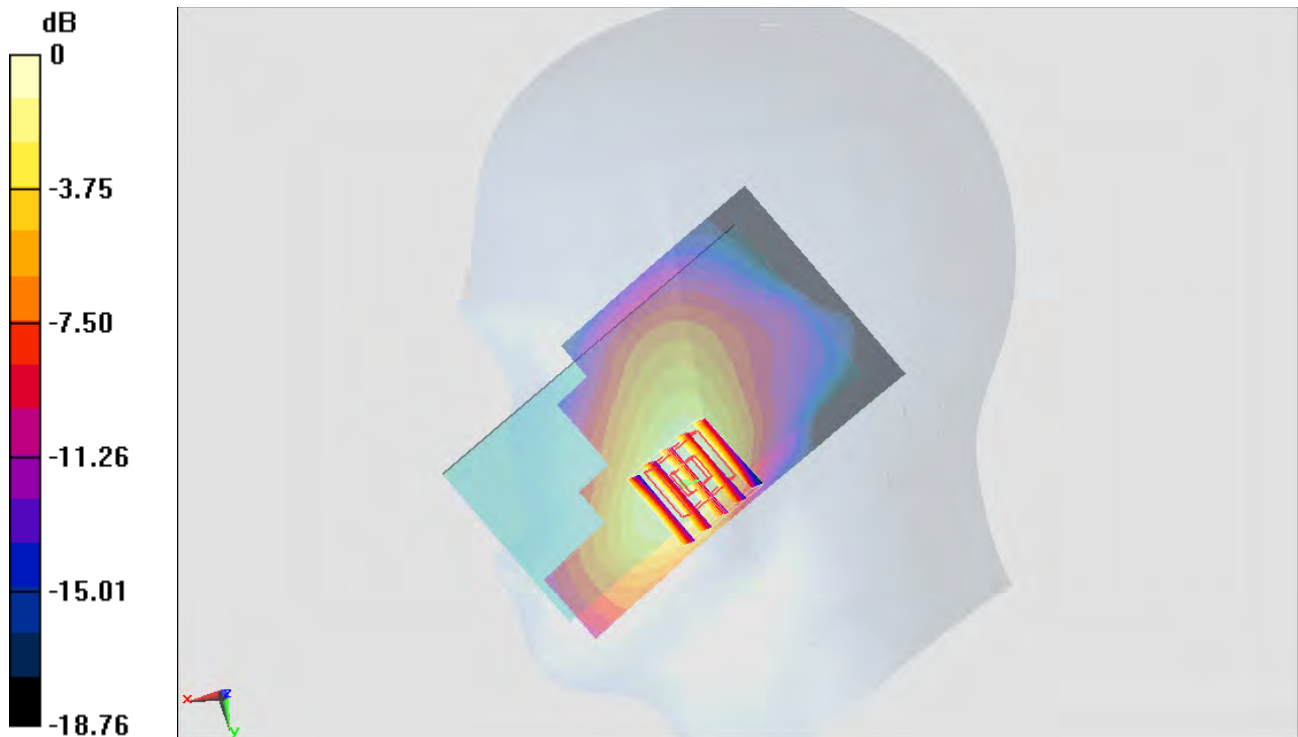

0 dB = $1.03 \text{ W/kg} = 0.13 \text{ dBW/kg}$

#05_GSM850_GPRS (2 Tx slots)_Back_1cm_Ch128

Communication System: GSM850 ; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: MSL_850_141107 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 56.07$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.13, 10.13, 10.13); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch128/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.394 W/kg


Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.384 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

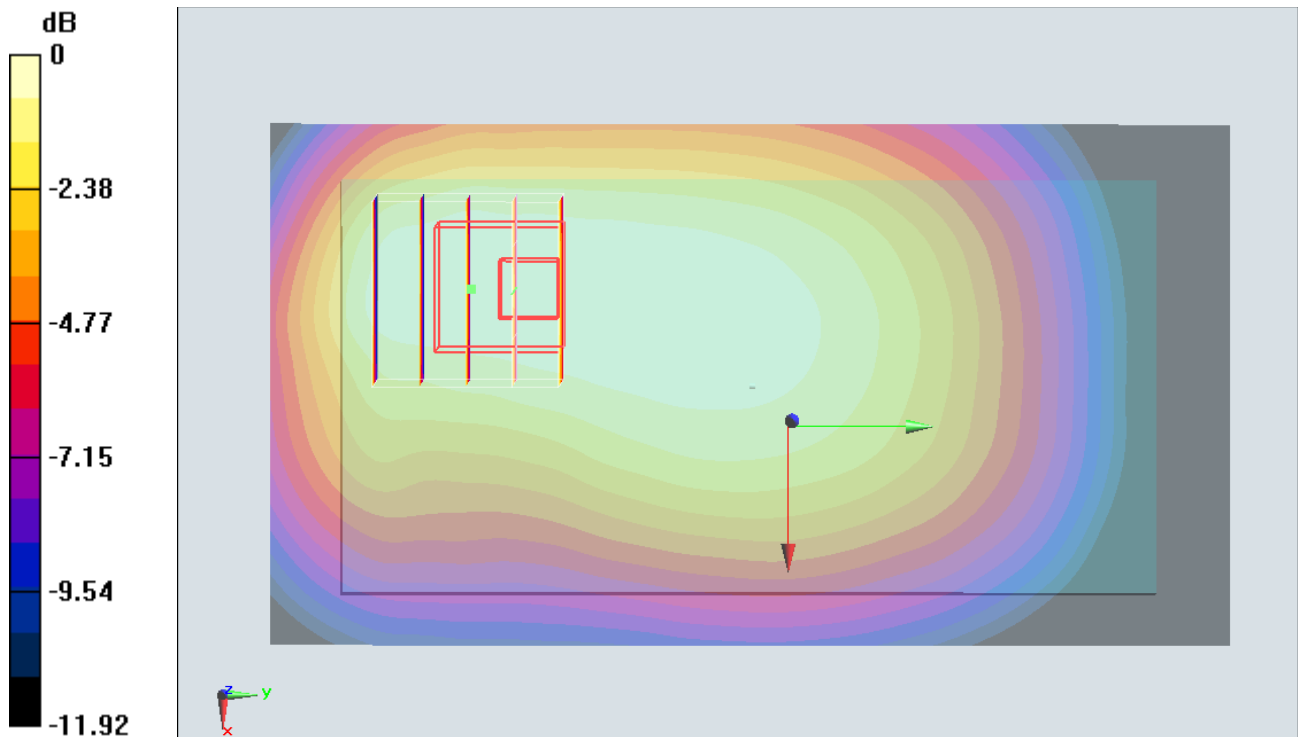

0 dB = 0.387 W/kg = -4.12 dBW/kg

#06_GSM1900_GPRS (2 Tx slots)_Back_1cm_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: MSL_1900_141106 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.555 \text{ S/m}$; $\epsilon_r = 51.902$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.8, 7.8, 7.8); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.836 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.724 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.664 W/kg ; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.839 W/kg

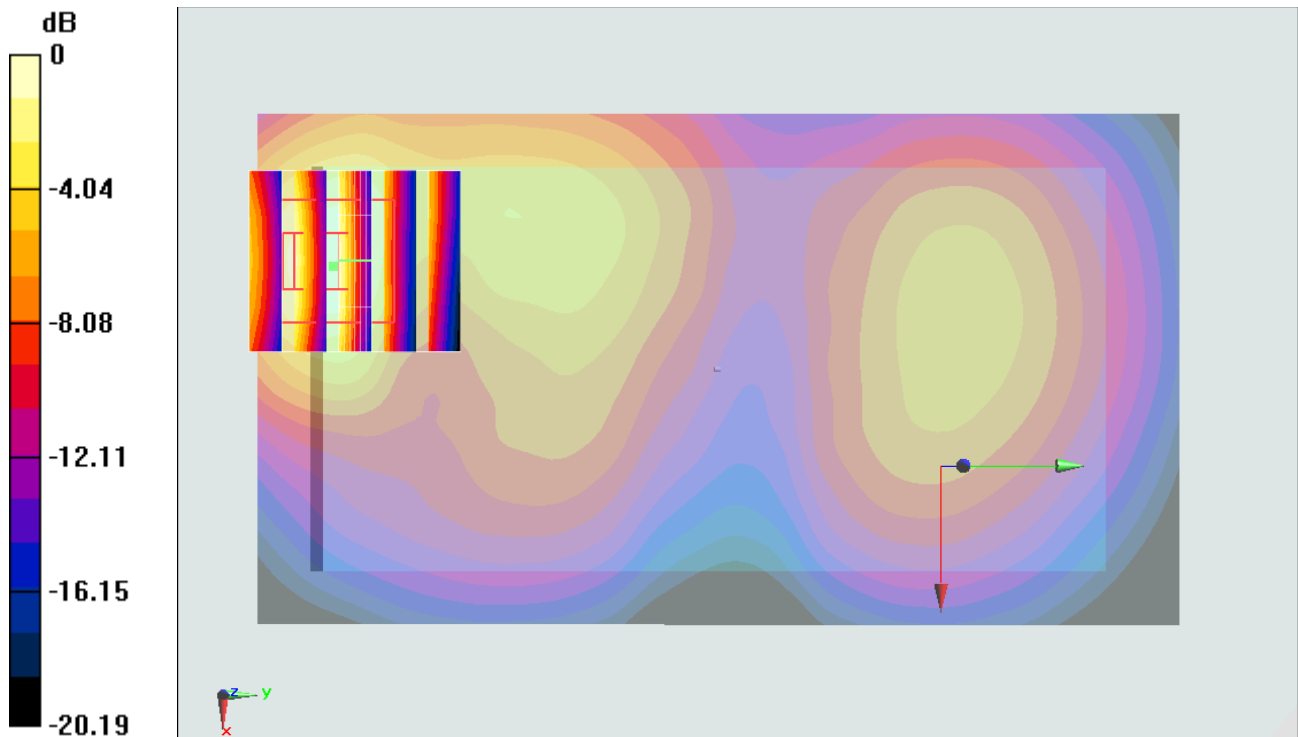

0 dB = 0.839 W/kg = -0.76 dBW/kg

#07_WCDMA V_RMC 12.2Kbps_Back_1cm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: MSL_850_141028 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.612$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3955; ConvF(9.81, 9.81, 9.81); Calibrated: 2013/12/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2013/11/7
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4132/Area Scan (61x11x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.345 W/kg


Configuration/Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.259 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.297 W/kg ; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.341 W/kg

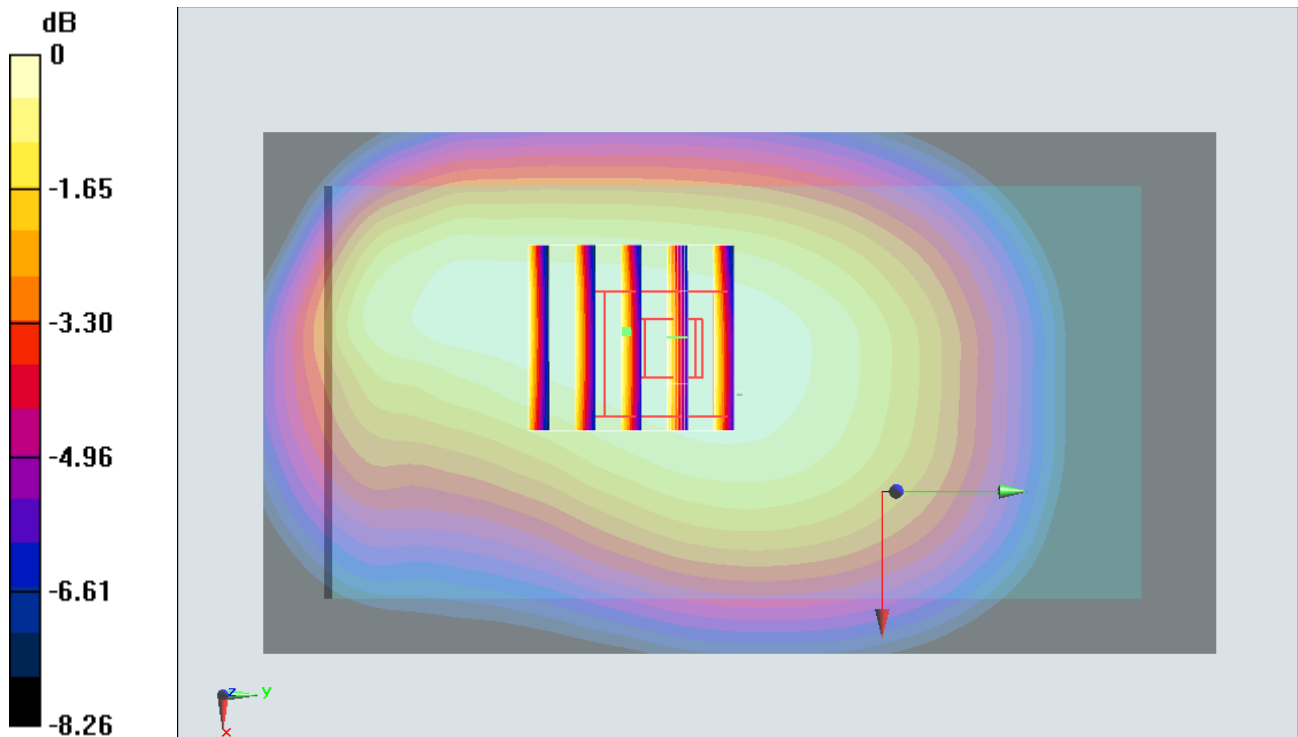

0 dB = $0.341 \text{ W/kg} = -4.67 \text{ dBW/kg}$

#08_WCDMA II_RMC 12.2Kbps_Bottom Side_1cm_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_141106 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.505 \text{ S/m}$; $\epsilon_r = 52.156$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.8, 7.8, 7.8); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9262/Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.59 W/kg


Configuration/Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.466 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.1 W/kg ; SAR(10 g) = 0.540 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

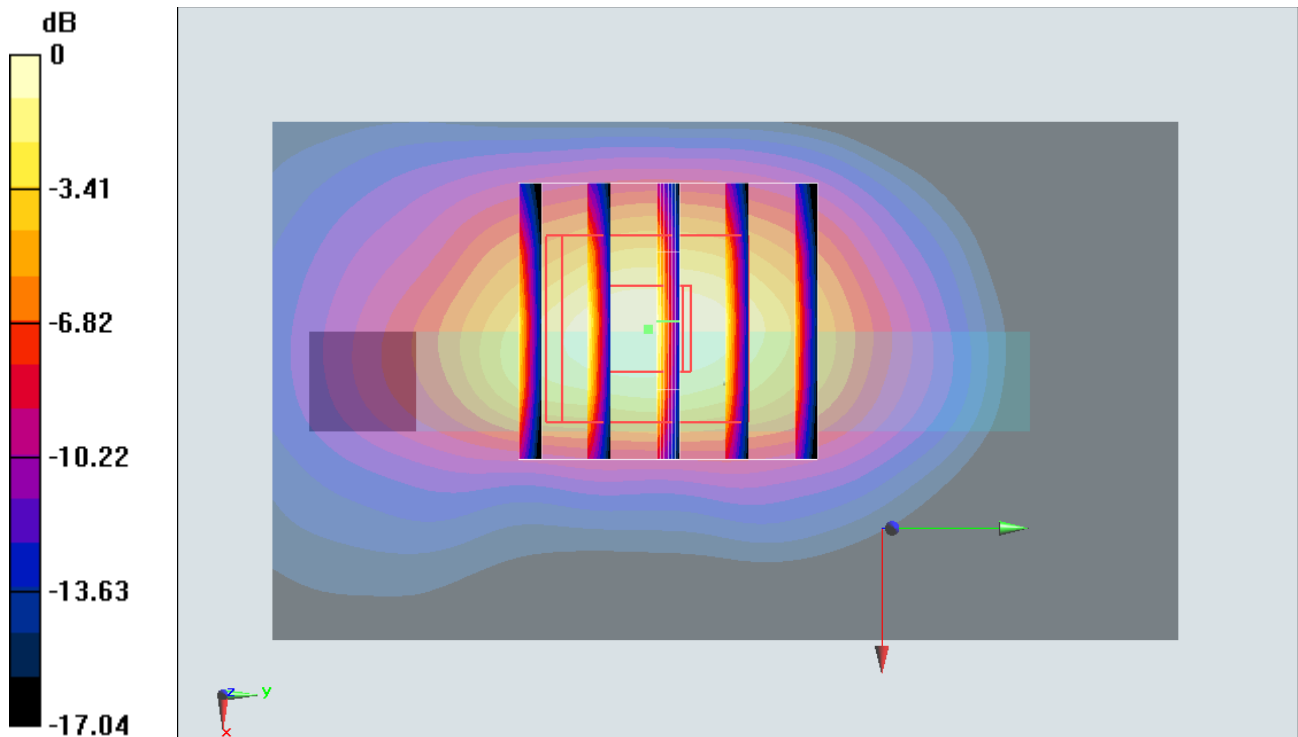

0 dB = $1.54 \text{ W/kg} = 1.88 \text{ dBW/kg}$

#09_GSM850_GPRS (2 Tx slots)_Back_1.5cm_Ch128

Communication System: GSM850 ; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: MSL_850_141107 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 56.07$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.13, 10.13, 10.13); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch128/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.287 W/kg


Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.392 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.248 W/kg ; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.286 W/kg

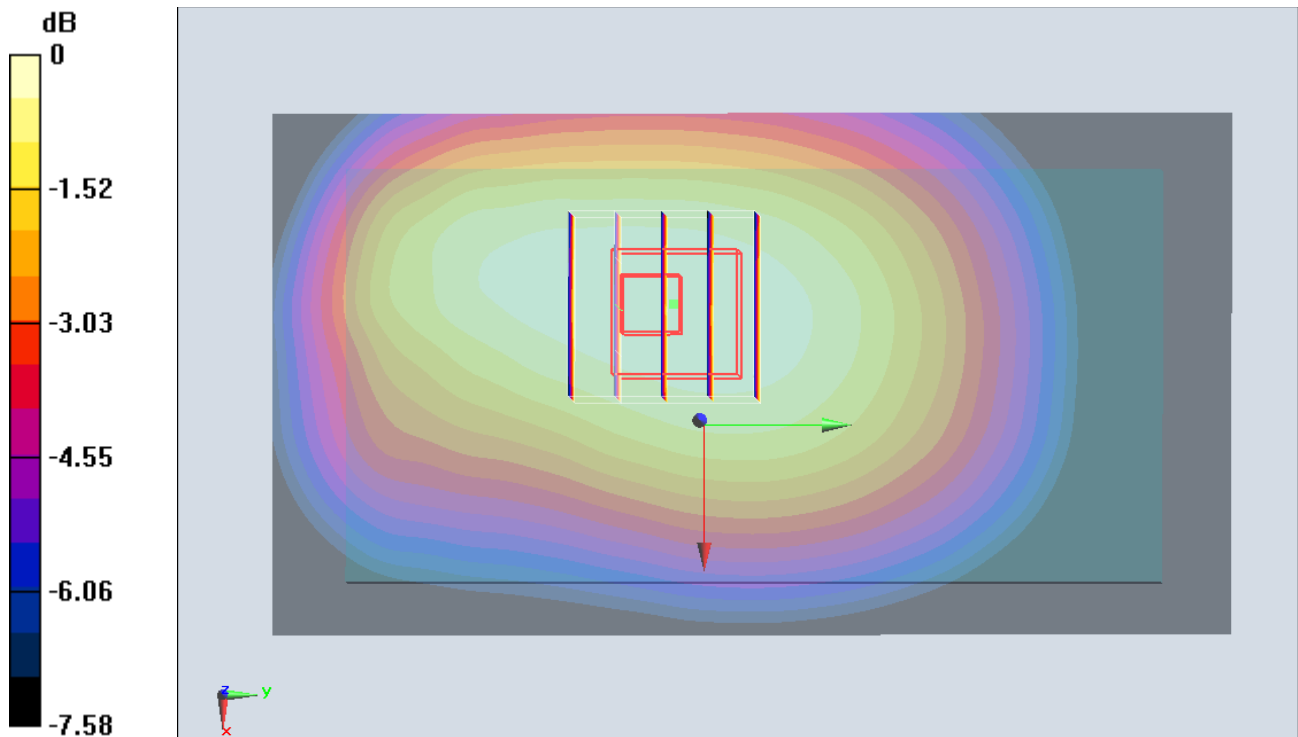

0 dB = $0.286 \text{ W/kg} = -5.44 \text{ dBW/kg}$

#10_GSM1900_GPRS (2 Tx slots)_Back_1.5cm_Ch810

Communication System: PCS ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium: MSL_1900_141106 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.555$ S/m; $\epsilon_r = 51.902$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.8, 7.8, 7.8); Calibrated: 2014/9/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2014/10/6
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.325 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.071 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

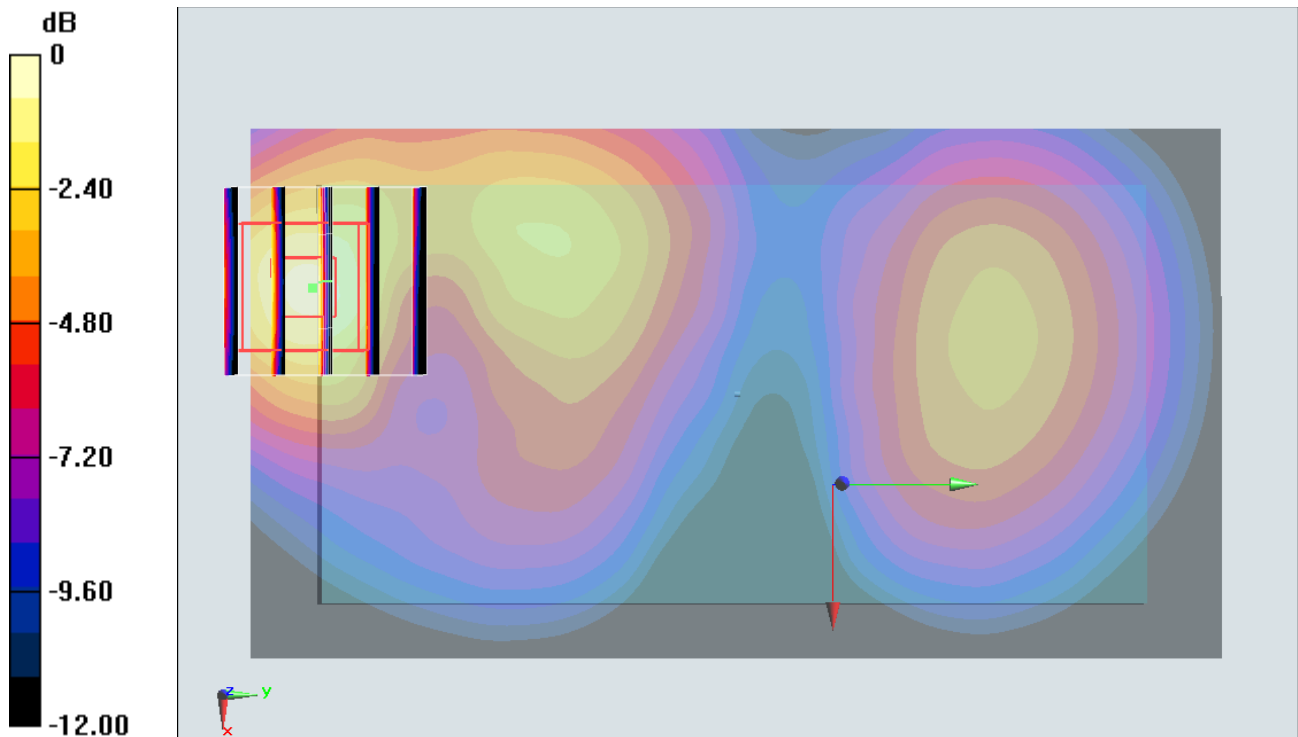

0 dB = 0.370 W/kg = -4.32 dBW/kg

#11_WCDMA V_RMC 12.2Kbps_Back_1.5cm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: MSL_850_141028 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 54.612$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3955; ConvF(9.81, 9.81, 9.81); Calibrated: 2013/12/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2013/11/7
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4132/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.270 W/kg


Configuration/Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.134 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.237 W/kg ; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

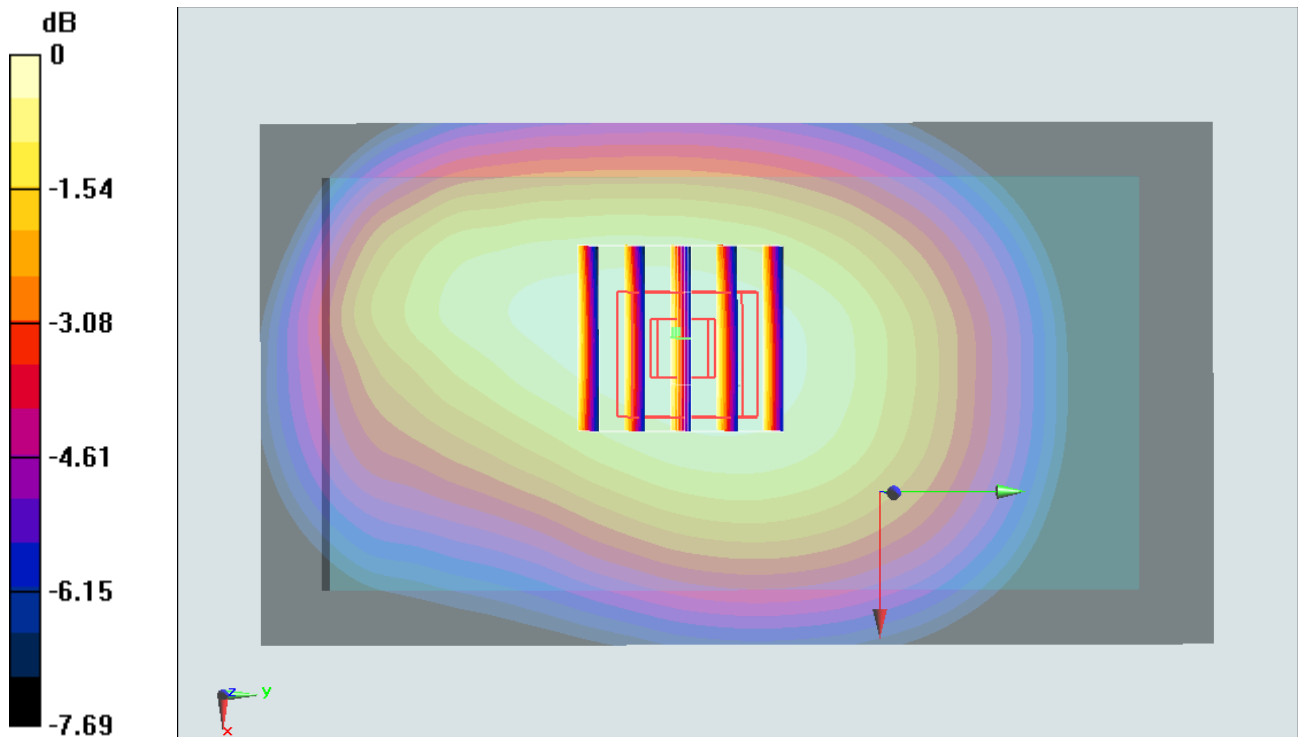

0 dB = $0.271 \text{ W/kg} = -5.67 \text{ dBW/kg}$

#12_WCDMA II_RMC 12.2Kbps_Back_1.5cm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_141028 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.561 \text{ S/m}$; $\epsilon_r = 53.757$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3955; ConvF(8.17, 8.17, 8.17); Calibrated: 2013/12/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2013/11/7
- Phantom: SAM_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.649 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.335 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.453 W/kg ; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.575 W/kg

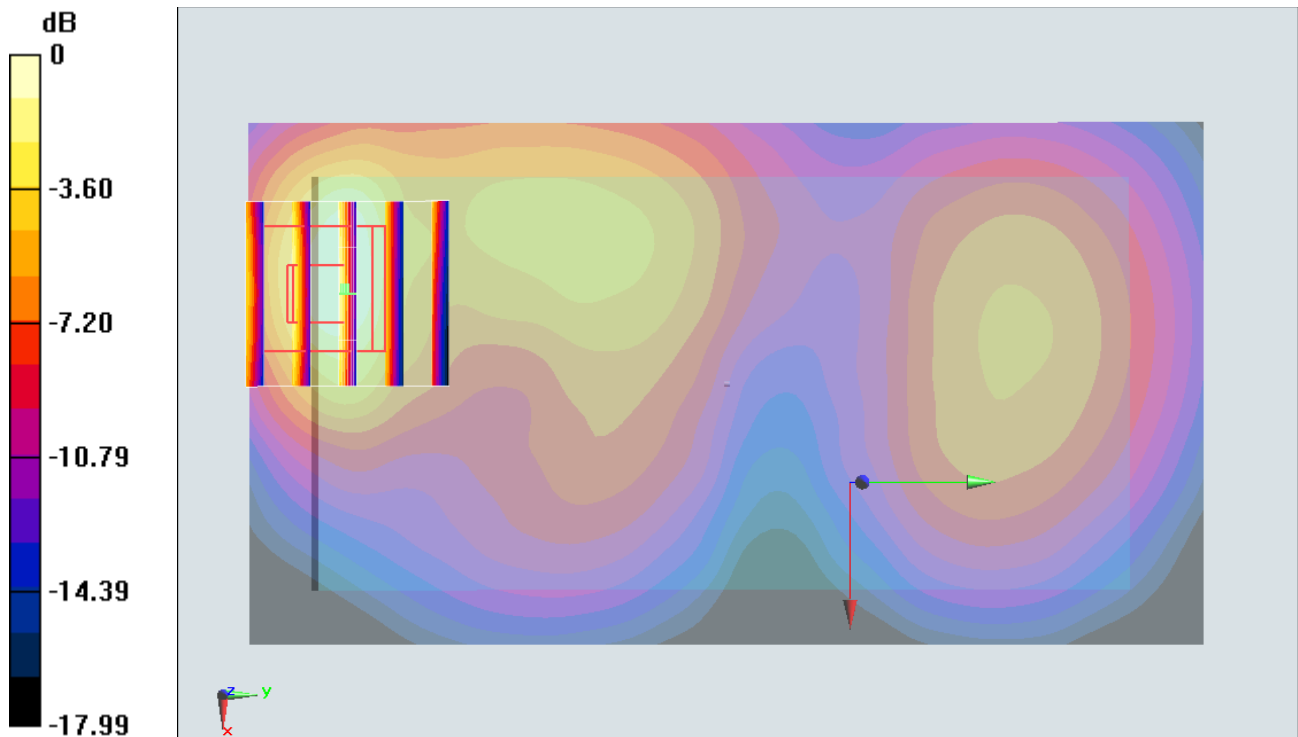

0 dB = $0.575 \text{ W/kg} = -2.40 \text{ dBW/kg}$