


FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 4651
FCC ID : IHDT56UA2
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Standard 5

4. Equipment Under Test (EUT) 6

 4.1 General Information 6

 4.2 General LTE SAR Test and Reporting Considerations 7

5. RF Exposure Limits.....10

 5.1 Uncontrolled Environment.....10

 5.2 Controlled Environment.....10

6. Specific Absorption Rate (SAR).....11

 6.1 Introduction 11

 6.2 SAR Definition..... 11

7. System Description and Setup12

8. Measurement Procedures13

 8.1 Spatial Peak SAR Evaluation.....13

 8.2 Power Reference Measurement.....14

 8.3 Area Scan14

 8.4 Zoom Scan.....15

 8.5 Volume Scan Procedures.....15

 8.6 Power Drift Monitoring.....15

9. Test Equipment List16

10. System Verification17

 10.1 Tissue Verification 17

 10.2 System Performance Check Results.....19

11. RF Exposure Positions20

 11.1 Ear and handset reference point20

 11.2 Definition of the cheek position.....21

 11.3 Definition of the tilt position.....22

 11.4 Body Worn Accessory23

 11.5 Wireless Router.....23

12. Conducted RF Output Power (Unit: dBm).....24

13. Antenna Location44

14. SAR Test Results45

 14.1 Head SAR46

 14.2 Hotspot SAR48

 14.3 Body Worn Accessory SAR.....51

 14.4 Repeated SAR Measurement53

15. Simultaneous Transmission Analysis54

 15.1 Head Exposure Conditions55

 15.2 Hotspot Exposure Conditions.....59

 15.3 Body-Worn Accessory Exposure Conditions61

 15.4 SPLSR Evaluation and Analysis.....62

16. Uncertainty Assessment68

17. References70

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. WLAN/BT Reference Report



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility, LLC, Mobile Cellular Phone, 4651** are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Wireless Router (Separation 10mm)	
		1g SAR (W/kg)			
PCE	GSM850	0.37	0.49	0.86	1.59
	GSM1900	0.10	0.60	0.84	
	WCDMA Band V	0.34	0.48	0.79	
	WCDMA Band IV	0.22	1.00	0.91	
	WCDMA Band II	0.19	1.16	0.84	
	LTE Band 12	0.26	0.42	0.61	
	LTE Band 17	0.25	0.44	0.66	
	LTE Band 5	0.40	0.57	0.90	
	LTE Band 4	0.27	1.32	0.91	
	LTE Band 2	0.22	1.33	0.87	
	LTE Band 25	0.23	1.19	0.88	
LTE Band 7	0.20	0.87	0.86		
DTS	2.4GHz WLAN	1.13	0.12	0.23	1.46
NII	5.2GHz WLAN	1.19		0.15	1.59
	5.3GHz WLAN	1.38	0.13		
	5.5GHz WLAN	1.37	0.17		
	5.8GHz WLAN	1.35	0.17	0.24	
DSS	Bluetooth	0.08	0.01	0.01	1.34
Date of Testing:		2015/7/6 ~ 2015/7/24			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC KDB publications.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r01
- FCC KDB 941225 D06 Hotspot Mode SAR v02



4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	4651
FCC ID	IHDT56UA2
IMEI Code	358962060011524
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> · GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · LTE: QPSK, 16QAM · 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth v3.0 with EDR · Bluetooth v4.0 with LE · NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: <ol style="list-style-type: none"> 1. The WLAN and Bluetooth conducted power and SAR testing results were referred to Sporton FCC SAR Test Report, Brand Name: Motorola, Model Name: 4036, FCC ID: IHDT56UA1, Report No: FA552083A or Appendix D and also used perform transmission simultaneous analysis. 2. This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client). 3. While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the GSM1900, WCDMA B2 / B4 and LTE B2 / B4 / B7 / B25 transmitter. More detailed information which can be referred to "operational description". 4. This device utilizes dynamic antenna tuning on the main antenna in the GSM850, WCDMA B4 / B5, LTE B4 / B5 / B12 / B17 frequency band for head exposure position and in the GSM850, WCDMA B5, LTE B5 / B12 / B17 frequency band for body-worn exposure position. Please refer to the operational description (Exhibit 12) for functionality description, and FCC the pre-test KDB inquiry (Exhibit 12A) for test guidance. Test results for this specific condition are labeled as Triggered in the Antenna Tuner column contained in the section14 of the report. 	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																							
FCC ID	IHDT56UA2																																						
Equipment Name	Mobile Cellular Phone																																						
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 05: 824.7 MHz ~ 848.3 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz																																						
Channel Bandwidth	LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Voice and Data																																						
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
Power reduction applied to satisfy SAR compliance	Yes, When operating in hotspot mode that LTE B2 / B4 / B7 / B25 power reduction applied to satisfy SAR compliance.																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to page43.																																						
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																						



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				



LTE Carrier Aggregation Combinations											
Inter-Band Combinations								Intra-Band Combinations			
(PCC) B2	(SCC) B17	(PCC) B17	(SCC) B2	(PCC) B4	(SCC) B17	(PCC) B17	(SCC) B4	Non contiguous		Non contiguous	
								(PCC) B4	(SCC) B4	(PCC) B7	(SCC) B7
10M + 10M		10M + 10M		10M + 10M		10M + 10M		20M + 20M		20M + 20M	
10M + 5M		10M + 5M		10M + 5M		10M + 5M		20M + 15M		20M + 15M	
5M + 10M		5M + 10M		5M + 10M		5M + 10M		20M + 10M		15M + 20M	
5M + 5M		5M + 5M		5M + 5M		5M + 5M		20M + 5M		15M + 15M	
								15M + 20M		15M + 10M	
								15M + 15M		15M + 5M	
								15M + 10M		15M + 10M	
								15M + 5M		15M + 5M	
								10M + 20M		5M + 15M	
								10M + 15M			
								10M + 10M			
								10M + 5M			
								5M + 20M			
								5M + 15M			
								5M + 10M			
								5M + 5M			

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

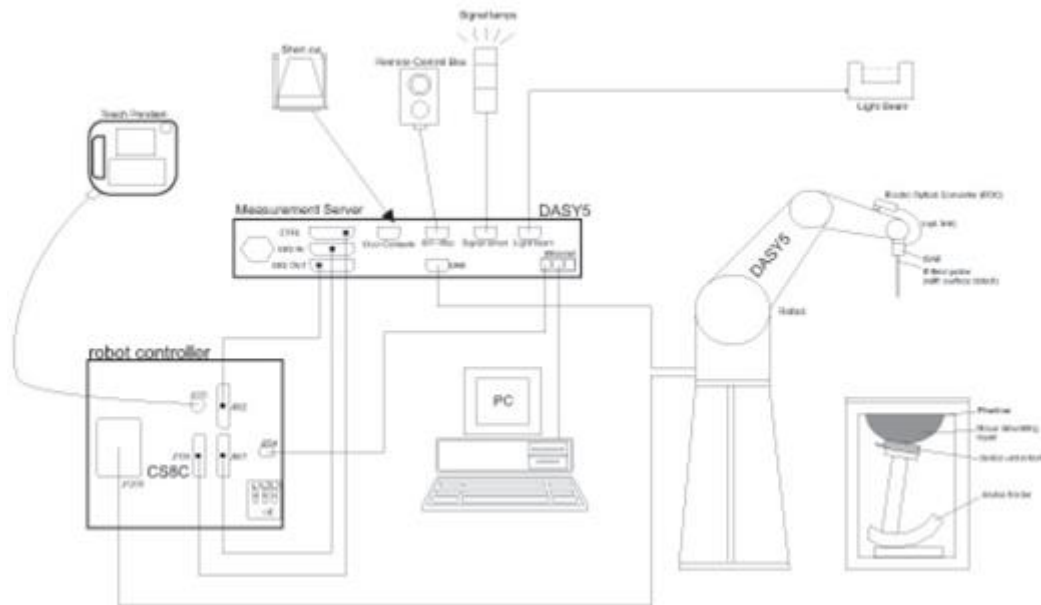

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2015	May. 27, 2016
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 20, 2015	Mar. 19, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 14, 2014	Nov. 13, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 24, 2015	Mar. 23, 2016
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 21, 2014	Aug. 20, 2015
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2014	Aug. 20, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 22, 2015	May. 21, 2016
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 29, 2014	Dec. 28, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 27, 2015	May. 26, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
Wisewind	Thermometer	ETP-101	TM560	Oct. 21, 2014	Oct. 20, 2015
WonDer	Thermometer	WD-5015	TM685	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM642	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 06, 2015	Feb. 05, 2016
Anritsu	Radio Communication Analyzer	MT8820C	6201341952	Dec. 11, 2014	Dec. 10, 2015
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 14, 2015	May. 13, 2016
R&S	Radio communication Tester	CMW500	113998	Sep. 30, 2014	Sep. 29, 2015
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Agilent	Signal Generator	N5181A	MY50145381	Dec. 11, 2014	Dec. 10, 2015
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Anritsu	Power Meter	ML2495A	1419002	May. 13, 2015	May. 12, 2016
Anritsu	Power Sensor	MA2411B	1339124	May. 13, 2015	May. 12, 2016
Anritsu	Power Meter	ML2495A	1349001	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 17, 2015	Jun. 16, 2016
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.4	0.888	43.000	0.89	41.90	-0.22	2.63	±5	2015/7/12
750	HSL	22.3	0.880	40.936	0.89	41.90	-1.12	-2.30	±5	2015/7/24
750	MSL	22.3	0.961	53.913	0.96	55.50	0.10	-2.86	±5	2015/7/7
750	MSL	22.4	0.968	57.538	0.96	55.50	0.83	3.67	±5	2015/7/9
750	MSL	22.5	0.965	54.349	0.96	55.50	0.52	-2.07	±5	2015/7/24
835	HSL	22.4	0.922	41.932	0.90	41.50	2.44	1.04	±5	2015/7/12
835	HSL	22.3	0.928	43.177	0.90	41.50	3.11	4.04	±5	2015/7/24
835	MSL	22.4	0.975	54.349	0.97	55.20	0.52	-1.54	±5	2015/7/6
835	MSL	22.5	0.976	53.012	0.97	55.20	0.62	-3.96	±5	2015/7/9
835	MSL	22.5	0.977	53.183	0.97	55.20	0.72	-3.65	±5	2015/7/24
1750	HSL	22.4	1.358	39.730	1.37	40.10	-0.88	-0.92	±5	2015/7/13
1750	HSL	22.3	1.405	39.044	1.37	40.10	2.55	-2.63	±5	2015/7/24
1750	MSL	22.3	1.451	53.643	1.49	53.40	-2.62	0.46	±5	2015/7/11
1750	MSL	22.5	1.469	53.151	1.49	53.40	-1.41	-0.47	±5	2015/7/15
1900	HSL	22.5	1.423	40.620	1.40	40.00	1.64	1.55	±5	2015/7/13
1900	HSL	22.4	1.399	40.409	1.40	40.00	-0.07	1.02	±5	2015/7/13
1900	MSL	22.2	1.559	53.390	1.52	53.30	2.57	0.17	±5	2015/7/10
1900	MSL	22.3	1.568	51.570	1.52	53.30	3.16	-3.25	±5	2015/7/14
1900	MSL	22.4	1.533	51.572	1.52	53.30	0.86	-3.24	±5	2015/7/15
2600	HSL	22.3	2.053	38.216	1.96	39.00	4.74	-2.01	±5	2015/7/12
2600	MSL	22.3	2.165	53.823	2.16	52.50	0.23	2.52	±5	2015/7/7
2600	MSL	22.2	2.221	52.014	2.16	52.50	2.82	-0.93	±5	2015/7/14
2600	MSL	22.2	2.221	52.014	2.16	52.50	2.82	-0.93	±5	2015/7/14



10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 11 columns: Date, Frequency (MHz), Tissue Type, Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). Rows contain test data for various dates and frequencies.

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

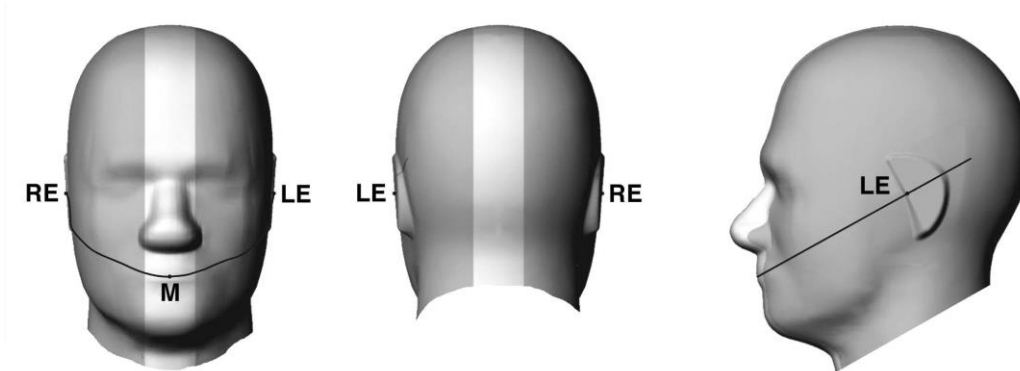


Fig 9.1.1 Front, back, and side views of SAM twin phantom

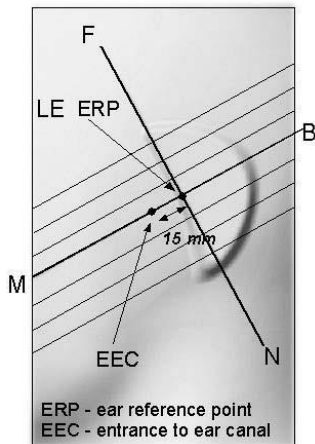


Fig 9.1.2 Close-up side view of phantom showing the ear region.

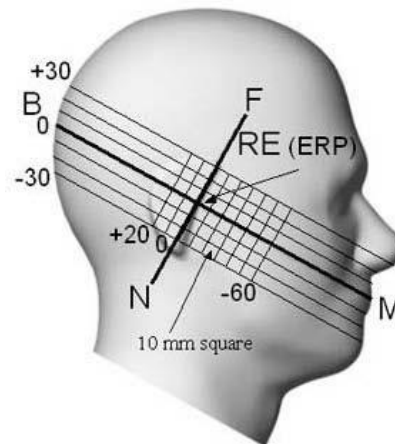


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

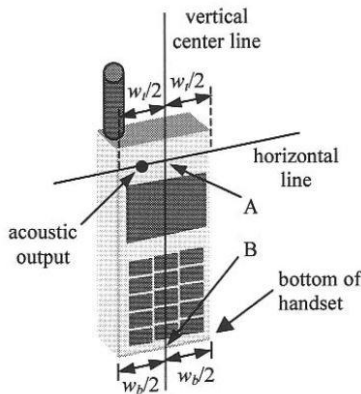


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

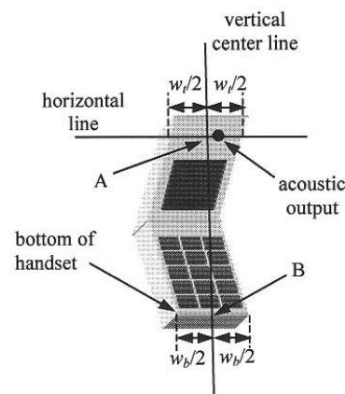


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

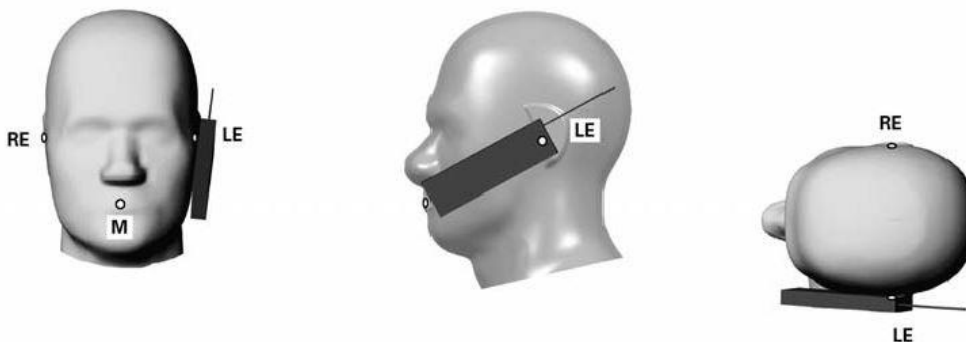


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

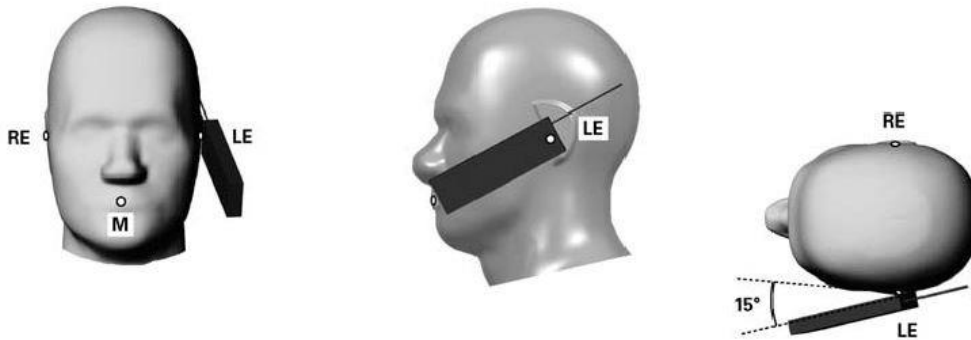


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

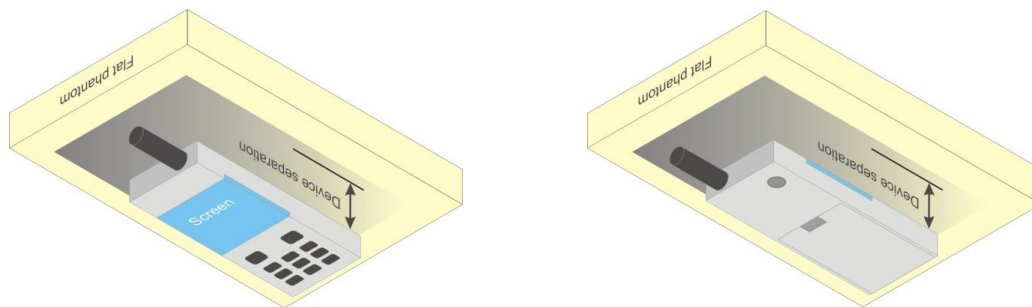


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
3. Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)	33.32	33.34	33.46	33.50	24.32	24.34	24.46	24.50
GPRS (GMSK, 1 Tx slot)	33.34	33.36	33.48	33.50	24.34	24.36	24.48	24.50
GPRS (GMSK, 2 Tx slots)	29.30	29.41	29.56	31.00	23.30	23.41	23.56	25.00
GPRS (GMSK, 3 Tx slots)	27.85	27.92	28.03	29.25	23.59	23.66	23.77	24.99
GPRS (GMSK, 4 Tx slots)	26.00	26.02	26.03	28.00	23.00	23.02	23.03	25.00
EDGE (8PSK, 1 Tx slot)	26.98	27.08	27.22	28.00	17.98	18.08	18.22	19.00
EDGE (8PSK, 2 Tx slots)	24.46	24.54	24.70	25.50	18.46	18.54	18.70	19.50
EDGE (8PSK, 3 Tx slots)	23.68	23.70	23.75	23.75	19.42	19.44	19.49	19.49
EDGE (8PSK, 4 Tx slots)	22.14	22.26	22.38	22.50	19.14	19.26	19.38	19.50

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	29.78	29.85	29.92	30.50	20.78	20.85	20.92	21.50
GPRS (GMSK, 1 Tx slot)	29.81	29.88	29.94	30.50	20.81	20.88	20.94	21.50
GPRS (GMSK, 2 Tx slots)	26.58	26.64	26.69	28.00	20.58	20.64	20.69	22.00
GPRS (GMSK, 3 Tx slots)	24.43	24.44	24.48	26.25	20.17	20.18	20.22	21.99
GPRS (GMSK, 4 Tx slots)	23.21	23.23	23.30	25.00	20.21	20.23	20.30	22.00
EDGE (8PSK, 1 Tx slot)	25.32	25.36	25.40	27.00	16.32	16.36	16.40	18.00
EDGE (8PSK, 2 Tx slots)	24.25	24.32	24.33	26.00	18.25	18.32	18.33	20.00
EDGE (8PSK, 3 Tx slots)	21.41	21.52	21.54	22.75	17.15	17.26	17.28	18.49
EDGE (8PSK, 4 Tx slots)	19.92	19.98	20.01	21.50	16.92	16.98	17.01	18.50

<Additional Request Test Channel>

Band GSM850	Burst Average Power (dBm)	Tune-up Limit (dBm)	Frame-Average Power (dBm)	Tune-up Limit (dBm)
TX Channel	231		231	
Frequency (MHz)	844.8	844.8		
GPRS (GMSK, 4 Tx slots)	26.30	28.00	23.30	25.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

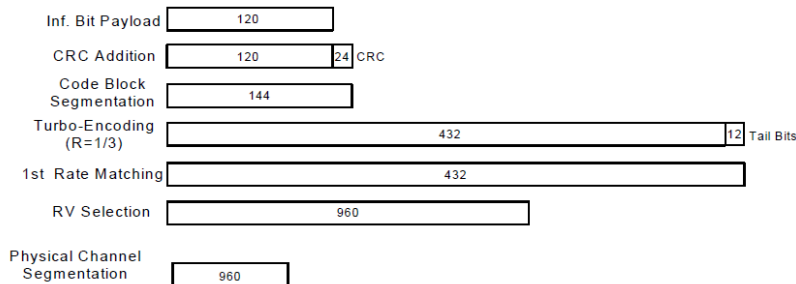


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)	
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233		
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458		
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6				
MPR (dB)	3GPP Rel 99	AMR 12.2Kbps	23.08	23.29	23.35	24.00	22.93	23.01	23.00	24.00	22.70	22.81	22.85	24.00
	3GPP Rel 99	RMC 12.2Kbps	23.11	23.33	23.41	24.00	22.94	23.02	23.00	24.00	22.72	22.83	22.86	24.00
0	3GPP Rel 6	HSDPA Subtest-1	21.80	21.93	22.13	23.00	21.65	21.75	21.76	23.00	21.40	21.29	21.39	23.00
0	3GPP Rel 6	HSDPA Subtest-2	21.85	21.95	22.19	23.00	21.53	21.77	21.92	23.00	21.52	21.23	21.41	23.00
0.5	3GPP Rel 6	HSDPA Subtest-3	21.32	21.46	21.60	22.50	21.22	21.34	21.30	22.50	21.02	20.83	20.88	22.50
0.5	3GPP Rel 6	HSDPA Subtest-4	21.35	21.48	21.67	22.50	21.19	21.27	21.38	22.50	21.00	20.82	20.90	22.50
0	3GPP Rel 8	DC-HSDPA Subtest-1	21.78	21.91	22.10	23.00	21.63	21.73	21.74	23.00	21.38	21.28	21.37	23.00
0	3GPP Rel 8	DC-HSDPA Subtest-2	21.82	21.93	21.15	23.00	21.51	21.75	21.90	23.00	21.49	21.21	21.39	23.00
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	21.30	21.45	21.57	22.50	21.20	21.32	21.28	22.50	20.99	20.80	20.86	22.50
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	21.32	21.46	21.61	22.50	21.17	21.25	21.36	22.50	20.95	20.81	20.85	22.50
0	3GPP Rel 6	HSUPA Subtest-1	22.16	21.85	22.36	23.00	21.40	21.39	21.66	23.00	21.21	20.86	21.08	23.00
2	3GPP Rel 6	HSUPA Subtest-2	20.85	20.78	20.92	21.00	20.42	20.59	20.67	21.00	20.47	20.25	20.30	21.00
1	3GPP Rel 6	HSUPA Subtest-3	20.51	20.26	20.65	22.00	20.64	20.76	20.77	22.00	20.39	20.06	20.25	22.00
2	3GPP Rel 6	HSUPA Subtest-4	20.83	20.66	20.97	21.00	20.71	20.76	20.85	21.00	20.59	20.30	20.40	21.00
0	3GPP Rel 6	HSUPA Subtest-5	22.23	21.87	22.34	23.00	21.74	21.83	21.96	23.00	21.41	21.17	21.29	23.00

<Additional Request Test Channel>

Band		WCDMA V	
TX Channel		4217	
Rx Channel		4442	
Frequency (MHz)		843.4	
3GPP Rel 99	RMC 12.2Kbps	22.80	24.00



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.89	22.95	22.92	24	0
10	QPSK	1	24	22.80	22.94	22.91		
10	QPSK	1	49	22.86	22.91	22.84		
10	QPSK	25	0	21.97	21.98	21.89	23	1
10	QPSK	25	12	21.92	21.90	21.80		
10	QPSK	25	24	21.91	21.91	21.81		
10	QPSK	50	0	21.92	21.96	21.95		
10	16QAM	1	0	22.28	22.31	22.22	23	1
10	16QAM	1	24	22.24	22.23	22.14		
10	16QAM	1	49	22.15	22.23	22.14		
10	16QAM	25	0	20.96	20.92	20.84	22	2
10	16QAM	25	12	20.91	20.90	20.90		
10	16QAM	25	24	20.88	20.84	20.76		
10	16QAM	50	0	20.85	20.89	20.86		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.91	22.91	22.94	24	0
5	QPSK	1	12	22.89	22.88	22.93		
5	QPSK	1	24	22.80	22.84	22.84		
5	QPSK	12	0	21.87	21.83	21.92	23	1
5	QPSK	12	6	21.90	21.95	21.93		
5	QPSK	12	11	21.90	21.87	21.87		
5	QPSK	25	0	21.89	21.86	21.87		
5	16QAM	1	0	22.20	22.20	22.30	23	1
5	16QAM	1	12	22.16	22.18	22.22		
5	16QAM	1	24	22.25	22.09	22.19		
5	16QAM	12	0	20.90	20.84	20.95	22	2
5	16QAM	12	6	20.90	20.91	20.96		
5	16QAM	12	11	20.88	20.83	20.87		
5	16QAM	25	0	20.86	20.85	20.87		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.89	22.91	22.94	24	0
3	QPSK	1	7	22.88	22.89	22.92		
3	QPSK	1	14	22.87	22.90	22.94		
3	QPSK	8	0	21.85	21.94	21.95	23	1
3	QPSK	8	4	21.85	21.91	21.92		
3	QPSK	8	7	21.82	21.92	21.92		
3	QPSK	15	0	21.90	21.93	21.93		
3	16QAM	1	0	22.17	22.07	22.20	23	1
3	16QAM	1	7	22.33	22.31	22.26		
3	16QAM	1	14	22.15	22.15	22.23		
3	16QAM	8	0	20.92	20.97	20.98	22	2
3	16QAM	8	4	20.93	20.98	20.95		
3	16QAM	8	7	20.85	20.96	20.93		
3	16QAM	15	0	20.90	20.87	20.89		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.91	22.94	22.81	24	0
1.4	QPSK	1	2	22.80	22.88	22.79		
1.4	QPSK	1	5	22.79	22.80	22.79		
1.4	QPSK	3	0	22.87	22.88	22.70		
1.4	QPSK	3	1	22.89	22.93	22.79		
1.4	QPSK	3	2	22.90	22.91	22.80		
1.4	QPSK	6	0	21.81	21.82	21.74	23	1
1.4	16QAM	1	0	22.07	22.10	22.07	23	1
1.4	16QAM	1	2	22.17	22.18	22.14		
1.4	16QAM	1	5	22.13	22.11	22.14		
1.4	16QAM	3	0	21.90	21.89	21.89		
1.4	16QAM	3	1	21.90	21.94	21.85		
1.4	16QAM	3	2	21.95	21.94	21.94		
1.4	16QAM	6	0	20.92	20.89	20.82	22	2



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.97	22.93	22.94	24	0
10	QPSK	1	24	22.96	22.92	22.92		
10	QPSK	1	49	22.84	22.91	22.86		
10	QPSK	25	0	21.95	21.94	21.91	23	1
10	QPSK	25	12	21.93	21.93	21.89		
10	QPSK	25	24	21.94	21.91	21.90		
10	QPSK	50	0	21.98	21.94	21.95	23	1
10	16QAM	1	0	22.28	22.24	22.24		
10	16QAM	1	24	22.25	22.23	22.17		
10	16QAM	1	49	22.13	22.23	22.19	22	2
10	16QAM	25	0	20.90	20.91	20.88		
10	16QAM	25	12	20.95	20.99	20.95		
10	16QAM	25	24	20.94	20.86	20.86	22	2
10	16QAM	50	0	20.91	20.91	20.89		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.94	22.95	22.90	24	0
5	QPSK	1	12	22.95	22.93	22.85		
5	QPSK	1	24	22.95	22.87	22.90		
5	QPSK	12	0	21.98	21.96	21.83	23	1
5	QPSK	12	6	22.02	21.94	21.83		
5	QPSK	12	11	21.97	21.89	21.86		
5	QPSK	25	0	21.90	21.95	21.86	23	1
5	16QAM	1	0	22.18	22.21	22.16		
5	16QAM	1	12	22.23	22.15	22.12		
5	16QAM	1	24	22.20	22.10	22.18	22	2
5	16QAM	12	0	20.98	20.96	20.87		
5	16QAM	12	6	20.99	20.95	20.88		
5	16QAM	12	11	20.93	20.88	20.91	22	2
5	16QAM	25	0	20.89	20.96	20.91		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.49	22.44	22.39	24	0
10	QPSK	1	24	22.39	22.36	22.26		
10	QPSK	1	49	22.35	22.33	22.25		
10	QPSK	25	0	21.48	21.50	21.48	23	1
10	QPSK	25	12	21.43	21.43	21.41		
10	QPSK	25	24	21.41	21.34	21.33		
10	QPSK	50	0	21.50	21.40	21.44	23	1
10	16QAM	1	0	21.78	21.77	21.72		
10	16QAM	1	24	21.69	21.61	21.61		
10	16QAM	1	49	21.65	21.66	21.55	22	2
10	16QAM	25	0	20.45	20.48	20.43		
10	16QAM	25	12	20.43	20.40	20.43		
10	16QAM	25	24	20.34	20.30	20.30	22	2
10	16QAM	50	0	20.48	20.34	20.42		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.48	22.42	22.40	24	0
5	QPSK	1	12	22.42	22.33	22.32		
5	QPSK	1	24	22.41	22.32	22.29		
5	QPSK	12	0	21.42	21.46	21.49	23	1
5	QPSK	12	6	21.39	21.29	21.48		
5	QPSK	12	11	21.43	21.34	21.50		
5	QPSK	25	0	21.43	21.27	21.42	23	1
5	16QAM	1	0	21.73	21.59	21.78		
5	16QAM	1	12	21.72	21.51	21.69		
5	16QAM	1	24	21.68	21.46	21.63	22	2
5	16QAM	12	0	20.44	20.28	20.54		
5	16QAM	12	6	20.44	20.22	20.52		
5	16QAM	12	11	20.45	20.25	20.49	22	2
5	16QAM	25	0	20.44	20.35	20.43		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.36	22.42	22.42	24	0
3	QPSK	1	7	22.34	22.41	22.40		
3	QPSK	1	14	22.31	22.36	22.35		
3	QPSK	8	0	21.30	21.33	21.55	23	1
3	QPSK	8	4	21.36	21.29	21.50		
3	QPSK	8	7	21.32	21.30	21.49		
3	QPSK	15	0	21.30	21.28	21.48	23	1
3	16QAM	1	0	21.72	21.63	21.82		
3	16QAM	1	7	21.69	21.54	21.75		
3	16QAM	1	14	21.56	21.49	21.64	22	2
3	16QAM	8	0	20.37	20.35	20.54		
3	16QAM	8	4	20.43	20.33	20.49		
3	16QAM	8	7	20.36	20.35	20.49	22	2
3	16QAM	15	0	20.29	20.26	20.48		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.40	22.39	22.41	24	0
1.4	QPSK	1	2	22.35	22.36	22.39		
1.4	QPSK	1	5	22.19	22.30	22.31		
1.4	QPSK	3	0	22.34	22.34	22.30		
1.4	QPSK	3	1	22.37	22.29	22.35		
1.4	QPSK	3	2	22.24	22.30	22.31		
1.4	QPSK	6	0	21.31	21.23	21.39	23	1
1.4	16QAM	1	0	21.62	21.44	21.72	23	1
1.4	16QAM	1	2	21.53	21.52	21.69		
1.4	16QAM	1	5	21.49	21.48	21.61		
1.4	16QAM	3	0	21.34	21.25	21.45		
1.4	16QAM	3	1	21.39	21.31	21.49		
1.4	16QAM	3	2	21.41	21.30	21.48		
1.4	16QAM	6	0	20.41	20.28	20.45	22	2

<Additional Request Test Channel>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20475		
Frequency (MHz)				831.5		
10	QPSK	1	0	22.82	24	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.56	22.60	22.69		
20	QPSK	1	49	22.42	22.41	22.50	24	0
20	QPSK	1	99	22.33	22.40	22.43		
20	QPSK	50	0	21.73	21.80	21.79		
20	QPSK	50	24	21.44	21.49	21.53	23	1
20	QPSK	50	49	21.38	21.35	21.43		
20	QPSK	100	0	21.50	21.52	21.62		
20	16QAM	1	0	21.74	21.81	21.80	23	1
20	16QAM	1	49	21.64	21.71	21.71		
20	16QAM	1	99	21.62	21.68	21.69		
20	16QAM	50	0	20.68	20.75	20.60	22	2
20	16QAM	50	24	20.41	20.46	20.50		
20	16QAM	50	49	20.34	20.31	20.41		
20	16QAM	100	0	20.48	20.49	20.58		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.41	22.41	22.47		
15	QPSK	1	37	22.38	22.34	22.40	24	0
15	QPSK	1	74	22.37	22.36	22.38		
15	QPSK	36	0	21.57	21.61	21.58		
15	QPSK	36	18	21.39	21.50	21.41	23	1
15	QPSK	36	37	21.30	21.34	21.39		
15	QPSK	75	0	21.45	21.48	21.42		
15	16QAM	1	0	21.90	21.83	21.79	23	1
15	16QAM	1	37	21.73	21.73	21.75		
15	16QAM	1	74	21.68	21.66	21.65		
15	16QAM	36	0	20.58	20.58	20.54	22	2
15	16QAM	36	18	20.38	20.43	20.39		
15	16QAM	36	37	20.25	20.30	20.35		
15	16QAM	75	0	20.43	20.45	20.40		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.42	22.51	22.40		
10	QPSK	1	24	22.32	22.49	22.37	24	0
10	QPSK	1	49	22.40	22.39	22.31		
10	QPSK	25	0	21.52	21.59	21.58		
10	QPSK	25	12	21.40	21.56	21.42	23	1
10	QPSK	25	24	21.44	21.43	21.40		
10	QPSK	50	0	21.46	21.57	21.56		
10	16QAM	1	0	21.87	21.85	21.75	23	1
10	16QAM	1	24	21.67	21.83	21.69		
10	16QAM	1	49	21.76	21.71	21.65		
10	16QAM	25	0	20.50	20.54	20.54	22	2
10	16QAM	25	12	20.41	20.54	20.41		
10	16QAM	25	24	20.40	20.37	20.36		
10	16QAM	50	0	20.41	20.52	20.49		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.39	22.45	22.42	24	0
5	QPSK	1	12	22.27	22.42	22.38		
5	QPSK	1	24	22.19	22.40	22.43		
5	QPSK	12	0	21.39	21.53	21.50	23	1
5	QPSK	12	6	21.29	21.44	21.47		
5	QPSK	12	11	21.29	21.42	21.46		
5	QPSK	25	0	21.24	21.41	21.40	23	1
5	16QAM	1	0	21.68	21.79	21.75		
5	16QAM	1	12	21.50	21.63	21.61		
5	16QAM	1	24	21.48	21.67	21.70	22	2
5	16QAM	12	0	20.39	20.52	20.50		
5	16QAM	12	6	20.30	20.44	20.45		
5	16QAM	12	11	20.26	20.41	20.42	22	2
5	16QAM	25	0	20.25	20.37	20.36		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.44	22.48	22.46	24	0
3	QPSK	1	7	22.34	22.44	22.42		
3	QPSK	1	14	22.31	22.41	22.37		
3	QPSK	8	0	21.38	21.47	21.49	23	1
3	QPSK	8	4	21.29	21.37	21.42		
3	QPSK	8	7	21.27	21.38	21.38		
3	QPSK	15	0	21.20	21.39	21.43	23	1
3	16QAM	1	0	21.65	21.73	21.78		
3	16QAM	1	7	21.60	21.71	21.71		
3	16QAM	1	14	21.59	21.65	21.67	22	2
3	16QAM	8	0	20.42	20.51	20.52		
3	16QAM	8	4	20.33	20.45	20.48		
3	16QAM	8	7	20.32	20.42	20.40	22	2
3	16QAM	15	0	20.30	20.37	20.40		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.33	22.43	22.33	24	0
1.4	QPSK	1	2	22.26	22.41	22.44		
1.4	QPSK	1	5	22.23	22.36	22.30		
1.4	QPSK	3	0	22.25	22.45	22.32		
1.4	QPSK	3	1	22.25	22.30	22.44		
1.4	QPSK	3	2	22.32	22.43	22.43		
1.4	QPSK	6	0	21.22	21.34	21.35	23	1
1.4	16QAM	1	0	21.55	21.70	21.55	23	1
1.4	16QAM	1	2	21.50	21.78	21.68		
1.4	16QAM	1	5	21.48	21.61	21.59		
1.4	16QAM	3	0	21.29	21.47	21.31		
1.4	16QAM	3	1	21.33	21.52	21.45		
1.4	16QAM	3	2	21.35	21.44	21.44		
1.4	16QAM	6	0	20.32	20.40	20.40	22	2



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.50	22.51	22.55	24	0
20	QPSK	1	49	22.08	22.19	22.24		
20	QPSK	1	99	22.04	22.10	22.10		
20	QPSK	50	0	21.33	21.42	21.43	23	1
20	QPSK	50	24	21.10	21.14	21.15		
20	QPSK	50	49	21.06	21.09	21.11		
20	QPSK	100	0	21.31	21.25	21.51		
20	16QAM	1	0	21.28	21.58	21.40	23	1
20	16QAM	1	49	21.27	21.37	21.35		
20	16QAM	1	99	21.20	21.48	21.30		
20	16QAM	50	0	20.46	20.44	20.39	22	2
20	16QAM	50	24	20.16	20.10	20.21		
20	16QAM	50	49	20.11	20.15	20.17		
20	16QAM	100	0	20.39	20.26	20.44		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.40	22.41	22.43	24	0
15	QPSK	1	37	22.15	22.06	22.18		
15	QPSK	1	74	22.07	22.12	22.25		
15	QPSK	36	0	21.43	21.29	21.44	23	1
15	QPSK	36	18	21.27	21.10	21.24		
15	QPSK	36	37	21.13	21.01	21.16		
15	QPSK	75	0	21.31	21.14	21.39		
15	16QAM	1	0	22.09	21.90	21.99	23	1
15	16QAM	1	37	21.68	21.49	21.55		
15	16QAM	1	74	21.42	21.42	21.53		
15	16QAM	36	0	20.41	20.27	20.39	22	2
15	16QAM	36	18	20.26	20.06	20.16		
15	16QAM	36	37	20.18	20.02	20.13		
15	16QAM	75	0	20.29	20.13	20.36		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.38	22.39	22.42	24	0
10	QPSK	1	24	22.25	22.13	22.33		
10	QPSK	1	49	22.15	22.10	22.25		
10	QPSK	25	0	21.45	21.24	21.51	23	1
10	QPSK	25	12	21.20	21.15	21.29		
10	QPSK	25	24	21.24	21.09	21.31		
10	QPSK	50	0	21.29	21.14	21.41		
10	16QAM	1	0	21.88	21.67	21.89	23	1
10	16QAM	1	24	21.53	21.40	21.60		
10	16QAM	1	49	21.45	21.31	21.45		
10	16QAM	25	0	20.45	20.21	20.40	22	2
10	16QAM	25	12	20.21	20.12	20.27		
10	16QAM	25	24	20.20	20.05	20.23		
10	16QAM	50	0	20.24	20.09	20.37		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.37	22.20	22.33	24	0
5	QPSK	1	12	22.23	22.11	22.15		
5	QPSK	1	24	22.15	22.06	22.14		
5	QPSK	12	0	21.29	21.23	21.19	23	1
5	QPSK	12	6	21.26	21.18	21.21		
5	QPSK	12	11	21.21	21.02	21.16		
5	QPSK	25	0	21.23	21.08	21.19	23	1
5	16QAM	1	0	21.61	21.43	21.56		
5	16QAM	1	12	21.47	21.36	21.40		
5	16QAM	1	24	21.40	21.29	21.37	22	2
5	16QAM	12	0	20.30	20.23	20.16		
5	16QAM	12	6	20.26	20.16	20.17		
5	16QAM	12	11	20.18	20.02	20.11	22	2
5	16QAM	25	0	20.23	20.08	20.15		
5	16QAM	25	0	20.23	20.08	20.15		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.27	22.17	22.22	24	0
3	QPSK	1	7	22.25	22.08	22.21		
3	QPSK	1	14	22.12	22.06	22.14		
3	QPSK	8	0	21.20	21.11	21.17	23	1
3	QPSK	8	4	21.19	21.14	21.13		
3	QPSK	8	7	21.18	21.05	21.11		
3	QPSK	15	0	21.11	21.13	21.15	23	1
3	16QAM	1	0	21.40	21.48	21.52		
3	16QAM	1	7	21.35	21.37	21.45		
3	16QAM	1	14	21.29	21.27	21.35	22	2
3	16QAM	8	0	20.23	20.16	20.19		
3	16QAM	8	4	20.26	20.20	20.22		
3	16QAM	8	7	20.24	20.11	20.16	22	2
3	16QAM	15	0	20.19	20.14	20.15		
3	16QAM	15	0	20.19	20.14	20.15		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.17	22.39	22.39	24	0
1.4	QPSK	1	2	22.04	22.32	22.36		
1.4	QPSK	1	5	22.01	22.32	22.38		
1.4	QPSK	3	0	22.03	22.25	22.27		
1.4	QPSK	3	1	22.01	22.21	22.29		
1.4	QPSK	3	2	22.13	22.30	22.37		
1.4	QPSK	6	0	21.00	21.18	21.22	23	1
1.4	16QAM	1	0	21.40	21.22	21.17	23	1
1.4	16QAM	1	2	21.36	21.17	21.16		
1.4	16QAM	1	5	21.30	21.13	21.14		
1.4	16QAM	3	0	21.14	21.02	21.08		
1.4	16QAM	3	1	21.08	21.01	21.08		
1.4	16QAM	3	2	21.06	21.03	21.08		
1.4	16QAM	6	0	20.03	20.01	20.03	22	2



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.81	22.80	22.75	24	0
20	QPSK	1	49	22.30	22.30	22.28		
20	QPSK	1	99	22.33	22.34	22.53		
20	QPSK	50	0	21.70	21.65	21.66	23	1
20	QPSK	50	24	21.38	21.42	21.25		
20	QPSK	50	49	21.35	21.33	21.32		
20	QPSK	100	0	21.57	21.49	21.56		
20	16QAM	1	0	22.36	22.34	22.46	23	1
20	16QAM	1	49	21.48	21.59	21.52		
20	16QAM	1	99	21.56	21.71	22.07		
20	16QAM	50	0	20.70	20.65	20.72	22	2
20	16QAM	50	24	20.38	20.42	20.45		
20	16QAM	50	49	20.40	20.34	20.50		
20	16QAM	100	0	20.52	20.44	20.55		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.78	22.79	22.70	24	0
15	QPSK	1	37	22.25	22.27	22.29		
15	QPSK	1	74	22.20	22.41	22.33		
15	QPSK	36	0	21.46	21.53	21.53	23	1
15	QPSK	36	18	21.26	21.26	21.31		
15	QPSK	36	37	21.19	21.27	21.37		
15	QPSK	75	0	21.37	21.40	21.49		
15	16QAM	1	0	22.09	22.20	22.01	23	1
15	16QAM	1	37	21.68	21.53	21.65		
15	16QAM	1	74	21.49	21.69	21.63		
15	16QAM	36	0	20.46	20.50	20.47	22	2
15	16QAM	36	18	20.29	20.28	20.25		
15	16QAM	36	37	20.25	20.31	20.39		
15	16QAM	75	0	20.45	20.42	20.49		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.65	22.53	22.69	24	0
10	QPSK	1	24	22.27	22.34	22.52		
10	QPSK	1	49	22.26	22.25	22.59		
10	QPSK	25	0	21.52	21.51	21.65	23	1
10	QPSK	25	12	21.37	21.39	21.58		
10	QPSK	25	24	21.35	21.30	21.47		
10	QPSK	50	0	21.42	21.47	21.65		
10	16QAM	1	0	21.96	21.86	22.14	23	1
10	16QAM	1	24	21.61	21.61	21.76		
10	16QAM	1	49	21.57	21.59	22.14		
10	16QAM	25	0	20.51	20.48	20.64	22	2
10	16QAM	25	12	20.39	20.35	20.57		
10	16QAM	25	24	20.30	20.27	20.43		
10	16QAM	50	0	20.35	20.37	20.60		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.52	22.44	22.60	24	0
5	QPSK	1	12	22.32	22.33	22.51		
5	QPSK	1	24	22.26	22.28	22.48		
5	QPSK	12	0	21.45	21.38	21.49	23	1
5	QPSK	12	6	21.33	21.34	21.54		
5	QPSK	12	11	21.32	21.28	21.54		
5	QPSK	25	0	21.31	21.35	21.53		
5	16QAM	1	0	21.76	21.68	21.85	23	1
5	16QAM	1	12	21.57	21.59	21.84		
5	16QAM	1	24	21.52	21.51	22.09		
5	16QAM	12	0	20.44	20.37	20.51	22	2
5	16QAM	12	6	20.38	20.36	20.60		
5	16QAM	12	11	20.31	20.28	20.63		
5	16QAM	25	0	20.34	20.33	20.53		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.38	22.49	22.58	24	0
3	QPSK	1	7	22.37	22.48	22.56		
3	QPSK	1	14	22.31	22.40	22.55		
3	QPSK	8	0	21.37	21.39	21.47	23	1
3	QPSK	8	4	21.34	21.41	21.62		
3	QPSK	8	7	21.25	21.36	21.57		
3	QPSK	15	0	21.35	21.38	21.43		
3	16QAM	1	0	21.71	21.63	21.74	23	1
3	16QAM	1	7	21.71	21.66	22.08		
3	16QAM	1	14	21.58	21.49	21.93		
3	16QAM	8	0	20.48	20.36	20.56	22	2
3	16QAM	8	4	20.46	20.40	20.70		
3	16QAM	8	7	20.38	20.35	20.66		
3	16QAM	15	0	20.38	20.30	20.47		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.43	22.39	22.46	24	0
1.4	QPSK	1	2	22.35	22.38	22.45		
1.4	QPSK	1	5	22.32	22.30	22.33		
1.4	QPSK	3	0	22.32	22.21	22.33		
1.4	QPSK	3	1	22.39	22.31	22.39		
1.4	QPSK	3	2	22.42	22.34	22.30		
1.4	QPSK	6	0	21.90	21.10	21.48	23	1
1.4	16QAM	1	0	21.56	21.51	21.82	23	1
1.4	16QAM	1	2	21.70	21.54	21.91		
1.4	16QAM	1	5	21.54	21.44	21.79		
1.4	16QAM	3	0	21.28	21.23	21.53		
1.4	16QAM	3	1	21.36	21.30	21.59		
1.4	16QAM	3	2	21.39	21.32	21.64		
1.4	16QAM	6	0	20.38	20.21	20.70	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				Channel	20850	21100		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.62	22.38	22.42	24	0
20	QPSK	1	49	22.61	22.37	22.41		
20	QPSK	1	99	22.15	22.11	22.19		
20	QPSK	50	0	21.67	21.30	21.33	23	1
20	QPSK	50	24	21.56	21.29	21.32		
20	QPSK	50	49	21.42	21.22	21.23		
20	QPSK	100	0	21.54	21.30	21.33	23	1
20	16QAM	1	0	21.86	21.57	21.41		
20	16QAM	1	49	21.88	21.69	21.68		
20	16QAM	1	99	21.30	21.19	21.27	22	2
20	16QAM	50	0	20.62	20.31	20.31		
20	16QAM	50	24	20.55	20.41	20.44		
20	16QAM	50	49	20.42	20.23	20.21	22	2
20	16QAM	100	0	20.52	20.30	20.33		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.58	22.36	22.42	24	0
15	QPSK	1	37	22.57	22.43	22.40		
15	QPSK	1	74	22.38	22.21	22.14		
15	QPSK	36	0	21.67	21.40	21.42	23	1
15	QPSK	36	18	21.57	21.43	21.43		
15	QPSK	36	37	21.50	21.22	21.35		
15	QPSK	75	0	21.60	21.33	21.36	23	1
15	16QAM	1	0	21.83	21.64	21.62		
15	16QAM	1	37	21.98	21.73	21.73		
15	16QAM	1	74	21.61	21.42	21.53	22	2
15	16QAM	36	0	20.59	20.39	20.37		
15	16QAM	36	18	20.54	20.42	20.40		
15	16QAM	36	37	20.45	20.20	20.34	22	2
15	16QAM	75	0	20.59	20.31	20.39		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.46	22.30	22.30	24	0
10	QPSK	1	24	22.45	22.29	22.29		
10	QPSK	1	49	22.21	22.02	22.11		
10	QPSK	25	0	21.59	21.24	21.21	23	1
10	QPSK	25	12	21.54	21.22	21.32		
10	QPSK	25	24	21.37	21.25	21.18		
10	QPSK	50	0	21.42	21.24	21.22	23	1
10	16QAM	1	0	21.74	21.47	21.46		
10	16QAM	1	24	21.67	21.49	21.57		
10	16QAM	1	49	21.45	21.25	21.36	22	2
10	16QAM	25	0	20.57	20.21	20.18		
10	16QAM	25	12	20.56	20.23	20.31		
10	16QAM	25	24	20.36	20.20	20.17	22	2
10	16QAM	50	0	20.39	20.21	20.18		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.55	22.25	22.32	24	0
5	QPSK	1	12	22.54	22.23	22.28		
5	QPSK	1	24	22.46	22.14	22.24		
5	QPSK	12	0	21.55	21.20	21.27	23	1
5	QPSK	12	6	21.43	21.24	21.28		
5	QPSK	12	11	21.47	21.23	21.26		
5	QPSK	25	0	21.52	21.20	21.23		
5	16QAM	1	0	21.82	21.44	21.53	23	1
5	16QAM	1	12	21.77	21.45	21.51		
5	16QAM	1	24	21.66	21.35	21.45		
5	16QAM	12	0	20.50	20.21	20.27	22	2
5	16QAM	12	6	20.42	20.22	20.29		
5	16QAM	12	11	20.43	20.20	20.26		
5	16QAM	25	0	20.49	20.19	20.26		




LTE Carrier Aggregation Conducted Power

General Note:

- i. According to KDB941225 D05A v01, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device only supports downlink carrier aggregation. Uplink carrier aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power across all bandwidths, channels and RB configuration for each band.
- iv. During the carrier aggregation conducted power measurements we have attention to throughput traffic to make sure all the power measurement is corrected.

Configure	PCC						SCC				Measured Power	
	Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
Inter-Band	Band 2	20M	1860	18700	1	0	Band 17	10M	710	23790	22.48	22.50
	Band 2	20M	1880	18900	1	0	Band 17	10M	710	23790	22.50	22.51
	Band 2	20M	1900	19100	1	0	Band 17	10M	710	23790	22.51	22.55
	Band 17	10M	709	23780	1	0	Band 2	20M	1880	18900	22.95	22.97
	Band 17	10M	710	23790	1	0	Band 2	20M	1880	18900	22.90	22.93
	Band 17	10M	711	23800	1	0	Band 2	20M	1880	18900	22.90	22.94
	Band 4	20M	1720	20050	1	0	Band 17	10M	710	23790	22.55	22.56
	Band 4	20M	1732.5	20175	1	0	Band 17	10M	710	23790	22.58	22.60
	Band 4	20M	1745	20300	1	0	Band 17	10M	710	23790	22.65	22.69
	Band 17	10M	709	23780	1	0	Band 4	20M	1732.5	20175	22.95	22.97
	Band 17	10M	710	23790	1	0	Band 4	20M	1732.5	20175	22.90	22.93
Band 17	10M	711	23800	1	0	Band 4	20M	1732.5	20175	22.90	22.94	
Intra-Band	Band 4	20M	1720	20050	1	0	Band 4	20M	1732.5	20175	22.55	22.56
	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	20300	22.55	22.56
	Band 4	20M	1732.5	20175	1	0	Band 4	20M	1720	20050	22.58	22.60
	Band 4	20M	1732.5	20175	1	0	Band 4	20M	1745	20300	22.58	22.60
	Band 4	20M	1745	20300	1	0	Band 4	20M	1720	20050	22.65	22.69
	Band 4	20M	1745	20300	1	0	Band 4	20M	1732.5	20175	22.65	22.69
	Band 7	20M	2510	20850	1	0	Band 7	20M	2535	21100	22.60	22.62
	Band 7	20M	2510	20850	1	0	Band 7	20M	2560	21350	22.60	22.62
	Band 7	20M	2535	21100	1	0	Band 7	20M	2510	20850	22.35	22.38
	Band 7	20M	2535	21100	1	0	Band 7	20M	2560	21350	22.35	22.38
	Band 7	20M	2560	21350	1	0	Band 7	20M	2510	20850	22.40	22.42
Band 7	20M	2560	21350	1	0	Band 7	20M	2535	21100	22.40	22.42	

13. Antenna Location

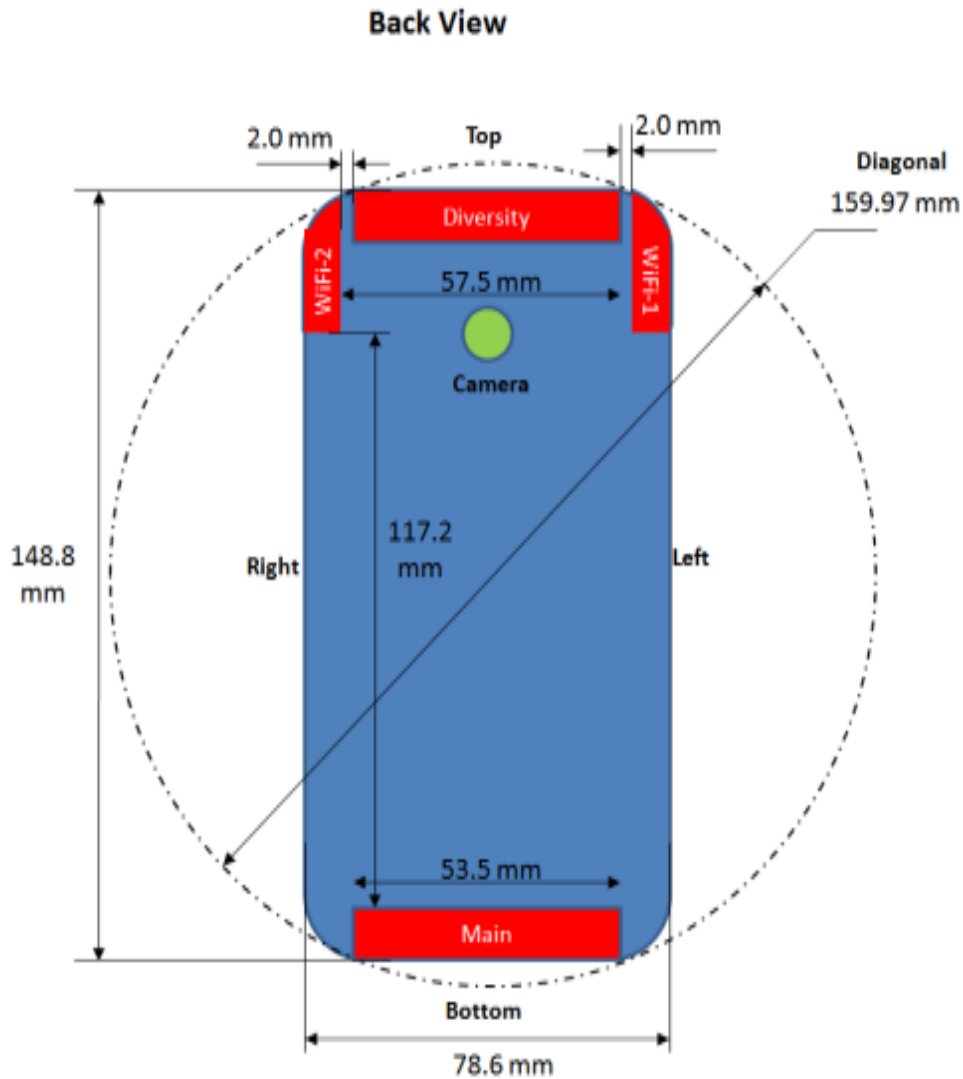

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



14. SAR Test Results

General Note:

- Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.

GSM Note:

- Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
- Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.

UMTS Note:

- Per KDB 941225 D01v03, SAR for head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

- Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
- Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	non-Trigger	251	848.8	26.03	28.00	1.574	-0.03	0.234	0.368
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	non-Trigger	251	848.8	26.03	28.00	1.574	0.02	0.111	0.175
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	non-Trigger	251	848.8	26.03	28.00	1.574	-0.03	0.180	0.283
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	non-Trigger	251	848.8	26.03	28.00	1.574	-0.02	0.115	0.181
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	Trigger	231	844.8	26.30	28.00	1.479	-0.07	0.124	0.183
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	non-Trigger	810	1909.8	23.30	25.00	1.479	-0.07	0.049	0.072
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	non-Trigger	810	1909.8	23.30	25.00	1.479	-0.18	0.035	0.052
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	non-Trigger	810	1909.8	23.30	25.00	1.479	0.08	0.065	0.096
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	non-Trigger	810	1909.8	23.30	25.00	1.479	0.15	0.029	0.043

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	non-Trigger	4233	846.6	22.86	24.00	1.300	0.03	0.262	0.341
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Trigger	4217	843.4	22.80	24.00	1.318	0.02	0.162	0.214
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	non-Trigger	4233	846.6	22.86	24.00	1.300	0	0.131	0.170
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	non-Trigger	4233	846.6	22.86	24.00	1.300	-0.07	0.193	0.251
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	non-Trigger	4233	846.6	22.86	24.00	1.300	-0.03	0.127	0.165
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	-0.13	0.114	0.143
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	0.09	0.060	0.075
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	0.03	0.178	0.223
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Trigger	1413	1732.6	23.02	24.00	1.253	-0.1	0.148	0.185
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	0.17	0.068	0.085
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	-0.06	0.113	0.129
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0.01	0.104	0.119
05	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0.15	0.163	0.187
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0.1	0.061	0.070

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 12	10M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	23095	707.5	22.95	24.00	1.274	-0.05	0.201	0.256
	LTE Band 12	10M	QPSK	1RB	0offset	Right Cheek	0mm	Trigger	23095	707.5	22.95	24.00	1.274	0.12	0.024	0.031
	LTE Band 12	10M	QPSK	25RB	0offset	Right Cheek	0mm	non-Trigger	23095	707.5	21.98	23.00	1.265	0.05	0.115	0.145
	LTE Band 12	10M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	23095	707.5	22.95	24.00	1.274	0.06	0.120	0.153
	LTE Band 12	10M	QPSK	25RB	0offset	Right Tilted	0mm	non-Trigger	23095	707.5	21.98	23.00	1.265	0.09	0.069	0.087
	LTE Band 12	10M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	23095	707.5	22.95	24.00	1.274	-0.07	0.184	0.234
	LTE Band 12	10M	QPSK	25RB	0offset	Left Cheek	0mm	non-Trigger	23095	707.5	21.98	23.00	1.265	-0.04	0.106	0.134
	LTE Band 12	10M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	23095	707.5	22.95	24.00	1.274	-0.09	0.123	0.157
	LTE Band 12	10M	QPSK	25RB	0offset	Left Tilted	0mm	non-Trigger	23095	707.5	21.98	23.00	1.265	-0.04	0.070	0.089



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
07	LTE Band 17	10M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	23780	709	22.97	24.00	1.268	-0.03	0.198	0.251	
	LTE Band 17	10M	QPSK	1RB	0offset	Right Cheek	0mm	Trigger	23780	709	22.97	24.00	1.268	0.08	0.025	0.032	
	LTE Band 17	10M	QPSK	25RB	0offset	Right Cheek	0mm	non-Trigger	23780	709	21.95	23.00	1.274	0.02	0.113	0.144	
	LTE Band 17	10M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	23780	709	22.97	24.00	1.268	0.04	0.116	0.147	
	LTE Band 17	10M	QPSK	25RB	0offset	Right Tilted	0mm	non-Trigger	23780	709	21.95	23.00	1.274	0.07	0.068	0.087	
	LTE Band 17	10M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	23780	709	22.97	24.00	1.268	-0.13	0.182	0.231	
	LTE Band 17	10M	QPSK	25RB	0offset	Left Cheek	0mm	non-Trigger	23780	709	21.95	23.00	1.274	-0.07	0.103	0.131	
	LTE Band 17	10M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	23780	709	22.97	24.00	1.268	-0.16	0.120	0.152	
	LTE Band 17	10M	QPSK	25RB	0offset	Left Tilted	0mm	non-Trigger	23780	709	21.95	23.00	1.274	-0.07	0.070	0.089	
	08	LTE Band 5	10M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.07	0.280	0.396
LTE Band 5		10M	QPSK	1RB	0offset	Right Cheek	0mm	Trigger	20475	831.5	22.82	24.00	1.312	0.07	0.167	0.219	
LTE Band 5		10M	QPSK	25RB	0offset	Right Cheek	0mm	non-Trigger	20525	836.5	21.50	23.00	1.413	-0.05	0.165	0.233	
LTE Band 5		10M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.03	0.163	0.231	
LTE Band 5		10M	QPSK	25RB	0offset	Right Tilted	0mm	non-Trigger	20525	836.5	21.50	23.00	1.413	0.02	0.090	0.127	
LTE Band 5		10M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.09	0.238	0.337	
LTE Band 5		10M	QPSK	25RB	0offset	Left Cheek	0mm	non-Trigger	20525	836.5	21.50	23.00	1.413	-0.07	0.134	0.189	
LTE Band 5		10M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.14	0.165	0.234	
LTE Band 5		10M	QPSK	25RB	0offset	Left Tilted	0mm	non-Trigger	20525	836.5	21.50	23.00	1.413	-0.05	0.091	0.129	
LTE Band 4		20M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	20300	1745	22.69	24.00	1.352	-0.15	0.152	0.206	
LTE Band 4		20M	QPSK	1RB	0offset	Left Cheek	0mm	Trigger	20300	1745	22.69	24.00	1.352	-0.14	0.152	0.206	
LTE Band 4		20M	QPSK	50RB	0offset	Right Cheek	0mm	non-Trigger	20175	1732.5	21.80	23.00	1.318	-0.11	0.088	0.116	
LTE Band 4		20M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	20300	1745	22.69	24.00	1.352	-0.16	0.087	0.118	
LTE Band 4		20M	QPSK	50RB	0offset	Right Tilted	0mm	non-Trigger	20175	1732.5	21.80	23.00	1.318	-0.15	0.047	0.062	
09	LTE Band 4	20M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	20300	1745	22.69	24.00	1.352	0	0.203	0.274	
	LTE Band 4	20M	QPSK	50RB	0offset	Left Cheek	0mm	non-Trigger	20175	1732.5	21.80	23.00	1.318	-0.09	0.110	0.145	
	LTE Band 4	20M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	20300	1745	22.69	24.00	1.352	0.02	0.092	0.124	
	LTE Band 4	20M	QPSK	50RB	0offset	Left Tilted	0mm	non-Trigger	20175	1732.5	21.80	23.00	1.318	0.03	0.051	0.067	
	LTE Band 2	20M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	19100	1900	22.55	24.00	1.396	0.02	0.114	0.159	
	LTE Band 2	20M	QPSK	50RB	0offset	Right Cheek	0mm	non-Trigger	19100	1900	21.43	23.00	1.435	-0.02	0.089	0.128	
	LTE Band 2	20M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	19100	1900	22.55	24.00	1.396	0.15	0.090	0.126	
	LTE Band 2	20M	QPSK	50RB	0offset	Right Tilted	0mm	non-Trigger	19100	1900	21.43	23.00	1.435	0.02	0.016	0.023	
	10	LTE Band 2	20M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	19100	1900	22.55	24.00	1.396	0.03	0.154	0.215
		LTE Band 2	20M	QPSK	50RB	0offset	Left Cheek	0mm	non-Trigger	19100	1900	21.43	23.00	1.435	-0.02	0.113	0.162
LTE Band 2		20M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	19100	1900	22.55	24.00	1.396	0.15	0.050	0.070	
LTE Band 2		20M	QPSK	50RB	0offset	Left Tilted	0mm	non-Trigger	19100	1900	21.43	23.00	1.435	0.03	0.032	0.046	
	LTE Band 25	20M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	26140	1860	22.81	24.00	1.315	-0.17	0.136	0.179	
	LTE Band 25	20M	QPSK	50RB	0offset	Right Cheek	0mm	non-Trigger	26140	1860	21.70	23.00	1.349	-0.12	0.098	0.132	
	LTE Band 25	20M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	26140	1860	22.81	24.00	1.315	0.11	0.076	0.100	
	LTE Band 25	20M	QPSK	50RB	0offset	Right Tilted	0mm	non-Trigger	26140	1860	21.70	23.00	1.349	0.04	0.018	0.024	
	11	LTE Band 25	20M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	26140	1860	22.81	24.00	1.315	-0.04	0.178	0.234
		LTE Band 25	20M	QPSK	50RB	0offset	Left Cheek	0mm	non-Trigger	26140	1860	21.70	23.00	1.349	-0.04	0.129	0.174
LTE Band 25		20M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	26140	1860	22.81	24.00	1.315	0.03	0.069	0.091	
LTE Band 25		20M	QPSK	50RB	0offset	Left Tilted	0mm	non-Trigger	26140	1860	21.70	23.00	1.349	0.06	0.048	0.065	
12	LTE Band 7	20M	QPSK	1RB	0offset	Right Cheek	0mm	non-Trigger	20850	2510	22.62	24.00	1.374	-0.14	0.144	0.198	
	LTE Band 7	20M	QPSK	50RB	0offset	Right Cheek	0mm	non-Trigger	20850	2510	21.67	23.00	1.358	0.08	0.091	0.124	
	LTE Band 7	20M	QPSK	1RB	0offset	Right Tilted	0mm	non-Trigger	20850	2510	22.62	24.00	1.374	0.01	0.082	0.113	
	LTE Band 7	20M	QPSK	50RB	0offset	Right Tilted	0mm	non-Trigger	20850	2510	21.67	23.00	1.358	-0.05	0.055	0.075	
	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	0mm	non-Trigger	20850	2510	22.62	24.00	1.374	-0.13	0.091	0.125	
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	0mm	non-Trigger	20850	2510	21.67	23.00	1.358	-0.11	0.054	0.073	
	LTE Band 7	20M	QPSK	1RB	0offset	Left Tilted	0mm	non-Trigger	20850	2510	22.62	24.00	1.374	0.01	0.069	0.095	
	LTE Band 7	20M	QPSK	50RB	0offset	Left Tilted	0mm	non-Trigger	20850	2510	21.67	23.00	1.358	0.1	0.046	0.062	



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	251	848.8	26.03	28.00	1.574	-0.1	0.546	0.859
	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	128	824.2	26.00	28.00	1.585	0	0.512	0.811
	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	189	836.4	26.02	28.00	1.578	0.01	0.527	0.831
	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	251	848.8	26.03	28.00	1.574	-0.17	0.478	0.752
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	OFF	251	848.8	26.03	28.00	1.574	-0.03	0.069	0.109
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	251	848.8	26.03	28.00	1.574	0	0.382	0.601
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	OFF	251	848.8	26.03	28.00	1.574	-0.02	0.353	0.556
	GSM1900	GPRS (4 Tx slots)	Front	10mm	ON	810	1909.8		20.00	1.000	0.16	0.325	0.325
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	810	1909.8		20.00	1.000	0	0.327	0.327
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	ON	810	1909.8		20.00	1.000	0.16	0.040	0.040
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	ON	810	1909.8		20.00	1.000	0.05	0.033	0.033
14	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	810	1909.8		20.00	1.000	0.07	0.842	0.842
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	512	1850.2		20.00	1.000	-0.03	0.549	0.549
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	661	1880		20.00	1.000	0.02	0.768	0.768

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
15	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	22.86	24.00	1.300	0	0.609	0.792
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4233	846.6	22.86	24.00	1.300	-0.09	0.551	0.716
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	OFF	4233	846.6	22.86	24.00	1.300	0.04	0.086	0.112
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	22.86	24.00	1.300	0.01	0.371	0.482
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	OFF	4233	846.6	22.86	24.00	1.300	0.07	0.491	0.638
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6		18.00	1.000	0.12	0.546	0.546
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6		18.00	1.000	0.05	0.519	0.519
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	ON	1413	1732.6		18.00	1.000	0.07	0.071	0.071
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6		18.00	1.000	0.17	0.054	0.054
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6		18.00	1.000	0	0.880	0.880
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4		18.00	1.000	0	0.855	0.855
16	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6		18.00	1.000	0	0.905	0.905
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9538	1907.6		16.00	1.000	0.11	0.375	0.375
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9538	1907.6		16.00	1.000	0.07	0.403	0.403
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	ON	9538	1907.6		16.00	1.000	0.08	0.046	0.046
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9538	1907.6		16.00	1.000	0.09	0.039	0.039
17	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6		16.00	1.000	0	0.840	0.840
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4		16.00	1.000	-0.01	0.722	0.722
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9400	1880		16.00	1.000	0	0.768	0.768



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
18	LTE Band 12	10M	QPSK	1RB	Offset	Front	10mm	OFF	23095	707.5	22.95	24.00	1.274	0.04	0.475	0.605
	LTE Band 12	10M	QPSK	25RB	Offset	Front	10mm	OFF	23095	707.5	21.98	23.00	1.265	-0.02	0.241	0.305
	LTE Band 12	10M	QPSK	1RB	Offset	Back	10mm	OFF	23095	707.5	22.95	24.00	1.274	0.01	0.462	0.588
	LTE Band 12	10M	QPSK	25RB	Offset	Back	10mm	OFF	23095	707.5	21.98	23.00	1.265	-0.04	0.255	0.323
	LTE Band 12	10M	QPSK	1RB	Offset	Left Side	10mm	OFF	23095	707.5	22.95	24.00	1.274	-0.08	0.213	0.271
	LTE Band 12	10M	QPSK	25RB	Offset	Left Side	10mm	OFF	23095	707.5	21.98	23.00	1.265	-0.07	0.123	0.156
	LTE Band 12	10M	QPSK	1RB	Offset	Right Side	10mm	OFF	23095	707.5	22.95	24.00	1.274	-0.03	0.265	0.337
	LTE Band 12	10M	QPSK	25RB	Offset	Right Side	10mm	OFF	23095	707.5	21.98	23.00	1.265	-0.09	0.153	0.194
	LTE Band 12	10M	QPSK	1RB	Offset	Bottom Side	10mm	OFF	23095	707.5	22.95	24.00	1.274	0.03	0.286	0.364
	LTE Band 12	10M	QPSK	25RB	Offset	Bottom Side	10mm	OFF	23095	707.5	21.98	23.00	1.265	-0.11	0.129	0.163
19	LTE Band 17	10M	QPSK	1RB	Offset	Front	10mm	OFF	23780	709	22.97	24.00	1.268	0.01	0.518	0.657
	LTE Band 17	10M	QPSK	25RB	Offset	Front	10mm	OFF	23780	709	21.95	23.00	1.274	-0.06	0.255	0.325
	LTE Band 17	10M	QPSK	1RB	Offset	Back	10mm	OFF	23780	709	22.97	24.00	1.268	-0.01	0.467	0.592
	LTE Band 17	10M	QPSK	25RB	Offset	Back	10mm	OFF	23780	709	21.95	23.00	1.274	-0.08	0.264	0.336
	LTE Band 17	10M	QPSK	1RB	Offset	Left Side	10mm	OFF	23780	709	22.97	24.00	1.268	-0.08	0.232	0.294
	LTE Band 17	10M	QPSK	25RB	Offset	Left Side	10mm	OFF	23780	709	21.95	23.00	1.274	-0.04	0.132	0.168
	LTE Band 17	10M	QPSK	1RB	Offset	Right Side	10mm	OFF	23780	709	22.97	24.00	1.268	0.04	0.320	0.406
	LTE Band 17	10M	QPSK	25RB	Offset	Right Side	10mm	OFF	23780	709	21.95	23.00	1.274	-0.02	0.180	0.229
	LTE Band 17	10M	QPSK	1RB	Offset	Bottom Side	10mm	OFF	23780	709	22.97	24.00	1.268	-0.12	0.224	0.284
	LTE Band 17	10M	QPSK	25RB	Offset	Bottom Side	10mm	OFF	23780	709	21.95	23.00	1.274	-0.09	0.126	0.160
	LTE Band 5	10M	QPSK	1RB	Offset	Front	10mm	OFF	20450	829	22.49	24.00	1.416	-0.05	0.578	0.818
	LTE Band 5	10M	QPSK	1RB	Offset	Front	10mm	OFF	20525	836.5	22.44	24.00	1.432	0	0.597	0.855
20	LTE Band 5	10M	QPSK	1RB	Offset	Front	10mm	OFF	20600	844	22.39	24.00	1.449	-0.02	0.618	0.895
	LTE Band 5	10M	QPSK	25RB	Offset	Front	10mm	OFF	20525	836.5	21.50	23.00	1.413	-0.12	0.324	0.458
	LTE Band 5	10M	QPSK	50RB	Offset	Front	10mm	OFF	20450	829	21.50	23.00	1.413	-0.1	0.314	0.444
	LTE Band 5	10M	QPSK	1RB	Offset	Back	10mm	OFF	20450	829	22.49	24.00	1.416	-0.16	0.517	0.732
	LTE Band 5	10M	QPSK	25RB	Offset	Back	10mm	OFF	20525	836.5	21.50	23.00	1.413	-0.19	0.303	0.428
	LTE Band 5	10M	QPSK	1RB	Offset	Left Side	10mm	OFF	20450	829	22.49	24.00	1.416	-0.06	0.138	0.195
	LTE Band 5	10M	QPSK	25RB	Offset	Left Side	10mm	OFF	20525	836.5	21.50	23.00	1.413	-0.04	0.074	0.105
	LTE Band 5	10M	QPSK	1RB	Offset	Right Side	10mm	OFF	20450	829	22.49	24.00	1.416	-0.14	0.455	0.644
	LTE Band 5	10M	QPSK	25RB	Offset	Right Side	10mm	OFF	20525	836.5	21.50	23.00	1.413	-0.06	0.236	0.333
	LTE Band 5	10M	QPSK	1RB	Offset	Bottom Side	10mm	OFF	20450	829	22.49	24.00	1.416	-0.07	0.437	0.619
	LTE Band 5	10M	QPSK	25RB	Offset	Bottom Side	10mm	OFF	20525	836.5	21.50	23.00	1.413	0.03	0.256	0.362
	LTE Band 4	20M	QPSK	1RB	Offset	Front	10mm	ON	20300	1745		17.00	1.000	0.11	0.490	0.490
	LTE Band 4	20M	QPSK	50RB	Offset	Front	10mm	ON	20175	1732.5		17.00	1.000	0.09	0.438	0.438
	LTE Band 4	20M	QPSK	1RB	Offset	Back	10mm	ON	20300	1745		17.00	1.000	0.03	0.510	0.510
	LTE Band 4	20M	QPSK	50RB	Offset	Back	10mm	ON	20175	1732.5		17.00	1.000	0.07	0.447	0.447
	LTE Band 4	20M	QPSK	1RB	Offset	Left Side	10mm	ON	20300	1745		17.00	1.000	0.08	0.067	0.067
	LTE Band 4	20M	QPSK	50RB	Offset	Left Side	10mm	ON	20175	1732.5		17.00	1.000	-0.01	0.060	0.060
	LTE Band 4	20M	QPSK	1RB	Offset	Right Side	10mm	ON	20300	1745		17.00	1.000	0.11	0.043	0.043
	LTE Band 4	20M	QPSK	50RB	Offset	Right Side	10mm	ON	20175	1732.5		17.00	1.000	0.1	0.038	0.038
21	LTE Band 4	20M	QPSK	1RB	Offset	Bottom Side	10mm	ON	20300	1745		17.00	1.000	0.09	0.913	0.913
	LTE Band 4	20M	QPSK	1RB	Offset	Bottom Side	10mm	ON	20050	1720		17.00	1.000	0.03	0.877	0.877
	LTE Band 4	20M	QPSK	1RB	Offset	Bottom Side	10mm	ON	20175	1732.5		17.00	1.000	0.06	0.878	0.878
	LTE Band 4	20M	QPSK	50RB	Offset	Bottom Side	10mm	ON	20175	1732.5		17.00	1.000	-0.02	0.824	0.824
	LTE Band 4	20M	QPSK	50RB	Offset	Bottom Side	10mm	ON	20050	1720		17.00	1.000	0	0.805	0.805
	LTE Band 4	20M	QPSK	50RB	Offset	Bottom Side	10mm	ON	20300	1745		17.00	1.000	0.01	0.840	0.840
	LTE Band 4	20M	QPSK	100RB	Offset	Bottom Side	10mm	ON	20300	1745		17.00	1.000	0.02	0.809	0.809



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1RB	0offset	Front	10mm	ON	19100	1900		17.00	1.000	0.06	0.369	0.369
	LTE Band 2	20M	QPSK	50RB	0offset	Front	10mm	ON	19100	1900		17.00	1.000	0.08	0.340	0.340
	LTE Band 2	20M	QPSK	1RB	0offset	Back	10mm	ON	19100	1900		17.00	1.000	0.06	0.432	0.432
	LTE Band 2	20M	QPSK	50RB	0offset	Back	10mm	ON	19100	1900		17.00	1.000	0.05	0.398	0.398
	LTE Band 2	20M	QPSK	1RB	0offset	Left Side	10mm	ON	19100	1900		17.00	1.000	0.14	0.049	0.049
	LTE Band 2	20M	QPSK	50RB	0offset	Left Side	10mm	ON	19100	1900		17.00	1.000	0.14	0.046	0.046
	LTE Band 2	20M	QPSK	1RB	0offset	Right Side	10mm	ON	19100	1900		17.00	1.000	0.09	0.040	0.040
	LTE Band 2	20M	QPSK	50RB	0offset	Right Side	10mm	ON	19100	1900		17.00	1.000	0.09	0.037	0.037
22	LTE Band 2	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	19100	1900		17.00	1.000	0.03	0.866	0.866
	LTE Band 2	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	18700	1860		17.00	1.000	0.02	0.848	0.848
	LTE Band 2	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	18900	1880		17.00	1.000	-0.01	0.852	0.852
	LTE Band 2	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	19100	1900		17.00	1.000	-0.01	0.821	0.821
	LTE Band 2	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	18700	1860		17.00	1.000	0.02	0.776	0.776
	LTE Band 2	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	18900	1880		17.00	1.000	0.04	0.775	0.775
	LTE Band 2	20M	QPSK	100RB	0offset	Bottom Side	10mm	ON	19100	1900		17.00	1.000	-0.03	0.835	0.835
	LTE Band 25	20M	QPSK	1RB	0offset	Front	10mm	ON	26140	1860		17.00	1.000	0.09	0.398	0.398
	LTE Band 25	20M	QPSK	50RB	0offset	Front	10mm	ON	26140	1860		17.00	1.000	0.09	0.368	0.368
	LTE Band 25	20M	QPSK	1RB	0offset	Back	10mm	ON	26140	1860		17.00	1.000	0.02	0.436	0.436
	LTE Band 25	20M	QPSK	50RB	0offset	Back	10mm	ON	26140	1860		17.00	1.000	0.05	0.404	0.404
	LTE Band 25	20M	QPSK	1RB	0offset	Left Side	10mm	ON	26140	1860		17.00	1.000	0.16	0.060	0.060
	LTE Band 25	20M	QPSK	50RB	0offset	Left Side	10mm	ON	26140	1860		17.00	1.000	0.06	0.056	0.056
	LTE Band 25	20M	QPSK	1RB	0offset	Right Side	10mm	ON	26140	1860		17.00	1.000	0.03	0.045	0.045
	LTE Band 25	20M	QPSK	50RB	0offset	Right Side	10mm	ON	26140	1860		17.00	1.000	-0.02	0.041	0.041
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	26140	1860		17.00	1.000	0.03	0.834	0.834
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	26340	1880		17.00	1.000	-0.01	0.831	0.831
23	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	26590	1905		17.00	1.000	0.03	0.884	0.884
	LTE Band 25	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	26140	1860		17.00	1.000	0.01	0.776	0.776
	LTE Band 25	20M	QPSK	100RB	0offset	Bottom Side	10mm	ON	26140	1860		17.00	1.000	0	0.735	0.735
	LTE Band 7	20M	QPSK	1RB	0offset	Front	10mm	ON	20850	2510		18.00	1.000	-0.02	0.385	0.385
	LTE Band 7	20M	QPSK	50RB	0offset	Front	10mm	ON	20850	2510		18.00	1.000	-0.06	0.393	0.393
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10mm	ON	20850	2510		18.00	1.000	0	0.380	0.380
	LTE Band 7	20M	QPSK	50RB	0offset	Back	10mm	ON	20850	2510		18.00	1.000	-0.01	0.392	0.392
	LTE Band 7	20M	QPSK	1RB	0offset	Left Side	10mm	ON	20850	2510		18.00	1.000	-0.06	0.411	0.411
	LTE Band 7	20M	QPSK	50RB	0offset	Left Side	10mm	ON	20850	2510		18.00	1.000	0.02	0.408	0.408
	LTE Band 7	20M	QPSK	1RB	0offset	Right Side	10mm	ON	20850	2510		18.00	1.000	0.03	0.070	0.070
	LTE Band 7	20M	QPSK	50RB	0offset	Right Side	10mm	ON	20850	2510		18.00	1.000	0.01	0.071	0.071
24	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	20850	2510		18.00	1.000	0	0.858	0.858
	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	21100	2535		18.00	1.000	-0.07	0.784	0.784
	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	ON	21350	2560		18.00	1.000	-0.07	0.746	0.746
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	20850	2510		18.00	1.000	-0.06	0.836	0.836
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	21100	2535		18.00	1.000	-0.02	0.751	0.751
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom Side	10mm	ON	21350	2560		18.00	1.000	0	0.734	0.734
	LTE Band 7	20M	QPSK	100RB	0offset	Bottom Side	10mm	ON	20850	2510		18.00	1.000	-0.03	0.799	0.799



14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	GSM850	GPRS (4 Tx slots)	Front	15mm	non-Trigger	251	848.8	26.03	28.00	1.574	-0.07	0.313	0.493
	GSM850	GPRS (4 Tx slots)	Front	15mm	Trigger	231	844.8	26.30	28.00	1.479	-0.1	0.330	0.488
	GSM850	GPRS (4 Tx slots)	Back	15mm	non-Trigger	251	848.8	26.03	28.00	1.574	-0.11	0.276	0.434
	GSM1900	GPRS (4 Tx slots)	Front	15mm	non-Trigger	810	1909.8	23.30	25.00	1.479	-0.04	0.359	0.531
26	GSM1900	GPRS (4 Tx slots)	Back	15mm	non-Trigger	810	1909.8	23.30	25.00	1.479	-0.04	0.406	0.601

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	15mm	non-Trigger	4233	846.6	22.86	24.00	1.300	-0.01	0.362	0.471
27	WCDMA V	RMC 12.2Kbps	Back	15mm	non-Trigger	4233	846.6	22.86	24.00	1.300	0.01	0.368	0.478
	WCDMA V	RMC 12.2Kbps	Back	15mm	Trigger	4217	843.4	22.80	24.00	1.318	-0.07	0.213	0.281
	WCDMA IV	RMC 12.2Kbps	Front	15mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	-0.04	0.598	0.749
	WCDMA IV	RMC 12.2Kbps	Back	15mm	non-Trigger	1413	1732.6	23.02	24.00	1.253	-0.01	0.668	0.837
28	WCDMA IV	RMC 12.2Kbps	Back	15mm	non-Trigger	1312	1712.4	22.94	24.00	1.276	-0.04	0.783	0.999
	WCDMA IV	RMC 12.2Kbps	Back	15mm	non-Trigger	1513	1752.6	23.00	24.00	1.259	-0.01	0.769	0.968
	WCDMA II	RMC 12.2Kbps	Front	15mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	-0.11	0.764	0.875
	WCDMA II	RMC 12.2Kbps	Front	15mm	non-Trigger	9262	1852.4	23.11	24.00	1.227	-0.03	0.567	0.696
	WCDMA II	RMC 12.2Kbps	Front	15mm	non-Trigger	9400	1880	23.33	24.00	1.167	-0.06	0.549	0.641
29	WCDMA II	RMC 12.2Kbps	Back	15mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0	1.010	1.157
	WCDMA II	RMC 12.2Kbps	Back	15mm	non-Trigger	9262	1852.4	23.11	24.00	1.227	0.05	0.881	1.081
	WCDMA II	RMC 12.2Kbps	Back	15mm	non-Trigger	9400	1880	23.33	24.00	1.167	0.01	0.743	0.867

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
30	LTE Band 12	10M	QPSK	1RB	0offset	Front	15mm	non-Trigger	23095	707.5	22.95	24.00	1.274	-0.05	0.328	0.418
	LTE Band 12	10M	QPSK	1RB	0offset	Front	15mm	Trigger	23095	707.5	22.95	24.00	1.274	-0.02	0.186	0.237
	LTE Band 12	10M	QPSK	25RB	0offset	Front	15mm	non-Trigger	23095	707.5	21.98	23.00	1.265	-0.08	0.187	0.237
	LTE Band 12	10M	QPSK	1RB	0offset	Back	15mm	non-Trigger	23095	707.5	22.95	24.00	1.274	-0.07	0.322	0.410
	LTE Band 12	10M	QPSK	25RB	0offset	Back	15mm	non-Trigger	23095	707.5	21.98	23.00	1.265	-0.05	0.184	0.233
31	LTE Band 17	10M	QPSK	1RB	0offset	Front	15mm	non-Trigger	23780	709	22.97	24.00	1.268	-0.07	0.344	0.436
	LTE Band 17	10M	QPSK	1RB	0offset	Front	15mm	Trigger	23780	709	22.97	24.00	1.268	-0.02	0.192	0.243
	LTE Band 17	10M	QPSK	25RB	0offset	Front	15mm	non-Trigger	23780	709	21.95	23.00	1.274	-0.04	0.195	0.248
	LTE Band 17	10M	QPSK	1RB	0offset	Back	15mm	non-Trigger	23780	709	22.97	24.00	1.268	0.02	0.337	0.427
	LTE Band 17	10M	QPSK	25RB	0offset	Back	15mm	non-Trigger	23780	709	21.95	23.00	1.274	-0.06	0.197	0.251
32	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.07	0.404	0.572
	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm	Trigger	20475	831.5	22.82	24.00	1.312	-0.02	0.294	0.386
	LTE Band 5	10M	QPSK	25RB	0offset	Front	15mm	non-Trigger	20525	836.5	21.50	23.00	1.413	-0.04	0.231	0.326
	LTE Band 5	10M	QPSK	1RB	0offset	Back	15mm	non-Trigger	20450	829	22.49	24.00	1.416	-0.03	0.390	0.552
	LTE Band 5	10M	QPSK	25RB	0offset	Back	15mm	non-Trigger	20525	836.5	21.50	23.00	1.413	-0.04	0.216	0.305
	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm	Trigger	20475	831.5	22.82	24.00	1.312	-0.02	0.294	0.386



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	20300	1745	22.69	24.00	1.352	-0.03	0.812	1.098
	LTE Band 4	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	20050	1720	22.56	24.00	1.393	-0.02	0.764	1.064
	LTE Band 4	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	20175	1732.5	22.60	24.00	1.380	-0.07	0.783	1.081
	LTE Band 4	20M	QPSK	50RB	0offset	Front	15mm	-	non-Trigger	20175	1732.5	21.80	23.00	1.318	0.08	0.467	0.616
	LTE Band 4	20M	QPSK	100RB	0offset	Front	15mm	-	non-Trigger	20300	1745	21.62	23.00	1.374	0.04	0.465	0.639
33	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	20300	1745	22.69	24.00	1.352	0.04	0.974	1.317
	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	20050	1720	22.56	24.00	1.393	0	0.914	1.273
	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	20175	1732.5	22.60	24.00	1.380	-0.14	0.934	1.289
	LTE Band 4	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	20175	1732.5	21.80	23.00	1.318	-0.1	0.549	0.724
	LTE Band 4	20M	QPSK	100RB	0offset	Back	15mm	-	non-Trigger	20300	1745	21.62	23.00	1.374	0.04	0.535	0.735
	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	20300	1745	22.69	24.00	1.352	0	0.972	1.314
	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	20050	1720	22.56	24.00	1.393	0	0.930	1.296
	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	20175	1732.5	22.60	24.00	1.380	-0.13	0.935	1.291
	LTE Band 2	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	19100	1900	22.55	24.00	1.396	-0.14	0.618	0.863
	LTE Band 2	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	18700	1860	22.50	24.00	1.413	-0.02	0.669	0.945
	LTE Band 2	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	18900	1880	22.51	24.00	1.409	-0.03	0.644	0.908
	LTE Band 2	20M	QPSK	50RB	0offset	Front	15mm	-	non-Trigger	19100	1900	21.43	23.00	1.435	0.03	0.462	0.663
	LTE Band 2	20M	QPSK	100RB	0offset	Front	15mm	-	non-Trigger	19100	1900	21.51	23.00	1.409	-0.04	0.474	0.668
	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	19100	1900	22.55	24.00	1.396	0.02	0.841	1.174
	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	18700	1860	22.50	24.00	1.413	-0.11	0.894	1.263
	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	18900	1880	22.51	24.00	1.409	-0.03	0.865	1.219
	LTE Band 2	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	19100	1900	21.43	23.00	1.435	-0.02	0.633	0.909
	LTE Band 2	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	18700	1860	21.33	23.00	1.469	-0.01	0.641	0.942
	LTE Band 2	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	18900	1880	21.42	23.00	1.439	-0.01	0.629	0.905
	LTE Band 2	20M	QPSK	100RB	0offset	Back	15mm	-	non-Trigger	19100	1900	21.51	23.00	1.409	-0.02	0.626	0.882
34	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	18700	1860	22.50	24.00	1.413	-0.03	0.943	1.332
	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	18900	1880	22.51	24.00	1.409	-0.04	0.938	1.322
	LTE Band 2	20M	QPSK	1RB	0offset	Back	15mm	Headset	non-Trigger	19100	1900	22.55	24.00	1.396	-0.03	0.897	1.253
	LTE Band 25	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	26140	1860	22.81	24.00	1.315	-0.14	0.707	0.930
	LTE Band 25	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	26340	1880	22.80	24.00	1.318	-0.07	0.680	0.896
	LTE Band 25	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	26590	1905	22.75	24.00	1.334	-0.05	0.683	0.911
	LTE Band 25	20M	QPSK	50RB	0offset	Front	15mm	-	non-Trigger	26140	1860	21.70	23.00	1.349	-0.04	0.515	0.695
	LTE Band 25	20M	QPSK	100RB	0offset	Front	15mm	-	non-Trigger	26140	1860	21.57	23.00	1.390	-0.16	0.542	0.753
35	LTE Band 25	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	26140	1860	22.81	24.00	1.315	-0.04	0.906	1.192
	LTE Band 25	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	26340	1880	22.80	24.00	1.318	-0.05	0.888	1.171
	LTE Band 25	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	26590	1905	22.75	24.00	1.334	0	0.806	1.075
	LTE Band 25	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	26140	1860	21.70	23.00	1.349	-0.03	0.606	0.817
	LTE Band 25	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	26340	1880	21.65	23.00	1.365	0.01	0.570	0.778
	LTE Band 25	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	26590	1905	21.66	23.00	1.361	-0.01	0.591	0.805
	LTE Band 25	20M	QPSK	100RB	0offset	Back	15mm	-	non-Trigger	26140	1860	21.57	23.00	1.390	-0.08	0.576	0.801
	LTE Band 7	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	20850	2510	22.62	24.00	1.374	-0.03	0.585	0.804
	LTE Band 7	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	21100	2535	22.38	24.00	1.452	-0.02	0.517	0.751
	LTE Band 7	20M	QPSK	1RB	0offset	Front	15mm	-	non-Trigger	21350	2560	22.42	24.00	1.439	-0.04	0.476	0.685
	LTE Band 7	20M	QPSK	50RB	0offset	Front	15mm	-	non-Trigger	20850	2510	21.67	23.00	1.358	0	0.401	0.545
	LTE Band 7	20M	QPSK	100RB	0offset	Front	15mm	-	non-Trigger	20850	2510	21.54	23.00	1.400	-0.01	0.383	0.536
36	LTE Band 7	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	20850	2510	22.62	24.00	1.374	-0.03	0.633	0.870
	LTE Band 7	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	21100	2535	22.38	24.00	1.452	-0.04	0.581	0.844
	LTE Band 7	20M	QPSK	1RB	0offset	Back	15mm	-	non-Trigger	21350	2560	22.42	24.00	1.439	-0.05	0.529	0.761
	LTE Band 7	20M	QPSK	50RB	0offset	Back	15mm	-	non-Trigger	20850	2510	21.67	23.00	1.358	-0.02	0.400	0.543
	LTE Band 7	20M	QPSK	100RB	0offset	Back	15mm	-	non-Trigger	20850	2510	21.54	23.00	1.400	-0.03	0.391	0.547



14.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna Tuner	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Back	15mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0	1.010	-	1.157
2nd	WCDMA II	RMC 12.2Kbps	Back	15mm	non-Trigger	9538	1907.6	23.41	24.00	1.146	0.01	0.947	1.07	1.085

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna Tuner	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	non-Trigger	-	20300	1745	22.69	24.00	1.352	0.04	0.974	-	1.317
2nd	LTE Band 4	20M	QPSK	1RB	0offset	Back	15mm	non-Trigger	-	20300	1745	22.69	24.00	1.352	0.04	0.960	1.01	1.298
1st	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	non-Trigger	ON	20850	2510		18.00	1.000	0	0.858	-	0.858
2nd	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	10mm	non-Trigger	ON	20850	2510		18.00	1.000	-0.01	0.841	1.02	0.841

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Wireless Router	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	LTE(Voice) + WLAN2.4GHz(data)	Yes	Yes		
4.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
5.	WCDMA(Voice) + Bluetooth(data)	Yes	Yes		
6.	LTE(Voice) + Bluetooth(data)	Yes	Yes		
7.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
8.	WCDMA(Voice) + WLAN5GHz(data)	Yes	Yes		
9.	LTE(Voice) + WLAN5GHz(data)	Yes	Yes		
10.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
11.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
12.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
13.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
14.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
15.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
16.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes	Yes	Yes	5GHz Hotspot
17.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	5GHz Hotspot
18.	LTE(data) + WLAN5GHz(data)	Yes	Yes	Yes	5GHz Hotspot

General Note:

1. The WLAN and Bluetooth conducted power and SAR testing results were referred to Sporton FCC SAR Test Report, Brand Name: Motorola, Model Name: 4036, FCC ID: IHDT56UA1, Report No: FA552083A or Appendix D and also used perform transmission simultaneous analysis.
2. This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client).
3. The worst WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WiFi Direct and Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.4



15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.368	0.593	0.573	0.96	0.94	
		Right Tilted	0.175	0.346	0.519	0.52	0.69	
		Left Cheek	0.283	0.188	1.126	0.47	1.41	
		Left Tilted	0.181	0.183	0.796	0.36	0.98	
	GSM1900	Right Cheek	0.072	0.593	0.573	0.67	0.65	
		Right Tilted	0.052	0.346	0.519	0.40	0.57	
		Left Cheek	0.096	0.188	1.126	0.28	1.22	
		Left Tilted	0.043	0.183	0.796	0.23	0.84	
WCDMA	WCDMA V	Right Cheek	0.341	0.593	0.573	0.93	0.91	
		Right Tilted	0.170	0.346	0.519	0.52	0.69	
		Left Cheek	0.251	0.188	1.126	0.44	1.38	
		Left Tilted	0.165	0.183	0.796	0.35	0.96	
	WCDMA IV	Right Cheek	0.143	0.593	0.573	0.74	0.72	
		Right Tilted	0.075	0.346	0.519	0.42	0.59	
		Left Cheek	0.223	0.188	1.126	0.41	1.35	
		Left Tilted	0.085	0.183	0.796	0.27	0.88	
	WCDMA II	Right Cheek	0.129	0.593	0.573	0.72	0.70	
		Right Tilted	0.119	0.346	0.519	0.47	0.64	
		Left Cheek	0.187	0.188	1.126	0.38	1.31	
		Left Tilted	0.070	0.183	0.796	0.25	0.87	
LTE	LTE Band 12	Right Cheek	0.256	0.593	0.573	0.85	0.83	
		Right Tilted	0.153	0.346	0.519	0.50	0.67	
		Left Cheek	0.234	0.188	1.126	0.42	1.36	
		Left Tilted	0.157	0.183	0.796	0.34	0.95	
	LTE Band 17	Right Cheek	0.251	0.593	0.573	0.84	0.82	
		Right Tilted	0.147	0.346	0.519	0.49	0.67	
		Left Cheek	0.231	0.188	1.126	0.42	1.36	
		Left Tilted	0.152	0.183	0.796	0.34	0.95	
	LTE Band 5	Right Cheek	0.396	0.593	0.573	0.99	0.97	
		Right Tilted	0.231	0.346	0.519	0.58	0.75	
		Left Cheek	0.337	0.188	1.126	0.53	1.46	
		Left Tilted	0.234	0.183	0.796	0.42	1.03	
	LTE Band 4	Right Cheek	0.206	0.593	0.573	0.80	0.78	
		Right Tilted	0.118	0.346	0.519	0.46	0.64	
		Left Cheek	0.274	0.188	1.126	0.46	1.40	
		Left Tilted	0.124	0.183	0.796	0.31	0.92	
	LTE Band 2	Right Cheek	0.159	0.593	0.573	0.75	0.73	
		Right Tilted	0.126	0.346	0.519	0.47	0.65	
		Left Cheek	0.215	0.188	1.126	0.40	1.34	
		Left Tilted	0.070	0.183	0.796	0.25	0.87	
	LTE Band 25	Right Cheek	0.179	0.593	0.573	0.77	0.75	
		Right Tilted	0.100	0.346	0.519	0.45	0.62	
		Left Cheek	0.234	0.188	1.126	0.42	1.36	
		Left Tilted	0.091	0.183	0.796	0.27	0.89	
LTE Band 7	Right Cheek	0.198	0.593	0.573	0.79	0.77		
	Right Tilted	0.113	0.346	0.519	0.46	0.63		
	Left Cheek	0.125	0.188	1.126	0.31	1.25		
	Left Tilted	0.095	0.183	0.796	0.28	0.89		



WWAN Band		Exposure Position	1	5	1+5 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN ANT 1			
			1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.368	1.376	1.74	0.03	Case 1
		Right Tilted	0.175	0.835	1.01		
		Left Cheek	0.283	0.702	0.99		
		Left Tilted	0.181	0.670	0.85		
	GSM1900	Right Cheek	0.072	1.376	1.45		
		Right Tilted	0.052	0.835	0.89		
		Left Cheek	0.096	0.702	0.80		
		Left Tilted	0.043	0.670	0.71		
WCDMA	WCDMA V	Right Cheek	0.341	1.376	1.72	0.03	Case 2
		Right Tilted	0.170	0.835	1.01		
		Left Cheek	0.251	0.702	0.95		
		Left Tilted	0.165	0.670	0.84		
	WCDMA IV	Right Cheek	0.143	1.376	1.52		
		Right Tilted	0.075	0.835	0.91		
		Left Cheek	0.223	0.702	0.93		
		Left Tilted	0.085	0.670	0.76		
	WCDMA II	Right Cheek	0.129	1.376	1.51		
		Right Tilted	0.119	0.835	0.95		
		Left Cheek	0.187	0.702	0.89		
		Left Tilted	0.070	0.670	0.74		
LTE	LTE Band 12	Right Cheek	0.256	1.376	1.63	0.03	Case 3
		Right Tilted	0.153	0.835	0.99		
		Left Cheek	0.234	0.702	0.94		
		Left Tilted	0.157	0.670	0.83		
	LTE Band 17	Right Cheek	0.251	1.376	1.63	0.03	Case 4
		Right Tilted	0.147	0.835	0.98		
		Left Cheek	0.231	0.702	0.93		
		Left Tilted	0.152	0.670	0.82		
	LTE Band 5	Right Cheek	0.396	1.376	1.77	0.03	Case 5
		Right Tilted	0.231	0.835	1.07		
		Left Cheek	0.337	0.702	1.04		
		Left Tilted	0.234	0.670	0.90		
	LTE Band 4	Right Cheek	0.206	1.376	1.58		
		Right Tilted	0.118	0.835	0.95		
		Left Cheek	0.274	0.702	0.98		
		Left Tilted	0.124	0.670	0.79		
	LTE Band 2	Right Cheek	0.159	1.376	1.54		
		Right Tilted	0.126	0.835	0.96		
		Left Cheek	0.215	0.702	0.92		
		Left Tilted	0.070	0.670	0.74		
	LTE Band 25	Right Cheek	0.179	1.376	1.56		
		Right Tilted	0.100	0.835	0.94		
		Left Cheek	0.234	0.702	0.94		
		Left Tilted	0.091	0.670	0.76		
LTE Band 7	Right Cheek	0.198	1.376	1.57			
	Right Tilted	0.113	0.835	0.95			
	Left Cheek	0.125	0.702	0.83			
	Left Tilted	0.095	0.670	0.77			



WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN ANT 2			
			1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.368	0.717	1.09		
		Right Tilted	0.175	0.196	0.37		
		Left Cheek	0.283	1.358	1.64	0.04	Case 6
		Left Tilted	0.181	0.610	0.79		
	GSM1900	Right Cheek	0.072	0.717	0.79		
		Right Tilted	0.052	0.196	0.25		
		Left Cheek	0.096	1.358	1.45		
		Left Tilted	0.043	0.610	0.65		
WCDMA	WCDMA V	Right Cheek	0.341	0.717	1.06		
		Right Tilted	0.170	0.196	0.37		
		Left Cheek	0.251	1.358	1.61	0.04	Case 7
		Left Tilted	0.165	0.610	0.78		
	WCDMA IV	Right Cheek	0.143	0.717	0.86		
		Right Tilted	0.075	0.196	0.27		
		Left Cheek	0.223	1.358	1.58		
		Left Tilted	0.085	0.610	0.70		
	WCDMA II	Right Cheek	0.129	0.717	0.85		
		Right Tilted	0.119	0.196	0.32		
		Left Cheek	0.187	1.358	1.55		
		Left Tilted	0.070	0.610	0.68		
LTE	LTE Band 12	Right Cheek	0.256	0.717	0.97		
		Right Tilted	0.153	0.196	0.35		
		Left Cheek	0.234	1.358	1.59		
		Left Tilted	0.157	0.610	0.77		
	LTE Band 17	Right Cheek	0.251	0.717	0.97		
		Right Tilted	0.147	0.196	0.34		
		Left Cheek	0.231	1.358	1.59		
		Left Tilted	0.152	0.610	0.76		
	LTE Band 5	Right Cheek	0.396	0.717	1.11		
		Right Tilted	0.231	0.196	0.43		
		Left Cheek	0.337	1.358	1.70	0.04	Case 8
		Left Tilted	0.234	0.610	0.84		
	LTE Band 4	Right Cheek	0.206	0.717	0.92		
		Right Tilted	0.118	0.196	0.31		
		Left Cheek	0.274	1.358	1.63	0.02	Case 9
		Left Tilted	0.124	0.610	0.73		
	LTE Band 2	Right Cheek	0.159	0.717	0.88		
		Right Tilted	0.126	0.196	0.32		
		Left Cheek	0.215	1.358	1.57		
		Left Tilted	0.070	0.610	0.68		
	LTE Band 25	Right Cheek	0.179	0.717	0.90		
		Right Tilted	0.100	0.196	0.30		
		Left Cheek	0.234	1.358	1.59		
		Left Tilted	0.091	0.610	0.70		
	LTE Band 7	Right Cheek	0.198	0.717	0.92		
		Right Tilted	0.113	0.196	0.31		
		Left Cheek	0.125	1.358	1.48		
		Left Tilted	0.095	0.610	0.71		



WWAN Band		Exposure Position	1	4	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz Bluetooth 1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.368	0.079	0.45		
		Right Tilted	0.175	0.046	0.22		
		Left Cheek	0.283	0.025	0.31		
		Left Tilted	0.181	0.021	0.20		
	GSM1900	Right Cheek	0.072	0.079	0.15		
		Right Tilted	0.052	0.046	0.10		
		Left Cheek	0.096	0.025	0.12		
		Left Tilted	0.043	0.021	0.06		
WCDMA	WCDMA V	Right Cheek	0.341	0.079	0.42		
		Right Tilted	0.170	0.046	0.22		
		Left Cheek	0.251	0.025	0.28		
		Left Tilted	0.165	0.021	0.19		
	WCDMA IV	Right Cheek	0.143	0.079	0.22		
		Right Tilted	0.075	0.046	0.12		
		Left Cheek	0.223	0.025	0.25		
		Left Tilted	0.085	0.021	0.11		
	WCDMA II	Right Cheek	0.129	0.079	0.21		
		Right Tilted	0.119	0.046	0.17		
		Left Cheek	0.187	0.025	0.21		
		Left Tilted	0.070	0.021	0.09		
LTE	LTE Band 12	Right Cheek	0.256	0.079	0.34		
		Right Tilted	0.153	0.046	0.20		
		Left Cheek	0.234	0.025	0.26		
		Left Tilted	0.157	0.021	0.18		
	LTE Band 17	Right Cheek	0.251	0.079	0.33		
		Right Tilted	0.147	0.046	0.19		
		Left Cheek	0.231	0.025	0.26		
		Left Tilted	0.152	0.021	0.17		
	LTE Band 5	Right Cheek	0.396	0.079	0.48		
		Right Tilted	0.231	0.046	0.28		
		Left Cheek	0.337	0.025	0.36		
		Left Tilted	0.234	0.021	0.26		
	LTE Band 4	Right Cheek	0.206	0.079	0.29		
		Right Tilted	0.118	0.046	0.16		
		Left Cheek	0.274	0.025	0.30		
		Left Tilted	0.124	0.021	0.15		
	LTE Band 2	Right Cheek	0.159	0.079	0.24		
		Right Tilted	0.126	0.046	0.17		
		Left Cheek	0.215	0.025	0.24		
		Left Tilted	0.070	0.021	0.09		
	LTE Band 25	Right Cheek	0.179	0.079	0.26		
		Right Tilted	0.100	0.046	0.15		
		Left Cheek	0.234	0.025	0.26		
		Left Tilted	0.091	0.021	0.11		
	LTE Band 7	Right Cheek	0.198	0.079	0.28		
		Right Tilted	0.113	0.046	0.16		
		Left Cheek	0.125	0.025	0.15		
		Left Tilted	0.095	0.021	0.12		

Exposure Position	2	3	5	6	2+3 Summed 1g SAR (W/kg)	5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
	2.4GHz WLAN ANT 1 1g SAR (W/kg)	2.4GHz WLAN ANT 2 1g SAR (W/kg)	5GHz WLAN ANT 1 1g SAR (W/kg)	5GHz WLAN ANT 2 1g SAR (W/kg)				
Right Cheek	0.593	0.573	1.376	0.717	1.17	2.09	0.040	Case 10
Right Tilted	0.346	0.519	0.835	0.196	0.87	1.03		
Left Cheek	0.188	1.126	0.702	1.358	1.31	2.06	0.040	Case 11
Left Tilted	0.183	0.796	0.670	0.610	0.98	1.28		



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	2.4GHz Bluetooth	5GHz WLAN ANT 1	5GHz WLAN ANT 2			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.859	0.095	0.196	0.012	0.220	0.236	1.15	0.87	1.32
		Back	0.752	0.122	0.227	0.011	0.143	0.094	1.10	0.76	0.99
		Left side	0.109	0.062	0.010	0.004	0.053	0.001	0.18	0.11	0.16
		Right side	0.601	0.006	0.102	0.001	0.006	0.101	0.71	0.60	0.71
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.556						0.56	0.56	0.56
	GSM1900	Front	0.325	0.095	0.196	0.012	0.220	0.236	0.62	0.34	0.78
		Back	0.327	0.122	0.227	0.011	0.143	0.094	0.68	0.34	0.56
		Left side	0.040	0.062	0.010	0.004	0.053	0.001	0.11	0.04	0.09
		Right side	0.033	0.006	0.102	0.001	0.006	0.101	0.14	0.03	0.14
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.842						0.84	0.84	0.84
WCDMA	WCDMA V	Front	0.792	0.095	0.196	0.012	0.220	0.236	1.08	0.80	1.25
		Back	0.716	0.122	0.227	0.011	0.143	0.094	1.07	0.73	0.95
		Left side	0.112	0.062	0.010	0.004	0.053	0.001	0.18	0.12	0.17
		Right side	0.482	0.006	0.102	0.001	0.006	0.101	0.59	0.48	0.59
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.638						0.64	0.64	0.64
	WCDMA IV	Front	0.546	0.095	0.196	0.012	0.220	0.236	0.84	0.56	1.00
		Back	0.519	0.122	0.227	0.011	0.143	0.094	0.87	0.53	0.76
		Left side	0.071	0.062	0.010	0.004	0.053	0.001	0.14	0.08	0.13
		Right side	0.054	0.006	0.102	0.001	0.006	0.101	0.16	0.06	0.16
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.905						0.91	0.91	0.91
	WCDMA II	Front	0.375	0.095	0.196	0.012	0.220	0.236	0.67	0.39	0.83
		Back	0.403	0.122	0.227	0.011	0.143	0.094	0.75	0.41	0.64
		Left side	0.046	0.062	0.010	0.004	0.053	0.001	0.12	0.05	0.10
		Right side	0.039	0.006	0.102	0.001	0.006	0.101	0.15	0.04	0.15
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.840						0.84	0.84	0.84



WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	2.4GHz Bluetooth	5GHz WLAN ANT 1	5GHz WLAN ANT 2				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE	LTE Band 12	Front	0.605	0.095	0.196	0.012	0.220	0.236	0.90	0.62	1.06
		Back	0.588	0.122	0.227	0.011	0.143	0.094	0.94	0.60	0.83
		Left side	0.271	0.062	0.010	0.004	0.053	0.001	0.34	0.28	0.33
		Right side	0.337	0.006	0.102	0.001	0.006	0.101	0.45	0.34	0.44
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.364						0.36	0.36	0.36
	LTE Band 17	Front	0.657	0.095	0.196	0.012	0.220	0.236	0.95	0.67	1.11
		Back	0.592	0.122	0.227	0.011	0.143	0.094	0.94	0.60	0.83
		Left side	0.294	0.062	0.010	0.004	0.053	0.001	0.37	0.30	0.35
		Right side	0.406	0.006	0.102	0.001	0.006	0.101	0.51	0.41	0.51
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.284						0.28	0.28	0.28
	LTE Band 5	Front	0.895	0.095	0.196	0.012	0.220	0.236	1.19	0.91	1.35
		Back	0.732	0.122	0.227	0.011	0.143	0.094	1.08	0.74	0.97
		Left side	0.195	0.062	0.010	0.004	0.053	0.001	0.27	0.20	0.25
		Right side	0.644	0.006	0.102	0.001	0.006	0.101	0.75	0.65	0.75
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.619						0.62	0.62	0.62
	LTE Band 4	Front	0.490	0.095	0.196	0.012	0.220	0.236	0.78	0.50	0.95
		Back	0.510	0.122	0.227	0.011	0.143	0.094	0.86	0.52	0.75
		Left side	0.067	0.062	0.010	0.004	0.053	0.001	0.14	0.07	0.12
		Right side	0.043	0.006	0.102	0.001	0.006	0.101	0.15	0.04	0.15
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.913						0.91	0.91	0.91
	LTE Band 2	Front	0.369	0.095	0.196	0.012	0.220	0.236	0.66	0.38	0.83
		Back	0.432	0.122	0.227	0.011	0.143	0.094	0.78	0.44	0.67
		Left side	0.049	0.062	0.010	0.004	0.053	0.001	0.12	0.05	0.10
		Right side	0.040	0.006	0.102	0.001	0.006	0.101	0.15	0.04	0.15
		Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16
		Bottom side	0.866						0.87	0.87	0.87
LTE Band 25	Front	0.398	0.095	0.196	0.012	0.220	0.236	0.69	0.41	0.85	
	Back	0.436	0.122	0.227	0.011	0.143	0.094	0.79	0.45	0.67	
	Left side	0.060	0.062	0.010	0.004	0.053	0.001	0.13	0.06	0.11	
	Right side	0.045	0.006	0.102	0.001	0.006	0.101	0.15	0.05	0.15	
	Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16	
	Bottom side	0.884						0.88	0.88	0.88	
LTE Band 7	Front	0.393	0.095	0.196	0.012	0.220	0.236	0.68	0.41	0.85	
	Back	0.392	0.122	0.227	0.011	0.143	0.094	0.74	0.40	0.63	
	Left side	0.411	0.062	0.010	0.004	0.053	0.001	0.48	0.42	0.47	
	Right side	0.071	0.006	0.102	0.001	0.006	0.101	0.18	0.07	0.18	
	Top side		0.137	0.202	0.014	0.063	0.100	0.34	0.01	0.16	
	Bottom side	0.858						0.86	0.86	0.86	



15.3 Body-Worn Accessory Exposure Conditions


WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN ANT 1 1g SAR (W/kg)	2.4GHz WLAN ANT 2 1g SAR (W/kg)	2.4GHz Bluetooth 1g SAR (W/kg)	5GHz WLAN ANT 1 1g SAR (W/kg)	5GHz WLAN ANT 2 1g SAR (W/kg)			
GSM	GSM850	Front	0.493	0.050	0.100	0.001	0.172	0.166	0.64	0.49	0.83
		Back	0.434	0.062	0.119	0.006	0.097	0.075	0.62	0.44	0.61
	GSM1900	Front	0.531	0.050	0.100	0.001	0.172	0.166	0.68	0.53	0.87
		Back	0.601	0.062	0.119	0.006	0.097	0.075	0.78	0.61	0.77
WCDMA	WCDMA V	Front	0.471	0.050	0.100	0.001	0.172	0.166	0.62	0.47	0.81
		Back	0.478	0.062	0.119	0.006	0.097	0.075	0.66	0.48	0.65
	WCDMA IV	Front	0.749	0.050	0.100	0.001	0.172	0.166	0.90	0.75	1.09
		Back	0.999	0.062	0.119	0.006	0.097	0.075	1.18	1.01	1.17
	WCDMA II	Front	0.875	0.050	0.100	0.001	0.172	0.166	1.03	0.88	1.21
		Back	1.157	0.062	0.119	0.006	0.097	0.075	1.34	1.16	1.33
LTE	LTE Band 12	Front	0.418	0.050	0.100	0.001	0.172	0.166	0.57	0.42	0.76
		Back	0.410	0.062	0.119	0.006	0.097	0.075	0.59	0.42	0.58
	LTE Band 17	Front	0.436	0.050	0.100	0.001	0.172	0.166	0.59	0.44	0.77
		Back	0.427	0.062	0.119	0.006	0.097	0.075	0.61	0.43	0.60
	LTE Band 5	Front	0.572	0.050	0.100	0.001	0.172	0.166	0.72	0.57	0.91
		Back	0.552	0.062	0.119	0.006	0.097	0.075	0.73	0.56	0.72
	LTE Band 4	Front	1.098	0.050	0.100	0.001	0.172	0.166	1.25	1.10	1.44
		Back	1.317	0.062	0.119	0.006	0.097	0.075	1.50	1.32	1.49
		Back with Headset	1.314	0.062	0.119	0.006	0.097	0.075	1.50	1.32	1.49
	LTE Band 2	Front	0.945	0.050	0.100	0.001	0.172	0.166	1.10	0.95	1.28
		Back	1.263	0.062	0.119	0.006	0.097	0.075	1.44	1.27	1.44
		Back with Headset	1.332	0.062	0.119	0.006	0.097	0.075	1.51	1.34	1.50
	LTE Band 25	Front	0.930	0.050	0.100	0.001	0.172	0.166	1.08	0.93	1.27
		Back	1.192	0.062	0.119	0.006	0.097	0.075	1.37	1.20	1.36
	LTE Band 7	Front	0.804	0.050	0.100	0.001	0.172	0.166	0.95	0.81	1.14
		Back	0.870	0.062	0.119	0.006	0.097	0.075	1.05	0.88	1.04

15.4 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				X	Y	Z				
	GSM850	Right Cheek	0.368	0mm	0.0642	-0.252	-0.175	86.2	1.74	0.03	Not required
	5GHz ANT 1		1.376	0mm	0.0348	-0.333	-0.174				

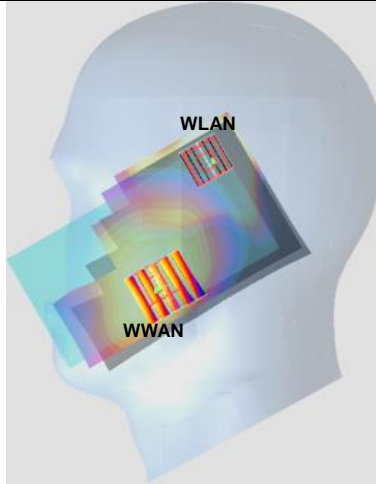


Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WCDMA V	Right Cheek	0.341	0mm	0.0641	-0.252	-0.175	86.1	1.72	0.03	Not required
	5GHz ANT 1		1.376	0mm	0.0348	-0.333	-0.174				

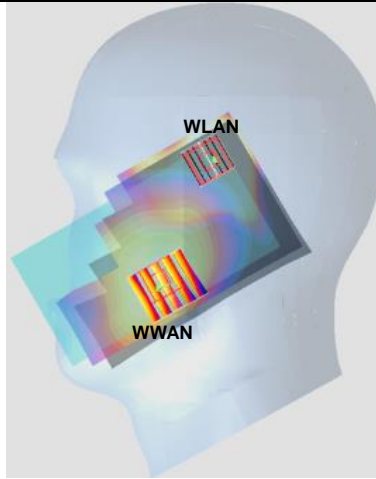


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 12				X	Y	Z				
	5GHz ANT 1	Right Cheek	0.256	0mm	0.0693	-0.261	-0.175	79.8	1.63	0.03	Not required
			1.376	0mm	0.0348	-0.333	-0.174				

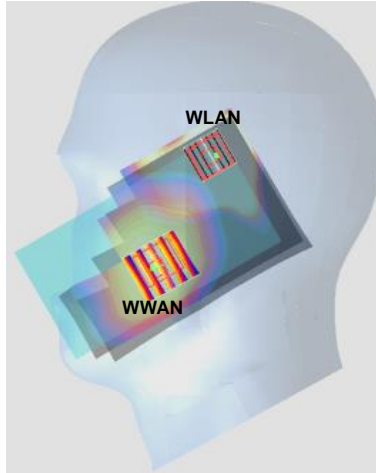


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE 17				X	Y	Z				
	5GHz ANT 1	Right Cheek	0.251	0mm	0.0693	-0.261	-0.175	79.8	1.63	0.03	Not required
			1.376	0mm	0.0348	-0.333	-0.174				

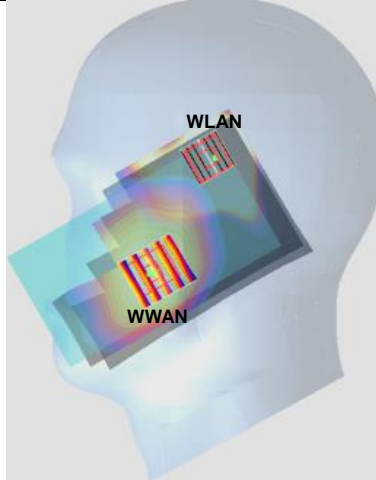


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 5	Right Cheek	0.396	0mm	0.0681	-0.259	-0.175	81.2	1.77	0.03	Not required
	5GHz ANT 1		1.376	0mm	0.0348	-0.333	-0.174				

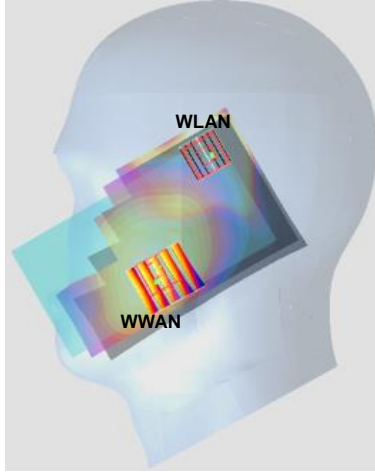


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Left Cheek	0.283	0mm	0.0697	0.289	-0.174	54.4	1.64	0.04	Not required
	5GHz ANT 2		1.358	0mm	0.0318	0.328	-0.173				

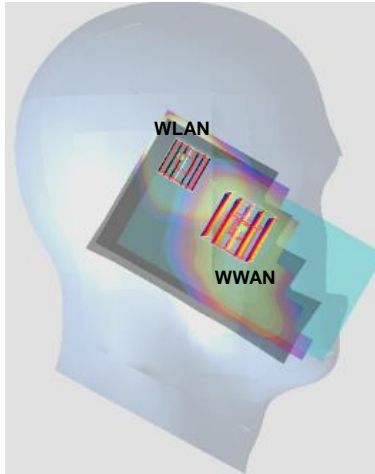


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Left Cheek	0.251	0mm	0.0678	0.292	-0.174	50.9	1.61	0.04	Not required
	5GHz ANT 2		1.358	0mm	0.0318	0.328	-0.173				

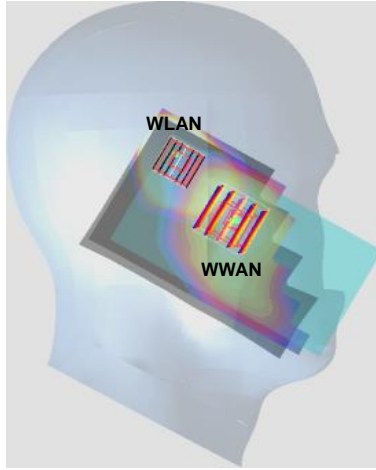


Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 5	Left Cheek	0.337	0mm	0.0697	0.289	-0.174	54.4	1.70	0.04	Not required
	5GHz ANT 2		1.358	0mm	0.0318	0.328	-0.173				

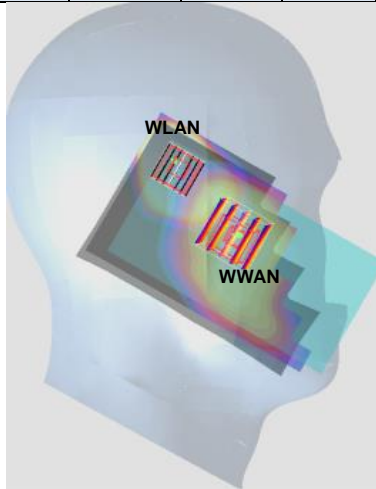


Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE 4	Left Cheek	0.274	0mm	0.0638	0.249	-0.172	85.2	1.63	0.02	Not required
	5GHz ANT 2		1.358	0mm	0.0318	0.328	-0.173				

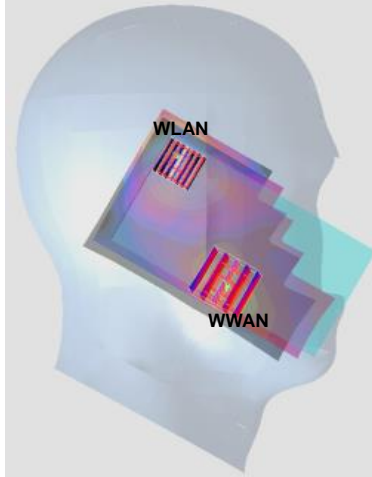

Case 10	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	5GHz ANT 1	Right Cheek	1.376	0mm	0.0348	-0.333	-0.174	72.9	2.09	0.04	Not required
	5GHz ANT 2		0.717	0mm	-0.012	-0.278	-0.164				

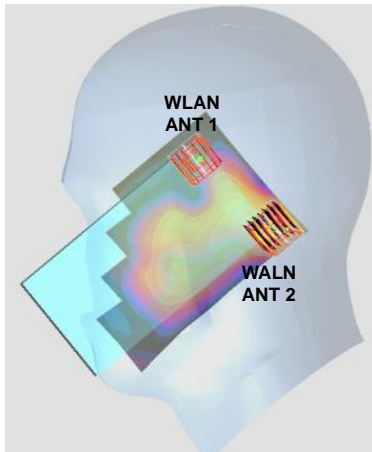

Case 11	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	5GHz ANT 1	Left Cheek	0.702	0mm	-0.00788	0.275	-0.163	67.0	2.06	0.04	Not required
	5GHz ANT 2		1.358	0mm	0.0318	0.328	-0.173				

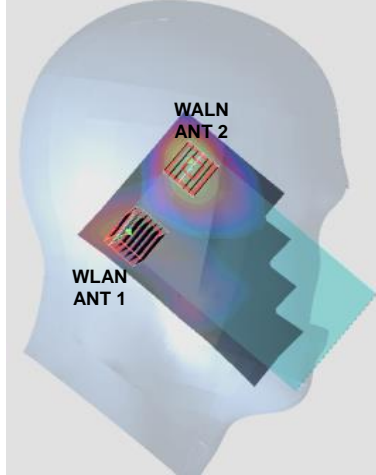

Test Engineer : Jerry Hu, Galen Zhang, Aaron Chen, Steven Chang, Iran Wang, and Tommy Chen

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r01, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Jun 2015.
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D05A v01r01, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Aug 2014
- [11] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.