

#01_HAC_E_GSM850_GSM Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch128/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.83 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.59 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.03 dBV/m	Grid 2 M4 36.27 dBV/m	Grid 3 M4 36.15 dBV/m
Grid 4 M4 35.42 dBV/m	Grid 5 M4 36.55 dBV/m	Grid 6 M4 36.41 dBV/m
Grid 7 M4 35.68 dBV/m	Grid 8 M4 36.59 dBV/m	Grid 9 M4 36.39 dBV/m

Cursor:

Total = 36.59 dBV/m

E Category: M4

Location: -3.5, 25, 8.7 mm

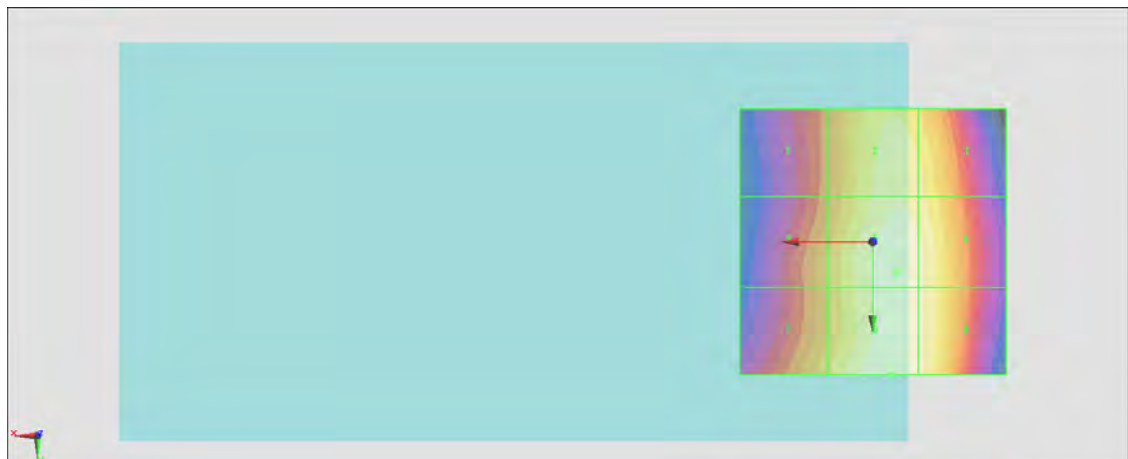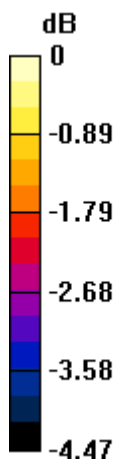

0 dB = 67.51 V/m = 36.59 dBV/m

#02_HAC_E_GSM850_GSM Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch189/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 56.65 V/m; Power Drift = 0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 37.47 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.37 dBV/m	Grid 2 M4 36.49 dBV/m	Grid 3 M4 36.34 dBV/m
Grid 4 M4 36.06 dBV/m	Grid 5 M4 37.07 dBV/m	Grid 6 M4 36.89 dBV/m
Grid 7 M4 36.75 dBV/m	Grid 8 M4 37.47 dBV/m	Grid 9 M4 37.16 dBV/m

Cursor:

Total = 37.47 dBV/m

E Category: M4

Location: -3.5, 25, 8.7 mm

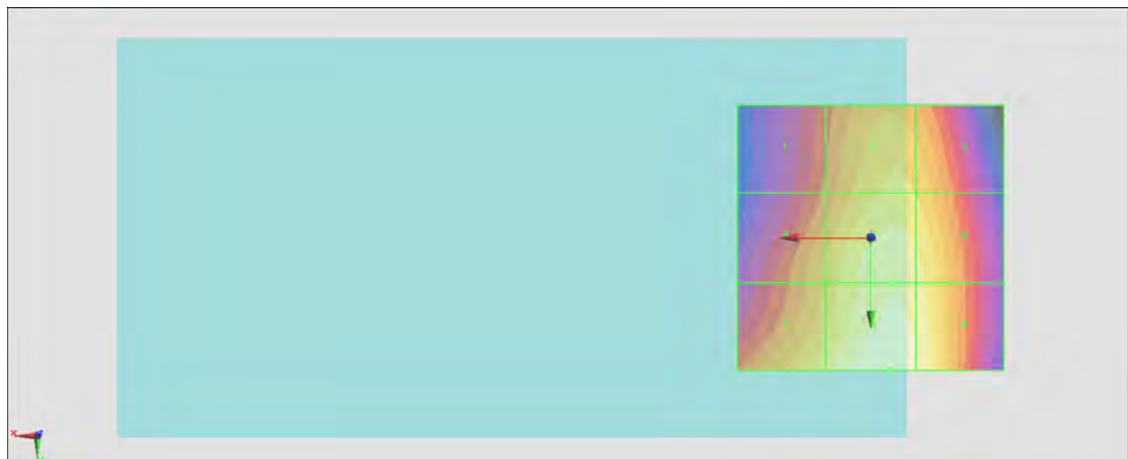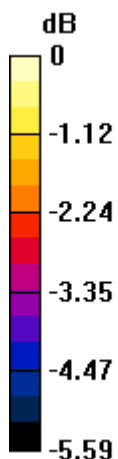

0 dB = 74.74 V/m = 37.47 dBV/m

#03_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.12 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 38.05 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.79 dBV/m	Grid 2 M4 37.28 dBV/m	Grid 3 M4 37.21 dBV/m
Grid 4 M4 36.43 dBV/m	Grid 5 M4 37.8 dBV/m	Grid 6 M4 37.71 dBV/m
Grid 7 M4 36.94 dBV/m	Grid 8 M4 38.05 dBV/m	Grid 9 M4 37.86 dBV/m

Cursor:

Total = 38.05 dBV/m

E Category: M4

Location: -4, 25, 8.7 mm

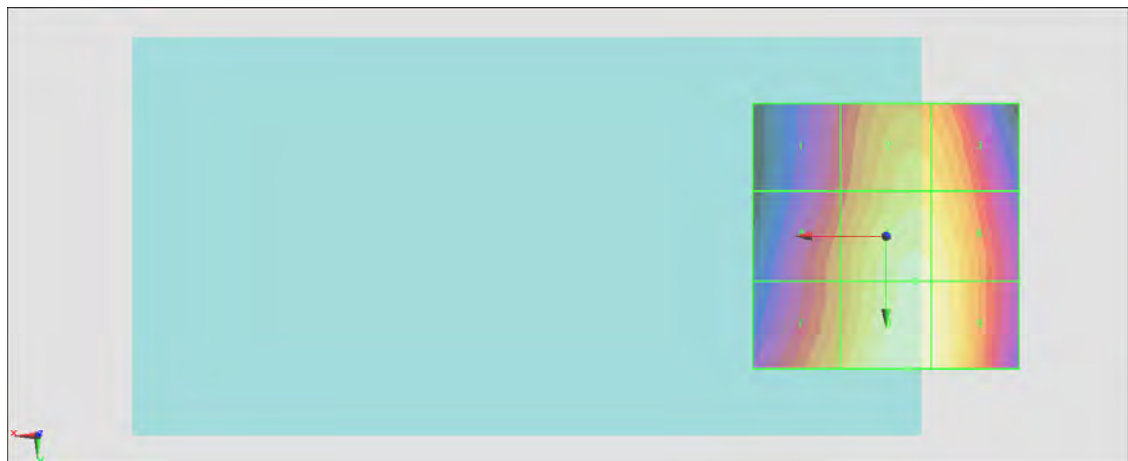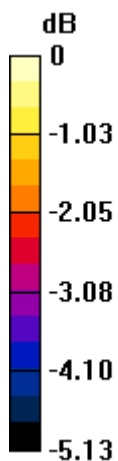

0 dB = 79.89 V/m = 38.05 dBV/m

#04_HAC_E_GSM850_GSM Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.18 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 38.08 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 36.35 dBV/m	Grid 2 M4 37.74 dBV/m	Grid 3 M4 37.67 dBV/m
Grid 4 M4 36.72 dBV/m	Grid 5 M4 37.99 dBV/m	Grid 6 M4 37.85 dBV/m
Grid 7 M4 37.31 dBV/m	Grid 8 M4 38.08 dBV/m	Grid 9 M4 37.87 dBV/m

Cursor:

Total = 38.08 dBV/m

E Category: M4

Location: -3.5, 28, 8.7 mm

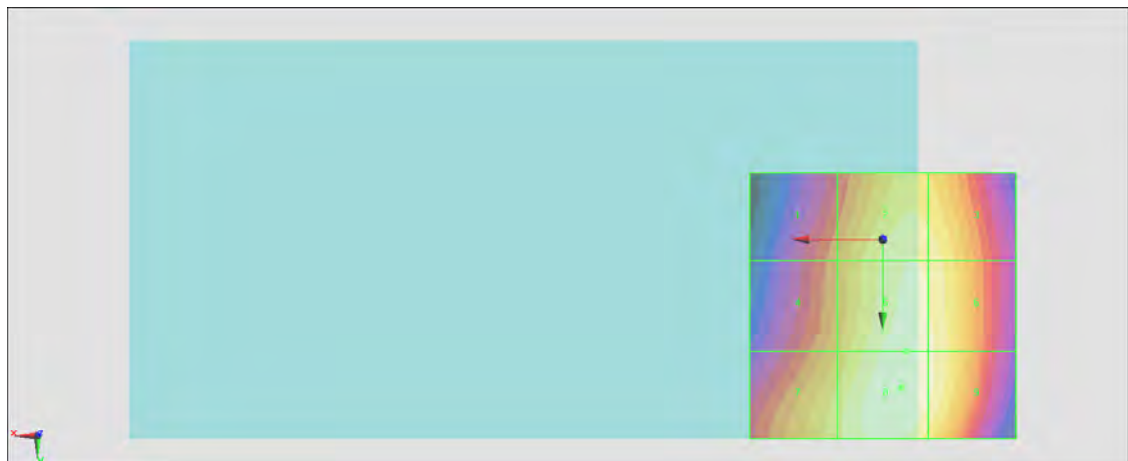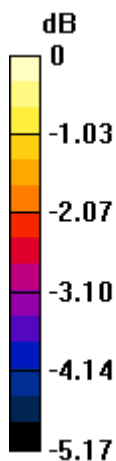

0 dB = 80.21 V/m = 38.08 dBV/m

#05_HAC_E_GSM1900_GSM Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.20 V/m; Power Drift = -0.00 dB

Applied MIF = 3.63 dB

RF audio interference level = 30.56 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 30.42 dBV/m	Grid 2 M3 30.56 dBV/m	Grid 3 M3 30.43 dBV/m
Grid 4 M4 27.17 dBV/m	Grid 5 M3 30.36 dBV/m	Grid 6 M3 30.38 dBV/m
Grid 7 M4 25.37 dBV/m	Grid 8 M3 30.3 dBV/m	Grid 9 M3 30.35 dBV/m

Cursor:

Total = 30.56 dBV/m

E Category: M3

Location: -4, -25, 8.7 mm

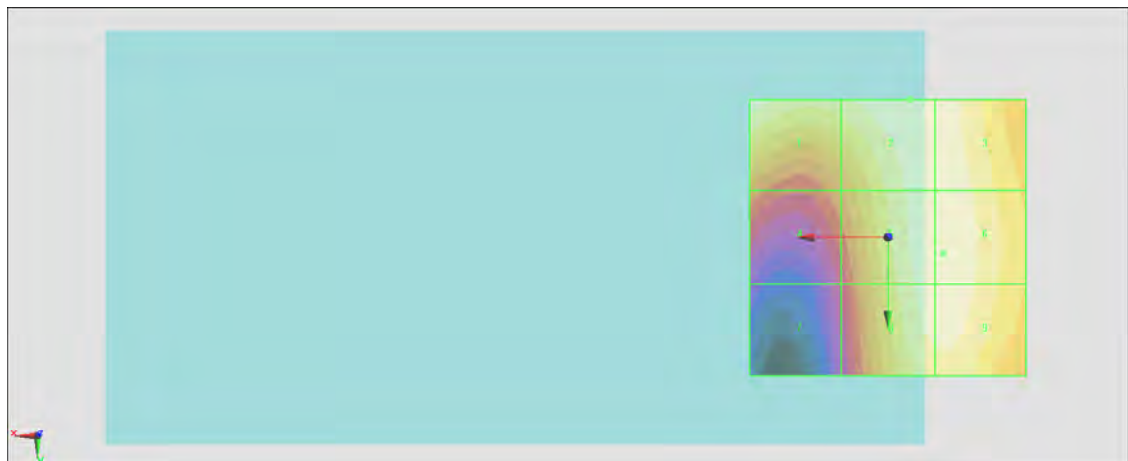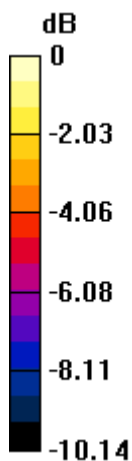

0 dB = 33.75 V/m = 30.57 dBV/m

#06_HAC_E_GSM1900_GSM Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.92 V/m; Power Drift = -0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.17 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.24 dBV/m	Grid 2 M3 32.17 dBV/m	Grid 3 M3 32 dBV/m
Grid 4 M4 28.59 dBV/m	Grid 5 M3 31.44 dBV/m	Grid 6 M3 31.44 dBV/m
Grid 7 M4 26.31 dBV/m	Grid 8 M3 31.14 dBV/m	Grid 9 M3 31.18 dBV/m

Cursor:

Total = 32.17 dBV/m

E Category: M3

Location: -3.5, -25, 8.7 mm

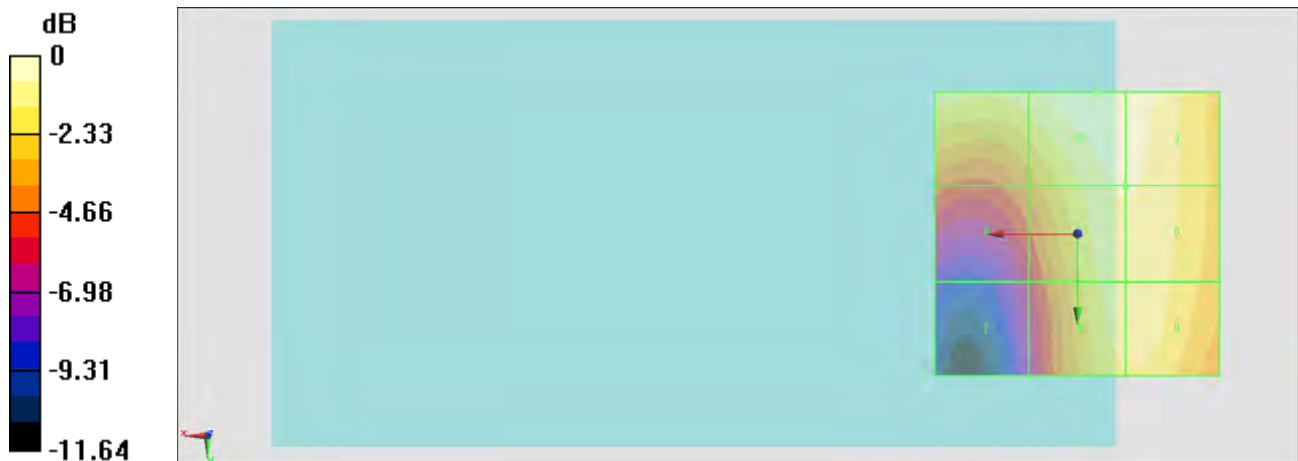

0 dB = 40.59 V/m = 32.17 dBV/m

#07_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.47 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.31 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 31.22 dBV/m	Grid 2 M3 32.31 dBV/m	Grid 3 M3 32.12 dBV/m
Grid 4 M4 28.15 dBV/m	Grid 5 M3 31.37 dBV/m	Grid 6 M3 31.38 dBV/m
Grid 7 M4 25.7 dBV/m	Grid 8 M3 30.95 dBV/m	Grid 9 M3 31 dBV/m

Cursor:

Total = 32.31 dBV/m

E Category: M3

Location: -4, -25, 8.7 mm

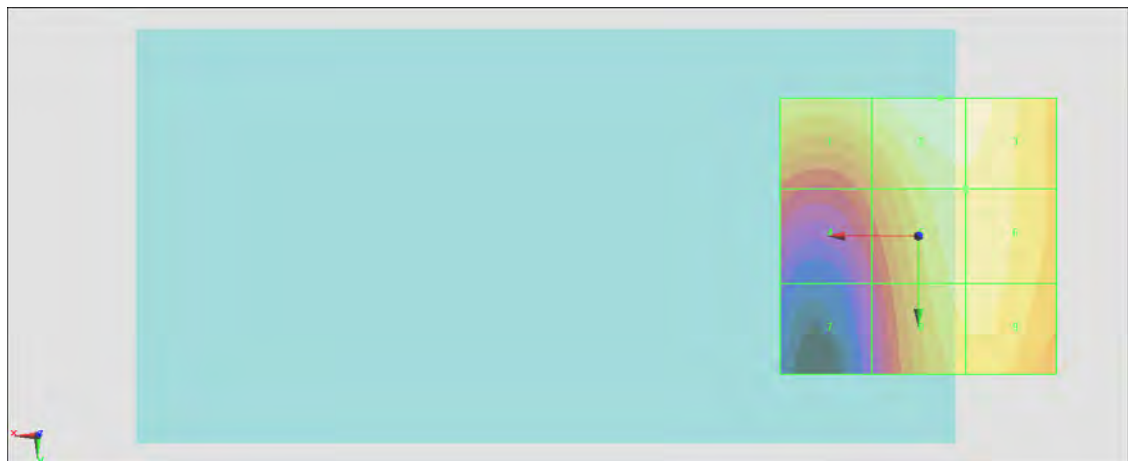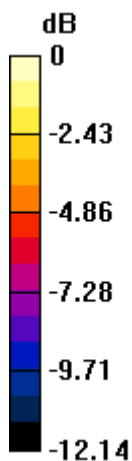

0 dB = 41.28 V/m = 32.31 dBV/m

#08_HAC_E_GSM1900_GSM Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.45 V/m; Power Drift = 0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.54 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 28.79 dBV/m	Grid 2 M3 31.54 dBV/m	Grid 3 M3 31.53 dBV/m
Grid 4 M4 26.38 dBV/m	Grid 5 M3 31.09 dBV/m	Grid 6 M3 31.13 dBV/m
Grid 7 M4 24.64 dBV/m	Grid 8 M3 30.46 dBV/m	Grid 9 M3 30.53 dBV/m

Cursor:

Total = 31.54 dBV/m

E Category: M3

Location: -8, -12.4, 8.7 mm

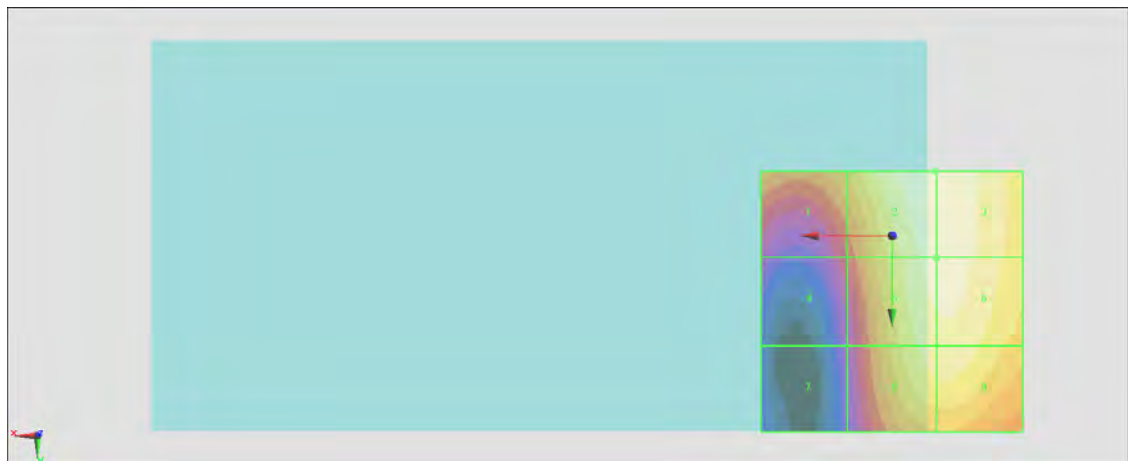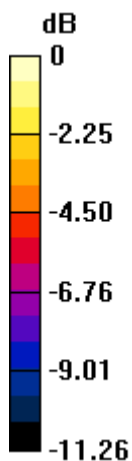

0 dB = 37.75 V/m = 31.54 dBV/m

#09_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1013/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.28 V/m; Power Drift = 0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.15 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 27.97 dBV/m	Grid 2 M4 29.01 dBV/m	Grid 3 M4 28.86 dBV/m
Grid 4 M4 28.15 dBV/m	Grid 5 M4 29.15 dBV/m	Grid 6 M4 29.03 dBV/m
Grid 7 M4 28.41 dBV/m	Grid 8 M4 29.14 dBV/m	Grid 9 M4 28.98 dBV/m

Cursor:

Total = 29.15 dBV/m

E Category: M4

Location: -4, 4.5, 8.7 mm

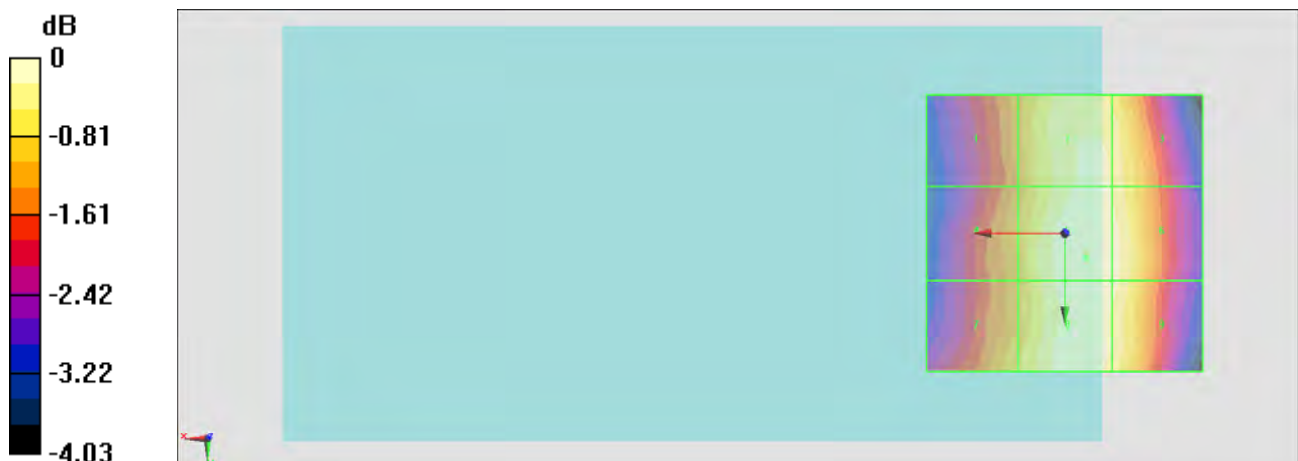

0 dB = 28.67 V/m = 29.15 dBV/m

#10_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch384

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch384/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.27 V/m; Power Drift = -0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.02 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.4 dBV/m	Grid 2 M4 28.45 dBV/m	Grid 3 M4 28.35 dBV/m
Grid 4 M4 27.79 dBV/m	Grid 5 M4 28.84 dBV/m	Grid 6 M4 28.66 dBV/m
Grid 7 M4 28.25 dBV/m	Grid 8 M4 29.02 dBV/m	Grid 9 M4 28.7 dBV/m

Cursor:

Total = 29.02 dBV/m

E Category: M4

Location: -3, 25, 8.7 mm

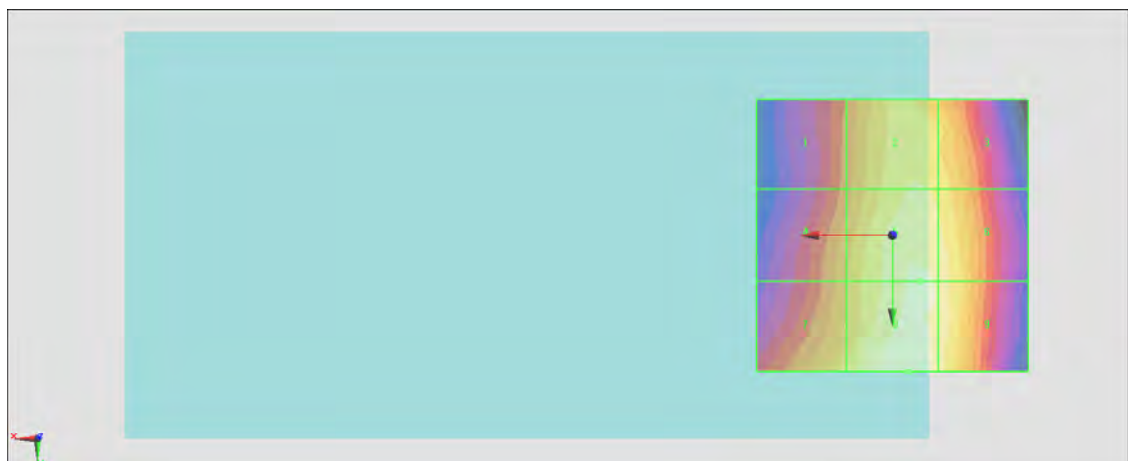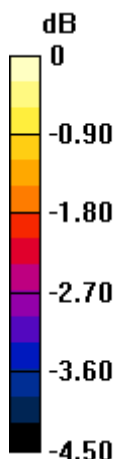

0 dB = 28.26 V/m = 29.02 dBV/m

#11_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch777

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.31 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch777/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.53 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.14 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.37 dBV/m	Grid 2 M4 28.89 dBV/m	Grid 3 M4 28.81 dBV/m
Grid 4 M4 27.81 dBV/m	Grid 5 M4 29.12 dBV/m	Grid 6 M4 29.05 dBV/m
Grid 7 M4 28.13 dBV/m	Grid 8 M4 29.14 dBV/m	Grid 9 M4 29.05 dBV/m

Cursor:

Total = 29.14 dBV/m

E Category: M4

Location: -4, 24, 8.7 mm

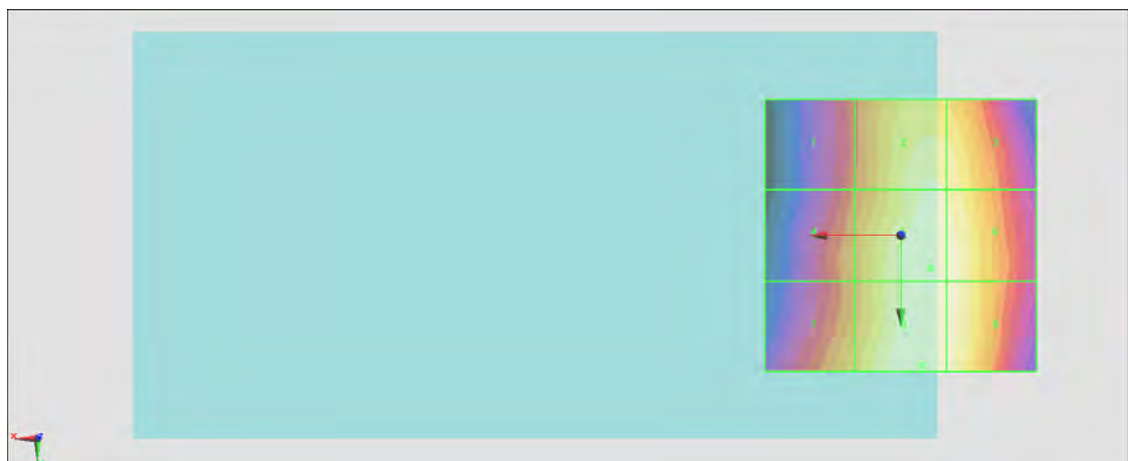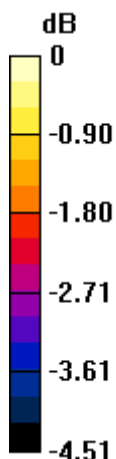

0 dB = 28.64 V/m = 29.14 dBV/m

#12_HAC_E_CDMA BC0_1xRTT, RC1 SO3, 18th Rate_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1013/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.10 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.01 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 27.67 dBV/m	Grid 2 M4 29 dBV/m	Grid 3 M4 28.94 dBV/m
Grid 4 M4 27.91 dBV/m	Grid 5 M4 28.99 dBV/m	Grid 6 M4 28.92 dBV/m
Grid 7 M4 28.32 dBV/m	Grid 8 M4 29.01 dBV/m	Grid 9 M4 28.89 dBV/m

Cursor:

Total = 29.01 dBV/m

E Category: M4

Location: -1, 31.6, 8.7 mm

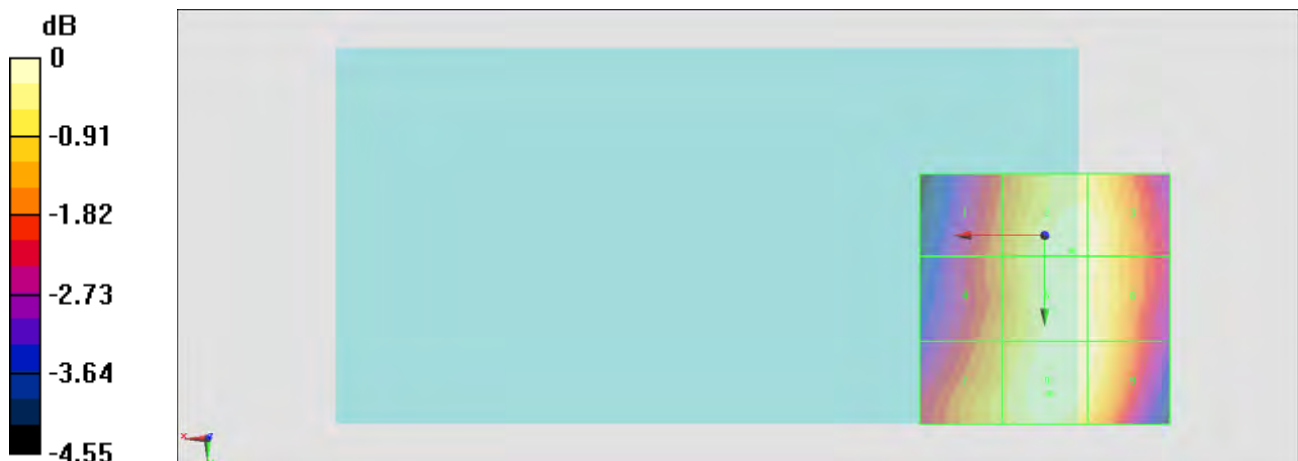

0 dB = 28.22 V/m = 29.01 dBV/m

#13_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch25

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch25/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.76 V/m; Power Drift = -0.12 dB

Applied MIF = 3.26 dB

RF audio interference level = 24.86 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.66 dBV/m	Grid 2 M4 24.74 dBV/m	Grid 3 M4 24.73 dBV/m
Grid 4 M4 21.84 dBV/m	Grid 5 M4 24.84 dBV/m	Grid 6 M4 24.86 dBV/m
Grid 7 M4 20.62 dBV/m	Grid 8 M4 24.84 dBV/m	Grid 9 M4 24.86 dBV/m

Cursor:

Total = 24.86 dBV/m

E Category: M4

Location: -9.5, 8.5, 8.7 mm

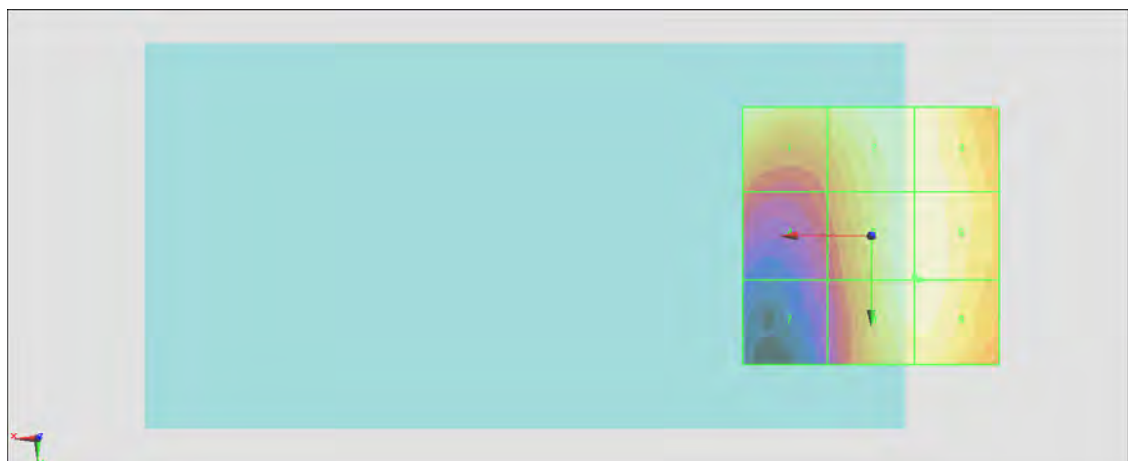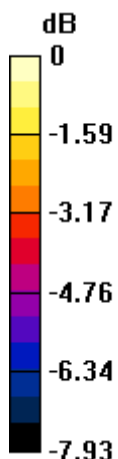

0 dB = 17.50 V/m = 24.86 dBV/m

#14_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch600

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1880 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch600/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.83 V/m; Power Drift = -0.13 dB

Applied MIF = 3.26 dB

RF audio interference level = 25.40 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.66 dBV/m	Grid 2 M4 25.4 dBV/m	Grid 3 M4 25.23 dBV/m
Grid 4 M4 22.01 dBV/m	Grid 5 M4 24.88 dBV/m	Grid 6 M4 24.88 dBV/m
Grid 7 M4 20.21 dBV/m	Grid 8 M4 24.74 dBV/m	Grid 9 M4 24.75 dBV/m

Cursor:

Total = 25.40 dBV/m

E Category: M4

Location: -2.5, -25, 8.7 mm

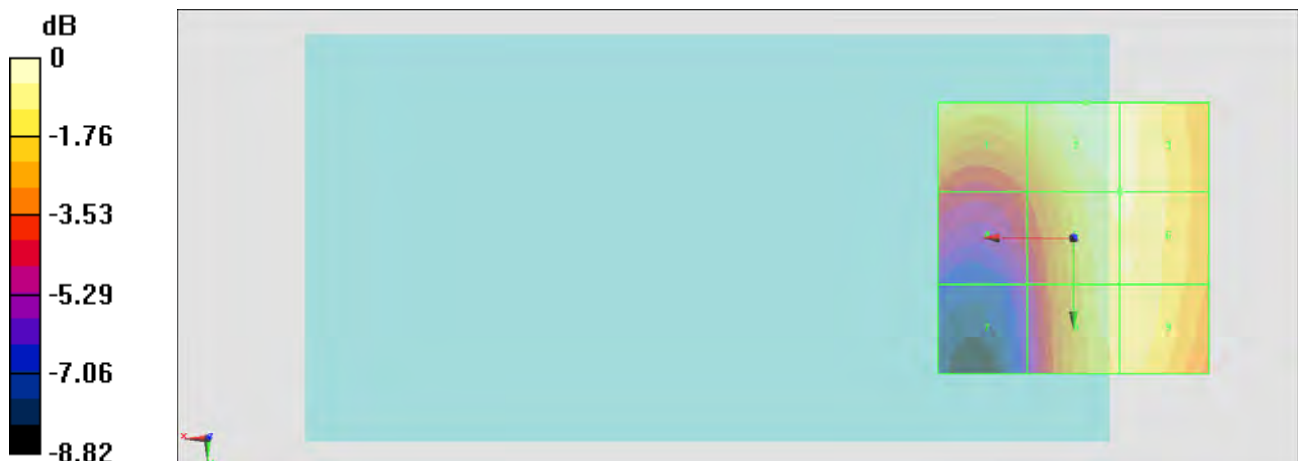

0 dB = 18.63 V/m = 25.40 dBV/m

#15_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch1175

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.30 V/m; Power Drift = -0.03 dB

Applied MIF = 3.26 dB

RF audio interference level = 25.92 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.87 dBV/m	Grid 2 M4 25.92 dBV/m	Grid 3 M4 25.69 dBV/m
Grid 4 M4 22.29 dBV/m	Grid 5 M4 25.25 dBV/m	Grid 6 M4 25.26 dBV/m
Grid 7 M4 20.42 dBV/m	Grid 8 M4 25 dBV/m	Grid 9 M4 25.02 dBV/m

Cursor:

Total = 25.92 dBV/m

E Category: M4

Location: -4, -25, 8.7 mm

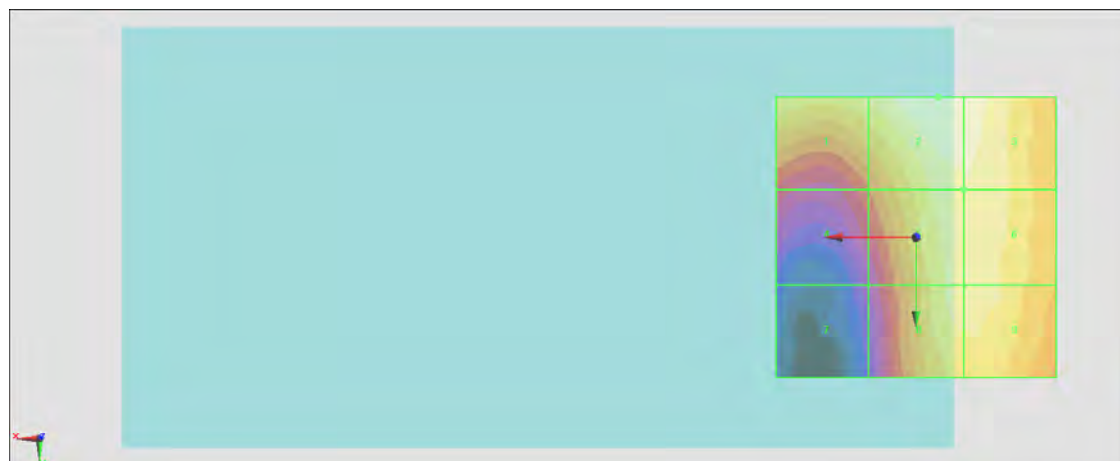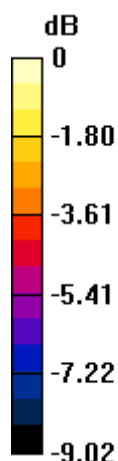

0 dB = 19.78 V/m = 25.92 dBV/m

#16_HAC_E_CDMA BC1_1xRTT, RC1 SO3, 18th Rate_Ch1175

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2015/1/26;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn916; Calibrated: 2014/12/29
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.14 V/m; Power Drift = 0.10 dB

Applied MIF = 3.26 dB

RF audio interference level = 25.38 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.48 dBV/m	Grid 2 M4 25.38 dBV/m	Grid 3 M4 25.35 dBV/m
Grid 4 M4 21 dBV/m	Grid 5 M4 25.15 dBV/m	Grid 6 M4 25.16 dBV/m
Grid 7 M4 19.41 dBV/m	Grid 8 M4 24.75 dBV/m	Grid 9 M4 24.8 dBV/m

Cursor:

Total = 25.38 dBV/m

E Category: M4

Location: -7, -16.6, 8.7 mm

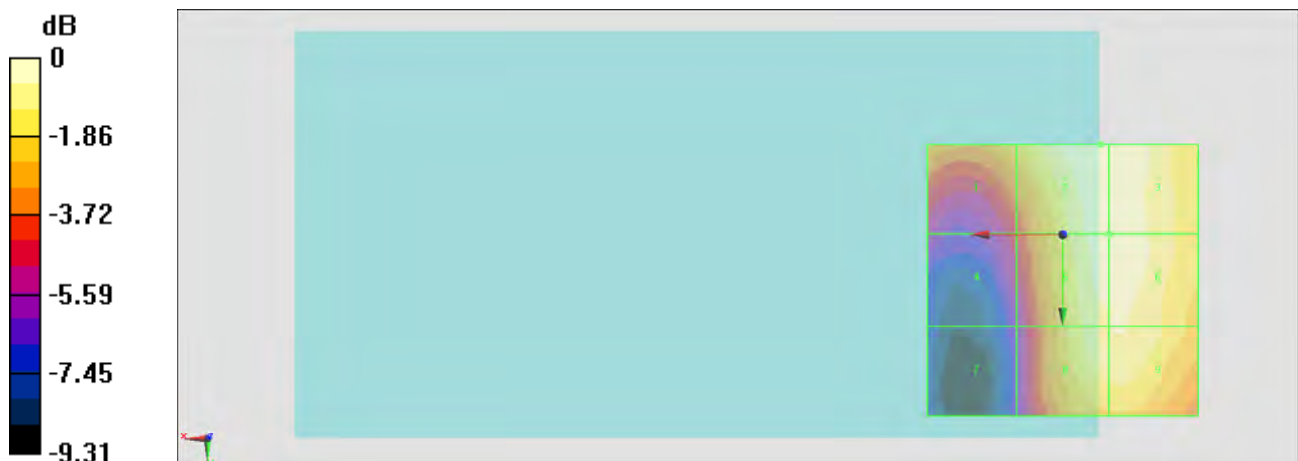

0 dB = 18.58 V/m = 25.38 dBV/m