



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 6574
FCC ID : IHDT56VB2
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a variant report which is only valid together with the original test report. The product was received on May 17, 2016 and testing was completed on May 23, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56VB2

Page Number : 1 of 22

Report Issued Date : Jun. 22, 2016

Report Version : Rev. 02

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.3



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
3 TEST RESULT	13
3.1 Unwanted Emissions Measurement	13
3.2 AC Conducted Emission Measurement.....	17
4 LIST OF MEASURING EQUIPMENT	21
5 UNCERTAINTY OF EVALUATION	22
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. ORIGINAL REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR640145-15E	Rev. 01	This is a variant report. All the test cases were performed base on the worst case identified in the original report. The test purpose is to verify the influence caused by additional accessory applied, hence only RSE and AC conducted emission need to be considered. Please referred to appendix D for the original report.(Sporton Report Number FR640145E)	Jun. 01, 2016
FR640145-15E	Rev. 02	Revising the standard in section 1.7.	Jun. 22, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm/MHz & 15.209(a)	Pass	Under limit 0.49 dB at 5713.560 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.70 dB at 0.238 MHz



1 General Description

1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	6574
FCC ID	IHDT56VB2
IMEI Code	354107070048603 (for Radiation) 354107070049056 (for Conduction)
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20/VHT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 EDR Bluetooth v4.2 LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
WPC Cover	Brand Name : INCIPIO
	Model Name : MT-043-CASE

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Type	Fixed Internal Antenna type (The antenna peak gain of EUT is less than 6 dBi)		
Antenna Function Description		Ant.1	Ant.2
	802.11 a/a/n/ac SISO	V	V
	802.11 a/n/ac MIMO	V	V

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01.
- ♦ KDB 648474 D03 Handset Wireless Chargers Battery Covers v01r04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805
	155	5775	165	5825

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

MIMO Antenna


Modulation	Data Rate
802.11a	6 Mbps

AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Camera + WPC Back Cover + WPC Charging Pad + USB Cable (Charging from Adapter) Mode 2 : WCDMA Band V Idle + Bluetooth Link + WLAN (5GHz) Link + MPEG4 + WPC Back Cover + PMA Charging Pad + Adapter
------------------------------	--


Ch. #		Band IV : 5725-5850 MHz
		802.11ac VHT80
L	Low	-
M	Middle	155
H	High	-



2.3 Connection Diagram of Test System

<WLAN Tx with WPC Charging Mode>

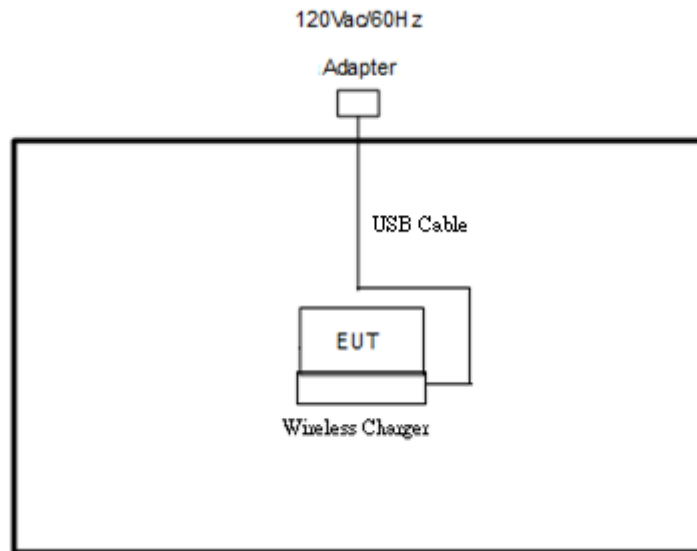

<WLAN Tx with PMA Charging Mode>

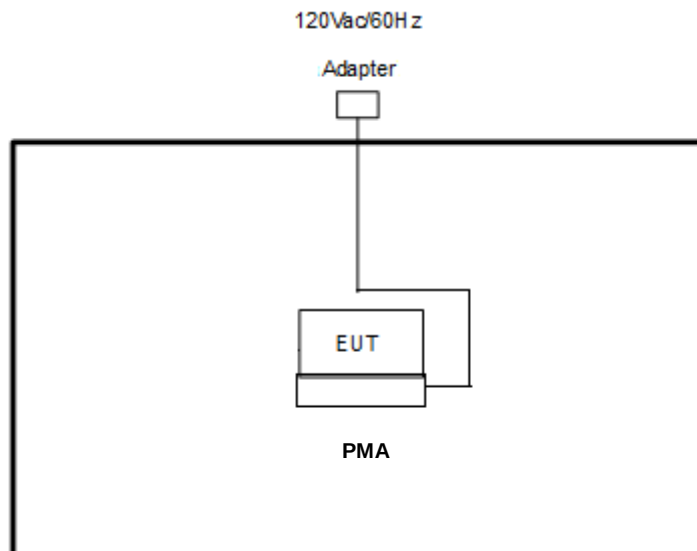
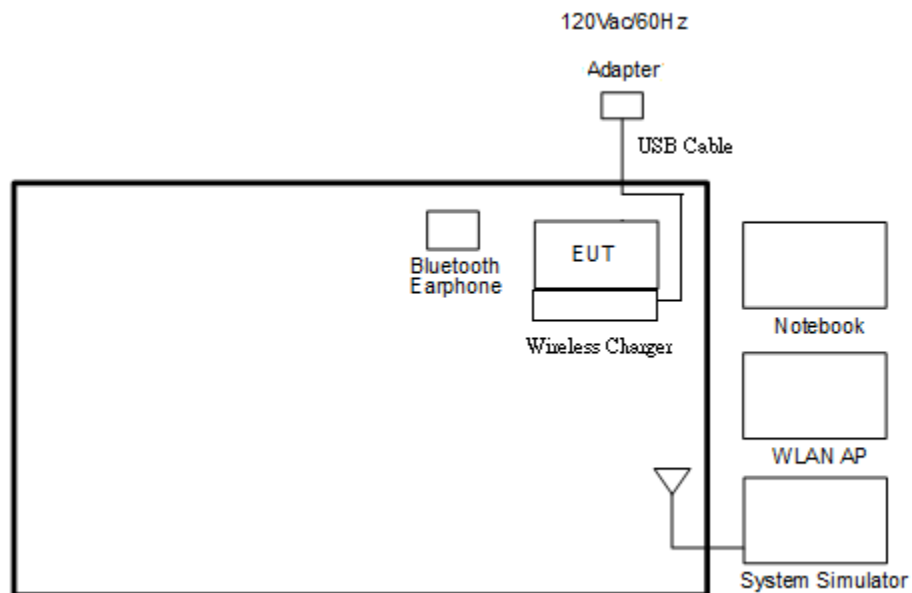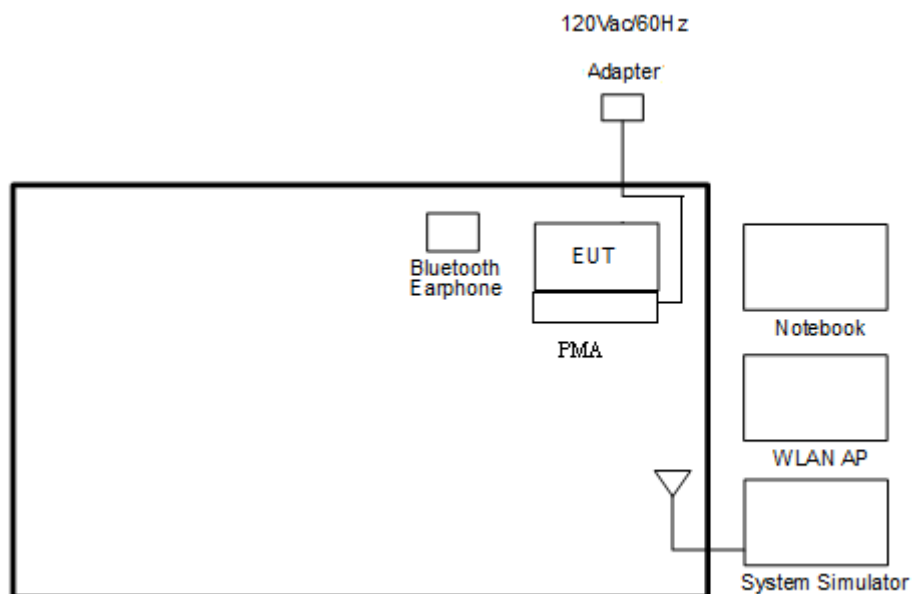
<AC Conducted Emission with WPC Charging Mode>

<AC Conducted Emission with PMA Charging Mode>




2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
6.	Wireless Charger	LG	WCD-100	FCC DoC	N/A	N/A
7.	PMA	DURACELL	M-018B-518A	FCC DoC	N/A	N/A
8.	USB Cable	Motorola	SKN6461A	N/A	Unshielded, 1.0 m	N/A
9.	Adapter	Motorola	SPN5865A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN function, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.1.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB 789033 D02 General UNII Test Procedures New Rules v01r02 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup


For radiated emissions below 30MHz

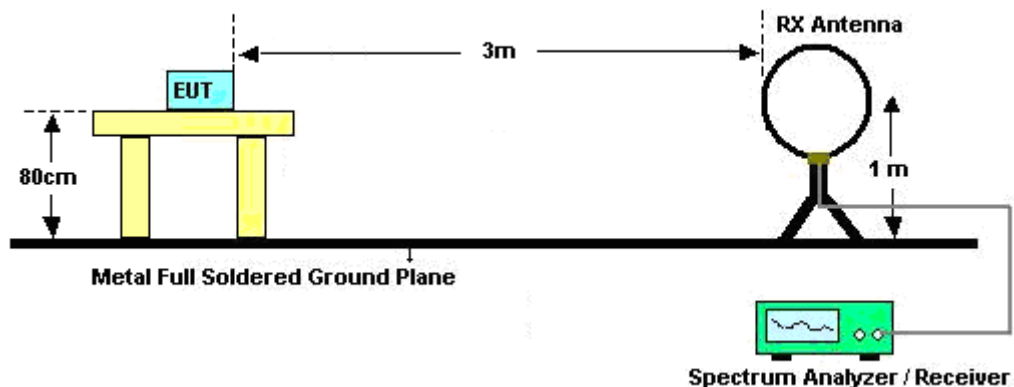

For radiated emissions from 30MHz to 1GHz

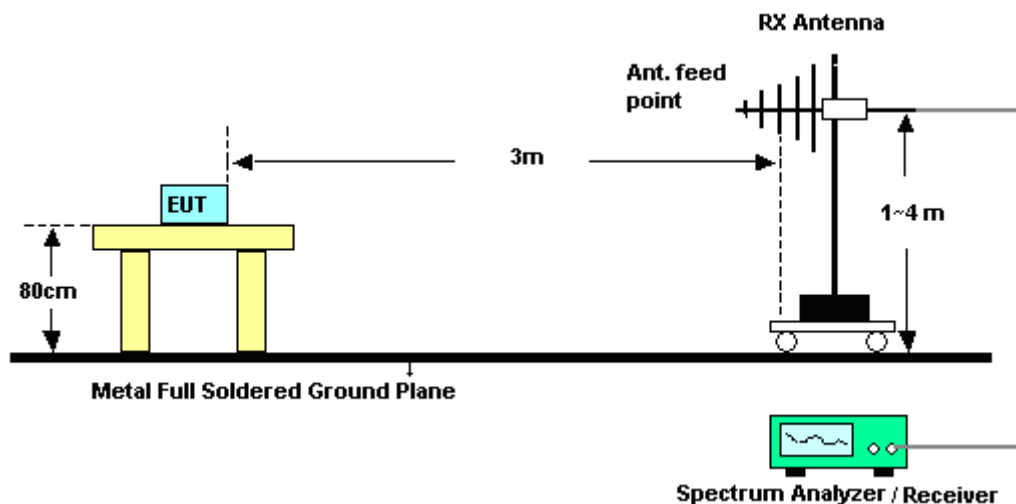

For radiated emissions above 1GHz

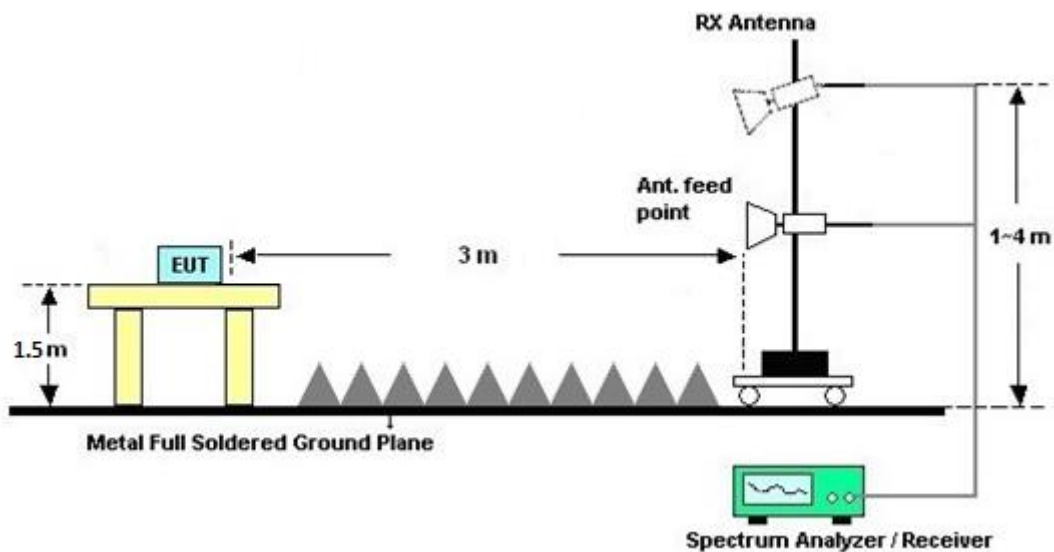

3.1.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.1.6 Test Result of Radiated Band Edges

Please refer to Appendix A and B

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B

3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.2.4 Test Setup

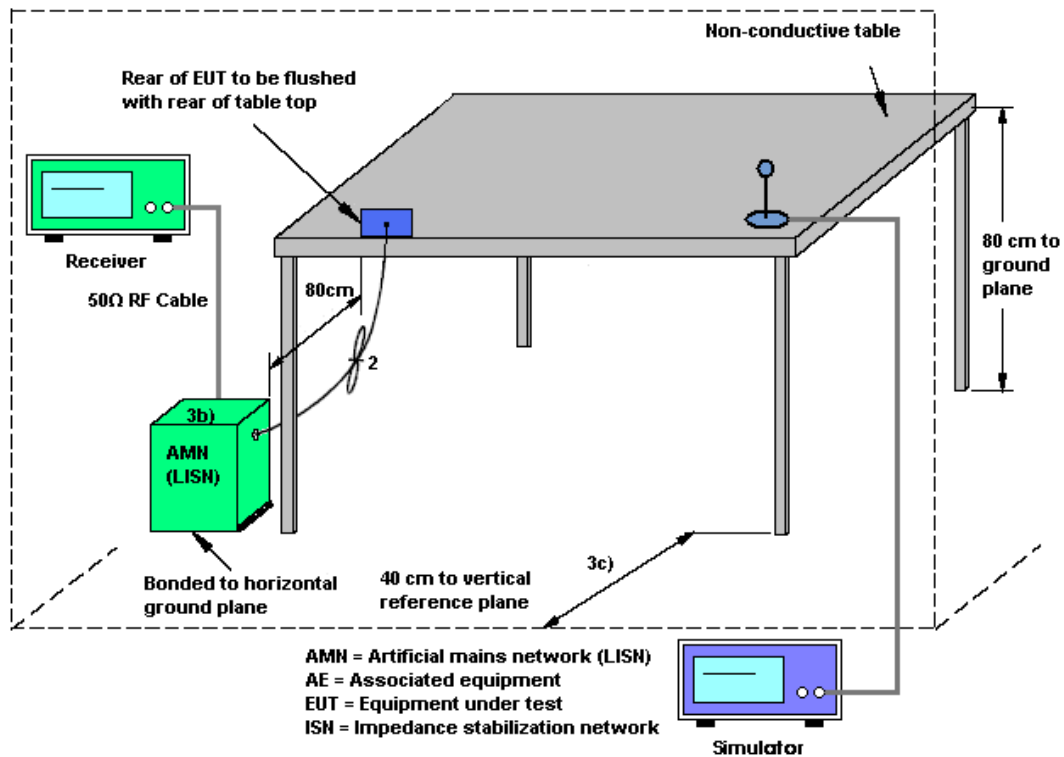

3.2.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	23~24℃
Test Engineer :	Kai-Chun Chu	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (5GHz) Link + MPEG4 + WPC Back Cover + PMA Charging Pad + Adapter		

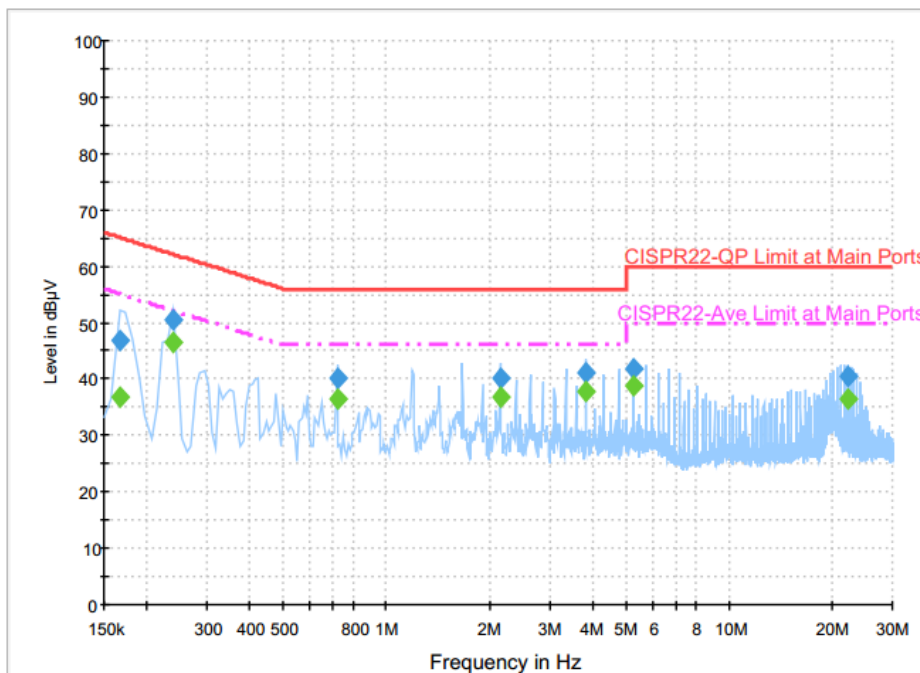

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	46.7	Off	L1	19.6	18.5	65.2
0.238000	50.5	Off	L1	19.6	11.7	62.2
0.718000	40.0	Off	L1	19.6	16.0	56.0
2.150000	40.3	Off	L1	19.6	15.7	56.0
3.822000	41.1	Off	L1	19.8	14.9	56.0
5.254000	41.8	Off	L1	19.9	18.2	60.0
22.214000	40.6	Off	L1	20.8	19.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	36.8	Off	L1	19.6	18.4	55.2
0.238000	46.5	Off	L1	19.6	5.7	52.2
0.718000	36.6	Off	L1	19.6	9.4	46.0
2.150000	36.8	Off	L1	19.6	9.2	46.0
3.822000	37.8	Off	L1	19.8	8.2	46.0
5.254000	38.8	Off	L1	19.9	11.2	50.0
22.214000	36.6	Off	L1	20.8	13.4	50.0



Test Mode :	Mode 2	Temperature :	23~24°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (5GHz) Link + MPEG4 + WPC Back Cover + PMA Charging Pad + Adapter		

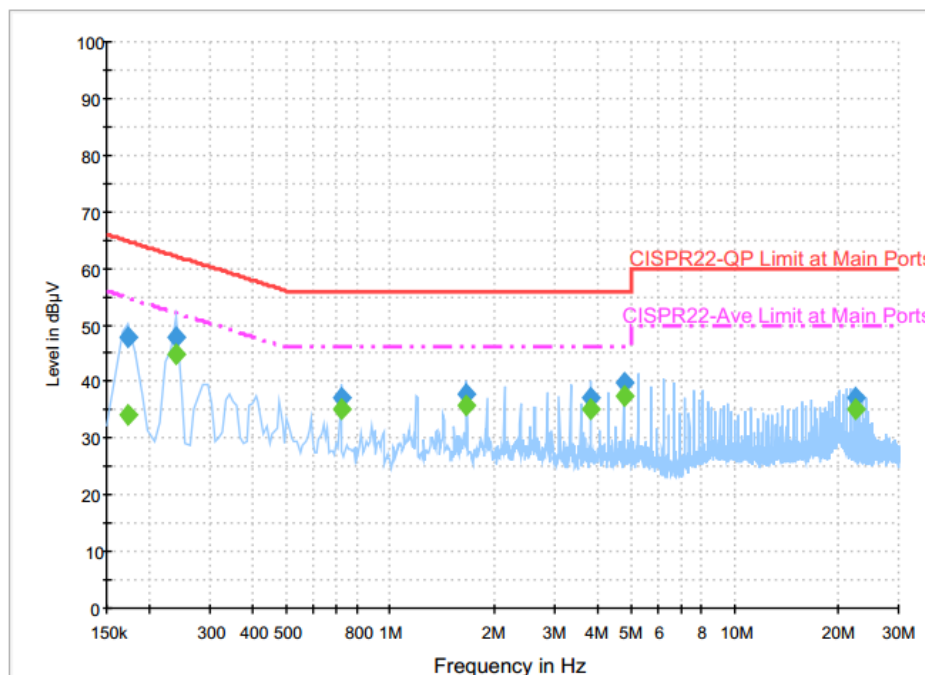

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	48.0	Off	N	19.6	16.8	64.8
0.238000	47.8	Off	N	19.6	14.4	62.2
0.718000	37.2	Off	N	19.6	18.8	56.0
1.670000	37.9	Off	N	19.7	18.1	56.0
3.822000	37.3	Off	N	19.7	18.7	56.0
4.774000	39.7	Off	N	19.8	16.3	56.0
22.678000	37.0	Off	N	20.9	23.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	34.0	Off	N	19.6	20.8	54.8
0.238000	44.9	Off	N	19.6	7.3	52.2
0.718000	35.2	Off	N	19.6	10.8	46.0
1.670000	35.8	Off	N	19.7	10.2	46.0
3.822000	35.0	Off	N	19.7	11.0	46.0
4.774000	37.6	Off	N	19.8	8.4	46.0
22.678000	35.0	Off	N	20.9	15.0	50.0



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 23, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	May 23, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	May 23, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz to 1GHz	Jan. 13, 2016	May 19, 2016 ~ May 21, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	May 19, 2016 ~ May 21, 2016	Aug. 20, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 04, 2015	May 19, 2016 ~ May 21, 2016	Nov. 03, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	May 19, 2016 ~ May 21, 2016	Sep. 01, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 15, 2016	May 19, 2016 ~ May 21, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	May 19, 2016 ~ May 21, 2016	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 19, 2015	May 19, 2016 ~ May 21, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	May 19, 2016 ~ May 21, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	May 19, 2016 ~ May 21, 2016	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	May 19, 2016 ~ May 21, 2016	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	May 19, 2016 ~ May 21, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	May 19, 2016 ~ May 21, 2016	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	May 19, 2016 ~ May 21, 2016	Jun. 01, 2016	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	May 19, 2016 ~ May 21, 2016	Nov. 01, 2016	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60
---	------



Appendix A. Radiated Spurious Emission

Test Engineer :	Jesse Wang, James Chiu, and Kyle Chuang	Temperature :	21~23°C
		Relative Humidity :	55~58%

Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

<PMA Charging Mode>

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5713.56	67.81	-0.49	68.3	55.49	35.54	12.06	35.28	100	2	P	H
		5718.92	71.17	-7.13	78.3	58.85	35.54	12.06	35.28	100	2	P	H
	*	5775	96.11	-	-	83.74	35.56	12.11	35.3	100	2	P	H
		5775	90.61	-	-	78.24	35.56	12.11	35.3	100	2	A	H
		5850.4	64.67	-13.63	78.3	52.13	35.57	12.28	35.31	100	2	P	H
		5868.48	62.96	-5.34	68.3	50.31	35.57	12.39	35.31	100	2	P	H
													H
													H
		5706.92	65.42	-2.88	68.3	53.1	35.54	12.06	35.28	300	330	P	V
		5724.6	65.5	-12.8	78.3	53.18	35.54	12.06	35.28	300	330	P	V
	*	5775	94.96	-	-	82.59	35.56	12.11	35.3	300	330	P	V
		5775	87.45	-	-	75.08	35.56	12.11	35.3	300	330	A	V
		5858.64	59.87	-18.43	78.3	47.33	35.57	12.28	35.31	300	330	P	V
		5868.08	59.73	-8.57	68.3	47.08	35.57	12.39	35.31	300	330	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

<WPC Charging Mode>

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5705	67.75	-0.55	68.3	55.43	35.54	12.06	35.28	210	256	P	H
		5724.2	71.89	-6.41	78.3	59.57	35.54	12.06	35.28	210	256	P	H
	*	5775	96.64	-	-	84.27	35.56	12.11	35.3	210	256	P	H
		5775	88.6	-	-	76.23	35.56	12.11	35.3	210	256	A	H
		5851.28	62	-16.3	78.3	49.46	35.57	12.28	35.31	210	256	P	H
		5861.12	62.61	-5.69	68.3	49.96	35.57	12.39	35.31	210	256	P	H
													H
													H
		5713.96	67.42	-0.88	68.3	55.1	35.54	12.06	35.28	304	358	P	V
		5723.32	70.38	-7.92	78.3	58.06	35.54	12.06	35.28	304	358	P	V
	*	5775	96.34	-	-	83.97	35.56	12.11	35.3	304	358	P	V
		5775	89.59	-	-	77.22	35.56	12.11	35.3	304	358	A	V
		5856.64	62.68	-15.62	78.3	50.14	35.57	12.28	35.31	304	358	P	V
		5861.6	60.55	-7.75	68.3	47.9	35.57	12.39	35.31	304	358	P	V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)****<PMA Charging Mode>**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	46.59	-27.41	74	48.2	38.45	17.16	57.22	100	0	P	H
		17328	46.94	-21.36	68.3	40.05	42.01	20.81	55.93	100	0	P	H
													H
													H
		11550	50.18	-23.82	74	51.79	38.45	17.16	57.22	100	0	P	V
		17328	46.63	-21.67	68.3	39.74	42.01	20.81	55.93	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)****<WPC Charging Mode>**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	50.37	-23.63	74	51.98	38.45	17.16	57.22	100	0	P	H
		17328	46.62	-21.68	68.3	39.73	42.01	20.81	55.93	100	0	P	H
													H
													H
		11550	49.85	-24.15	74	51.46	38.45	17.16	57.22	100	0	P	V
		17328	47.44	-20.86	68.3	40.55	42.01	20.81	55.93	100	0	P	V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

<PMA Charging Mode>

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		30	29.4	-10.6	40	33.68	26	1.07	31.35	100	0	P	H
		141.78	24.68	-18.82	43.5	36.45	17.95	1.78	31.5			P	H
		265.17	22.18	-23.82	46	31.5	19.7	2.32	31.34			P	H
		734.7	31.55	-14.45	46	31.53	26.95	3.74	30.67			P	H
		792.1	34.97	-11.03	46	34.05	27.62	3.9	30.6			P	H
		918.1	32.92	-13.08	46	29.89	29.45	4.12	30.54			P	H
													H
													H
													H
													H
													H
													H
		55.65	35.89	-4.11	40	52.86	13.55	1.07	31.59	100	0	P	V
		135.3	20.34	-23.16	43.5	32.18	18.12	1.55	31.51			P	V
		261.12	21.98	-24.02	46	31.07	19.94	2.32	31.35			P	V
		852.3	32.05	-13.95	46	29.79	28.72	4.1	30.56			P	V
		925.8	32.7	-13.3	46	29.47	29.64	4.12	30.53			P	V
		950.3	32.94	-13.06	46	29.2	30.2	4.07	30.53			P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

<WPC Charging Mode>

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		94.8	27.55	-15.95	43.5	41.62	15.75	1.28	31.1			P	H
		186.33	32.55	-10.95	43.5	46.24	15.46	1.87	31.02	100	0	P	H
		293.25	25.16	-20.84	46	34.18	19.73	2.32	31.07			P	H
		760.6	30.85	-15.15	46	30.1	27.31	3.82	30.38			P	H
		846	32.92	-13.08	46	30.59	28.62	4.1	30.39			P	H
		977.6	34.28	-19.72	54	30.24	30.26	4.07	30.29			P	H
													H
													H
													H
													H
													H
													H
		55.11	30.55	-9.45	40	47.13	13.55	1.07	31.2	100	0	P	V
		167.97	32.12	-11.38	43.5	45.26	16.2	1.78	31.12			P	V
		215.76	28.42	-15.08	43.5	41.23	16.36	1.87	31.04			P	V
		771.1	31.46	-14.54	46	30.59	27.41	3.82	30.36			P	V
		911.8	33.44	-12.56	46	30.36	29.28	4.12	30.32			P	V
		978.3	33.87	-20.13	54	29.83	30.26	4.07	30.29			P	V
													V
													V
													V
													V
													V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, James Chiu, and Kyle Chuang	Temperature :	21~23°C
		Relative Humidity :	55~58%

Note symbol



-L	Low channel location
-R	High channel location



Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

<PMA Charging Mode>

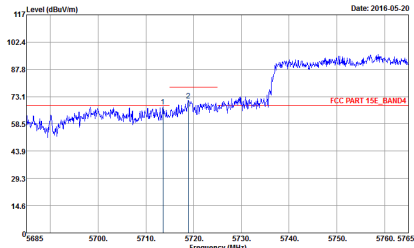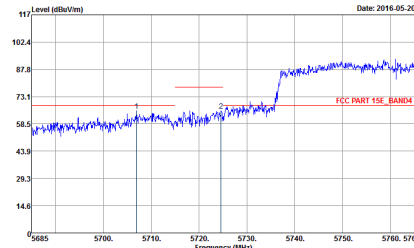WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH07-11Y Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	 Site : 03CH07-11Y Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - R	
1+2	Horizontal	Vertical
Peak	117 Level (dBuV/m) Date: 2016-05-20 Frequency (MHz) Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	117 Level (dBuV/m) Date: 2016-05-20 Frequency (MHz) Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



WIFI	Band 4 5725~5850MHz Fundamental @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)



<WPC Charging Mode>

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH07-11Y Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	Site : 03CH07-11Y Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - R	
1+2	Horizontal	Vertical
Peak	117 Level (dBuV/m) Date: 2016-05-20 Frequency (MHz) Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	117 Level (dBuV/m) Date: 2016-05-20 Frequency (MHz) Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1

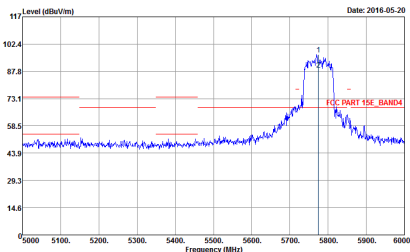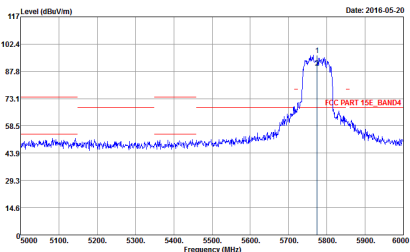



WIFI	Band 4 5725~5850MHz Fundamental @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	 Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

<PMA Charging Mode>

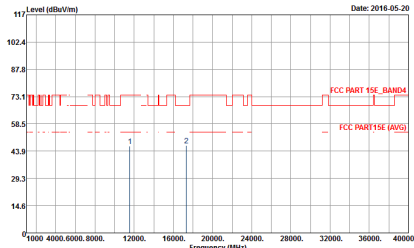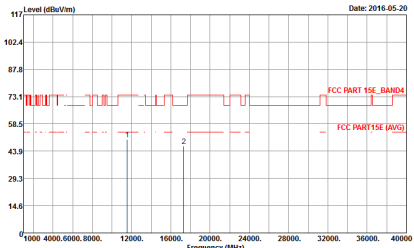WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	 Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)



<WPC Charging Mode>

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 640145-15 Mode : 1	Site : 03CH07-HY Condition : FCC PART 15E_BAND4 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 640145-15 Mode : 1



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

<PMA Charging Mode>

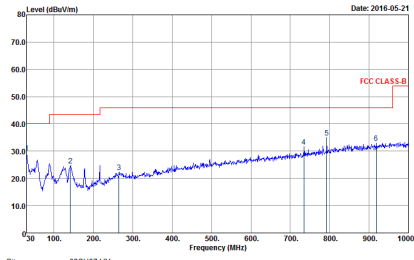
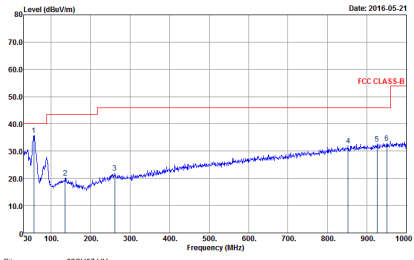
WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH07-11Y Condition : FCC CLASS-B 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 640145-15 Mode : 2	 Site : 03CH07-11Y Condition : FCC CLASS-B 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 640145-15 Mode : 2



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF)

<WPC Charging Mode>

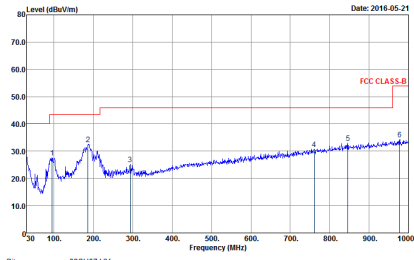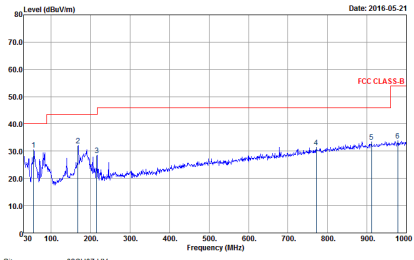
WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH07-1HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 640145-15 Mode : 2	 Site : 03CH07-1HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 640145-15 Mode : 2



Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11a for 1	94.52	2070	0.483091787	1kHz
1+2	802.11a for 2	94.95	2070	0.483091787	1kHz
1+2	5GHz 802.11n HT20 for 1	95.07	1930	0.518134715	1kHz
1+2	5GHz 802.11n HT20 for 2	95.07	1930	0.518134715	1kHz
1+2	5GHz 802.11n HT40 for 1	90.48	950	1.052631579	3kHz
1+2	5GHz 802.11n HT40 for 2	88.79	950	1.052631579	3kHz
1+2	5GHz 802.11n VHT20 for 1	90.83	990	1.01010101	3kHz
1+2	5GHz 802.11n VHT20 for 2	0.90	990	1.01010101	3kHz
1+2	5GHz 802.11n VHT40 for 1	90.57	960	1.041666667	3kHz
1+2	5GHz 802.11n VHT40 for 2	90.57	960	1.041666667	3kHz
1+2	5GHz 802.11n VHT80 for 1	85.71	600	1.666666667	3kHz
1+2	5GHz 802.11n VHT80 for 2	85.71	600	1.666666667	3kHz


MIMO <Ant. 1+2(1)>

802.11a

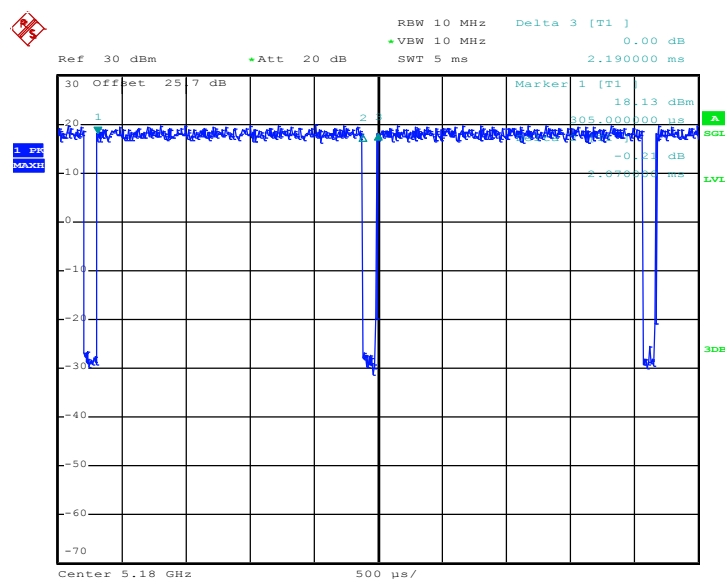


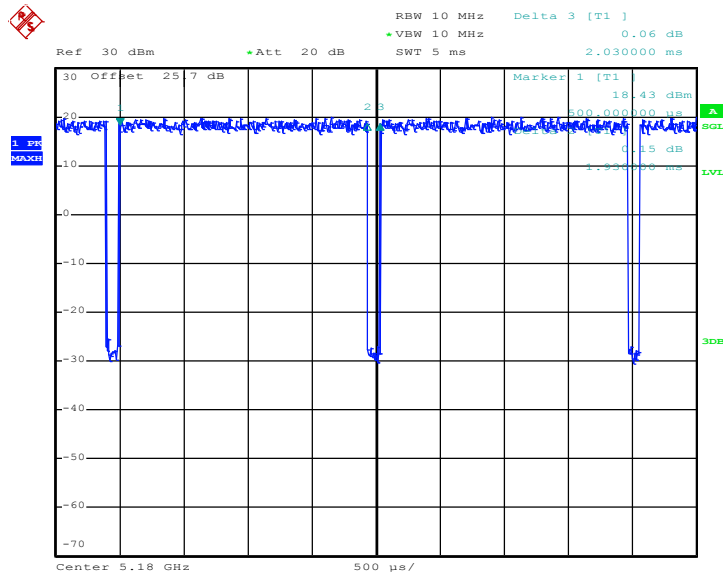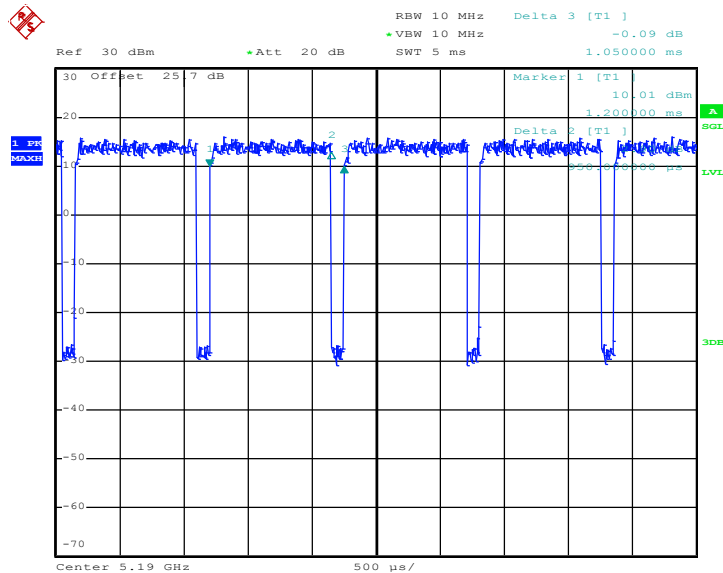802.11n HT20

802.11n HT40

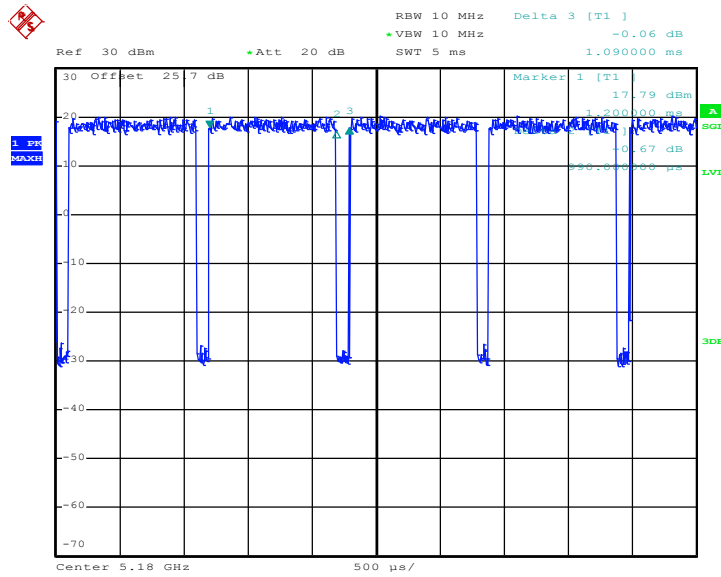
802.11ac VHT20

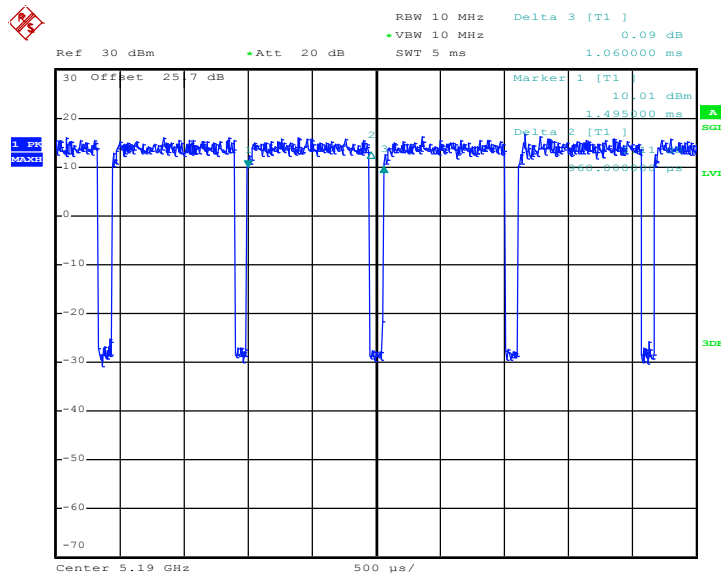




802.11ac VHT40









802.11ac VHT80

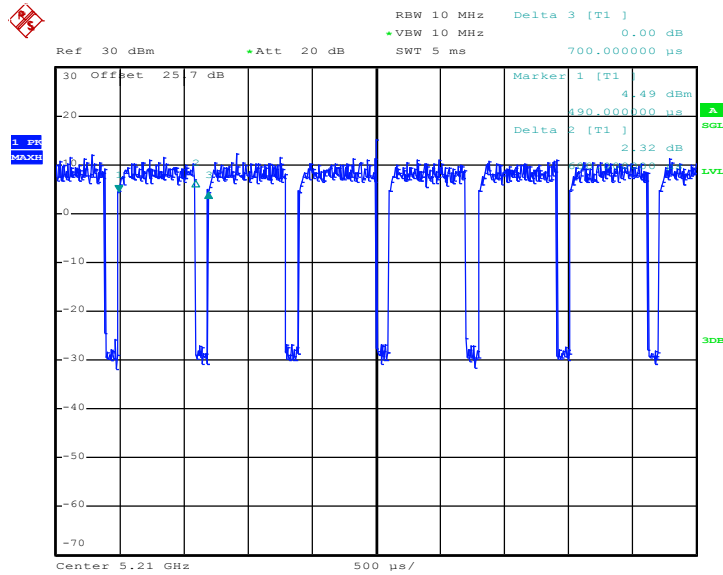

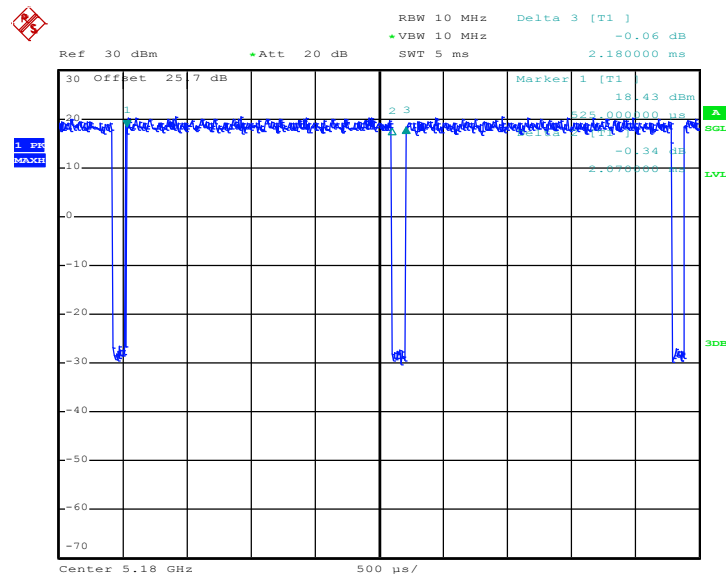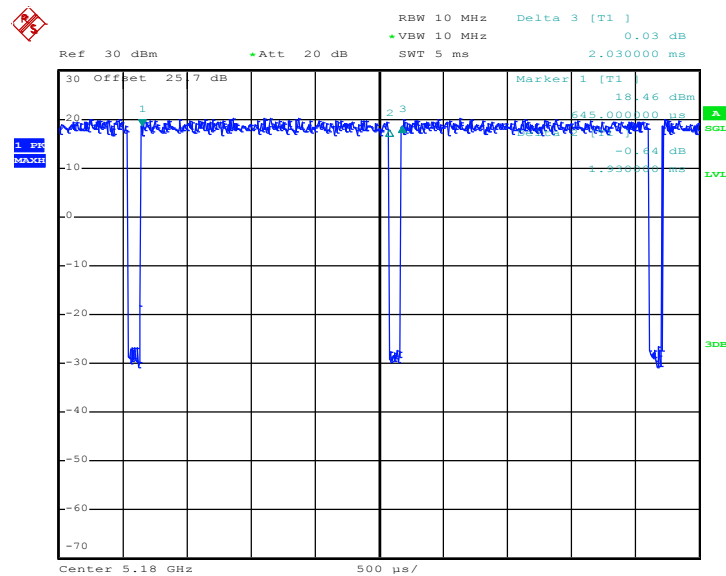MIMO <Ant. 1+2(2)>
802.11a

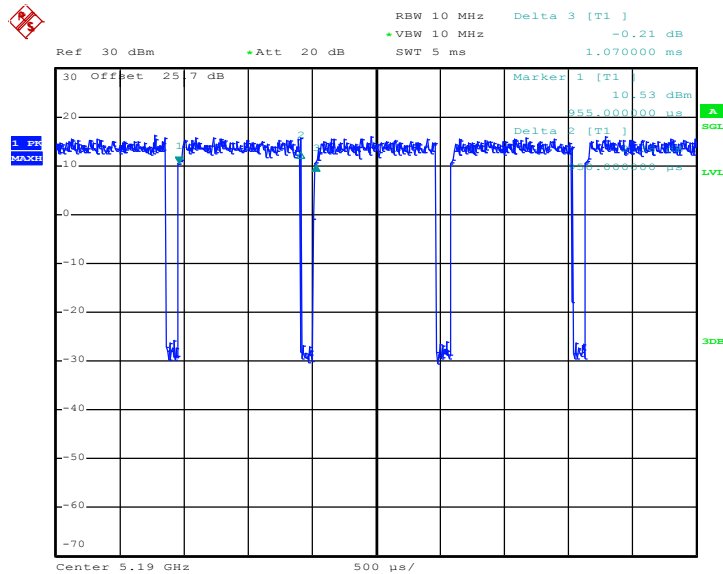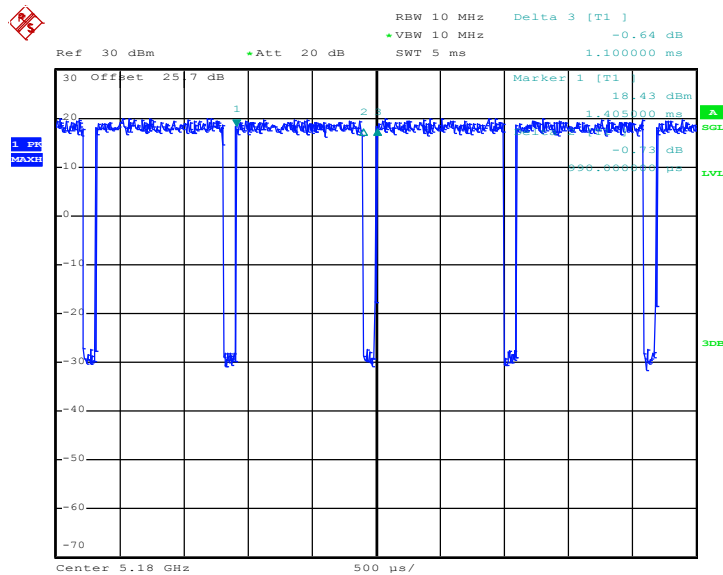802.11n HT20

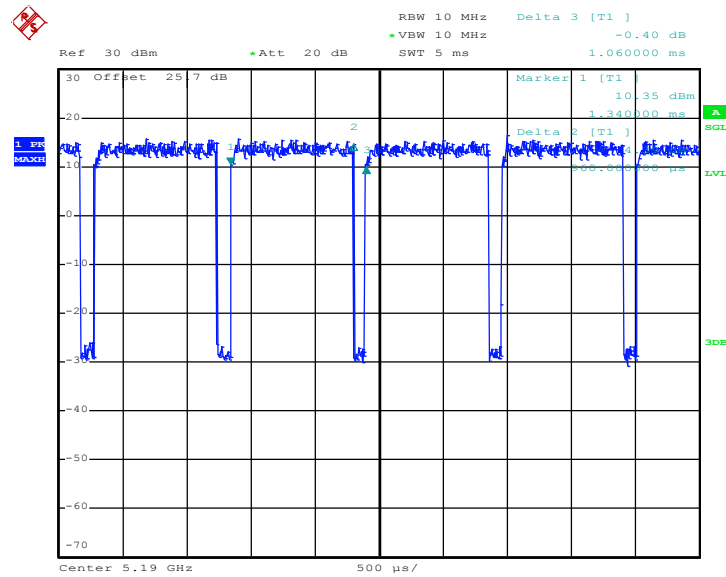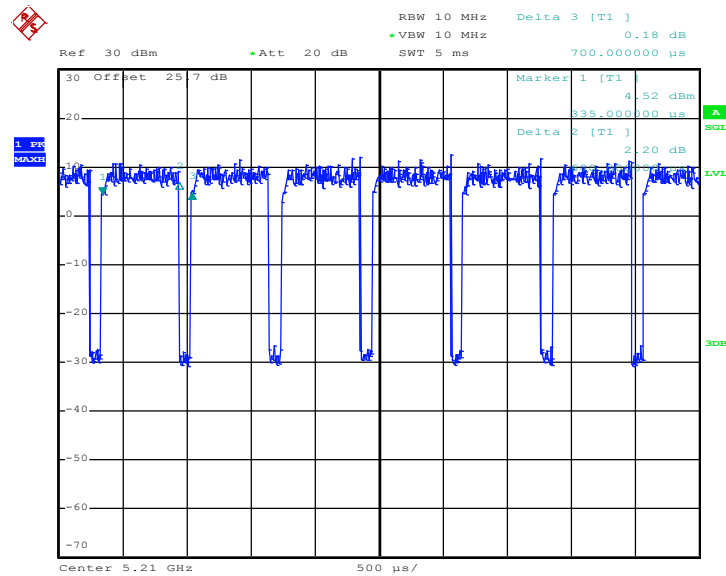
802.11n HT40

802.11ac VHT20


802.11ac VHT40

802.11ac VHT80




Appendix D. Original Report

Please refer to Sporton report number FR640145E as below.



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 6574
FCC ID : IHDT56VB2
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 01, 2016 and testing was completed on Apr. 29, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL INC.****No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56VB2

Page Number : 1 of 34

Report Issued Date : May 11, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.3



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Pre-Scanned RF Power	9
2.3 Test Mode	12
2.4 Connection Diagram of Test System.....	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	22
3.5 AC Conducted Emission Measurement.....	26
3.6 Frequency Stability Measurement	30
3.7 Automatically Discontinue Transmission	31
3.8 Antenna Requirements	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR640145E	Rev. 01	Initial issue of report	May 11, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm/MHz & 15.209(a)	Pass	Under limit 1.98 dB at 5713.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.60 dB at 0.630 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	6574
FCC ID	IHDT56VB2
IMEI Code	354108070054047 (for Radiated Spurious Emission) 354108070053932 (for AC Conducted Emission)
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM 2.4GHz WLAN 11b/g/n HT20 WLAN 11ac VHT20 5GHz WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 EDR Bluetooth v4.2 LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
AC Adapter	Brand Name : Motorola
	Model Name : SPN5912A

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification												
Tx/Rx Channel Frequency Range		5745 MHz ~ 5825 MHz										
Maximum Output Power		SISO <Ant. 1> 802.11a : 16.62 dBm / 0.0459 W 802.11n HT20 : 16.51 dBm / 0.0448 W 802.11n HT40 : 14.76 dBm / 0.0299 W 802.11ac VHT20: 16.72 dBm / 0.0470 W 802.11ac VHT40: 14.70 dBm / 0.0295 W 802.11ac VHT80: 13.64 dBm / 0.0231 W SISO <Ant. 2> 802.11a : 16.32 dBm / 0.0429 W 802.11n HT20 : 15.67 dBm / 0.0369 W 802.11n HT40 : 14.36 dBm / 0.0273 W 802.11ac VHT20: 16.40 dBm / 0.0437 W 802.11ac VHT40: 14.44 dBm / 0.0278 W 802.11ac VHT80: 13.57 dBm / 0.0228 W MIMO <Ant. 1 + 2> 802.11a : 18.93 dBm / 0.0782 W 802.11n HT20 : 18.31 dBm / 0.0678 W 802.11n HT40 : 17.12 dBm / 0.0515 W 802.11ac VHT20: 18.96 dBm / 0.0787 W 802.11ac VHT40: 17.09 dBm / 0.0512 W 802.11ac VHT80: 16.30 dBm / 0.0427 W										
99% Occupied Bandwidth		802.11a : 17.55 MHz 802.11n HT20 : 18.55 MHz 802.11n HT40 : 36.30 MHz 802.11ac VHT20 : 18.35 MHz 802.11ac VHT40 : 36.40 MHz 802.11ac VHT80 : 75.48 MHz										
Type of Modulation		802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)										
Antenna Type		Fixed Internal Antenna type (The antenna peak gain of EUT is less than 6 dBi)										
Antenna Function Description		<table><tr><td></td><td>Ant.1</td><td>Ant.2</td></tr><tr><td>802.11 a/a/n/ac SISO</td><td>V</td><td>V</td></tr><tr><td>802.11 a/n/ac MIMO</td><td>V</td><td>V</td></tr></table>			Ant.1	Ant.2	802.11 a/a/n/ac SISO	V	V	802.11 a/n/ac MIMO	V	V
	Ant.1	Ant.2										
802.11 a/a/n/ac SISO	V	V										
802.11 a/n/ac MIMO	V	V										

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805
	155	5775	165	5825

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables.

SISO <Ant. Port 1>

Channel	Frequency	5GHz 802.11a Average Power (dBm)							
		Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 149	5745 MHz	16.62	16.51	16.54	15.87	15.50	15.23	14.55	14.18
CH 157	5785 MHz	16.11	15.86	15.74	15.30	14.89	14.79	14.15	13.81
CH 165	5825 MHz	16.15	16.04	16.04	15.64	15.11	15.16	14.42	13.90

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745 MHz	16.51	16.27	16.42	15.72	15.73	15.77	14.08	13.98
CH 157	5785 MHz	16.16	15.85	16.03	15.35	15.30	14.47	13.38	13.29
CH 165	5825 MHz	15.89	15.76	15.82	14.98	14.95	14.31	13.23	13.13

Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 151	5755 MHz	14.76	14.73	14.66	13.64	13.82	13.81	13.82	12.98
CH 159	5795 MHz	14.60	14.52	14.56	13.60	13.61	13.63	13.49	12.70

Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 149	5745 MHz	16.72	16.26	16.37	15.44	15.59	14.84	14.00	13.00	12.26
CH 157	5785 MHz	16.14	15.81	15.91	15.07	15.02	14.22	13.33	12.45	11.46
CH 165	5825 MHz	16.28	15.84	15.95	15.09	15.03	14.17	13.31	12.32	11.53

Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 151	5755 MHz	14.70	14.45	14.59	13.58	13.35	13.34	13.36	12.59	10.30	8.44
CH 159	5795 MHz	14.48	14.38	14.44	13.47	13.44	13.40	13.22	12.39	10.04	8.04

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 155	5775 MHz	13.64	13.61	13.63	13.58	13.60	13.33	13.20	12.28	9.26	8.28



SISO <Ant. Port 2>

Channel	Frequency	5GHz 802.11a Average Power (dBm)							
		Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 149	5745 MHz	16.32	16.14	16.28	15.65	15.09	15.05	14.32	14.67
CH 157	5785 MHz	16.11	15.90	15.83	15.09	14.58	14.56	13.91	14.01
CH 165	5825 MHz	15.70	15.65	15.64	15.02	14.42	14.32	13.59	13.80

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745 MHz	15.67	15.57	15.62	14.77	14.87	14.01	13.47	13.48
CH 157	5785 MHz	15.22	15.16	15.20	14.25	14.18	13.29	12.75	12.63
CH 165	5825 MHz	15.14	14.90	15.12	14.01	13.95	13.21	12.47	12.28

Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 151	5755 MHz	14.36	14.33	14.30	13.35	13.33	13.42	13.59	12.64
CH 159	5795 MHz	13.89	13.74	13.80	13.83	13.00	12.85	13.16	12.23

Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 149	5745 MHz	16.40	16.24	16.38	15.39	15.41	14.49	14.04	13.09	12.21
CH 157	5785 MHz	15.90	15.70	15.67	14.52	14.76	13.90	13.19	12.27	11.43
CH 165	5825 MHz	15.19	15.14	15.09	14.14	14.15	13.22	12.21	12.25	10.43

Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 151	5755 MHz	14.44	14.31	14.26	13.32	13.40	13.22	13.53	12.62	10.49	8.60
CH 159	5795 MHz	14.08	13.93	14.06	13.10	13.04	13.00	13.08	12.19	10.13	8.28

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 155	5775 MHz	13.57	13.55	13.56	13.54	13.56	13.12	13.26	12.45	9.35	8.42

MIMO <Ant. 1+2>

Channel	Frequency	5GHz 802.11a Average Power (dBm)							
		Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 149	5745 MHz	18.93	18.79	18.83	18.89	17.77	18.00	17.53	17.46
CH 157	5785 MHz	18.45	18.22	18.28	18.08	17.51	17.42	16.69	16.98
CH 165	5825 MHz	18.34	18.09	18.22	17.91	17.11	17.33	16.70	16.68

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745 MHz	18.27	18.20	18.21	17.45	17.58	17.29	16.44	16.55
CH 157	5785 MHz	17.86	17.79	17.84	17.15	17.20	16.52	15.88	15.84
CH 165	5825 MHz	18.31	18.08	18.05	17.12	17.06	16.62	16.52	16.50

Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 151	5755 MHz	17.12	17.03	17.10	16.34	16.61	16.62	16.75	15.96
CH 159	5795 MHz	16.86	16.80	16.85	16.08	16.34	16.26	16.19	15.40

Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 149	5745 MHz	18.96	18.65	18.91	17.87	17.99	17.40	16.98	15.93	15.18
CH 157	5785 MHz	18.51	18.30	18.44	17.64	17.78	16.94	16.16	15.38	14.48
CH 165	5825 MHz	18.28	18.18	18.26	17.42	17.59	17.05	16.24	15.23	14.49

Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 151	5755 MHz	17.09	16.94	16.93	16.07	16.27	16.26	16.36	15.49	13.79	11.56
CH 159	5795 MHz	16.68	16.66	16.67	15.76	15.81	15.90	15.93	15.02	13.29	11.13

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 155	5775 MHz	16.30	16.29	16.29	16.29	16.29	16.06	16.25	15.62	12.53	11.59

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Adapter + MP3

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

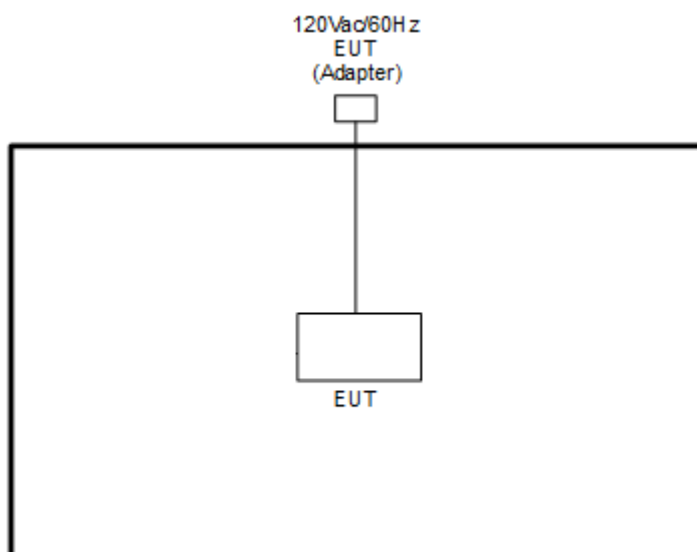

<AC Conducted Emission Mode>

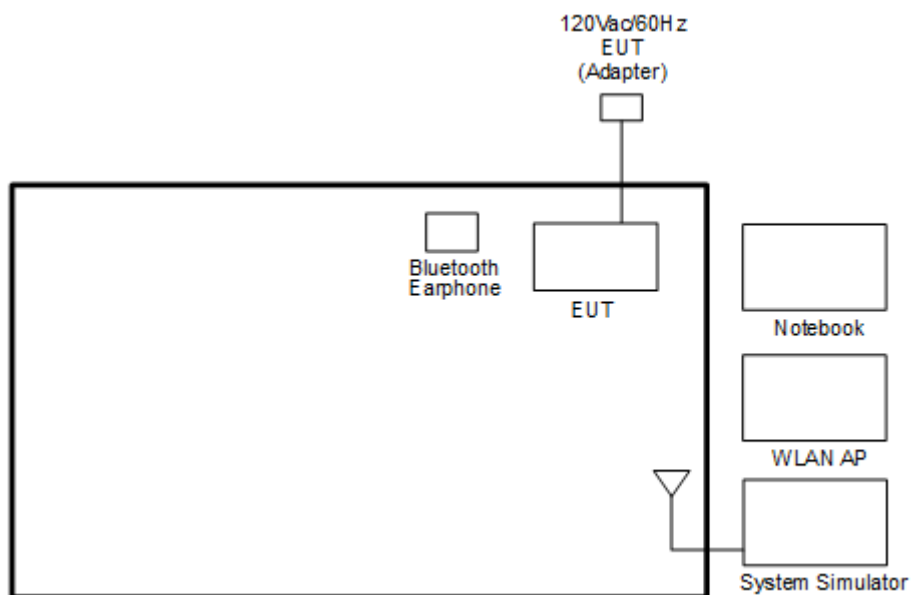



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

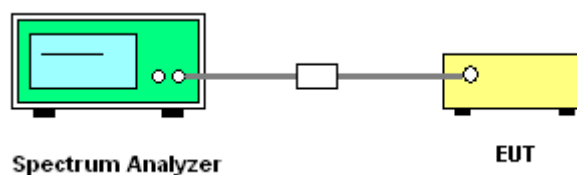




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

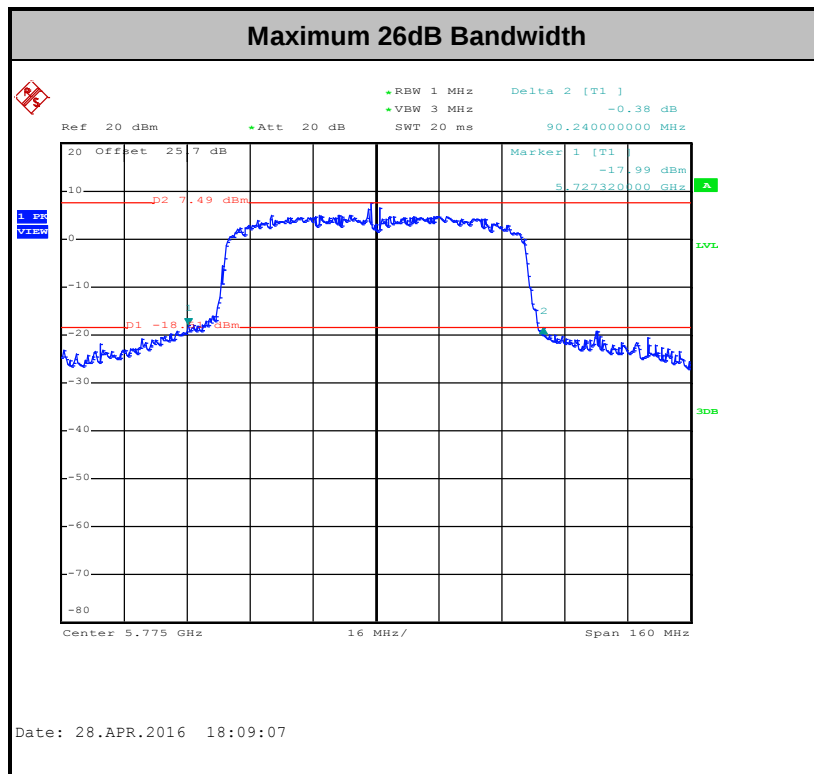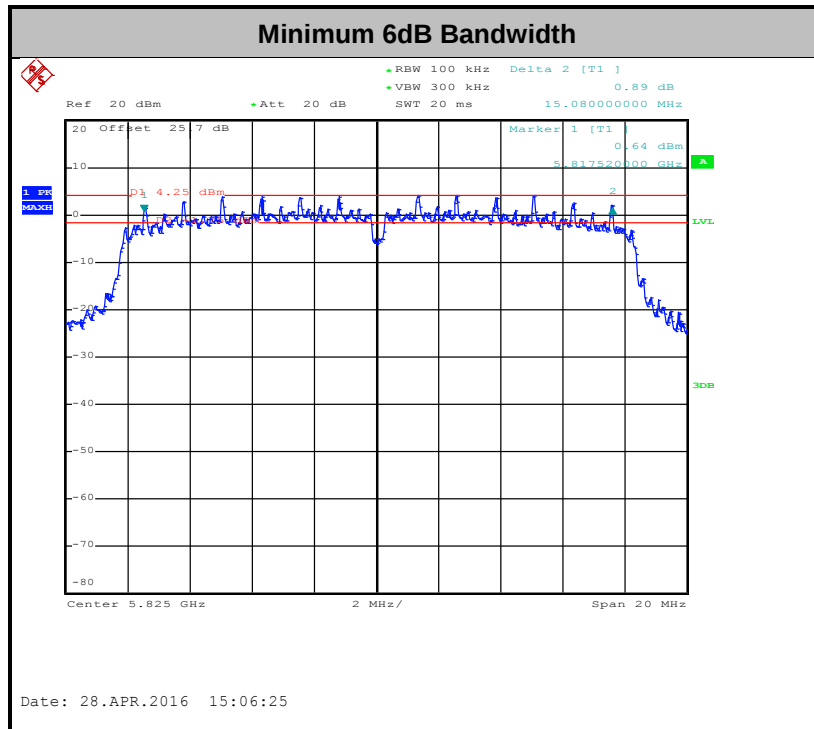

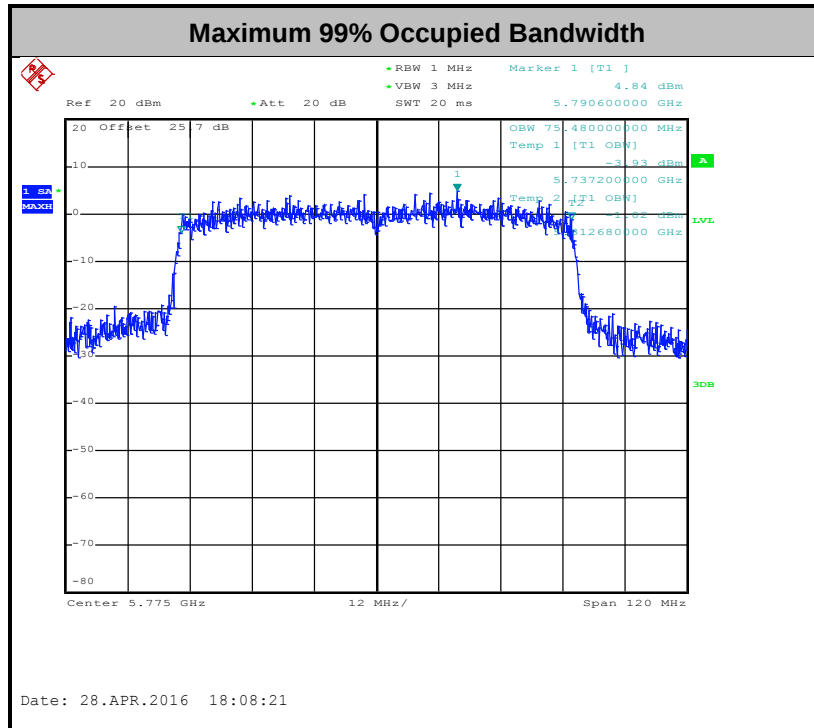

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

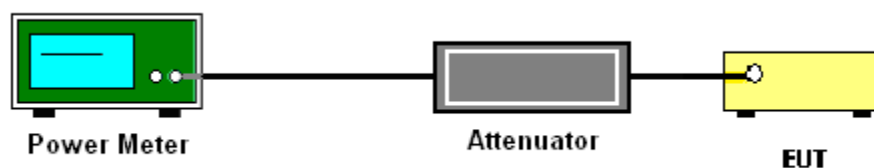

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.



3.3.4 Test Setup

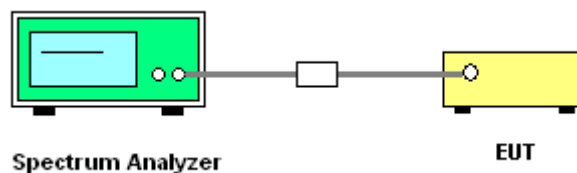



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

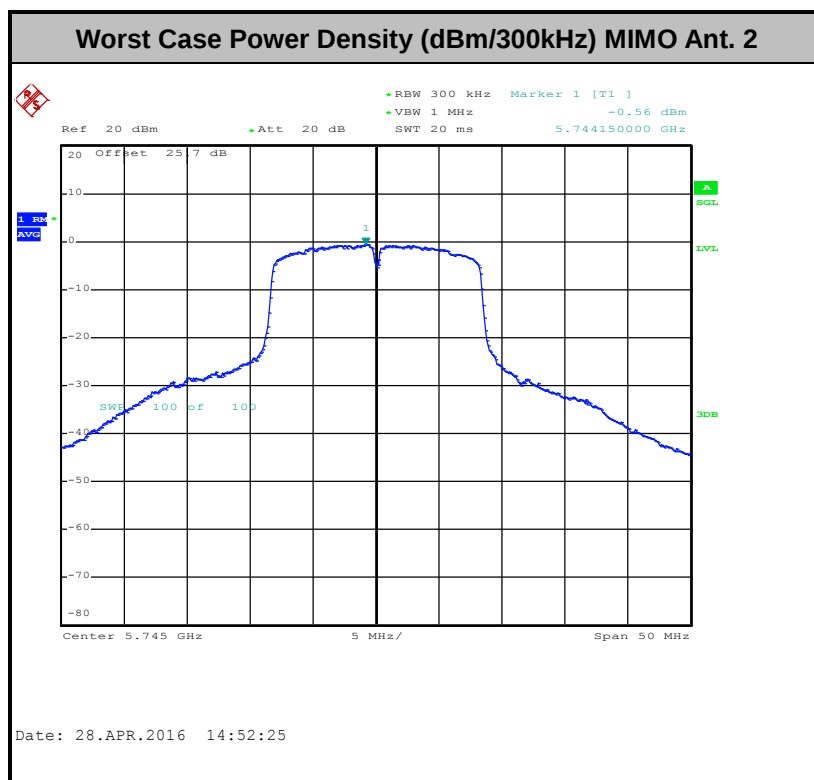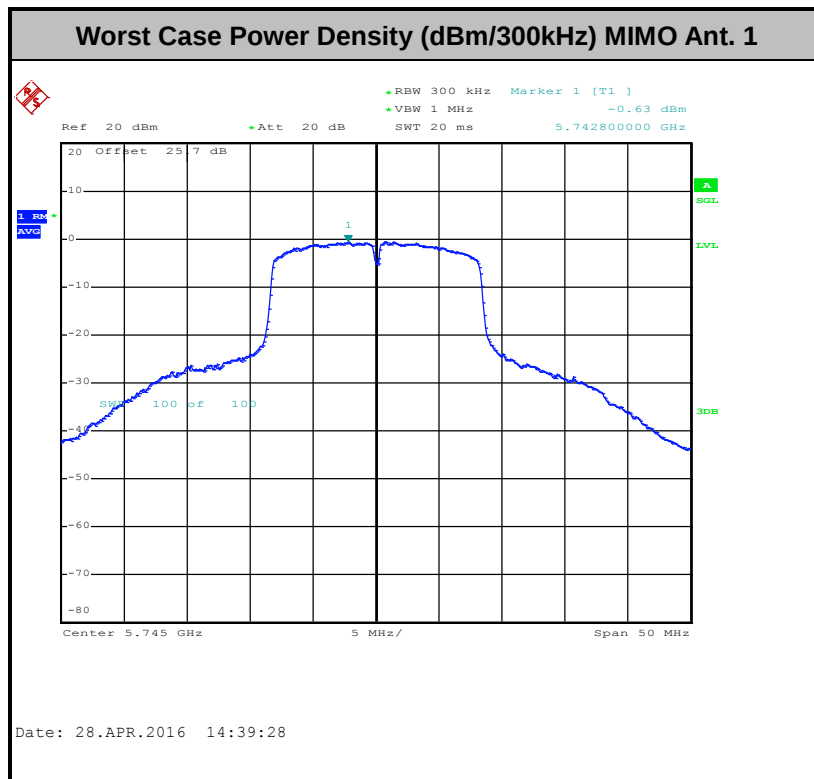

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB 789033 D02 General UNII Test Procedures New Rules v01r02 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

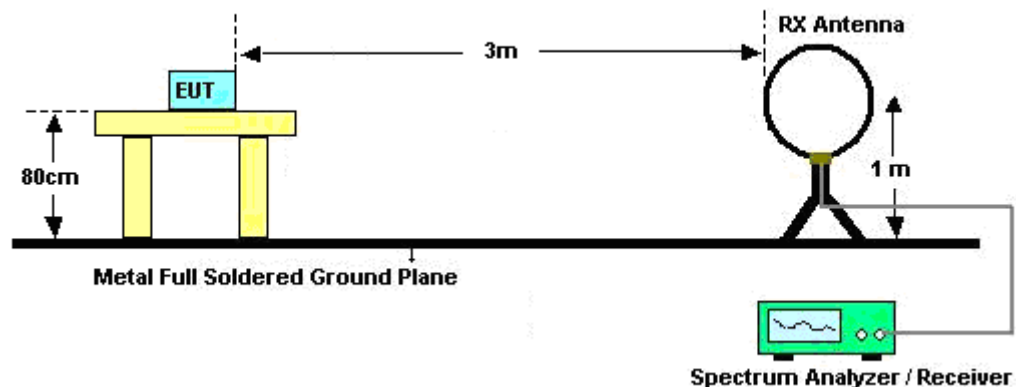

For radiated emissions from 30MHz to 1GHz

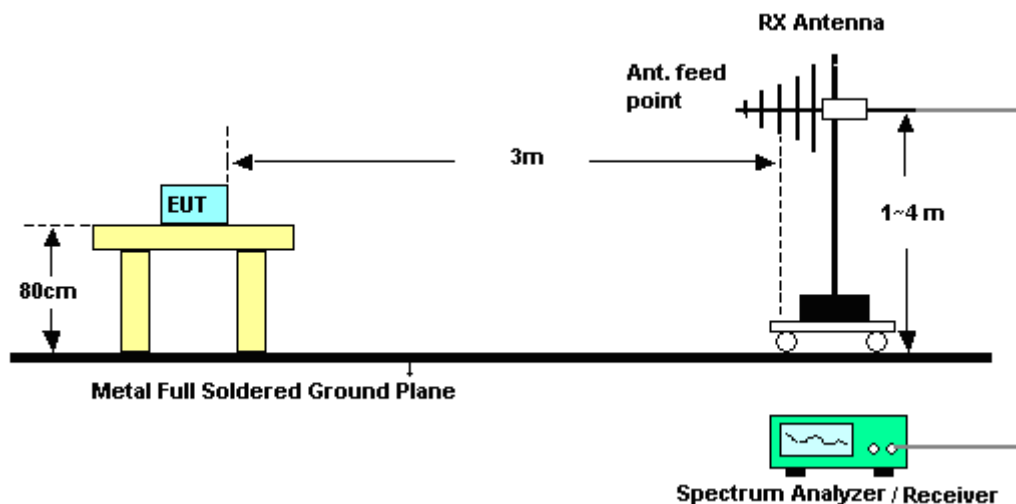

For radiated emissions above 1GHz

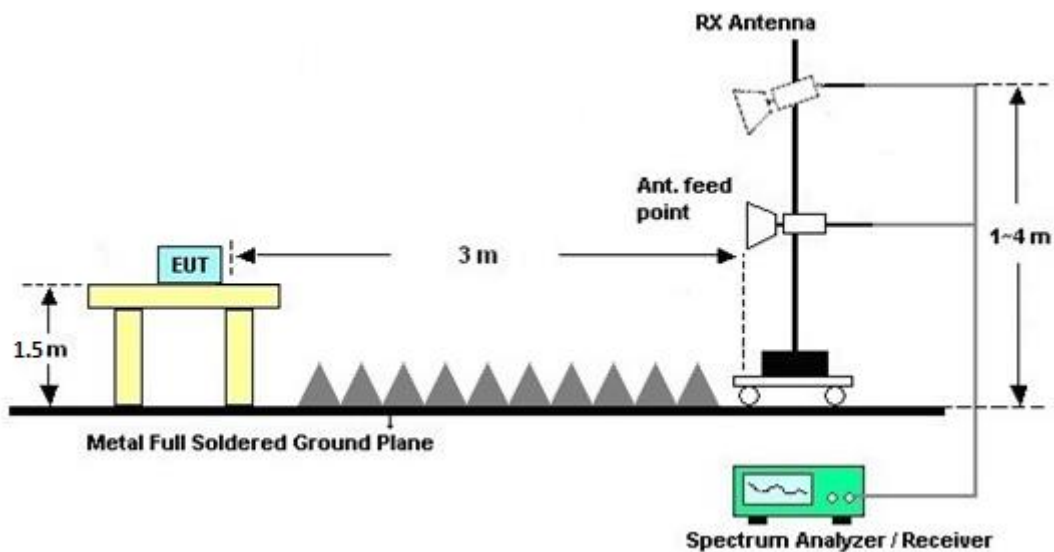

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

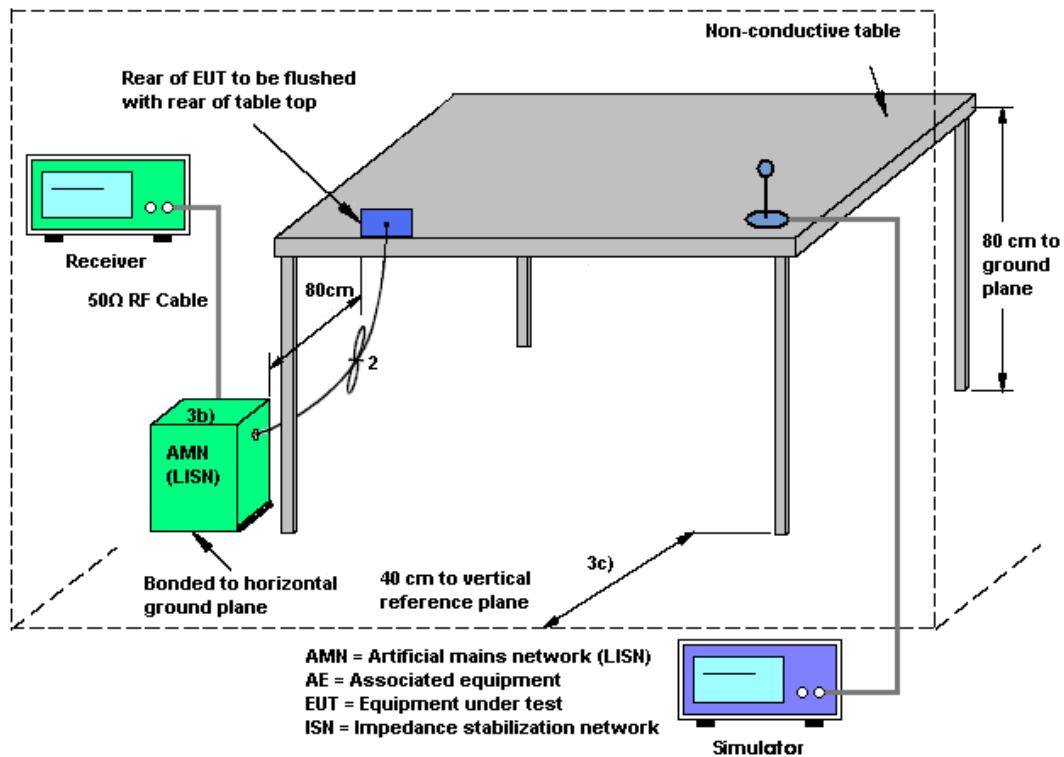

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22℃
Test Engineer :	Kai-Chun Chu	Relative Humidity :	50~51%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Adapter + MP3		

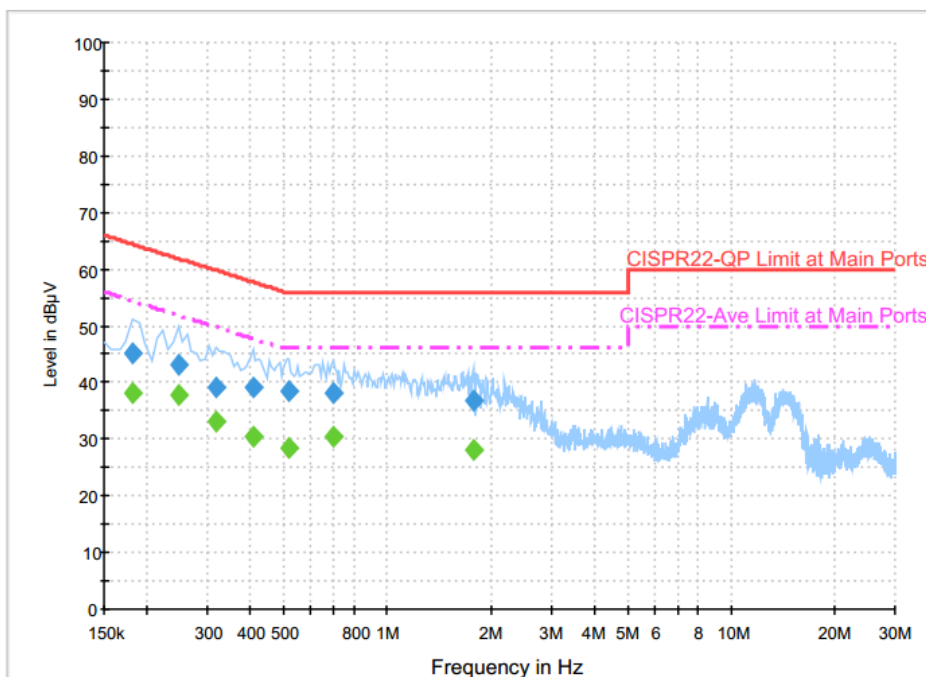

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	45.0	Off	L1	19.6	19.4	64.4
0.246000	43.3	Off	L1	19.6	18.6	61.9
0.318000	39.2	Off	L1	19.6	20.6	59.8
0.406000	39.0	Off	L1	19.6	18.7	57.7
0.518000	38.3	Off	L1	19.6	17.7	56.0
0.694000	38.2	Off	L1	19.6	17.8	56.0
1.782000	36.6	Off	L1	19.6	19.4	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	38.0	Off	L1	19.6	16.4	54.4
0.246000	37.6	Off	L1	19.6	14.3	51.9
0.318000	33.0	Off	L1	19.6	16.8	49.8
0.406000	30.4	Off	L1	19.6	17.3	47.7
0.518000	28.3	Off	L1	19.6	17.7	46.0
0.694000	30.6	Off	L1	19.6	15.4	46.0
1.782000	28.1	Off	L1	19.6	17.9	46.0



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	50~51%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Adapter + MP3		

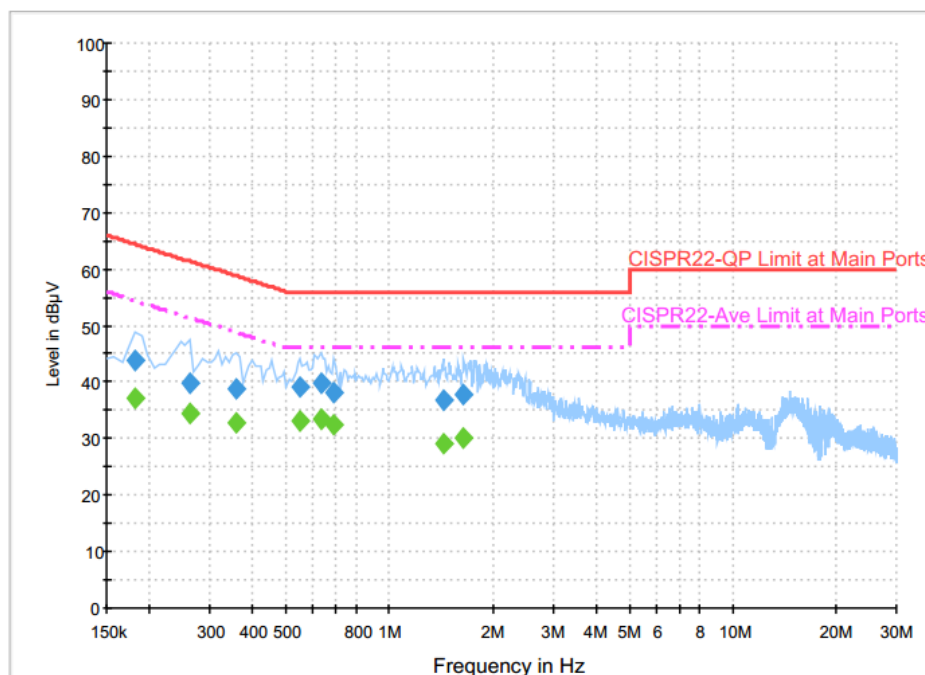**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	43.7	Off	N	19.6	20.7	64.4
0.262000	39.9	Off	N	19.6	21.5	61.4
0.358000	38.7	Off	N	19.6	20.1	58.8
0.550000	39.2	Off	N	19.6	16.8	56.0
0.630000	39.7	Off	N	19.6	16.3	56.0
0.686000	38.0	Off	N	19.6	18.0	56.0
1.438000	36.7	Off	N	19.6	19.3	56.0
1.646000	38.0	Off	N	19.6	18.0	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	37.3	Off	N	19.6	17.1	54.4
0.262000	34.5	Off	N	19.6	16.9	51.4
0.358000	32.9	Off	N	19.6	15.9	48.8
0.550000	33.1	Off	N	19.6	12.9	46.0
0.630000	33.4	Off	N	19.6	12.6	46.0
0.686000	32.4	Off	N	19.6	13.6	46.0
1.438000	29.1	Off	N	19.6	16.9	46.0
1.646000	30.1	Off	N	19.6	15.9	46.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

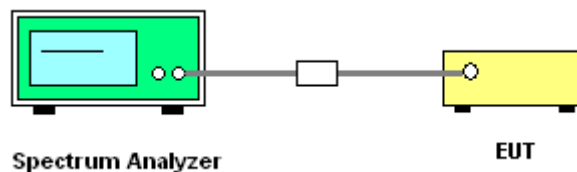

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 1	Ant 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	-2.50	-4.90	-2.50	-0.61	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Jul. 29, 2015	Apr. 16, 2016 ~ Apr. 29, 2016	Jul. 28, 2016	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 29, 2015	Apr. 16, 2016 ~ Apr. 29, 2016	Jul. 28, 2016	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 18, 2015	Apr. 16, 2016 ~ Apr. 29, 2016	Jun. 17, 2016	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 06, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Apr. 06, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Apr. 06, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Sep. 01, 2016	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Nov. 19, 2016	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Nov. 16, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 08, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Oct. 07, 2016	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 19, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Nov. 18, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jul. 01, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Jun. 30, 2016	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Sep. 23, 2016	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 19, 2016 ~ Apr. 26, 2016	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Apr. 19, 2016 ~ Apr. 26, 2016	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 02, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Nov. 01, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Apr. 19, 2016 ~ Apr. 26, 2016	Jun. 01, 2016	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90
---	------



Appendix A. Conducted Test Results

Test Engineer:	AC Chang	Temperature:	21~25	°C
Test Date:	2016/04/16 ~ 2016/04/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.22	0.25	16.62	16.32		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	1	157	5785	0.22	0.25	16.11	16.11		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	1	165	5825	0.22	0.25	16.15	15.70		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	149	5745	0.24	0.22	16.51	15.67		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	157	5785	0.24	0.22	16.16	15.22		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	165	5825	0.24	0.22	15.89	15.14		30.00	30.00	-2.50	-4.90	Pass
HT40	MCS0	1	151	5755	0.48	0.43	14.76	14.36		30.00	30.00	-2.50	-4.90	Pass
HT40	MCS0	1	159	5795	0.48	0.43	14.60	13.89		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	149	5745	0.46	0.42	16.72	16.40		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	157	5785	0.46	0.42	16.14	15.90		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	165	5825	0.46	0.42	16.28	15.19		30.00	30.00	-2.50	-4.90	Pass
VHT40	MCS0	1	151	5755	0.48	0.48	14.70	14.44		30.00	30.00	-2.50	-4.90	Pass
VHT40	MCS0	1	159	5795	0.48	0.48	14.48	14.08		30.00	30.00	-2.50	-4.90	Pass
VHT80	MCS0	1	155	5775	0.67	0.67	13.64	13.57		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	2	149	5745	0.24	0.22	15.95	15.87	18.93	30.00		-2.50		Pass
11a	6Mbps	2	157	5785	0.24	0.22	15.56	15.31	18.45	30.00		-2.50		Pass
11a	6Mbps	2	165	5825	0.24	0.22	15.49	15.15	18.34	30.00		-2.50		Pass
HT20	MCS0	2	149	5745	0.22	0.22	15.33	15.18	18.27	30.00		-2.50		Pass
HT20	MCS0	2	157	5785	0.22	0.22	14.99	14.70	17.86	30.00		-2.50		Pass
HT20	MCS0	2	165	5825	0.22	0.22	15.42	15.18	18.31	30.00		-2.50		Pass
HT40	MCS0	2	151	5755	0.43	0.52	14.14	14.07	17.12	30.00		-2.50		Pass
HT40	MCS0	2	159	5795	0.43	0.52	14.10	13.58	16.86	30.00		-2.50		Pass
VHT20	MCS0	2	149	5745	0.42	0.46	15.99	15.90	18.96	30.00		-2.50		Pass
VHT20	MCS0	2	157	5785	0.42	0.46	15.62	15.38	18.51	30.00		-2.50		Pass
VHT20	MCS0	2	165	5825	0.42	0.46	15.34	15.20	18.28	30.00		-2.50		Pass
VHT40	MCS0	2	151	5755	0.43	0.43	14.10	14.05	17.09	30.00		-2.50		Pass
VHT40	MCS0	2	159	5795	0.43	0.43	14.00	13.32	16.68	30.00		-2.50		Pass
VHT80	MCS0	2	155	5775	0.67	0.67	13.36	13.22	16.30	30.00		-2.50		Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	17.20	17.15	33.30	29.40	15.12	15.14	0.5	0.5	Pass
11a	6Mbps	1	157	5785	17.25	17.10	29.50	27.40	15.12	15.14	0.5	0.5	Pass
11a	6Mbps	1	165	5825	17.10	17.05	28.10	27.40	15.14	15.12	0.5	0.5	Pass
HT20	MCS0	1	149	5745	18.15	18.45	27.90	36.90	15.10	15.12	0.5	0.5	Pass
HT20	MCS0	1	157	5785	18.25	18.10	30.10	25.30	15.10	15.10	0.5	0.5	Pass
HT20	MCS0	1	165	5825	18.15	18.10	29.00	24.30	15.12	15.14	0.5	0.5	Pass
HT40	MCS0	1	151	5755	36.30	36.30	50.58	43.02	35.12	35.12	0.5	0.5	Pass
HT40	MCS0	1	159	5795	36.20	36.10	46.26	43.92	35.12	35.12	0.5	0.5	Pass
VHT20	MCS0	1	149	5745	18.20	18.05	28.70	27.10	15.10	15.10	0.5	0.5	Pass
VHT20	MCS0	1	157	5785	18.25	18.10	28.50	24.20	15.14	15.10	0.5	0.5	Pass
VHT20	MCS0	1	165	5825	18.15	18.00	31.70	24.50	15.14	15.14	0.5	0.5	Pass
VHT40	MCS0	1	151	5755	36.30	36.20	46.80	45.36	35.12	35.12	0.5	0.5	Pass
VHT40	MCS0	1	159	5795	36.30	36.20	46.08	42.30	35.04	35.12	0.5	0.5	Pass
VHT80	MCS0	1	155	5775	75.48	75.24	90.24	82.24	74.96	74.96	0.5	0.5	Pass
11a	6Mbps	2	149	5745	17.55	17.20	33.30	29.80	15.12	15.12	0.5		Pass
11a	6Mbps	2	157	5785	17.40	17.10	32.00	27.60	15.10	15.10	0.5		Pass
11a	6Mbps	2	165	5825	17.20	16.95	30.90	27.30	15.12	15.08	0.5		Pass
HT20	MCS0	2	149	5745	18.55	18.50	37.80	35.00	15.12	15.14	0.5		Pass
HT20	MCS0	2	157	5785	18.45	18.35	35.30	31.90	15.08	15.10	0.5		Pass
HT20	MCS0	2	165	5825	18.20	18.20	28.60	28.40	15.10	15.10	0.5		Pass
HT40	MCS0	2	151	5755	36.30	36.20	49.86	44.10	35.04	35.04	0.5		Pass
HT40	MCS0	2	159	5795	36.30	36.20	51.12	55.26	35.04	35.04	0.5		Pass
VHT20	MCS0	2	149	5745	18.35	18.10	34.40	26.70	15.08	15.10	0.5		Pass
VHT20	MCS0	2	157	5785	18.30	18.05	29.80	25.90	15.12	15.10	0.5		Pass
VHT20	MCS0	2	165	5825	18.20	18.35	30.70	28.50	15.12	15.14	0.5		Pass
VHT40	MCS0	2	151	5755	36.30	36.20	53.28	46.26	35.00	35.04	0.5		Pass
VHT40	MCS0	2	159	5795	36.40	36.20	46.44	42.12	35.04	35.04	0.5		Pass
VHT80	MCS0	2	155	5775	75.48	75.12	89.28	85.12	75.12	75.04	0.5		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.22	0.25	2.22	2.22	3.13	2.56		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	1	157	5785	0.22	0.25	2.22	2.22	2.31	2.35		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	1	165	5825	0.22	0.25	2.22	2.22	2.50	2.44		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	149	5745	0.24	0.22	2.22	2.22	1.96	1.49		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	157	5785	0.24	0.22	2.22	2.22	1.66	1.82		30.00	30.00	-2.50	-4.90	Pass
HT20	MCS0	1	165	5825	0.24	0.22	2.22	2.22	2.23	1.88		30.00	30.00	-2.50	-4.90	Pass
HT40	MCS0	1	151	5755	0.48	0.43	2.22	2.22	-2.63	-2.93		30.00	30.00	-2.50	-4.90	Pass
HT40	MCS0	1	159	5795	0.48	0.43	2.22	2.22	-2.81	-2.88		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	149	5745	0.46	0.42	2.22	2.22	2.39	2.01		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	157	5785	0.46	0.42	2.22	2.22	1.79	1.89		30.00	30.00	-2.50	-4.90	Pass
VHT20	MCS0	1	165	5825	0.46	0.42	2.22	2.22	2.25	1.91		30.00	30.00	-2.50	-4.90	Pass
VHT40	MCS0	1	151	5755	0.48	0.48	2.22	2.22	-3.07	-3.10		30.00	30.00	-2.50	-4.90	Pass
VHT40	MCS0	1	159	5795	0.48	0.48	2.22	2.22	-3.16	-3.44		30.00	30.00	-2.50	-4.90	Pass
VHT80	MCS0	1	155	5775	0.67	0.67	2.22	2.22	-6.50	-6.79		30.00	30.00	-2.50	-4.90	Pass
11a	6Mbps	2	149	5745	0.24	0.22	2.22				4.89	30.00		-0.61		Pass
11a	6Mbps	2	157	5785	0.24	0.22	2.22				4.58	30.00		-0.61		Pass
11a	6Mbps	2	165	5825	0.24	0.22	2.22				4.77	30.00		-0.61		Pass
HT20	MCS0	2	149	5745	0.22	0.22	2.22				3.88	30.00		-0.61		Pass
HT20	MCS0	2	157	5785	0.22	0.22	2.22				3.49	30.00		-0.61		Pass
HT20	MCS0	2	165	5825	0.22	0.22	2.22				4.04	30.00		-0.61		Pass
HT40	MCS0	2	151	5755	0.43	0.52	2.22				-0.19	30.00		-0.61		Pass
HT40	MCS0	2	159	5795	0.43	0.52	2.22				-0.49	30.00		-0.61		Pass
VHT20	MCS0	2	149	5745	0.42	0.46	2.22				4.65	30.00		-0.61		Pass
VHT20	MCS0	2	157	5785	0.42	0.46	2.22				4.16	30.00		-0.61		Pass
VHT20	MCS0	2	165	5825	0.42	0.46	2.22				4.37	30.00		-0.61		Pass
VHT40	MCS0	2	151	5755	0.43	0.43	2.22				-0.28	30.00		-0.61		Pass
VHT40	MCS0	2	159	5795	0.43	0.43	2.22				-0.79	30.00		-0.61		Pass
VHT80	MCS0	2	155	5775	0.67	0.67	2.22				-3.87	30.00		-0.61		Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	3.4	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	4.35	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	3.8	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	-30	3.8	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	50	3.8	



Appendix B. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Bill Chang, and Ken Wu	Temperature :	20~23°C
		Relative Humidity :	50~55%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5704.36	57.96	-16.04	74	48.58	32.29	10.65	33.56	100	119	P	H
		5724.84	68.18	-10.12	78.3	58.79	32.31	10.65	33.57	100	119	P	H
		5714.76	47.77	-6.23	54	38.4	32.29	10.65	33.57	100	119	A	H
	*	5745	104.2	-	-	94.8	32.34	10.63	33.57	100	119	P	H
	*	5745	95.7	-	-	86.3	32.34	10.63	33.57	100	119	A	H
													H
													H
													H
		5712.36	50.83	-23.17	74	41.46	32.29	10.65	33.57	191	94	P	V
		5723.72	63.69	-14.61	78.3	54.3	32.31	10.65	33.57	191	94	P	V
		5714.76	44.46	-9.54	54	35.09	32.29	10.65	33.57	191	94	A	V
	*	5745	98.75	-	-	89.35	32.34	10.63	33.57	191	94	P	V
	*	5745	91.08	-	-	81.68	32.34	10.63	33.57	191	94	A	V
													V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5697.64	49.09	-24.91	74	38.42	-500	10.67	-500	100	116	P	H
		5715.16	48.63	-29.67	78.3	37.98	-500	10.65	-500	100	116	P	H
		5712.28	40.79	-13.21	54	30.14	-500	10.65	-500	100	116	A	H
	*	5785	103.79	-	-	93.18	-500	10.61	-500	100	116	P	H
	*	5785	95.86	-	-	85.25	-500	10.61	-500	100	116	A	H
		5860	48.91	-25.09	74	38.13	-500	10.78	-500	100	116	P	H
		5881.6	50.24	-23.76	74	39.3	-500	10.94	-500	100	116	P	H
		5866.32	41	-13	54	30.06	-500	10.94	-500	100	116	A	H
		5694.2	49.11	-24.89	74	38.44	-500	10.67	-500	245	88	P	V
		5716.52	48.42	-29.88	78.3	37.77	-500	10.65	-500	245	88	P	V
		5706.52	40.55	-13.45	54	29.9	-500	10.65	-500	245	88	A	V
	*	5785	100.73	-	-	90.12	-500	10.61	-500	245	88	P	V
	*	5785	92.95	-	-	82.34	-500	10.61	-500	245	88	A	V
		5855.6	50.09	-28.21	78.3	39.31	-500	10.78	-500	245	88	P	V
		5874.72	49.88	-24.12	74	38.94	-500	10.94	-500	245	88	P	V
		5867.92	41.22	-12.78	54	30.28	-500	10.94	-500	245	88	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	100.42	-	-	90.78	32.46	10.78	33.6	100	119	P	H
	*	5825	93.31	-	-	83.67	32.46	10.78	33.6	100	119	A	H
		5853.84	55.25	-23.05	78.3	45.57	32.51	10.78	33.61	100	119	P	H
		5863.84	51.94	-22.06	74	42.11	32.51	10.94	33.62	100	119	P	H
		5861.2	43.73	-10.27	54	33.9	32.51	10.94	33.62	100	119	A	H
													H
													H
													H
	*	5825	98.22	-	-	88.58	32.46	10.78	33.6	370	77	P	V
	*	5825	91.15	-	-	81.51	32.46	10.78	33.6	370	77	A	V
		5856.56	53.52	-24.78	78.3	43.84	32.51	10.78	33.61	370	77	P	V
		5876.16	49.57	-24.43	74	39.72	32.53	10.94	33.62	370	77	P	V
		5863.12	42.09	-11.91	54	32.26	32.51	10.94	33.62	370	77	A	V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	55.22	-18.78	74	65.46	39.91	15.59	65.74	194	71	P	H
		11490	45.86	-8.14	54	56.1	39.91	15.59	65.74	194	71	A	H
		17235	43.1	-30.9	74	47.58	41	18.6	64.08	100	0	P	H
													H
		11490	48.15	-25.85	74	58.39	39.91	15.59	65.74	100	0	P	V
		17235	42.39	-31.61	74	46.87	41	18.6	64.08	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	55.4	-18.6	74	65.66	39.76	15.64	65.66	184	72	P	H
		11570	46.22	-7.78	54	56.48	39.76	15.64	65.66	184	72	A	H
		17355	43.14	-30.86	74	47.36	41.35	18.65	64.22	100	0	P	H
													H
		11570	47.61	-26.39	74	57.87	39.76	15.64	65.66	100	0	P	V
		17355	41.38	-32.62	74	45.6	41.35	18.65	64.22	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	58.44	-15.56	74	68.75	39.62	15.69	65.62	180	5	P	H
		11650	47.48	-6.52	54	57.79	39.62	15.69	65.62	180	5	A	H
		17475	42.4	-31.6	74	46.36	41.7	18.7	64.36	100	0	P	H
													H
		11650	50	-24	74	60.31	39.62	15.69	65.62	100	0	P	V
		17475	41.83	-32.17	74	45.79	41.7	18.7	64.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5714.36	56.08	-17.92	74	46.71	32.29	10.65	33.57	100	114	P	H
		5723.32	70.31	-7.99	78.3	60.92	32.31	10.65	33.57	100	114	P	H
		5714.92	48.41	-5.59	54	39.04	32.29	10.65	33.57	100	114	A	H
	*	5745	104.31	-	-	94.91	32.34	10.63	33.57	100	114	P	H
	*	5745	96.82	-	-	87.42	32.34	10.63	33.57	100	114	A	H
													H
													H
													H
		5698.28	53.89	-20.11	74	44.51	32.27	10.67	33.56	400	90	P	V
		5724.44	65.8	-12.5	78.3	56.41	32.31	10.65	33.57	400	90	P	V
		5715	44.54	-9.46	54	35.17	32.29	10.65	33.57	400	90	A	V
	*	5745	100.71	-	-	91.31	32.34	10.63	33.57	400	90	P	V
	*	5745	93.42	-	-	84.02	32.34	10.63	33.57	400	90	A	V
													V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5685	47.06	-26.94	74	37.68	32.27	10.67	33.56	100	114	P	H
		5723.16	47.37	-30.93	78.3	37.98	32.31	10.65	33.57	100	114	P	H
		5689.16	39.68	-14.32	54	30.3	32.27	10.67	33.56	100	114	A	H
	*	5785	102.44	-	-	93.03	32.39	10.61	33.59	100	114	P	H
	*	5785	94.32	-	-	84.91	32.39	10.61	33.59	100	114	A	H
		5858.72	47.06	-31.24	78.3	37.39	32.51	10.78	33.62	100	114	P	H
		5886.8	49.6	-24.4	74	39.76	32.53	10.94	33.63	100	114	P	H
		5867.36	40.22	-13.78	54	30.39	32.51	10.94	33.62	100	114	A	H
		5698.28	47.24	-26.76	74	37.86	32.27	10.67	33.56	393	77	P	V
		5723.64	48.21	-30.09	78.3	38.82	32.31	10.65	33.57	393	77	P	V
		5686.2	39.28	-14.72	54	29.9	32.27	10.67	33.56	393	77	A	V
	*	5785	99.78	-	-	90.37	32.39	10.61	33.59	393	77	P	V
	*	5785	91.68	-	-	82.27	32.39	10.61	33.59	393	77	A	V
		5857.52	48.65	-29.65	78.3	38.97	32.51	10.78	33.61	393	77	P	V
		5882.16	48.31	-25.69	74	38.46	32.53	10.94	33.62	393	77	P	V
		5864.24	40.09	-13.91	54	30.26	32.51	10.94	33.62	393	77	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	101.05	-	-	91.41	32.46	10.78	33.6	100	119	P	H
	*	5825	92.91	-	-	83.27	32.46	10.78	33.6	100	119	A	H
		5856.64	57.83	-20.47	78.3	48.15	32.51	10.78	33.61	100	119	P	H
		5860.96	52.38	-21.62	74	42.55	32.51	10.94	33.62	100	119	P	H
		5860.48	43.49	-10.51	54	33.66	32.51	10.94	33.62	100	119	A	H
													H
													H
													H
	*	5825	97.97	-	-	88.33	32.46	10.78	33.6	387	76	P	V
	*	5825	90.85	-	-	81.21	32.46	10.78	33.6	387	76	A	V
		5851.68	52.33	-25.97	78.3	42.68	32.48	10.78	33.61	387	76	P	V
		5868.64	50.04	-23.96	74	40.21	32.51	10.94	33.62	387	76	P	V
		5861.36	41.85	-12.15	54	32.02	32.51	10.94	33.62	387	76	A	V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	56.56	-17.44	74	66.8	39.91	15.59	65.74	192	71	P	H
		11490	45.96	-8.04	54	56.2	39.91	15.59	65.74	192	71	A	H
		17235	44.36	-29.64	74	48.84	41	18.6	64.08	100	0	P	H
													H
		11490	48.58	-25.42	74	58.82	39.91	15.59	65.74	100	0	P	V
		17235	43.7	-30.3	74	48.18	41	18.6	64.08	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	57.31	-16.69	74	67.57	39.76	15.64	65.66	191	72	P	H
		11570	46.43	-7.57	54	56.69	39.76	15.64	65.66	191	72	A	H
		17355	41.7	-32.3	74	45.92	41.35	18.65	64.22	100	0	P	H
													H
		11570	48.55	-25.45	74	58.81	39.76	15.64	65.66	100	0	P	V
		17355	41.85	-32.15	74	46.07	41.35	18.65	64.22	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	58.38	-15.62	74	68.69	39.62	15.69	65.62	180	5	P	H
		11650	47.33	-6.67	54	57.64	39.62	15.69	65.62	180	5	A	H
		17475	42.07	-31.93	74	46.03	41.7	18.7	64.36	100	0	P	H
													H
		11650	49.02	-24.98	74	59.33	39.62	15.69	65.62	100	0	P	V
		17475	42.16	-31.84	74	46.12	41.7	18.7	64.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5715	63.5	-4.8	68.3	54.13	32.29	10.65	33.57	100	119	P	H
		5724.76	69.43	-8.87	78.3	60.04	32.31	10.65	33.57	100	119	P	H
	*	5755	98.06	-	-	88.64	32.36	10.63	33.57	100	119	P	H
	*	5755	90.16	-	-	80.74	32.36	10.63	33.57	100	119	A	H
		5853.44	47.15	-31.15	78.3	37.5	32.48	10.78	33.61	100	119	P	H
		5875.6	49.09	-19.21	68.3	39.24	32.53	10.94	33.62	100	119	P	H
													H
													H
		5713.56	58.5	-9.8	68.3	49.13	32.29	10.65	33.57	400	90	P	V
		5723.96	64.34	-13.96	78.3	54.95	32.31	10.65	33.57	400	90	P	V
	*	5755	94.89	-	-	85.47	32.36	10.63	33.57	400	90	P	V
	*	5755	87.65	-	-	78.23	32.36	10.63	33.57	400	90	A	V
		5859.84	47.66	-30.64	78.3	37.99	32.51	10.78	33.62	400	90	P	V
		5863.36	48.23	-20.07	68.3	38.4	32.51	10.94	33.62	400	90	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5715	47.96	-26.04	74	38.59	32.29	10.65	33.57	100	114	P	H
		5720.12	49.11	-29.19	78.3	39.72	32.31	10.65	33.57	100	114	P	H
		5712.6	41.1	-12.9	54	31.73	32.29	10.65	33.57	100	114	A	H
	*	5795	96.42	-	-	86.99	32.41	10.61	33.59	100	114	P	H
	*	5795	88.82	-	-	79.39	32.41	10.61	33.59	100	114	A	H
		5856.56	52.64	-25.66	78.3	42.96	32.51	10.78	33.61	100	114	P	H
		5867.44	52.36	-21.64	74	42.53	32.51	10.94	33.62	100	114	P	H
		5862.4	44.17	-9.83	54	34.34	32.51	10.94	33.62	100	114	A	H
		5700.68	48.55	-25.45	74	39.17	32.29	10.65	33.56	280	66	P	V
		5723	49.51	-28.79	78.3	40.12	32.31	10.65	33.57	280	66	P	V
		5692.92	39.98	-14.02	54	30.6	32.27	10.67	33.56	280	66	A	V
	*	5795	93.85	-	-	84.42	32.41	10.61	33.59	280	66	P	V
	*	5795	86.93	-	-	77.5	32.41	10.61	33.59	280	66	A	V
		5853.76	50.11	-28.19	78.3	40.43	32.51	10.78	33.61	280	66	P	V
		5861.12	50.7	-23.3	74	40.87	32.51	10.94	33.62	280	66	P	V
		5860.56	42.62	-11.38	54	32.79	32.51	10.94	33.62	280	66	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	50.15	-23.85	74	60.34	39.9	15.61	65.7	100	0	P	H
		17265	42.04	-26.26	68.3	46.44	41.1	18.62	64.12	100	0	P	H
													H
													H
		11510	45.86	-28.14	74	56.05	39.9	15.61	65.7	100	0	P	V
		17265	40.86	-27.44	68.3	45.26	41.1	18.62	64.12	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	49.99	-24.01	74	60.25	39.73	15.66	65.65	100	0	P	H
		17385	41.23	-32.77	74	45.38	41.45	18.66	64.26	100	0	P	H
													H
													H
		11590	45.23	-28.77	74	55.49	39.73	15.66	65.65	100	0	P	V
		17385	41.9	-32.1	74	46.05	41.45	18.66	64.26	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		5713.16	68.65	-5.35	74	59.28	32.29	10.65	33.57	100	115	P	H
		5724.04	69.35	-8.95	78.3	59.96	32.31	10.65	33.57	100	115	P	H
		5714.92	50.54	-3.46	54	41.17	32.29	10.65	33.57	100	115	A	H
	*	5745	103.63	-	-	94.23	32.34	10.63	33.57	100	115	P	H
	*	5745	95.63	-	-	86.23	32.34	10.63	33.57	100	115	A	H
													H
													H
													H
		5711.72	62.62	-11.38	74	53.25	32.29	10.65	33.57	200	81	P	V
		5724.28	66.55	-11.75	78.3	57.16	32.31	10.65	33.57	200	81	P	V
		5714.76	46.71	-7.29	54	37.34	32.29	10.65	33.57	200	81	A	V
	*	5745	99.81	-	-	90.41	32.34	10.63	33.57	200	81	P	V
	*	5745	91.85	-	-	82.45	32.34	10.63	33.57	200	81	A	V
													V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 157 5785MHz		5698.12	47.6	-26.4	74	38.22	32.27	10.67	33.56	100	116	P	H
		5723.08	47.6	-30.7	78.3	38.21	32.31	10.65	33.57	100	116	P	H
		5714.68	39.59	-14.41	54	30.22	32.29	10.65	33.57	100	116	A	H
	*	5785	102.72	-	-	93.31	32.39	10.61	33.59	100	116	P	H
	*	5785	94.79	-	-	85.38	32.39	10.61	33.59	100	116	A	H
		5854.88	49	-29.3	78.3	39.32	32.51	10.78	33.61	100	116	P	H
		5866.88	48.63	-25.37	74	38.8	32.51	10.94	33.62	100	116	P	H
		5864.96	40.24	-13.76	54	30.41	32.51	10.94	33.62	100	116	A	H
		5685.16	48.33	-25.67	74	38.95	32.27	10.67	33.56	212	80	P	V
		5715.72	47.38	-30.92	78.3	38.01	32.29	10.65	33.57	212	80	P	V
		5686.36	39.44	-14.56	54	30.06	32.27	10.67	33.56	212	80	A	V
	*	5785	100.22	-	-	90.81	32.39	10.61	33.59	212	80	P	V
	*	5785	91.81	-	-	82.4	32.39	10.61	33.59	212	80	A	V
		5851.28	48.6	-29.7	78.3	38.95	32.48	10.78	33.61	212	80	P	V
		5870.24	48.64	-25.36	74	38.81	32.51	10.94	33.62	212	80	P	V
		5870.24	40.15	-13.85	54	30.32	32.51	10.94	33.62	212	80	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 165 5825MHz	*	5825	102.06	-	-	92.42	32.46	10.78	33.6	100	116	P	H
	*	5825	94.09	-	-	84.45	32.46	10.78	33.6	100	116	A	H
		5854.64	59.3	-19	78.3	49.62	32.51	10.78	33.61	100	116	P	H
		5870.8	51.2	-22.8	74	41.35	32.53	10.94	33.62	100	116	P	H
		5860.16	43.76	-10.24	54	33.93	32.51	10.94	33.62	100	116	A	H
													H
													H
													H
	*	5825	99.68	-	-	90.04	32.46	10.78	33.6	205	81	P	V
	*	5825	91.41	-	-	81.77	32.46	10.78	33.6	205	81	A	V
		5853.12	57.29	-21.01	78.3	47.64	32.48	10.78	33.61	205	81	P	V
		5863.2	50.98	-23.02	74	41.15	32.51	10.94	33.62	205	81	P	V
		5860.4	42.06	-11.94	54	32.23	32.51	10.94	33.62	205	81	A	V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		11490	52.95	-21.05	74	63.19	39.91	15.59	65.74	195	70	P	H
		11490	43.01	-10.99	54	53.25	39.91	15.59	65.74	195	70	A	H
		17235	42.4	-31.6	74	46.88	41	18.6	64.08	100	0	P	H
													H
		11490	49.91	-24.09	74	60.15	39.91	15.59	65.74	100	0	P	V
		17235	42.49	-31.51	74	46.97	41	18.6	64.08	100	0	P	V
													V
													V
802.11ac VHT20 CH 157 5785MHz		11570	54.13	-19.87	74	64.39	39.76	15.64	65.66	182	73	P	H
		11570	44.46	-9.54	54	54.72	39.76	15.64	65.66	182	73	A	H
		17355	42.32	-31.68	74	46.54	41.35	18.65	64.22	100	0	P	H
													H
		11570	47.15	-26.85	74	57.41	39.76	15.64	65.66	100	0	P	V
		17355	41.7	-32.3	74	45.92	41.35	18.65	64.22	100	0	P	V
													V
													V
802.11ac VHT20 CH 165 5825MHz		11650	56.99	-17.01	74	67.3	39.62	15.69	65.62	181	6	P	H
		11650	47.32	-6.68	54	57.63	39.62	15.69	65.62	181	6	A	H
		17475	42.15	-31.85	74	46.11	41.7	18.7	64.36	100	0	P	H
													H
		11650	47.99	-26.01	74	58.3	39.62	15.69	65.62	100	0	P	V
		17475	41.44	-32.56	74	45.4	41.7	18.7	64.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		5714.36	62.12	-6.18	68.3	52.75	32.29	10.65	33.57	100	116	P	H
		5724.2	68.55	-9.75	78.3	59.16	32.31	10.65	33.57	100	116	P	H
	*	5755	98.69	-	-	89.27	32.36	10.63	33.57	100	116	P	H
	*	5755	90.72	-	-	81.3	32.36	10.63	33.57	100	116	A	H
		5857.28	48.53	-29.77	78.3	38.85	32.51	10.78	33.61	100	116	P	H
		5868.08	48.8	-19.5	68.3	38.97	32.51	10.94	33.62	100	116	P	H
													H
													H
		5714.6	59.58	-8.72	68.3	50.21	32.29	10.65	33.57	400	81	P	V
		5721.64	64.3	-14	78.3	54.91	32.31	10.65	33.57	400	81	P	V
	*	5755	95.67	-	-	86.25	32.36	10.63	33.57	400	81	P	V
	*	5755	88.44	-	-	79.02	32.36	10.63	33.57	400	81	A	V
		5857.68	48.12	-30.18	78.3	38.44	32.51	10.78	33.61	400	81	P	V
		5882.56	48.99	-19.31	68.3	39.14	32.53	10.94	33.62	400	81	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 159 5795MHz		5711.56	51.56	-22.44	74	42.19	32.29	10.65	33.57	100	116	P	H
		5724.12	50.54	-27.76	78.3	41.15	32.31	10.65	33.57	100	116	P	H
		5715	41.69	-12.31	54	32.32	32.29	10.65	33.57	100	116	A	H
	*	5795	97.49	-	-	88.06	32.41	10.61	33.59	100	116	P	H
	*	5795	89.66	-	-	80.23	32.41	10.61	33.59	100	116	A	H
		5850.8	51.7	-26.6	78.3	42.05	32.48	10.78	33.61	100	116	P	H
		5860.08	50.9	-23.1	74	41.07	32.51	10.94	33.62	100	116	P	H
		5860.96	44.73	-9.27	54	34.9	32.51	10.94	33.62	100	116	A	H
		5714.44	48.66	-25.34	74	39.29	32.29	10.65	33.57	391	84	P	V
		5722.52	48.13	-30.17	78.3	38.74	32.31	10.65	33.57	391	84	P	V
		5711.32	40.65	-13.35	54	31.28	32.29	10.65	33.57	391	84	A	V
	*	5795	95.97	-	-	86.54	32.41	10.61	33.59	391	84	P	V
	*	5795	87.96	-	-	78.53	32.41	10.61	33.59	391	84	A	V
		5859.04	50.27	-28.03	78.3	40.6	32.51	10.78	33.62	391	84	P	V
		5862.48	52.05	-21.95	74	42.22	32.51	10.94	33.62	391	84	P	V
		5863.6	43.05	-10.95	54	33.22	32.51	10.94	33.62	391	84	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		11510	50.19	-23.81	74	60.38	39.9	15.61	65.7	100	0	P	H
		17265	41.28	-27.02	68.3	45.68	41.1	18.62	64.12	100	0	P	H
													H
													H
		11510	45.36	-28.64	74	55.55	39.9	15.61	65.7	100	0	P	V
		17265	41.8	-26.5	68.3	46.2	41.1	18.62	64.12	100	0	P	V
													V
													V
802.11ac VHT40 CH 159 5795MHz		11590	51.52	-22.48	74	61.78	39.73	15.66	65.65	179	5	P	H
		11590	41.6	-12.4	54	51.86	39.73	15.66	65.65	179	5	A	H
		17385	41.83	-32.17	74	45.98	41.45	18.66	64.26	100	0	P	H
													H
		11590	46.77	-27.23	74	57.03	39.73	15.66	65.65	100	0	P	V
		17385	41.16	-32.84	74	45.31	41.45	18.66	64.26	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5713	66.32	-1.98	68.3	56.95	32.29	10.65	33.57	100	114	P	H
		5715.88	67.05	-11.25	78.3	57.68	32.29	10.65	33.57	100	114	P	H
	*	5775	96.48	-	-	87.04	32.39	10.63	33.58	100	114	P	H
	*	5775	87.4	-	-	77.96	32.39	10.63	33.58	100	114	A	H
		5852.24	58.13	-20.17	78.3	48.48	32.48	10.78	33.61	100	114	P	H
		5863.6	56.02	-12.28	68.3	46.19	32.51	10.94	33.62	100	114	P	H
													H
													H
		5710.52	62.77	-5.53	68.3	53.4	32.29	10.65	33.57	400	85	P	V
		5721.24	64.6	-13.7	78.3	55.21	32.31	10.65	33.57	400	85	P	V
	*	5775	93.95	-	-	84.51	32.39	10.63	33.58	400	85	P	V
	*	5775	84.33	-	-	74.89	32.39	10.63	33.58	400	85	A	V
		5851.52	57.46	-20.84	78.3	47.81	32.48	10.78	33.61	400	85	P	V
		5870.32	54.18	-14.12	68.3	44.35	32.51	10.94	33.62	400	85	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	50.12	-23.88	74	60.35	39.8	15.64	65.67	100	0	P	H
		17325	40.85	-27.45	68.3	45.15	41.25	18.63	64.18	100	0	P	H
													H
													H
		11550	45.99	-28.01	74	56.22	39.8	15.64	65.67	100	0	P	V
		17325	41.53	-26.77	68.3	45.83	41.25	18.63	64.18	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		83.73	24.18	-15.82	40	40.74	14.06	1.17	31.79			P	H
		142.59	33.89	-9.61	43.5	46.23	17.76	1.68	31.78	200	150	P	H
		232.23	29.58	-16.42	46	42.31	17.06	1.98	31.77			P	H
		502.3	25.16	-20.84	46	29.97	24.13	2.95	31.89			P	H
		783	31.03	-14.97	46	31.18	28.09	3.7	31.94			P	H
		952.4	33.49	-12.51	46	30.03	30.59	3.89	31.02			P	H
													H
													H
													H
													H
													H
													H
													H
		31.62	32.42	-7.58	40	38.66	24.66	0.93	31.83	100	78	P	V
		142.59	29.47	-14.03	43.5	41.81	17.76	1.68	31.78			P	V
		233.58	28.9	-17.1	46	41.47	17.22	1.98	31.77			P	V
		428.1	24.88	-21.12	46	30.13	22.9	3.68	31.83			P	V
		721.4	28.66	-17.34	46	30	27.13	3.54	32.01			P	V
		930	33.14	-12.86	46	30.42	30.05	3.86	31.19			P	V
													V
												V	
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang, Bill Chang, and Ken Wu	Temperature :	20~23°C
		Relative Humidity :	50~55%

Note symbol

-L	Low channel location
-R	High channel location



Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL Detector : Peak







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m 9170 SHF HORM_150809 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m 9170 SHF HORM_150809 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz - R	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m 9170 SHF HORM_150809 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m 9170 SHF HORM_150809 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

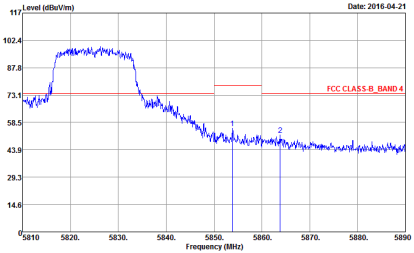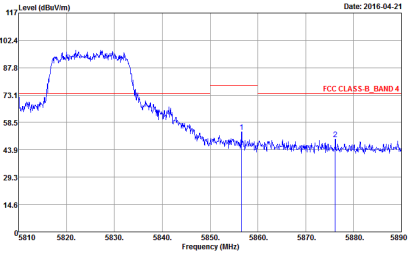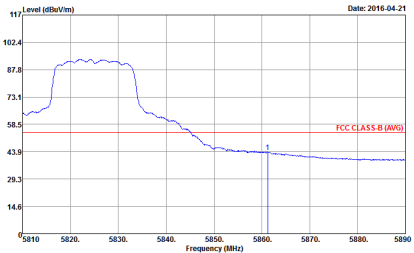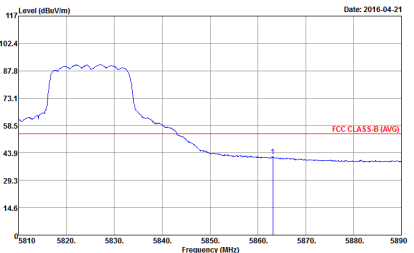

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz - R	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak







Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

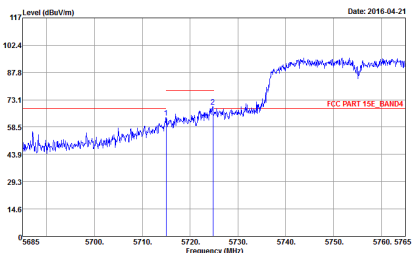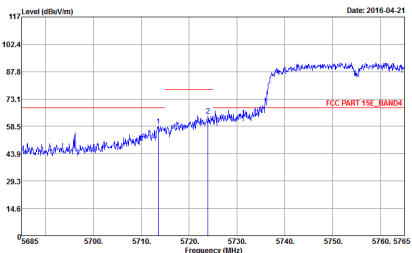WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz - R	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

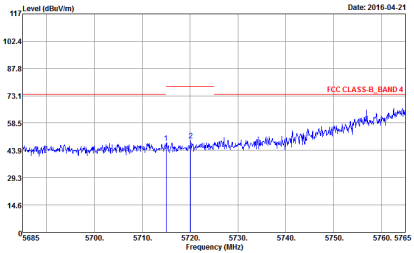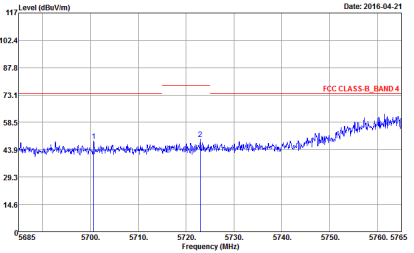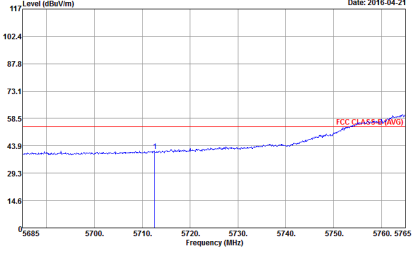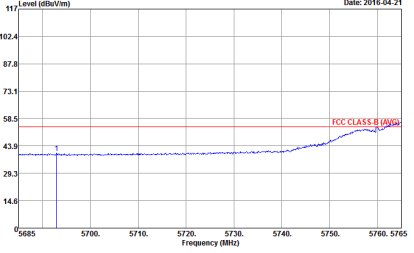

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz - L	
1+2	Horizontal	Vertical
Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5685 to 5765 MHz. A red line indicates the FCC CLASS-B_BAND 4 limit at approximately 73.1 dBuV/m. The measured signal is shown as a blue line with a peak at 5720 MHz, marked with a vertical blue line and a '2'. Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	The plot shows the peak level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5685 to 5765 MHz. A red line indicates the FCC CLASS-B_BAND 4 limit at approximately 73.1 dBuV/m. The measured signal is shown as a blue line with a peak at 5720 MHz, marked with a vertical blue line and a '2'. Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	The plot shows the average level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5685 to 5765 MHz. A red line indicates the FCC CLASS-B_BAND 4 (AVG) limit at approximately 58.5 dBuV/m. The measured signal is shown as a blue line with a peak at 5720 MHz, marked with a vertical blue line and a '2'. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	The plot shows the average level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 5685 to 5765 MHz. A red line indicates the FCC CLASS-B_BAND 4 (AVG) limit at approximately 58.5 dBuV/m. The measured signal is shown as a blue line with a peak at 5720 MHz, marked with a vertical blue line and a '2'. Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak

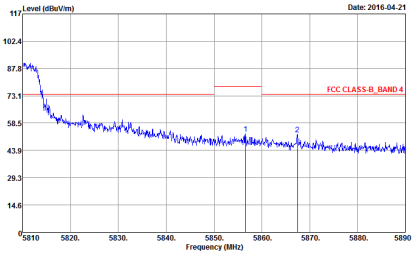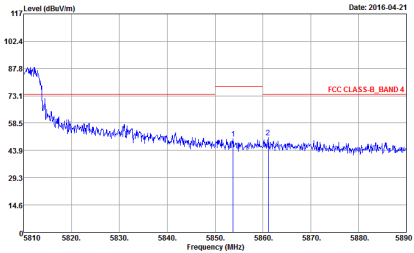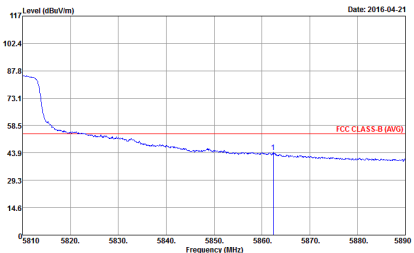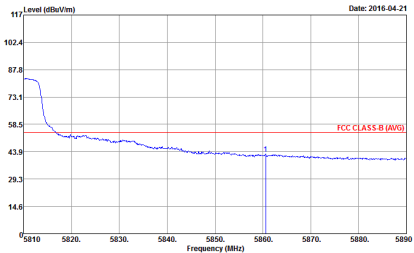





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz - R	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak







Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

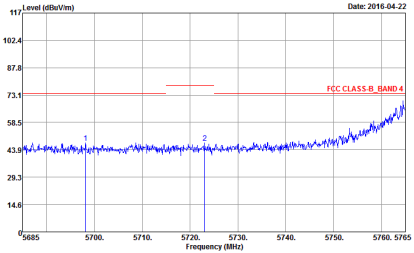
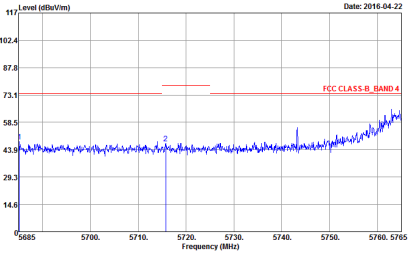
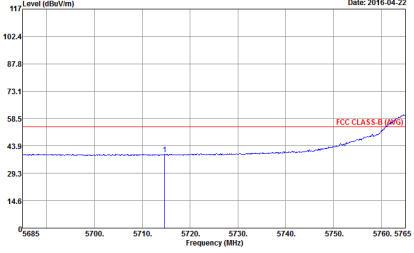
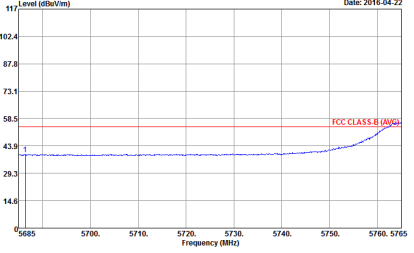


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

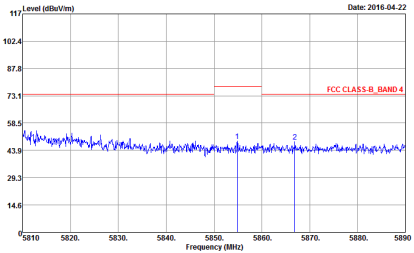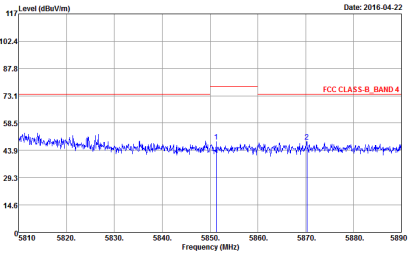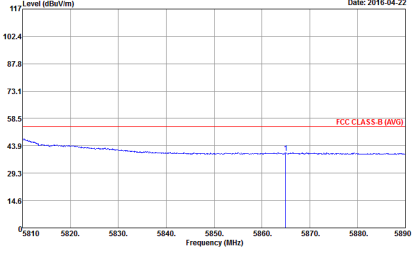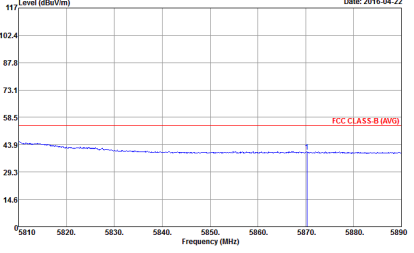



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz - R	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak

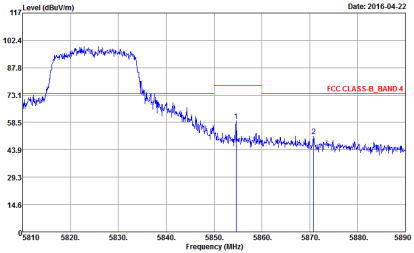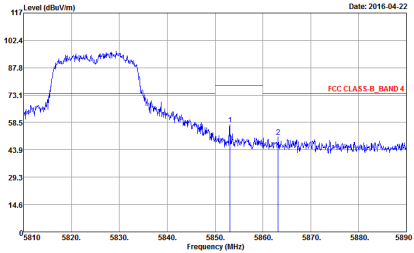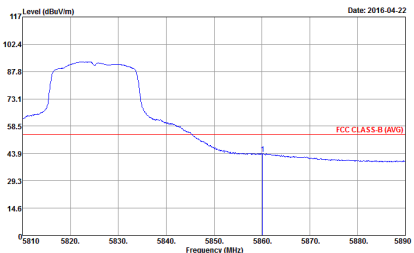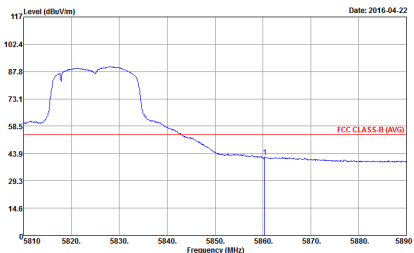

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak







Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

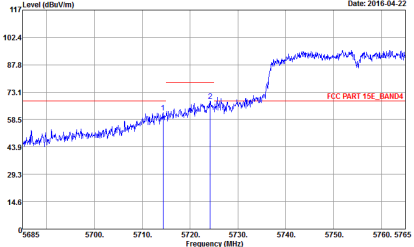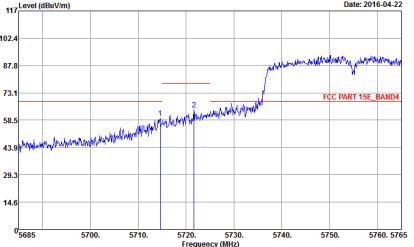WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL Detector : Peak







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak	117 Level (dBuV/m) Date: 2016-04-22 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL Detector : Peak	117 Level (dBuV/m) Date: 2016-04-22 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL Detector : Peak

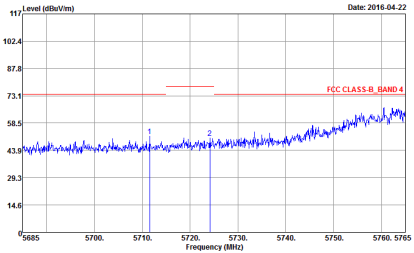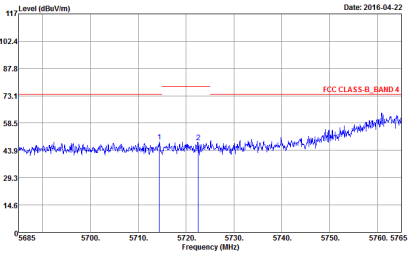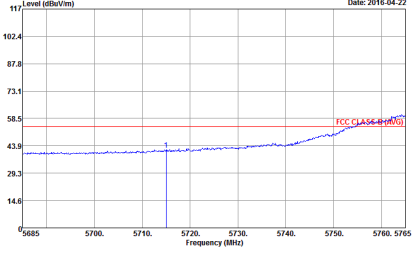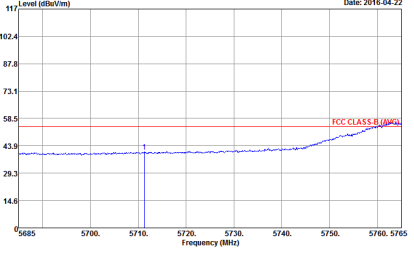

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak

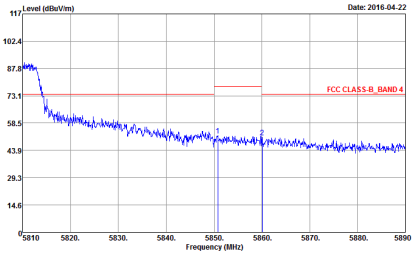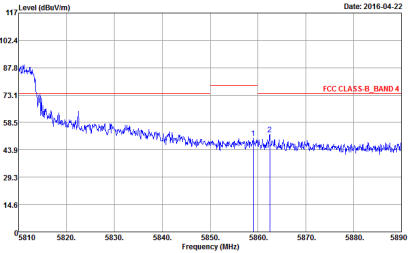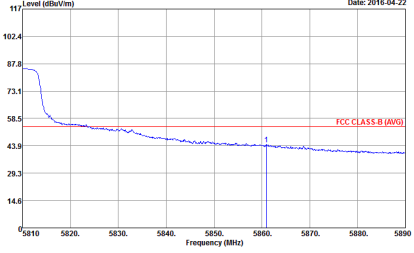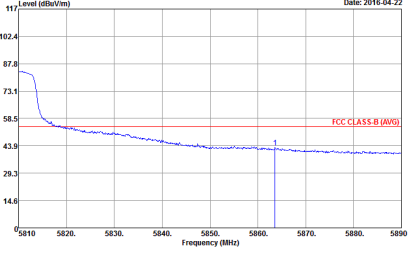



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - L	
1+2	Horizontal	Vertical
Peak	Site : 03CH11-1FV Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	Site : 03CH11-1FV Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak

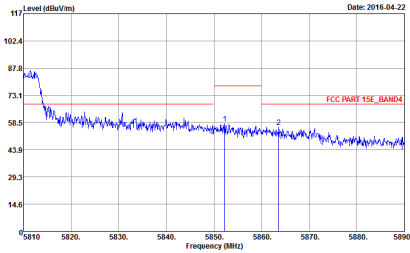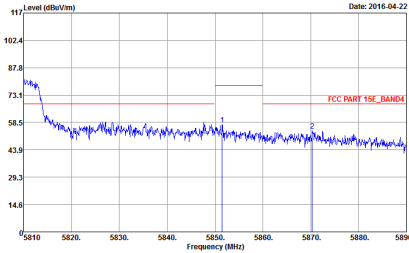

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz - R	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak	 Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak





Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

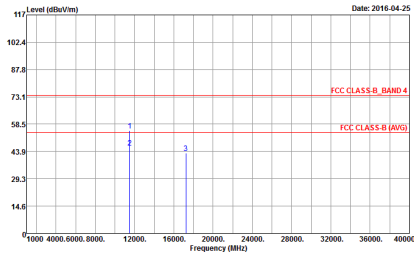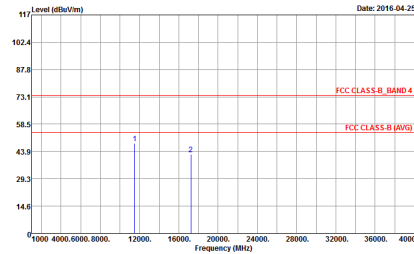WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B, BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B, BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-04-25 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Level (dBuV/m) Date: 2016-04-25 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

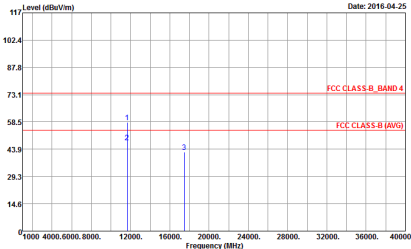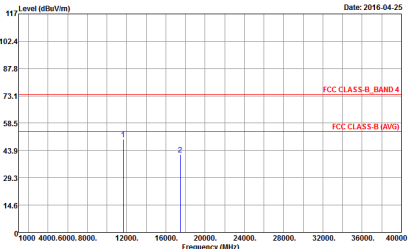



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

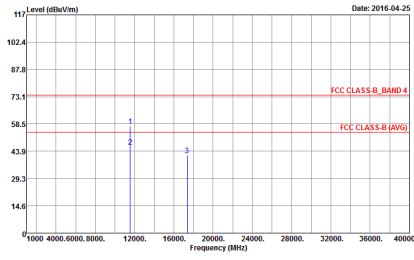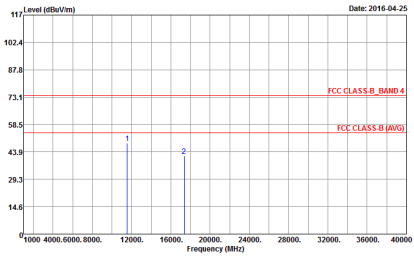

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

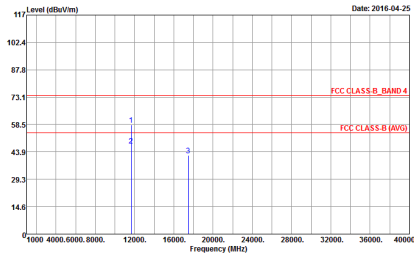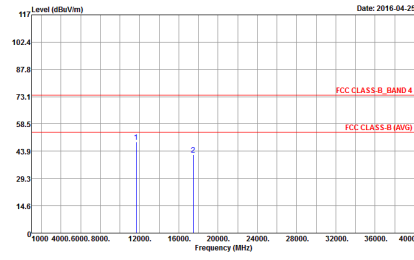

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak





Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_I50809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_I50809 VERTICAL Detector : Peak



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-04-25 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Level (dBuV/m) Date: 2016-04-25 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

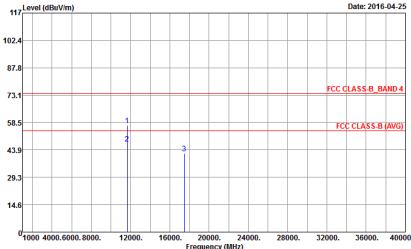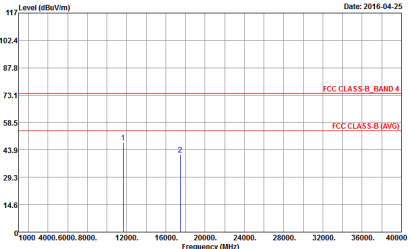



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak

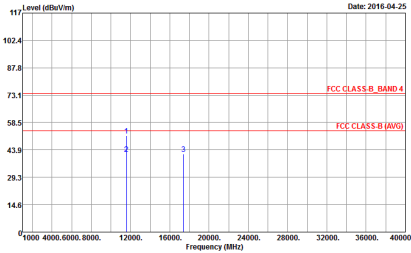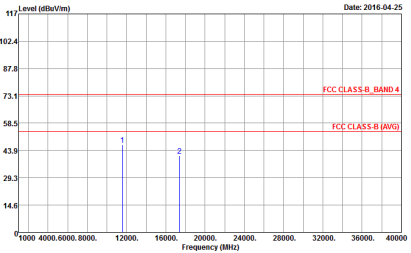

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B_BAND 4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak





Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak	Site : 03CH11-HY Condition : FCC PART 15E_BAND4 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

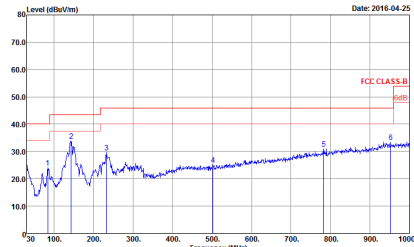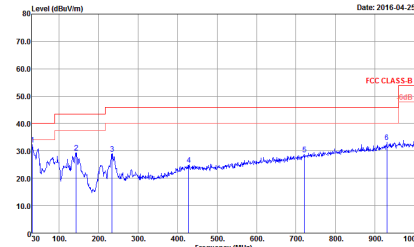
WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak

Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	5GHz 802.11a for Ant 1	94.52	2070.00	0.48	1kHz
1+2	5GHz 802.11a for Ant 2	94.95	2070.00	0.48	1kHz
1+2	5GHz 802.11n HT20 for Ant 1	95.07	1930.00	0.52	1kHz
1+2	5GHz 802.11n HT20 for Ant 2	95.07	1930.00	0.52	1kHz
1+2	5GHz 802.11n HT40 for Ant 1	90.48	950.00	1.05	3kHz
1+2	5GHz 802.11n HT40 for Ant 2	88.79	950.00	1.05	3kHz
1+2	5GHz 802.11ac VHT20 for Ant 1	90.83	990.00	1.01	3kHz
1+2	5GHz 802.11ac VHT20 for Ant 2	0.90	990	1.01	3kHz
1+2	5GHz 802.11ac VHT40 for Ant 1	90.57	960.00	1.04	3kHz
1+2	5GHz 802.11ac VHT40 for Ant 2	90.57	960.00	1.04	3kHz
1+2	5GHz 802.11ac VHT80 for Ant 1	85.71	600	1.67	3kHz
1+2	5GHz 802.11ac VHT80 for Ant 2	85.71	600	1.67	3kHz

MIMO <Ant. 1+2(1)>


802.11a

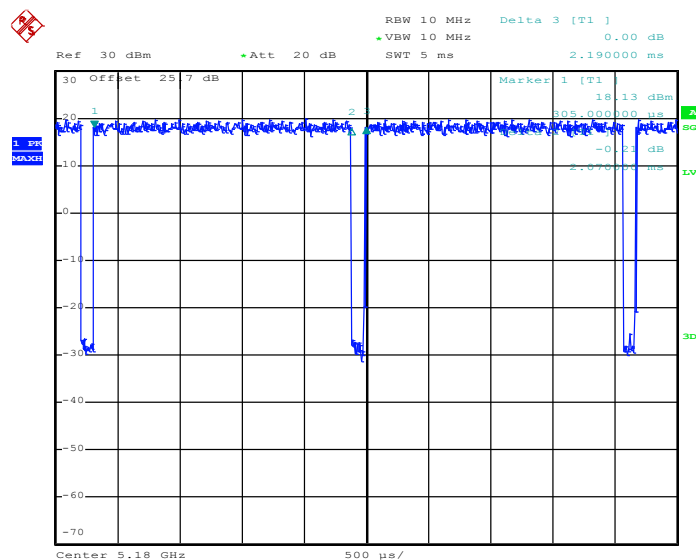


Date: 16.APR.2016 04:27:41

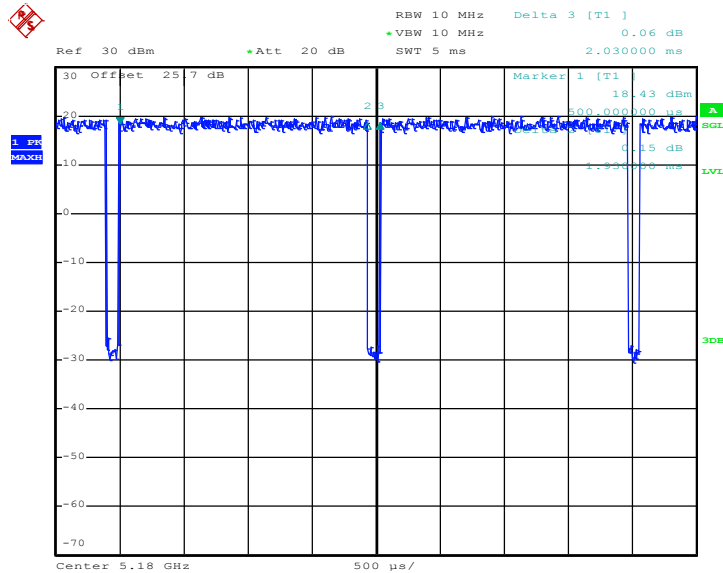802.11n HT20


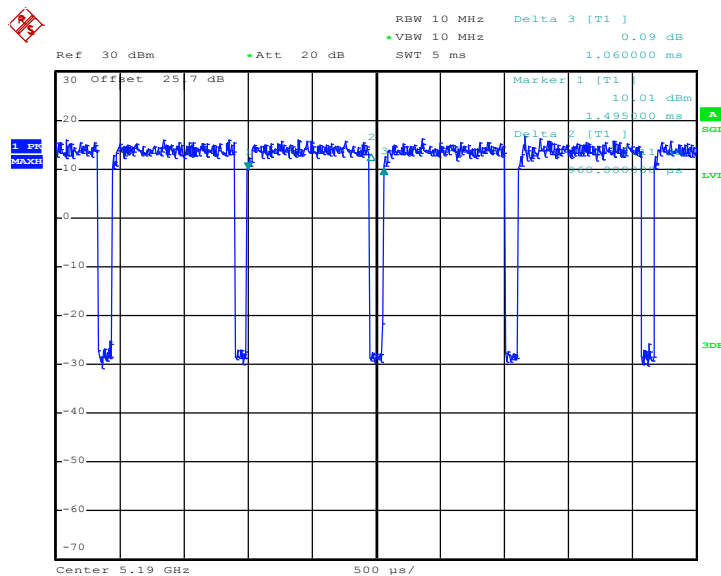
Date: 16.APR.2016 05:07:14

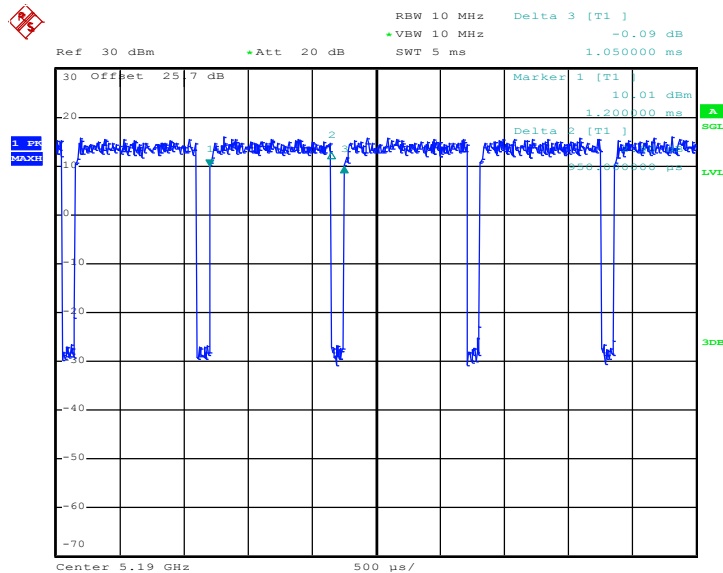802.11n HT40


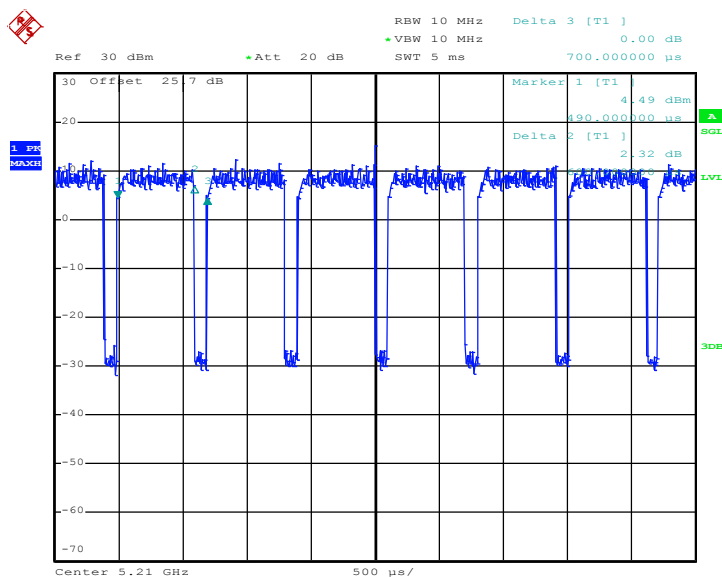
Date: 16.APR.2016 05:36:41

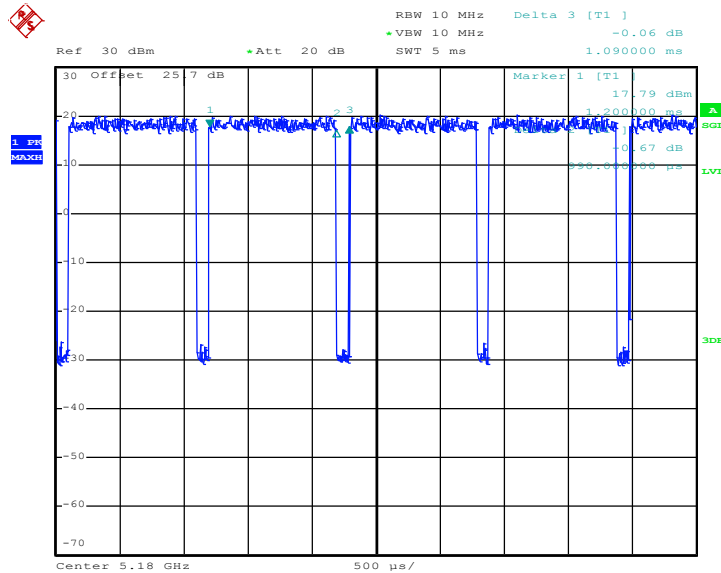802.11ac VHT20


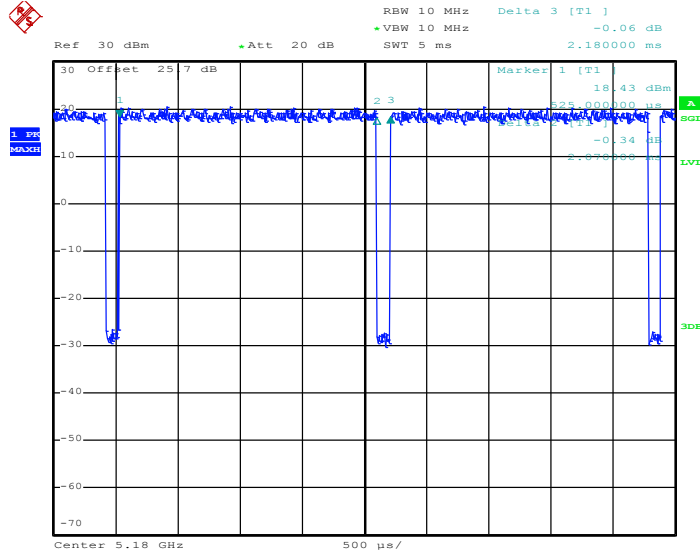
Date: 27.APR.2016 14:57:33

802.11ac VHT40


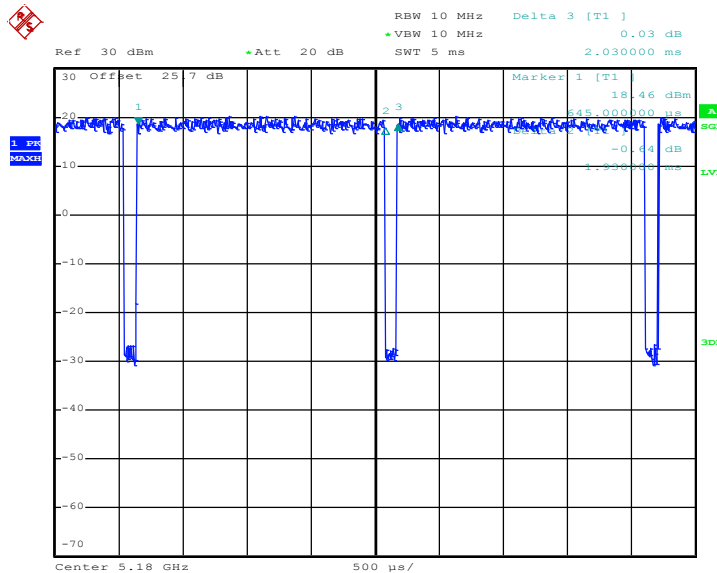
Date: 16.APR.2016 06:41:55




Date: 20.APR.2016 14:00:50

MIMO <Ant. 1+2(2)>
802.11a


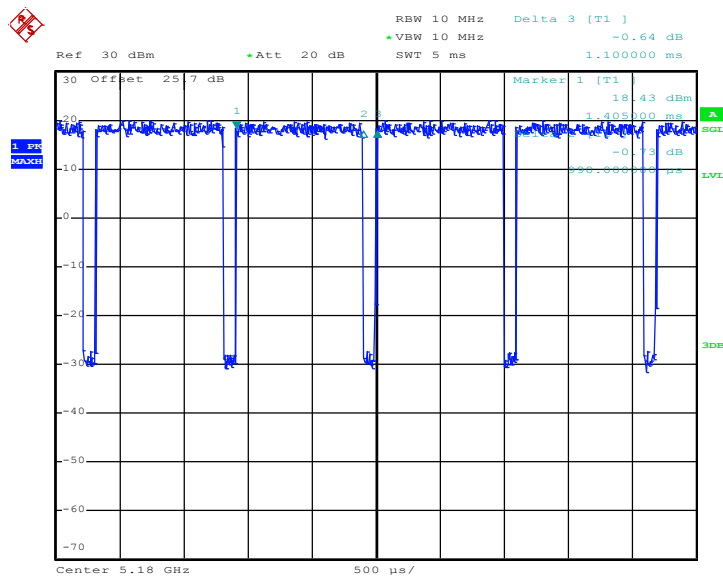
Date: 16.APR.2016 04:26:37

802.11n HT20


Date: 16.APR.2016 05:06:24

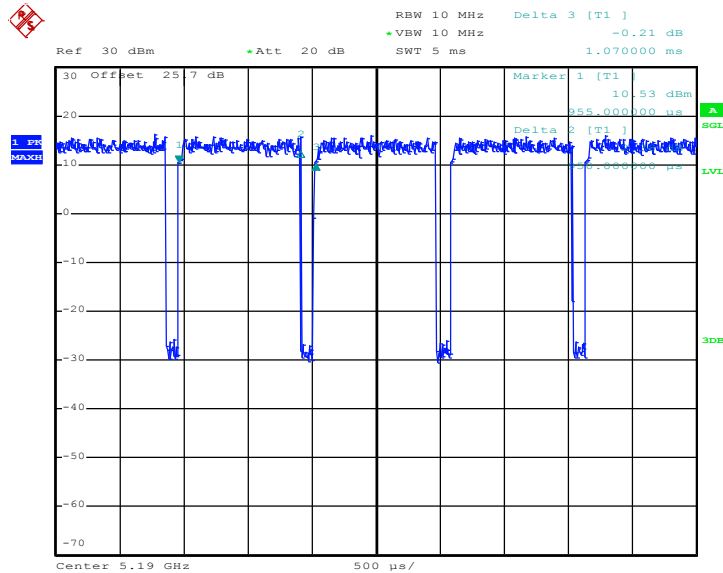
802.11n HT40


Date: 16.APR.2016 05:35:40

802.11ac VHT20


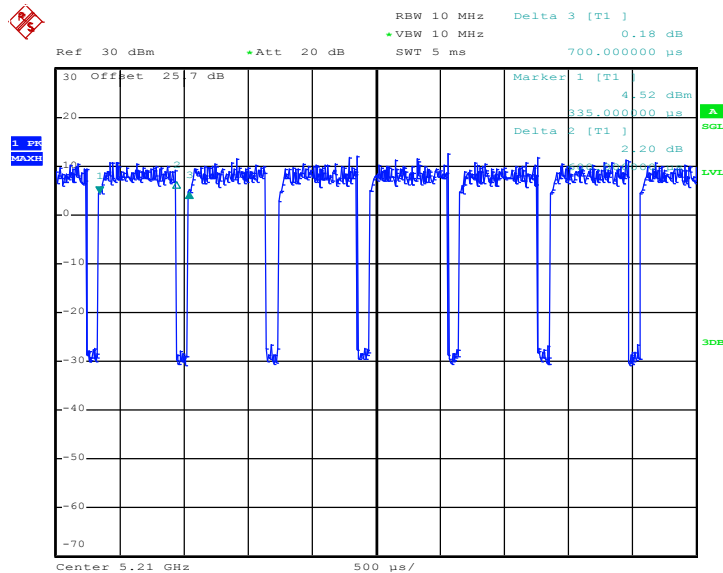
Date: 27.APR.2016 15:03:33

802.11ac VHT40

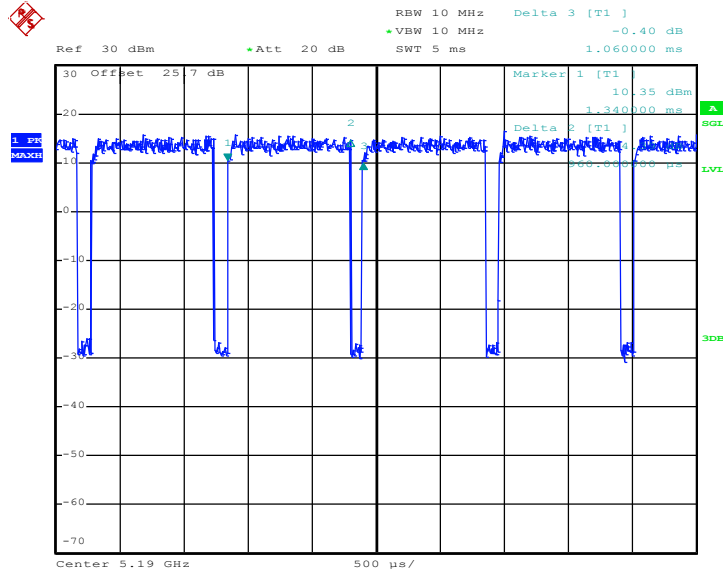

Date: 16.APR.2016 06:43:11

802.11ac VHT80



Date: 20.APR.2016 14:12:55