


FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 6576
FCC ID : IHDT56VB4
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 Re-use of Measured Data	7
4.3 General LTE SAR Test and Reporting Considerations	8
5. RF Exposure Limits	10
5.1 Uncontrolled Environment	10
5.2 Controlled Environment	10
6. Specific Absorption Rate (SAR)	11
6.1 Introduction	11
6.2 SAR Definition	11
7. System Description and Setup	12
7.1 E-Field Probe	13
7.2 Data Acquisition Electronics (DAE)	13
7.3 Phantom	14
7.4 Device Holder	15
8. Measurement Procedures	16
8.1 Spatial Peak SAR Evaluation	16
8.2 Power Reference Measurement	17
8.3 Area Scan	17
8.4 Zoom Scan	18
8.5 Volume Scan Procedures	18
8.6 Power Drift Monitoring	18
9. Test Equipment List	19
10. System Verification	20
10.1 Tissue Verification	20
10.2 System Performance Check Results	22
11. RF Exposure Positions	23
11.1 Ear and handset reference point	23
11.2 Definition of the cheek position	24
11.3 Definition of the tilt position	25
11.4 Body Worn Accessory	26
11.5 Wireless Router	26
12. Conducted RF Output Power (Unit: dBm)	27
13. Antenna Location	50
14. SAR Test Results	51
14.1 Head SAR	53
14.2 Hotspot SAR	54
14.3 Body Worn Accessory SAR	55
14.4 Repeated SAR Measurement	56
15. Simultaneous Transmission Analysis	57
15.1 Head Exposure Conditions	58
15.2 Hotspot Exposure Conditions	60
15.3 Product Specific Conditions	64
15.4 Body-Worn Accessory Exposure Conditions	64
15.5 SPLSR Evaluation and Analysis	67
16. Supplemental tuner tests results	70
16.1 Supplemental Head SAR results	70
16.2 Supplemental Body SAR results	71
17. Uncertainty Assessment	72
18. References	75
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. SAR Reference Report	

[illegible]

**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for Motorola Mobility, LLC, Mobile Cellular Phone, 6576 are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.254	1.097	1.097		1.581
	GSM1900	0.271	0.588	0.588		
	WCDMA II	0.502	1.142	1.142	3.173	
	WCDMA IV	0.541	1.132	1.132		
	WCDMA V	0.388	1.042	1.042		
	LTE Band 2	0.393	1.133	1.176		
	LTE Band 4	0.462	0.891	0.905		
	LTE Band 5	0.428	1.057	1.057		
	LTE Band 7	0.376	1.107	1.107		
	LTE Band 12	0.269	0.867	0.867		
	LTE Band 17					
	LTE Band 25	0.413	1.099	1.129		
	LTE Band 38	0.358	0.923	0.923		
DTS	2.4GHz WLAN	0.761	0.270	0.270		1.452
NII	5GHz WLAN	0.909	0.433	0.162	2.600	1.575
DSS	Bluetooth		0.010			1.581
Date of Testing:		2016/5/4 ~ 2016/5/15				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	6576
FCC ID	IHDT56VB4
IMEI Code	354110070072292
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 715 MHz LTE Band 17: 706 MHz ~ 713 MHz LTE Band 25: 1850 MHz ~ 1914 MHz LTE Band 38: 2572 MHz ~ 2617 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	· GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · LTE: QPSK, 16QAM · 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth with EDR / LE · NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client). 2. While operating in “Front” and “Back” configuration by end user, the device will limit different maximum output powers on the GSM850, WCDMA B2 / B4 / B5 and LTE B4 / B5 / B12 / B17 transmitter and detail descriptions of the power reduction mechanism are included in the operational description. 3. While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the GSM850, WCDMA B2 / B4 / B5 and LTE B4 / B5 / B12 / B17 transmitter and detail descriptions of the power reduction mechanism are included in the operational description. 4. The device utilizes independent power reduction mechanisms for SAR compliance for the WLAN transmitter for held-to-are exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description. 5. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA and LTE modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner are included in the operational description and supplemental data for additional information on section16.	

4.2 Re-use of Measured Data

1. This application re-uses data collected on a similar device. The subject device of this application (Model 6576, FCC ID IHDT56VB4) is electrically identical to the reference device (Model 4237, FCC ID IHDT56VB1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.
2. For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Operational Description.
3. The re-used SAR data includes the following bands provided in Appendix D (Sporton SAR Report No. FA631828 for the reference device Model 4237, FCC ID IHDT56VB1): GSM850/1900, WCDMA B2/B5, LTE B2/B4/B5/B7, 2.4GHz/5GHz WLAN and Bluetooth.
4. The following bands from the reference device report in Appendix D are not applicable to the Model 6576 (FCC ID IHDT56VB4) subject device of this application: CDMA BC0 / BC1 and LTE B13.
5. In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for the individual cases within each frequency band and test condition (head, body-worn, hotspot and extremity) having maximum reported SAR, for those frequency bands and test conditions where such maximum SAR exceeded half of the FCC allowed value. The spot check test cases and qualifying criteria to confirm equivalence was as follows table.
6. Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.
7. Spot Check Results within one expanded STD uncertainty of reference device.

<Spot Check Exposure Condition>

<Head Exposure Condition>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)
WLAN 5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	122	5610

<Hotspot Exposure Condition>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)
LTE Band 2	20MHz BW_QPSK_1 RB_0 offset	Bottom Side	10 mm	18700	1860

<Product specific Condition>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)
WCDMA II	RME 12.2kbps	Bottom Side	0 mm	9400	1880

<Body-Worn Exposure Condition>

Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)
WCDMA II	RME 12.2kbps	Front	10 mm	9538	1907.6

4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																										
FCC ID	IHDT56VB4																																																									
Equipment Name	Mobile Cellular Phone																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 02: 1850 MHz ~ 1910 MHz LTE Band 04: 1710 MHz ~ 1755 MHz LTE Band 05: 824 MHz ~ 849 MHz LTE Band 07: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 38: 2572 MHz ~ 2617 MHz																																																									
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																									
uplink modulations used	QPSK, and 16QAM																																																									
LTE Voice / Data requirements	Voice and Data																																																									
LTE MPR permanently built-in by design	<table><tr><td colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</td></tr><tr><td rowspan="2">Modulation</td><td colspan="6">Channel bandwidth / Transmission bandwidth (RB)</td><td rowspan="2">MPR (dB)</td></tr><tr><td>1.4 MHz</td><td>3.0 MHz</td><td>5 MHz</td><td>10 MHz</td><td>15 MHz</td><td>20 MHz</td></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>												Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																										
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																									
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B4 / B5 / B12 / B17 power reduction applied to satisfy SAR compliance.																																																									
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to page48.																																																									
LTE Carrier Aggregation Additional Information	This device supports a maximum of 3 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																									
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																										
LTE Band 2																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																														

LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450		829			
M	20525	836.5	20525	836.5	20525	836.5	20525		836.5			
H	20643	848.3	20635	847.5	20625	846.5	20600		844			
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850		2510			
M	21100	2535	21100	2535	21100	2535	21100		2535			
H	21425	2567.5	21400	2565	21375	2562.5	21350		2560			
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060		704			
M	23095	707.5	23095	707.5	23095	707.5	23095		707.5			
H	23173	715.3	23165	714.5	23155	713.5	23130		711			
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850		2580			
M	38000	2595	38000	2595	38000	2595	38000		2595			
H	38225	2617.5	38200	2615	38175	2612.5	38150		2610			

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

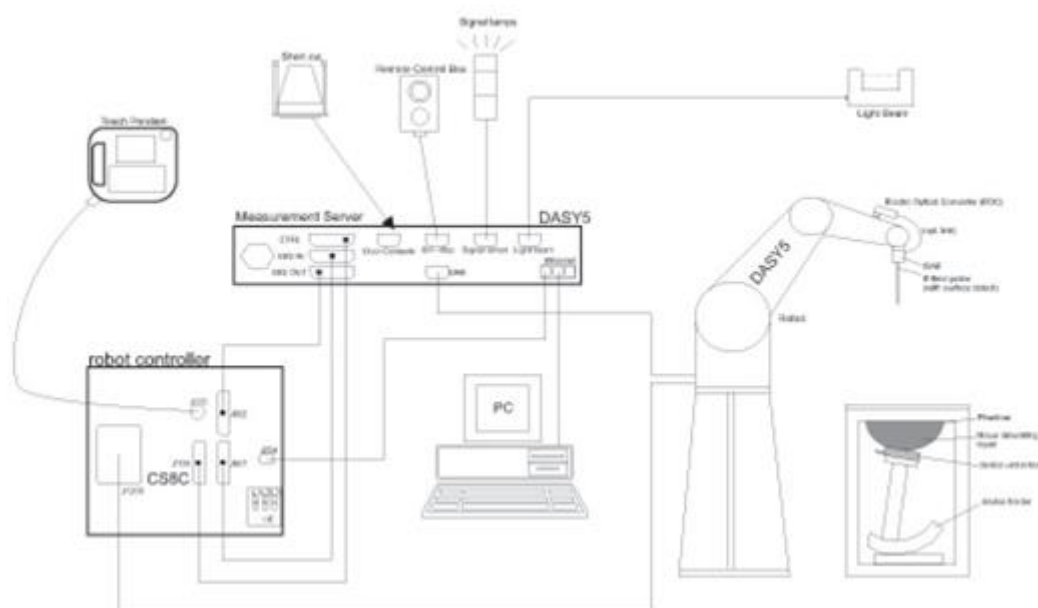

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Exhibit 7C_SAR Setup Photo demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2015	May. 27, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 23, 2015	Nov. 22, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Oct. 22, 2015	Oct. 21, 2016
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 19, 2015	Aug. 18, 2016
SPEAG	Data Acquisition Electronics	DAE3	360	Oct. 15, 2015	Oct. 14, 2016
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 23, 2015	Nov. 22, 2016
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 28, 2015	Sep. 27, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2015	Nov. 23, 2016
WonDer	Thermometer	WD-5015	TM642	Oct. 16, 2015	Oct. 15, 2016
Anritsu	Radio Communication Analyzer	MT8820C	6201341950	Dec. 18, 2015	Dec. 17, 2016
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 14, 2015	May. 13, 2016
R&S	Radio communication Tester	CMW500	149638	Aug. 04, 2015	Aug. 03, 2016
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 21, 2015	Jul. 20, 2016
LINE SEIKI	Digital Thermometer	LKMeletronic	DTM3000SPEZIAL/90900	Aug. 26, 2015	Aug. 25, 2016
Anritsu	Power Meter	ML2495A	1419002	May. 13, 2015	May. 12, 2016
Anritsu	Power Sensor	MA2411B	1339124	May. 13, 2015	May. 12, 2016
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 24, 2015	Aug. 23, 2016
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.5	0.901	42.700	0.89	41.90	1.24	1.91	±5	2016/5/4
750	MSL	22.3	0.962	56.676	0.96	55.50	0.21	2.12	±5	2016/5/13
1750	HSL	22.6	1.376	40.527	1.37	40.10	0.44	1.06	±5	2016/5/15
1750	MSL	22.6	1.451	52.644	1.49	53.40	-2.62	-1.42	±5	2016/5/13
1900	HSL	22.5	1.460	38.300	1.40	40.00	4.29	-4.25	±5	2016/5/5
1900	MSL	22.6	1.540	54.000	1.52	53.30	1.32	1.31	±5	2016/5/4
2600	HSL	22.6	1.994	39.149	1.96	39.00	1.73	0.38	±5	2016/5/14
2600	MSL	22.6	2.129	52.287	2.16	52.50	-1.44	-0.41	±5	2016/5/13



<Tissue Dielectric Parameter Check for Low / Middle / High Frequencies>

General Note:

The tissue measure results for low / middle / high frequencies list below, the results were used in the Dasy SAR system to perform interpolation to determine the dielectric parameters on the SAR test device. The SAR test plots may slightly difference between the tables below due to the digit rounding in the software calculated.

CH	Frequency (MHz)	Liquid Type	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
26140	1860	Body	1.50	54.16	1.52	53.30	-1.55	1.61	±5	May. 04, 2016
26340	1880	Body	1.51	54.10	1.52	53.30	-0.35	1.50	±5	May. 04, 2016
26590	1905	Body	1.54	54.01	1.52	53.30	1.46	1.34	±5	May. 04, 2016
23060	704	Head	0.86	43.28	0.89	42.15	-3.57	2.81	±5	May. 04, 2016
23095	707.5	Head	0.86	43.24	0.89	42.13	-3.21	2.70	±5	May. 04, 2016
23130	711	Head	0.86	43.19	0.89	42.11	-2.85	2.58	±5	May. 04, 2016
26140	1860	Head	1.42	38.47	1.40	40.00	1.13	-3.83	±5	May. 05, 2016
26340	1880	Head	1.43	38.38	1.40	40.00	2.50	-4.05	±5	May. 05, 2016
26590	1905	Head	1.46	38.28	1.40	40.00	4.30	-4.30	±5	May. 05, 2016
23060	704	Body	0.92	57.19	0.96	55.68	-4.44	2.67	±5	May. 13, 2016
23095	707.5	Body	0.92	57.15	0.96	55.67	-4.08	2.61	±5	May. 13, 2016
23130	711	Body	0.92	57.12	0.96	55.66	-3.74	2.54	±5	May. 13, 2016
37850	2580	Body	2.04	52.73	2.13	52.54	-4.24	0.44	±5	May. 13, 2016
38000	2595	Body	2.06	52.69	2.15	52.52	-4.16	0.36	±5	May. 13, 2016
38150	2610	Body	2.08	52.63	2.17	52.50	-4.11	0.26	±5	May. 13, 2016
37850	2580	Head	1.97	39.22	1.94	39.03	1.51	0.57	±5	May. 14, 2016
38000	2595	Head	1.99	39.17	1.95	39.01	1.97	0.43	±5	May. 14, 2016
38150	2610	Head	2.00	39.12	1.97	38.99	1.74	0.30	±5	May. 14, 2016
1312	1712.4	Body	1.42	52.74	1.47	53.47	-3.64	-1.43	±5	May. 13, 2016
1413	1732.6	Body	1.44	52.69	1.48	53.43	-2.99	-1.33	±5	May. 13, 2016
1513	1752.6	Body	1.45	52.63	1.49	53.39	-2.46	-1.44	±5	May. 13, 2016
1312	1712.4	Head	1.33	40.67	1.35	40.16	-1.14	1.17	±5	May. 15, 2016
1413	1732.6	Head	1.35	40.58	1.36	40.13	-0.47	1.21	±5	May. 15, 2016
1513	1752.6	Head	1.38	40.56	1.37	40.09	0.51	1.15	±5	May. 15, 2016

Table of Low/Middle/High Channel for Liquid Validation

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/5/4	750	HSL	250	D750V3-1012	ES3DV3 - SN3270	DAE3 Sn360	2.08	8.22	8.32	1.22
2016/5/13	750	MSL	250	D750V3-1012	EX3DV4 - SN3955	DAE4 Sn1399	2.21	8.61	8.84	2.67
2016/5/15	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE3 Sn360	9.49	36.80	37.96	3.15
2016/5/13	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	8.80	35.70	35.20	-1.40
2016/5/5	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn360	10.30	39.80	41.20	3.52
2016/5/4	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE3 Sn360	10.21	40.00	40.84	2.10
2016/5/14	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3955	DAE4 Sn1399	14.20	56.30	56.80	0.89
2016/5/13	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3955	DAE4 Sn1399	13.20	55.80	52.80	-5.38

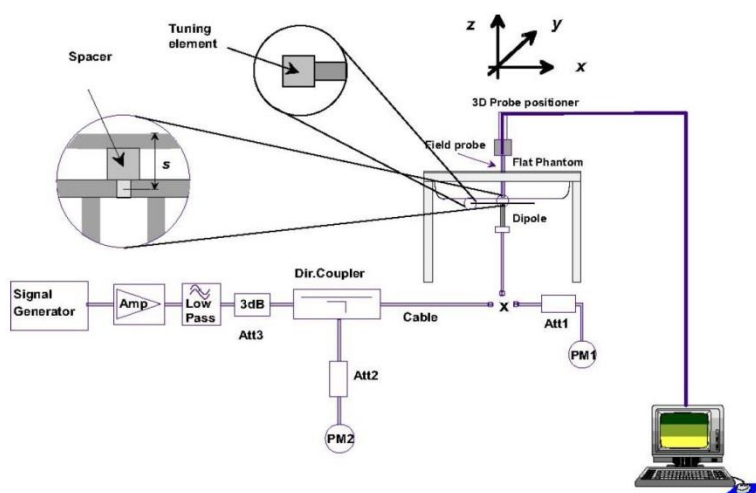


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

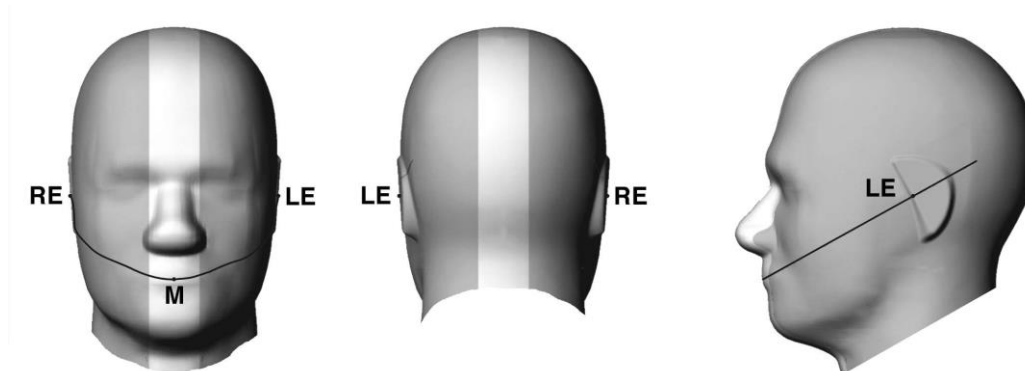


Fig 9.1.1 Front, back, and side views of SAM twin phantom

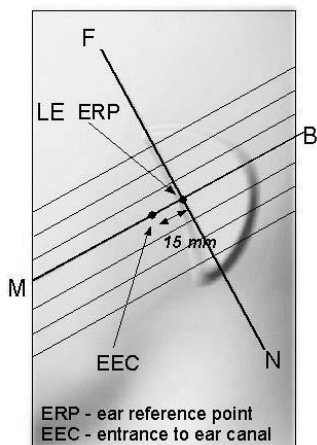


Fig 9.1.2 Close-up side view of phantom showing the ear region.

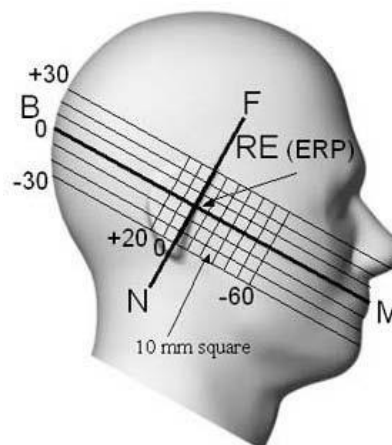


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

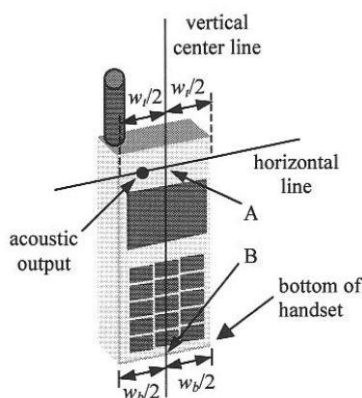


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

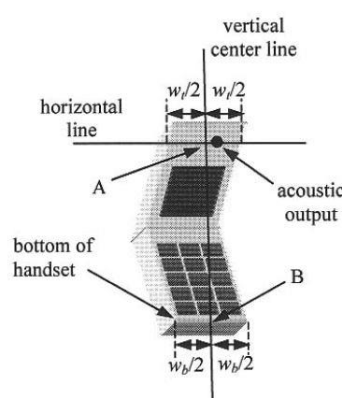


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

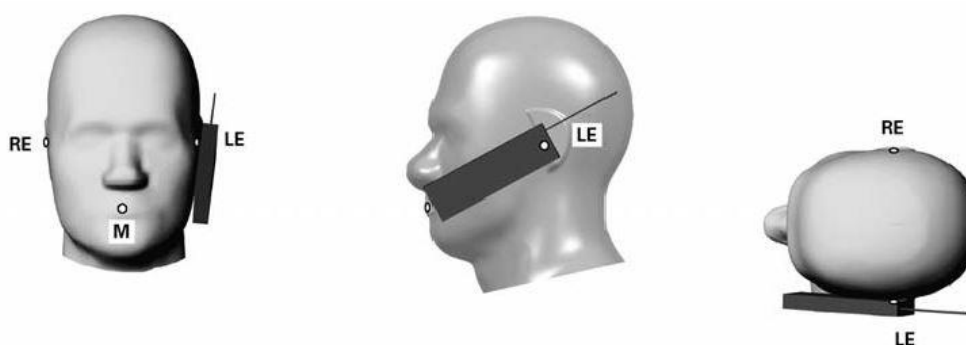


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

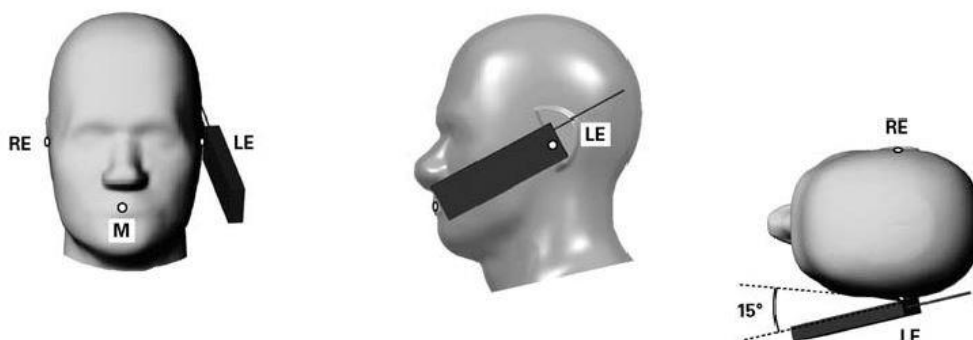


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

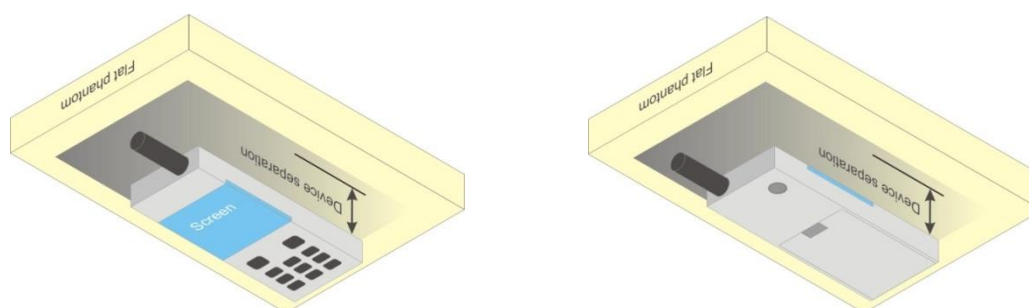


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

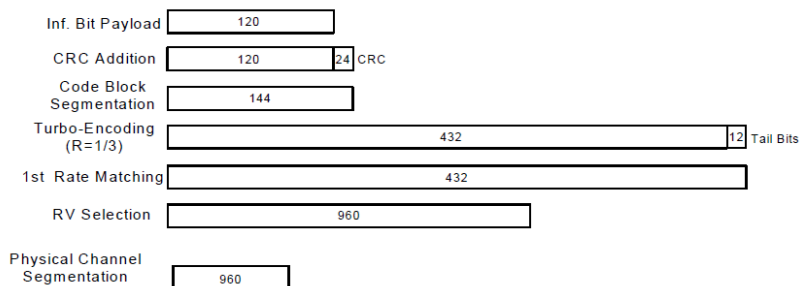
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA IV			Tune-up Limit (dBm)
TX Channel		1312	1413	1513	
Rx Channel		1537	1638	1738	
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.36	22.45	22.57	24.00
3GPP Rel 99	RMC 12.2Kbps	22.39	22.48	22.60	24.00
3GPP Rel 6	HSDPA Subtest-1	22.34	22.47	22.59	23.00
3GPP Rel 6	HSDPA Subtest-2	22.35	22.45	22.57	23.00
3GPP Rel 6	HSDPA Subtest-3	21.88	22.01	22.11	22.50
3GPP Rel 6	HSDPA Subtest-4	21.86	22.01	22.10	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.32	22.39	22.46	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.32	22.39	22.37	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.70	21.89	22.11	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.80	21.84	22.07	22.50
3GPP Rel 6	HSUPA Subtest-1	21.81	21.91	22.05	23.00
3GPP Rel 6	HSUPA Subtest-2	20.35	20.48	20.61	21.00
3GPP Rel 6	HSUPA Subtest-3	21.32	21.44	21.58	22.00
3GPP Rel 6	HSUPA Subtest-4	20.36	20.49	20.62	21.00
3GPP Rel 6	HSUPA Subtest-5	22.36	22.47	22.59	23.00

<Near-body and Hotspot Mode>

Band		WCDMA IV			Tune-up Limit (dBm)
TX Channel		1312	1413	1513	
Rx Channel		1537	1638	1738	
Frequency (MHz)		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	21.75	21.75	21.78	23.50
3GPP Rel 99	RMC 12.2Kbps	21.74	21.84	21.77	23.50
3GPP Rel 6	HSDPA Subtest-1	21.69	21.76	21.70	22.50
3GPP Rel 6	HSDPA Subtest-2	21.66	21.71	21.67	22.50
3GPP Rel 6	HSDPA Subtest-3	21.19	21.29	21.21	22.00
3GPP Rel 6	HSDPA Subtest-4	21.16	21.22	21.19	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.81	21.74	21.72	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.63	21.69	21.67	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.22	21.30	21.37	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.32	21.23	21.14	22.00
3GPP Rel 6	HSUPA Subtest-1	20.66	20.73	20.76	22.50
3GPP Rel 6	HSUPA Subtest-2	19.70	19.75	19.78	20.50
3GPP Rel 6	HSUPA Subtest-3	20.74	20.76	20.75	21.50
3GPP Rel 6	HSUPA Subtest-4	19.78	19.77	19.76	20.50
3GPP Rel 6	HSUPA Subtest-5	21.52	21.56	21.52	22.50

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE Band17 SAR test was covered by Band12, according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Default Power Mode>

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.47	22.46	22.43	24	0
10	QPSK	1	25	22.78	22.74	22.79		
10	QPSK	1	49	22.61	22.65	22.78		
10	QPSK	25	0	21.94	21.90	21.95	23	1
10	QPSK	25	12	21.90	21.82	21.88		
10	QPSK	25	25	21.86	21.83	21.94		
10	QPSK	50	0	21.88	21.87	21.89	23	1
10	16QAM	1	0	22.00	21.98	21.96		
10	16QAM	1	25	22.06	22.05	22.03		
10	16QAM	1	49	21.92	21.95	22.07	22	2
10	16QAM	25	0	20.94	20.80	20.90		
10	16QAM	25	12	20.89	20.90	20.91		
10	16QAM	25	25	20.85	20.84	20.93	22	2
10	16QAM	50	0	20.86	20.91	20.87		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.53	22.47	22.50	24	0
5	QPSK	1	12	22.85	22.75	22.79		
5	QPSK	1	24	22.76	22.72	22.86		
5	QPSK	12	0	21.86	21.85	21.93	23	1
5	QPSK	12	7	21.98	21.84	21.93		
5	QPSK	12	13	21.91	21.82	21.96		
5	QPSK	25	0	21.93	21.82	21.89	23	1
5	16QAM	1	0	22.06	21.97	22.04		
5	16QAM	1	12	22.14	22.06	22.07		
5	16QAM	1	24	21.99	21.98	22.11	22	2
5	16QAM	12	0	20.90	20.90	20.95		
5	16QAM	12	7	20.98	20.91	20.92		
5	16QAM	12	13	20.93	20.88	20.98	22	2
5	16QAM	25	0	20.95	20.85	20.91		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.49	22.50	22.48	24	0
3	QPSK	1	8	22.85	22.80	22.90		
3	QPSK	1	14	22.71	22.75	22.80		
3	QPSK	8	0	21.92	21.90	21.82	23	1
3	QPSK	8	4	21.90	21.85	21.92		
3	QPSK	8	7	21.92	21.83	21.88		
3	QPSK	15	0	21.86	21.83	21.90	23	1
3	16QAM	1	0	22.02	21.98	21.98		
3	16QAM	1	8	22.12	22.10	22.18		
3	16QAM	1	14	21.98	22.01	22.08	22	2
3	16QAM	8	0	20.99	20.94	20.87		
3	16QAM	8	4	20.99	20.92	20.99		
3	16QAM	8	7	20.97	20.87	20.91	22	2
3	16QAM	15	0	20.92	20.87	20.97		

Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.50	22.48	22.46	24	0
1.4	QPSK	1	3	22.85	22.73	22.80		
1.4	QPSK	1	5	22.69	22.68	22.77		
1.4	QPSK	3	0	22.80	22.68	22.76		
1.4	QPSK	3	1	22.83	22.73	22.80		
1.4	QPSK	3	3	22.86	22.72	22.88		
1.4	QPSK	6	0	21.86	21.67	21.85	23	1
1.4	16QAM	1	0	21.96	22.00	22.00	23	1
1.4	16QAM	1	3	22.06	22.00	22.04		
1.4	16QAM	1	5	21.93	21.97	22.04		
1.4	16QAM	3	0	21.82	21.73	21.78		
1.4	16QAM	3	1	21.90	21.79	21.84		
1.4	16QAM	3	3	21.90	21.79	21.90		
1.4	16QAM	6	0	20.91	20.83	20.96	22	2



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.38	22.38	22.36		
10	QPSK	1	25	22.75	22.70	22.76	23	1
10	QPSK	1	49	22.70	22.69	22.69		
10	QPSK	25	0	21.89	21.85	21.79		
10	QPSK	25	12	21.90	21.89	21.93	23	1
10	QPSK	25	25	21.88	21.88	21.85		
10	QPSK	50	0	21.88	21.82	21.89		
10	16QAM	1	0	21.84	21.88	21.85	23	1
10	16QAM	1	25	22.05	21.99	22.05		
10	16QAM	1	49	21.97	21.97	21.98		
10	16QAM	25	0	20.84	20.83	20.72	22	2
10	16QAM	25	12	20.85	20.86	20.95		
10	16QAM	25	25	20.91	20.88	20.88		
10	16QAM	50	0	20.90	20.82	20.91	24	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.40	22.48	22.43	24	0
5	QPSK	1	12	22.60	22.67	22.78		
5	QPSK	1	24	22.67	22.73	22.74		
5	QPSK	12	0	21.63	21.77	21.86	23	1
5	QPSK	12	7	21.68	21.83	21.94		
5	QPSK	12	13	21.71	21.80	21.88		
5	QPSK	25	0	21.67	21.78	21.81	23	1
5	16QAM	1	0	21.81	21.99	21.95		
5	16QAM	1	12	21.89	21.98	22.06		
5	16QAM	1	24	21.91	21.97	22.00	22	2
5	16QAM	12	0	20.67	20.79	20.89		
5	16QAM	12	7	20.74	20.86	20.94		
5	16QAM	12	13	20.76	20.82	20.93	22	2
5	16QAM	25	0	20.69	20.81	20.91		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.20	23.28	23.21	24	0
20	QPSK	1	49	22.53	22.54	22.49		
20	QPSK	1	99	22.55	22.52	22.53		
20	QPSK	50	0	21.88	21.93	21.92	23	1
20	QPSK	50	24	21.72	21.64	21.64		
20	QPSK	50	50	21.62	21.57	21.67		
20	QPSK	100	0	21.83	21.84	21.80		
20	16QAM	1	0	22.48	22.53	22.51	23	1
20	16QAM	1	49	21.81	21.77	21.73		
20	16QAM	1	99	21.77	21.78	21.89		
20	16QAM	50	0	20.92	20.90	20.93	22	2
20	16QAM	50	24	20.72	20.67	20.66		
20	16QAM	50	50	20.62	20.59	20.70		
20	16QAM	100	0	20.81	20.74	20.79		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.05	23.09	23.05	24	0
15	QPSK	1	37	22.47	22.52	22.55		
15	QPSK	1	74	22.56	22.59	22.67		
15	QPSK	36	0	21.83	21.84	21.93	23	1
15	QPSK	36	20	21.61	21.69	21.72		
15	QPSK	36	39	21.64	21.56	21.72		
15	QPSK	75	0	21.70	21.74	21.80		
15	16QAM	1	0	22.29	22.31	22.30	23	1
15	16QAM	1	37	21.72	21.76	21.79		
15	16QAM	1	74	21.81	21.84	21.87		
15	16QAM	36	0	20.81	20.80	20.89	22	2
15	16QAM	36	20	20.63	20.65	20.72		
15	16QAM	36	39	20.61	20.55	20.70		
15	16QAM	75	0	20.65	20.69	20.76		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.77	22.80	22.84	24	0
10	QPSK	1	25	22.53	22.63	22.71		
10	QPSK	1	49	22.53	22.49	22.55		
10	QPSK	25	0	21.77	21.76	21.91	23	1
10	QPSK	25	12	21.67	21.72	21.89		
10	QPSK	25	25	21.60	21.60	21.78		
10	QPSK	50	0	21.68	21.72	21.90		
10	16QAM	1	0	22.06	22.04	22.14	23	1
10	16QAM	1	25	21.79	21.84	22.00		
10	16QAM	1	49	21.76	21.74	21.93		
10	16QAM	25	0	20.77	20.75	20.91	22	2
10	16QAM	25	12	20.69	20.72	20.91		
10	16QAM	25	25	20.61	20.58	20.80		
10	16QAM	50	0	20.70	20.73	20.93		



Exhibit 11

Report No. : FA632103

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.63	22.67	22.80	24	0
5	QPSK	1	12	22.55	22.62	22.63		
5	QPSK	1	24	22.48	22.49	22.59		
5	QPSK	12	0	21.68	21.69	21.91	23	1
5	QPSK	12	7	21.68	21.71	21.85		
5	QPSK	12	13	21.63	21.67	21.82		
5	QPSK	25	0	21.62	21.65	21.78		
5	16QAM	1	0	21.90	21.87	22.07	23	1
5	16QAM	1	12	21.82	21.86	21.92		
5	16QAM	1	24	21.72	21.72	21.92		
5	16QAM	12	0	20.72	20.71	20.95	22	2
5	16QAM	12	7	20.72	20.73	20.85		
5	16QAM	12	13	20.65	20.70	20.84		
5	16QAM	25	0	20.66	20.68	20.85		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.57	22.63	22.64	24	0
3	QPSK	1	8	22.63	22.70	22.73		
3	QPSK	1	14	22.46	22.47	22.56		
3	QPSK	8	0	21.69	21.69	21.82	23	1
3	QPSK	8	4	21.66	21.69	21.85		
3	QPSK	8	7	21.62	21.67	21.83		
3	QPSK	15	0	21.65	21.67	21.81		
3	16QAM	1	0	21.82	21.82	21.96	23	1
3	16QAM	1	8	21.91	21.95	22.03		
3	16QAM	1	14	21.73	21.70	21.93		
3	16QAM	8	0	20.75	20.75	20.94	22	2
3	16QAM	8	4	20.76	20.79	20.99		
3	16QAM	8	7	20.71	20.73	20.96		
3	16QAM	15	0	20.68	20.70	20.87		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.54	22.58	22.66	24	0
1.4	QPSK	1	3	22.62	22.67	22.72		
1.4	QPSK	1	5	22.50	22.58	22.61		
1.4	QPSK	3	0	22.60	22.63	22.74		
1.4	QPSK	3	1	22.64	22.69	22.77		
1.4	QPSK	3	3	22.63	22.68	22.80		
1.4	QPSK	6	0	21.61	21.60	21.82	23	1
1.4	16QAM	1	0	21.78	21.81	21.90	23	1
1.4	16QAM	1	3	21.85	21.88	21.97		
1.4	16QAM	1	5	21.74	21.81	21.88		
1.4	16QAM	3	0	21.63	21.66	21.77		
1.4	16QAM	3	1	21.68	21.71	21.81		
1.4	16QAM	3	3	21.66	21.70	21.81		
1.4	16QAM	6	0	20.71	20.71	20.89	22	2

<Near-body and Hotspot Mode>
<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	20.43	20.43	20.46	21.5	0
10	QPSK	1	25	20.24	20.23	20.27		
10	QPSK	1	49	20.11	20.17	20.19		
10	QPSK	25	0	20.42	20.29	20.40	21.5	0
10	QPSK	25	12	20.34	20.25	20.31		
10	QPSK	25	25	20.32	20.28	20.35		
10	QPSK	50	0	20.31	20.30	20.28	21.5	0
10	16QAM	1	0	20.46	20.42	20.37		
10	16QAM	1	25	20.50	20.47	20.43		
10	16QAM	1	49	20.37	20.43	20.52	21.5	0
10	16QAM	25	0	20.40	20.20	20.30		
10	16QAM	25	12	20.31	20.31	20.31		
10	16QAM	25	25	20.28	20.26	20.40	21.5	0
10	16QAM	50	0	20.28	20.31	20.25		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	20.53	20.35	20.49	21.5	0
5	QPSK	1	12	20.33	20.18	20.24		
5	QPSK	1	24	20.21	20.17	20.34		
5	QPSK	12	0	20.30	20.25	20.38	21.5	0
5	QPSK	12	7	20.43	20.26	20.36		
5	QPSK	12	13	20.35	20.25	20.41		
5	QPSK	25	0	20.39	20.24	20.32	21.5	0
5	16QAM	1	0	20.47	20.36	20.48		
5	16QAM	1	12	20.55	20.49	20.51		
5	16QAM	1	24	20.37	20.39	20.58	21.5	0
5	16QAM	12	0	20.33	20.30	20.37		
5	16QAM	12	7	20.41	20.30	20.36		
5	16QAM	12	13	20.36	20.28	20.40	21.5	0
5	16QAM	25	0	20.38	20.24	20.34		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	20.41	20.35	20.36	21.5	0
3	QPSK	1	8	20.35	20.29	20.37		
3	QPSK	1	14	20.21	20.20	20.30		
3	QPSK	8	0	20.36	20.30	20.26	21.5	0
3	QPSK	8	4	20.37	20.27	20.38		
3	QPSK	8	7	20.36	20.25	20.33		
3	QPSK	15	0	20.33	20.25	20.34	21.5	0
3	16QAM	1	0	20.47	20.39	20.43		
3	16QAM	1	8	20.62	20.56	20.61		
3	16QAM	1	14	20.44	20.45	20.52	21.5	0
3	16QAM	8	0	20.41	20.34	20.33		
3	16QAM	8	4	20.42	20.30	20.43		
3	16QAM	8	7	20.42	20.28	20.35	21.5	0
3	16QAM	15	0	20.37	20.26	20.41		

Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	20.39	20.34	20.37	21.5	0
1.4	QPSK	1	3	20.34	20.20	20.28		
1.4	QPSK	1	5	20.20	20.15	20.27		
1.4	QPSK	3	0	20.28	20.16	20.24		
1.4	QPSK	3	1	20.35	20.19	20.28		
1.4	QPSK	3	3	20.36	20.18	20.36		
1.4	QPSK	6	0	20.34	20.15	20.33	21.5	0
1.4	16QAM	1	0	20.51	20.50	20.47	21.5	0
1.4	16QAM	1	3	20.59	20.49	20.52		
1.4	16QAM	1	5	20.47	20.42	20.54		
1.4	16QAM	3	0	20.32	20.18	20.26		
1.4	16QAM	3	1	20.41	20.27	20.33		
1.4	16QAM	3	3	20.41	20.25	20.41		
1.4	16QAM	6	0	20.42	20.26	20.43	21.5	0



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	21	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	20.32	20.40	20.45		
10	QPSK	1	25	20.25	20.22	20.26	21	0
10	QPSK	1	49	20.24	20.21	20.22		
10	QPSK	25	0	20.37	20.37	20.35		
10	QPSK	25	12	20.36	20.30	20.28	21	0
10	QPSK	25	25	20.34	20.34	20.33		
10	QPSK	50	0	20.32	20.28	20.37		
10	16QAM	1	0	20.28	20.37	20.36	21	0
10	16QAM	1	25	20.50	20.45	20.49		
10	16QAM	1	49	20.48	20.46	20.51		
10	16QAM	25	0	20.31	20.25	20.23	21	0
10	16QAM	25	12	20.34	20.29	20.38		
10	16QAM	25	25	20.33	20.32	20.33		
10	16QAM	50	0	20.33	20.27	20.35	21	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	20.50	20.46	20.57	21	0
5	QPSK	1	12	20.25	20.19	20.32		
5	QPSK	1	24	20.29	20.24	20.34		
5	QPSK	12	0	20.24	20.27	20.36	21	0
5	QPSK	12	7	20.31	20.32	20.45		
5	QPSK	12	13	20.27	20.29	20.43		
5	QPSK	25	0	20.31	20.24	20.38	21	0
5	16QAM	1	0	20.42	20.44	20.40		
5	16QAM	1	12	20.56	20.48	20.59		
5	16QAM	1	24	20.51	20.45	20.58	21	0
5	16QAM	12	0	20.27	20.29	20.36		
5	16QAM	12	7	20.34	20.33	20.44		
5	16QAM	12	13	20.32	20.28	20.43	21	0
5	16QAM	25	0	20.30	20.26	20.40		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.20	23.28	23.21	24	0
20	QPSK	1	49	22.53	22.54	22.49		
20	QPSK	1	99	22.55	22.52	22.53		
20	QPSK	50	0	21.88	21.93	21.92	23	1
20	QPSK	50	24	21.72	21.64	21.64		
20	QPSK	50	50	21.62	21.57	21.67		
20	QPSK	100	0	21.83	21.84	21.80		
20	16QAM	1	0	22.48	22.53	22.51	23	1
20	16QAM	1	49	21.81	21.77	21.73		
20	16QAM	1	99	21.77	21.78	21.89		
20	16QAM	50	0	20.92	20.90	20.93	22	2
20	16QAM	50	24	20.72	20.67	20.66		
20	16QAM	50	50	20.62	20.59	20.70		
20	16QAM	100	0	20.81	20.74	20.79		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.05	23.09	23.05	24	0
15	QPSK	1	37	22.47	22.52	22.55		
15	QPSK	1	74	22.56	22.59	22.67		
15	QPSK	36	0	21.83	21.84	21.93	23	1
15	QPSK	36	20	21.61	21.69	21.72		
15	QPSK	36	39	21.64	21.56	21.72		
15	QPSK	75	0	21.70	21.74	21.80		
15	16QAM	1	0	22.29	22.31	22.30	23	1
15	16QAM	1	37	21.72	21.76	21.79		
15	16QAM	1	74	21.81	21.84	21.87		
15	16QAM	36	0	20.81	20.80	20.89	22	2
15	16QAM	36	20	20.63	20.65	20.72		
15	16QAM	36	39	20.61	20.55	20.70		
15	16QAM	75	0	20.65	20.69	20.76		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.77	22.80	22.84	24	0
10	QPSK	1	25	22.53	22.63	22.71		
10	QPSK	1	49	22.53	22.49	22.55		
10	QPSK	25	0	21.77	21.76	21.91	23	1
10	QPSK	25	12	21.67	21.72	21.89		
10	QPSK	25	25	21.60	21.60	21.78		
10	QPSK	50	0	21.68	21.72	21.90		
10	16QAM	1	0	22.06	22.04	22.14	23	1
10	16QAM	1	25	21.79	21.84	22.00		
10	16QAM	1	49	21.76	21.74	21.93		
10	16QAM	25	0	20.77	20.75	20.91	22	2
10	16QAM	25	12	20.69	20.72	20.91		
10	16QAM	25	25	20.61	20.58	20.80		
10	16QAM	50	0	20.70	20.73	20.93		



Exhibit 11

Report No. : FA632103

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.63	22.67	22.80	24	0
5	QPSK	1	12	22.55	22.62	22.63		
5	QPSK	1	24	22.48	22.49	22.59		
5	QPSK	12	0	21.68	21.69	21.91	23	1
5	QPSK	12	7	21.68	21.71	21.85		
5	QPSK	12	13	21.63	21.67	21.82		
5	QPSK	25	0	21.62	21.65	21.78		
5	16QAM	1	0	21.90	21.87	22.07	23	1
5	16QAM	1	12	21.82	21.86	21.92		
5	16QAM	1	24	21.72	21.72	21.92		
5	16QAM	12	0	20.72	20.71	20.95	22	2
5	16QAM	12	7	20.72	20.73	20.85		
5	16QAM	12	13	20.65	20.70	20.84		
5	16QAM	25	0	20.66	20.68	20.85		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.57	22.63	22.64	24	0
3	QPSK	1	8	22.63	22.70	22.73		
3	QPSK	1	14	22.46	22.47	22.56		
3	QPSK	8	0	21.69	21.69	21.82	23	1
3	QPSK	8	4	21.66	21.69	21.85		
3	QPSK	8	7	21.62	21.67	21.83		
3	QPSK	15	0	21.65	21.67	21.81		
3	16QAM	1	0	21.82	21.82	21.96	23	1
3	16QAM	1	8	21.91	21.95	22.03		
3	16QAM	1	14	21.73	21.70	21.93		
3	16QAM	8	0	20.75	20.75	20.94	22	2
3	16QAM	8	4	20.76	20.79	20.99		
3	16QAM	8	7	20.71	20.73	20.96		
3	16QAM	15	0	20.68	20.70	20.87		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.54	22.58	22.66	24	0
1.4	QPSK	1	3	22.62	22.67	22.72		
1.4	QPSK	1	5	22.50	22.58	22.61		
1.4	QPSK	3	0	22.60	22.63	22.74		
1.4	QPSK	3	1	22.64	22.69	22.77		
1.4	QPSK	3	3	22.63	22.68	22.80		
1.4	QPSK	6	0	21.61	21.60	21.82	23	1
1.4	16QAM	1	0	21.78	21.81	21.90	23	1
1.4	16QAM	1	3	21.85	21.88	21.97		
1.4	16QAM	1	5	21.74	21.81	21.88		
1.4	16QAM	3	0	21.63	21.66	21.77		
1.4	16QAM	3	1	21.68	21.71	21.81		
1.4	16QAM	3	3	21.66	21.70	21.81		
1.4	16QAM	6	0	20.71	20.71	20.89	22	2

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

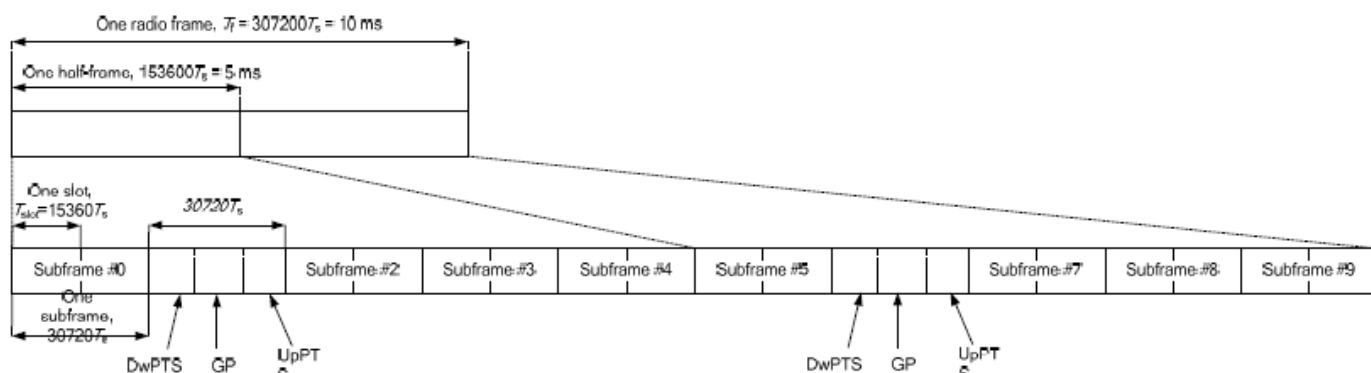


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<Default Power Mode>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.17	23.03	23.02	24	0
20	QPSK	1	49	22.85	22.73	22.90		
20	QPSK	1	99	22.76	22.81	22.90		
20	QPSK	50	0	21.35	21.20	21.28	23	1
20	QPSK	50	24	21.21	21.01	21.16		
20	QPSK	50	50	21.09	21.02	21.15		
20	QPSK	100	0	21.22	21.07	21.18	23	1
20	16QAM	1	0	21.58	21.47	21.41		
20	16QAM	1	49	21.16	21.00	21.15		
20	16QAM	1	99	21.03	21.05	21.17	22	2
20	16QAM	50	0	20.36	20.19	20.27		
20	16QAM	50	24	20.22	20.03	20.19		
20	16QAM	50	50	20.15	20.02	20.17	22	2
20	16QAM	100	0	20.21	20.07	20.21		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.95	22.89	22.99	24	0
15	QPSK	1	37	22.74	22.53	22.67		
15	QPSK	1	74	22.87	22.80	22.95		
15	QPSK	36	0	21.34	21.14	21.36	23	1
15	QPSK	36	20	21.22	21.02	21.20		
15	QPSK	36	39	21.12	21.10	21.26		
15	QPSK	75	0	21.28	21.04	21.26	23	1
15	16QAM	1	0	21.47	21.39	21.44		
15	16QAM	1	37	21.28	21.08	21.34		
15	16QAM	1	74	21.18	21.09	21.23	22	2
15	16QAM	36	0	20.26	20.07	20.28		
15	16QAM	36	20	20.22	20.00	20.20		
15	16QAM	36	39	20.03	20.01	20.21	22	2
15	16QAM	75	0	20.22	20.03	20.23		
Channel				37800	38000	38200		
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.82	22.79	22.97	24	0
10	QPSK	1	25	22.85	22.82	23.05		
10	QPSK	1	49	22.77	22.78	22.95		
10	QPSK	25	0	21.19	21.11	21.30	23	1
10	QPSK	25	12	21.16	21.09	21.30		
10	QPSK	25	25	21.08	21.04	21.25		
10	QPSK	50	0	21.16	21.07	21.29	23	1
10	16QAM	1	0	21.27	21.24	21.33		
10	16QAM	1	25	21.19	21.08	21.27		
10	16QAM	1	49	21.02	21.00	21.19	22	2
10	16QAM	25	0	20.20	20.13	20.32		
10	16QAM	25	12	20.20	20.12	20.34		
10	16QAM	25	25	20.13	20.03	20.25	22	2
10	16QAM	50	0	20.18	20.09	20.34		



Exhibit 11

Report No. : FA632103

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.77	22.67	22.90	24	0
5	QPSK	1	12	22.86	22.80	23.03		
5	QPSK	1	24	22.84	22.77	22.96		
5	QPSK	12	0	21.21	21.07	21.23	23	1
5	QPSK	12	7	21.18	21.08	21.33		
5	QPSK	12	13	21.19	21.05	21.31		
5	QPSK	25	0	21.11	21.02	21.27		
5	16QAM	1	0	21.25	21.08	21.31	23	1
5	16QAM	1	12	21.28	21.16	21.36		
5	16QAM	1	24	21.16	21.03	21.27		
5	16QAM	12	0	20.21	20.07	20.24	22	2
5	16QAM	12	7	20.17	20.05	20.31		
5	16QAM	12	13	20.19	20.04	20.30		
5	16QAM	25	0	20.20	20.10	20.32		

<Near-body and Hotspot Mode>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.17	23.03	23.02	24	0
20	QPSK	1	49	22.85	22.73	22.90		
20	QPSK	1	99	22.76	22.81	22.90		
20	QPSK	50	0	21.35	21.20	21.28	23	1
20	QPSK	50	24	21.21	21.01	21.16		
20	QPSK	50	50	21.09	21.02	21.15		
20	QPSK	100	0	21.22	21.07	21.18		
20	16QAM	1	0	21.58	21.47	21.41	23	1
20	16QAM	1	49	21.16	21.00	21.15		
20	16QAM	1	99	21.03	21.05	21.17		
20	16QAM	50	0	20.36	20.19	20.27	22	2
20	16QAM	50	24	20.22	20.03	20.19		
20	16QAM	50	50	20.15	20.02	20.17		
20	16QAM	100	0	20.21	20.07	20.21		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.95	22.89	22.99	24	0
15	QPSK	1	37	22.74	22.53	22.67		
15	QPSK	1	74	22.87	22.80	22.95		
15	QPSK	36	0	21.34	21.14	21.36	23	1
15	QPSK	36	20	21.22	21.02	21.20		
15	QPSK	36	39	21.12	21.10	21.26		
15	QPSK	75	0	21.28	21.04	21.26		
15	16QAM	1	0	21.47	21.39	21.44	23	1
15	16QAM	1	37	21.28	21.08	21.34		
15	16QAM	1	74	21.18	21.09	21.23		
15	16QAM	36	0	20.26	20.07	20.28	22	2
15	16QAM	36	20	20.22	20.00	20.20		
15	16QAM	36	39	20.03	20.01	20.21		
15	16QAM	75	0	20.22	20.03	20.23		
Channel				37800	38000	38200		
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.82	22.79	22.97	24	0
10	QPSK	1	25	22.85	22.82	23.05		
10	QPSK	1	49	22.77	22.78	22.95		
10	QPSK	25	0	21.19	21.11	21.30	23	1
10	QPSK	25	12	21.16	21.09	21.30		
10	QPSK	25	25	21.08	21.04	21.25		
10	QPSK	50	0	21.16	21.07	21.29		
10	16QAM	1	0	21.27	21.24	21.33	23	1
10	16QAM	1	25	21.19	21.08	21.27		
10	16QAM	1	49	21.02	21.00	21.19		
10	16QAM	25	0	20.20	20.13	20.32	22	2
10	16QAM	25	12	20.20	20.12	20.34		
10	16QAM	25	25	20.13	20.03	20.25		
10	16QAM	50	0	20.18	20.09	20.34		



Exhibit 11

Report No. : FA632103

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.77	22.67	22.90	24	0
5	QPSK	1	12	22.86	22.80	23.03		
5	QPSK	1	24	22.84	22.77	22.96		
5	QPSK	12	0	21.21	21.07	21.23	23	1
5	QPSK	12	7	21.18	21.08	21.33		
5	QPSK	12	13	21.19	21.05	21.31		
5	QPSK	25	0	21.11	21.02	21.27		
5	16QAM	1	0	21.25	21.08	21.31	23	1
5	16QAM	1	12	21.28	21.16	21.36		
5	16QAM	1	24	21.16	21.03	21.27		
5	16QAM	12	0	20.21	20.07	20.24	22	2
5	16QAM	12	7	20.17	20.05	20.31		
5	16QAM	12	13	20.19	20.04	20.30		
5	16QAM	25	0	20.20	20.10	20.32		

<LTE Rel. 10 Carrier Aggregation>

General Note:

1. This device supports LTE Rel.11 Cat9 and Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. All permutations exist. No restrictions on Pcell & Scell combinations.
3. Only supported intra-band non-contiguous CA, intra-band contiguous CA is not supported.

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A	2	Yes	Yes	Yes	Yes	Yes	Yes	40	0
	4			Yes	Yes	Yes	Yes		
CA_2A-5A	2			Yes	Yes	Yes	Yes	30	0
	5			Yes	Yes				
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	1
	12		Yes	Yes	Yes				
CA_2A-17A	2			Yes	Yes			20	0
	17			Yes	Yes				
CA_4A-4A	4			Yes	Yes	Yes	Yes	40	0
	4			Yes	Yes	Yes	Yes		
CA_4A-5A	4			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes				
CA_4A-7A	4			Yes	Yes			30	0
	7			Yes	Yes	Yes	Yes		
CA_4A-12A	4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
	12			Yes	Yes				
CA_4A-17A	4			Yes	Yes			20	0
	17			Yes	Yes				
CA_5A-7A	5	Yes	Yes	Yes	Yes			30	0
	7				Yes	Yes	Yes		
CA_7C	7					Yes		40	1
	7					Yes	Yes		
	7						Yes		
	7				Yes	Yes	Yes		
CA_7A-7A	7			Yes				40	0
	7					Yes			
	7				Yes				
	7				Yes	Yes			
	7					Yes			
	7					Yes	Yes		
	7						Yes		
	7						Yes		
CA_25A-25A	25			Yes	Yes	Yes	Yes	40	1
	25			Yes	Yes	Yes	Yes		



<LTE Carrier Aggregation Conducted Power>

General Note:

1. According to KDB941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02 LTE CA conducted power requirement will base on below procedure for conducted power verification.
2. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
3. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
4. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.


<Default power mode for two CA power verification>

Configure		PCC							SCC							Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Modulation	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	Modulation	DL# RB	DL RB Offset	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
Inter-Band		Band 2	15M	1857.5	18675	QPSK	1	0	Band 4	20M	2132.5	2175	QPSK	1	0	23.12	23.16
		Band 4	10M	1750	20350	QPSK	1	49	Band 2	20M	1960	900	QPSK	1	99	22.86	22.99
		Band 2	15M	1857.5	18675	QPSK	1	0	Band 5	10M	881.5	2525	QPSK	1	0	23.03	23.16
		Band 5	10M	829	20450	QPSK	1	0	Band 2	20M	1960	900	QPSK	1	0	22.86	22.99
		Band 2	15M	1857.5	18675	QPSK	1	0	Band 12	10M	737.5	5095	QPSK	1	0	23.11	23.16
		Band 12	3M	714.5	23165	QPSK	1	8	Band 2	20M	1960	900	QPSK	1	49	22.88	22.90
		Band 2	15M	1857.5	18675	QPSK	1	0	Band 17	10M	740	5790	QPSK	1	0	23.05	23.16
		Band 17	5M	713.5	23825	QPSK	1	12	Band 2	20M	1960	900	QPSK	1	49	22.68	22.78
		Band 4	10M	1750	20350	QPSK	1	49	Band 5	10M	881.5	2525	QPSK	1	49	22.89	22.99
		Band 5	10M	829	20450	QPSK	1	0	Band 4	20M	2132.5	2175	QPSK	1	0	22.83	22.99
		Band 4	10M	1750	20350	QPSK	1	49	Band 7	20M	2655	3100	QPSK	1	99	22.88	22.99
		Band 7	20M	2510	20850	QPSK	1	99	Band 4	20M	2132.5	2175	QPSK	1	99	23.00	23.01
		Band 4	10M	1750	20350	QPSK	1	49	Band 12	10M	737.5	5095	QPSK	1	49	22.95	22.99
		Band 4	10M	1750	20350	QPSK	1	49	Band 17	10M	740	5790	QPSK	1	49	22.84	22.99
		Band 5	10M	829	20450	QPSK	1	0	Band 7	20M	2655	3100	QPSK	1	0	22.83	22.99
Band 7	20M	2510	20850	QPSK	1	99	Band 5	10M	881.5	2525	QPSK	1	49	22.95	23.01		
Intra-Band	Non-Contiguous	Band 4	10M	1750	20350	QPSK	1	49	Band 4	5M	2112.5	1975	QPSK	1	24	22.89	22.99
		Band 7	20M	2510	20850	QPSK	1	99	Band 7	5M	2687.5	3425	QPSK	1	24	22.96	23.01
		Band 25	20M	1880	26340	QPSK	1	0	Band 25	5M	1992.5	8665	QPSK	1	0	23.18	23.28
	Contiguous	Band 7	20M	2510	20850	QPSK	1	99	Band 7	20M	2644.5	2995	QPSK	1	99	22.95	23.01
		Band 7	20M	2510	20850	QPSK	1	99	Band 7	15M	2647.3	3023	QPSK	1	99	22.90	23.01
		Band 7	20M	2510	20850	QPSK	1	99	Band 7	10M	2650	3050	QPSK	1	99	22.86	23.01

<Near-body and Hotspot mode for two CA power verification>

Configure		PCC						SCC						Power			
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Modulation	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	Modulation	DL# RB	DL RB Offset	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
Inter-Band		Band 4	10M	1750	20350	16QAM	1	49	Band 2	20M	1960	900	16QAM	1	99	22.89	22.90
		Band 5	5M	826.5	20425	16QAM	1	0	Band 2	20M	1960	900	16QAM	1	0	19.10	19.13
		Band 12	3M	700.5	23025	16QAM	1	8	Band 2	20M	1960	900	16QAM	1	49	20.58	20.62
		Band 17	5M	713.5	23825	16QAM	1	12	Band 2	20M	1960	900	16QAM	1	49	20.52	20.59
		Band 4	10M	1750	20350	16QAM	1	49	Band 5	10M	881.5	2525	16QAM	1	49	22.86	22.90
		Band 5	5M	826.5	20425	16QAM	1	0	Band 4	20M	2132.5	2175	16QAM	1	0	19.06	19.13
		Band 4	10M	1750	20350	16QAM	1	49	Band 7	20M	2655	3100	16QAM	1	99	22.87	22.90
		Band 4	10M	1750	20350	16QAM	1	49	Band 12	10M	737.5	5095	16QAM	1	99	22.88	22.90
		Band 12	3M	700.5	23025	16QAM	1	8	Band 4	20M	2132.5	2175	16QAM	1	49	20.55	20.62
		Band 4	10M	1750	20350	16QAM	1	49	Band 17	10M	740	5790	16QAM	1	49	22.84	22.90
		Band 17	5M	713.5	23825	16QAM	1	12	Band 4	20M	2132.5	2175	16QAM	1	49	20.43	20.59
		Band 5	5M	826.5	20425	16QAM	1	0	Band 7	20M	2655	3100	16QAM	1	0	19.05	19.13
Intra-Band	Non-Contiguous	Band 4	10M	1750	20350	16QAM	1	49	Band 4	5M	2112.5	1975	16QAM	1	24	22.82	22.90

13. Antenna Location

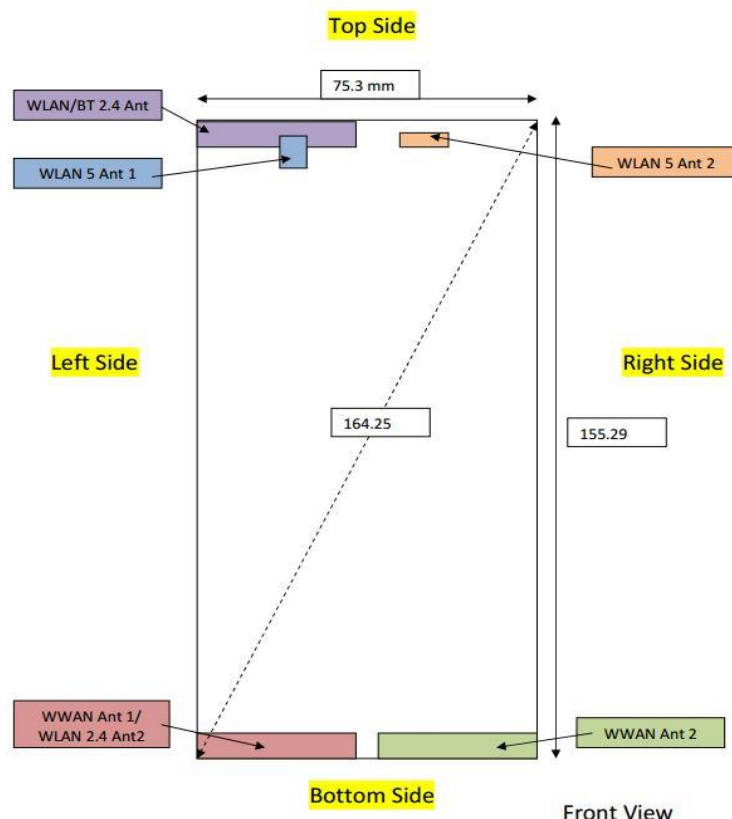

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN Ant1	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	> 25mm	≤ 25mm
2.4GHz WLAN Ant2	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm	≤ 25mm
2.4GHz WLAN MIMO	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
5Hz WLAN Ant1	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	> 25mm	≤ 25mm
5Hz WLAN Ant2	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	> 25mm
5Hz WLAN MIMO	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant	Yes	Yes	No	Yes	Yes	Yes
2.4GHz WLAN Ant1	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN Ant2	Yes	Yes	No	Yes	No	Yes
2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes	No	Yes
5Hz WLAN Ant1	Yes	Yes	Yes	No	No	Yes
5Hz WLAN Ant2	Yes	Yes	Yes	No	Yes	No
5Hz WLAN MIMO	Yes	Yes	Yes	No	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are > 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces.
- Since the device supports MIMO operated, when each chain transmits at the same time that right side can be exempt for 2.4GHz WLAN only, bottom side can be exempt for 5GHz WLAN only

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. While operating in "Front" and "Back" configuration by end user, the device will limit different maximum output powers on the WCDMA B4 and LTE B12 / B17 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.
6. While operating in body-adjacent exposure configuration during a mobile hotspot session, the device will reduced output powers on the WCDMA B4 and LTE B12 / B17 transmitter and detail descriptions of the power reduction mechanism are included in the operational description.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE Band17 SAR test was covered by Band12, according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



14.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	22.60	24.00	1.380	-0.19	0.343	0.473
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1513	1752.6	22.60	24.00	1.380	-0.01	0.145	0.200
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	22.60	24.00	1.380	0.05	0.387	0.534
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	22.39	24.00	1.449	0.08	0.362	0.524
01	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	22.48	24.00	1.419	0.02	0.381	0.541
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1513	1752.6	22.60	24.00	1.380	0.02	0.136	0.188

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
02	LTE Band 12	10M	QPSK	1	25	Right Cheek	0mm	23095	707.5	22.74	24.00	1.337	-0.188	0.201	0.269
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	21.90	23.00	1.288	-0.048	0.088	0.113
	LTE Band 12	10M	QPSK	1	25	Right Tilted	0mm	23095	707.5	22.74	24.00	1.337	0.119	0.053	0.071
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	21.90	23.00	1.288	0.14	0.028	0.036
	LTE Band 12	10M	QPSK	1	25	Left Cheek	0mm	23095	707.5	22.74	24.00	1.337	0.057	0.133	0.178
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	21.90	23.00	1.288	0.126	0.065	0.084
	LTE Band 12	10M	QPSK	1	25	Left Tilted	0mm	23095	707.5	22.74	24.00	1.337	0.007	0.056	0.075
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	21.90	23.00	1.288	0.087	0.025	0.032
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26340	1880	23.28	24.00	1.180	-0.063	0.321	0.379
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26140	1860	23.20	24.00	1.202	-0.023	0.327	0.393
03	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26590	1905	23.21	24.00	1.199	-0.067	0.344	0.413
	LTE Band 25	20M	QPSK	50	0	Right Cheek	0mm	26340	1880	21.93	23.00	1.279	0.023	0.247	0.316
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	26340	1880	23.28	24.00	1.180	0.047	0.099	0.117
	LTE Band 25	20M	QPSK	50	0	Right Tilted	0mm	26340	1880	21.93	23.00	1.279	0.009	0.080	0.102
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26340	1880	23.28	24.00	1.180	0.151	0.264	0.312
	LTE Band 25	20M	QPSK	50	0	Left Cheek	0mm	26340	1880	21.93	23.00	1.279	0.127	0.203	0.260
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	26340	1880	23.28	24.00	1.180	0.099	0.104	0.123
	LTE Band 25	20M	QPSK	50	0	Left Tilted	0mm	26340	1880	21.93	23.00	1.279	0.003	0.082	0.105

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Right Cheek	0mm	37850	2580	23.17	24.00	1.211	62.9	1.006	0.09	0.161	0.196
	LTE Band 38	20M	QPSK	50	0	Right Cheek	0mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.13	0.073	0.107
	LTE Band 38	20M	QPSK	1	0	Right Tilted	0mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.12	0.084	0.102
	LTE Band 38	20M	QPSK	50	0	Right Tilted	0mm	37850	2580	21.35	23.00	1.462	62.9	1.006	0.01	0.053	0.078
	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.02	0.234	0.285
	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	38000	2595	23.03	24.00	1.250	62.9	1.006	-0.02	0.278	0.350
04	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	38150	2610	23.02	24.00	1.253	62.9	1.006	0.06	0.284	0.358
	LTE Band 38	20M	QPSK	50	0	Left Cheek	0mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.17	0.113	0.166
	LTE Band 38	20M	QPSK	1	0	Left Tilted	0mm	38750	2580	23.17	24.00	1.211	62.9	1.006	0.06	0.069	0.084
	LTE Band 38	20M	QPSK	50	0	Left Tilted	0mm	38750	2580	21.35	23.00	1.462	62.9	1.006	-0.15	0.036	0.053

**14.2 Hotspot SAR****<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	21.84	23.50	1.466	-0.11	0.660	0.967
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	21.74	23.50	1.500	-0.07	0.649	0.973
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1513	1752.6	21.77	23.50	1.489	-0.06	0.668	0.995
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1413	1732.6	21.84	23.50	1.466	0.09	0.739	1.083
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	21.74	23.50	1.500	0.03	0.731	1.096
05	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	21.77	23.50	1.489	0.07	0.760	1.132
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	21.84	23.50	1.466	-0.01	0.180	0.264
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	21.84	23.50	1.466	-0.02	0.327	0.479
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1413	1732.6	21.84	23.50	1.466	-0.06	0.690	1.011
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	21.74	23.50	1.500	-0.03	0.662	0.993
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1513	1752.6	21.77	23.50	1.489	0.04	0.672	1.001

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	20.43	21.50	1.279	-0.11	0.648	0.829
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	20.29	21.50	1.321	-0.05	0.603	0.797
	LTE Band 12	10M	QPSK	50	0	Front	10mm	23095	707.5	20.30	21.50	1.318	-0.04	0.625	0.824
	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	20.43	21.50	1.279	-0.15	0.672	0.860
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	20.29	21.50	1.321	-0.16	0.612	0.809
06	LTE Band 12	10M	QPSK	50	0	Back	10mm	23095	707.5	20.30	21.50	1.318	-0.1	0.658	0.867
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	20.43	21.50	1.279	-0.06	0.084	0.107
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	23095	707.5	20.29	21.50	1.321	0.13	0.050	0.066
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	23095	707.5	20.43	21.50	1.279	-0.17	0.422	0.540
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	23095	707.5	20.29	21.50	1.321	-0.06	0.250	0.330
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	20.43	21.50	1.279	0.05	0.341	0.436
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	20.29	21.50	1.321	0.04	0.320	0.423
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26340	1880	23.28	24.00	1.180	-0.036	0.638	0.753
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26340	1880	21.93	23.00	1.279	0.128	0.560	0.716
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26340	1880	23.28	24.00	1.180	0.014	0.806	0.951
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26140	1860	23.20	24.00	1.202	0.031	0.831	0.999
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26590	1905	23.21	24.00	1.199	0.01	0.916	1.099
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26340	1880	21.93	23.00	1.279	-0.078	0.684	0.875
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26140	1860	21.88	23.00	1.294	-0.001	0.681	0.881
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26590	1905	21.92	23.00	1.282	0.035	0.741	0.950
	LTE Band 25	20M	QPSK	100	0	Back	10mm	26340	1880	21.84	23.00	1.306	0.016	0.680	0.888
	LTE Band 25	20M	QPSK	1	0	Left Side	10mm	26340	1880	23.28	24.00	1.180	-0.056	0.181	0.214
	LTE Band 25	20M	QPSK	50	0	Left Side	10mm	26340	1880	21.93	23.00	1.279	-0.018	0.139	0.178
	LTE Band 25	20M	QPSK	1	0	Right Side	10mm	26340	1880	23.28	24.00	1.180	0.182	0.336	0.397
	LTE Band 25	20M	QPSK	50	0	Right Side	10mm	26340	1880	21.93	23.00	1.279	0.062	0.260	0.333
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26340	1880	23.28	24.00	1.180	0.037	0.792	0.935
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26140	1860	23.20	24.00	1.202	-0.129	0.811	0.975
07	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26590	1905	23.21	24.00	1.199	0.002	0.941	1.129
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26340	1880	21.93	23.00	1.279	0.011	0.646	0.826
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26140	1860	21.88	23.00	1.294	0.03	0.595	0.770
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10mm	26590	1905	21.92	23.00	1.282	0.023	0.691	0.886
	LTE Band 25	20M	QPSK	100	0	Bottom Side	10mm	26340	1880	21.84	23.00	1.306	-0.003	0.637	0.832

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.04	0.469	0.571
	LTE Band 38	20M	QPSK	50	0	Front	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.08	0.226	0.332
	LTE Band 38	20M	QPSK	1	0	Back	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.03	0.724	0.882
	LTE Band 38	20M	QPSK	1	0	Back	10mm	38000	2595	23.03	24.00	1.250	62.9	1.006	-0.04	0.726	0.913
08	LTE Band 38	20M	QPSK	1	0	Back	10mm	38150	2610	23.02	24.00	1.253	62.9	1.006	-0.05	0.732	0.923
	LTE Band 38	20M	QPSK	50	0	Back	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	0.11	0.295	0.434
	LTE Band 38	20M	QPSK	100	0	Back	10mm	37850	2580	21.22	23.00	1.507	62.9	1.006	0.03	0.318	0.482
	LTE Band 38	20M	QPSK	1	0	Left Side	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.11	0.170	0.207
	LTE Band 38	20M	QPSK	50	0	Left Side	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.15	0.082	0.121
	LTE Band 38	20M	QPSK	1	0	Right Side	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.13	0.063	0.077
	LTE Band 38	20M	QPSK	50	0	Right Side	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.18	0.030	0.044
	LTE Band 38	20M	QPSK	1	0	Bottom Side	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.05	0.483	0.588
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	0.02	0.234	0.344

14.3 Body Worn Accessory SAR
<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	21.84	23.50	1.466	-0.11	0.660	0.967
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1312	1712.4	21.74	23.50	1.500	-0.07	0.649	0.973
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1513	1752.6	21.77	23.50	1.489	-0.06	0.668	0.995
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1413	1732.6	21.84	23.50	1.466	0.09	0.739	1.083
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1312	1712.4	21.74	23.50	1.500	0.03	0.731	1.096
09	WCDMA IV	RMC 12.2Kbps	Back	10mm	1513	1752.6	21.77	23.50	1.489	0.07	0.760	1.132

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	20.43	21.50	1.279	-0.11	0.648	0.829
	LTE Band 12	10M	QPSK	25	0	Front	10mm	23095	707.5	20.29	21.50	1.321	-0.05	0.603	0.797
	LTE Band 12	10M	QPSK	50	0	Front	10mm	23095	707.5	20.30	21.50	1.318	-0.04	0.625	0.824
	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	20.43	21.50	1.279	-0.15	0.672	0.860
	LTE Band 12	10M	QPSK	25	0	Back	10mm	23095	707.5	20.29	21.50	1.321	-0.16	0.612	0.809
10	LTE Band 12	10M	QPSK	50	0	Back	10mm	23095	707.5	20.30	21.50	1.318	-0.1	0.658	0.867
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26340	1880	23.28	24.00	1.180	-0.036	0.638	0.753
	LTE Band 25	20M	QPSK	50	0	Front	10mm	26340	1880	21.93	23.00	1.279	0.128	0.560	0.716
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26340	1880	23.28	24.00	1.180	0.014	0.806	0.951
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26140	1860	23.20	24.00	1.202	0.031	0.831	0.999
11	LTE Band 25	20M	QPSK	1	0	Back	10mm	26590	1905	23.21	24.00	1.199	0.01	0.916	1.099
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26340	1880	21.93	23.00	1.279	-0.078	0.684	0.875
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26140	1860	21.88	23.00	1.294	-0.001	0.681	0.881
	LTE Band 25	20M	QPSK	50	0	Back	10mm	26590	1905	21.92	23.00	1.282	0.035	0.741	0.950
	LTE Band 25	20M	QPSK	100	0	Back	10mm	26340	1880	21.84	23.00	1.306	0.016	0.680	0.888

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.04	0.469	0.571
	LTE Band 38	20M	QPSK	50	0	Front	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	-0.08	0.226	0.332
	LTE Band 38	20M	QPSK	1	0	Back	10mm	37850	2580	23.17	24.00	1.211	62.9	1.006	-0.03	0.724	0.882
	LTE Band 38	20M	QPSK	1	0	Back	10mm	38000	2595	23.03	24.00	1.250	62.9	1.006	-0.04	0.726	0.913
12	LTE Band 38	20M	QPSK	1	0	Back	10mm	38150	2610	23.02	24.00	1.253	62.9	1.006	-0.05	0.732	0.923
	LTE Band 38	20M	QPSK	50	0	Back	10mm	37850	2580	21.35	23.00	1.462	62.9	1.006	0.11	0.295	0.434
	LTE Band 38	20M	QPSK	100	0	Back	10mm	37850	2580	21.22	23.00	1.507	62.9	1.006	0.03	0.318	0.482

14.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26590	1905	23.21	24.00	1.199	0.002	0.941	-	1.129
2nd	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26590	1905	23.21	24.00	1.199	-0.019	0.888	1.06	1.065

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + Bluetooth		Yes		Yes
6.	GPRS/EDGE + Bluetooth		Yes		Yes
7.	WCDMA+ Bluetooth		Yes		Yes
8.	LTE + Bluetooth		Yes		Yes
9.	GSM Voice + WLAN5GHz	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + WLAN5GHz + Bluetooth		Yes		Yes
14.	GPRS/EDGE + WLAN5GHz + Bluetooth		Yes		Yes
15.	WCDMA + WLAN5GHz + Bluetooth		Yes		Yes
16.	LTE + WLAN5GHz + Bluetooth		Yes		Yes

General Note:

- This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client).
- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
- 2.4GHz WLAN and Bluetooth cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.
 - The SPLSR calculated results please refer to section 15.5.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g Product Specific SAR, the Bluetooth max power is 10dBm, The test exclusion threshold is 3.15 which is ≤ 7.5 , for Product Specific SAR testing is not required.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Bluetooth Max Power	Exposure Position	Product Specific
	Test separation	5 mm
10 dBm	Estimated 10g SAR (W/kg)	0.168 W/kg



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.242	0.761	0.003	1.003	0.245	1.006		
		Right Tilted	0.094	0.653	0.001	0.747	0.095	0.748		
		Left Cheek	0.254	0.338	0.006	0.592	0.260	0.598		
		Left Tilted	0.098	0.319	0.001	0.417	0.099	0.418		
	GSM1900	Right Cheek	0.271	0.761	0.003	1.032	0.274	1.035		
		Right Tilted	0.090	0.653	0.001	0.743	0.091	0.744		
		Left Cheek	0.246	0.338	0.006	0.584	0.252	0.590		
		Left Tilted	0.061	0.319	0.001	0.380	0.062	0.381		
WCDMA	WCDMA II	Right Cheek	0.502	0.761	0.003	1.263	0.505	1.266		
		Right Tilted	0.165	0.653	0.001	0.818	0.166	0.819		
		Left Cheek	0.474	0.338	0.006	0.812	0.480	0.818		
		Left Tilted	0.105	0.319	0.001	0.424	0.106	0.425		
	WCDMA IV	Right Cheek	0.473	0.761	0.003	1.234	0.476	1.237		
		Right Tilted	0.200	0.653	0.001	0.853	0.201	0.854		
		Left Cheek	0.541	0.338	0.006	0.879	0.547	0.885		
		Left Tilted	0.188	0.319	0.001	0.507	0.189	0.508		
	WCDMA V	Right Cheek	0.208	0.761	0.003	0.969	0.211	0.972		
		Right Tilted	0.085	0.653	0.001	0.738	0.086	0.739		
		Left Cheek	0.388	0.338	0.006	0.726	0.394	0.732		
		Left Tilted	0.119	0.319	0.001	0.438	0.120	0.439		
LTE	LTE Band 2	Right Cheek	0.393	0.761	0.003	1.154	0.396	1.157		
		Right Tilted	0.121	0.653	0.001	0.774	0.122	0.775		
		Left Cheek	0.385	0.338	0.006	0.723	0.391	0.729		
		Left Tilted	0.109	0.319	0.001	0.428	0.110	0.429		
	LTE Band 4	Right Cheek	0.401	0.761	0.003	1.162	0.404	1.165		
		Right Tilted	0.136	0.653	0.001	0.789	0.137	0.790		
		Left Cheek	0.462	0.338	0.006	0.800	0.468	0.806		
		Left Tilted	0.147	0.319	0.001	0.466	0.148	0.467		
	LTE Band 5	Right Cheek	0.273	0.761	0.003	1.034	0.276	1.037		
		Right Tilted	0.105	0.653	0.001	0.758	0.106	0.759		
		Left Cheek	0.428	0.338	0.006	0.766	0.434	0.772		
		Left Tilted	0.137	0.319	0.001	0.456	0.138	0.457		
	LTE Band 7	Right Cheek	0.210	0.761	0.003	0.971	0.213	0.974		
		Right Tilted	0.127	0.653	0.001	0.780	0.128	0.781		
		Left Cheek	0.376	0.338	0.006	0.714	0.382	0.720		
		Left Tilted	0.099	0.319	0.001	0.418	0.100	0.419		
	LTE Band 12	Right Cheek	0.269	0.761	0.003	1.030	0.272	1.033		
		Right Tilted	0.071	0.653	0.001	0.724	0.072	0.725		
		Left Cheek	0.178	0.338	0.006	0.516	0.184	0.522		
		Left Tilted	0.075	0.319	0.001	0.394	0.076	0.395		
	LTE Band 25	Right Cheek	0.413	0.761	0.003	1.174	0.416	1.177		
		Right Tilted	0.117	0.653	0.001	0.770	0.118	0.771		
		Left Cheek	0.312	0.338	0.006	0.650	0.318	0.656		
		Left Tilted	0.123	0.319	0.001	0.442	0.124	0.443		
	LTE Band 38	Right Cheek	0.107	0.761	0.003	0.868	0.110	0.871		
		Right Tilted	0.102	0.653	0.001	0.755	0.103	0.756		
		Left Cheek	0.358	0.338	0.006	0.696	0.364	0.702		
		Left Tilted	0.084	0.319	0.001	0.403	0.085	0.404		



WWAN Band		Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.242	0.909	0.246	1.151	0.488	1.397		
		Right Tilted	0.094	0.599	0.286	0.693	0.380	0.979		
		Left Cheek	0.254	0.509	0.350	0.763	0.604	1.113		
		Left Tilted	0.098	0.442	0.386	0.540	0.484	0.926		
	GSM1900	Right Cheek	0.271	0.909	0.246	1.180	0.517	1.426		
		Right Tilted	0.090	0.599	0.286	0.689	0.376	0.975		
		Left Cheek	0.246	0.509	0.350	0.755	0.596	1.105		
		Left Tilted	0.061	0.442	0.386	0.503	0.447	0.889		
WCDMA	WCDMA II	Right Cheek	0.502	0.909	0.246	1.411	0.748	1.657	0.04	Case 1
		Right Tilted	0.165	0.599	0.286	0.764	0.451	1.050		
		Left Cheek	0.474	0.509	0.350	0.983	0.824	1.333		
		Left Tilted	0.105	0.442	0.386	0.547	0.491	0.933		
	WCDMA IV	Right Cheek	0.473	0.909	0.246	1.382	0.719	1.628	0.04	Case 2
		Right Tilted	0.200	0.599	0.286	0.799	0.486	1.085		
		Left Cheek	0.541	0.509	0.350	1.050	0.891	1.400		
		Left Tilted	0.188	0.442	0.386	0.630	0.574	1.016		
	WCDMA V	Right Cheek	0.208	0.909	0.246	1.117	0.454	1.363		
		Right Tilted	0.085	0.599	0.286	0.684	0.371	0.970		
		Left Cheek	0.388	0.509	0.350	0.897	0.738	1.247		
		Left Tilted	0.119	0.442	0.386	0.561	0.505	0.947		
LTE	LTE Band 2	Right Cheek	0.393	0.909	0.246	1.302	0.639	1.548		
		Right Tilted	0.121	0.599	0.286	0.720	0.407	1.006		
		Left Cheek	0.385	0.509	0.350	0.894	0.735	1.244		
		Left Tilted	0.109	0.442	0.386	0.551	0.495	0.937		
	LTE Band 4	Right Cheek	0.401	0.909	0.246	1.310	0.647	1.556		
		Right Tilted	0.136	0.599	0.286	0.735	0.422	1.021		
		Left Cheek	0.462	0.509	0.350	0.971	0.812	1.321		
		Left Tilted	0.147	0.442	0.386	0.589	0.533	0.975		
	LTE Band 5	Right Cheek	0.273	0.909	0.246	1.182	0.519	1.428		
		Right Tilted	0.105	0.599	0.286	0.704	0.391	0.990		
		Left Cheek	0.428	0.509	0.350	0.937	0.778	1.287		
		Left Tilted	0.137	0.442	0.386	0.579	0.523	0.965		
	LTE Band 7	Right Cheek	0.210	0.909	0.246	1.119	0.456	1.365		
		Right Tilted	0.127	0.599	0.286	0.726	0.413	1.012		
		Left Cheek	0.376	0.509	0.350	0.885	0.726	1.235		
		Left Tilted	0.099	0.442	0.386	0.541	0.485	0.927		
	LTE Band 12	Right Cheek	0.269	0.909	0.246	1.178	0.515	1.424		
		Right Tilted	0.071	0.599	0.286	0.670	0.357	0.956		
		Left Cheek	0.178	0.509	0.350	0.687	0.528	1.037		
		Left Tilted	0.075	0.442	0.386	0.517	0.461	0.903		
	LTE Band 25	Right Cheek	0.413	0.909	0.246	1.322	0.659	1.568		
		Right Tilted	0.117	0.599	0.286	0.716	0.403	1.002		
		Left Cheek	0.312	0.509	0.350	0.821	0.662	1.171		
		Left Tilted	0.123	0.442	0.386	0.565	0.509	0.951		
	LTE Band 38	Right Cheek	0.107	0.909	0.246	1.016	0.353	1.262		
		Right Tilted	0.102	0.599	0.286	0.701	0.388	0.987		
		Left Cheek	0.358	0.509	0.350	0.859	0.708	1.209		
		Left Tilted	0.084	0.442	0.386	0.526	0.470	0.912		

15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.943	0.270	0.040	1.213	0.983	1.253		
		Back	1.097	0.201	0.047	1.298	1.144	1.345		
		Left side	0.357	0.069	0.011	0.426	0.368	0.437		
		Right side	0.159			0.159	0.159	0.159		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.458	0.003	0.033	0.461	0.491	0.494		
	GSM1900	Front	0.550	0.270	0.040	0.820	0.590	0.860		
		Back	0.588	0.201	0.047	0.789	0.635	0.836		
		Left side	0.180	0.069	0.011	0.249	0.191	0.260		
		Right side	0.287			0.287	0.287	0.287		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.480	0.003	0.033	0.483	0.513	0.516		
WCDMA	WCDMA II	Front	1.142	0.270	0.040	1.412	1.182	1.452		
		Back	1.122	0.201	0.047	1.323	1.169	1.370		
		Left side	0.374	0.069	0.011	0.443	0.385	0.454		
		Right side	0.554			0.554	0.554	0.554		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	1.120	0.003	0.033	1.123	1.153	1.156		
	WCDMA IV	Front	0.995	0.270	0.040	1.265	1.035	1.305		
		Back	1.132	0.201	0.047	1.333	1.179	1.380		
		Left side	0.264	0.069	0.011	0.333	0.275	0.344		
		Right side	0.479			0.479	0.479	0.479		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	1.011	0.003	0.033	1.014	1.044	1.047		
	WCDMA V	Front	0.997	0.270	0.040	1.267	1.037	1.307		
		Back	1.042	0.201	0.047	1.243	1.089	1.290		
		Left side	0.344	0.069	0.011	0.413	0.355	0.424		
		Right side	0.167			0.167	0.167	0.167		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.396	0.003	0.033	0.399	0.429	0.432		

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	LTE Band 2	Front	1.108	0.270	0.040	1.213	0.983	1.253		
		Back	1.133	0.201	0.047	1.298	1.144	1.345		
		Left side	0.296	0.069	0.011	0.426	0.368	0.437		
		Right side	0.438			0.159	0.159	0.159		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	1.176	0.003	0.033	0.461	0.491	0.494		
	LTE Band 4	Front	0.891	0.270	0.040	0.820	0.590	0.860		
		Back	0.849	0.201	0.047	0.789	0.635	0.836		
		Left side	0.325	0.069	0.011	0.249	0.191	0.260		
		Right side	0.603			0.287	0.287	0.287		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.905	0.003	0.033	0.483	0.513	0.516		
	LTE Band 5	Front	1.043	0.270	0.040	1.412	1.182	1.452		
		Back	1.057	0.201	0.047	1.323	1.169	1.370		
		Left side	0.361	0.069	0.011	0.443	0.385	0.454		
		Right side	0.153			0.554	0.554	0.554		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.433	0.003	0.033	1.123	1.153	1.156		
	LTE Band 7	Front	0.916	0.270	0.040	1.265	1.035	1.305		
		Back	1.107	0.201	0.047	1.333	1.179	1.380		
		Left side	0.266	0.069	0.011	0.333	0.275	0.344		
		Right side	0.093			0.479	0.479	0.479		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.705	0.003	0.033	1.014	1.044	1.047		
	LTE Band 12	Front	0.829	0.270	0.040	1.267	1.037	1.307		
		Back	0.867	0.201	0.047	1.243	1.089	1.290		
		Left side	0.107	0.069	0.011	0.413	0.355	0.424		
		Right side	0.540			0.167	0.167	0.167		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.436	0.003	0.033	0.399	0.429	0.432		
	LTE Band 25	Front	0.753	0.270	0.040	1.213	0.983	1.253		
		Back	1.099	0.201	0.047	1.298	1.144	1.345		
		Left side	0.214	0.069	0.011	0.426	0.368	0.437		
		Right side	0.397			0.159	0.159	0.159		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	1.129	0.003	0.033	0.461	0.491	0.494		
	LTE Band 38	Front	0.571	0.270	0.040	0.820	0.590	0.860		
		Back	0.923	0.201	0.047	0.789	0.635	0.836		
		Left side	0.207	0.069	0.011	0.249	0.191	0.260		
		Right side	0.077			0.287	0.287	0.287		
		Top side		0.130	0.004	0.130	0.004	0.134		
		Bottom side	0.588	0.003	0.033	0.483	0.513	0.516		

WWAN Band		Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.943	0.162	0.121	1.105	1.064	1.226		
		Back	1.097	0.040	0.087	1.137	1.184	1.224		
		Left side	0.357	0.012	0.005	0.369	0.362	0.374		
		Right side	0.159	0.011	0.019	0.170	0.178	0.189		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.458			0.458	0.458	0.458		
	GSM1900	Front	0.550	0.162	0.121	0.712	0.671	0.833		
		Back	0.588	0.040	0.087	0.628	0.675	0.715		
		Left side	0.180	0.012	0.005	0.192	0.185	0.197		
		Right side	0.287	0.011	0.019	0.298	0.306	0.317		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.480			0.480	0.480	0.480		
WCDMA	WCDMA II	Front	1.142	0.162	0.121	1.304	1.263	1.425		
		Back	1.122	0.040	0.087	1.162	1.209	1.249		
		Left side	0.374	0.012	0.005	0.386	0.379	0.391		
		Right side	0.554	0.011	0.019	0.565	0.573	0.584		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	1.120			1.120	1.120	1.120		
	WCDMA IV	Front	0.995	0.162	0.121	1.157	1.116	1.278		
		Back	1.132	0.040	0.087	1.172	1.219	1.259		
		Left side	0.264	0.012	0.005	0.276	0.269	0.281		
		Right side	0.479	0.011	0.019	0.490	0.498	0.509		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	1.011			1.011	1.011	1.011		
	WCDMA V	Front	0.997	0.162	0.121	1.159	1.118	1.280		
		Back	1.042	0.040	0.087	1.082	1.129	1.169		
		Left side	0.344	0.012	0.005	0.356	0.349	0.361		
		Right side	0.167	0.011	0.019	0.178	0.186	0.197		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.396			0.396	0.396	0.396		

WWAN Band		Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)					
LTE	LTE Band 2	Front	1.108	0.162	0.121	1.270	1.229	1.391		
		Back	1.133	0.040	0.087	1.173	1.220	1.260		
		Left side	0.296	0.012	0.005	0.308	0.301	0.313		
		Right side	0.438	0.011	0.019	0.449	0.457	0.468		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	1.176			1.176	1.176	1.176		
	LTE Band 4	Front	0.891	0.162	0.121	1.053	1.012	1.174		
		Back	0.849	0.040	0.087	0.889	0.936	0.976		
		Left side	0.325	0.012	0.005	0.337	0.330	0.342		
		Right side	0.603	0.011	0.019	0.614	0.622	0.633		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.905			0.905	0.905	0.905		
	LTE Band 5	Front	1.043	0.162	0.121	1.205	1.164	1.326		
		Back	1.057	0.040	0.087	1.097	1.144	1.184		
		Left side	0.361	0.012	0.005	0.373	0.366	0.378		
		Right side	0.153	0.011	0.019	0.164	0.172	0.183		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.433			0.433	0.433	0.433		
	LTE Band 7	Front	0.916	0.162	0.121	1.078	1.037	1.199		
		Back	1.107	0.040	0.087	1.147	1.194	1.234		
		Left side	0.266	0.012	0.005	0.278	0.271	0.283		
		Right side	0.093	0.011	0.019	0.104	0.112	0.123		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.705			0.705	0.705	0.705		
	LTE Band 12	Front	0.829	0.162	0.121	0.991	0.950	1.112		
		Back	0.867	0.040	0.087	0.907	0.954	0.994		
		Left side	0.107	0.012	0.005	0.119	0.112	0.124		
		Right side	0.540	0.011	0.019	0.551	0.559	0.570		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.436			0.436	0.436	0.436		
	LTE Band 25	Front	0.753	0.162	0.121	0.915	0.874	1.036		
		Back	1.099	0.040	0.087	1.139	1.186	1.226		
		Left side	0.214	0.012	0.005	0.226	0.219	0.231		
		Right side	0.397	0.011	0.019	0.408	0.416	0.427		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	1.129			1.129	1.129	1.129		
	LTE Band 38	Front	0.571	0.162	0.121	0.733	0.692	0.854		
		Back	0.923	0.040	0.087	0.963	1.010	1.050		
		Left side	0.207	0.012	0.005	0.219	0.212	0.224		
		Right side	0.077	0.011	0.019	0.088	0.096	0.107		
		Top side		0.030	0.043	0.030	0.043	0.073		
		Bottom side	0.588			0.588	0.588	0.588		

15.3 Product Specific Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+4+5+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1	
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)	
WCDMA II	Front	-	-	-	2.600	0.618	0.168	3.386
	Back	-	-	-	1.294	0.450	0.168	1.912
	Left side	-	-	-	0.095	0.002	0.168	0.265
	Right side	-	-	-	0.030	0.045	0.168	0.243
	Top side	-	-	-	0.732	0.247	0.168	1.147
	Bottom side	3.173	-	-	-	-	0.168	3.341

Remark:

- According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN SAR ("-") was excluded, due to Hotspot SAR was < 1.2W/kg.

15.4 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.943	0.270	0.040	1.213	0.983	1.253		
		Back	1.097	0.201	0.047	1.298	1.144	1.345		
	GSM1900	Front	0.550	0.270	0.040	0.820	0.590	0.860		
		Back	0.588	0.201	0.047	0.789	0.635	0.836		
WCDMA	WCDMA II	Front	1.142	0.270	0.040	1.412	1.182	1.452		
		Back	1.122	0.201	0.047	1.323	1.169	1.370		
	WCDMA IV	Front	0.995	0.270	0.040	1.265	1.035	1.305		
		Back	1.132	0.201	0.047	1.333	1.179	1.380		
	WCDMA V	Front	0.997	0.270	0.040	1.267	1.037	1.307		
		Back	1.042	0.201	0.047	1.243	1.089	1.290		
LTE	LTE Band 2	Front	1.108	0.270	0.040	1.378	1.148	1.418		
		Back	1.133	0.201	0.047	1.334	1.180	1.381		
	LTE Band 4	Front	0.891	0.270	0.040	1.161	0.931	1.201		
		Back	0.849	0.201	0.047	1.050	0.896	1.097		
	LTE Band 5	Front	1.043	0.270	0.040	1.313	1.083	1.353		
		Back	1.057	0.201	0.047	1.258	1.104	1.305		
	LTE Band 7	Front	0.916	0.270	0.040	1.186	0.956	1.226		
		Back	1.107	0.201	0.047	1.308	1.154	1.355		
	LTE Band 12	Front	0.829	0.270	0.040	1.099	0.869	1.139		
		Back	0.867	0.201	0.047	1.068	0.914	1.115		
	LTE Band 25	Front	0.753	0.270	0.040	1.023	0.793	1.063		
		Back	1.099	0.201	0.047	1.300	1.146	1.347		
	LTE Band 38	Front	0.571	0.270	0.040	0.841	0.611	0.881		
		Back	0.923	0.201	0.047	1.124	0.970	1.171		

WWAN Band		Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.943	0.433	0.141	1.376	1.084	1.517		
		Back	1.097	0.136	0.077	1.233	1.174	1.310		
	GSM1900	Front	0.550	0.433	0.141	0.983	0.691	1.124		
		Back	0.588	0.136	0.077	0.724	0.665	0.801		
WCDMA	WCDMA II	Front	1.142	0.433	0.141	1.575	1.283	1.716	0.02	Case 3
		Back	1.122	0.136	0.077	1.258	1.199	1.335		
	WCDMA IV	Front	0.995	0.433	0.141	1.428	1.136	1.569		
		Back	1.132	0.136	0.077	1.268	1.209	1.345		
	WCDMA V	Front	0.997	0.433	0.141	1.430	1.138	1.571		
		Back	1.042	0.136	0.077	1.178	1.119	1.255		
LTE	LTE Band 2	Front	1.108	0.433	0.141	1.541	1.249	1.682	0.02	Case 4
		Back	1.133	0.136	0.077	1.269	1.210	1.346		
	LTE Band 4	Front	0.891	0.433	0.141	1.324	1.032	1.465		
		Back	0.849	0.136	0.077	0.985	0.926	1.062		
	LTE Band 5	Front	1.043	0.433	0.141	1.476	1.184	1.617	0.02	Case 5
		Back	1.057	0.136	0.077	1.193	1.134	1.270		
	LTE Band 7	Front	0.916	0.433	0.141	1.349	1.057	1.490		
		Back	1.107	0.136	0.077	1.243	1.184	1.320		
	LTE Band 12	Front	0.829	0.433	0.141	1.262	0.970	1.403		
		Back	0.867	0.136	0.077	1.003	0.944	1.080		
	LTE Band 25	Front	0.753	0.433	0.141	1.186	0.894	1.327		
		Back	1.099	0.136	0.077	1.235	1.176	1.312		
	LTE Band 38	Front	0.571	0.433	0.141	1.004	0.712	1.145		
		Back	0.923	0.136	0.077	1.059	1.000	1.136		




WWAN Band		Exposure Position	1	4	5	6	1+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.943	0.433	0.141	0.010	1.527		
		Back	1.097	0.136	0.077	0.004	1.314		
	GSM1900	Front	0.550	0.433	0.141	0.010	1.134		
		Back	0.588	0.136	0.077	0.004	0.805		
WCDMA	WCDMA II	Front	1.142	0.433	0.141	0.010	1.726	0.02	Case 3
		Back	1.122	0.136	0.077	0.004	1.339		
	WCDMA IV	Front	0.995	0.433	0.141	0.010	1.579		
		Back	1.132	0.136	0.077	0.004	1.349		
	WCDMA V	Front	0.997	0.433	0.141	0.010	1.581		
		Back	1.042	0.136	0.077	0.004	1.259		
LTE	LTE Band 2	Front	1.108	0.433	0.141	0.010	1.692	0.02	Case 4
		Back	1.133	0.136	0.077	0.004	1.350		
	LTE Band 4	Front	0.891	0.433	0.141	0.010	1.475		
		Back	0.849	0.136	0.077	0.004	1.066		
	LTE Band 5	Front	1.043	0.433	0.141	0.010	1.627	0.02	Case 5
		Back	1.057	0.136	0.077	0.004	1.274		
	LTE Band 7	Front	0.916	0.433	0.141	0.010	1.500		
		Back	1.107	0.136	0.077	0.004	1.324		
	LTE Band 12	Front	0.829	0.433	0.141	0.010	1.413		
		Back	0.867	0.136	0.077	0.004	1.084		
	LTE Band 25	Front	0.753	0.433	0.141	0.010	1.337		
		Back	1.099	0.136	0.077	0.004	1.316		
	LTE Band 38	Front	0.571	0.433	0.141	0.010	1.155		
		Back	0.923	0.136	0.077	0.004	1.140		

15.5 SPLSR Evaluation and Analysis


General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


	Band	Position	SAR (W/kg)	Gap	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(cm)	X	Y	Z				
Case 1	WCDMA II	Right Cheek	0.502	0	5.05	6.47	0.3	86.9	1.411	0.02	Not required
	5GHz WLAN Ant1		0.909	0	0.79	-1.09	-0.09				
	WCDMA II		0.502	0	5.05	6.47	0.3	84.1	0.748	0.01	Not required
	5GHz WLAN Ant2		0.246	0	-1.15	0.79	0.26				
	5GHz WLAN Ant1		0.909	0	0.85	-1.09	-0.09	27.7	1.155	0.04	Not required
	5GHz WLAN Ant2		0.246	0	-1.15	0.79	0.26				

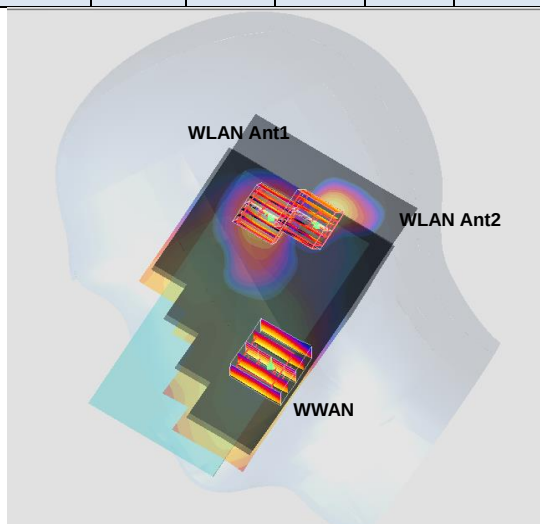


	Band	Position	SAR (W/kg)	Gap	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(cm)	X	Y	Z				
Case 2	WCDMA IV	Right Cheek	0.473	0	5.29	6.48	0.07	88.1	1.382	0.02	Not required
	5GHz WLAN Ant1		0.909	0	0.79	-1.09	-0.09				
	WCDMA IV		0.473	0	5.29	6.48	0.07	86.0	0.719	0.01	Not required
	5GHz WLAN Ant2		0.246	0	-1.15	0.79	0.26				
	5GHz WLAN Ant1		0.909	0	0.85	-1.09	-0.09	27.7	1.155	0.04	Not required
	5GHz WLAN Ant2		0.246	0	-1.15	0.79	0.26				

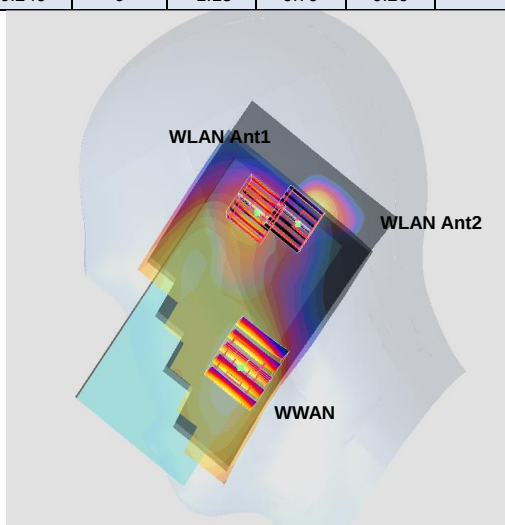


	Band	Position	SAR (W/kg)	Gap	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(cm)	X	Y	Z				
Case 3	WCDMA II	Front	1.142	1	2	-7.42	0.16	144.0	1.575	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	WCDMA II		1.142	1	2	-7.42	0.16	138.7	1.283	0.01	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05	27.5	0.574	0.02	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	161.4	1.152	0.01	Not required
	WCDMA II		1.142	1	2	-7.42	0.16				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	23.5	0.443	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	49.4	0.151	0.00	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				

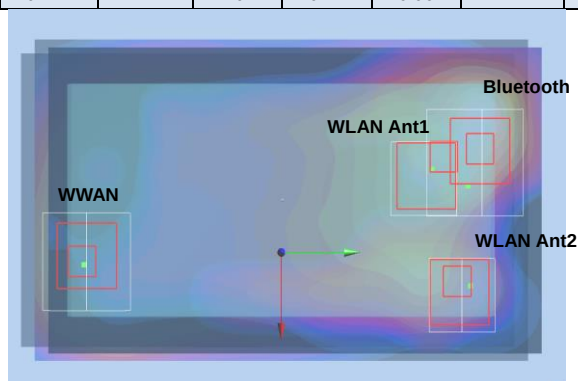

	Band	Position	SAR (W/kg)	Gap	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(cm)	X	Y	Z				
Case 4	LTE Band 2	Front	1.108	1	2	-7.1	0.17	140.8	1.54	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	LTE Band 2		1.108	1	2	-7.1	0.17	135.5	1.25	0.01	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05	27.5	0.57	0.02	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	158.3	1.12	0.01	Not required
	LTE Band 2		1.108	1	2	-7.1	0.17				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	23.5	0.44	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	49.4	0.15	0.00	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				

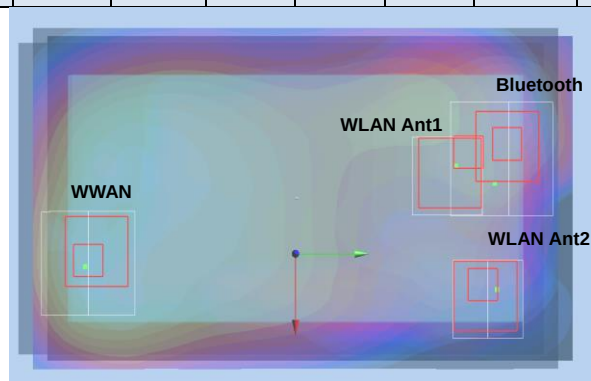

	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	LTE Band 5	Front	1.043	1	-3.58	-5.5	0.02	128.0	1.48	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	LTE Band 5		1.043	1	-3.58	-5.5	0.02	134.5	1.18	0.01	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05	27.5	0.57	0.02	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	138.1	1.05	0.01	Not required
	LTE Band 5		1.043	1	-3.58	-5.5	0.02				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	23.5	0.44	0.01	Not required
	5GHz WLAN Ant1		0.433	1	-0.1	6.82	-0.05				
	Bluetooth		0.01	1	-1.98	8.22	-0.12	49.4	0.15	0.00	Not required
	5GHz WLAN Ant2		0.141	1	2.62	6.44	0.06				

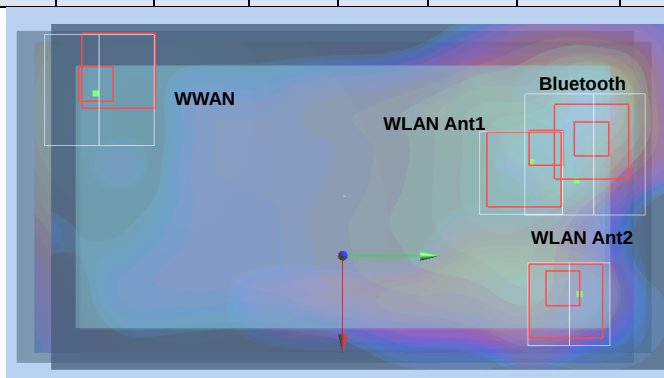



16. Supplemental tuner tests results

General Note:

1. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
2. To evaluate all of the tuner states, the 144 tuner states are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination. The bands which are dynamically tuned are split into two separate antennas, so each antenna system will have its own test plan to cover the corresponding 144 tuner states.
3. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

16.1 Supplemental Head SAR results

Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 107	1	7	13	19	25	31	37	43	49	55	61	67	73	79	85	91	97	103	109	115	121	127	133	139		
LTE B5	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.329	0.502	0.467	0.431	0.426	0.311	0.131	0.013	0.401	0.366	0.071	0.388	0.169	0.013	0.402	0.037	0.116	0.403	0.037	0.288	0.021	0.472	0.491	0.363	0.121	0.011	0.365		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 41	Default 126	2	8	14	20	26	32	38	44	50	56	62	68	74	80	86	92	98	104	110	116	122	128	134	140		
LTE B7	QPSK	2510	20850	1	99	Left Cheek	0 mm	0.299	0.543	0.535	0.377	0.392	0.446	0.451	0.362	0.325	0.492	0.297	0.482	0.494	0.472	0.534	0.511	0.469	0.521	0.164	0.514	0.191	0.505	0.514	0.511	0.483	0.502	0.491		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 110	Default 107	3	9	15	21	27	33	39	45	51	57	63	69	75	81	87	93	99	105	111	117	123	129	135	141		
WCDMA B5	RMC12.2Kbps	826.4	4132	N/A	N/A	Left Cheek	0 mm	0.312	0.503	0.485	0.431	0.371	0.239	0.07	0.394	0.439	0.215	0.025	0.409	0.072	0.396	0.254	0.461	0.056	0.477	0.399	0.118	0.397	0.483	0.433	0.272	0.067	0.398	0.407		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 137	Default 137	1	15	29	43	57	71	85	99	113	137	141															
LTE B12	QPSK	707.5	23095	1	25	Right Cheek	0 mm	0.201	0.225	0.219	0.103	0.015	0.177	0.001	0.002	0.088	0.085	0.081	0.078	0.217	0.191															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 137	Default 137	2	16	30	44	58	72	86	100	114	138	142															
LTE B17	QPSK	710	23790	1	25	Right Cheek	0 mm	0.208	0.242	0.24	0.111	0.015	0.115	0.001	0.231	0.092	0.099	0.086	0.082	0.239	0.209															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	3	17	31	45	59	73	87	101	115	129	1															
LTE B4	QPSK	1732.5	20175	1	0	Right Cheek	0 mm	0.283	0.488	0.483	0.325	0.195	0.345	0.396	0.395	0.401	0.406	0.449	0.477	0.367	0.328															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	4	18	32	46	60	74	88	102	116	130	2															
LTE B2	QPSK	1880	18900	1	0	Right Cheek	0 mm	0.319	0.451	0.444	0.397	0.208	0.395	0.415	0.426	0.418	0.412	0.425	0.441	0.375	0.401															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 71	Default 111	5	19	33	47	61	75	89	103	117	131	3															
LTE B25	QPSK	1905	26590	1	0	Right Cheek	0 mm	0.344	0.383	0.378	0.347	0.186	0.365	0.371	0.339	0.357	0.361	0.367	0.377	0.321	0.362															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 46	Default 111	6	20	34	48	62	76	90	104	118	132	4															
WCDMA B2	RMC 12.2Kbps	1907.6	9538	N/A	N/A	Right Cheek	0 mm	0.411	0.477	0.461	0.442	0.204	0.431	0.435	0.418	0.438	0.443	0.447	0.459	0.373	0.457															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	7	21	35	49	63	77	91	105	119	133	5															
WCDMA B4	RMC 12.2Kbps	1732.6	1413	N/A	N/A	Left Cheek	0 mm	0.381	0.435	0.43	0.307	0.174	0.293	0.312	0.303	0.301	0.307	0.371	0.419	0.274	0.314															

**16.2 Supplemental Body SAR results**

Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 107	4	10	16	22	28	34	40	46	52	58	64	70	76	82	88	94	100	106	112	118	124	130	136	142		
LTE B5	QPSK	836.5	20525	1	0	Back	10 mm	0.735	1.112	1.09	0.996	0.811	0.521	0.161	1.001	1.039	0.384	0.041	0.906	0.158	1.061	0.469	1.067	0.072	1.024	1.005	0.242	0.992	1.067	0.894	0.536	0.142	0.992	1.021		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 98	Default 126	5	11	17	23	29	35	41	47	53	59	65	71	77	83	89	95	101	107	113	119	125	131	137	143		
LTE B7	QPSK	2560	21350	1	99	Back	10 mm	0.863	1.529	1.479	0.868	0.969	1.051	0.846	0.812	0.981	1.236	0.961	1.262	0.967	1.235	1.453	1.435	0.462	1.507	1.344	1.329	1.337	1.327	1.412	1.481	1.181	1.309	1.231		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 110	Default 107	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144		
WCDMA B5	RMC 12.2Kbps	836.4	4182	N/A	N/A	Back	10 mm	0.772	1.258	1.223	1.132	0.867	0.473	0.084	1.133	1.009	0.311	1.142	0.668	0.086	1.17	0.307	0.874	1.129	0.186	0.878	0.126	1.192	1.22	0.97	0.467	0.075	1.103	1.134		
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 137	Default 137	8	22	36	50	64	78	92	106	120	139	143															
LTE B12	QPSK	707.5	23095	1	0	Back	10 mm	0.672	1.327	1.317	0.569	0.026	0.244	0.195	0.049	0.058	0.043	0.051	0.265	1.252	1.204															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 137	Default 137	9	23	37	51	65	79	93	107	121	140	144															
LTE B17	QPSK	710	23790	1	0	Back	10 mm	0.748	1.23	1.226	0.464	0.022	0.222	0.214	0.069	0.066	0.037	0.019	0.313	1.157	1.118															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	10	24	38	52	66	80	94	108	122	136	6															
LTE B4	QPSK	1732.5	20175	1	0	Back	10 mm	0.687	1.275	1.272	0.789	0.182	0.74	0.735	0.573	0.696	0.637	0.453	1.195	0.334	0.859															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	11	25	39	53	67	81	95	109	123	127	7															
LTE B2	QPSK	1880	18900	1	0	Back	10 mm	0.903	1.277	1.273	0.913	1.012	0.746	0.803	0.636	0.755	0.518	0.403	1.226	1.178	1.012															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	12	26	40	54	68	82	96	110	124	128	8															
LTE B25	QPSK	1905	26590	1	0	Back	10 mm	0.916	1.635	1.63	1.19	1.305	0.856	1.014	0.722	0.804	0.487	1.404	1.582	1.51	1.33															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	13	27	41	55	69	83	97	111	125	134	9															
WCDMA B2	RMC 12.2Kbps	1880	9400	N/A	N/A	Back	10 mm	0.817	1.35	1.329	0.936	1.1	0.522	0.622	0.394	0.453	1.172	1.336	1.295	0.844	1.033															
Operating Mode	Service/ Modulation	Freq. (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									State																											
									Auto-Tune 111	Default 111	14	28	42	56	70	84	98	112	126	135	10															
WCDMA B4	RMC 12.2Kbps	1752.6	1513	N/A	N/A	Back	10 mm	0.76	1.17	1.167	0.68	0.987	0.355	0.387	0.227	0.253	1.054	1.166	1.04	0.473	0.752															

Test Engineer : Jerry Hu, Lawrence Chang, Galen Chang, Frank Wu, Tommy Chen, Kurt Liu, and Ken Li

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.8%	12.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.5%	25.4%

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.