

### #01\_GSM850\_GPRS (2 Tx slots)\_Right Cheek\_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium: HSL\_850\_160525 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.893$  mho/m;  $\epsilon_r = 42.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.554 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.594 W/kg

**SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.388 mW/g**

Maximum value of SAR (measured) = 0.570 mW/g



## #02\_GSM1900\_GPRS (3 Tx slots)\_Left Cheek\_Ch512

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: HSL\_1900\_160524 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.513 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.29 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.488 W/kg

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.207 mW/g**

Maximum value of SAR (measured) = 0.430 mW/g

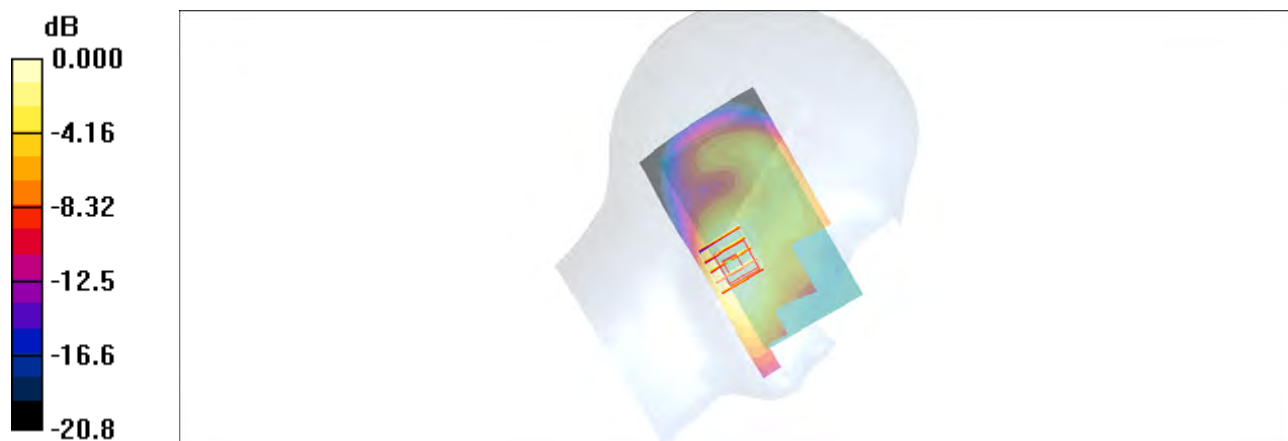

0 dB = 0.430mW/g

### #03\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_160524 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.975 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.949 W/kg

**SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.392 mW/g**

Maximum value of SAR (measured) = 0.838 mW/g

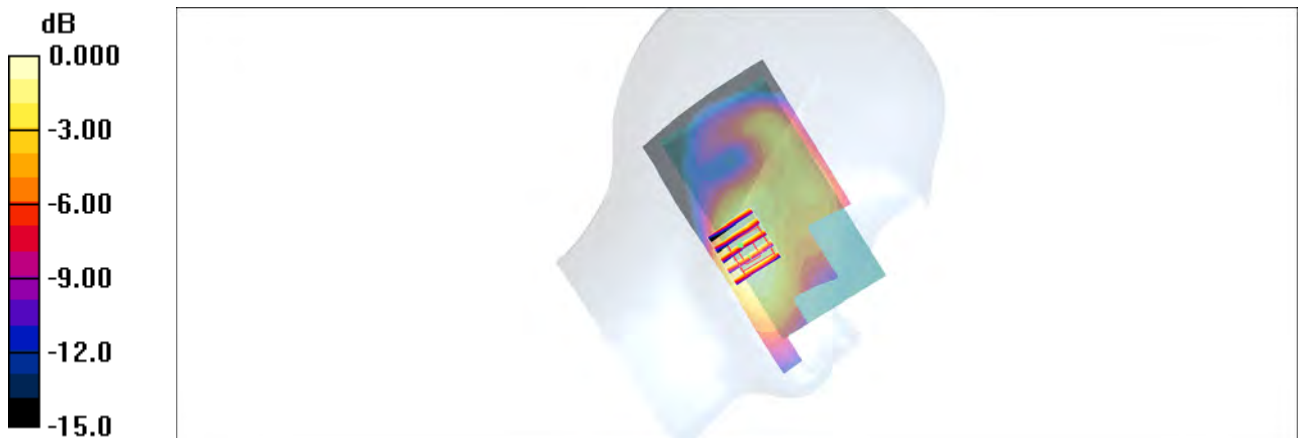

0 dB = 0.838mW/g

### #04\_WCDMA IV\_RMC 12.2Kbps\_Left Cheek\_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_160523 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.36 \text{ mho/m}$ ;  $\epsilon_r = 40.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.3 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.6, 8.6, 8.6); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.765 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.3 \text{ V/m}$ ; Power Drift =  $-0.084 \text{ dB}$

Peak SAR (extrapolated) =  $0.741 \text{ W/kg}$

**SAR(1 g) =  $0.502 \text{ mW/g}$ ; SAR(10 g) =  $0.328 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.659 \text{ mW/g}$

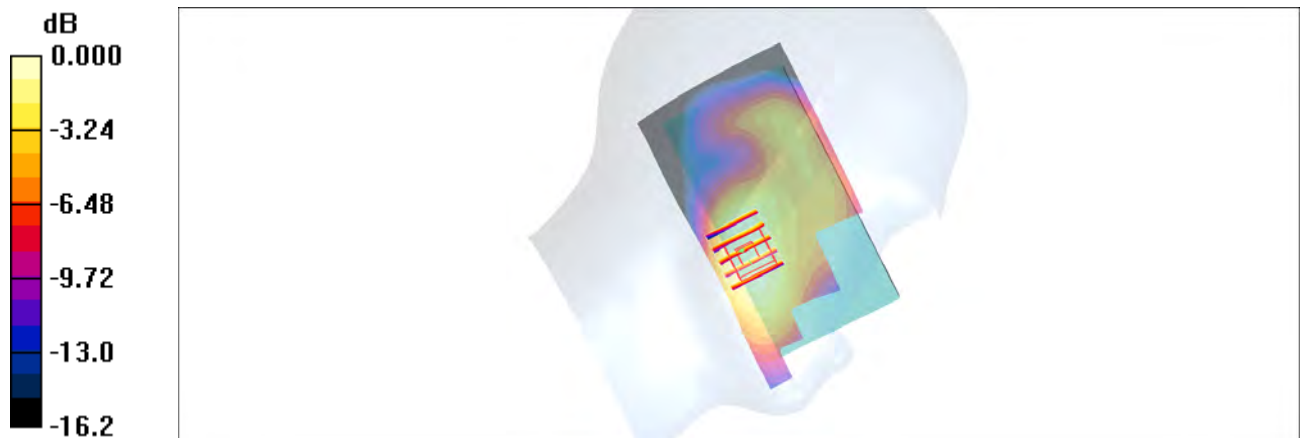

0 dB =  $0.659\text{mW/g}$

### #05\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_160525 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.891$  mho/m;  $\epsilon_r = 42.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.410 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.283 mW/g**

Maximum value of SAR (measured) = 0.413 mW/g

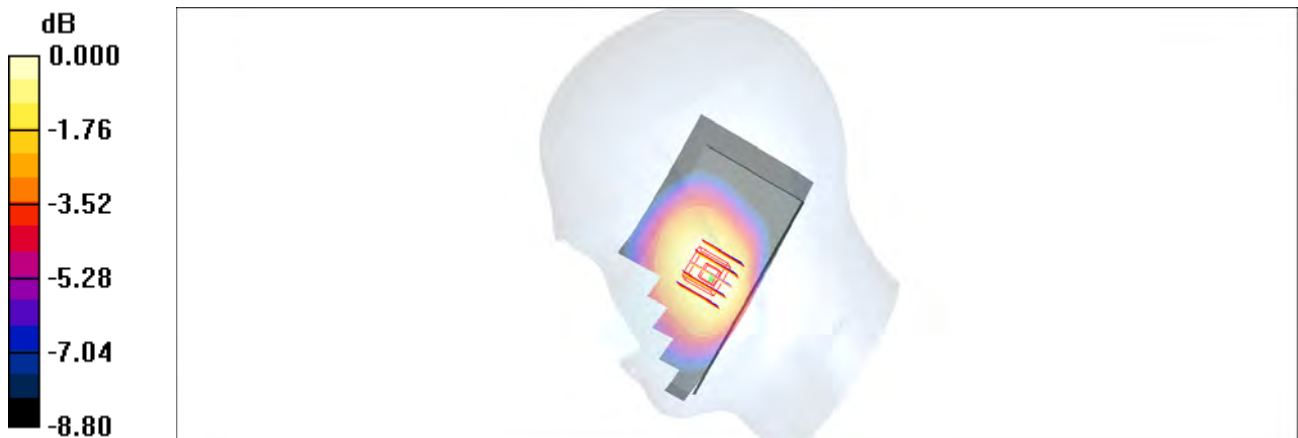

0 dB = 0.413mW/g

### #06\_CDMA BC0\_1xRTT RC3 SO55\_Left Cheek\_Ch384

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_160525 Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.881$  mho/m;  $\epsilon_r = 42.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.438 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.435 W/kg

**SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.275 mW/g**

Maximum value of SAR (measured) = 0.412 mW/g

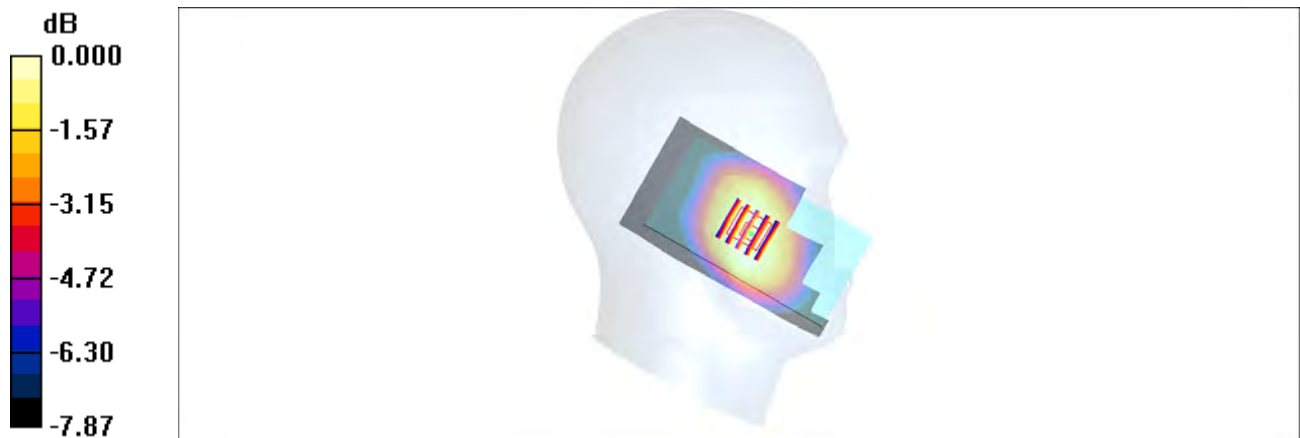

0 dB = 0.412mW/g

### #07\_CDMA BC1\_1xRTT RC3 SO55\_Left Cheek\_Ch1175

Communication System: CDMA ; Frequency: 1908.75 MHz;Duty Cycle: 1:1

Medium: HSL\_1900\_160524 Medium parameters used:  $f = 1909$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.844 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.833 W/kg

**SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.340 mW/g**

Maximum value of SAR (measured) = 0.731 mW/g



### #08\_CDMA BC10\_1xRTT RC3 SO55\_Right Cheek\_Ch520

Communication System: CDMA ; Frequency: 819 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_160525 Medium parameters used :  $f = 819 \text{ MHz}$ ;  $\sigma = 0.865 \text{ mho/m}$ ;  $\epsilon_r = 43.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.1 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.443 \text{ mW/g}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $20.3 \text{ V/m}$ ; Power Drift =  $0.081 \text{ dB}$

Peak SAR (extrapolated) =  $0.497 \text{ W/kg}$

**SAR(1 g) =  $0.404 \text{ mW/g}$ ; SAR(10 g) =  $0.318 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.463 \text{ mW/g}$



### #09\_LTE Band 2\_20M\_QPSK\_1\_49\_Left Cheek\_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_160524 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.716 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.739 W/kg

**SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.299 mW/g**

Maximum value of SAR (measured) = 0.655 mW/g



0 dB = 0.655mW/g

### #10\_LTE Band 4\_20M\_QPSK\_1\_0\_Left Cheek\_Ch20175

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_160523 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 40.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.6, 8.6, 8.6); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.751 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 0.720 W/kg

**SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.325 mW/g**

Maximum value of SAR (measured) = 0.634 mW/g



### #11\_LTE Band 5\_10M\_QPSK\_1\_25\_Right Cheek\_Ch20525

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_160525 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.881$  mho/m;  $\epsilon_r = 42.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.357 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.251 mW/g**

Maximum value of SAR (measured) = 0.366 mW/g

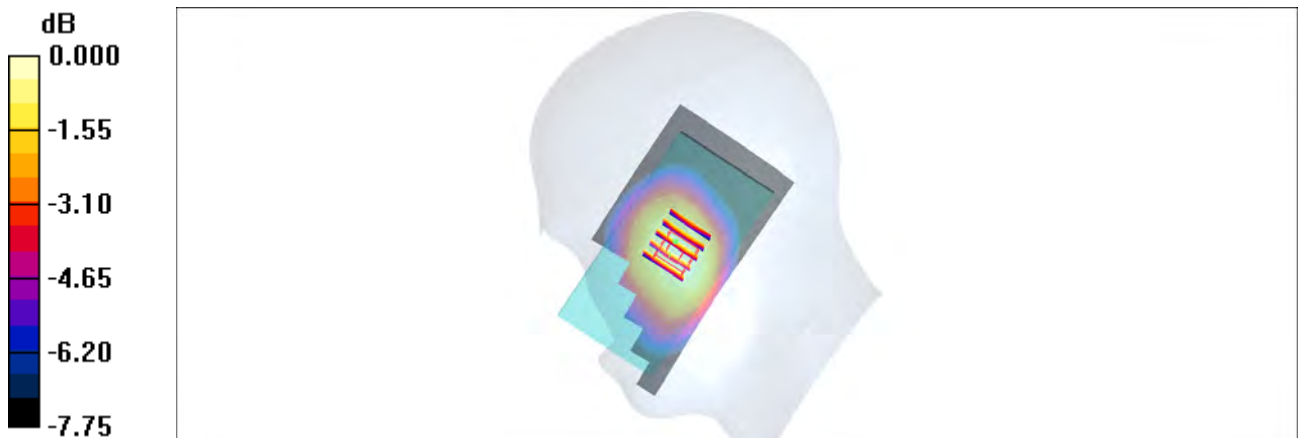

0 dB = 0.366mW/g

### #12\_LTE Band 7\_20M\_QPSK\_50\_0\_Left Cheek\_Ch21350

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_160517 Medium parameters used:  $f = 2560 \text{ MHz}$ ;  $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon_r = 37.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.15, 7.15, 7.15); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x141x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $0.826 \text{ mW/g}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.65 \text{ V/m}$ ; Power Drift =  $-0.003 \text{ dB}$

Peak SAR (extrapolated) =  $1.05 \text{ W/kg}$

**SAR(1 g) =  $0.567 \text{ mW/g}$ ; SAR(10 g) =  $0.295 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.880 \text{ mW/g}$

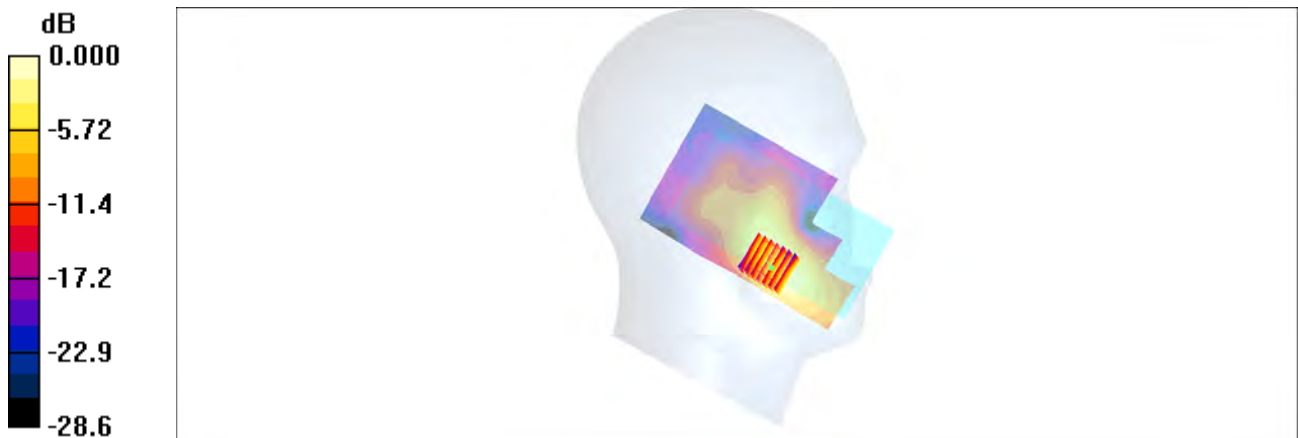

### #13\_LTE Band 12\_10M\_QPSK\_1\_49\_Left Cheek\_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_160525 Medium parameters used :  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.859 \text{ mho/m}$ ;  $\epsilon_r = 42.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.22, 10.22, 10.22); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.275 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.28 \text{ V/m}$ ; Power Drift =  $0.156 \text{ dB}$

Peak SAR (extrapolated) =  $0.270 \text{ W/kg}$

**SAR(1 g) =  $0.222 \text{ mW/g}$ ; SAR(10 g) =  $0.181 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.254 \text{ mW/g}$

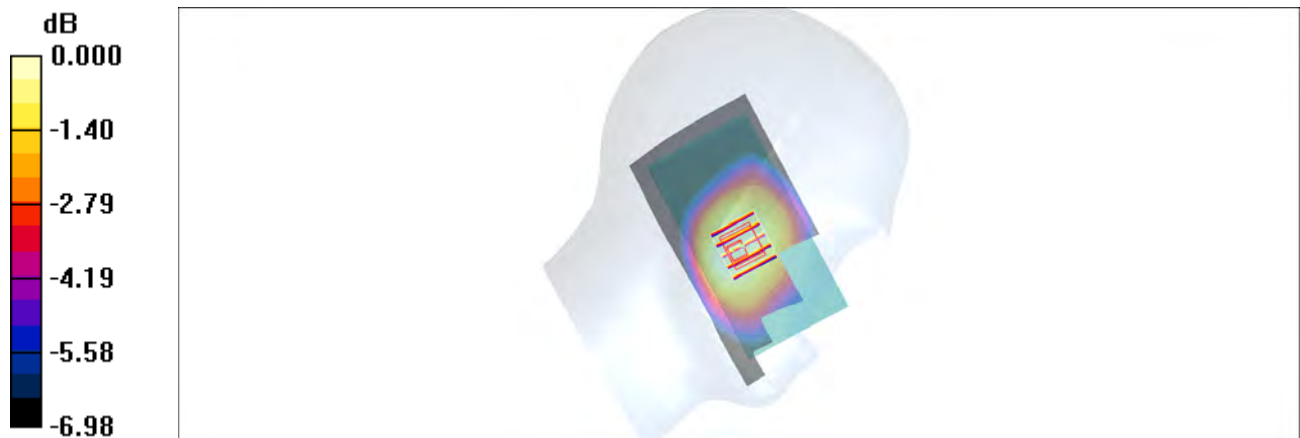

0 dB =  $0.254\text{mW/g}$

### #14\_LTE Band 13\_10M\_QPSK\_1\_0\_Right Cheek\_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_160525 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.927 \text{ mho/m}$ ;  $\epsilon_r = 41.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.22, 10.22, 10.22); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.307 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $19.2 \text{ V/m}$ ; Power Drift =  $-0.017 \text{ dB}$

Peak SAR (extrapolated) =  $0.347 \text{ W/kg}$

**SAR(1 g) =  $0.277 \text{ mW/g}$ ; SAR(10 g) =  $0.223 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.322 \text{ mW/g}$

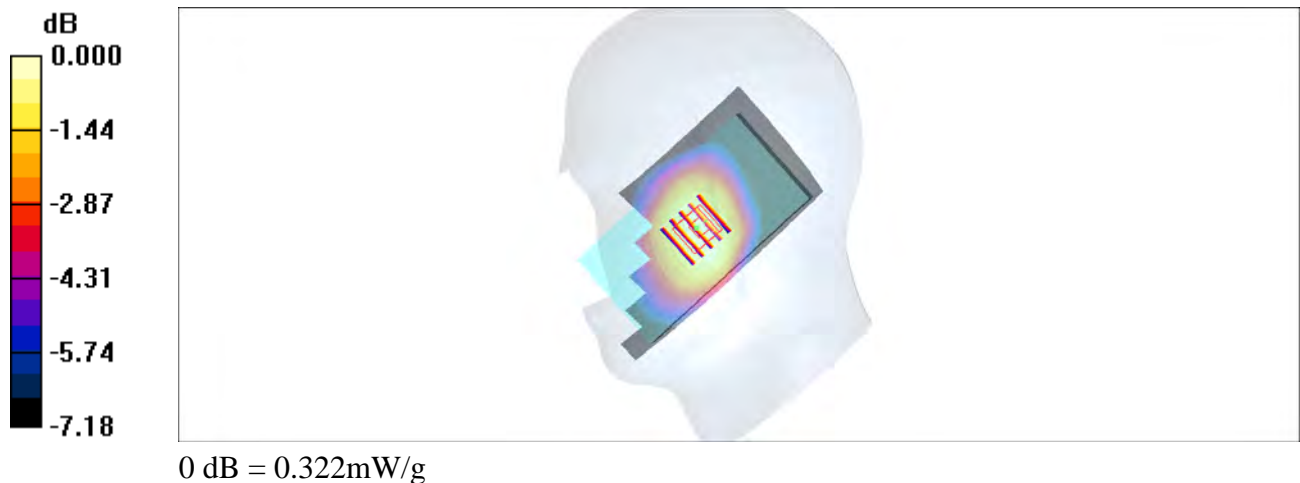

### #15\_LTE Band 25\_20M\_QPSK\_1\_49\_Left Cheek\_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_160524 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.754 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.730 W/kg

**SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.305 mW/g**

Maximum value of SAR (measured) = 0.648 mW/g

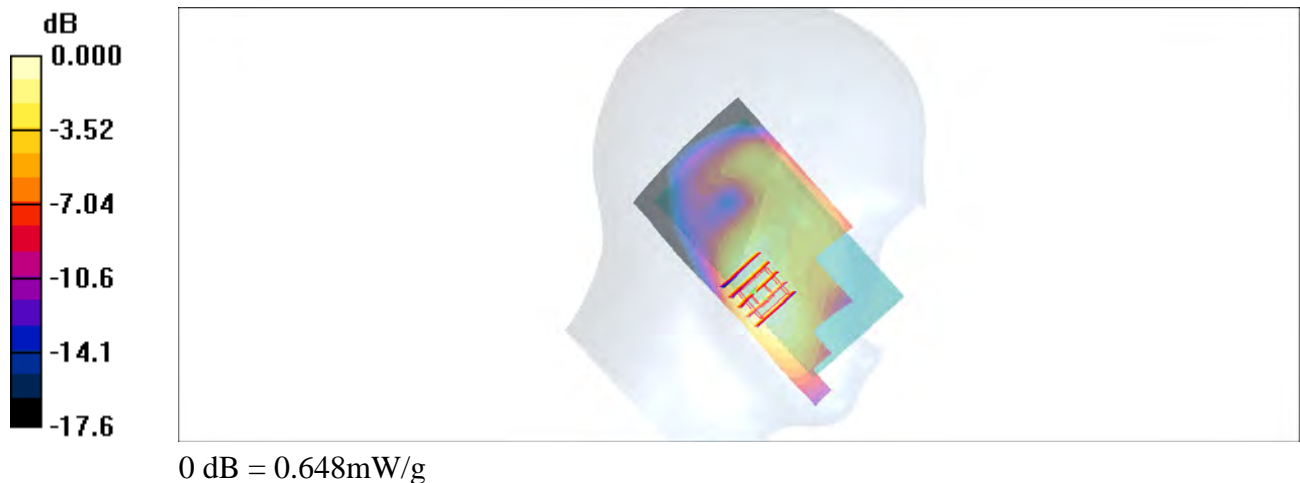

### #16\_LTE Band 26\_15M\_QPSK\_1\_0\_Right Cheek\_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_160525 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 42.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.345 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 0.392 W/kg

**SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.252 mW/g**

Maximum value of SAR (measured) = 0.365 mW/g

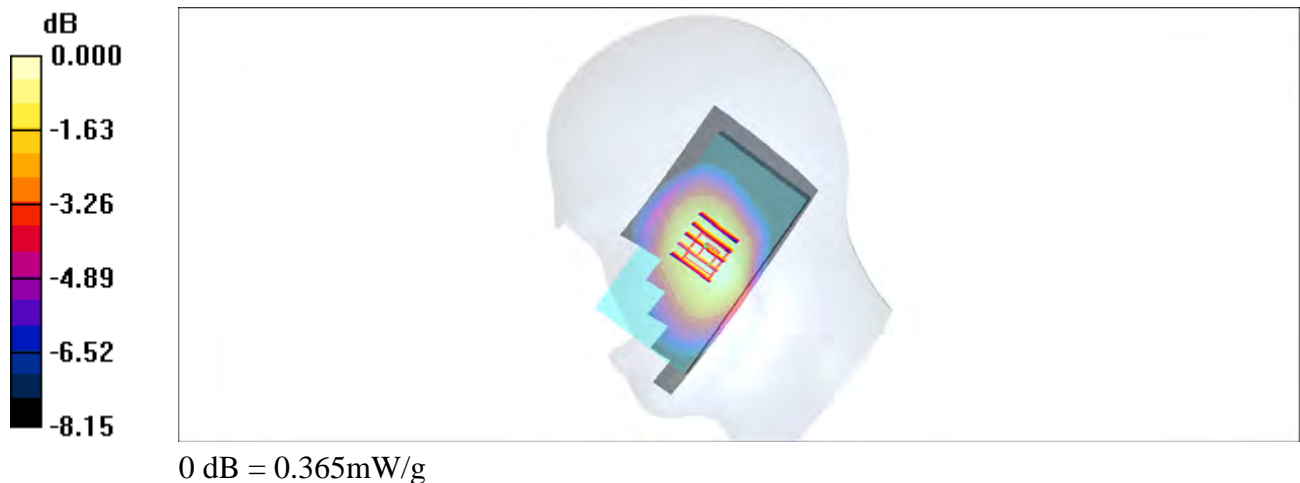

### #17\_LTE Band 41\_20M\_QPSK\_1\_0\_Left Cheek\_Ch40620

Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600\_160517 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 37.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.15, 7.15, 7.15); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x141x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.660 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.52 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.809 W/kg

**SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.230 mW/g**

Maximum value of SAR (measured) = 0.679 mW/g

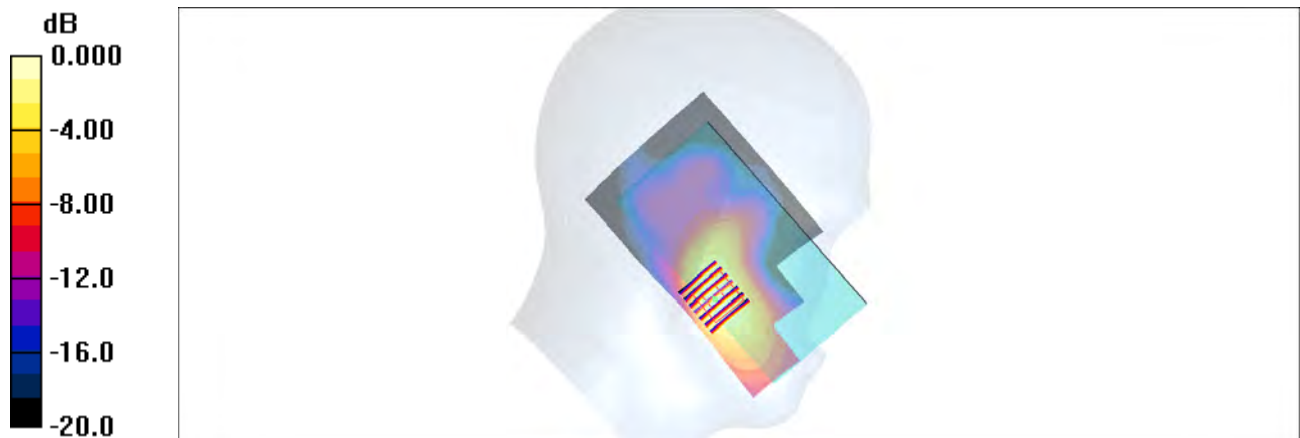

0 dB = 0.679mW/g

### #18\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch6

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.024

Medium: HSL\_2450\_160517 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.27, 7.27, 7.27); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x141x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.584 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.674 W/kg

**SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.184 mW/g**

Maximum value of SAR (measured) = 0.553 mW/g

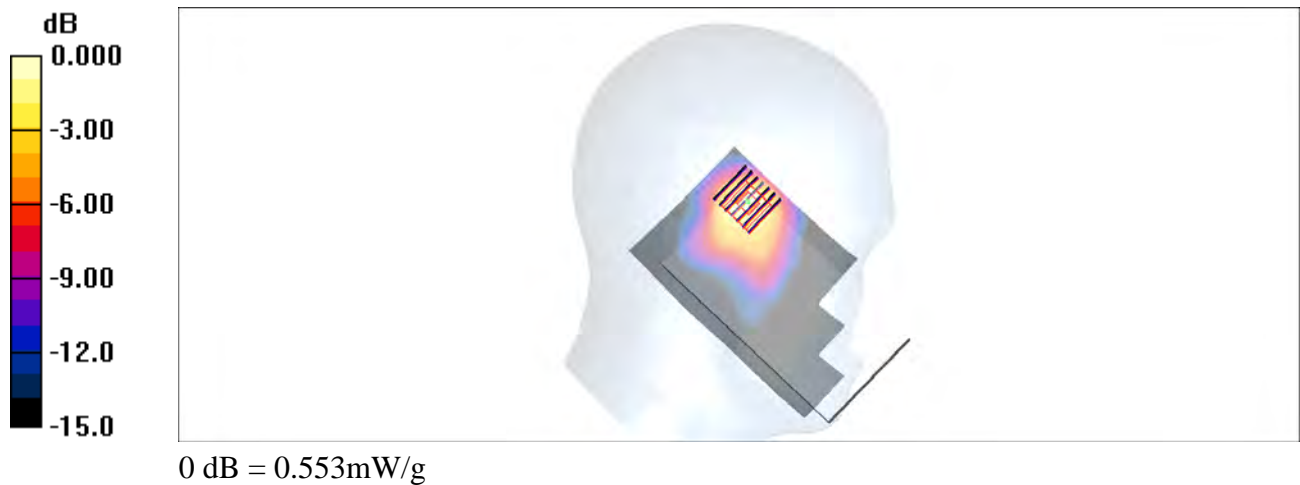

### #19\_GSM850\_GPRS (2 Tx slots)\_Back\_10mm\_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium: MSL\_850\_160519 Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.987 \text{ mho/m}$ ;  $\epsilon_r = 56.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.780 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $29.1 \text{ V/m}$ ; Power Drift =  $0.060 \text{ dB}$

Peak SAR (extrapolated) =  $0.844 \text{ W/kg}$

**SAR(1 g) =  $0.637 \text{ mW/g}$ ; SAR(10 g) =  $0.496 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.773 \text{ mW/g}$

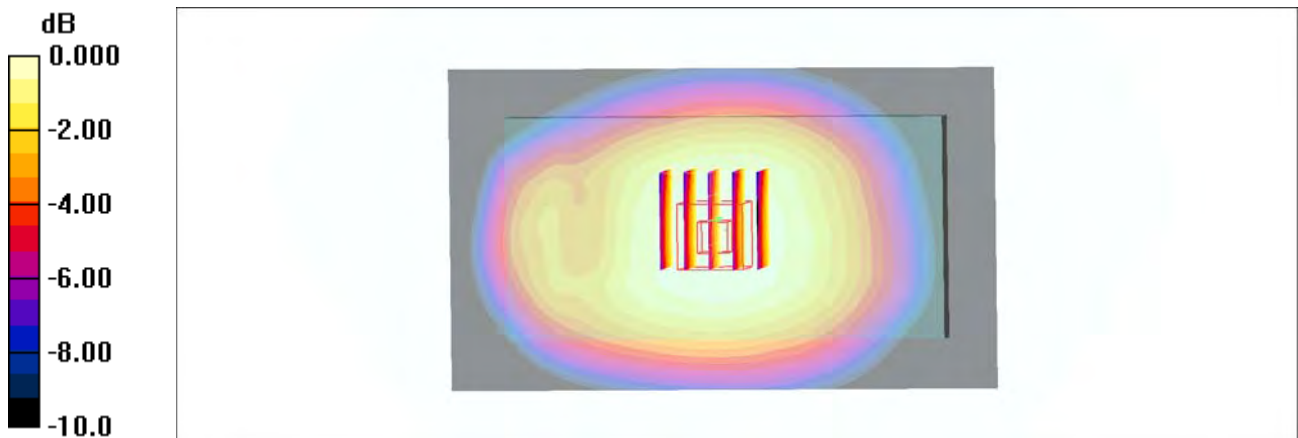

0 dB =  $0.773\text{mW/g}$

### #20\_GSM1900\_GPRS (3 Tx slots)\_Back\_10mm\_Ch512

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: MSL\_1900\_160520 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.933 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.661 mW/g; SAR(10 g) = 0.416 mW/g**

Maximum value of SAR (measured) = 0.872 mW/g

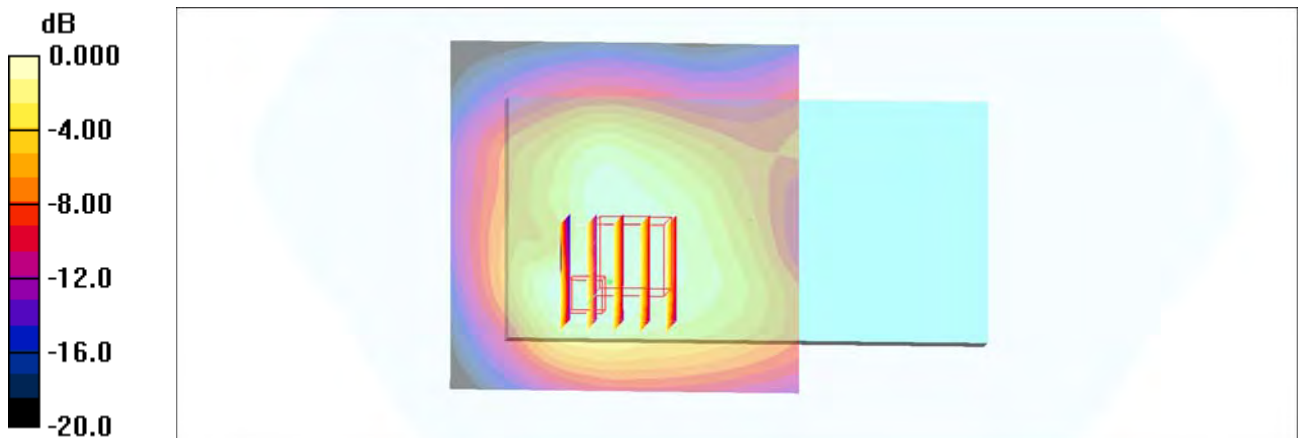

0 dB = 0.872mW/g

### #21\_WCDMA II\_RMC 12.2Kbps\_Back\_10mm\_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 52.4$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.39 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.637 mW/g**

Maximum value of SAR (measured) = 1.46 mW/g

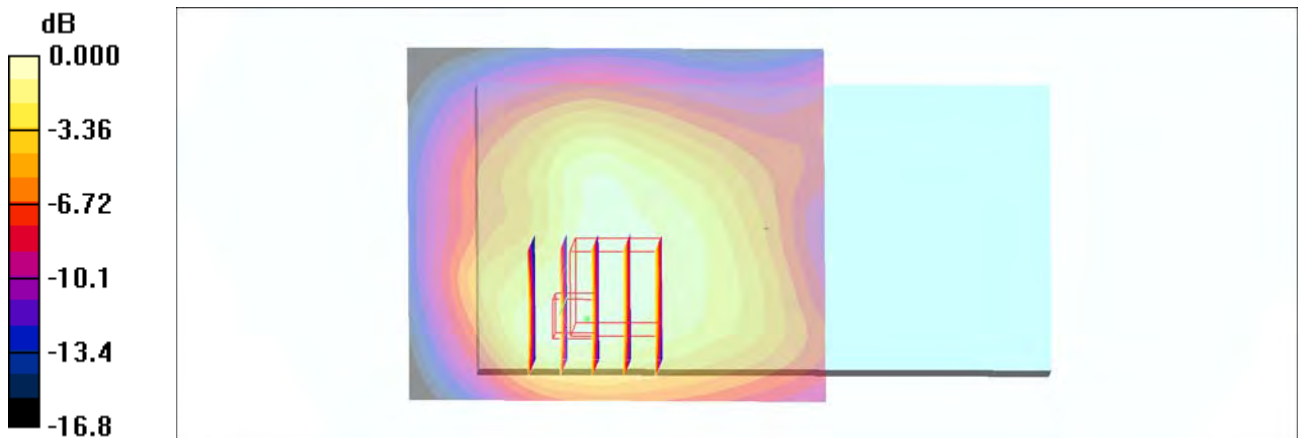

0 dB = 1.46mW/g

### #22\_WCDMA IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_160519 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.45 \text{ mho/m}$ ;  $\epsilon_r = 52.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.43 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $31.4 \text{ V/m}$ ; Power Drift =  $0.003 \text{ dB}$

Peak SAR (extrapolated) =  $1.60 \text{ W/kg}$

**SAR(1 g) =  $0.991 \text{ mW/g}$ ; SAR(10 g) =  $0.662 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.35 \text{ mW/g}$

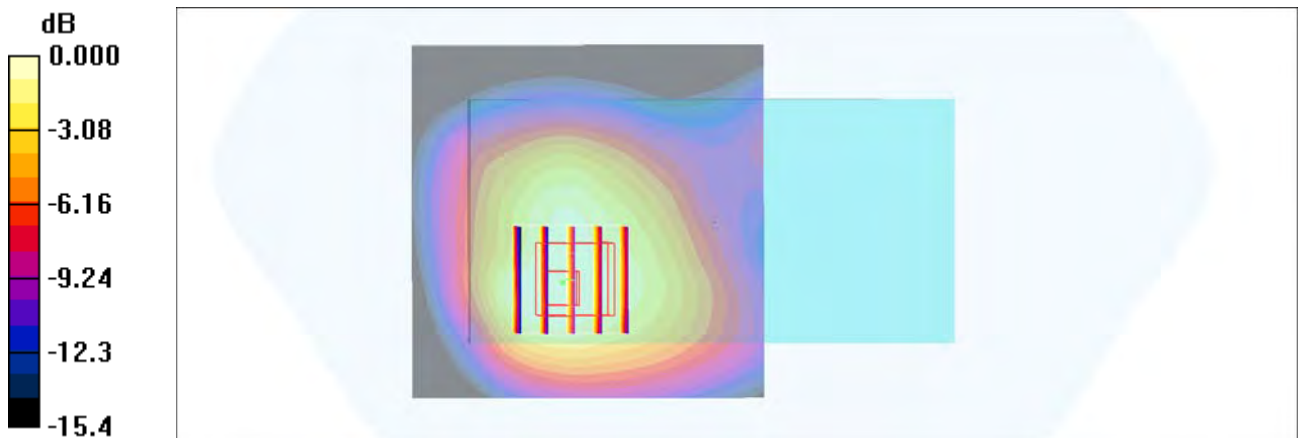

0 dB =  $1.35\text{mW/g}$

### #23\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160521 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 56.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.428 mW/g**

Maximum value of SAR (measured) = 0.668 mW/g

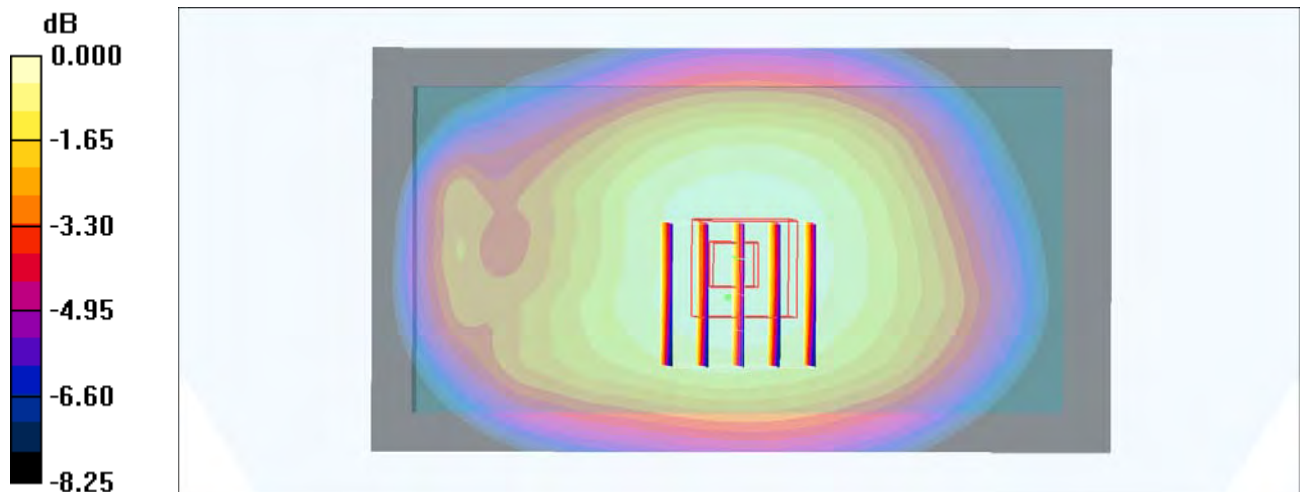

0 dB = 0.668mW/g

### #24\_CDMA BC0\_RTAP 153.6Kbps\_Back\_10mm\_Ch1013

Communication System: CDMA ; Frequency: 824.7 MHz;Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.964$  mho/m;  $\epsilon_r = 57.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.795 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.7 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.856 W/kg

**SAR(1 g) = 0.660 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 0.787 mW/g

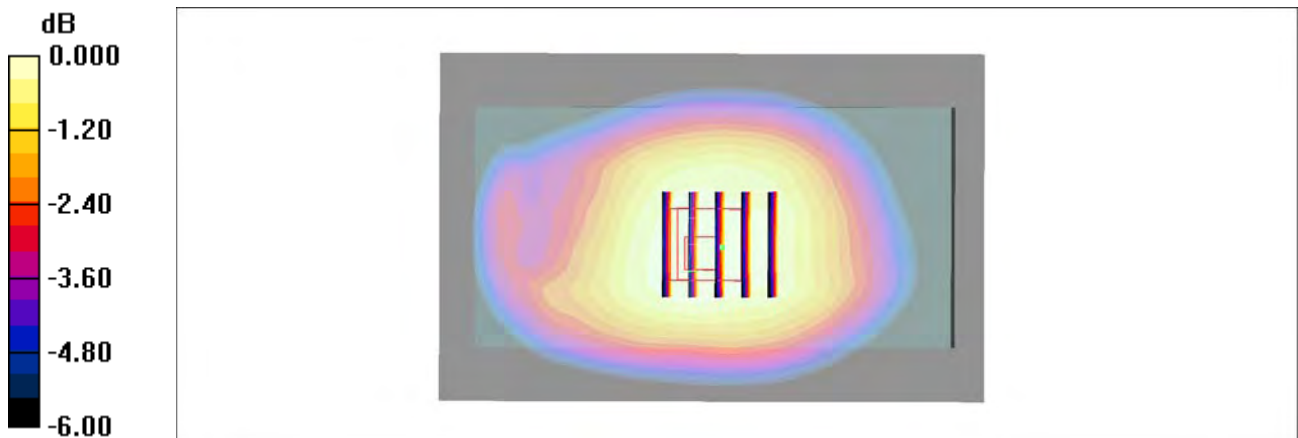

0 dB = 0.787mW/g

### #25\_CDMA BC1\_RTAP 153.6Kbps\_Back\_10mm\_Ch25

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used :  $f = 1851.25$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r =$

$52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.5$  °C ; Liquid Temperature :  $22.5$  °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.51 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.7 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.626 mW/g**

Maximum value of SAR (measured) = 1.51 mW/g



### #26\_CDMA BC10\_RTAP 153.6Kbps\_Back\_10mm\_Ch520

Communication System: CDMA ; Frequency: 819 MHz;Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.958 \text{ mho/m}$ ;  $\epsilon_r = 57.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.902 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $32.0 \text{ V/m}$ ; Power Drift =  $0.078 \text{ dB}$

Peak SAR (extrapolated) =  $1.01 \text{ W/kg}$

**SAR(1 g) =  $0.763 \text{ mW/g}$ ; SAR(10 g) =  $0.590 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.911 \text{ mW/g}$

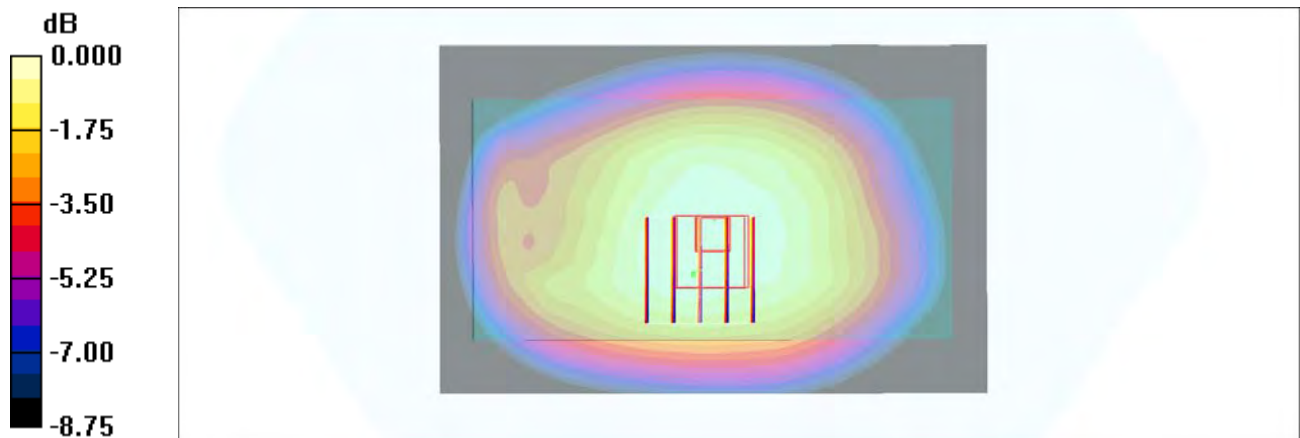

0 dB =  $0.911\text{mW/g}$

### #27\_LTE Band 2\_20M\_QPSK\_1\_49\_Back\_10mm\_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160520 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.53 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.19 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $26.9 \text{ V/m}$ ; Power Drift =  $0.040 \text{ dB}$

Peak SAR (extrapolated) =  $1.38 \text{ W/kg}$

**SAR(1 g) =  $0.829 \text{ mW/g}$ ; SAR(10 g) =  $0.533 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.18 \text{ mW/g}$

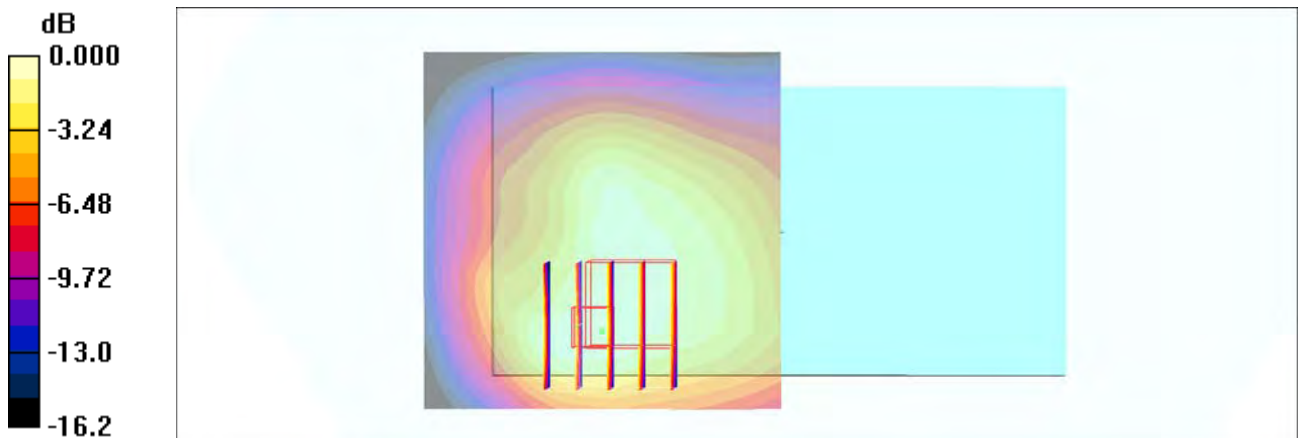

0 dB =  $1.18\text{mW/g}$

### #28\_LTE Band 4\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch20175

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_160519 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 52.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.61 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.747 mW/g**

Maximum value of SAR (measured) = 1.49 mW/g

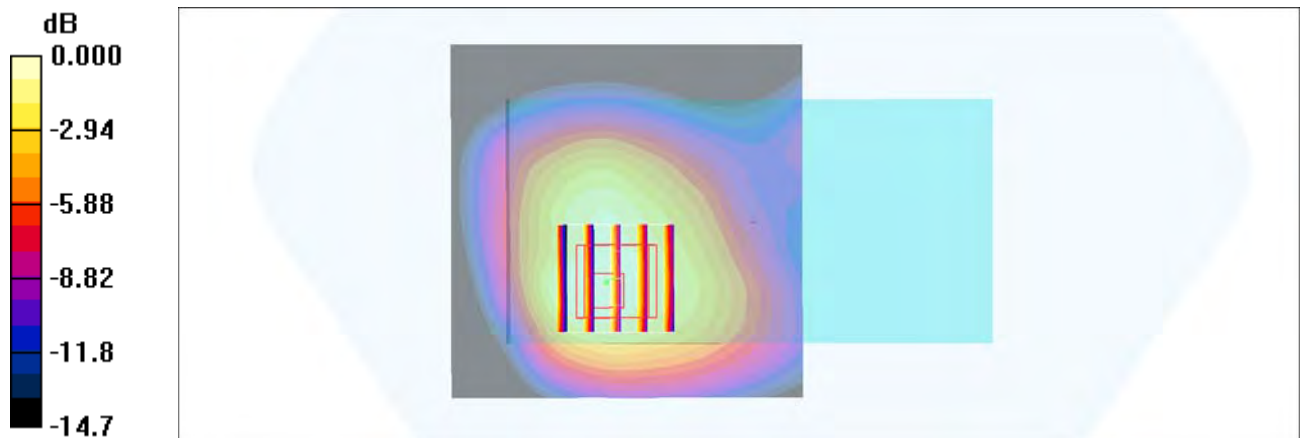

0 dB = 1.49mW/g

### #29\_LTE Band 5\_10M\_QPSK\_1\_25\_Back\_10mm\_Ch20525

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used :  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.975 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.634 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $26.2 \text{ V/m}$ ; Power Drift =  $-0.018 \text{ dB}$

Peak SAR (extrapolated) =  $0.695 \text{ W/kg}$

**SAR(1 g) =  $0.515 \text{ mW/g}$ ; SAR(10 g) =  $0.402 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.628 \text{ mW/g}$

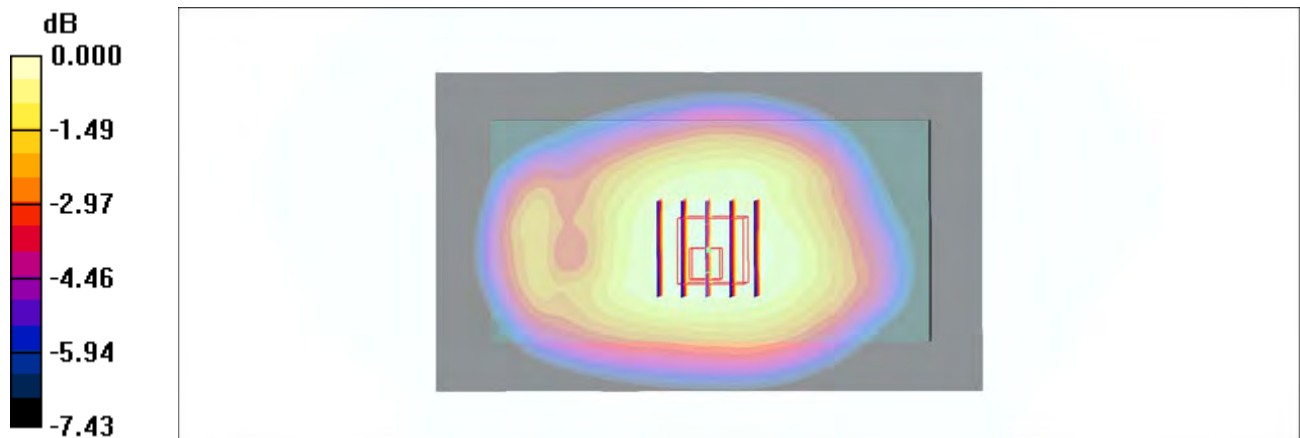

0 dB =  $0.628\text{mW/g}$

### #30\_LTE Band 7\_20M\_QPSK\_50\_0\_Back\_10mm\_Ch21100

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_160518 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.11 \text{ mho/m}$ ;  $\epsilon_r = 52.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.3 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x81x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $1.32 \text{ mW/g}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.2 \text{ V/m}$ ; Power Drift =  $0.072 \text{ dB}$

Peak SAR (extrapolated) =  $1.74 \text{ W/kg}$

**SAR(1 g) =  $0.874 \text{ mW/g}$ ; SAR(10 g) =  $0.430 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.40 \text{ mW/g}$

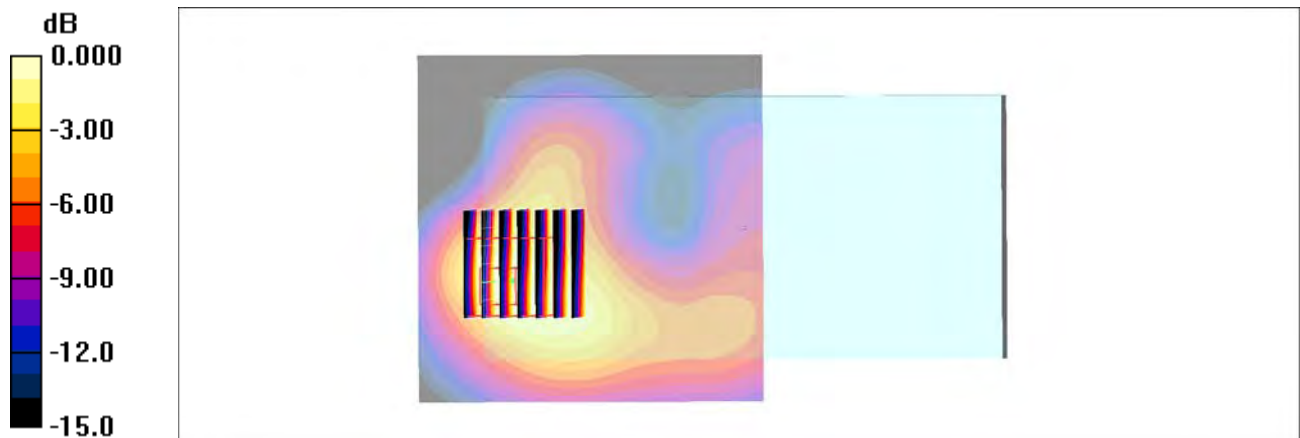

0 dB =  $1.40\text{mW/g}$

### #31\_LTE Band 12\_10M\_QPSK\_1\_49\_Back\_10mm\_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_160519 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.924$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.348 mW/g**

Maximum value of SAR (measured) = 0.542 mW/g

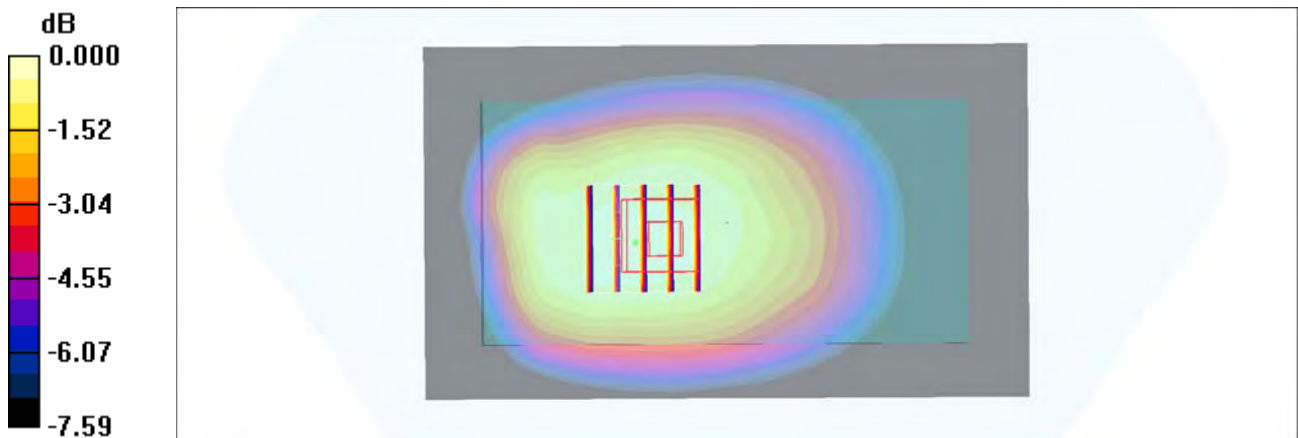

0 dB = 0.542mW/g

### #32\_LTE Band 13\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_160519 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.993 \text{ mho/m}$ ;  $\epsilon_r = 54.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.706 \text{ mW/g}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $27.4 \text{ V/m}$ ; Power Drift =  $0.103 \text{ dB}$

Peak SAR (extrapolated) =  $0.776 \text{ W/kg}$

**SAR(1 g) =  $0.587 \text{ mW/g}$ ; SAR(10 g) =  $0.462 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.704 \text{ mW/g}$



0 dB =  $0.704\text{mW/g}$

### #33\_LTE Band 25\_20M\_QPSK\_1\_49\_Back\_10mm\_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.815 mW/g; SAR(10 g) = 0.516 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

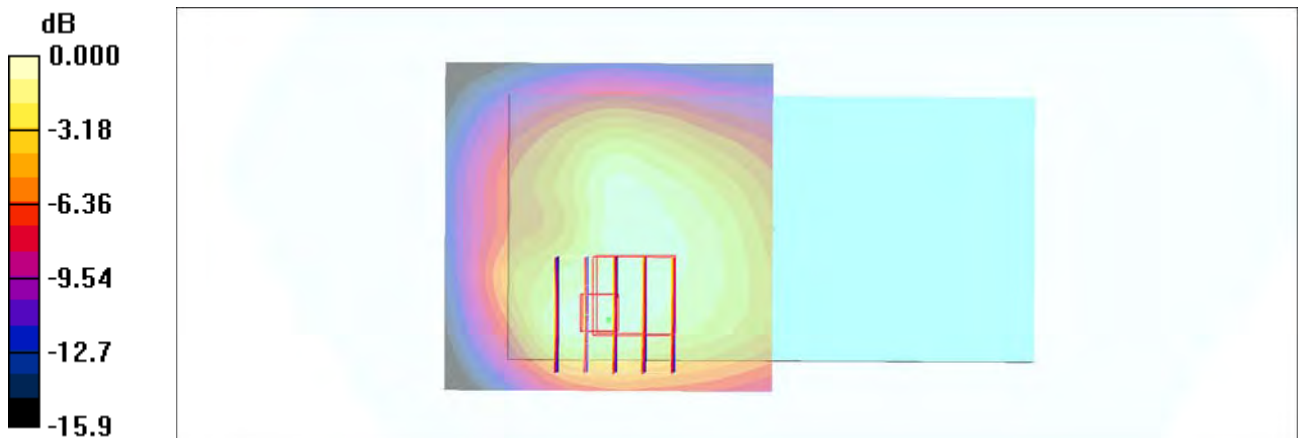

0 dB = 1.16mW/g

### #34\_LTE Band 26\_15M\_QPSK\_1\_0\_Back\_10mm\_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160521 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.975$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.728 W/kg

**SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.422 mW/g**

Maximum value of SAR (measured) = 0.661 mW/g

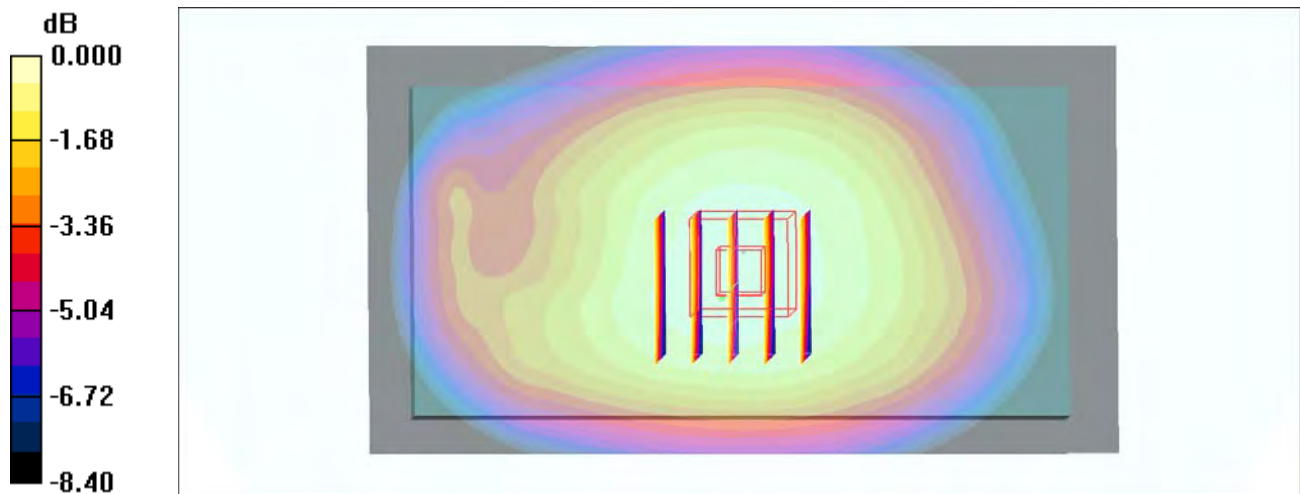

0 dB = 0.661mW/g

### #35\_LTE Band 41\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch41490

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: MSL\_2600\_160518 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.32$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x81x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.55 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.429 mW/g**

Maximum value of SAR (measured) = 1.50 mW/g

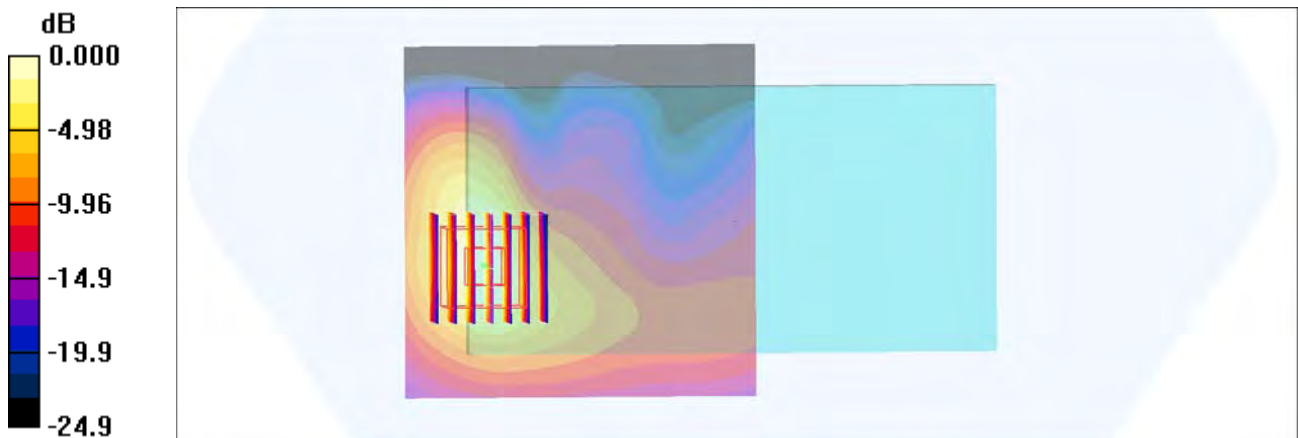

0 dB = 1.50mW/g

### #36\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch6

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.024

Medium: MSL\_2450\_160523 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.92 \text{ mho/m}$ ;  $\epsilon_r = 53.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.3 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.43, 7.43, 7.43); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x141x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $0.260 \text{ mW/g}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.92 \text{ V/m}$ ; Power Drift =  $0.067 \text{ dB}$

Peak SAR (extrapolated) =  $0.326 \text{ W/kg}$

**SAR(1 g) =  $0.160 \text{ mW/g}$ ; SAR(10 g) =  $0.079 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.255 \text{ mW/g}$

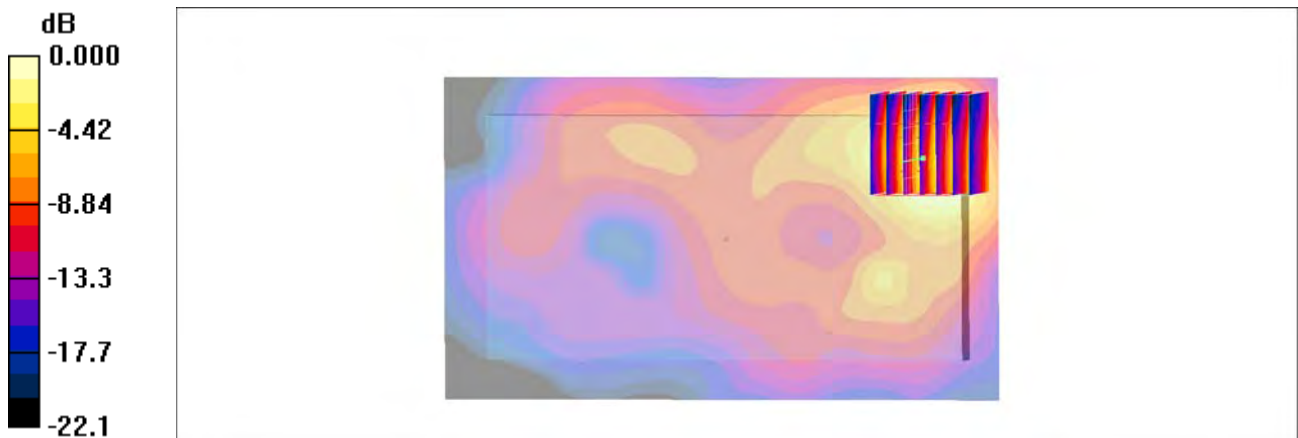

0 dB =  $0.255\text{mW/g}$

### #37\_GSM850\_GPRS (2 Tx slots)\_Back\_10mm\_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium: MSL\_850\_160519 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 56.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.780 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.844 W/kg

**SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.496 mW/g**

Maximum value of SAR (measured) = 0.773 mW/g

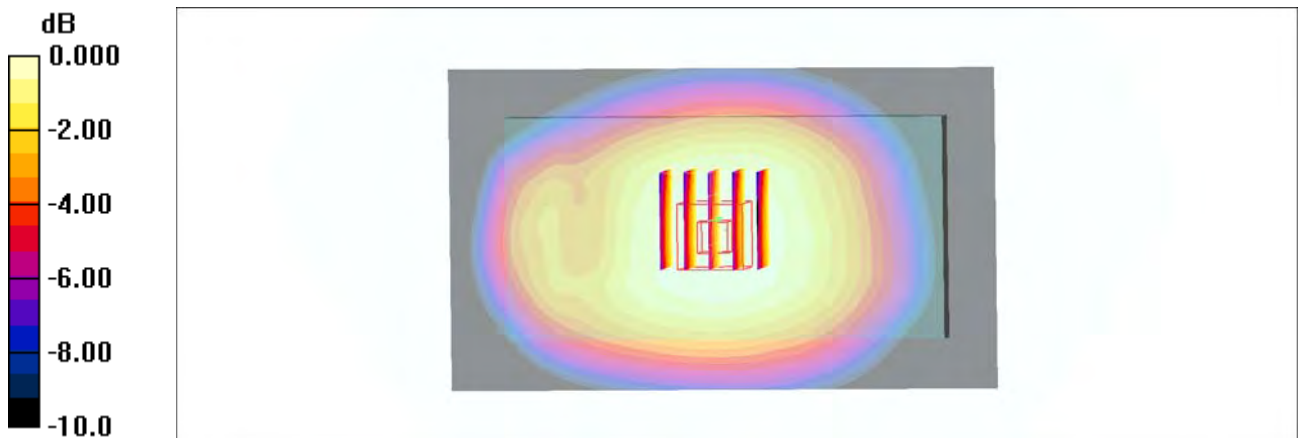

0 dB = 0.773mW/g

### #38\_GSM1900\_GPRS (3 Tx slots)\_Back\_10mm\_Ch512

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: MSL\_1900\_160520 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.933 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.6 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.661 mW/g; SAR(10 g) = 0.416 mW/g**

Maximum value of SAR (measured) = 0.872 mW/g

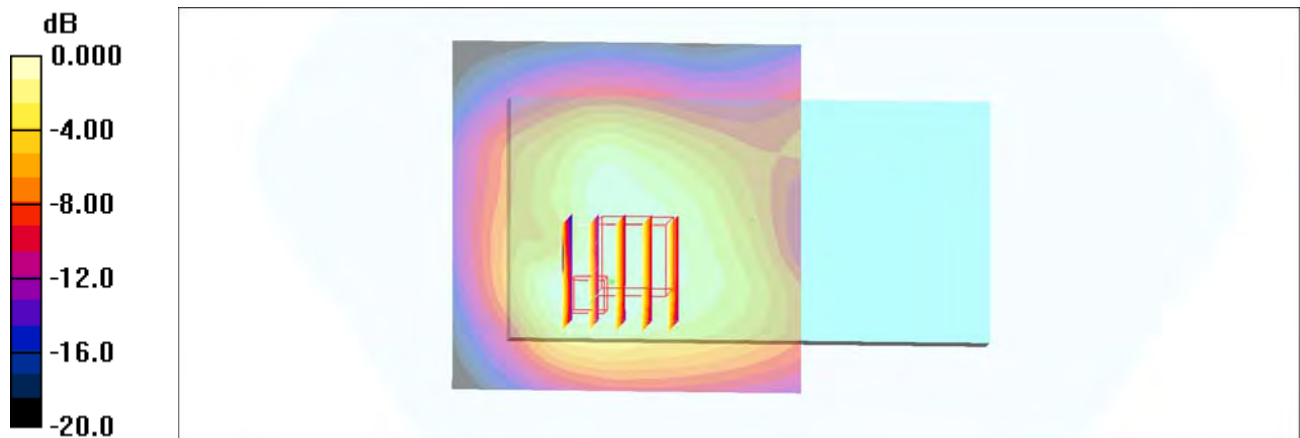

0 dB = 0.872mW/g

### #39\_WCDMA II\_RMC 12.2Kbps\_Back\_10mm\_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 52.4$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.39 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.637 mW/g**

Maximum value of SAR (measured) = 1.46 mW/g

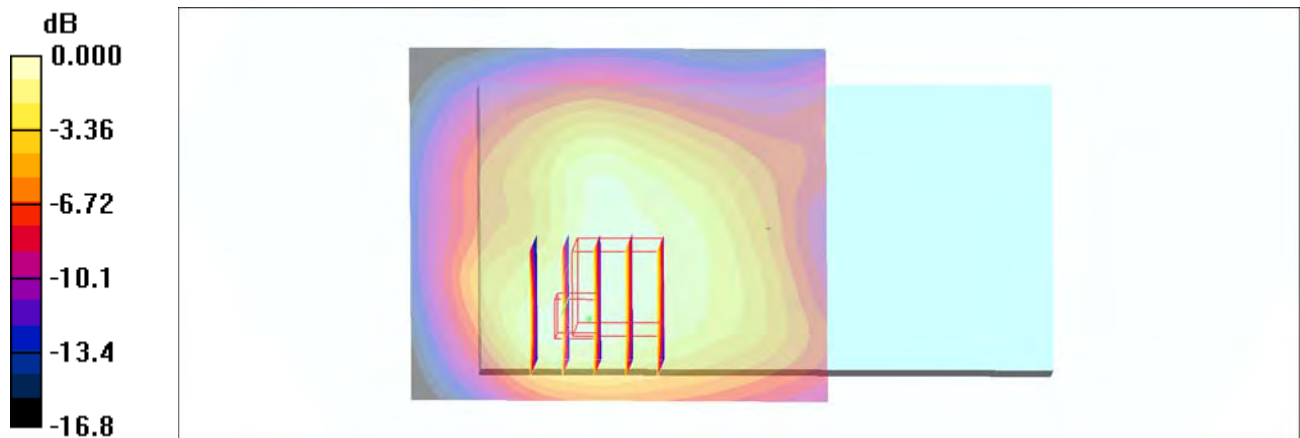

0 dB = 1.46mW/g

### #40\_WCDMA IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_160519 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.45 \text{ mho/m}$ ;  $\epsilon_r = 52.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.43 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $31.4 \text{ V/m}$ ; Power Drift =  $0.003 \text{ dB}$

Peak SAR (extrapolated) =  $1.60 \text{ W/kg}$

**SAR(1 g) =  $0.991 \text{ mW/g}$ ; SAR(10 g) =  $0.662 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.35 \text{ mW/g}$

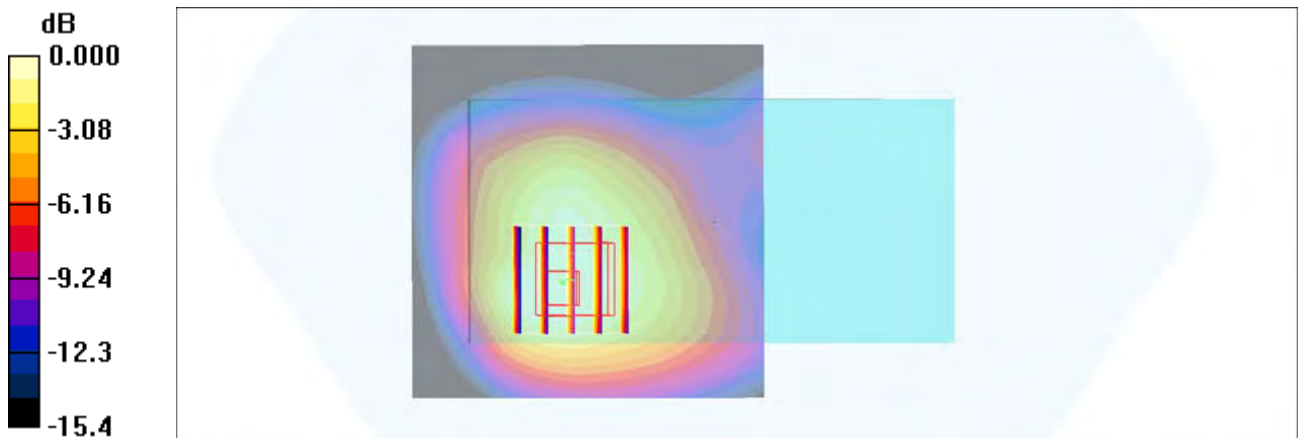

0 dB =  $1.35\text{mW/g}$

### #41\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160521 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 56.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.659 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.428 mW/g**

Maximum value of SAR (measured) = 0.668 mW/g

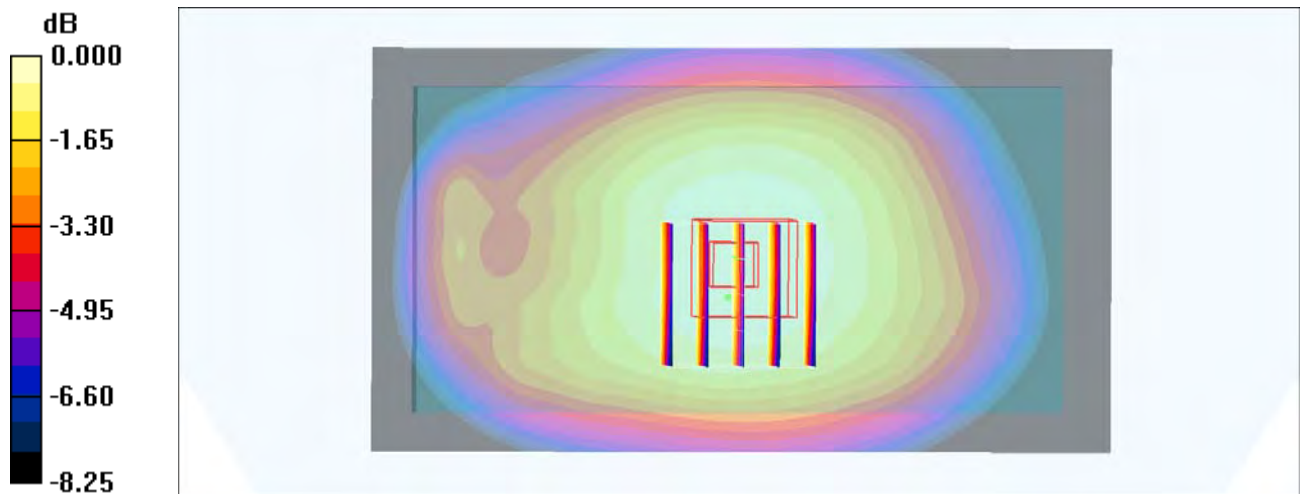

0 dB = 0.668mW/g

### #42\_CDMA BC0\_1xRTT RC3 SO32\_Back\_10mm\_Ch1013

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.964 \text{ mho/m}$ ;  $\epsilon_r = 57.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.791 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $29.8 \text{ V/m}$ ; Power Drift =  $-0.022 \text{ dB}$

Peak SAR (extrapolated) =  $0.856 \text{ W/kg}$

**SAR(1 g) =  $0.653 \text{ mW/g}$ ; SAR(10 g) =  $0.509 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.778 \text{ mW/g}$

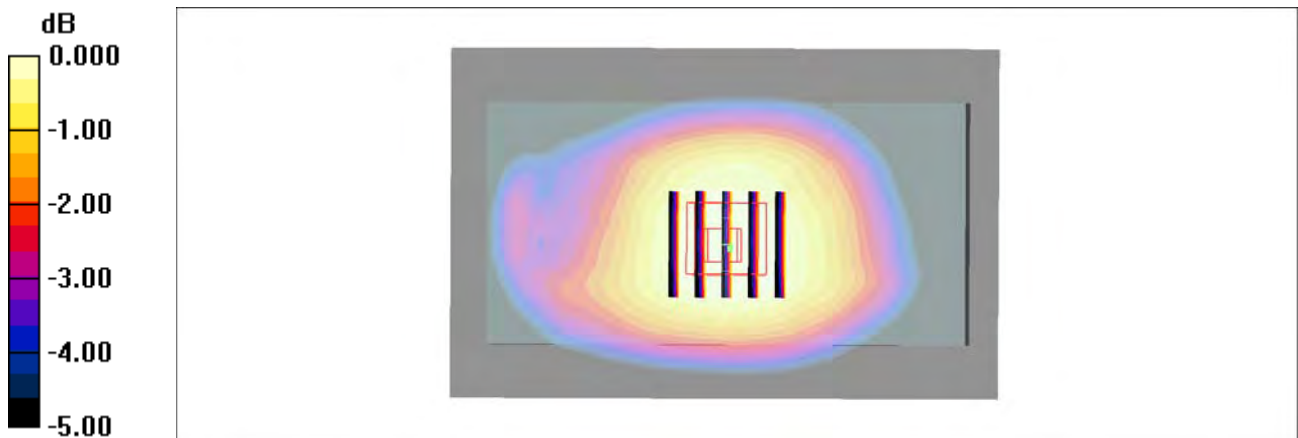

0 dB =  $0.778\text{mW/g}$

### #43\_CDMA BC1\_1xRTT RC3 SO32\_Back\_10mm\_Ch25

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used :  $f = 1851.25$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r =$

$52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.5$  °C ; Liquid Temperature :  $22.5$  °C

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.54 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.630 mW/g**

Maximum value of SAR (measured) = 1.50 mW/g

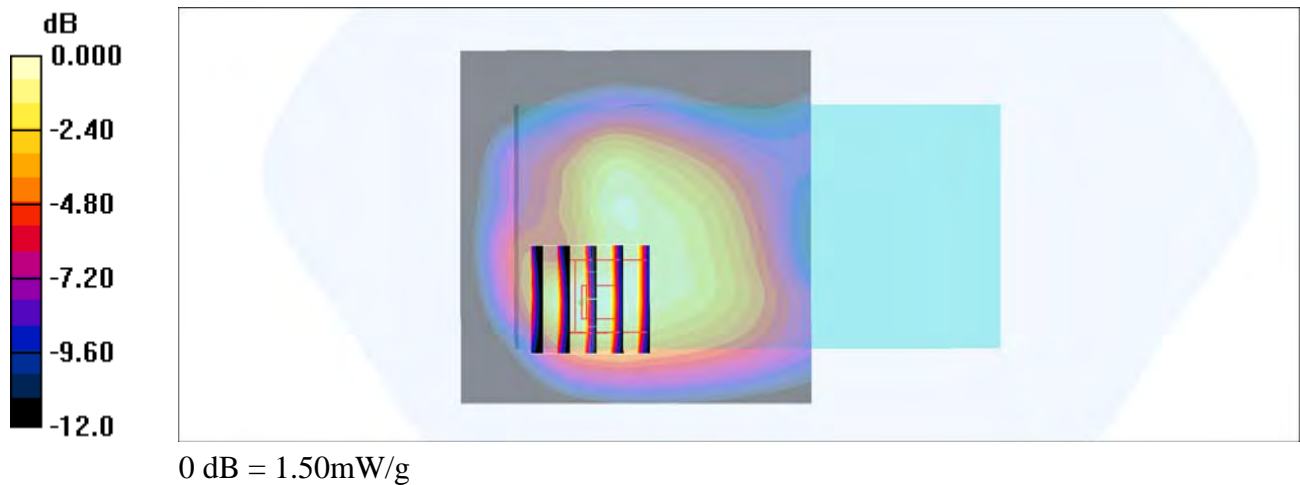

### #44\_CDMA BC10\_1xRTT RC3 SO32\_Back\_10mm\_Ch520

Communication System: CDMA ; Frequency: 819 MHz;Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.958 \text{ mho/m}$ ;  $\epsilon_r = 57.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.910 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $32.0 \text{ V/m}$ ; Power Drift =  $0.029 \text{ dB}$

Peak SAR (extrapolated) =  $1.00 \text{ W/kg}$

**SAR(1 g) =  $0.764 \text{ mW/g}$ ; SAR(10 g) =  $0.600 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.918 \text{ mW/g}$

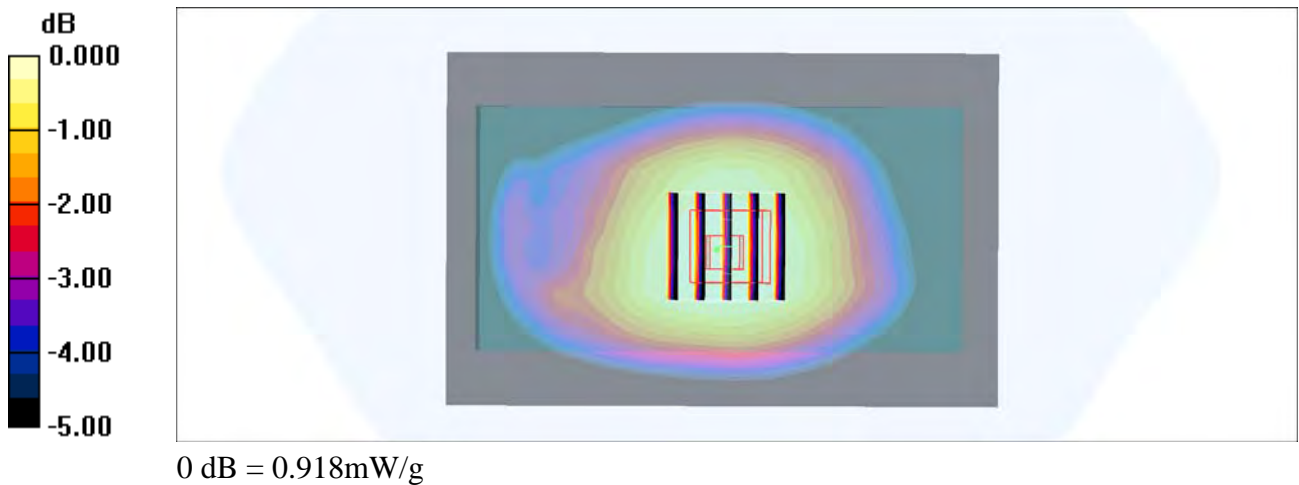

### #45\_LTE Band 2\_20M\_QPSK\_1\_49\_Back\_10mm\_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160520 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.53 \text{ mho/m}$ ;  $\epsilon_r = 53.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.19 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $26.9 \text{ V/m}$ ; Power Drift =  $0.040 \text{ dB}$

Peak SAR (extrapolated) =  $1.38 \text{ W/kg}$

**SAR(1 g) =  $0.829 \text{ mW/g}$ ; SAR(10 g) =  $0.533 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.18 \text{ mW/g}$

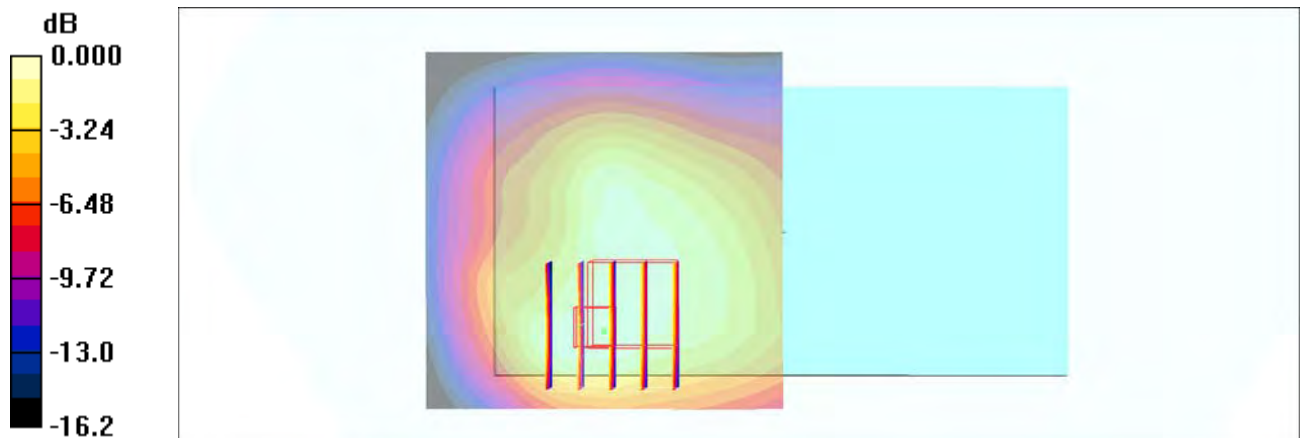

0 dB =  $1.18\text{mW/g}$

### #46\_LTE Band 4\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch20175

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_160519 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 52.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.61 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.747 mW/g**

Maximum value of SAR (measured) = 1.49 mW/g

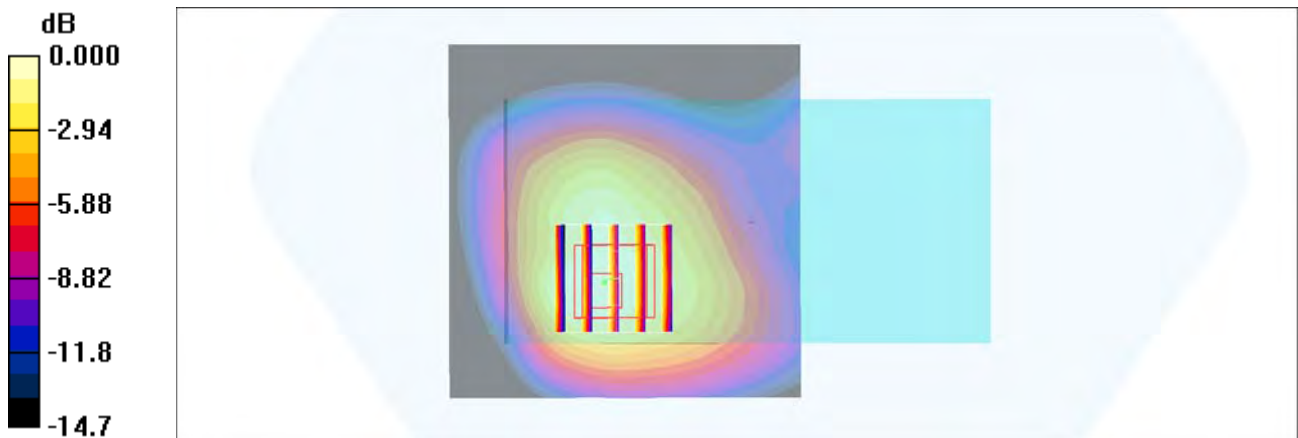

0 dB = 1.49mW/g

### #47\_LTE Band 5\_10M\_QPSK\_1\_25\_Back\_10mm\_Ch20525

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160519 Medium parameters used :  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.975 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.634 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $26.2 \text{ V/m}$ ; Power Drift =  $-0.018 \text{ dB}$

Peak SAR (extrapolated) =  $0.695 \text{ W/kg}$

**SAR(1 g) =  $0.515 \text{ mW/g}$ ; SAR(10 g) =  $0.402 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.628 \text{ mW/g}$

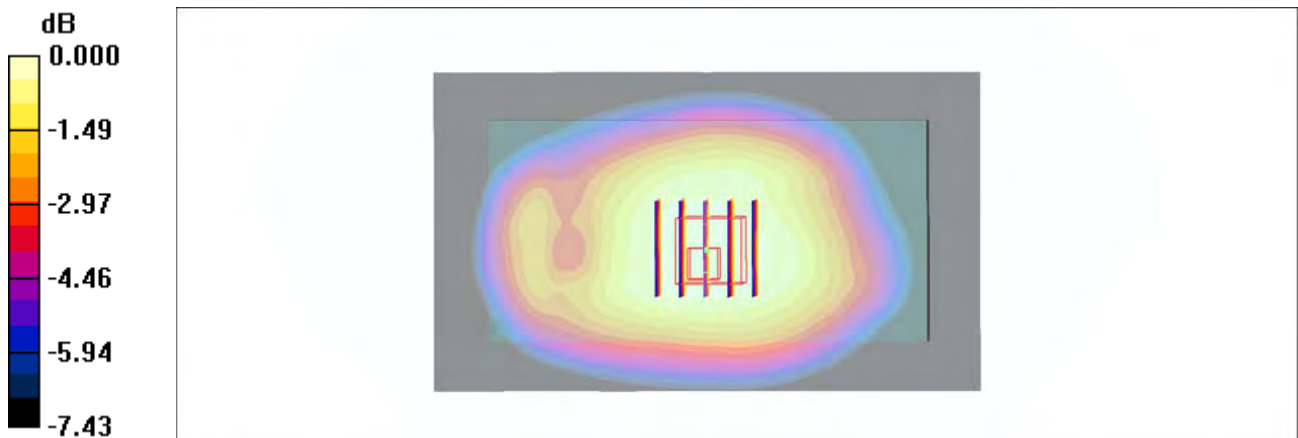

0 dB =  $0.628\text{mW/g}$

### #48\_LTE Band 7\_20M\_QPSK\_50\_0\_Back\_10mm\_Ch21100

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_160518 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.11 \text{ mho/m}$ ;  $\epsilon_r = 52.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.3 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x81x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $1.32 \text{ mW/g}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.2 \text{ V/m}$ ; Power Drift =  $0.072 \text{ dB}$

Peak SAR (extrapolated) =  $1.74 \text{ W/kg}$

**SAR(1 g) =  $0.874 \text{ mW/g}$ ; SAR(10 g) =  $0.430 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.40 \text{ mW/g}$

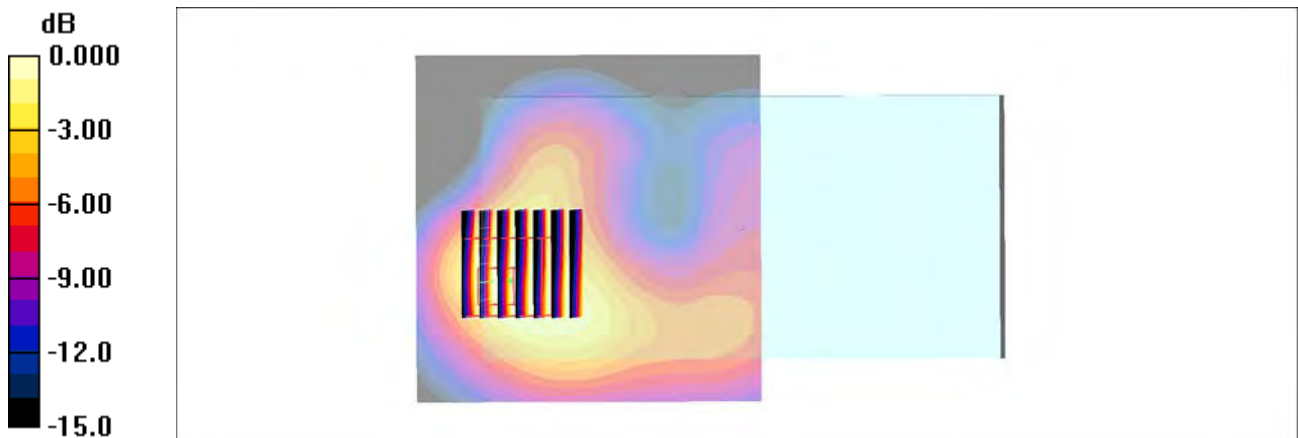

0 dB =  $1.40\text{mW/g}$

### #49\_LTE Band 12\_10M\_QPSK\_1\_49\_Back\_10mm\_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_160519 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.924$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.348 mW/g**

Maximum value of SAR (measured) = 0.542 mW/g

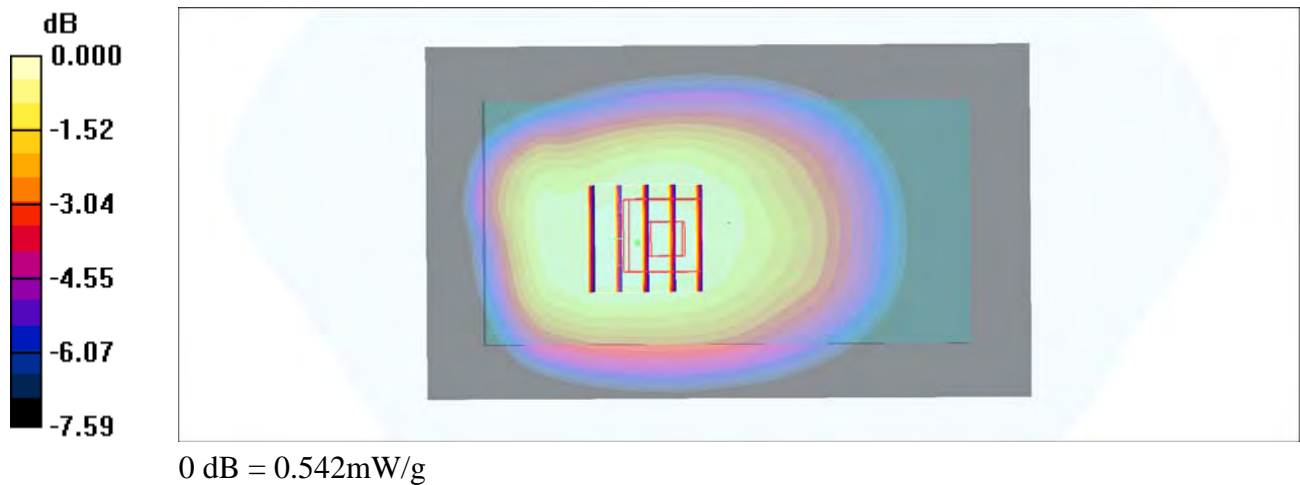

### #50\_LTE Band 13\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_160519 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.993 \text{ mho/m}$ ;  $\epsilon_r = 54.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.706 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $27.4 \text{ V/m}$ ; Power Drift =  $0.103 \text{ dB}$

Peak SAR (extrapolated) =  $0.776 \text{ W/kg}$

**SAR(1 g) =  $0.587 \text{ mW/g}$ ; SAR(10 g) =  $0.462 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.704 \text{ mW/g}$

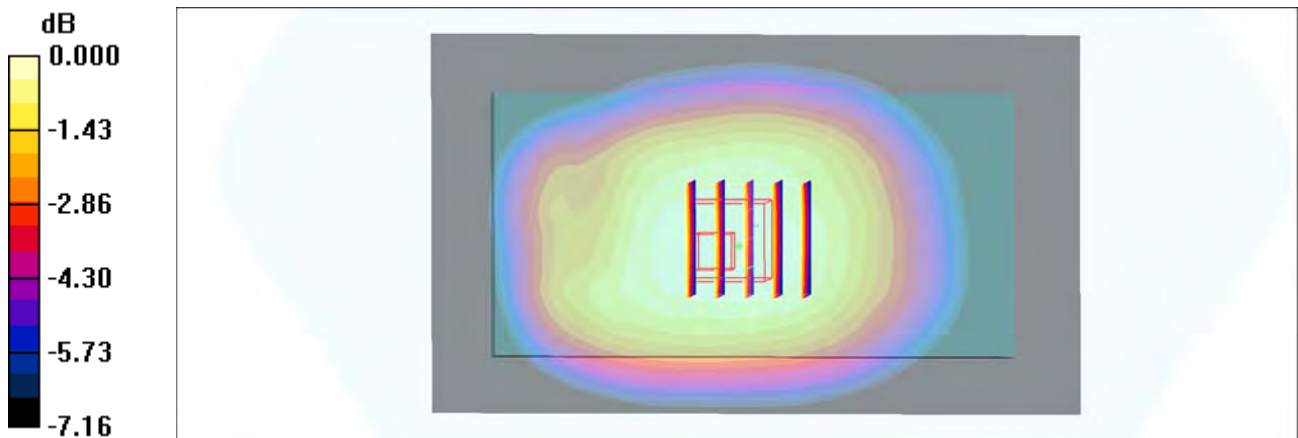

0 dB =  $0.704\text{mW/g}$

### #51\_LTE Band 25\_20M\_QPSK\_1\_49\_Back\_10mm\_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_160519 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.52 \text{ mho/m}$ ;  $\epsilon_r = 52.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $1.12 \text{ mW/g}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.5 \text{ V/m}$ ; Power Drift =  $-0.014 \text{ dB}$

Peak SAR (extrapolated) =  $1.37 \text{ W/kg}$

**SAR(1 g) =  $0.815 \text{ mW/g}$ ; SAR(10 g) =  $0.516 \text{ mW/g}$**

Maximum value of SAR (measured) =  $1.16 \text{ mW/g}$

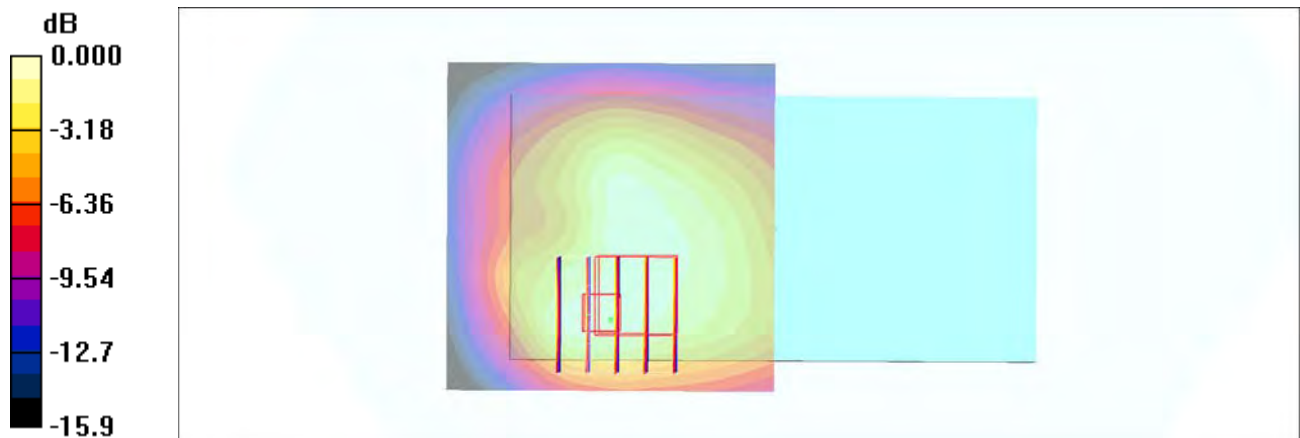

0 dB =  $1.16\text{mW/g}$

### #52\_LTE Band 26\_15M\_QPSK\_1\_0\_Back\_10mm\_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_160521 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.975$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (61x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.728 W/kg

**SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.422 mW/g**

Maximum value of SAR (measured) = 0.661 mW/g

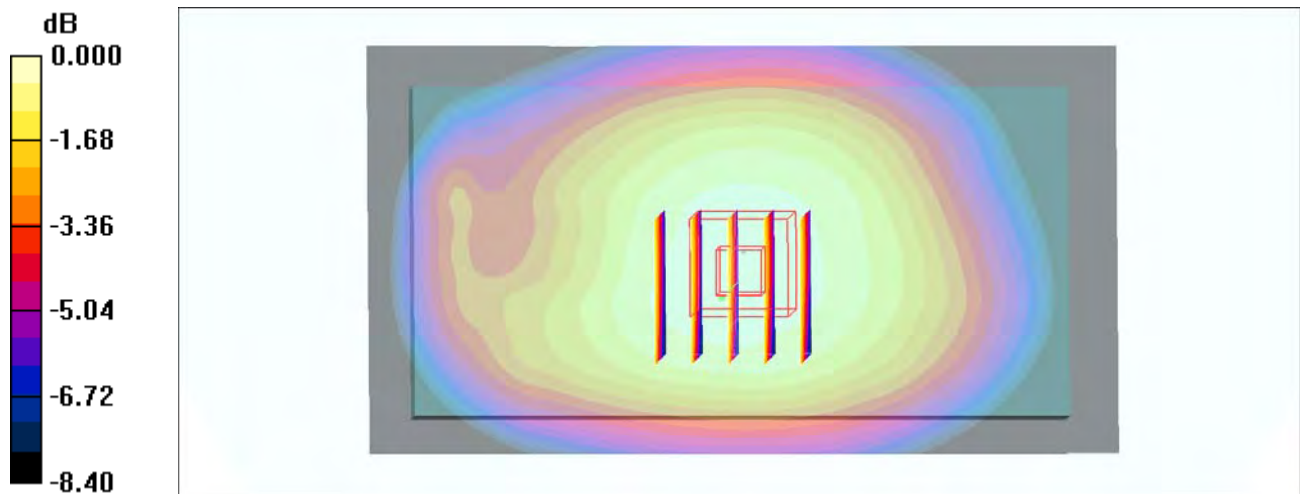

0 dB = 0.661mW/g

### #53\_LTE Band 41\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch41490

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: MSL\_2600\_160518 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.32$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x81x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.55 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.429 mW/g**

Maximum value of SAR (measured) = 1.50 mW/g

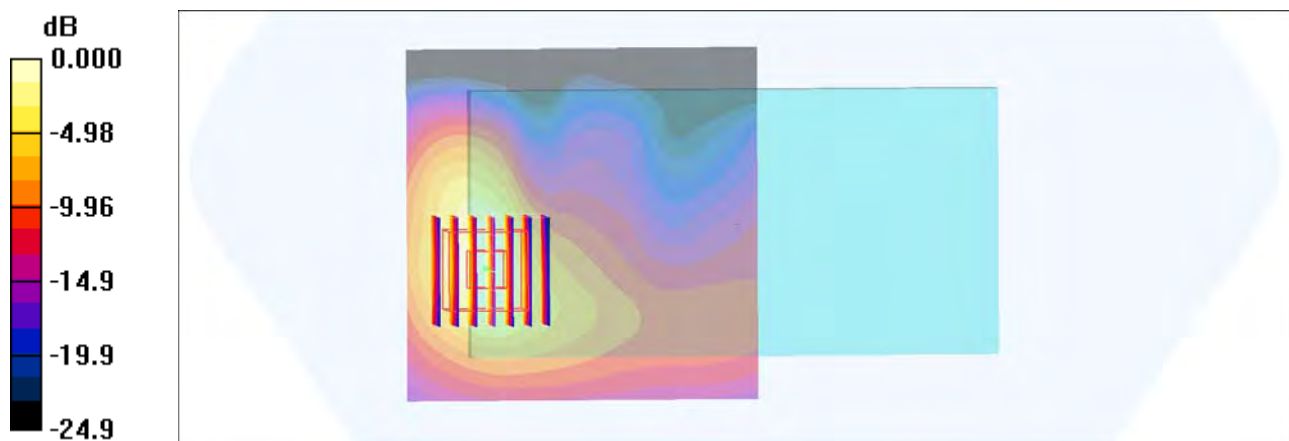

0 dB = 1.50mW/g

### #54\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch6

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.024

Medium: MSL\_2450\_160523 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.92$  mho/m;  $\epsilon_r = 53.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.43, 7.43, 7.43); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x141x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.260 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.92 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.326 W/kg

**SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.079 mW/g**

Maximum value of SAR (measured) = 0.255 mW/g

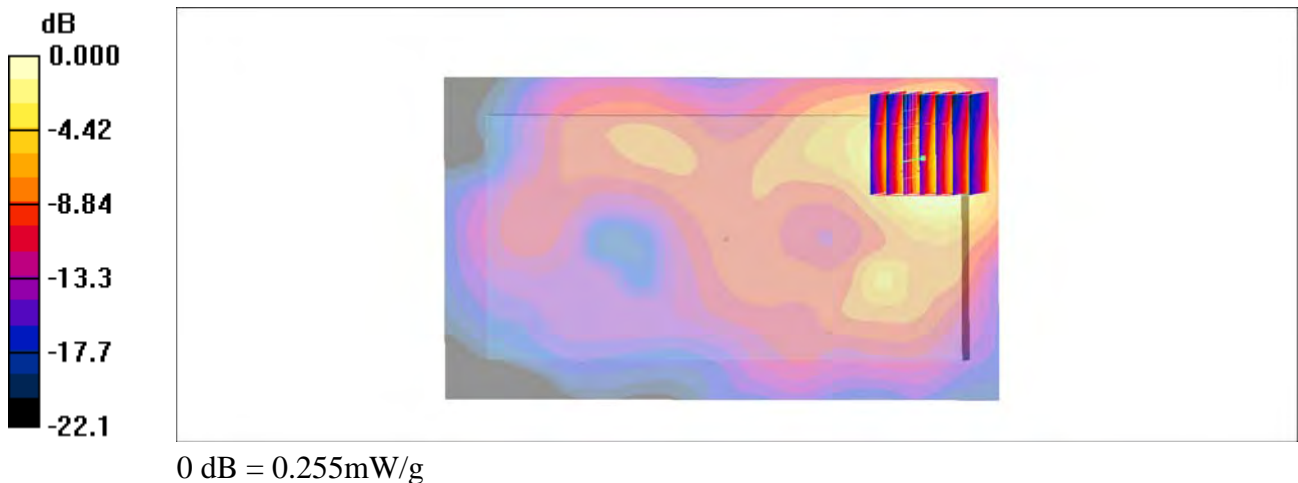

### #55\_ Bluetooth\_1Mbps\_Back\_10mm\_Ch0

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.2

Medium: MSL\_2450\_160526 Medium parameters used:  $f = 2402 \text{ MHz}$ ;  $\sigma = 1.93 \text{ mho/m}$ ;  $\epsilon_r = 54.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.43, 7.43, 7.43); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM\_Right; Type: SAM\_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

**Area Scan (81x81x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $0.076 \text{ mW/g}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.90 \text{ V/m}$ ; Power Drift =  $0.170 \text{ dB}$

Peak SAR (extrapolated) =  $0.096 \text{ W/kg}$

**SAR(1 g) =  $0.046 \text{ mW/g}$ ; SAR(10 g) =  $0.022 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.074 \text{ mW/g}$

