



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 9369, 9847  
**FCC ID** : IHDT56VF2  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Sep. 30, 2016 and testing was completed on Oct. 28, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

1.1 Applicant..... 5

1.2 Manufacturer..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 6

1.5 Specification of Accessory..... 6

1.6 Modification of EUT ..... 6

1.7 Testing Location ..... 6

1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

2.1 Descriptions of Test Mode..... 8

2.2 Test Mode..... 9

2.3 Connection Diagram of Test System..... 10

2.4 Support Unit used in test configuration and system ..... 11

2.5 EUT Operation Test Setup ..... 11

2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

3.1 6dB Bandwidth Measurement ..... 13

3.2 Peak Output Power Measurement ..... 18

3.3 Power Spectral Density Measurement ..... 19

3.4 Conducted Band Edges and Spurious Emission Measurement ..... 28

3.5 Radiated Band Edges and Spurious Emission Measurement ..... 37

3.6 AC Conducted Emission Measurement..... 41

3.7 Antenna Requirements..... 45

**4 LIST OF MEASURING EQUIPMENT..... 46**

**5 UNCERTAINTY OF EVALUATION..... 47**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.70 dB at 66.860 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.08 dB at 0.521 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	9369, 9847
FCC ID	IHDT56VF2
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 351864080029279/351864080029287 Radiated: 351864080029311/351864080029329 Conduction: 351864080029238/351864080029246
HW Version	DVT2(V5.0)
SW Version	cedric-userdebug 7.0 NPP25.73 270 intcfg,test-keys
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for SIM slot, sample 1(Model name: 9369) is dual SIM slot, sample 2(Model name: 9847) is single SIM slot. According to the difference, the sample 1 to perform full test.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v4.0 LE: 12.20dBm (0.0166 W) Bluetooth v4.2 LE: 11.98dBm (0.0158 W)
Antenna Type / Gain	PIFA Antenna with gain -1.55 dBi
Type of Modulation	GFSK

### 1.5 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	Motorola (Acbel)	Model Name	C-P35
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA		
Battery	Brand Name	Motorola (ATL)	Model Name	GK40
	Power Rating	3.8Vdc, 2685/2800mAh (Min/Typ)	Type	Li-ion
Earphone	Brand Name	Motorola	Model Name	SJYN1181B
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (Liqi)	Model Name	L25W-051000100AL
	Signal Line Type	1.0 meter, non-shielded cable, without ferrite core		

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China			
	TEL: +86-0512-5790-0158			
	FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	CO01-KS	03CH03-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		v4.0	v4.2
Ch00	2402MHz	11.06 dBm	10.22 dBm
Ch39	2441MHz	<b>12.20 dBm</b>	<b>11.98 dBm</b>
Ch78	2480MHz	11.15 dBm	10.01 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration from all possible combinations.
  
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter)

## 2.3 Connection Diagram of Test System


### <Bluetooth v4.0 LE Tx Mode>

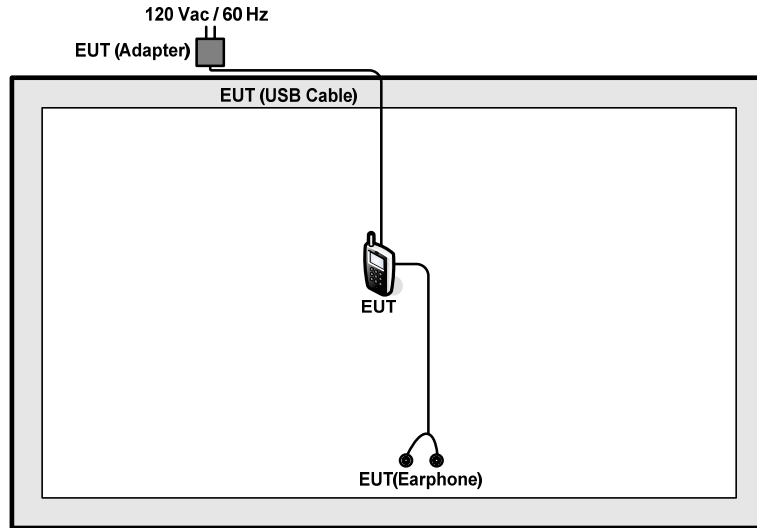

### <Bluetooth v4.2 LE Tx Mode>

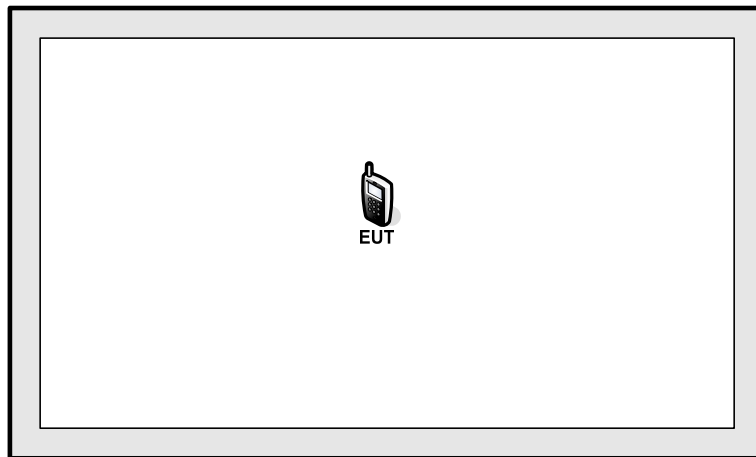

<AC Conducted Emission Mode>

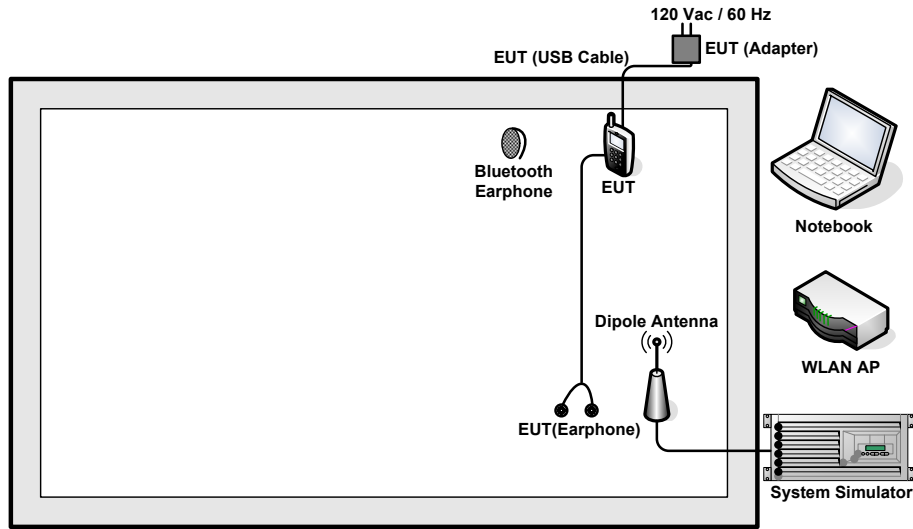

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	Linksys	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	Shielded cable DC O/P 1.8 m Unshielded AC I/P cable 1.2 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.8 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

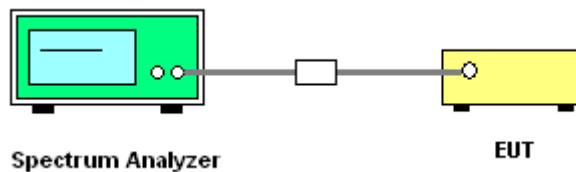




### 3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.

Bluetooth v4.0 LE


6 dB Bandwidth Plot on Channel 00

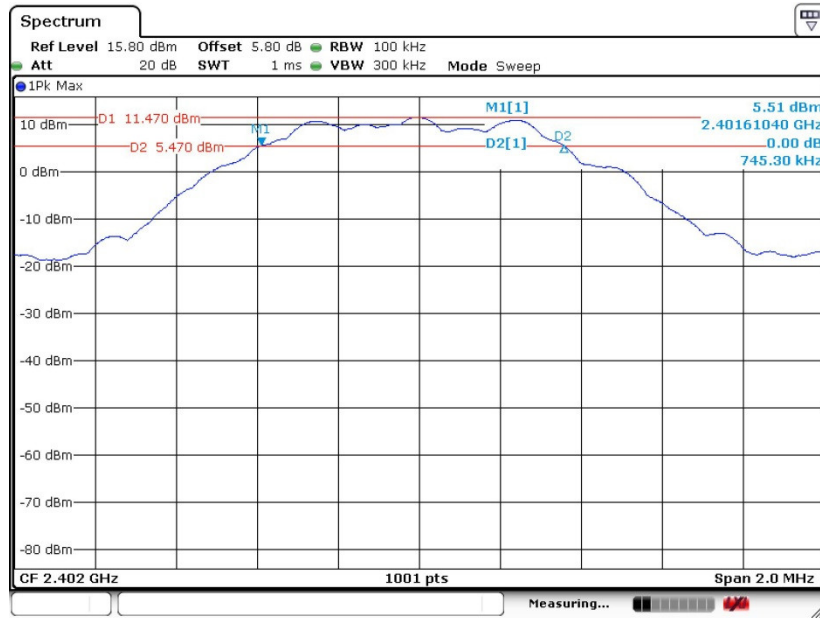

Date: 17.OCT.2016 16:43:24




### 6 dB Bandwidth Plot on Channel 19

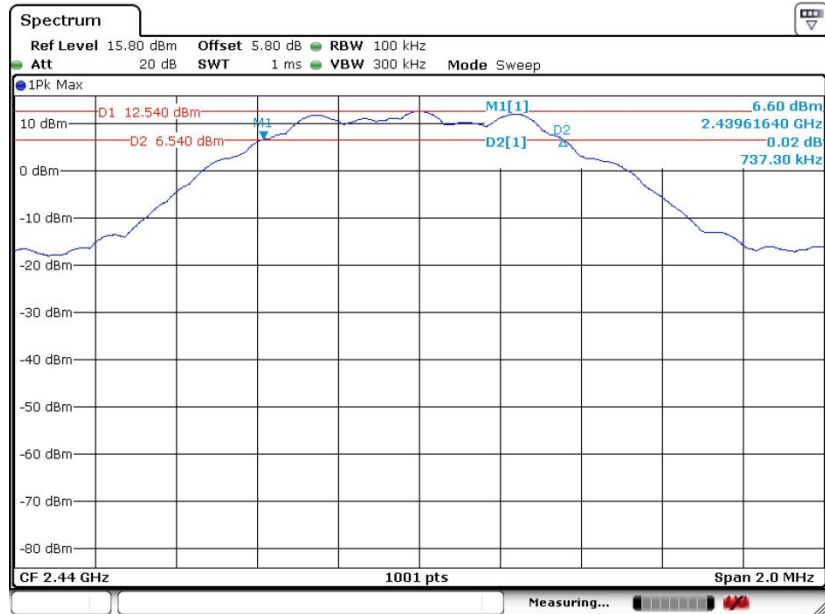

Date: 17.OCT.2016 16:45:36

### 6 dB Bandwidth Plot on Channel 39

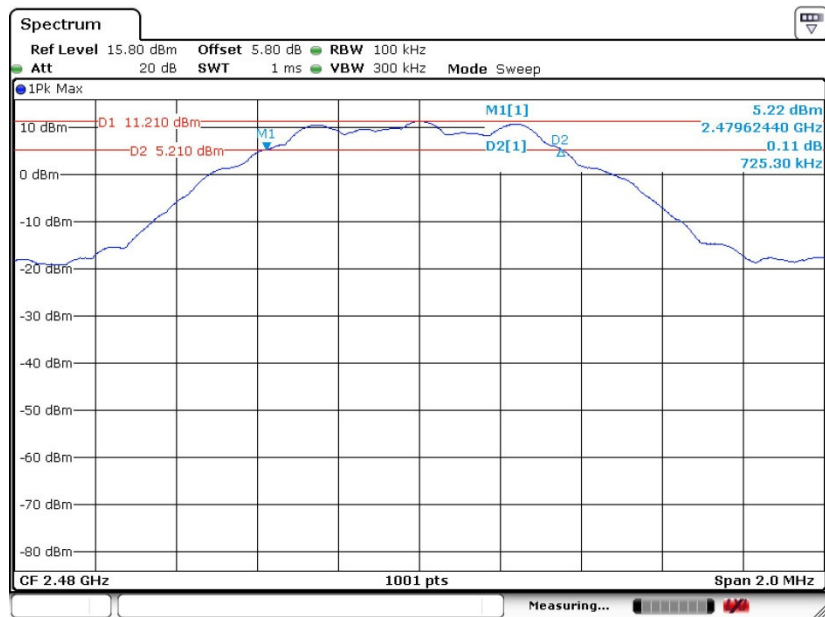


Date: 17.OCT.2016 16:48:15



Bluetooth v4.2 LE


6 dB Bandwidth Plot on Channel 00

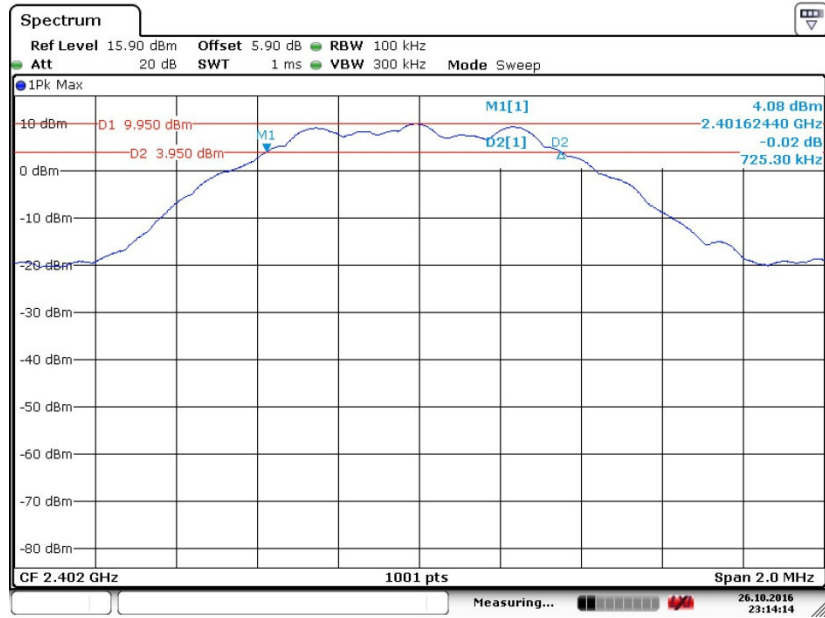

Date: 26.OCT.2016 23:14:14




6 dB Bandwidth Plot on Channel 19

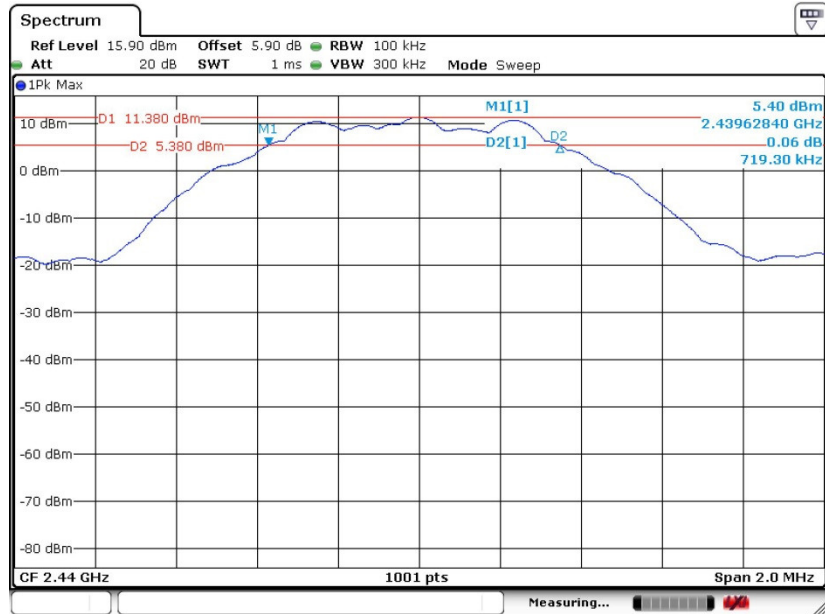

Date: 28.OCT.2016 11:01:31

6 dB Bandwidth Plot on Channel 39

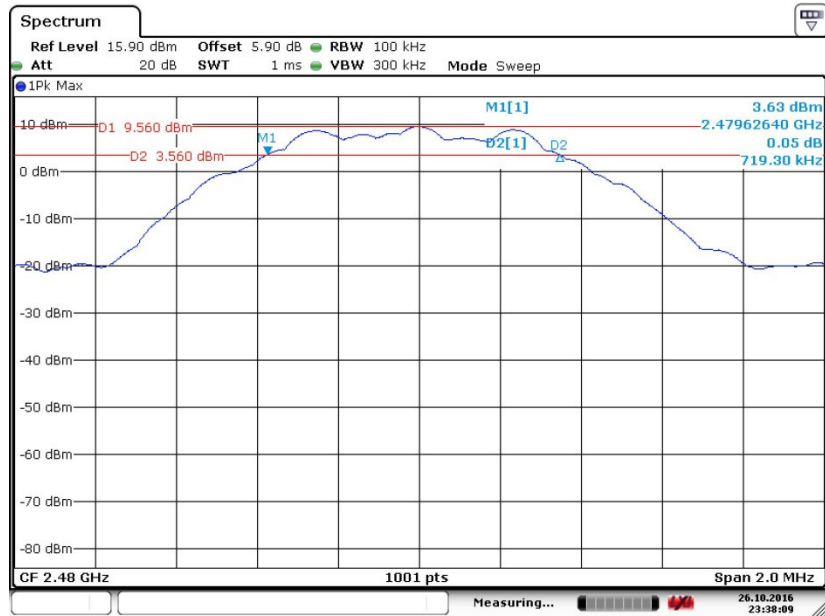

Date: 28.OCT.2016 23:38:09

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

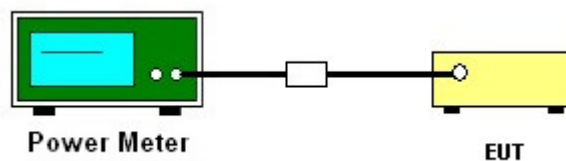

### 3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

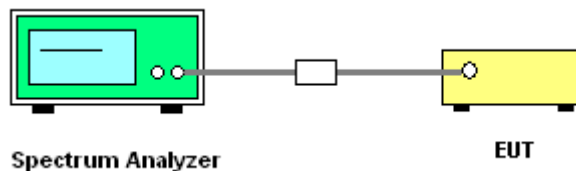




### 3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth v4.0 LE


PSD 100kHz Plot on Channel 00

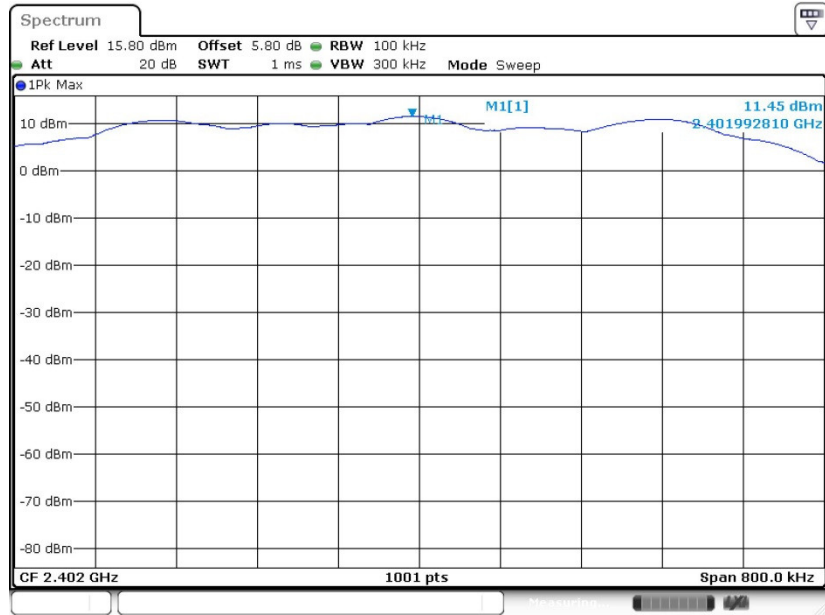

Date: 17.OCT.2016 16:43:58




PSD 100kHz Plot on Channel 19

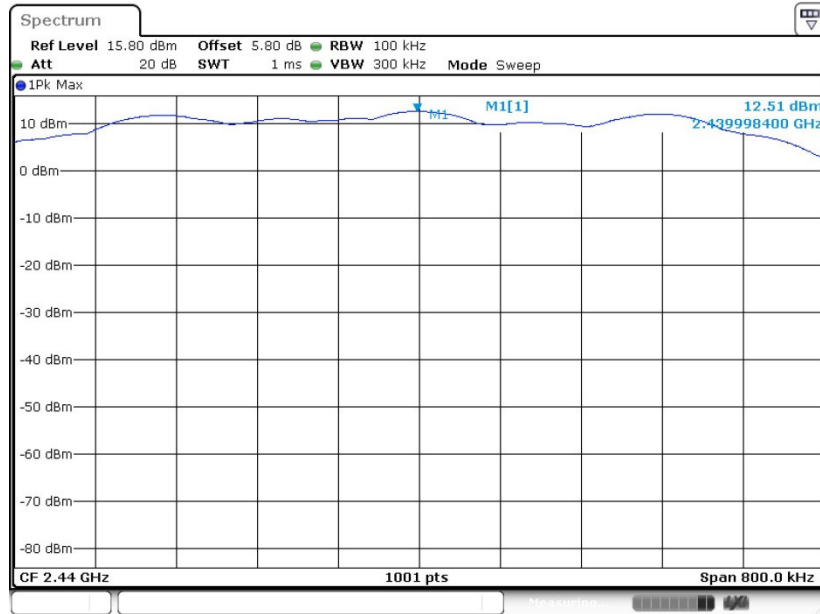

Date: 17.OCT.2016 16:46:23

PSD 100kHz Plot on Channel 39

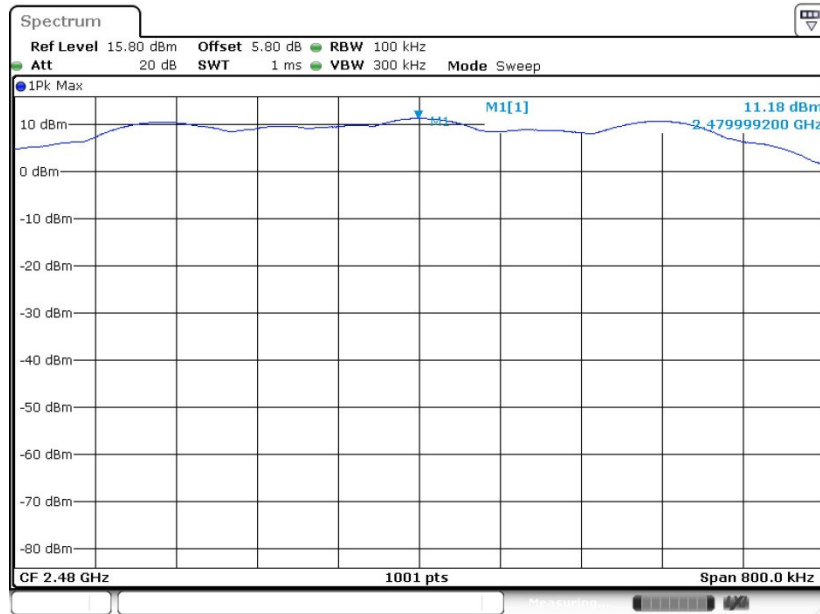


Date: 17.OCT.2016 16:48:50



Bluetooth v4.2 LE


PSD 100kHz Plot on Channel 00

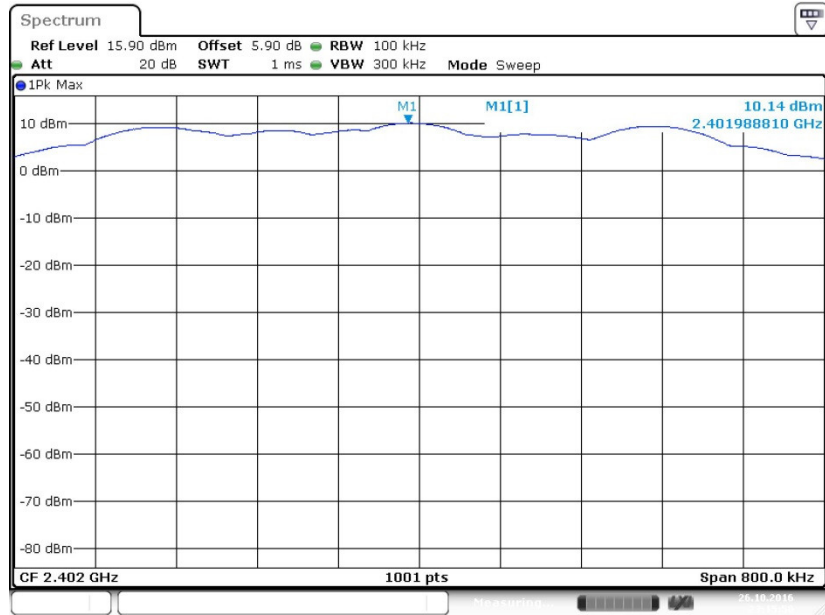

Date: 26.OCT.2016 23:15:50




PSD 100kHz Plot on Channel 19

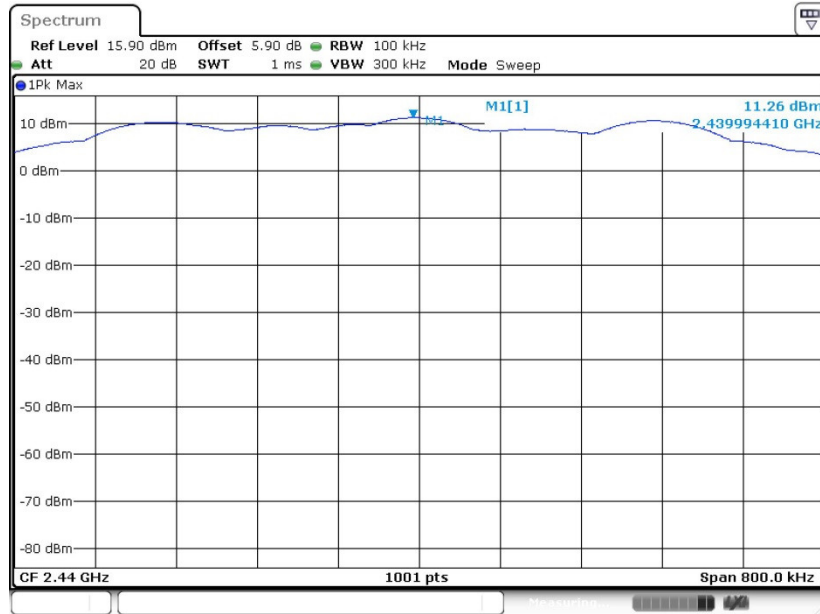

Date: 28.OCT.2016 11:04:20

PSD 100kHz Plot on Channel 39

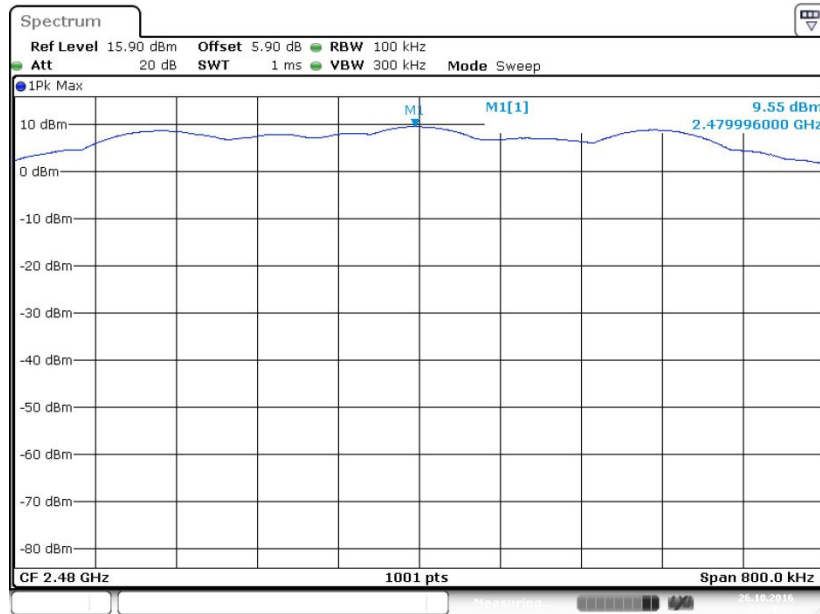


Date: 28.OCT.2016 23:38:53



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Bluetooth v4.0 LE


PSD 3kHz Plot on Channel 00

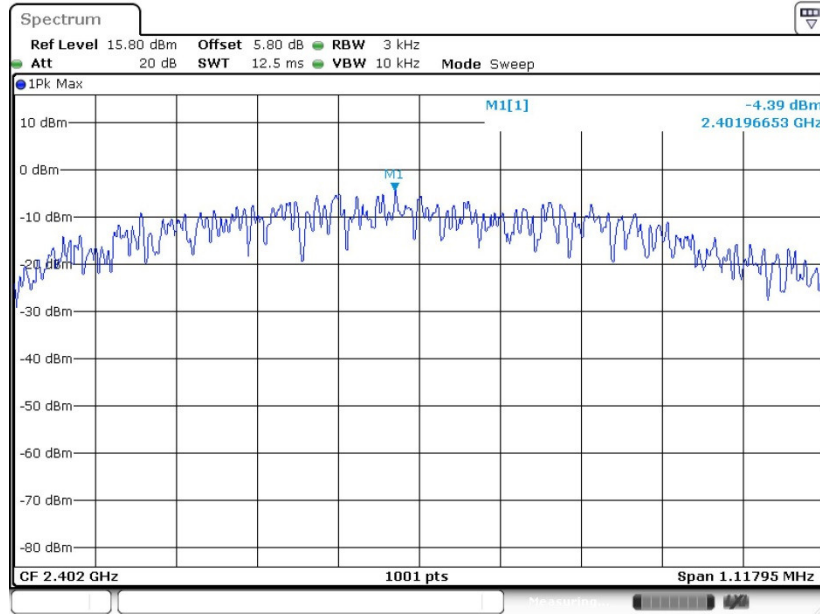

Date: 20.OCT.2016 07:46:23




PSD 3kHz Plot on Channel 19

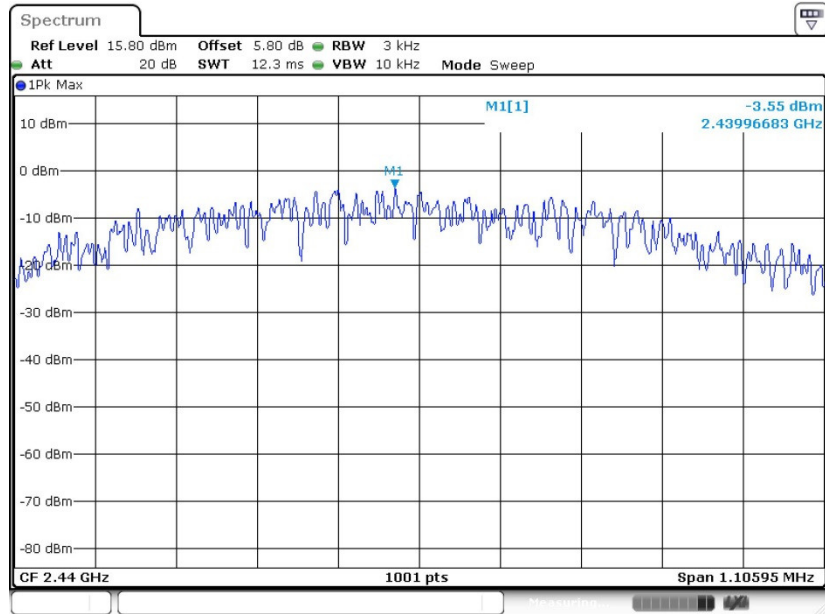

Date: 20.OCT.2016 07:47:15

PSD 3kHz Plot on Channel 39

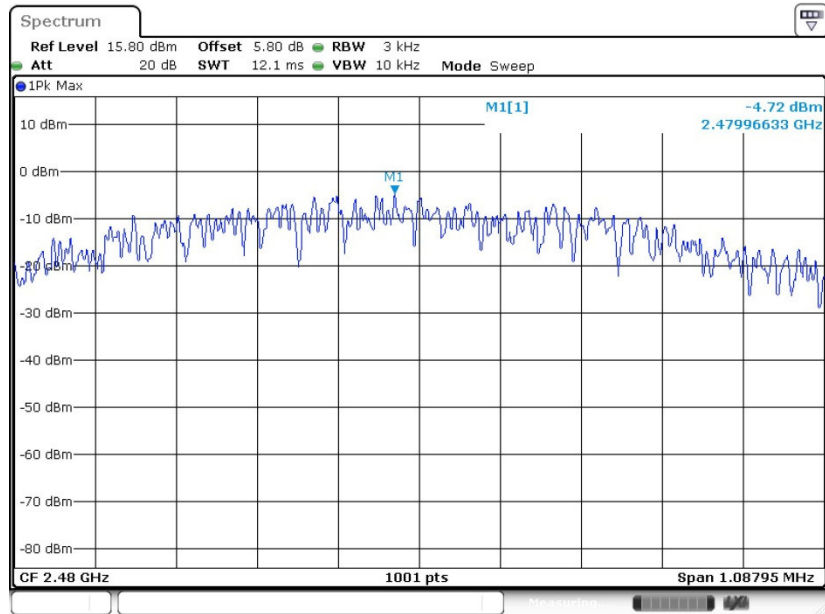


Date: 20.OCT.2016 07:48:04




Bluetooth v4.2 LE

PSD 3kHz Plot on Channel 00

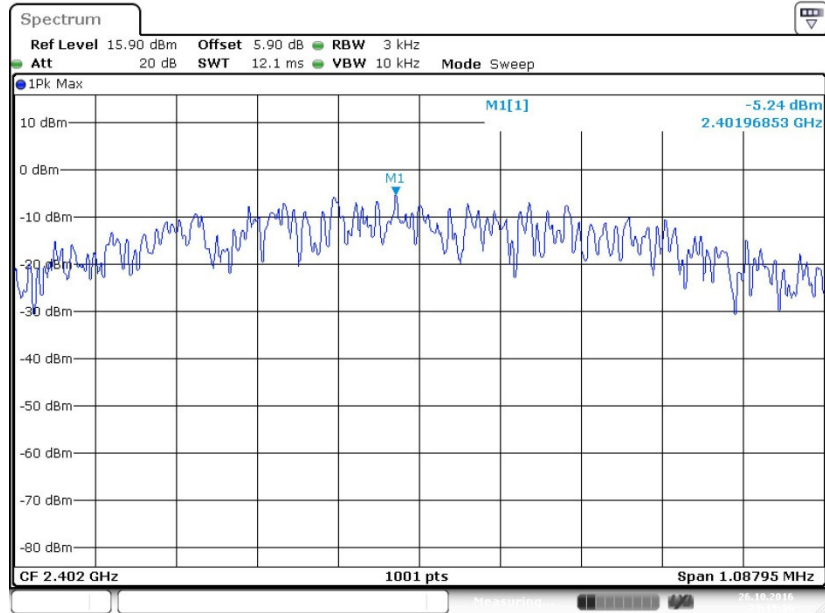




PSD 3kHz Plot on Channel 19

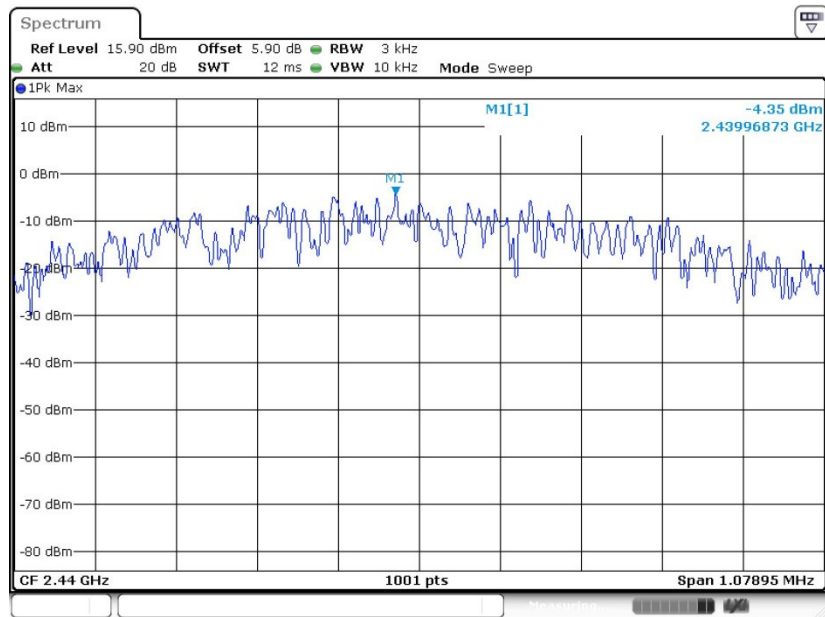

Date: 28.OCT.2016 11:03:40

PSD 3kHz Plot on Channel 39

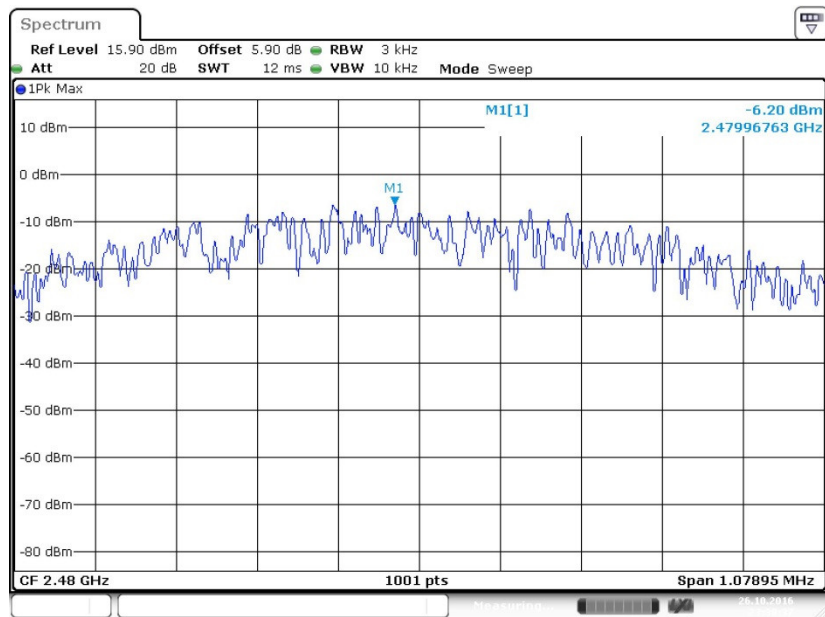

Date: 28.OCT.2016 23:38:37

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

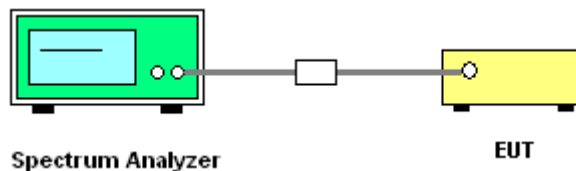




### 3.4.5 Test Result of Conducted Band Edges Plots


Bluetooth v4.0 LE

#### Low Band Edge Plot on Channel 00

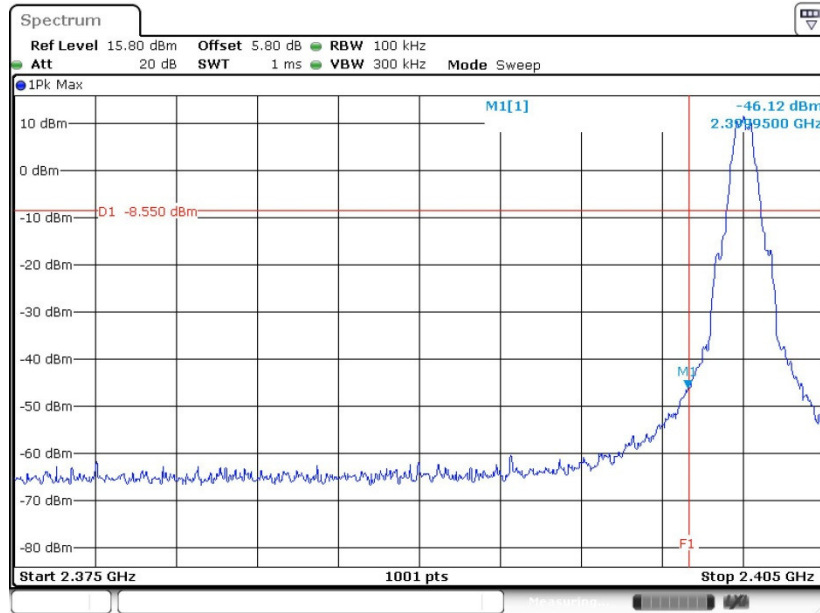

Date: 17.OCT.2016 16:44:13

#### High Band Edge Plot on Channel 39

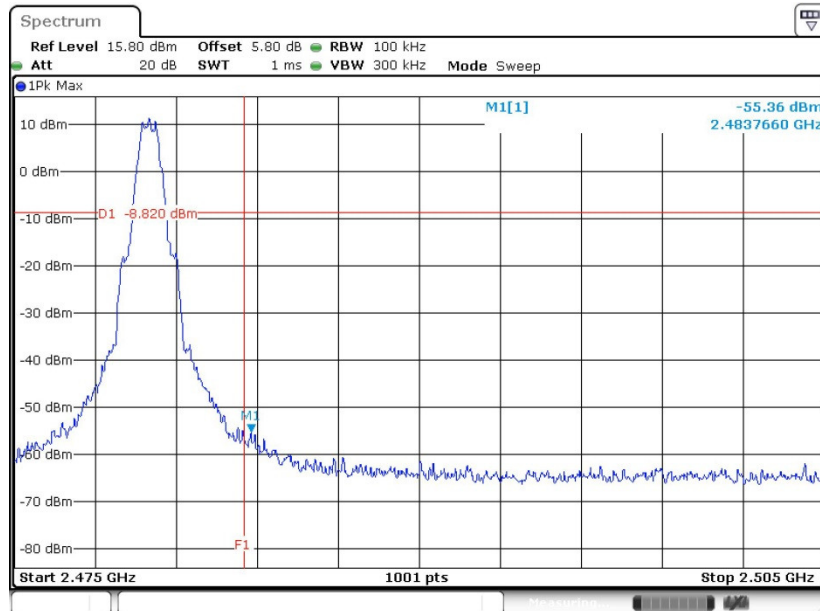


Date: 17.OCT.2016 16:49:03




Bluetooth v4.2 LE

Low Band Edge Plot on Channel 00

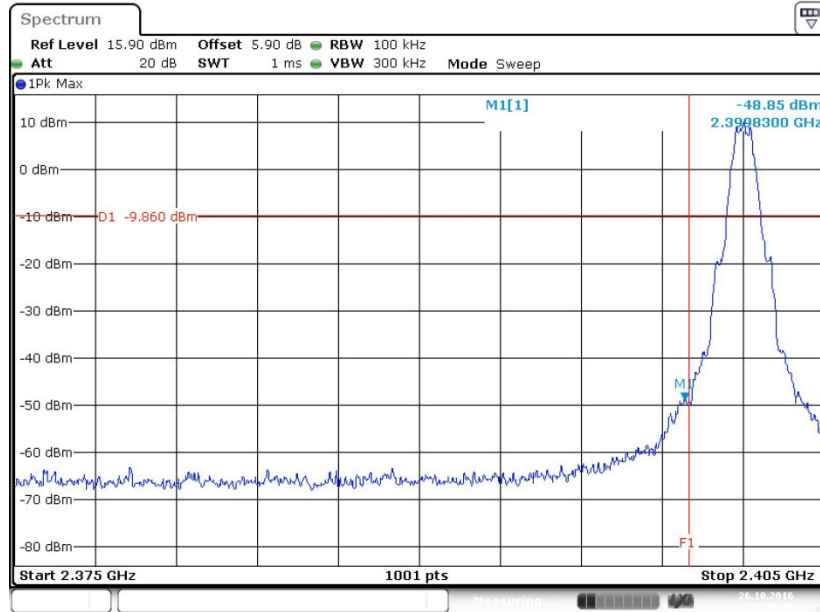

Date: 26.OCT.2016 23:16:15

High Band Edge Plot on Channel 39

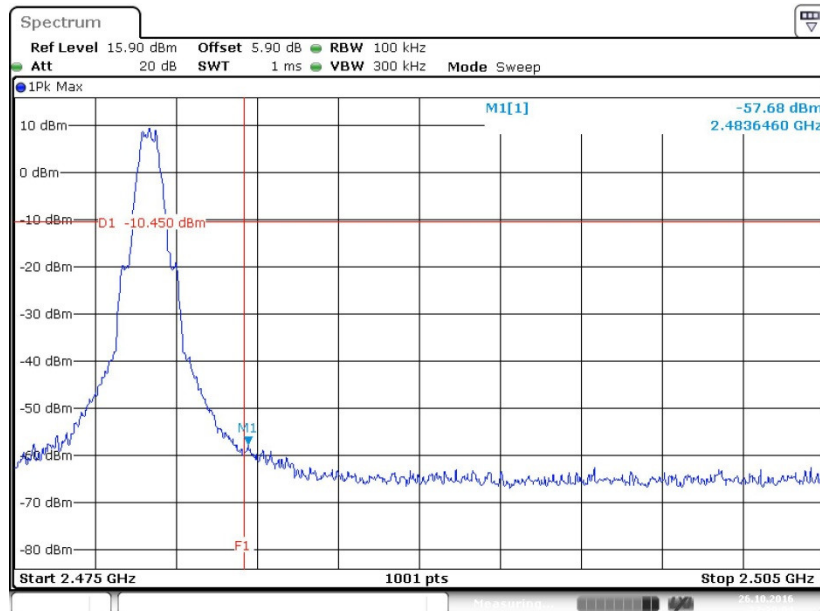


Date: 26.OCT.2016 23:39:04



### 3.4.6 Test Result of Conducted Spurious Emission Plots


Bluetooth v4.0 LE

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

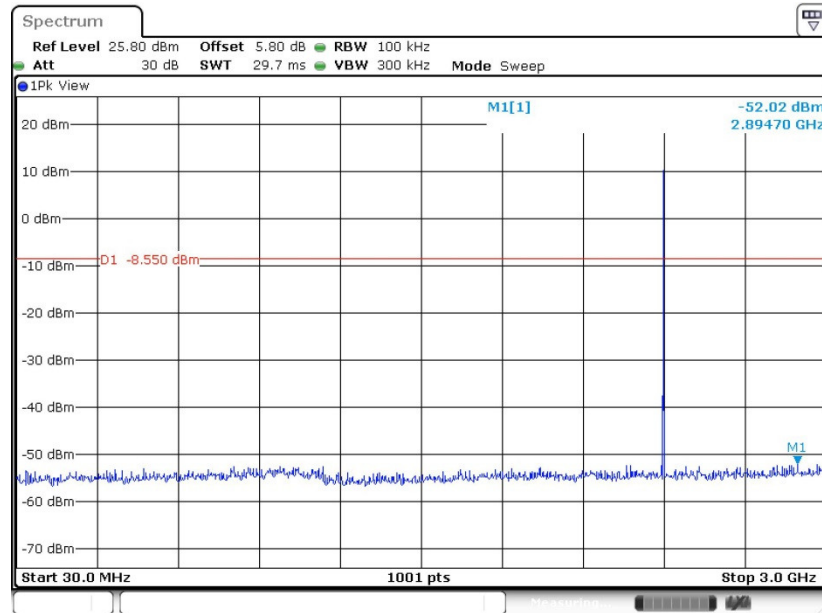

Date: 17.OCT.2016 16:44:23


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

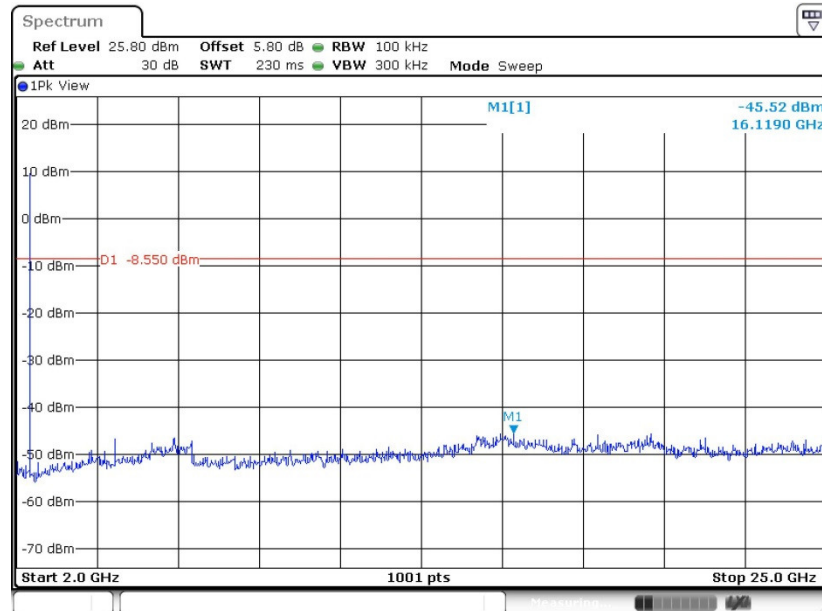

Date: 17.OCT.2016 16:44:32




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

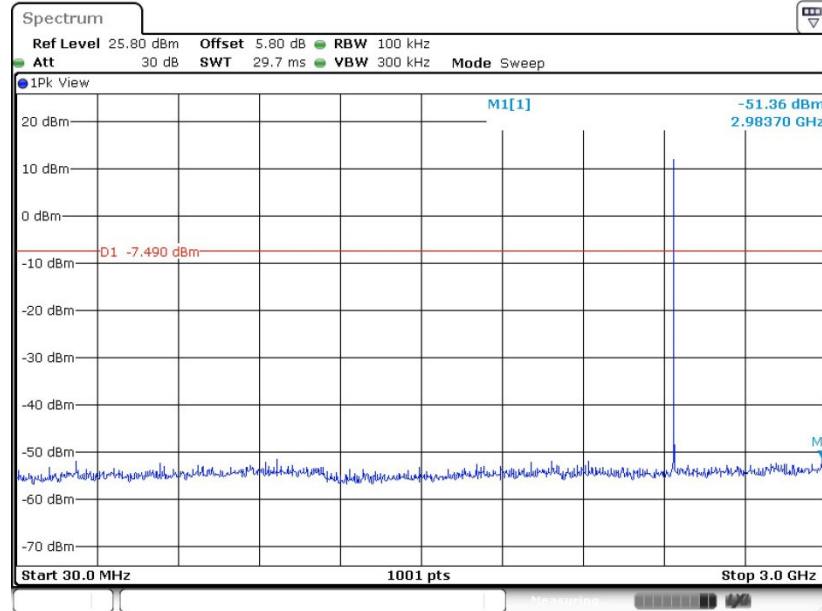

Date: 17.OCT.2016 16:46:33


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

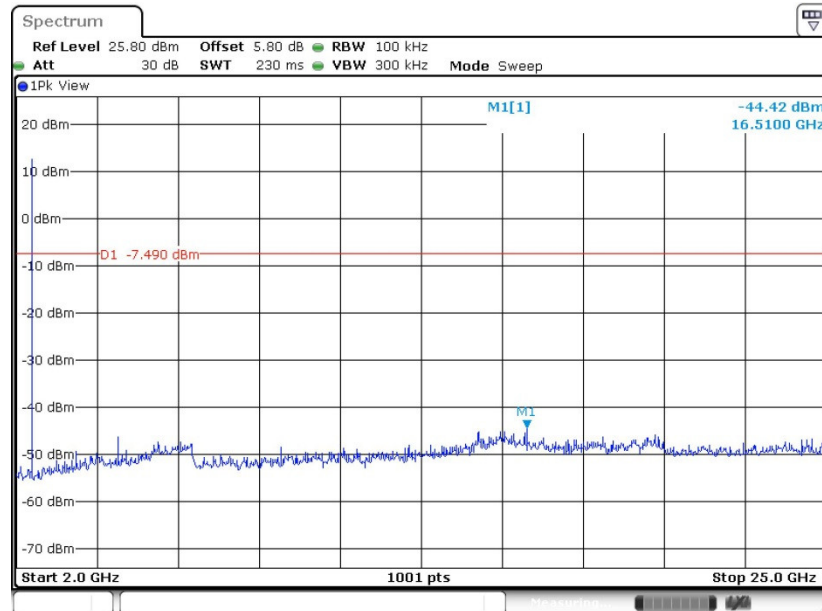

Date: 17.OCT.2016 16:46:42




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

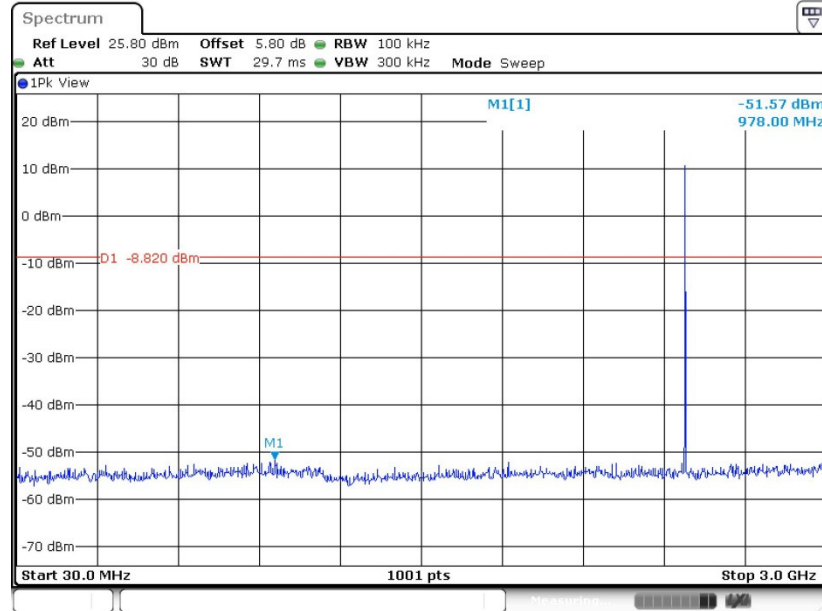

Date: 17.OCT.2016 16:49:14

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

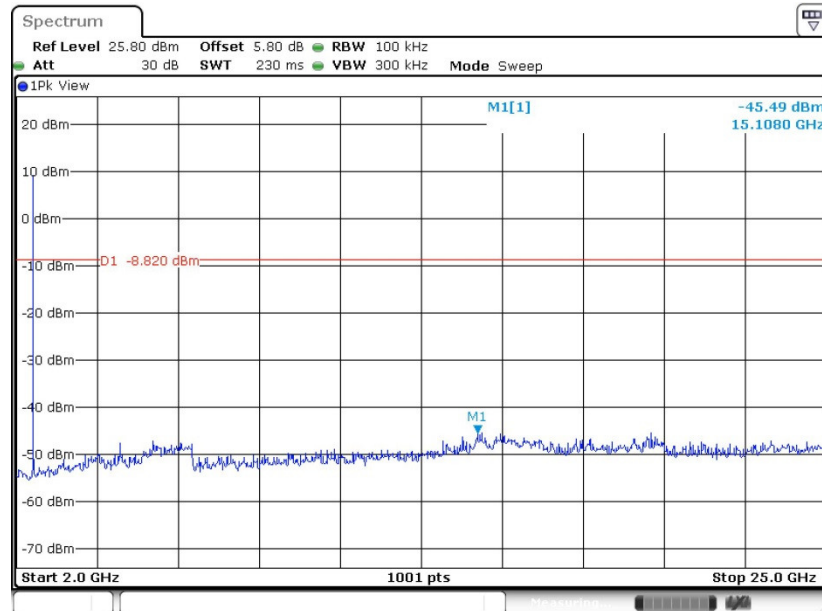


Date: 17.OCT.2016 16:49:22




Bluetooth v4.2 LE

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

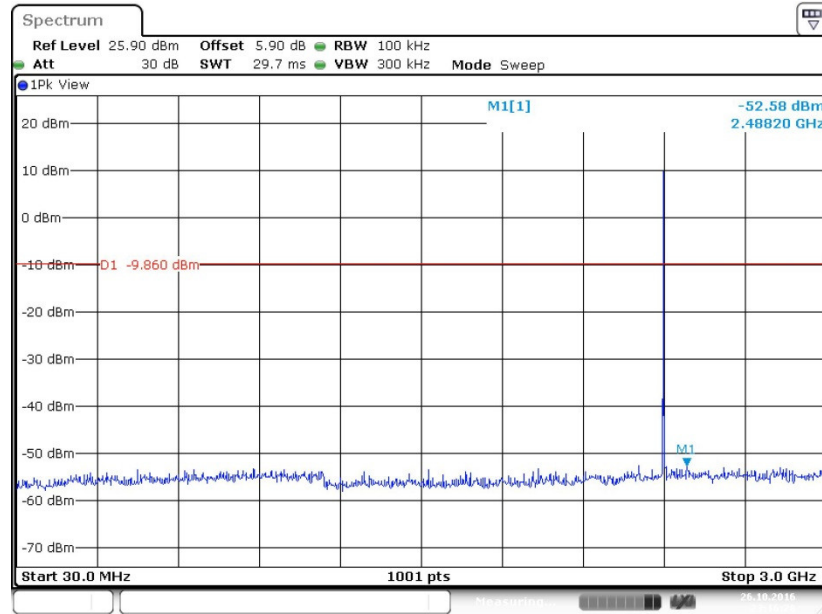


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

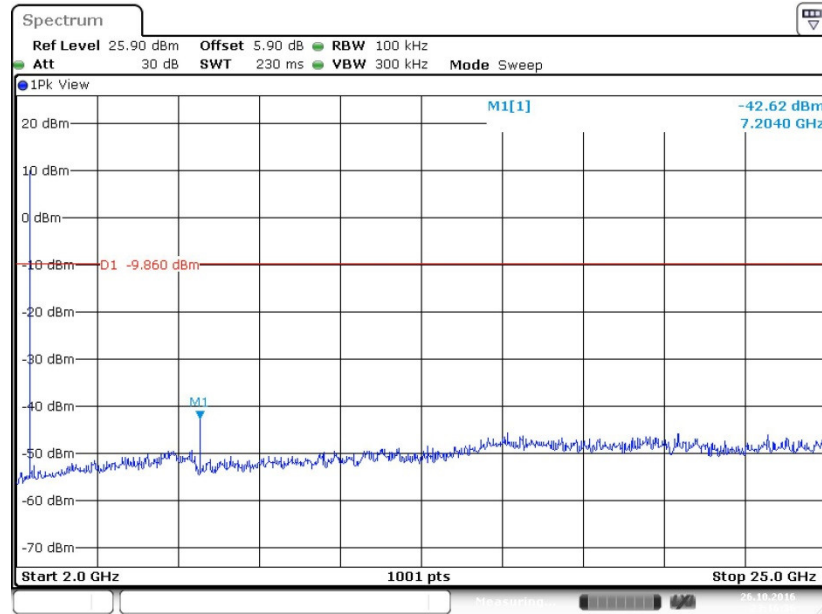




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

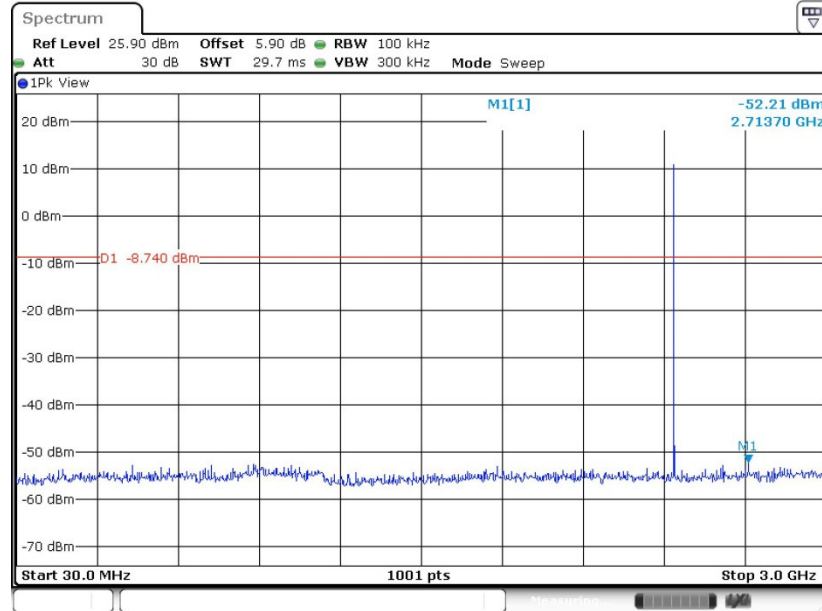

Date: 28.OCT.2016 11:04:38


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

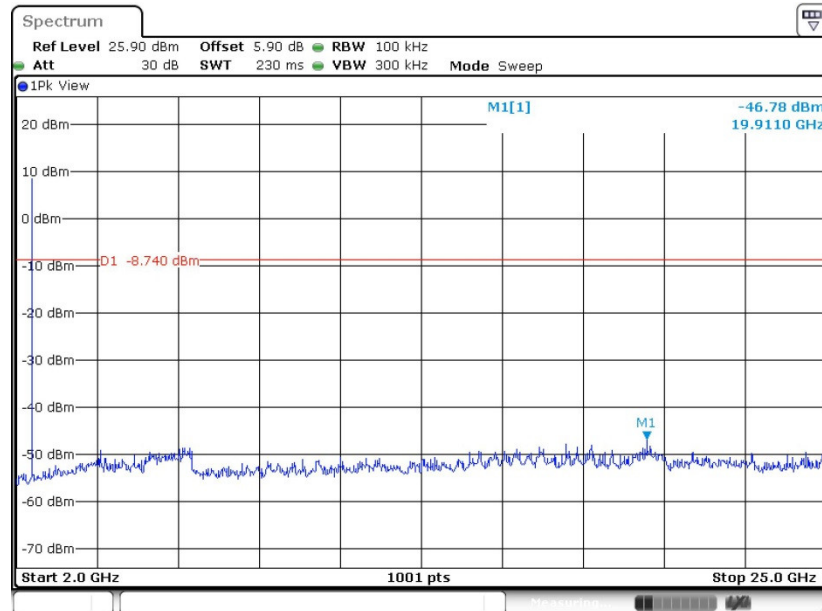


Date: 28.OCT.2016 11:04:47



### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

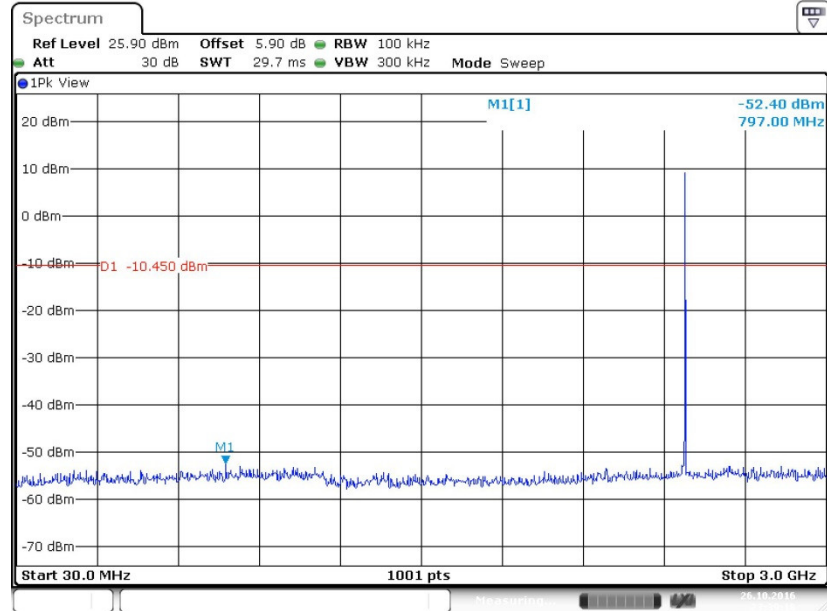

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

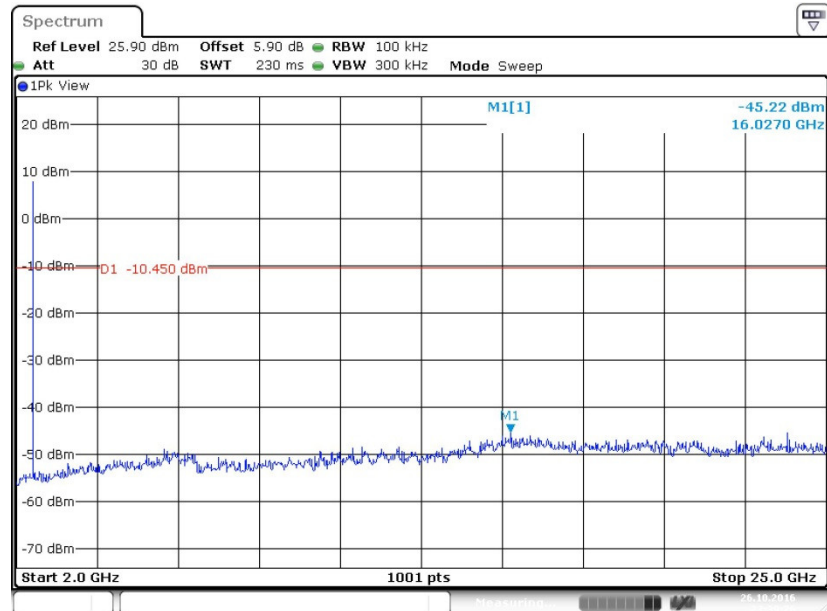



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

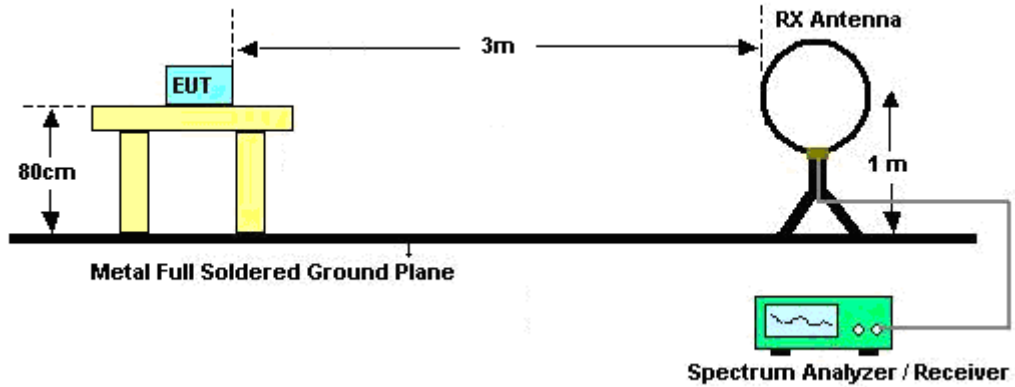

For radiated emissions from 30MHz to 1GHz

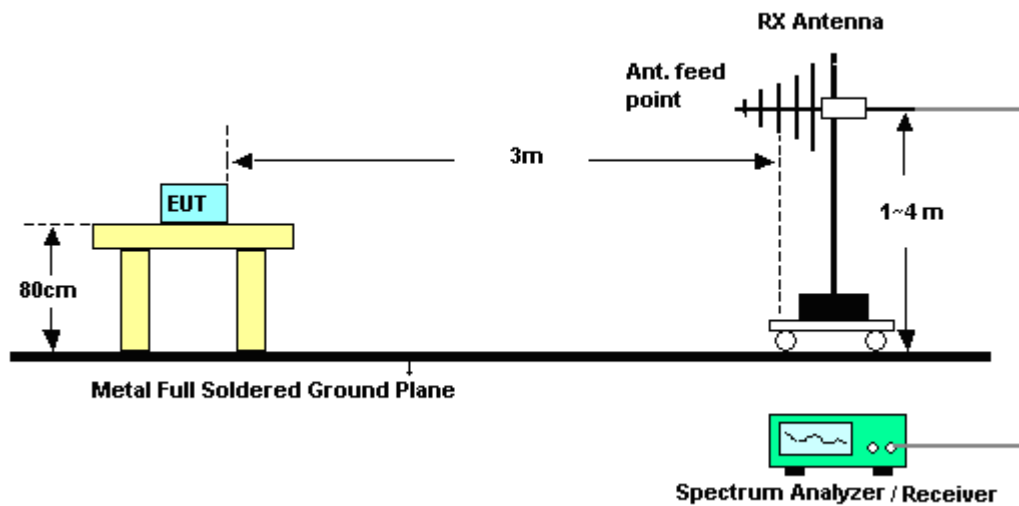

For radiated emissions above 1GHz

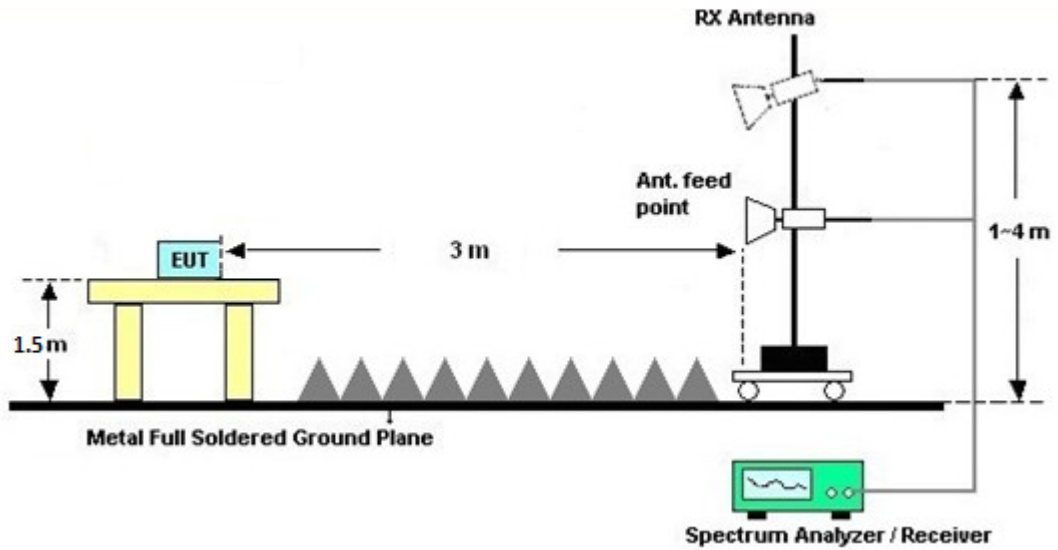

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.6.4 Test Setup

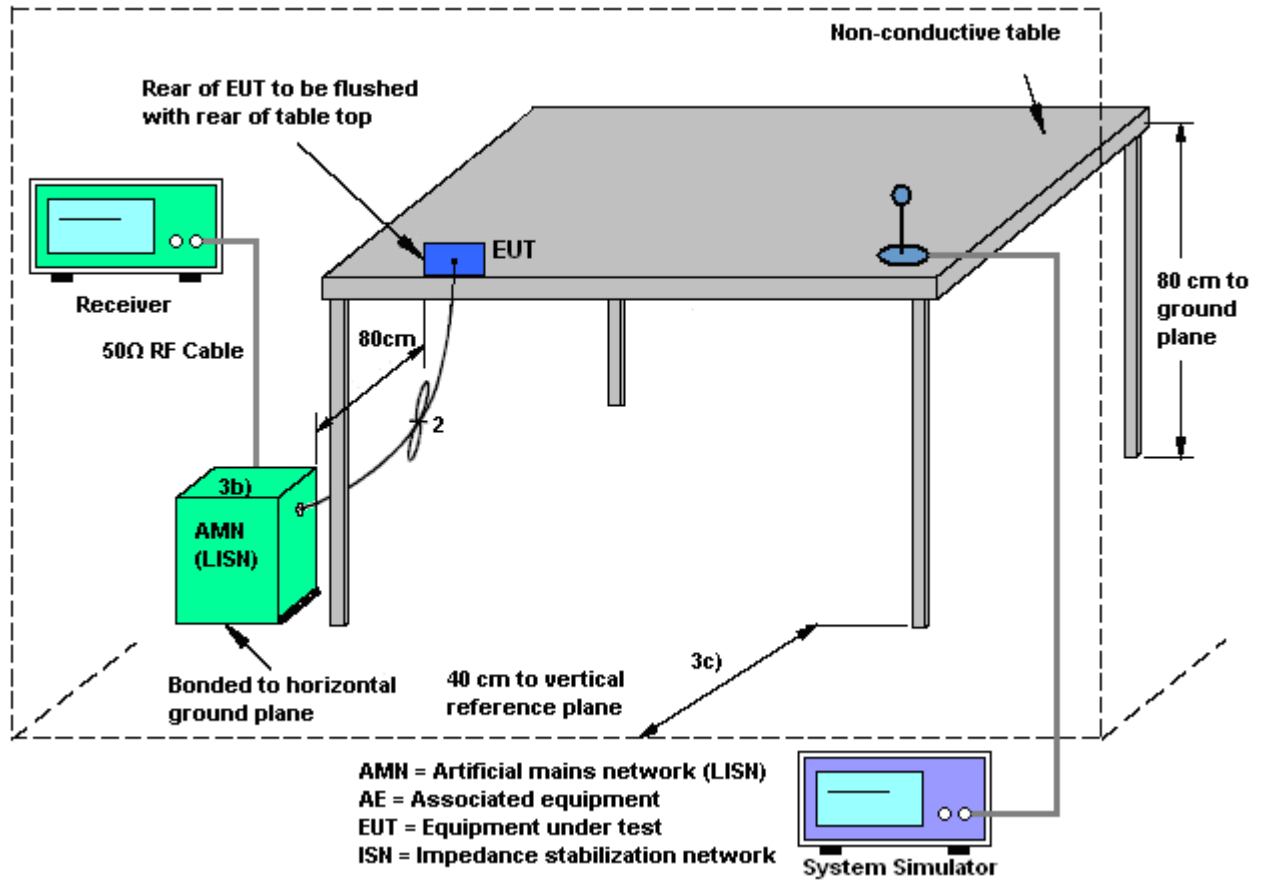



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter)		

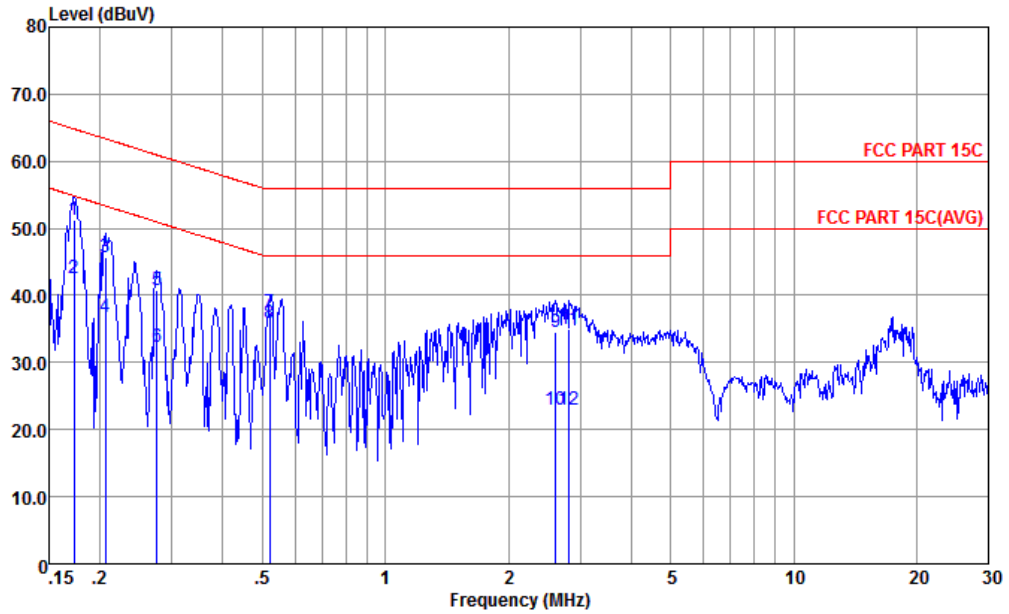


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1  
 : 351864080029238/351864080029246 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.173	51.34	-13.47	64.81	40.60	0.38	10.36	QP
2	0.173	42.64	-12.17	54.81	31.90	0.38	10.36	Average
3	0.206	45.75	-17.61	63.36	35.20	0.22	10.33	QP
4	0.206	36.75	-16.61	53.36	26.20	0.22	10.33	Average
5	0.276	40.69	-20.25	60.94	30.20	0.22	10.27	QP
6	0.276	32.39	-18.55	50.94	21.90	0.22	10.27	Average
7	0.521	37.52	-18.48	56.00	27.10	0.23	10.19	QP
8 *	0.521	35.92	-10.08	46.00	25.50	0.23	10.19	Average
9	2.608	34.59	-21.41	56.00	24.20	0.18	10.21	QP
10	2.608	22.99	-23.01	46.00	12.60	0.18	10.21	Average
11	2.824	35.00	-21.00	56.00	24.61	0.18	10.21	QP
12	2.824	22.90	-23.10	46.00	12.51	0.18	10.21	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~47%%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + Earphone + USB Cable (Charging from Adapter)		

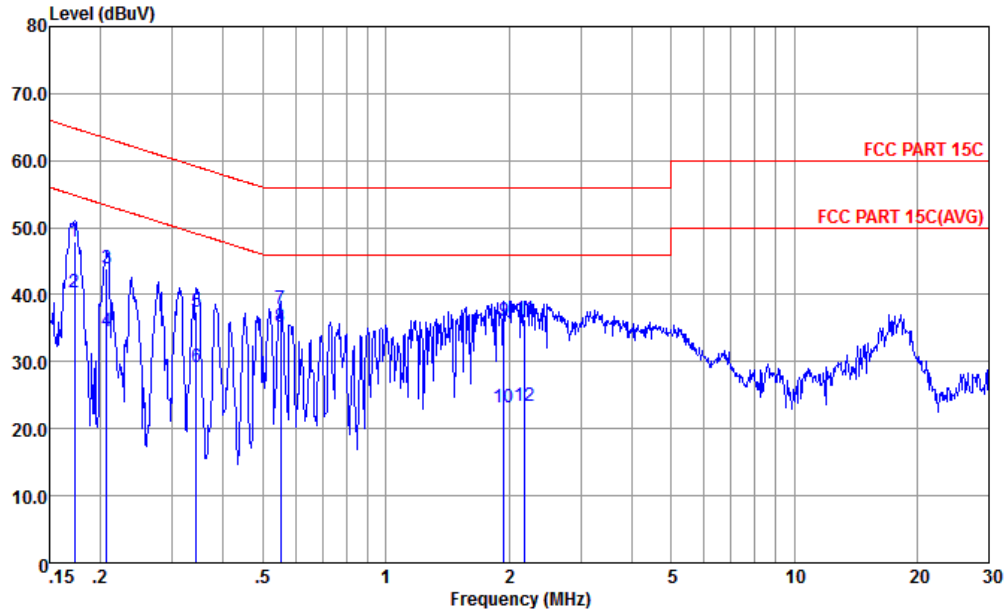

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL  
 mode : Mode 1  
 : 351864080029238/351864080029246 #4

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV		dB	dBuV	dBuV	dB	dB
1	0.173	47.97	-16.84	64.81	37.31	0.30	10.36	QP
2	0.173	40.27	-14.54	54.81	29.61	0.30	10.36	Average
3	0.207	43.94	-19.38	63.32	33.30	0.31	10.33	QP
4	0.207	34.54	-18.78	53.32	23.90	0.31	10.33	Average
5	0.343	37.44	-21.69	59.13	26.89	0.32	10.23	QP
6	0.343	29.14	-19.99	49.13	18.59	0.32	10.23	Average
7	0.552	37.81	-18.19	56.00	27.30	0.33	10.18	QP
8 *	0.552	35.11	-10.89	46.00	24.60	0.33	10.18	Average
9	1.949	36.07	-19.93	56.00	25.50	0.38	10.19	QP
10	1.949	23.07	-22.93	46.00	12.50	0.38	10.19	Average
11	2.190	36.37	-19.63	56.00	25.80	0.38	10.19	QP
12	2.190	23.47	-22.53	46.00	12.90	0.38	10.19	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Oct. 17, 2016~ Oct. 28, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Oct. 17, 2016~ Oct. 28, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Oct. 17, 2016~ Oct. 28, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 24, 2015	Oct. 08, 2016~ Oct. 21, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY5515024 4	10Hz~44GHz	Apr. 22, 2016	Oct. 08, 2016~ Oct. 21, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Oct. 08, 2016~ Oct. 21, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Oct. 08, 2016~ Oct. 21, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Oct. 08, 2016~ Oct. 21, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA17024 9	15GHz~40GHz	Mar. 03, 2016	Oct. 08, 2016~ Oct. 21, 2016	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Oct. 08, 2016~ Oct. 21, 2016	Aug. 08, 2017	Radiation (03CH03-KS)
High Gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	1943529	1GHz~18GHz	Jan. 20, 2016	Oct. 08, 2016~ Oct. 21, 2016	Jan. 19, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Oct. 08, 2016~ Oct. 21, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 08, 2016~ Oct. 21, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 08, 2016~ Oct. 21, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 08, 2016~ Oct. 21, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 29, 2016	Oct. 11, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Oct. 11, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Oct. 11, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000 811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Oct. 11, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6dB
---	-------



## **Appendix A. Conducted Test Results**

**Bluetooth v4.0 Low Energy**

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	2016/10/17 ~ 2016/10/28	Relative Humidity:	54~55	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.07	0.75	0.50	Pass
BLE	1Mbps	1	19	2440	1.07	0.74	0.50	Pass
BLE	1Mbps	1	39	2480	1.07	0.73	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	11.06	30.00	-1.55	9.51	36.00	Pass
BLE	1Mbps	1	19	2440	12.20	30.00	-1.55	10.65	36.00	Pass
BLE	1Mbps	1	39	2480	11.15	30.00	-1.55	9.60	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.03	10.84
BLE	1Mbps	1	19	2440	2.03	11.88
BLE	1Mbps	1	39	2480	2.03	11.04

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	11.45	-4.39	-1.55	8.00	Pass
BLE	1Mbps	1	19	2440	12.51	-3.55	-1.55	8.00	Pass
BLE	1Mbps	1	39	2480	11.18	-4.72	-1.55	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Bluetooth v4.2 Low Energy**

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	2016/10/17 ~ 2016/10/28	Relative Humidity:	54~55	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.07	0.73	0.50	Pass
BLE	1Mbps	1	19	2440	1.07	0.72	0.50	Pass
BLE	1Mbps	1	39	2480	1.07	0.72	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	10.22	30.00	-1.55	8.67	36.00	Pass
BLE	1Mbps	1	19	2440	11.98	30.00	-1.55	10.43	36.00	Pass
BLE	1Mbps	1	39	2480	10.01	30.00	-1.55	8.46	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	3.27	10.06
BLE	1Mbps	1	19	2440	3.27	11.83
BLE	1Mbps	1	39	2480	3.27	9.85

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	10.14	-5.24	-1.55	8.00	Pass
BLE	1Mbps	1	19	2440	11.26	-4.35	-1.55	8.00	Pass
BLE	1Mbps	1	39	2480	9.55	-6.20	-1.55	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



# Appendix B. Radiated Spurious Emission

Bluetooth v4.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2345.62	50.43	-23.57	74	55.17	26.86	5.41	37.01	116	135	P	H
		2387.48	40.85	-13.15	54	45.4	27	5.47	37.02	116	135	A	H
	*	2402	102.86	-	-	107.41	27	5.47	37.02	116	135	P	H
	*	2402	102.18	-	-	106.73	27	5.47	37.02	116	135	A	H
		2361.48	51.68	-22.32	74	56.36	26.91	5.43	37.02	334	105	P	V
		2340.16	40.77	-13.23	54	45.51	26.86	5.41	37.01	334	105	A	V
	*	2402	98.74	-	-	103.29	27	5.47	37.02	334	105	P	V
	*	2402	98.1	-	-	102.65	27	5.47	37.02	334	105	A	V
BLE CH 19 2440MHz		2386.44	51.02	-22.98	74	55.57	27	5.47	37.02	100	134	P	H
		2332.23	40.7	-13.3	54	45.5	26.82	5.39	37.01	100	134	A	H
		2483.98	51.25	-22.75	74	55.04	27.64	5.51	36.94	100	134	P	H
		2486.92	41.72	-12.28	54	45.51	27.64	5.51	36.94	100	134	A	H
	*	2440	106.48	-	-	110.57	27.39	5.49	36.97	100	134	P	H
	*	2440	105.85	-	-	109.94	27.39	5.49	36.97	100	134	A	H
		2329.37	50.82	-23.18	74	55.62	26.82	5.39	37.01	300	45	P	V
		2388.78	40.78	-13.22	54	45.33	27	5.47	37.02	300	45	A	V
		2492.14	52.39	-21.61	74	56.03	27.77	5.52	36.93	300	45	P	V
		2488.18	41.67	-12.33	54	45.31	27.77	5.52	36.93	300	45	A	V
	*	2440	102.77	-	-	106.86	27.39	5.49	36.97	300	45	P	V
	*	2440	102.14	-	-	106.23	27.39	5.49	36.97	300	45	A	V



<b>BLE CH 39 2480MHz</b>		2483.68	56.32	-17.68	74	60.11	27.64	5.51	36.94	100	143	P	H
		2483.5	48.12	-5.88	54	51.91	27.64	5.51	36.94	100	143	A	H
	*	2480	105.02	-	-	108.81	27.64	5.51	36.94	100	143	P	H
	*	2480	104.42	-	-	108.21	27.64	5.51	36.94	100	143	A	H
		2483.56	53.16	-20.84	74	56.95	27.64	5.51	36.94	325	110	P	V
		2483.5	46.11	-7.89	54	49.9	27.64	5.51	36.94	325	110	A	V
	*	2480	102.56	-	-	106.35	27.64	5.51	36.94	325	110	P	V
	*	2480	101.87	-	-	105.66	27.64	5.51	36.94	325	110	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4806	43.5	-30.5	74	41	31.48	7.71	36.69	100	360	P	H
		4806	41.78	-32.22	74	39.28	31.48	7.71	36.69	100	360	P	V
BLE CH 19 2440MHz		4878	42.22	-31.78	74	39.53	31.59	7.76	36.66	100	360	P	H
		7320	45.43	-28.57	74	38.28	34.08	9.78	36.71	100	360	P	H
		4878	42.58	-31.42	74	39.89	31.59	7.76	36.66	100	360	P	V
		7320	46.98	-27.02	74	39.83	34.08	9.78	36.71	100	360	P	V
BLE CH 39 2480MHz		4962	43.19	-30.81	74	40.28	31.72	7.82	36.63	100	360	P	H
		7440	45.99	-28.01	74	38.45	34.44	9.87	36.77	100	360	P	H
		4962	42.1	-31.9	74	39.19	31.72	7.82	36.63	100	360	P	V
		7440	46.71	-27.29	74	39.17	34.44	9.87	36.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE LF		31.94	27.16	-12.84	40	31.26	26.52	0.68	31.3	-	-	P	H
		44.55	27.29	-12.71	40	38.43	19.45	0.83	31.42	-	-	P	H
		65.89	24.07	-15.93	40	41.2	13.38	0.98	31.49	-	-	P	H
		80.44	28.5	-11.5	40	43.23	15.67	1.09	31.49	100	225	P	H
		160.95	24.19	-19.31	43.5	36.75	17.45	1.53	31.54	-	-	P	H
		732.28	29.2	-16.8	46	29.8	27.04	3.43	31.07	-	-	P	H
		30	34.2	-5.8	40	37.62	27.2	0.65	31.27	-	-	P	V
		63.95	33.96	-6.04	40	51.24	13.24	0.95	31.47	-	-	P	V
		66.86	34.30	-5.70	40	51.35	13.46	0.98	31.49	100	325	P	V
		72.68	33.28	-6.72	40	49.35	14.42	1.03	31.52	-	-	P	V
		216.24	22.44	-23.56	46	35.96	16.23	1.73	31.48	-	-	P	V
	420.91	25.18	-20.82	46	29.74	24.15	2.54	31.25	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Bluetooth v4.2 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2386.31	50.25	-23.75	74	54.8	27	5.47	37.02	344	49	P	H
		2364.86	41.95	-12.05	54	46.63	26.91	5.43	37.02	344	49	A	H
	*	2402	104.09	-	-	108.64	27	5.47	37.02	344	49	P	H
	*	2402	103.67	-	-	108.22	27	5.47	37.02	344	49	A	H
		2329.5	50.35	-23.65	74	55.15	26.82	5.39	37.01	207	35	P	V
		2365.77	41.84	-12.16	54	46.52	26.91	5.43	37.02	207	35	A	V
	*	2402	106.54	-	-	111.09	27	5.47	37.02	207	35	P	V
	*	2402	106.09	-	-	110.64	27	5.47	37.02	207	35	A	V
BLE CH 19 2440MHz		2385.14	50.64	-23.36	74	55.26	26.95	5.45	37.02	100	134	P	H
		2385.27	41.87	-12.13	54	46.49	26.95	5.45	37.02	100	134	A	H
		2493.82	50.9	-23.1	74	54.54	27.77	5.52	36.93	100	134	P	H
		2497.24	42.63	-11.37	54	46.27	27.77	5.52	36.93	100	134	A	H
	*	2440	99.7	-	-	103.79	27.39	5.49	36.97	100	134	P	H
	*	2440	98.59	-	-	102.68	27.39	5.49	36.97	100	134	A	H
		2341.07	50.55	-23.45	74	55.29	26.86	5.41	37.01	300	44	P	V
		2386.44	42.12	-11.88	54	46.67	27	5.47	37.02	300	44	A	V
		2491.72	51.61	-22.39	74	55.25	27.77	5.52	36.93	300	44	P	V
		2487.64	42.85	-11.15	54	46.49	27.77	5.52	36.93	300	44	A	V
	*	2440	105.29	-	-	109.38	27.39	5.49	36.97	300	44	P	V
	*	2440	104.87	-	-	108.96	27.39	5.49	36.97	300	44	A	V



<b>BLE CH 39 2480MHz</b>		2483.5	54.21	-19.79	74	58	27.64	5.51	36.94	100	37	P	H
		2483.5	46	-8	54	49.79	27.64	5.51	36.94	100	37	A	H
	*	2480	101.72	-	-	105.51	27.64	5.51	36.94	100	37	P	H
	*	2480	101.3	-	-	105.09	27.64	5.51	36.94	100	37	A	H
		2483.5	56.43	-17.57	74	60.22	27.64	5.51	36.94	259	350	P	V
		2483.5	48.06	-5.94	54	51.85	27.64	5.51	36.94	259	350	A	V
	*	2480	105.35	-	-	109.14	27.64	5.51	36.94	259	350	P	V
	*	2480	104.8	-	-	108.59	27.64	5.51	36.94	259	350	A	V
<b>Remark</b>	<p>3. No other spurious found.</p> <p>4. All results are PASS against Peak and Average limit line.</p>												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4806	41.66	-32.34	74	39.16	31.48	7.71	36.69	100	360	P	H
		4806	43.16	-30.84	74	40.66	31.48	7.71	36.69	100	360	P	V
BLE CH 19 2440MHz		4878	42.78	-31.22	74	40.09	31.59	7.76	36.66	100	360	P	H
		7320	45.3	-28.7	74	38.15	34.08	9.78	36.71	100	360	P	H
		4878	43.5	-30.5	74	40.81	31.59	7.76	36.66	100	360	P	V
		7320	44.99	-29.01	74	37.84	34.08	9.78	36.71	100	360	P	V
BLE CH 39 2480MHz		4962	42.93	-31.07	74	40.02	31.72	7.82	36.63	100	360	P	H
		7440	46.12	-27.88	74	38.58	34.44	9.87	36.77	100	360	P	H
		4962	43.11	-30.89	74	40.2	31.72	7.82	36.63	100	360	P	V
		7440	46.86	-27.14	74	39.32	34.44	9.87	36.77	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE LF		32.91	29.16	-10.84	40	33.61	26.18	0.69	31.32	100	0	P	H
		81.41	27.61	-12.39	40	42.09	15.93	1.1	31.51	-	-	P	H
		160.95	26.19	-17.31	43.5	38.75	17.45	1.53	31.54	-	-	P	H
		216.24	22.4	-23.6	46	35.92	16.23	1.73	31.48	-	-	P	H
		323.91	27.88	-18.12	46	36.84	20.13	2.21	31.3	-	-	P	H
		920.46	29.44	-16.56	46	27.44	28.9	3.9	30.8	-	-	P	H
		31.94	32.16	-7.84	40	36.26	26.52	0.68	31.3	-	-	P	V
		72.68	34.28	-5.72	40	50.35	14.42	1.03	31.52	100	0	P	V
		216.24	25.44	-20.56	46	38.96	16.23	1.73	31.48	-	-	P	V
		323.91	27.12	-18.88	46	36.08	20.13	2.21	31.3	-	-	P	V
		739.07	26.57	-19.43	46	27.06	27.14	3.44	31.07	-	-	P	V
	956.35	28.89	-17.11	46	26.1	29.5	3.99	30.7	-	-	P	V	
Remark	3. No other spurious found. 4. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	62.59	0.39	2.55	3kHz
Bluetooth v4.2 LE	47.13	0.30	3.38	10kHz


### Bluetooth v4.0 LE

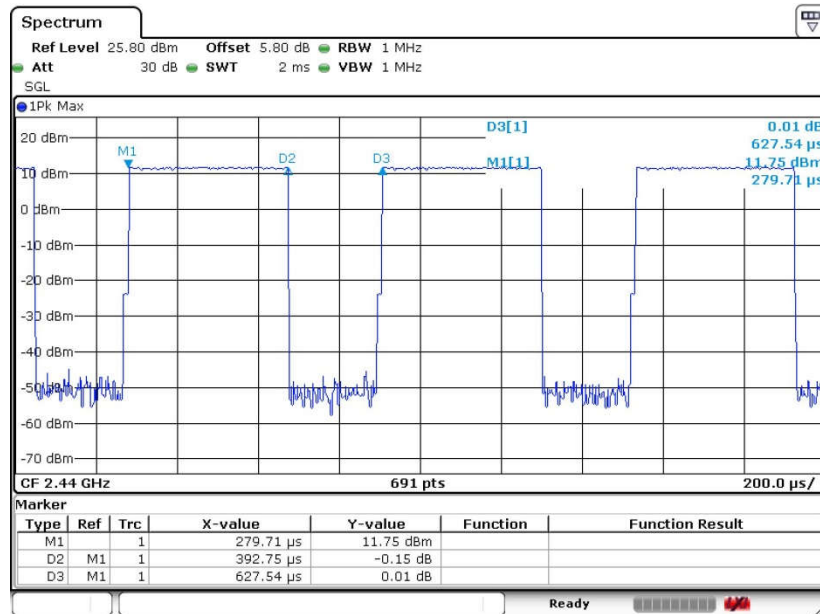

Date: 8.OCT.2016 23:35:04



Bluetooth v4.2 LE

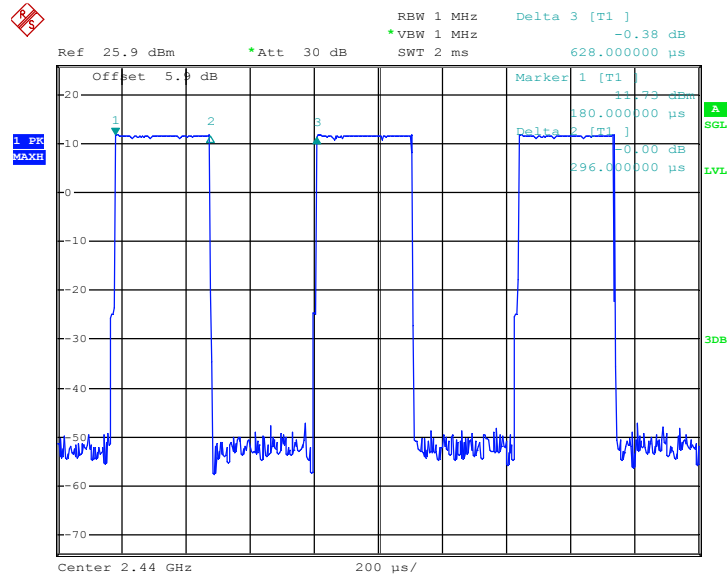

Date: 21.OCT.2016 07:06:35