



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10062 (Single SIM), 10060 (Dual SIM)
FCC ID : IHDT56WA4
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

This is a variant report which is only valid together with the original test report. The product was received on Feb. 03, 2017 and completely tested on Mar. 10, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards. The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56WA4

Page Number : 1 of 27

Report Issued Date : Mar. 20, 2017

Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.6



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT4
1 GENERAL DESCRIPTION5
1.1 Applicant5
1.2 Manufacturer5
1.3 Product Feature of Equipment Under Test.....5
1.4 Product Specification of Equipment Under Test.....7
1.5 Modification of EUT7
1.6 Emission Designator8
1.7 Testing Location9
1.8 Applicable Standards.....9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST10
2.1 Test Mode10
2.2 Connection Diagram of Test System12
2.3 Support Unit used in test configuration and system12
2.4 Measurement Results Explanation Example12
2.5 Frequency List of Low/Middle/High Channels13
3 CONDUCTED TEST ITEMS15
3.1 Measuring Instruments15
3.2 Test Setup15
3.3 Test Result of Conducted Test15
3.4 Conducted Output Power16
3.5 Peak-to-Average Ratio17
3.6 Occupied Bandwidth18
3.7 Conducted Band Edge19
3.8 Conducted Spurious Emission20
3.9 Frequency Stability21
4 RADIATED TEST ITEMS22
4.1 Measuring Instruments22
4.2 Test Setup22
4.3 Test Result of Radiated Test22
4.4 Effective Radiated Power and Effective Isotropic Radiated Power23
4.5 Radiated Spurious Emission25
5 LIST OF MEASURING EQUIPMENT26
6 UNCERTAINTY OF EVALUATION27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF ERP/EIRP AND RADIATED TEST
APPENDIX C. ORIGINAL REPORT



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 17) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 17) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§27.50(c)(10)	Effective Radiated Power (Band 12) (Band 17)	ERP < 3 Watt		
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt		
4.5	§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 17) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 22.76 dB at 10008.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10062 (Single SIM), 10060 (Dual SIM)
FCC ID	IHDT56WA4
IMEI Code	Conduction: IMEI 1 : 351889080006316 IMEI 2 : 351889080006324 Radiation: IMEI 1 : 351889080006456 IMEI 2 : 351889080006464
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC/FM WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report. Except conducted output power, LTE Band 2, and Band 5, FG720310-02B report reuses test data from the FG720310B report..



Accessory List	
AC Adapter 1	Brand Name : Motorola
	Model Name : SPN5970A
AC Adapter 2	Brand Name : Motorola
	Model Name : SPN5993A
AC Adapter 3	Brand Name : Motorola
	Model Name : SPN5978A
Battery 1	Brand Name : Motorola
	Model Name : SNN5983A
Battery 2	Brand Name : Motorola
	Model Name : SNN5985A
Earphone	Brand Name : Motorola
	Model Name : SH38C16618
USB Cable	Brand Name : Motorola
	Model Name : SKN6473A



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 66 : 1710.7 MHz ~ 1754.3 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 66 : 2110.7 MHz ~ 2154.3 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.97 dBm LTE Band 4 : 23.25 dBm LTE Band 5 : 23.05 dBm LTE Band 7 : 23.13 dBm LTE Band 12 : 22.90 dBm LTE Band 17 : 22.89 dBm LTE Band 66 : 23.64 dBm
Antenna Type	Coupling type (LDS) Antenna
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.2143	1M10W7D	-	0.1422
3	1851.5 ~ 1908.5	2M73G7D	-	0.2183	2M72W7D	-	0.1455
5	1852.5 ~ 1907.5	4M52G7D	-	0.2265	4M50W7D	-	0.1500
10	1855.0 ~ 1905.0	8M97G7D	0.0019	0.2612	9M05W7D	-	0.1422
15	1857.5 ~ 1902.5	13M4G7D	-	0.2296	13M5W7D	-	0.1349
20	1860.0 ~ 1900.0	18M5G7D	-	0.1954	18M5W7D	-	0.1321
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
10	1715.0 ~ 1750.0	-	-	0.2455	-	-	0.1637
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.1040	1M10W7D	-	0.0555
3	825.5 ~ 847.5	2M73G7D	-	0.1026	2M72W7D	-	0.0585
5	826.5 ~ 846.5	4M51G7D	-	0.1019	4M51W7D	-	0.0577
10	829.0 ~ 844.0	9M05G7D	0.0047	0.1033	9M01W7D	-	0.0570
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
10	2505.0 ~ 2565.0	-	-	0.1578	-	-	-
20	2510.0 ~ 2560.0	-	-	-	-	-	0.1202
LTE Band 12		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
3	700.5 ~ 714.5	-	-	-	-	-	0.0483
5	701.5 ~ 713.5	-	-	0.0800	-	-	-



LTE Band 17		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
10	709.0 ~ 711.0	-	-	0.0899	-	-	0.0483
LTE Band 66		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
10	1715 ~ 1775	-	-	0.2410	-	-	0.2032

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	17	-	-	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2						✓	✓	✓	✓		✓	✓	✓	✓
	5				✓	-	-	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓			✓	✓	✓	✓
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
Frequency Stability	2				✓			✓				✓		✓	
	5				✓	-	-	✓				✓		✓	
E.R.P./ E.I.R.P.	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4				✓			✓	✓	✓			✓		
	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	7	-	-		✓		✓	✓	✓	✓				✓	✓
	12		✓	✓				✓	✓	✓			✓		✓
	17	-	-		✓	-	-	✓	✓	✓				✓	✓
	66				✓			✓	✓	✓					✓



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	2	√	√	√	√	√	√	√		√			√	√	√
	4		√					√		√					√
	5	√	√	√	√	-	-	√		√			√	√	√
	7	-	-			√		√		√			√		
	12	√				-	-	√		√			√		
	17	-	-	√		-	-	√		√					√
	66			√				√		√					√
Note	<ol style="list-style-type: none"> The mark “√ “ means that this configuration is chosen for testing The mark “-“ means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performance with Adapter 1 and Battery 1. 														

2.2 Connection Diagram of Test System

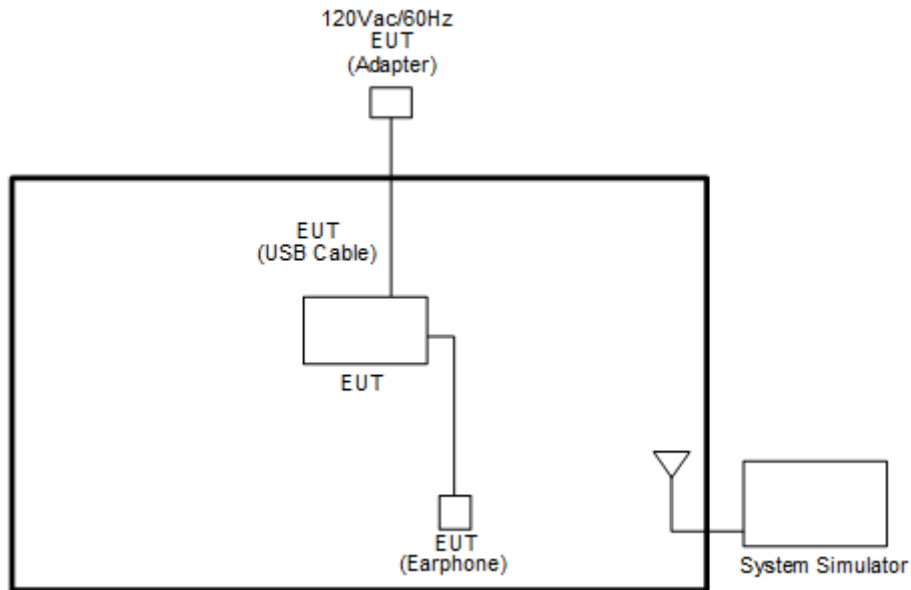

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20000	-	-
	Frequency	1715	-	-
3	Channel	-	-	20385
	Frequency	-	-	1753.5

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	-	21350
	Frequency	-	-	2560
15	Channel	20825	-	-
	Frequency	2507.5	-	-
10	Channel	-	-	21400
	Frequency	-	-	2565

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	23035	-	-
	Frequency	701.5	-	-
3	Channel	-	-	23165
	Frequency	-	-	714.5
1.4	Channel	23017	-	-
	Frequency	699.7	-	-

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23790	23800
	Frequency	-	710	711
5	Channel	-	-	23825
	Frequency	-	-	713.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	-	132622
	Frequency	-	-	1775
5	Channel	-	-	132647
	Frequency	-	-	1777.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

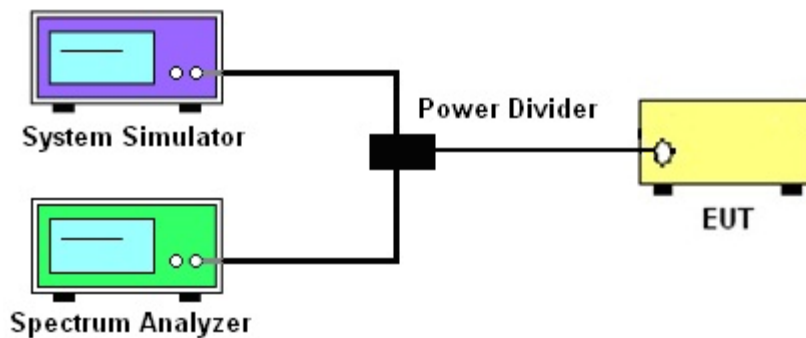

3.2.3 Frequency Stability

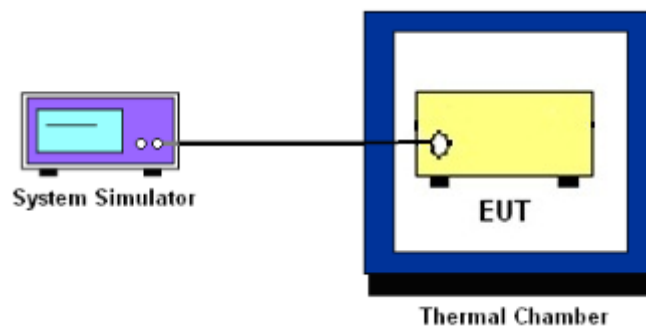

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

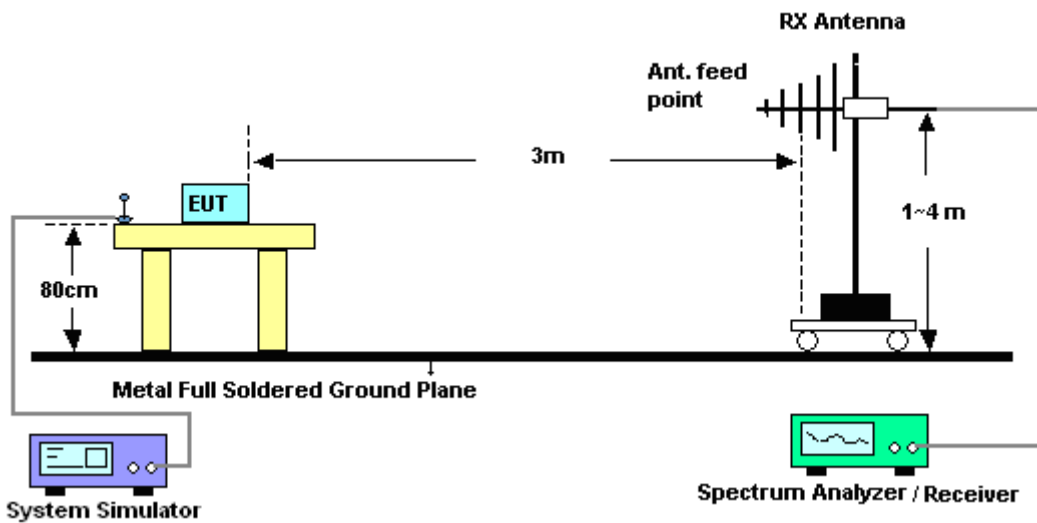

4.2.2 For radiated test above 1GHz

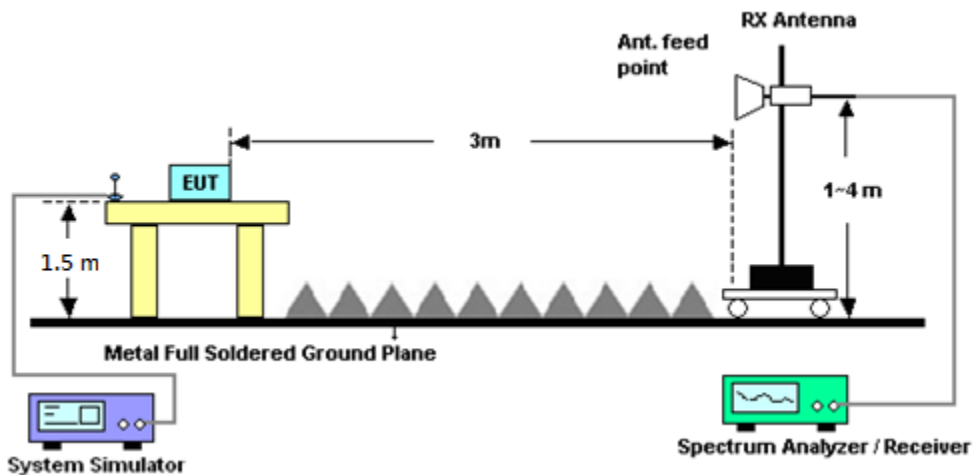

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5 and 3 watts with LTE band 12 / 17.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 7 and 1 watt with LTE band 4 / 66.

4.4.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100



4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 12,17

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

12. For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS	Oct. 11, 2016	Feb. 24, 2017	Oct. 10, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 04, 2016	Feb. 24, 2017	Nov. 03, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30 度~70 度	Sep. 01, 2016	Feb. 24, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 03, 2016	Feb. 24, 2017	Oct. 02, 2017	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&008	35419&03	30MHz to 1GHz	Jan. 07, 2017	Feb. 19, 2017 ~ Mar. 10, 2017	Jan. 06, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Aug. 18, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Oct. 26, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Oct. 25, 2017	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Feb. 19, 2017 ~ Mar. 10, 2017	Sep. 01, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-1	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Mar. 17, 2017	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 21, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Mar. 20, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Feb. 19, 2017 ~ Mar. 10, 2017	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Feb. 19, 2017 ~ Mar. 10, 2017	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Jun. 13, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Feb. 19, 2017 ~ Mar. 10, 2017	Nov. 07, 2017	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Feb. 19, 2017 ~ Mar. 10, 2017	Jan. 03, 2018	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7
---	-----

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.83	22.89	22.97
20	1	49		22.54	22.64	22.70
20	1	99		22.49	22.52	22.57
20	50	0		21.77	21.83	21.79
20	50	24		21.73	21.77	21.92
20	50	50		21.64	21.68	21.75
20	100	0		21.70	21.74	21.81
20	1	0	16-QAM	21.96	22.13	22.14
20	1	49		21.85	21.97	22.05
20	1	99		21.69	21.84	21.83
20	50	0		20.74	20.82	20.80
20	50	24		20.71	20.80	20.90
20	50	50		20.64	20.69	20.76
20	100	0		20.68	20.74	20.74
15	1	0	QPSK	22.82	22.71	22.70
15	1	37		22.51	22.55	22.47
15	1	74		22.83	22.89	22.90
15	36	0		21.74	21.79	21.81
15	36	20		21.70	21.79	21.85
15	36	39		21.67	21.79	21.78
15	75	0		21.70	21.78	21.85
15	1	0	16-QAM	22.05	22.16	22.05
15	1	37		21.87	21.92	22.04
15	1	74		22.06	22.16	22.16
15	36	0		20.72	20.76	20.81
15	36	20		20.72	20.78	20.84
15	36	39		20.68	20.78	20.78
15	75	0		20.68	20.76	20.86



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.59	22.61	22.67
10	1	25		22.61	22.70	22.76
10	1	49		22.74	22.85	22.87
10	25	0		21.68	21.76	21.87
10	25	12		21.68	21.75	21.82
10	25	25		21.66	21.77	21.86
10	50	0		21.68	21.78	21.81
10	1	0	16-QAM	21.99	22.10	22.20
10	1	25		21.87	21.94	22.06
10	1	49		21.98	22.09	22.15
10	25	0		20.68	20.79	20.84
10	25	12		20.68	20.75	20.83
10	25	25		20.64	20.76	20.81
10	50	0		20.66	20.76	20.82
5	1	0	QPSK	22.48	22.51	22.56
5	1	12		22.56	22.60	22.72
5	1	24		22.62	22.69	22.77
5	12	0		21.67	21.86	21.94
5	12	7		21.68	21.74	21.84
5	12	13		21.66	21.72	21.83
5	25	0		21.64	21.78	21.87
5	1	0	16-QAM	21.88	22.08	22.18
5	1	12		21.81	21.96	22.00
5	1	24		21.85	22.00	22.02
5	12	0		20.76	20.85	20.98
5	12	7		20.70	20.83	20.85
5	12	13		20.67	20.73	20.85
5	25	0		20.67	20.79	20.88



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.36	22.45	22.47
3	1	8		22.60	22.72	22.76
3	1	14		22.59	22.70	22.73
3	8	0		21.67	21.81	21.84
3	8	4		21.65	21.79	21.88
3	8	7		21.65	21.70	21.83
3	15	0		21.63	21.76	21.84
3	1	0	16-QAM	21.86	21.99	22.09
3	1	8		21.85	21.95	22.06
3	1	14		21.80	21.96	21.97
3	8	0		20.70	20.81	20.93
3	8	4		20.72	20.83	20.91
3	8	7		20.69	20.78	20.88
3	15	0		20.65	20.80	20.85
1.4	1	0	QPSK	22.52	22.38	22.40
1.4	1	3		22.61	22.71	22.80
1.4	1	5		22.52	22.61	22.71
1.4	3	0		22.59	22.68	22.74
1.4	3	1		22.62	22.72	22.77
1.4	3	3		22.57	22.66	22.71
1.4	6	0		21.61	21.75	21.83
1.4	1	0	16-QAM	21.78	21.94	21.97
1.4	1	3		21.85	22.02	22.07
1.4	1	5		21.78	21.93	22.07
1.4	3	0		21.58	21.73	21.77
1.4	3	1		21.63	21.76	21.81
1.4	3	3		21.58	21.69	21.75
1.4	6	0		20.72	20.80	20.88



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.71	22.78	22.76
20	1	49		22.65	22.74	22.65
20	1	99		22.63	22.70	22.72
20	50	0		21.84	21.88	21.77
20	50	24		21.80	21.85	21.89
20	50	50		21.73	21.71	21.79
20	100	0		21.78	21.82	21.77
20	1	0	16-QAM	22.07	21.94	21.98
20	1	49		21.96	21.90	22.01
20	1	99		21.88	21.93	22.08
20	50	0		20.89	20.74	20.79
20	50	24		20.81	20.72	20.89
20	50	50		20.76	20.70	20.77
20	100	0		20.85	20.67	20.75
15	1	0	QPSK	22.95	23.00	22.98
15	1	37		22.73	22.60	22.50
15	1	74		22.67	22.63	22.78
15	36	0		21.95	21.82	21.86
15	36	20		21.93	21.77	21.89
15	36	39		21.81	21.76	21.78
15	75	0		21.89	21.75	21.92
15	1	0	16-QAM	22.17	22.06	22.21
15	1	37		22.05	21.83	22.10
15	1	74		21.93	21.89	22.04
15	36	0		20.93	20.81	20.88
15	36	20		20.92	20.76	20.89
15	36	39		20.79	20.75	20.78
15	75	0		20.78	20.74	20.91



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.25	23.14	23.18
10	1	25		22.84	22.76	22.89
10	1	49		23.24	23.12	23.23
10	25	0		21.97	21.87	22.00
10	25	12		21.98	21.79	21.97
10	25	25		22.08	21.96	22.15
10	50	0		22.09	21.84	21.99
10	1	0	16-QAM	22.46	22.30	22.43
10	1	25		22.29	22.15	22.29
10	1	49		22.61	22.47	22.59
10	25	0		21.01	20.89	20.98
10	25	12		21.02	20.81	20.96
10	25	25		21.02	20.96	21.00
10	50	0		21.11	20.86	21.03
5	1	0	QPSK	23.06	22.96	22.99
5	1	12		22.79	22.71	22.87
5	1	24		22.82	22.75	22.85
5	12	0		22.02	21.87	21.97
5	12	7		21.90	21.76	21.97
5	12	13		21.90	21.76	21.97
5	25	0		21.90	21.82	22.03
5	1	0	16-QAM	22.28	22.13	22.23
5	1	12		22.07	21.91	22.15
5	1	24		22.08	22.01	22.07
5	12	0		21.05	20.87	20.97
5	12	7		20.96	20.79	21.02
5	12	13		20.96	20.76	20.98
5	25	0		20.95	20.81	20.99



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.96	22.84	22.81
3	1	8		22.81	22.74	22.90
3	1	14		22.75	22.64	22.84
3	8	0		21.95	21.76	21.96
3	8	4		21.92	21.76	21.99
3	8	7		21.93	21.71	21.93
3	15	0		21.86	21.74	21.97
3	1	0	16-QAM	22.17	21.97	22.19
3	1	8		22.10	21.97	22.22
3	1	14		22.04	21.84	22.08
3	8	0		21.04	20.83	21.03
3	8	4		20.99	20.81	21.03
3	8	7		21.00	20.79	21.01
3	15	0		20.94	20.78	20.98
1.4	1	0	QPSK	22.86	22.72	22.91
1.4	1	3		22.82	22.72	22.94
1.4	1	5		22.76	22.63	22.81
1.4	3	0		22.85	22.67	22.89
1.4	3	1		22.79	22.71	22.92
1.4	3	3		22.76	22.67	22.83
1.4	6	0		21.85	21.69	21.90
1.4	1	0	16-QAM	22.13	21.89	22.08
1.4	1	3		22.08	21.95	22.13
1.4	1	5		21.99	21.87	22.06
1.4	3	0		21.92	21.73	21.91
1.4	3	1		21.92	21.74	21.95
1.4	3	3		21.87	21.66	21.85
1.4	6	0		20.90	20.80	20.94



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.85	22.98	22.94
10	1	25		22.67	22.81	22.80
10	1	49		23.04	23.05	23.00
10	25	0		21.70	21.84	21.78
10	25	12		21.72	21.84	21.86
10	25	25		21.90	21.92	21.89
10	50	0		21.76	21.94	21.79
10	1	0	16-QAM	22.03	22.25	22.21
10	1	25		21.99	22.08	22.02
10	1	49		22.36	22.45	22.22
10	25	0		20.74	20.95	20.77
10	25	12		20.71	20.94	20.84
10	25	25		20.87	20.93	20.90
10	50	0		20.74	20.88	20.78
5	1	0	QPSK	22.67	22.79	22.83
5	1	12		22.58	22.70	22.79
5	1	24		22.67	22.78	22.72
5	12	0		21.72	21.89	21.84
5	12	7		21.73	21.87	21.84
5	12	13		21.71	21.91	21.84
5	25	0		21.74	21.87	21.89
5	1	0	16-QAM	21.93	22.06	22.07
5	1	12		21.88	22.01	22.01
5	1	24		21.90	22.02	21.96
5	12	0		20.78	20.91	20.81
5	12	7		20.75	20.88	20.87
5	12	13		20.72	20.96	20.78
5	25	0		20.73	20.88	20.84



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.62	22.77	22.77
3	1	8		22.65	22.75	22.75
3	1	14		22.57	22.77	22.65
3	8	0		21.67	21.87	21.81
3	8	4		21.69	21.84	21.76
3	8	7		21.70	21.83	21.75
3	15	0		21.67	21.79	21.76
3	1	0	16-QAM	21.86	22.01	22.02
3	1	8		21.90	22.01	21.93
3	1	14		21.82	21.99	21.84
3	8	0		20.79	20.92	20.86
3	8	4		20.76	20.89	20.78
3	8	7		20.74	20.89	20.76
3	15	0		20.70	20.81	20.76
1.4	1	0	QPSK	22.47	22.75	22.64
1.4	1	3		22.58	22.77	22.66
1.4	1	5		22.50	22.71	22.58
1.4	3	0		22.52	22.78	22.61
1.4	3	1		22.65	22.75	22.66
1.4	3	3		22.60	22.71	22.62
1.4	6	0		21.67	21.76	21.69
1.4	1	0	16-QAM	21.85	22.05	21.87
1.4	1	3		21.94	22.01	21.93
1.4	1	5		21.84	21.96	21.85
1.4	3	0		21.66	21.84	21.64
1.4	3	1		21.68	21.79	21.69
1.4	3	3		21.64	21.74	21.62
1.4	6	0		20.71	20.80	20.79



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.67	22.52	22.71
20	1	49		22.53	22.51	22.81
20	1	99		22.59	22.59	22.96
20	50	0		21.69	21.57	21.69
20	50	24		21.63	21.67	21.82
20	50	50		21.67	21.59	21.85
20	100	0		21.63	21.53	21.90
20	1	0	16-QAM	21.85	21.82	21.95
20	1	49		21.84	21.87	22.09
20	1	99		21.89	21.92	22.13
20	50	0		20.71	20.56	20.71
20	50	24		20.68	20.69	20.82
20	50	50		20.71	20.63	20.85
20	100	0		20.61	20.51	20.87
15	1	0	QPSK	22.60	22.54	22.70
15	1	37		22.55	22.47	22.62
15	1	74		22.63	22.56	22.95
15	36	0		21.67	21.65	21.76
15	36	20		21.69	21.67	21.90
15	36	39		21.73	21.65	21.93
15	75	0		21.75	21.64	21.84
15	1	0	16-QAM	21.84	21.82	21.95
15	1	37		21.77	21.74	21.96
15	1	74		21.86	21.84	22.11
15	36	0		20.69	20.64	20.78
15	36	20		20.72	20.64	20.93
15	36	39		20.75	20.69	20.98
15	75	0		20.72	20.66	20.89



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.88	22.65	22.93
10	1	25		22.87	22.63	22.88
10	1	49		22.97	22.71	23.13
10	25	0		21.83	21.66	21.94
10	25	12		21.85	21.65	21.92
10	25	25		21.85	21.70	21.99
10	50	0		21.86	21.72	21.94
10	1	0	16-QAM	22.20	22.04	22.31
10	1	25		21.98	21.83	22.07
10	1	49		22.18	21.95	22.33
10	25	0		20.85	20.68	20.95
10	25	12		20.88	20.60	20.94
10	25	25		20.82	20.68	21.00
10	50	0		20.90	20.67	20.96
5	1	0	QPSK	22.65	22.48	22.84
5	1	12		22.69	22.58	22.92
5	1	24		22.83	22.60	22.95
5	12	0		21.81	21.72	22.00
5	12	7		21.79	21.67	21.98
5	12	13		21.76	21.61	21.96
5	25	0		21.82	21.67	22.02
5	1	0	16-QAM	22.05	21.90	22.18
5	1	12		21.93	21.76	22.10
5	1	24		22.03	21.89	22.14
5	12	0		20.84	20.74	21.05
5	12	7		20.83	20.69	21.01
5	12	13		20.81	20.63	20.97
5	25	0		20.80	20.67	20.97



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.47	22.48	22.45
10	1	25		22.76	22.90	22.83
10	1	49		22.63	22.66	22.48
10	25	0		21.85	21.86	21.88
10	25	12		21.94	22.06	22.02
10	25	25		21.91	21.92	21.97
10	50	0		21.85	21.90	21.89
10	1	0	16-QAM	21.77	21.84	21.77
10	1	25		22.19	22.25	22.24
10	1	49		21.92	21.92	21.82
10	25	0		20.86	20.89	20.89
10	25	12		20.94	21.01	21.01
10	25	25		20.90	20.93	20.94
10	50	0		20.80	20.93	20.91
5	1	0	QPSK	22.74	22.84	22.88
5	1	12		22.62	22.82	22.80
5	1	24		22.70	22.89	22.78
5	12	0		21.84	22.05	21.91
5	12	7		21.85	21.95	21.97
5	12	13		21.87	22.01	21.95
5	25	0		21.85	21.96	21.91
5	1	0	16-QAM	22.00	22.27	22.14
5	1	12		22.01	22.13	22.04
5	1	24		22.09	22.26	22.21
5	12	0		20.88	21.04	20.89
5	12	7		20.80	21.03	21.00
5	12	13		20.86	21.02	20.92
5	25	0		20.79	21.03	20.91



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.69	22.79	22.74
3	1	8		22.68	22.81	22.84
3	1	14		22.71	22.85	22.85
3	8	0		21.77	22.01	21.93
3	8	4		21.76	22.06	22.02
3	8	7		21.76	22.03	21.97
3	15	0		21.76	22.02	21.97
3	1	0	16-QAM	21.94	22.24	22.10
3	1	8		21.90	22.24	22.26
3	1	14		21.99	22.28	22.13
3	8	0		20.83	21.14	21.00
3	8	4		20.81	21.12	21.09
3	8	7		20.83	21.12	21.10
3	15	0		20.76	21.04	20.99
1.4	1	0	QPSK	22.66	22.79	22.72
1.4	1	3		22.74	22.85	22.77
1.4	1	5		22.71	22.86	22.89
1.4	3	0		22.71	22.82	22.80
1.4	3	1		22.73	22.85	22.88
1.4	3	3		22.71	22.83	22.79
1.4	6	0		21.76	22.01	21.95
1.4	1	0	16-QAM	21.91	22.06	22.06
1.4	1	3		22.02	22.10	22.18
1.4	1	5		21.98	22.11	22.09
1.4	3	0		21.73	21.86	21.85
1.4	3	1		21.78	21.94	22.00
1.4	3	3		21.78	21.85	21.84
1.4	6	0		20.84	20.90	20.91



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.45	22.47	22.53
10	1	25		22.81	22.89	22.80
10	1	49		22.51	22.51	22.47
10	25	0		21.69	21.80	21.79
10	25	12		21.92	22.01	21.98
10	25	25		21.88	21.94	21.97
10	50	0		21.87	21.86	21.92
10	1	0	16-QAM	21.88	21.75	21.83
10	1	25		22.22	22.13	22.18
10	1	49		21.88	21.81	21.79
10	25	0		20.82	20.82	20.78
10	25	12		20.90	20.98	20.96
10	25	25		20.82	20.90	20.97
10	50	0		20.86	20.86	20.90
5	1	0	QPSK	22.75	22.82	22.85
5	1	12		22.76	22.87	22.81
5	1	24		22.84	22.85	22.74
5	12	0		21.93	21.88	21.92
5	12	7		21.91	21.94	22.00
5	12	13		22.02	22.00	21.98
5	25	0		22.00	21.96	22.15
5	1	0	16-QAM	22.08	22.16	22.30
5	1	12		22.14	22.08	22.06
5	1	24		22.15	22.23	22.15
5	12	0		20.97	20.93	21.07
5	12	7		20.97	20.94	20.96
5	12	13		21.02	20.96	20.95
5	25	0		21.09	20.96	20.96



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.71	22.85	22.88
20	1	49		22.71	22.80	22.76
20	1	99		23.22	23.36	23.41
20	50	0		21.71	21.89	21.99
20	50	24		21.78	21.95	22.01
20	50	50		21.79	21.99	22.03
20	100	0		21.77	21.95	22.07
20	1	0	16-QAM	22.00	22.11	22.23
20	1	49		22.00	22.25	22.32
20	1	99		22.44	22.68	22.68
20	50	0		20.67	20.94	20.98
20	50	24		20.74	20.92	21.01
20	50	50		20.79	21.02	21.03
20	100	0		20.73	20.93	21.02
15	1	0	QPSK	23.10	23.20	23.38
15	1	37		22.55	22.99	22.91
15	1	74		22.98	23.20	23.22
15	36	0		21.84	22.08	22.16
15	36	20		21.79	22.00	22.08
15	36	39		21.77	21.96	22.05
15	75	0		21.84	22.02	22.13
15	1	0	16-QAM	22.40	22.57	22.69
15	1	37		22.01	22.25	22.38
15	1	74		22.22	22.49	22.54
15	36	0		20.85	21.06	21.17
15	36	20		20.78	21.02	21.07
15	36	39		20.77	20.98	21.02
15	75	0		20.79	21.00	21.11



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.16	22.38	22.36
10	1	25		22.67	22.88	22.98
10	1	49		23.19	23.42	23.64
10	25	0		21.74	21.92	21.99
10	25	12		21.80	22.00	22.10
10	25	25		21.82	22.06	22.17
10	50	0		21.72	22.01	22.10
10	1	0	16-QAM	21.41	21.67	21.79
10	1	25		21.99	22.20	22.32
10	1	49		22.44	22.71	22.70
10	25	0		20.66	20.94	21.00
10	25	12		20.76	21.02	21.09
10	25	25		20.81	21.07	21.12
10	50	0		20.71	20.98	21.07
5	1	0	QPSK	22.61	22.48	23.01
5	1	12		22.66	23.12	22.97
5	1	24		22.67	22.95	23.03
5	12	0		21.73	22.02	22.10
5	12	7		21.73	21.97	22.06
5	12	13		21.67	21.97	22.06
5	25	0		21.68	21.99	22.06
5	1	0	16-QAM	22.06	22.34	22.47
5	1	12		22.04	22.25	22.36
5	1	24		22.05	22.24	22.32
5	12	0		20.80	21.06	21.13
5	12	7		20.73	20.99	21.10
5	12	13		20.73	20.94	21.06
5	25	0		20.72	21.01	21.12



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.56	22.97	22.88
3	1	8		22.69	22.94	23.04
3	1	14		22.59	22.91	22.97
3	8	0		21.70	21.99	22.05
3	8	4		21.71	21.94	22.06
3	8	7		21.66	21.94	22.01
3	15	0		21.65	21.96	22.05
3	1	0	16-QAM	21.96	22.26	22.41
3	1	8		21.98	22.27	22.40
3	1	14		21.88	22.20	22.33
3	8	0		20.77	21.03	21.14
3	8	4		20.74	21.02	21.13
3	8	7		20.69	20.97	21.07
3	15	0		20.72	20.99	21.04
1.4	1	0	QPSK	22.47	22.92	22.89
1.4	1	3		22.63	22.99	23.08
1.4	1	5		22.61	22.90	22.94
1.4	3	0		22.64	22.91	23.05
1.4	3	1		22.69	22.97	23.07
1.4	3	3		22.64	22.95	23.04
1.4	6	0		21.64	21.95	22.03
1.4	1	0	16-QAM	21.86	22.18	22.36
1.4	1	3		21.98	22.26	22.45
1.4	1	5		21.83	22.13	22.36
1.4	3	0		21.65	21.92	22.06
1.4	3	1		21.71	21.99	22.10
1.4	3	3		21.63	21.93	22.05
1.4	6	0		20.70	20.98	21.06



LTE Band 2

Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.36	4.87	4.35	5.83	PASS
Middle CH	3.71	5.16	4.84	6.14	
Highest CH	3.51	4.9	4.41	5.86	




LTE Band 2 / 20MHz / QPSK

Lowest Channel / 1RB



Date: 24 FEB 2017 13:42:21

Lowest Channel / Full RB

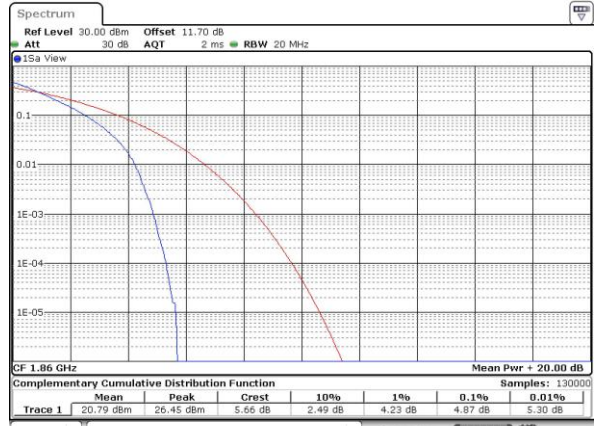


Date: 24 FEB 2017 13:42:31

Middle Channel / 1RB



Date: 24 FEB 2017 13:42:41

Middle Channel / Full RB

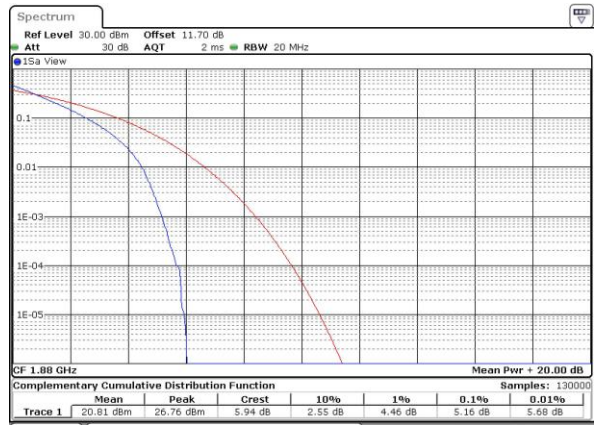


Date: 24 FEB 2017 13:42:53

Highest Channel / 1RB



Date: 24 FEB 2017 13:43:03

Highest Channel / Full RB

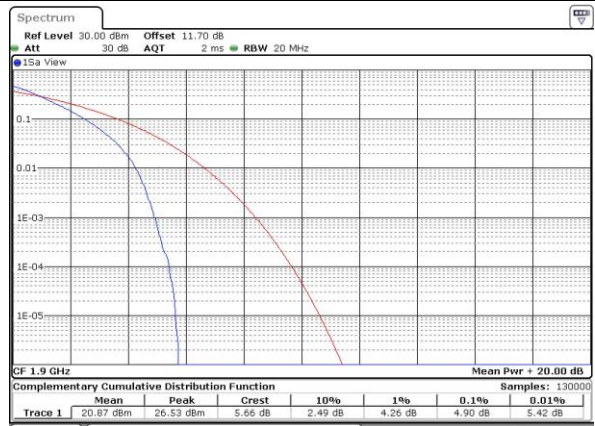


Date: 24 FEB 2017 13:43:12




LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB

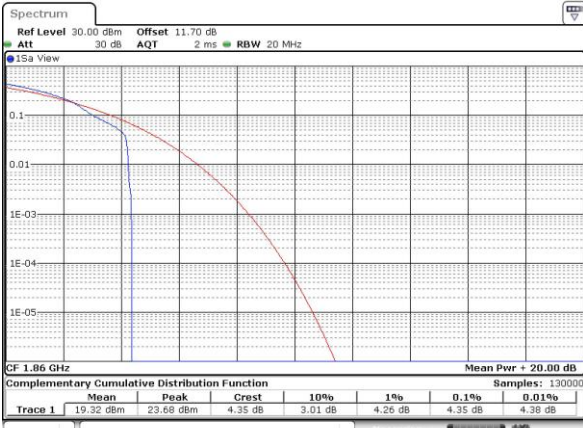


Date: 24 FEB 2017 13:41:05

Lowest Channel / Full RB

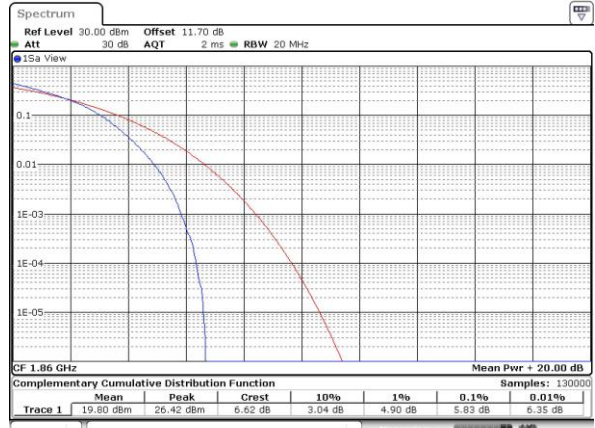


Date: 24 FEB 2017 13:41:15

Middle Channel / 1RB

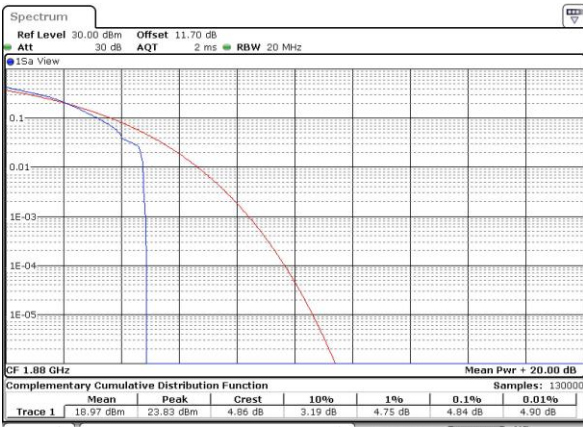

Date: 24 FEB 2017 13:41:28

Middle Channel / Full RB

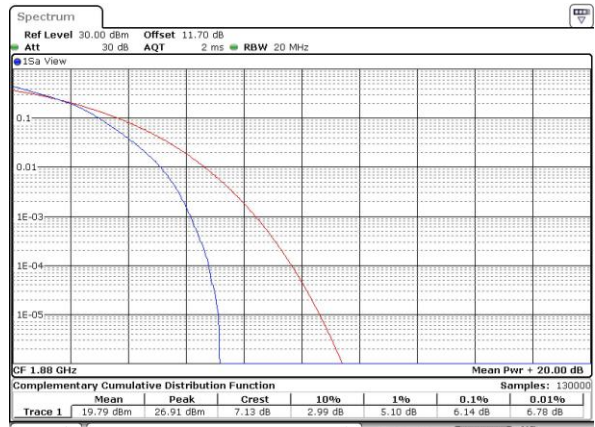


Date: 24 FEB 2017 13:41:48

Highest Channel / 1RB



Date: 24 FEB 2017 13:42:01

Highest Channel / Full RB

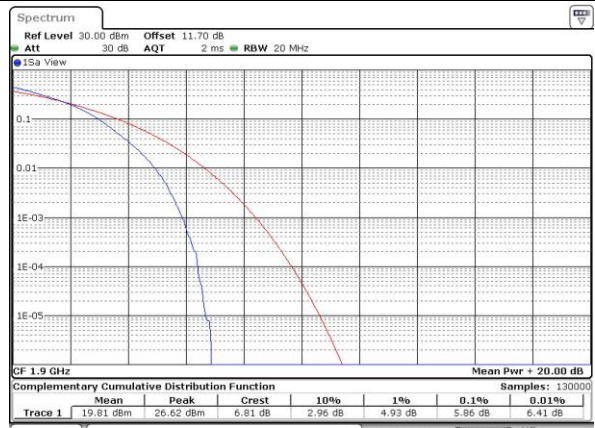

Date: 24 FEB 2017 13:42:12




26dB Bandwidth

Mode	LTE Band 2 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.30	2.99	3.00	4.94	4.99	9.81	9.67	14.42	14.39	20.02	20.22
Middle CH	1.29	1.26	3.02	2.98	4.88	4.90	9.95	9.83	14.54	14.75	20.18	20.18
Highest CH	1.28	1.25	2.99	3.02	4.97	4.94	9.65	9.77	14.42	14.84	20.22	20.22




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

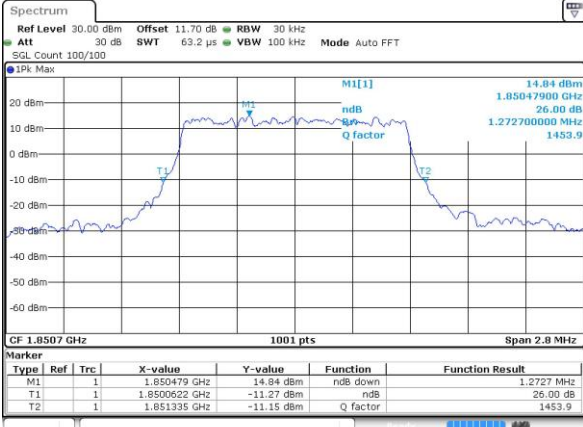

Date: 24 FEB 2017 12:02:57

Lowest Channel / 1.4MHz / 16QAM

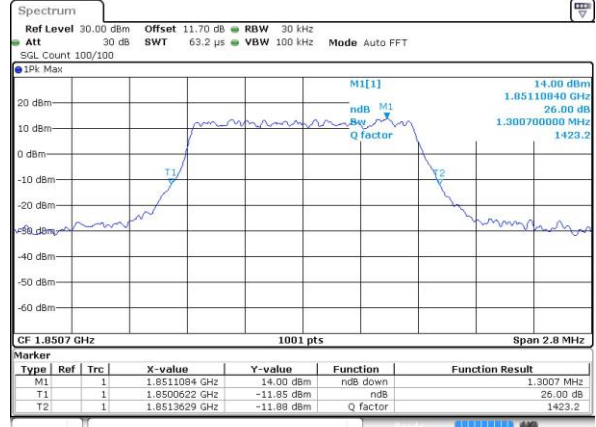


Date: 24 FEB 2017 12:03:08

Middle Channel / 1.4MHz / QPSK



Date: 24 FEB 2017 12:10:05

Middle Channel / 1.4MHz / 16QAM

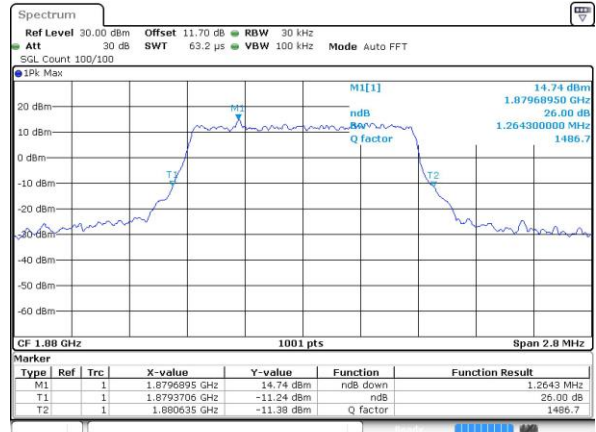


Date: 24 FEB 2017 12:10:15

Highest Channel / 1.4MHz / QPSK



Date: 24 FEB 2017 12:12:36

Highest Channel / 1.4MHz / 16QAM

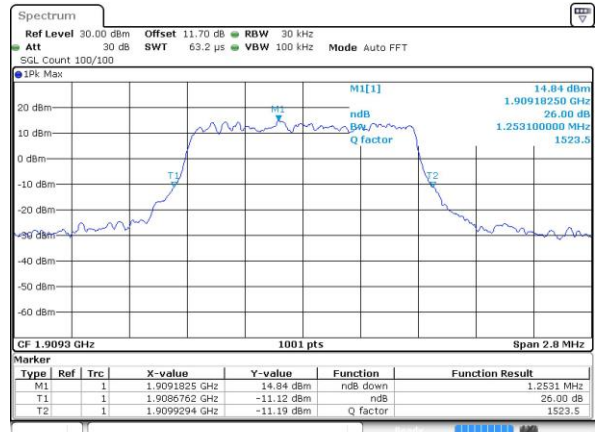


Date: 24 FEB 2017 12:12:46




LTE Band 2

Lowest Channel / 3MHz / QPSK

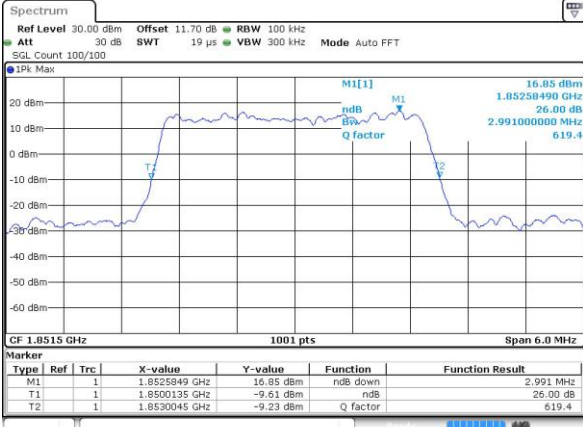


Date: 24 FEB 2017 10:24:13

Lowest Channel / 3MHz / 16QAM

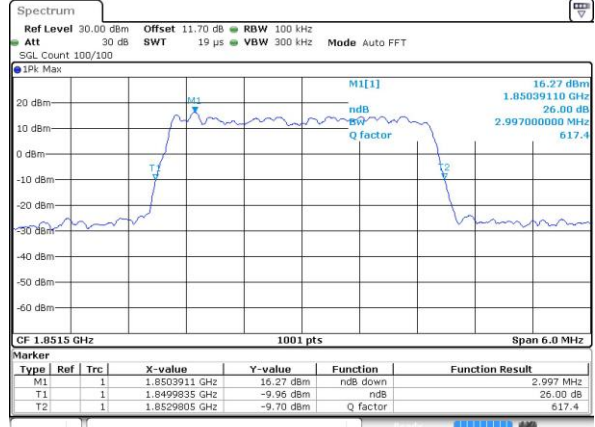


Date: 24 FEB 2017 10:24:23

Middle Channel / 3MHz / QPSK

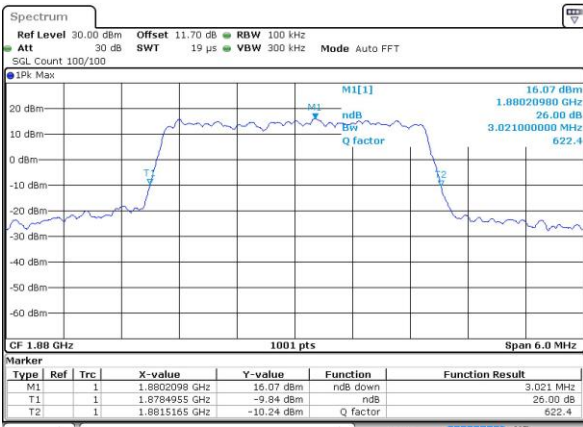


Date: 24 FEB 2017 10:31:20

Middle Channel / 3MHz / 16QAM

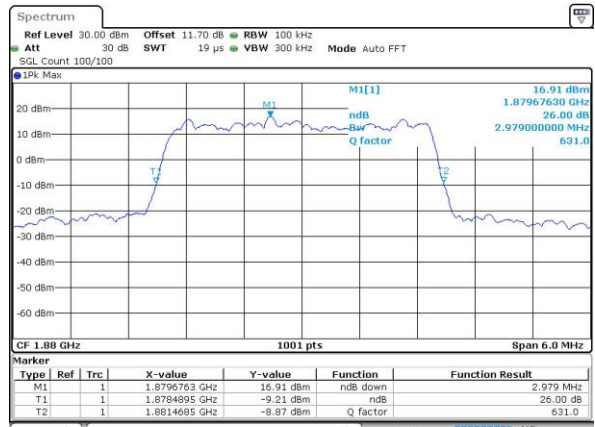


Date: 24 FEB 2017 10:31:31

Highest Channel / 3MHz / QPSK

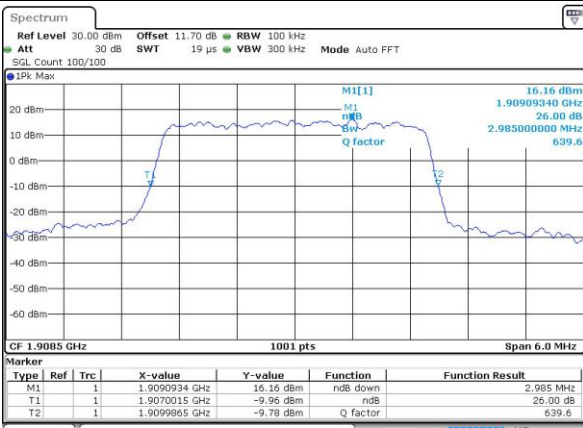

Date: 24 FEB 2017 10:33:51

Highest Channel / 3MHz / 16QAM

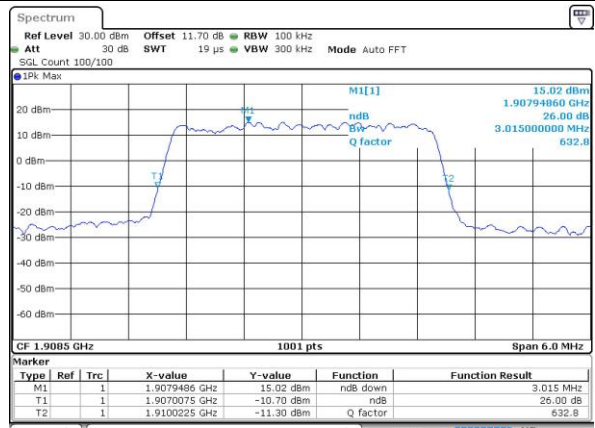


Date: 24 FEB 2017 10:34:01




LTE Band 2

Lowest Channel / 5MHz / QPSK

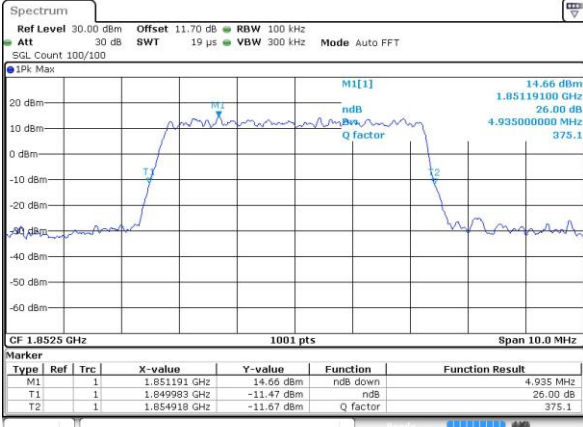


Date: 24 FEB 2017 10:40:58

Lowest Channel / 5MHz / 16QAM

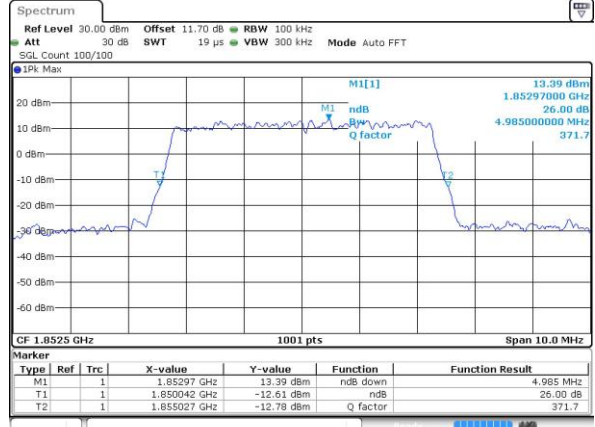


Date: 24 FEB 2017 10:41:08

Middle Channel / 5MHz / QPSK

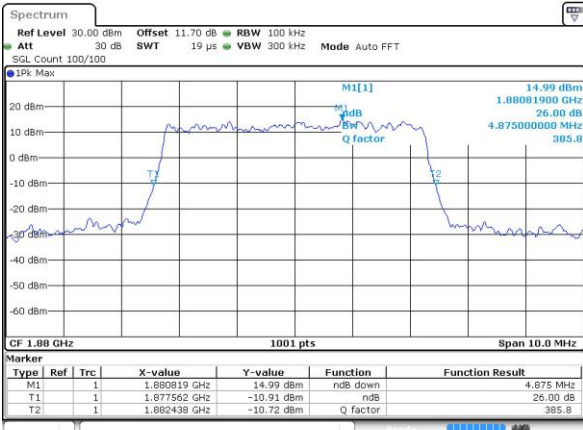


Date: 24 FEB 2017 10:48:05

Middle Channel / 5MHz / 16QAM

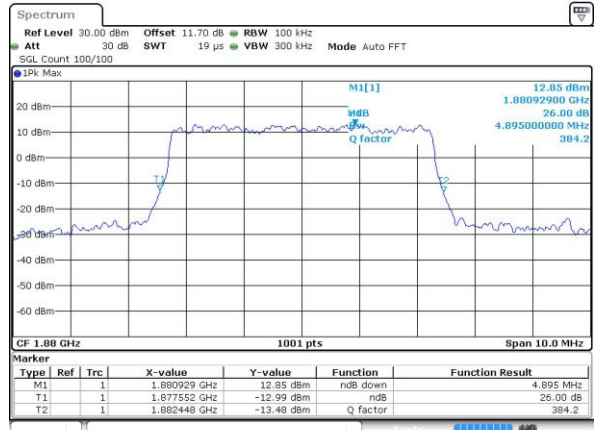


Date: 24 FEB 2017 10:48:16

Highest Channel / 5MHz / QPSK

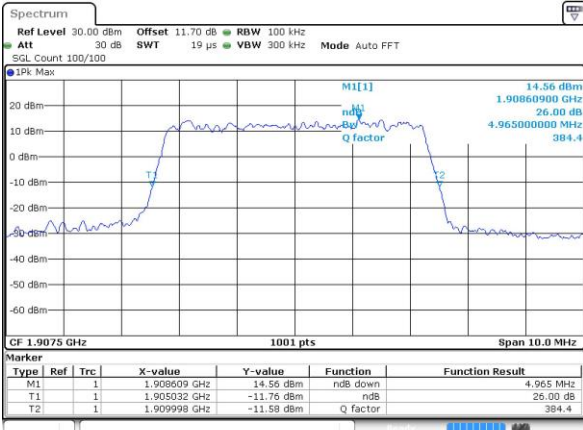

Date: 24 FEB 2017 10:50:36

Highest Channel / 5MHz / 16QAM

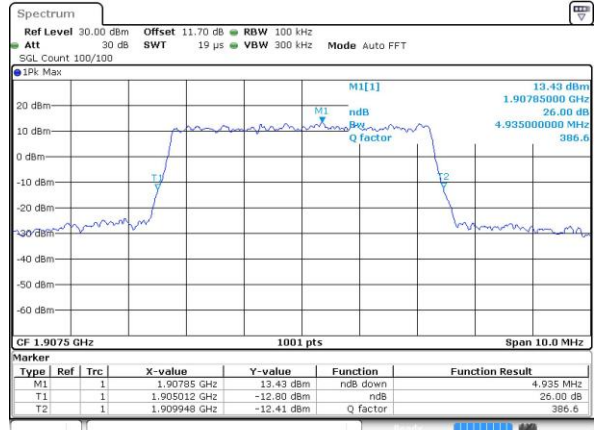


Date: 24 FEB 2017 10:50:47




LTE Band 2

Lowest Channel / 10MHz / QPSK

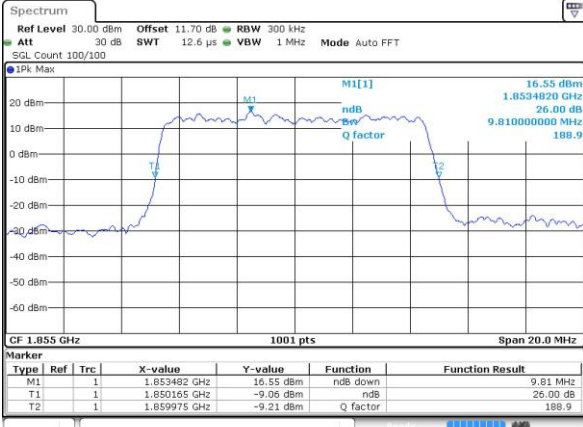


Date: 24 FEB 2017 10:57:44

Lowest Channel / 10MHz / 16QAM

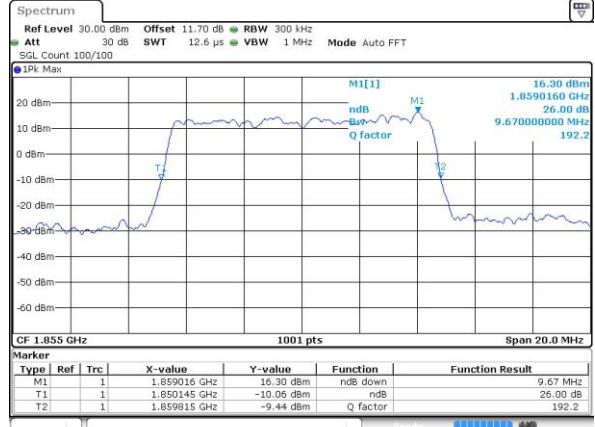


Date: 24 FEB 2017 10:57:54

Middle Channel / 10MHz / QPSK

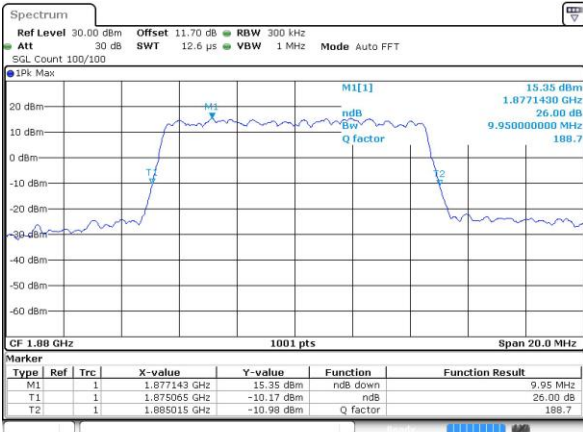

Date: 24 FEB 2017 11:04:51

Middle Channel / 10MHz / 16QAM

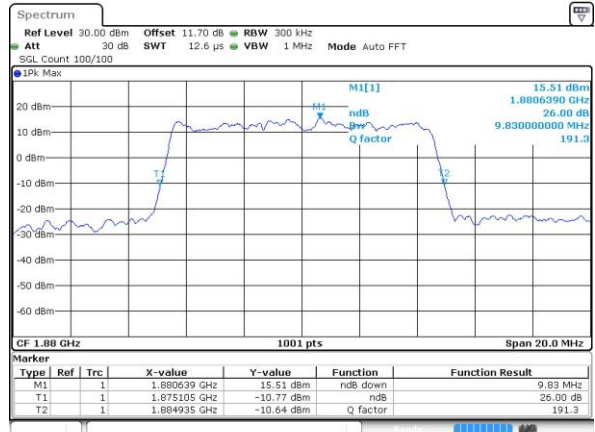


Date: 24 FEB 2017 11:05:02

Highest Channel / 10MHz / QPSK



Date: 24 FEB 2017 11:07:22

Highest Channel / 10MHz / 16QAM

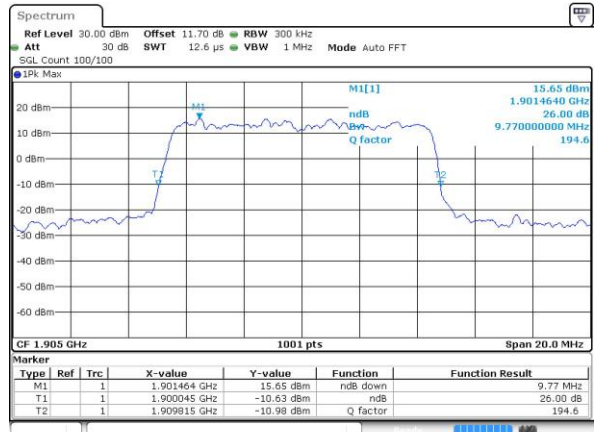


Date: 24 FEB 2017 11:07:32




LTE Band 2

Lowest Channel / 15MHz / QPSK

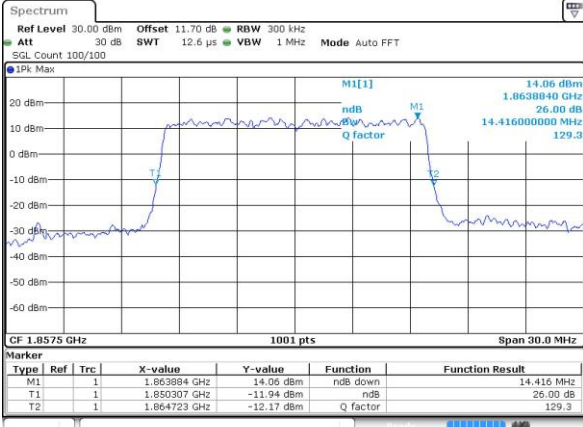


Date: 24 FEB 2017 11:14:29

Lowest Channel / 15MHz / 16QAM

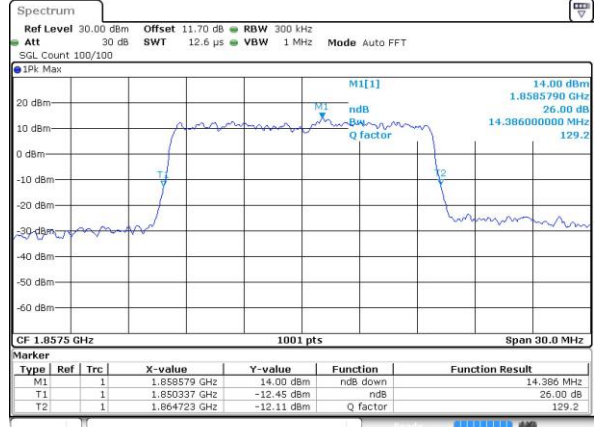


Date: 24 FEB 2017 11:14:39

Middle Channel / 15MHz / QPSK

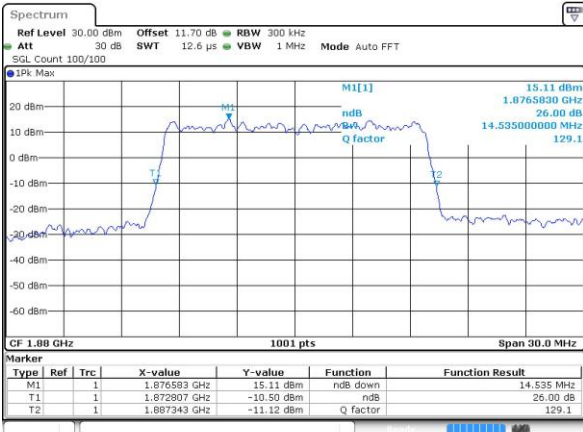


Date: 24 FEB 2017 11:21:36

Middle Channel / 15MHz / 16QAM

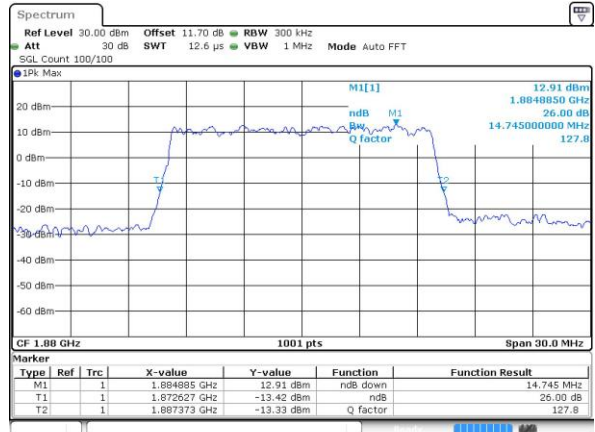


Date: 24 FEB 2017 11:21:47

Highest Channel / 15MHz / QPSK

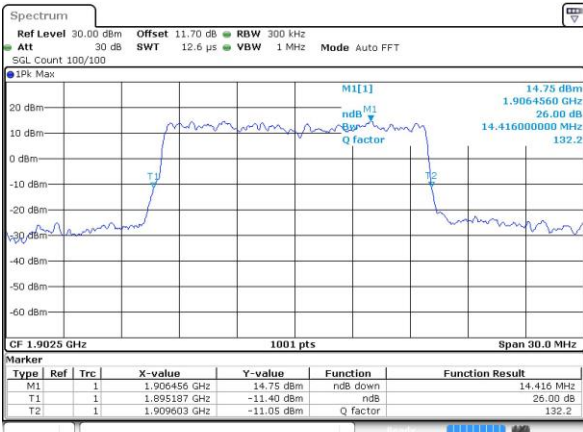

Date: 24 FEB 2017 11:24:07

Highest Channel / 15MHz / 16QAM

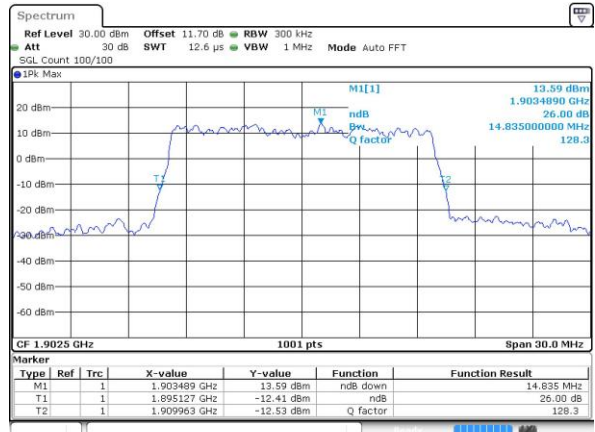


Date: 24 FEB 2017 11:24:17




LTE Band 2

Lowest Channel / 20MHz / QPSK

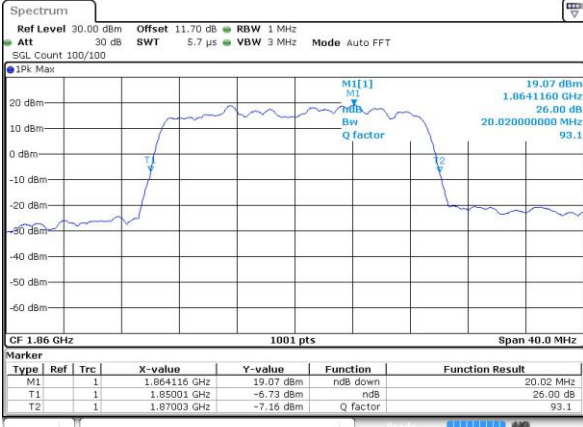


Date: 24 FEB 2017 11:31:14

Lowest Channel / 20MHz / 16QAM

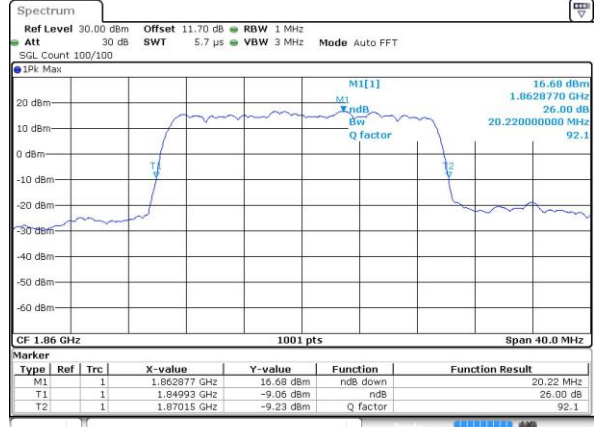


Date: 24 FEB 2017 11:31:24

Middle Channel / 20MHz / QPSK

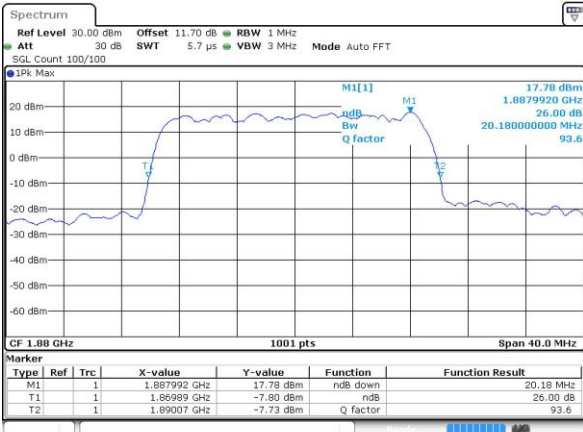


Date: 24 FEB 2017 11:38:21

Middle Channel / 20MHz / 16QAM

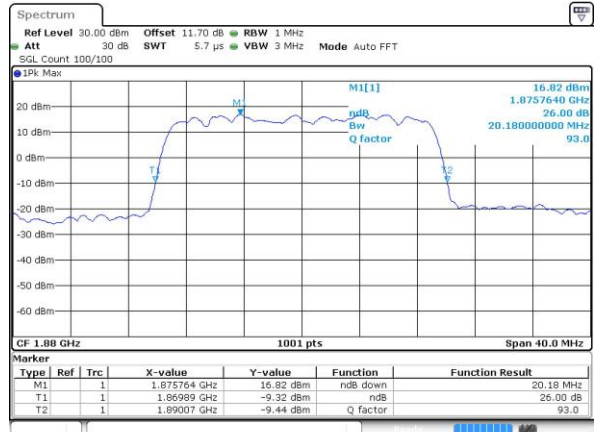


Date: 24 FEB 2017 11:38:32

Highest Channel / 20MHz / QPSK

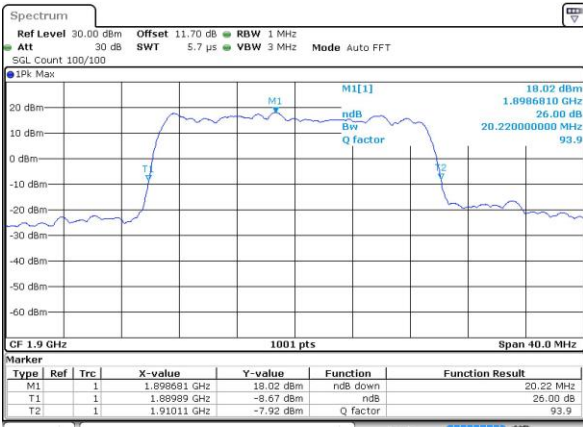

Date: 24 FEB 2017 11:40:53

Highest Channel / 20MHz / 16QAM

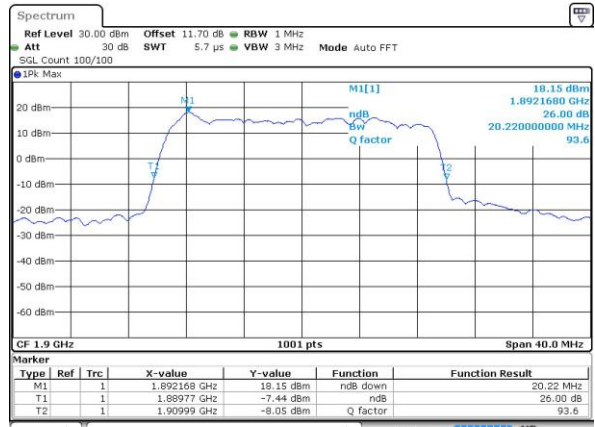

Date: 24 FEB 2017 11:41:03




Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.1	1.09	2.72	2.72	4.49	4.49	8.97	9.05	13.4	13.43	18.14	18.18
Middle CH	1.09	1.1	2.73	2.72	4.48	4.49	8.97	9.03	13.4	13.46	18.46	18.46
Highest CH	1.09	1.09	2.72	2.7	4.52	4.5	8.97	9.03	13.4	13.46	18.3	18.38




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

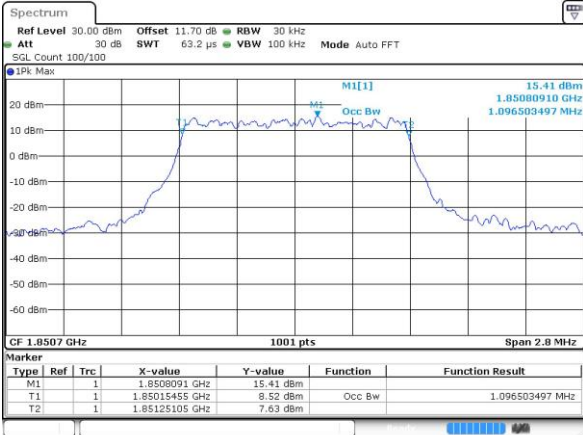


Date: 24 FEB 2017 12:02:37

Lowest Channel / 1.4MHz / 16QAM

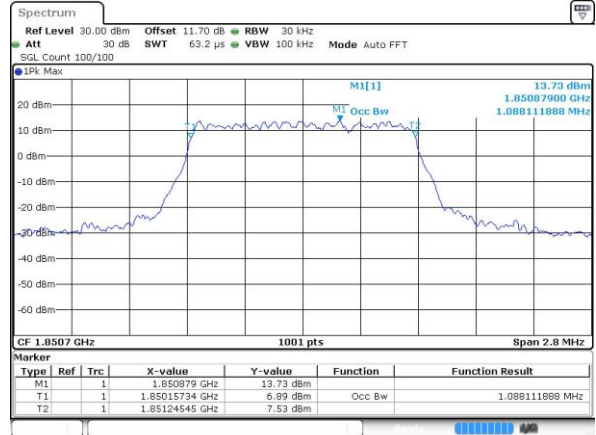


Date: 24 FEB 2017 12:02:47

Middle Channel / 1.4MHz / QPSK

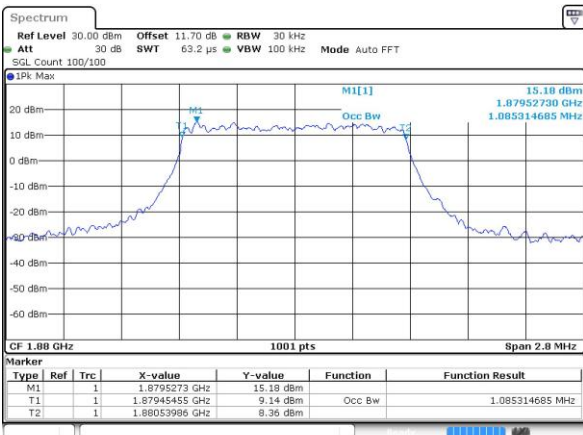


Date: 24 FEB 2017 12:09:44

Middle Channel / 1.4MHz / 16QAM

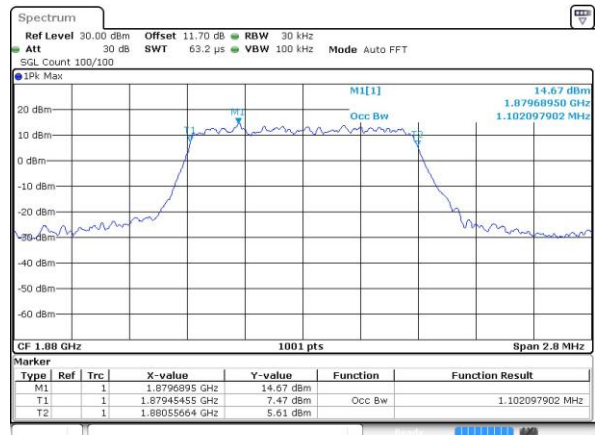


Date: 24 FEB 2017 12:09:55

Highest Channel / 1.4MHz / QPSK

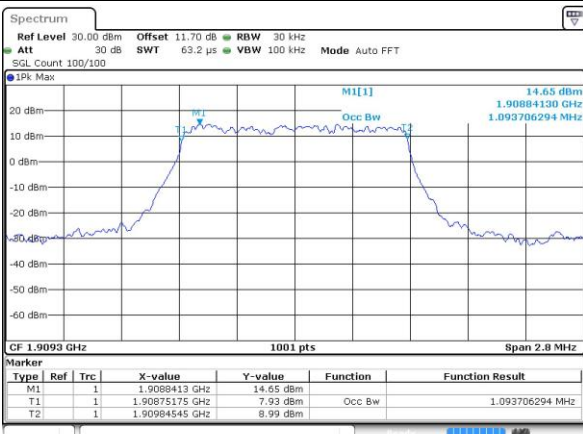

Date: 24 FEB 2017 12:12:15

Highest Channel / 1.4MHz / 16QAM

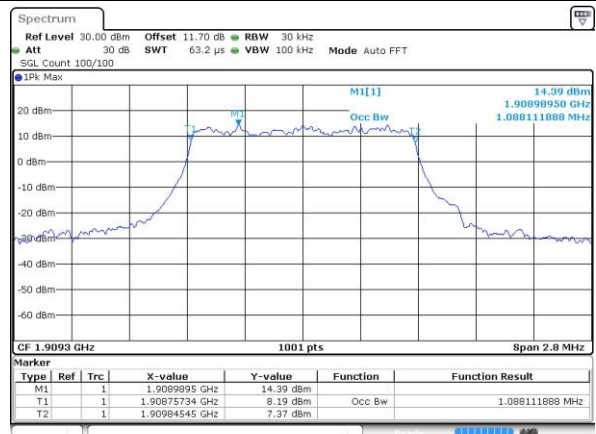


Date: 24 FEB 2017 12:12:26




LTE Band 2

Lowest Channel / 3MHz / QPSK

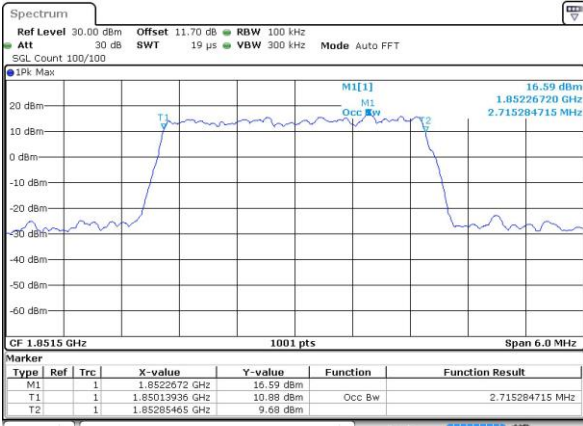


Date: 24 FEB 2017 10:23:52

Lowest Channel / 3MHz / 16QAM

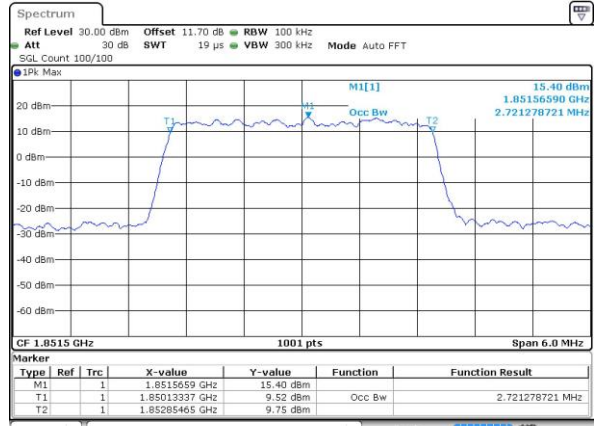


Date: 24 FEB 2017 10:24:02

Middle Channel / 3MHz / QPSK

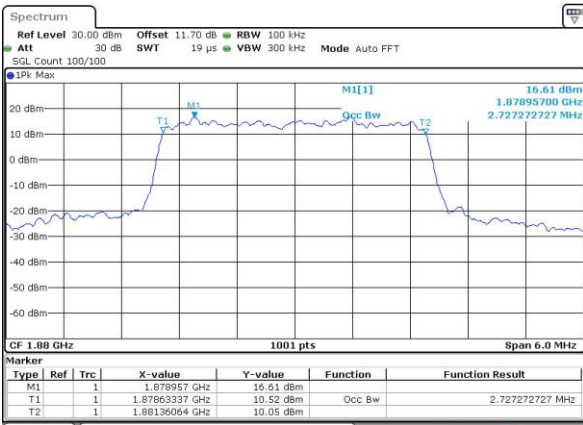


Date: 24 FEB 2017 10:31:00

Middle Channel / 3MHz / 16QAM

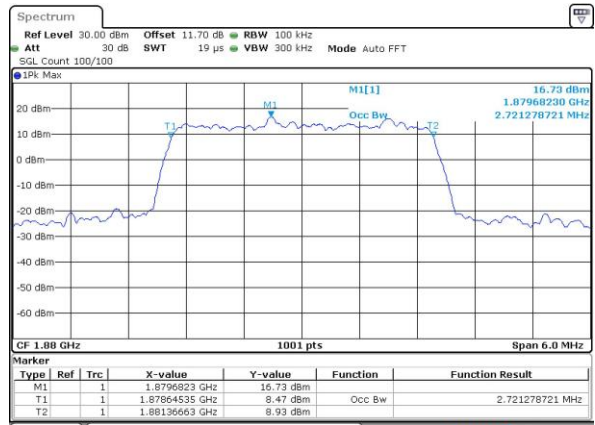


Date: 24 FEB 2017 10:31:10

Highest Channel / 3MHz / QPSK

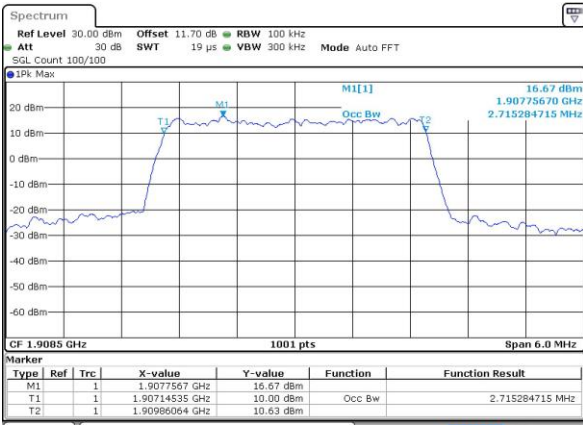

Date: 24 FEB 2017 10:33:30

Highest Channel / 3MHz / 16QAM

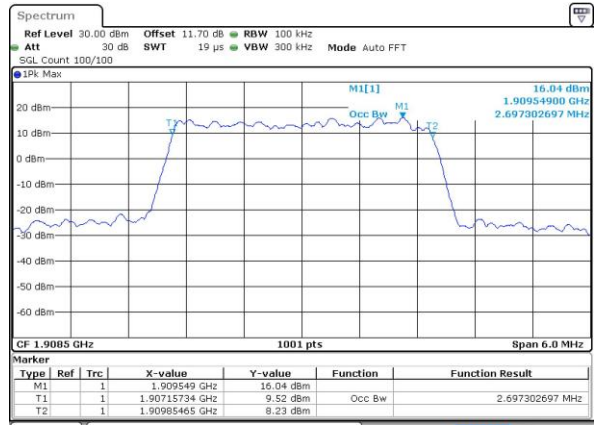


Date: 24 FEB 2017 10:33:41




LTE Band 2

Lowest Channel / 5MHz / QPSK

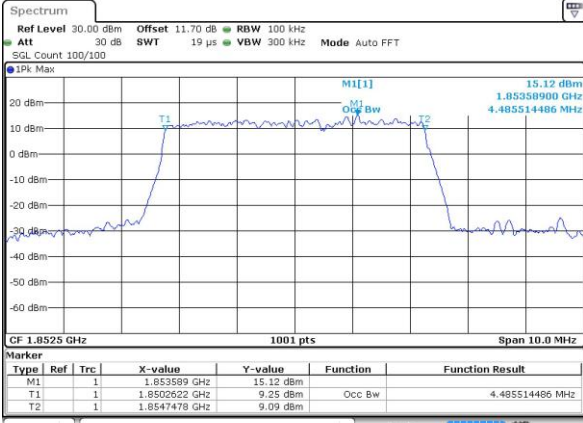


Date: 24 FEB 2017 10:40:37

Lowest Channel / 5MHz / 16QAM

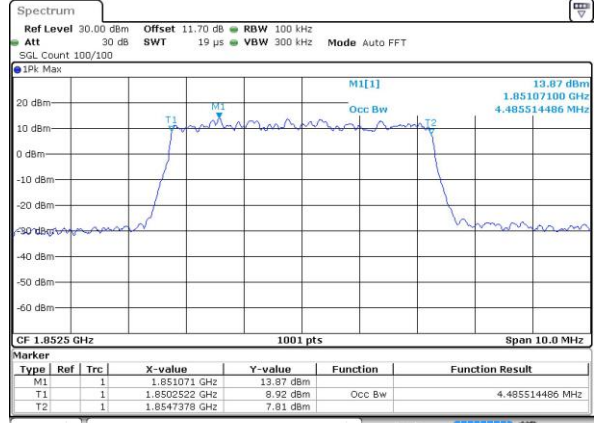


Date: 24 FEB 2017 10:40:48

Middle Channel / 5MHz / QPSK

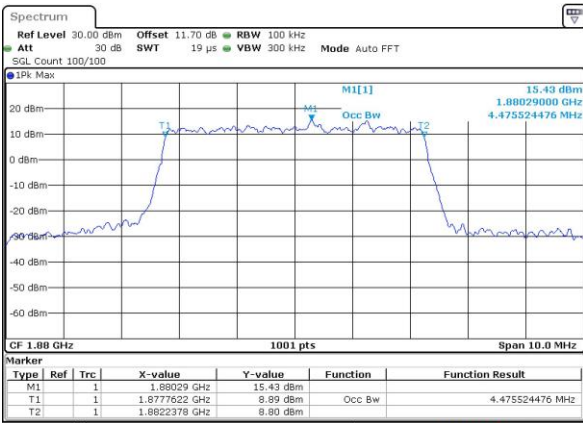


Date: 24 FEB 2017 10:47:45

Middle Channel / 5MHz / 16QAM

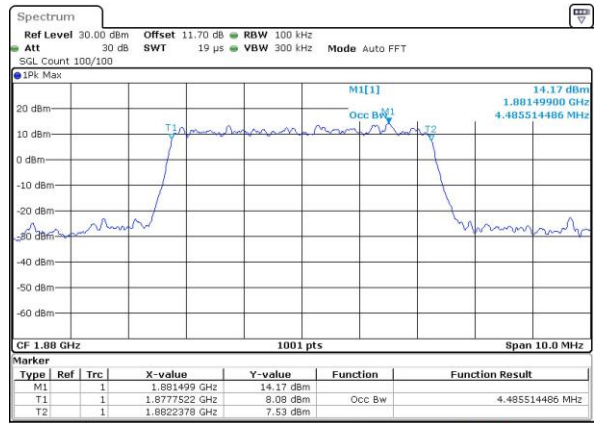


Date: 24 FEB 2017 10:47:55

Highest Channel / 5MHz / QPSK

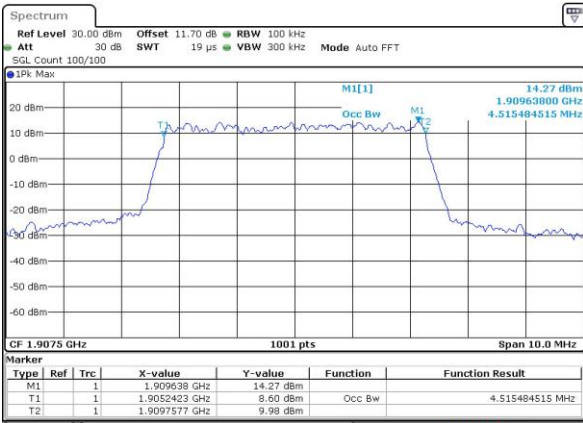

Date: 24 FEB 2017 10:50:15

Highest Channel / 5MHz / 16QAM

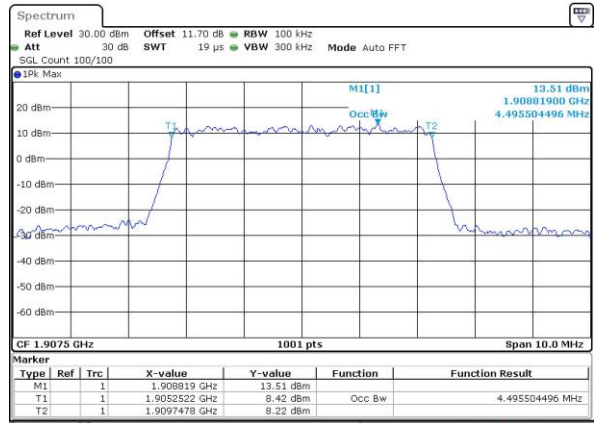


Date: 24 FEB 2017 10:50:26




LTE Band 2

Lowest Channel / 10MHz / QPSK

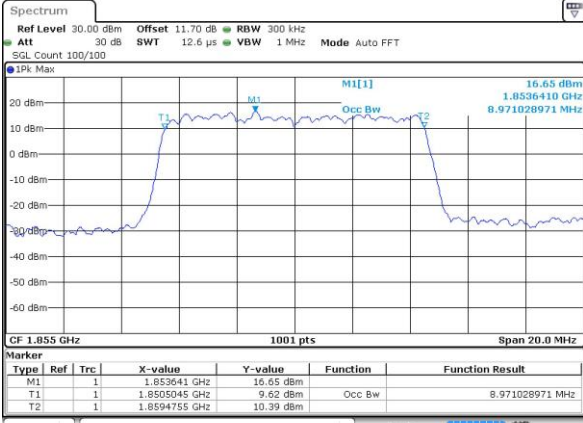


Date: 24 FEB 2017 10:57:23

Lowest Channel / 10MHz / 16QAM

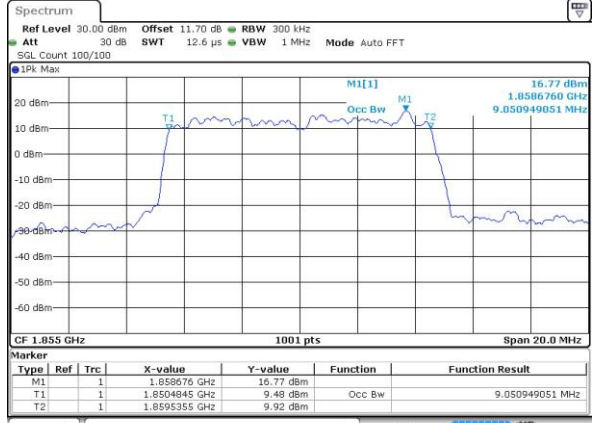


Date: 24 FEB 2017 10:57:33

Middle Channel / 10MHz / QPSK

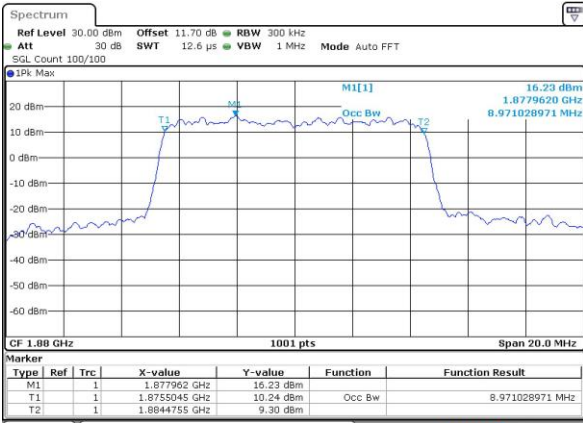


Date: 24 FEB 2017 11:04:30

Middle Channel / 10MHz / 16QAM

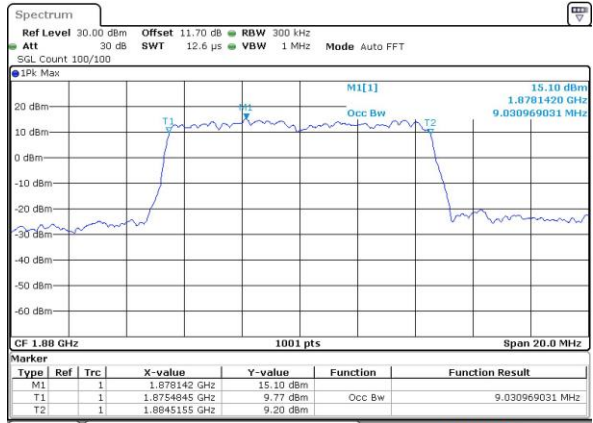


Date: 24 FEB 2017 11:04:41

Highest Channel / 10MHz / QPSK

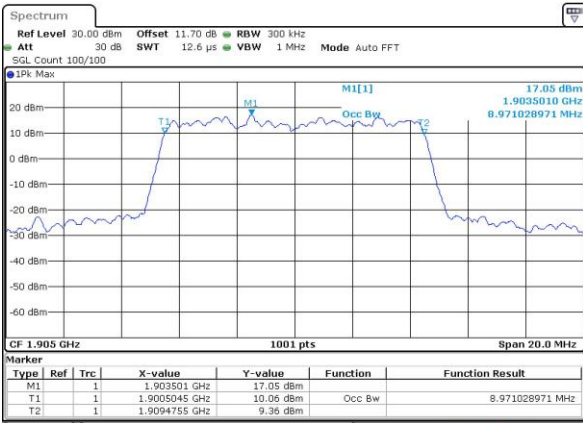

Date: 24 FEB 2017 11:07:01

Highest Channel / 10MHz / 16QAM

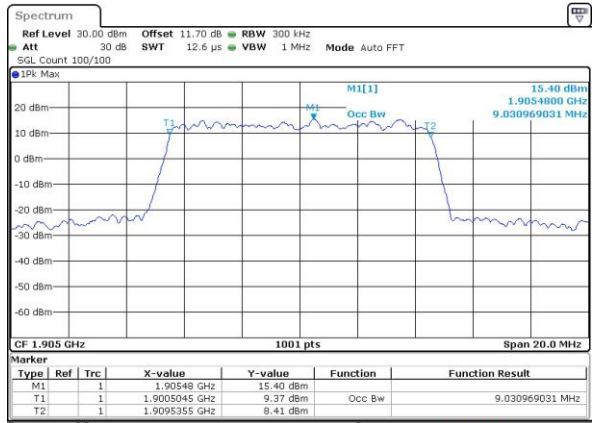


Date: 24 FEB 2017 11:07:11




LTE Band 2

Lowest Channel / 15MHz / QPSK

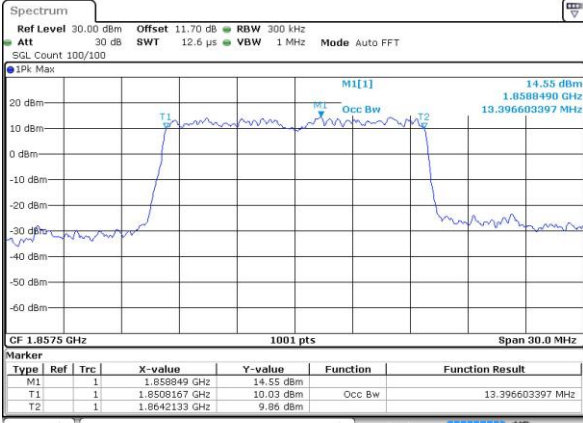


Date: 24 FEB 2017 11:14:08

Lowest Channel / 15MHz / 16QAM

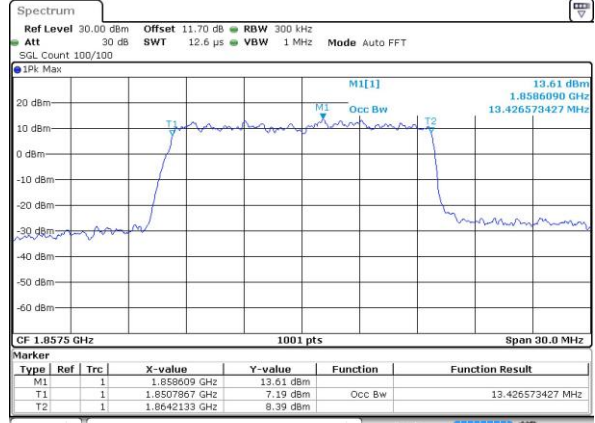


Date: 24 FEB 2017 11:14:19

Middle Channel / 15MHz / QPSK

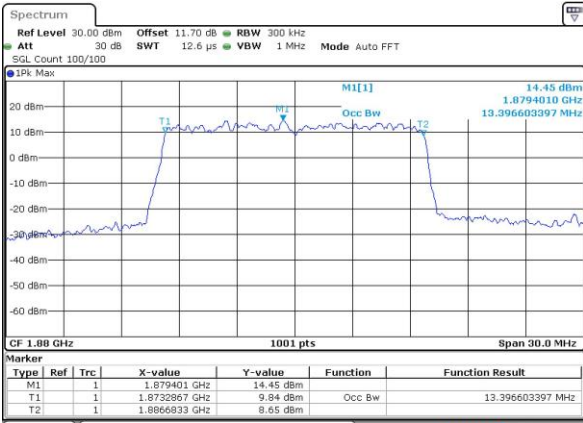


Date: 24 FEB 2017 11:21:16

Middle Channel / 15MHz / 16QAM

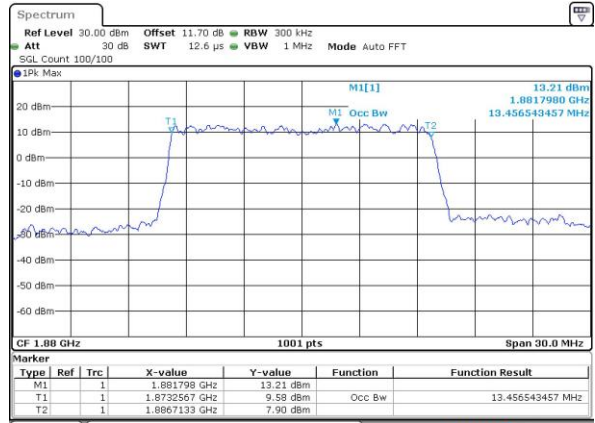


Date: 24 FEB 2017 11:21:26

Highest Channel / 15MHz / QPSK

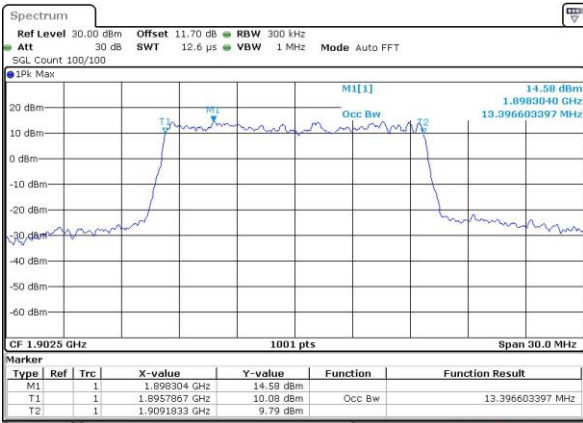

Date: 24 FEB 2017 11:23:46

Highest Channel / 15MHz / 16QAM

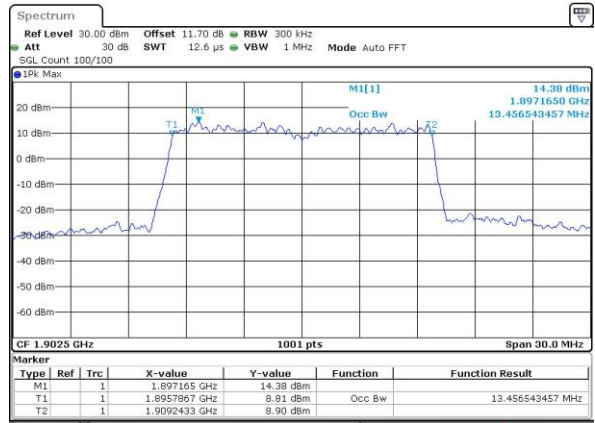


Date: 24 FEB 2017 11:23:57




LTE Band 2

Lowest Channel / 20MHz / QPSK

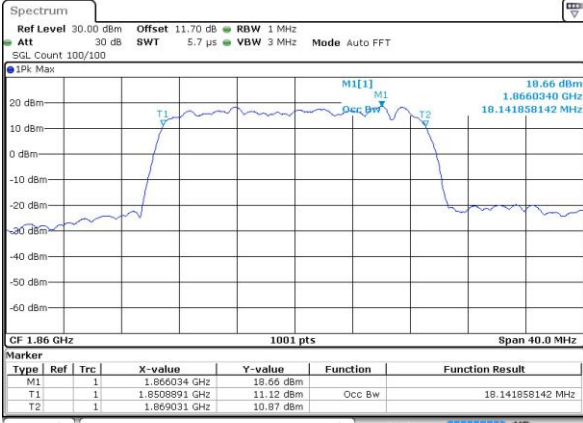


Date: 24 FEB 2017 11:30:53

Lowest Channel / 20MHz / 16QAM

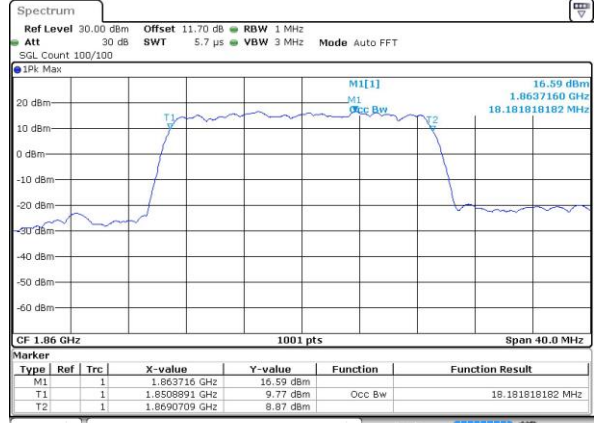


Date: 24 FEB 2017 11:31:04

Middle Channel / 20MHz / QPSK

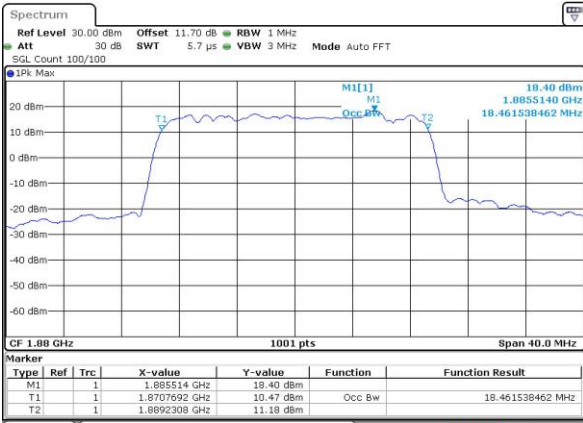


Date: 24 FEB 2017 11:38:01

Middle Channel / 20MHz / 16QAM

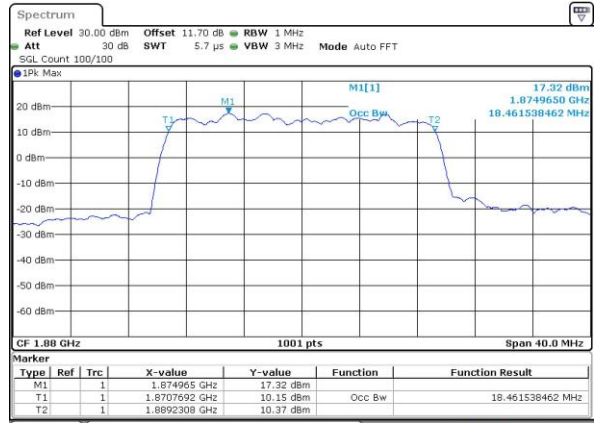


Date: 24 FEB 2017 11:38:11

Highest Channel / 20MHz / QPSK

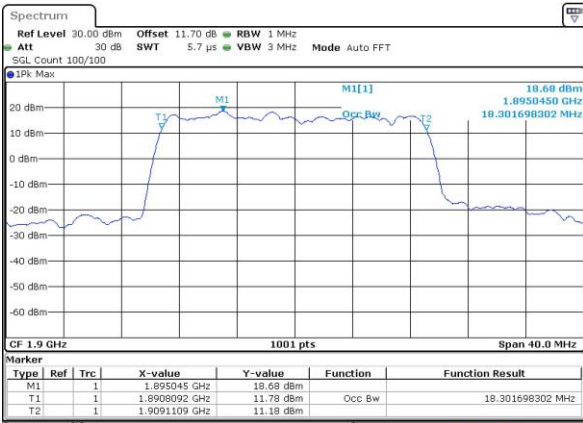

Date: 24 FEB 2017 11:40:32

Highest Channel / 20MHz / 16QAM

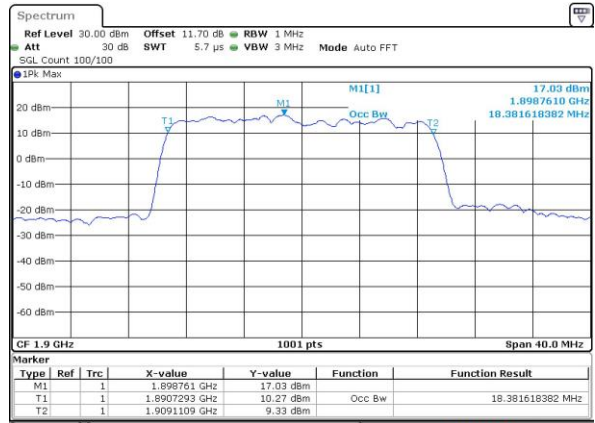

Date: 24 FEB 2017 11:40:42