

FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10813
FCC ID : IHDT56WC3
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M),
27(F), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Feb. 16, 2017 and completely tested on Apr. 10, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager

SPORTON LAB.

Approved by: Jones Tsai / Manager



Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test.....	6
1.5	Specification of Accessory	7
1.6	Modification of EUT	7
1.7	Re-use of Measured Data	8
1.8	Maximum EIRP Power, Frequency Tolerance, and Emission Designator	9
1.9	Testing Location	10
1.10	Applicable Standards.....	10
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1	Test Mode	11
2.2	Connection Diagram of Test System.....	12
2.3	Support Unit used in test configuration and system	12
2.4	Measurement Results Explanation Example.....	13
2.5	Frequency List of Low/Middle/High Channels	14
3	CONDUCTED TEST ITEMS	15
3.1	Measuring Instruments	15
3.2	Test Setup	15
3.3	Test Result of Conducted Test	15
3.4	Conducted Output Power and EIRP	16
3.5	Peak-to-Average Ratio	17
3.6	Occupied Bandwidth.....	18
3.7	Conducted Band Edge	19
3.8	Conducted Spurious Emission	20
3.9	Frequency Stability	21
4	RADIATED TEST ITEMS	22
4.1	Measuring Instruments	22
4.2	Test Setup	22
4.3	Test Result of Radiated Test	22
4.4	Radiated Spurious Emission	23
5	LIST OF MEASURING EQUIPMENT	24
6	UNCERTAINTY OF EVALUATION	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST		
APPENDIX B. TEST RESULTS OF RADIATED TEST		
APPENDIX C. TEST SETUP PHOTOGRAPHS		
APPENDIX D. REFERENCE REPORT		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG721503-02B	Rev. 01	Initial issue of report	Apr. 13, 2017

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 38) (Band 41)	EIRP < 2Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	Reporting Only	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 38) (Band 41)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 38)(Band 41)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 38)(Band 41)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 20.89 dB at 7772.000 MHz



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10813
FCC ID	IHDT56WC3
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/ WLAN2.4GHz 802.11b/g/n HT20/ WLAN5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 353307080007778 Radiation: 990005720044081
HW Version	DVT2
SW Version	fastboot_sperry_sprint_oem_sprint_userdebug_7.1.1_NCQ26 .50_679_intcfg-test-keys_sprint.tar
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7MHz ~ 1914.3 MHz LTE Band 26 : 824.7MHz ~ 848.3 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 869.7 MHz ~ 893.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 2110.7 MHz~ 2179.3 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 25 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz

Maximum Output Power to Antenna	LTE Band 38 : 22.86 dBm LTE Band 41 : 23.31 dBm
Antenna Gain	LTE Band 38 : 1.39 dBi LTE Band 41 : 2.37 dBi
Type of Modulation	QPSK / 16QAM

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Acbel)	Model Name	C-P56 SPN5947A
	Power Rating	I/P: 100-240Vac, 130mA, O/P: 5.0Vdc, 1000mA		
AC Adapter 2	Brand Name	Motorola(Chenyang)	Model Name	C-P56 SPN5987A
	Power Rating	I/P: 100-240Vac, 130mA, O/P: 5.0Vdc, 1000mA		
Battery	Brand Name	Motorola (Amperex)	Model Name	GK40
	Power Rating	3.8Vdc,2685/2800mAh (Min/Typ)	Type	Li-ion
USB Cable	Brand Name	Motorola	Model Name	SKN6462A
	Signal Line Type	1.0 meter, shielded cable, without core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10813, FCC ID: IHDT56WC3) is electrically identical to the reference device (Model: 10643, FCC ID: IHDT56WC1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG721503B for the reference device Model: 10643, FCC ID: IHDT56WC1):

1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, Conducted Band-edge and Conducted spurious emission, the test result were consistent with FCC ID: IHDT56WC1. And adding LTE Band 38/41 to perform full test.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.7.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE	IHDT56WC1	Part22H.24E.27L.27M.27F.27H (FG721503B)	All sections applicable for LTE Band 2/4/5/7/12/13/17/25/26/66_

1.8 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M49G7D	-	0.2564	4M49W7D	-	0.1928
10	2575.0 ~ 2615.0	9M01G7D	0.0018	0.2547	9M01W7D	-	0.1954
15	2577.5 ~ 2612.5	13M4G7D	-	0.2661	13M5W7D	-	0.1959
20	2580.0 ~ 2610.0	18M3G7D	-	0.2564	18M5W7D	-	0.1972
LTE Band 41		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2498.5 ~ 2687.5	4M51G7D	-	0.3404	4M52W7D	-	0.2692
10	2501.0 ~ 2685.0	9M03G7D	0.0017	0.3573	9M03W7D	-	0.2767
15	2503.5 ~ 2682.5	13M5G7D	-	0.3698	13M5W7D	-	0.2655
20	2506.0 ~ 2680.0	18M4G7D	-	0.3548	18M3W7D	-	0.2729



1.9 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(F), 27(H)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output	38	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Power	41	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average	38	-	-				✓	✓	✓	✓		✓	✓	✓	✓
Ratio	41	-	-				✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99%	38	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Bandwidth	41	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted	38	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Band Edge	41	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted	38	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Spurious Emission	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency	38	-	-		✓			✓				✓		✓	
Stability	41	-	-		✓			✓				✓		✓	
E.I.R.P.	38	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated	38	-	-	✓	✓	✓	✓	✓		✓				✓	
Spurious Emission	41	-	-	✓	✓	✓	✓	✓		✓				✓	
Note	- The mark "✓" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

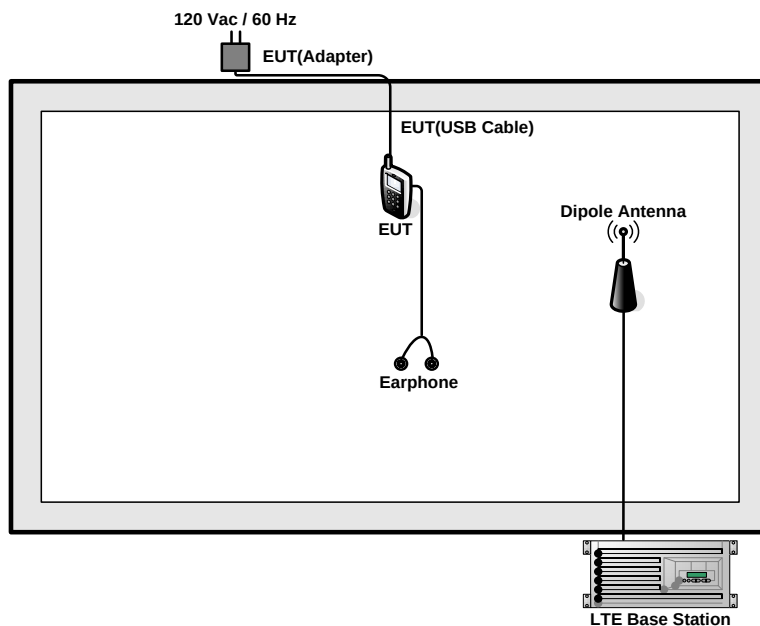

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	LH102	N/A	Unshielded,1.2m	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.8 dB

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss (dB)}. \\ &= 5.8 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

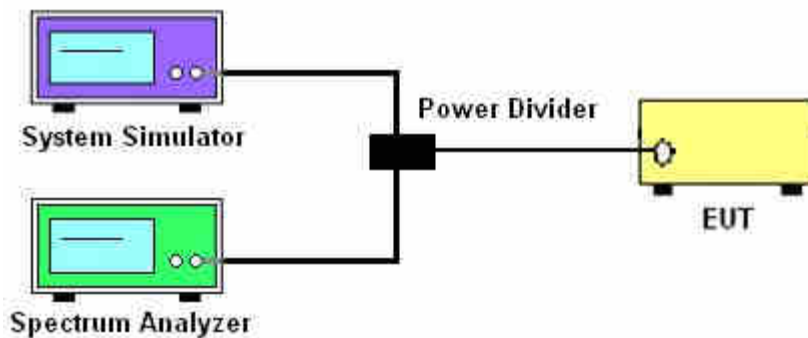

3.2.3 Frequency Stability

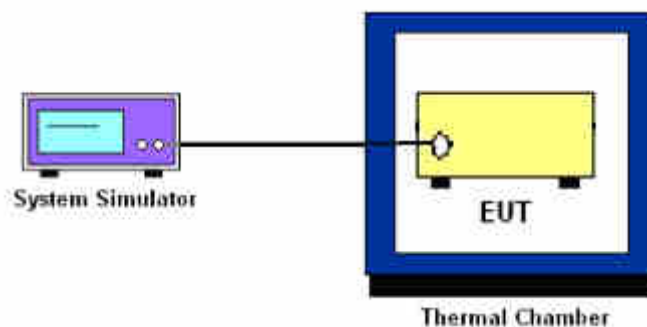

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band Band 38 and Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 38/41. Duty factor $= 10 \log (1/x)$, where x is the measured duty cycle.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log (P)] \text{ (dB)}$$

$$= [30 + 10 \log (P)] \text{ (dBm)} - [43 + 10 \log (P)] \text{ (dB)} = -13 \text{ dBm.}$$

10. For LTE Band 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. Offset has included the duty factor for LTE Band 38/41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log (P)]$ (dB)
 $= [30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB)
 $= -13$ dBm.
12. For Band 38, 41
The limit line is derived from $55 + 10 \log (P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10 \log (P)]$ (dB)
 $= [30 + 10 \log (P)]$ (dBm) - $[55 + 10 \log (P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

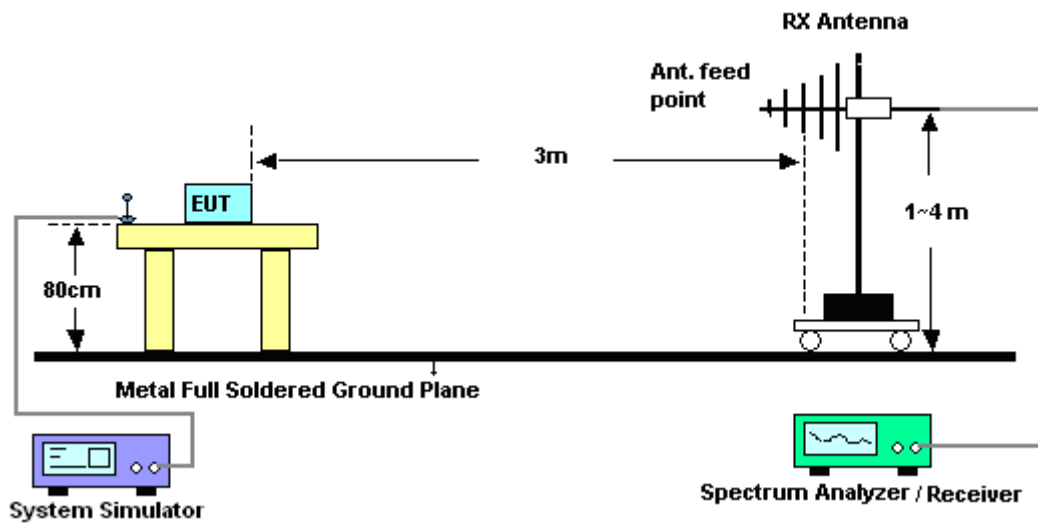

4.2.2 For radiated test above 1GHz

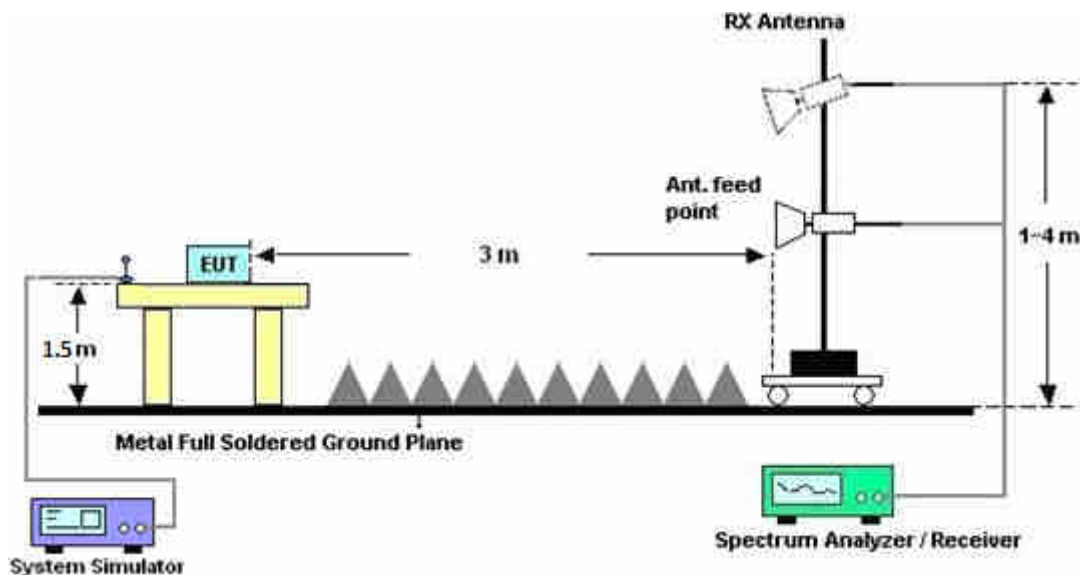

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 38, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
 $ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Apr. 09, 2017~ Apr. 10, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Apr. 09, 2017~ Apr. 10, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Radio communication	Anritsu	MT8820C	6201300652	2G/3G/LTE Band	Aug. 08, 2016	Apr. 09, 2017~ Apr. 10, 2017	Aug. 07, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Apr. 09, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Apr. 09, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Apr. 09, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Apr. 09, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Apr. 09, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Apr. 09, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 13, 2016	Apr. 09, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 09, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 09, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 09, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

ncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.35	22.36	22.70
20	1	49		22.57	22.51	22.56
20	1	99		22.35	22.43	22.35
20	50	0		21.63	21.70	21.80
20	50	24		21.74	21.86	21.71
20	50	50		21.82	21.73	21.49
20	100	0		21.65	21.71	21.56
20	1	0	16-QAM	21.39	21.23	21.47
20	1	49		21.41	21.56	21.52
20	1	99		21.13	21.09	21.06
20	50	0		20.65	20.77	20.81
20	50	24		20.71	20.77	20.81
20	50	50		20.65	20.74	20.67
20	100	0		20.57	20.81	20.65
15	1	0	QPSK	22.69	22.55	22.72
15	1	37		22.62	22.86	22.49
15	1	74		22.50	22.39	22.37
15	36	0		21.61	21.68	21.84
15	36	20		21.61	21.76	21.58
15	36	39		21.66	21.67	21.40
15	75	0		21.61	21.79	21.57
15	1	0	16-QAM	21.30	21.32	21.53
15	1	37		21.40	21.32	21.25
15	1	74		21.28	21.34	21.05
15	36	0		20.64	20.81	20.73
15	36	20		20.61	20.79	20.63
15	36	39		20.73	20.83	20.46
15	75	0		20.78	20.82	20.66



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.51	22.56	22.48
10	1	25		22.56	22.67	22.43
10	1	49		22.52	22.62	22.20
10	25	0		21.71	21.76	21.68
10	25	12		21.66	21.93	21.64
10	25	25		21.65	21.84	21.53
10	50	0		21.64	21.81	21.65
10	1	0	16-QAM	21.31	21.43	21.34
10	1	25		21.42	21.52	21.29
10	1	49		21.19	21.29	21.05
10	25	0		20.93	20.93	20.87
10	25	12		20.79	20.95	20.89
10	25	25		20.86	20.95	20.62
10	50	0		20.66	20.71	20.66
5	1	0	QPSK	22.43	22.61	22.25
5	1	12		22.53	22.70	22.46
5	1	24		22.44	22.55	22.23
5	12	0		21.75	21.75	21.50
5	12	7		21.73	21.87	21.57
5	12	13		21.74	21.76	21.41
5	25	0		21.74	21.74	21.39
5	1	0	16-QAM	21.24	21.31	21.20
5	1	12		21.46	21.46	21.20
5	1	24		21.30	21.32	21.08
5	12	0		20.80	20.64	20.53
5	12	7		21.00	20.87	20.62
5	12	13		20.99	20.79	20.56
5	25	0		20.94	20.83	20.70



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.32	22.43	22.90
20	1	49		22.36	22.97	23.13
20	1	99		22.18	22.51	22.60
20	50	0		21.44	21.94	22.19
20	50	24		21.54	21.92	22.14
20	50	50		21.57	21.80	22.12
20	100	0		21.46	21.75	22.24
20	1	0	16-QAM	21.08	21.28	21.95
20	1	49		21.32	21.71	21.99
20	1	99		21.10	21.18	21.98
20	50	0		20.42	20.87	20.99
20	50	24		20.34	20.83	21.04
20	50	50		20.33	20.72	21.21
20	100	0		20.35	20.68	21.42
15	1	0	QPSK	22.33	22.69	22.97
15	1	37		22.43	23.24	23.31
15	1	74		22.33	22.67	22.91
15	36	0		21.45	21.90	22.16
15	36	20		21.41	22.00	22.29
15	36	39		21.40	21.92	22.18
15	75	0		21.53	21.88	22.21
15	1	0	16-QAM	21.25	21.39	21.87
15	1	37		21.19	21.48	21.87
15	1	74		21.09	21.26	21.68
15	36	0		20.30	20.85	20.97
15	36	20		20.33	20.85	21.35
15	36	39		20.36	20.80	21.34
15	75	0		20.29	20.97	21.20



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.49	22.47	22.90
10	1	25		22.43	22.75	23.16
10	1	49		22.29	22.64	22.70
10	25	0		21.54	21.91	22.48
10	25	12		21.59	22.01	22.31
10	25	25		21.45	21.87	22.16
10	50	0		21.56	21.98	22.31
10	1	0	16-QAM	21.23	21.33	22.05
10	1	25		21.27	21.60	22.03
10	1	49		21.24	21.37	21.68
10	25	0		20.68	20.99	21.48
10	25	12		20.68	21.03	21.49
10	25	25		20.65	21.07	21.35
10	50	0		20.42	20.89	21.48
5	1	0	QPSK	22.39	22.53	22.77
5	1	12		22.40	22.74	22.95
5	1	24		22.23	22.67	22.82
5	12	0		21.59	21.84	22.15
5	12	7		21.43	21.93	22.23
5	12	13		21.39	21.84	22.03
5	25	0		21.54	21.82	22.15
5	1	0	16-QAM	21.20	21.42	21.70
5	1	12		21.15	21.57	21.93
5	1	24		21.09	21.40	21.61
5	12	0		20.50	20.80	21.21
5	12	7		20.52	21.00	21.25
5	12	13		20.41	20.86	21.09
5	25	0		20.65	21.04	21.34

**EIRP**

LTE Band 38 ($G_T - L_C = 1.39$ dB) QPSK			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5
(MHz)			
Conducted Power (dBm)	22.53	22.70	22.46
Conducted Power (Watts)	0.1791	0.1862	0.1762
EIRP(dBm)	23.92	24.09	23.85
EIRP(Watts)	0.2466	0.2564	0.2427

LTE Band 38 ($G_T - L_C = 1.39$ dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
(MHz)									
Conducted Power (dBm)	22.56	22.67	22.43	22.62	22.86	22.49	22.35	22.36	22.70
Conducted Power (Watts)	0.1803	0.1849	0.1750	0.1828	0.1932	0.1774	0.1718	0.1722	0.1862
EIRP(dBm)	23.95	24.06	23.82	24.01	24.25	23.88	23.74	23.75	24.09
EIRP(Watts)	0.2483	0.2547	0.2410	0.2518	0.2661	0.2443	0.2366	0.2371	0.2564



LTE Band 38 ($G_T - L_C = 1.39$ dB) 16QAM			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5
(MHz)			
Conducted Power (dBm)	21.46	21.46	21.20
Conducted Power (Watts)	0.1400	0.1400	0.1318
EIRP(dBm)	22.85	22.85	22.59
EIRP(Watts)	0.1928	0.1928	0.1816

LTE Band 38 ($G_T - L_C = 1.39$ dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
(MHz)									
Conducted Power (dBm)	21.42	21.52	21.29	21.30	21.32	21.53	21.41	21.56	21.52
Conducted Power (Watts)	0.1387	0.1419	0.1346	0.1349	0.1355	0.1422	0.1384	0.1432	0.1419
EIRP(dBm)	22.81	22.91	22.68	22.69	22.71	22.92	22.80	22.95	22.91
EIRP(Watts)	0.1910	0.1954	0.1854	0.1858	0.1866	0.1959	0.1905	0.1972	0.1954



LTE Band 41 ($G_T - L_C = 2.37$ dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	22.40	22.74	22.95	22.43	22.75	23.16	22.43	23.24	23.31
Conducted Power (Watts)	0.1738	0.1879	0.1972	0.1750	0.1884	0.2070	0.1750	0.2109	0.2143
EIRP(dBm)	24.77	25.11	25.32	24.80	25.12	25.53	24.80	25.61	25.68
EIRP(Watts)	0.2999	0.3243	0.3404	0.3020	0.3251	0.3573	0.3020	0.3639	0.3698

LTE Band 41 ($G_T - L_C = 2.37$ dB) QPSK			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	22.36	22.97	23.13
Conducted Power (Watts)	0.1722	0.1982	0.2056
EIRP(dBm)	24.73	25.34	25.50
EIRP(Watts)	0.2972	0.3420	0.3548

LTE Band 41 ($G_T - L_C = 2.37$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	21.15	21.57	21.93	21.23	21.33	22.05	21.19	21.48	21.87
Conducted Power (Watts)	0.1303	0.1435	0.1560	0.1327	0.1358	0.1603	0.1315	0.1406	0.1538
EIRP(dBm)	23.52	23.94	24.30	23.60	23.70	24.42	23.56	23.85	24.24
EIRP(Watts)	0.2249	0.2477	0.2692	0.2291	0.2344	0.2767	0.2270	0.2427	0.2655

LTE Band 41 ($G_T - L_C = 2.37$ dB) 16QAM			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	21.32	21.71	21.99
Conducted Power (Watts)	0.1355	0.1483	0.1581
EIRP(dBm)	23.69	24.08	24.36
EIRP(Watts)	0.2339	0.2559	0.2729

**Peak-to-Average Ratio**


Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.74	4.72	4.9	5.45	PASS
Middle CH	3.91	4.72	4.78	5.39	
Highest CH	3.83	4.64	4.61	5.77	

Mode	LTE Band 41 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.81	5.19	4.58	5.36	PASS
Middle CH	4.32	5.8	4.64	5.42	
Highest CH	4.93	5.68	5.13	5.91	




LTE Band 38 / 20MHz / QPSK

Lowest Channel / 1RB

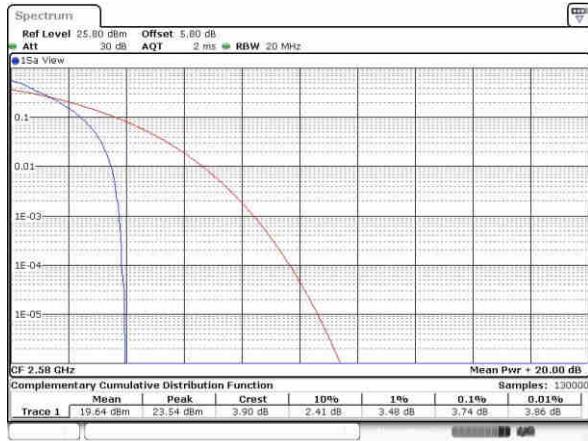


Lowest Channel / Full RB

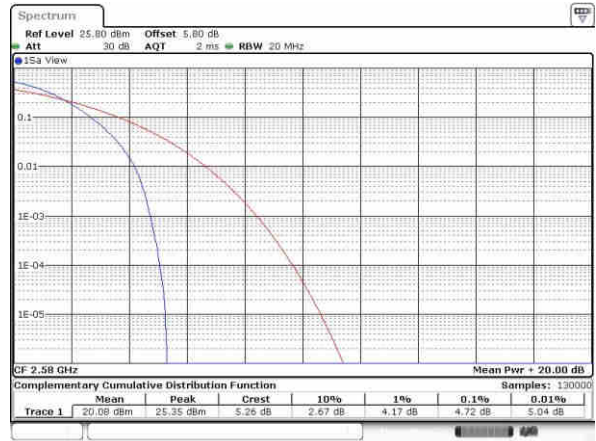

Middle Channel / 1RB



Middle Channel / Full RB

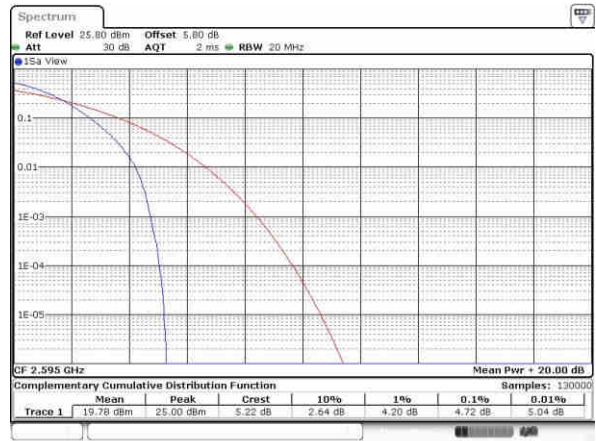

Highest Channel / 1RB




Highest Channel / Full RB






LTE Band 38 / 20MHz / 16QAM

Lowest Channel / 1RB

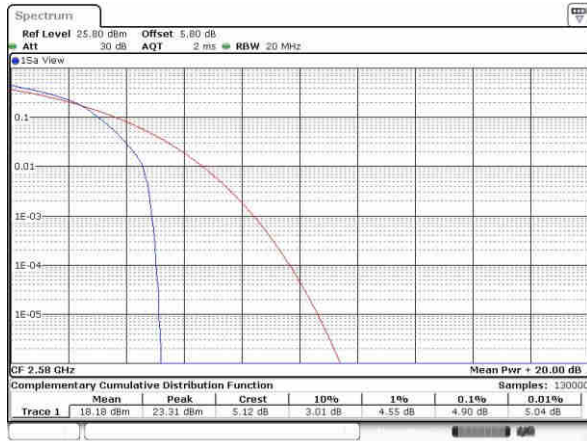

Date: 9 APR.2017 23:39:31

Lowest Channel / Full RB

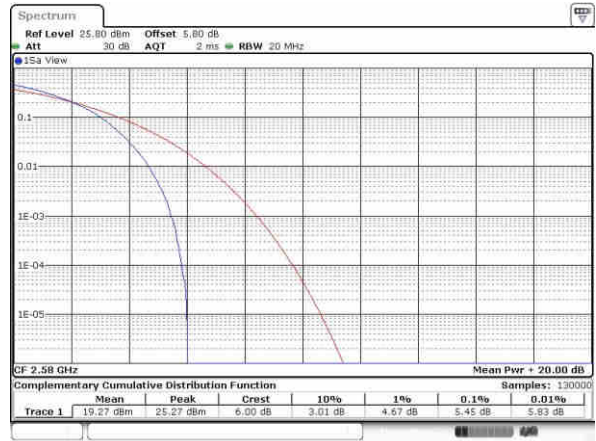

Date: 9 APR.2017 23:39:56

Middle Channel / 1RB



Date: 9 APR.2017 23:41:47

Middle Channel / Full RB



Date: 9 APR.2017 23:41:26

Highest Channel / 1RB



Date: 9 APR.2017 23:42:45

Highest Channel / Full RB




Date: 9 APR.2017 23:43:11




LTE Band 41 / 20MHz / QPSK

Lowest Channel / 1RB

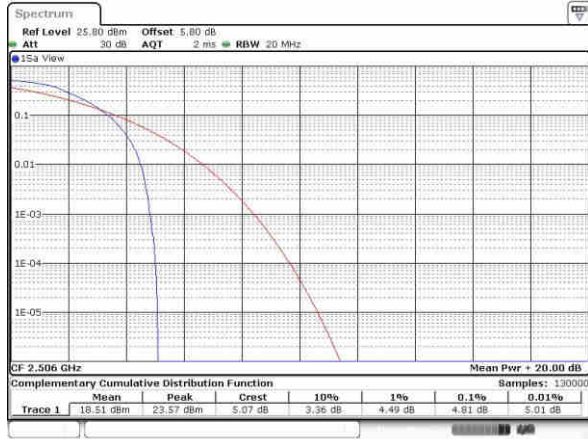


Date: 10 APR 2017 05:23:39

Lowest Channel / Full RB

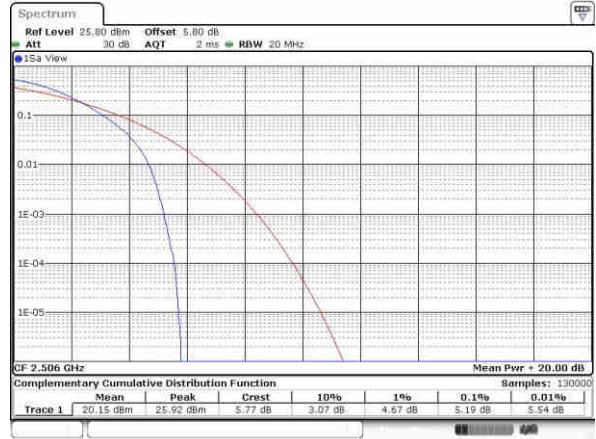


Date: 10 APR 2017 05:24:28

Middle Channel / 1RB

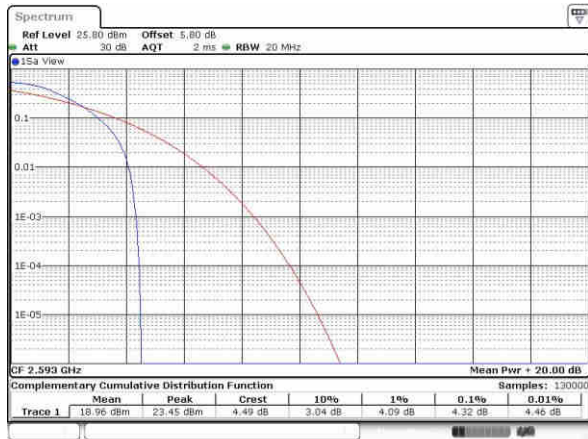

Date: 10 APR 2017 05:26:02

Middle Channel / Full RB

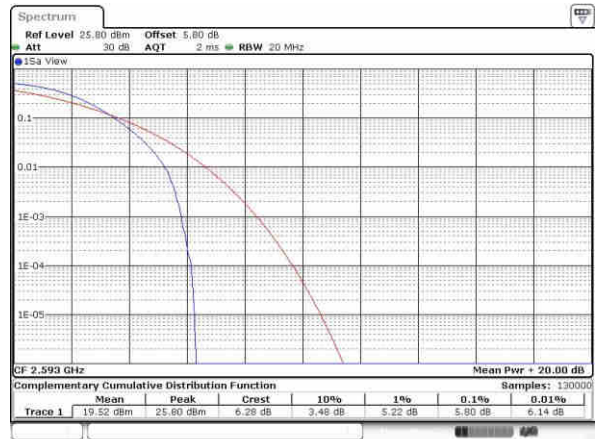


Date: 10 APR 2017 05:24:58

Highest Channel / 1RB



Date: 10 APR 2017 05:26:19

Highest Channel / Full RB

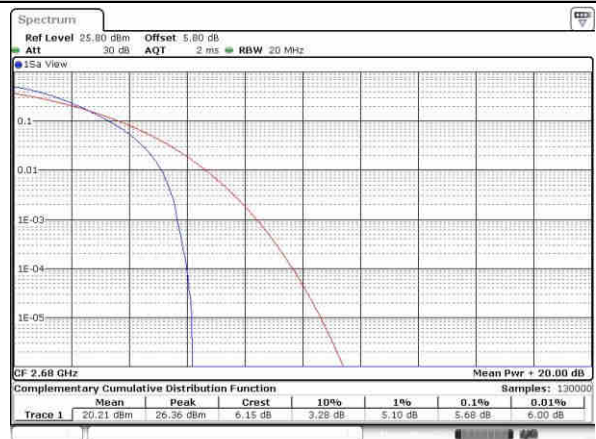


Date: 10 APR 2017 05:28:13




LTE Band 41 / 20MHz / 16QAM

Lowest Channel / 1RB

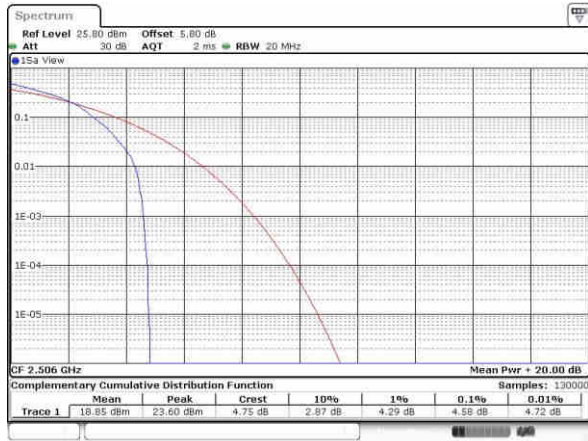

Date: 10 APR 2017 05:23:52

Lowest Channel / Full RB

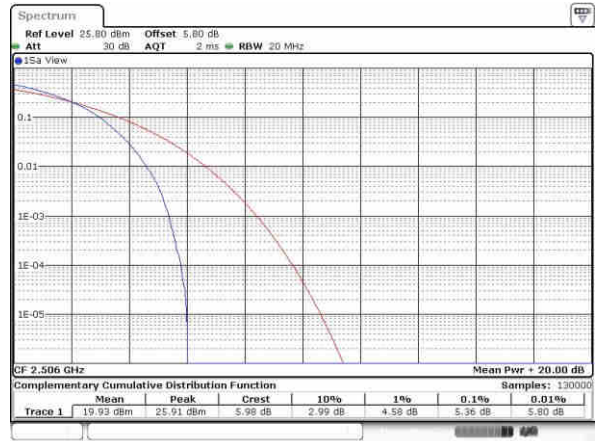

Date: 10 APR 2017 05:24:14

Middle Channel / 1RB



Date: 10 APR 2017 05:25:38

Middle Channel / Full RB



Date: 10 APR 2017 05:25:20

Highest Channel / 1RB



Date: 10 APR 2017 05:27:03

Highest Channel / Full RB



Date: 10 APR 2017 05:27:49

**26dB Bandwidth**


Mode	LTE Band 38 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.895	4.775	9.85	9.75	14.206	14.116	20.1	20.34
Middle CH	-	-	-	-	4.885	4.885	9.63	9.67	14.116	14.296	20.18	20.02
Highest CH	-	-	-	-	4.805	4.875	9.65	9.93	14.116	14.116	20.1	20.14

Mode	LTE Band 41 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.885	4.905	9.93	9.77	14.176	14.386	20.14	20.06
Middle CH	-	-	-	-	4.915	4.945	9.65	9.61	14.416	14.356	19.98	20.06
Highest CH	-	-	-	-	4.895	4.905	9.77	9.85	14.715	14.386	20.18	20.22




LTE Band 38

Lowest Channel / 5MHz / QPSK

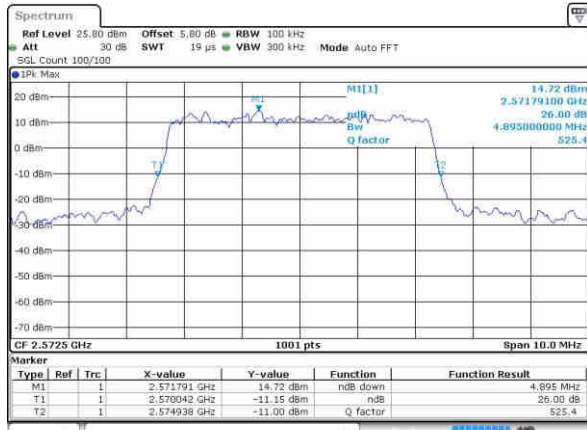


Date: 9 APR 2017 23:25:40

Lowest Channel / 5MHz / 16QAM

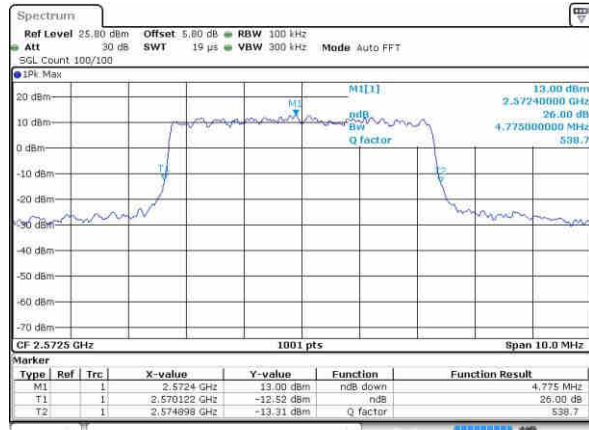


Date: 9 APR 2017 23:26:06

Middle Channel / 5MHz / QPSK

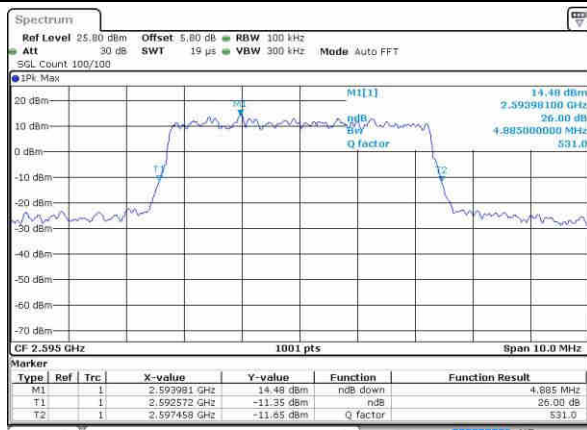


Date: 9 APR 2017 23:27:05

Middle Channel / 5MHz / 16QAM

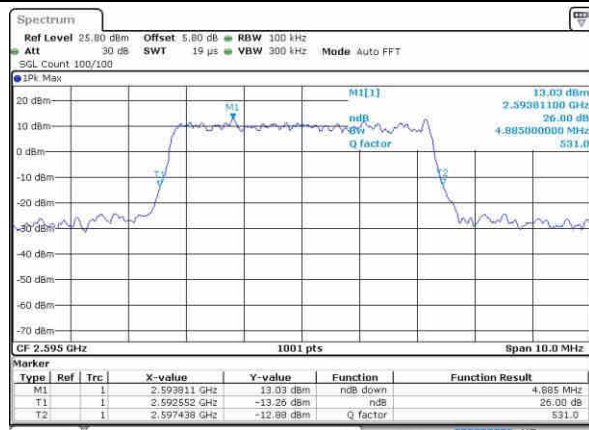


Date: 9 APR 2017 23:26:30

Highest Channel / 5MHz / QPSK

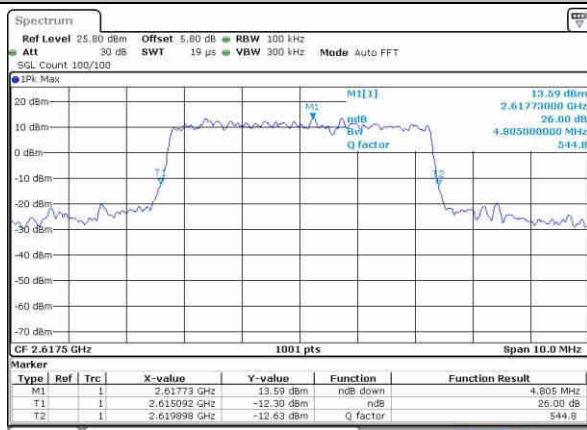

Date: 9 APR 2017 23:27:42

Highest Channel / 5MHz / 16QAM

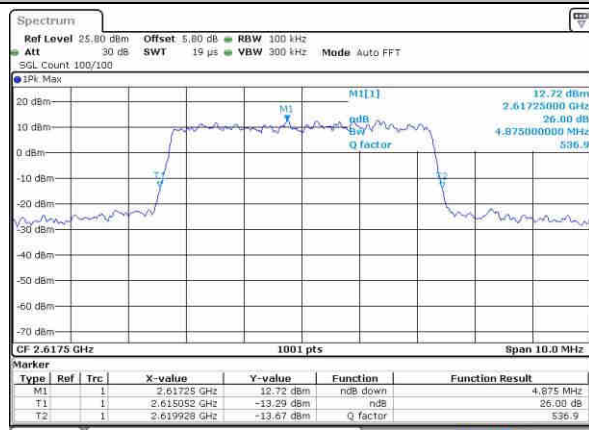


Date: 9 APR 2017 23:28:56




LTE Band 38

Lowest Channel / 10MHz / QPSK

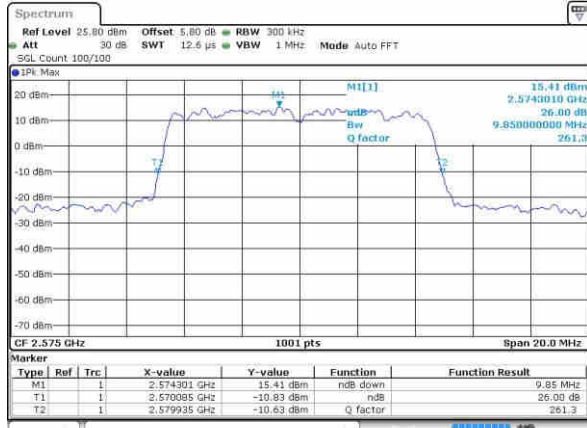


Date: 9 APR 2017 23:29:56

Lowest Channel / 10MHz / 16QAM

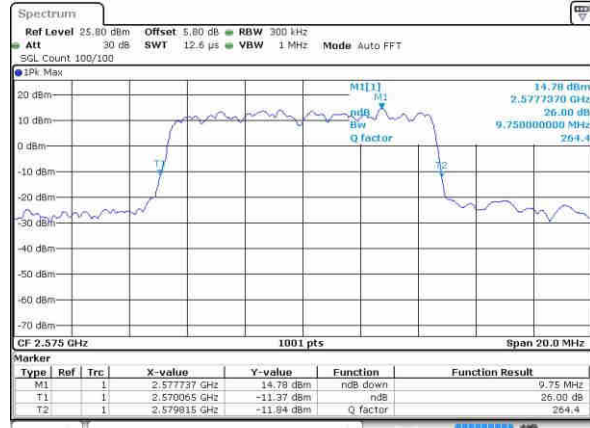


Date: 9 APR 2017 23:29:33

Middle Channel / 10MHz / QPSK

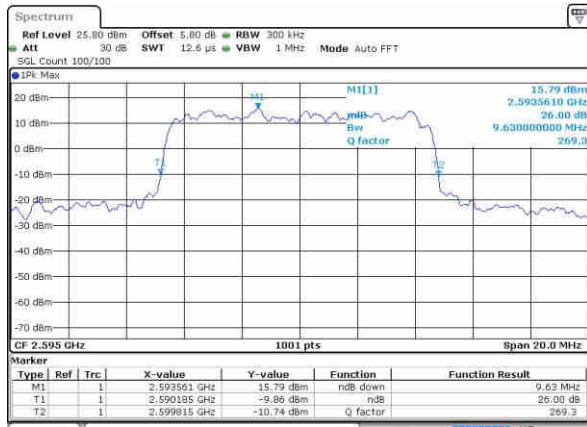


Date: 9 APR 2017 23:30:18

Middle Channel / 10MHz / 16QAM

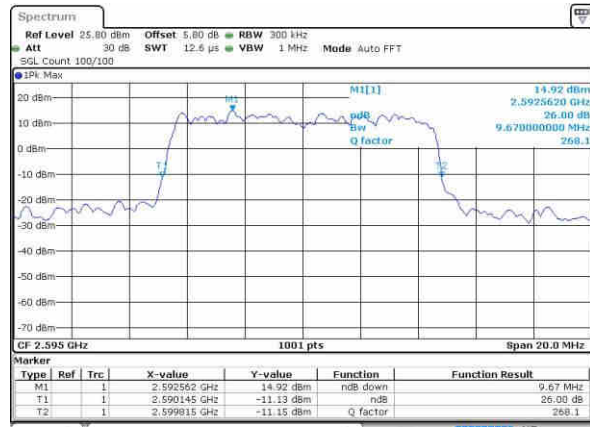


Date: 9 APR 2017 23:30:50

Highest Channel / 10MHz / QPSK

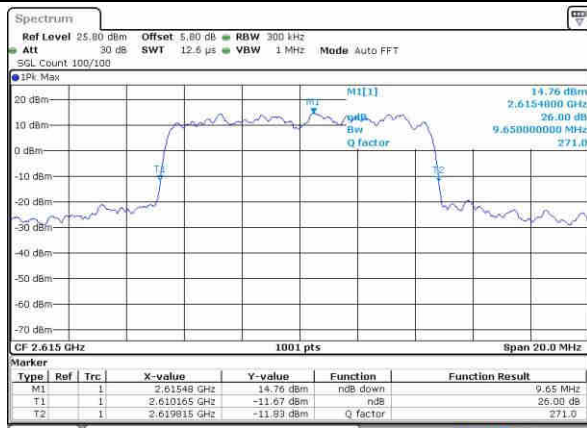

Date: 9 APR 2017 23:31:47

Highest Channel / 10MHz / 16QAM

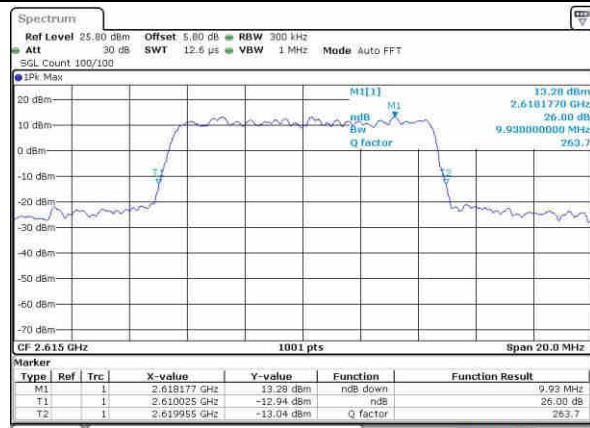


Date: 9 APR 2017 23:31:15




LTE Band 38


Lowest Channel / 15MHz / QPSK

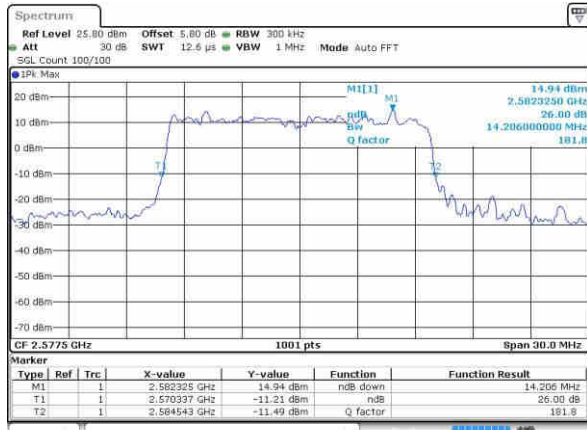


Lowest Channel / 15MHz / 16QAM

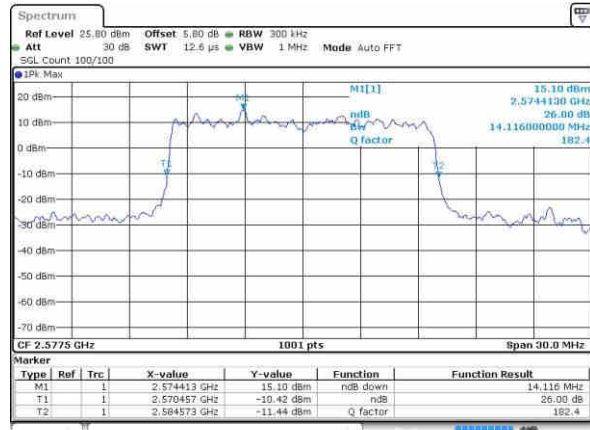


Middle Channel / 15MHz / QPSK

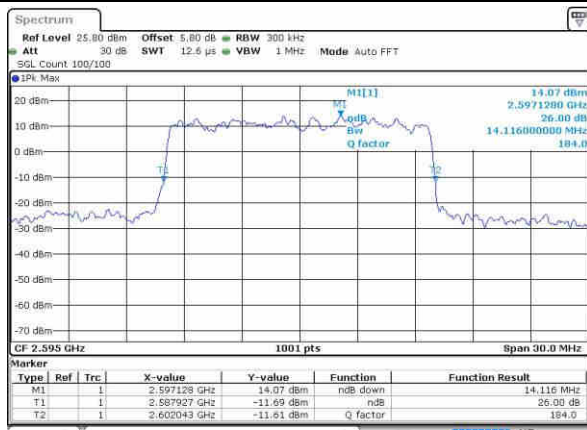


Middle Channel / 15MHz / 16QAM

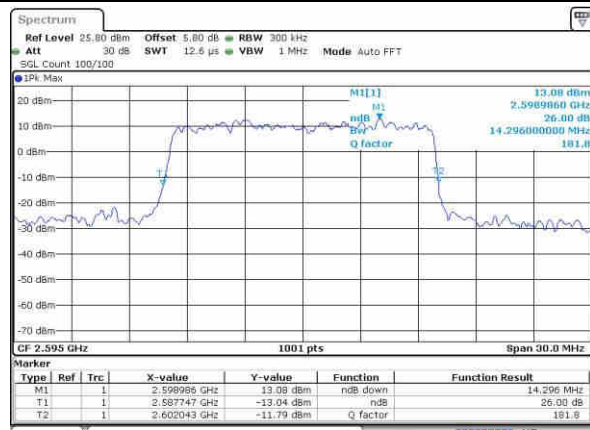

Highest Channel / 15MHz / QPSK

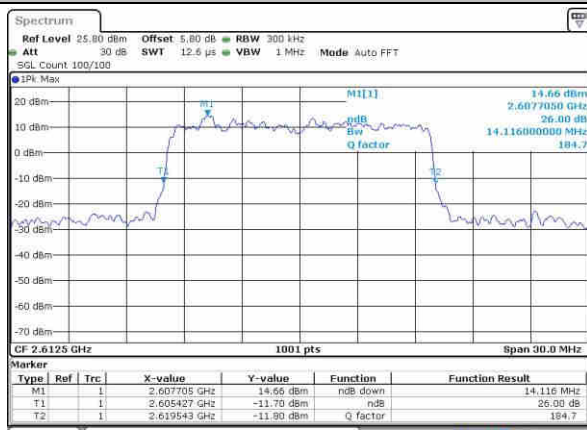


Highest Channel / 15MHz / 16QAM

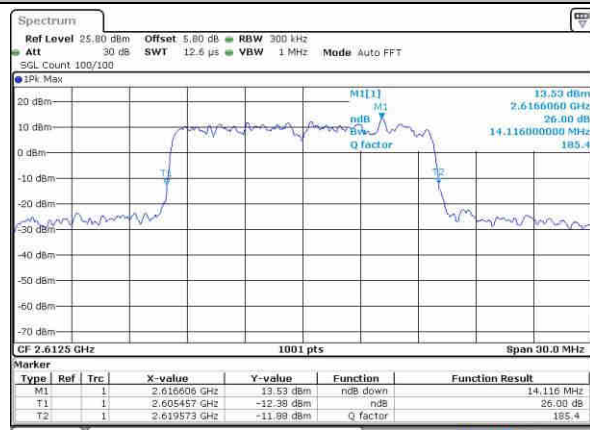




LTE Band 38


Lowest Channel / 20MHz / QPSK

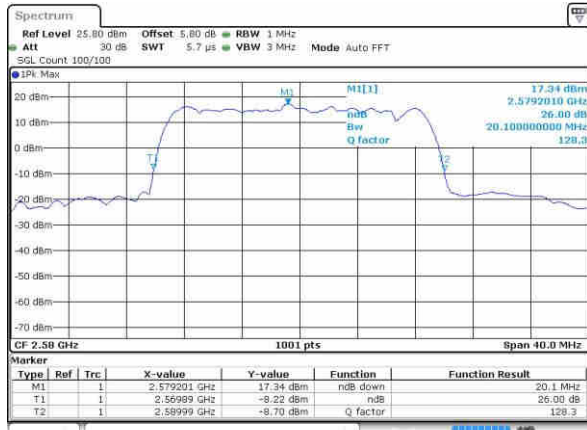


Lowest Channel / 20MHz / 16QAM

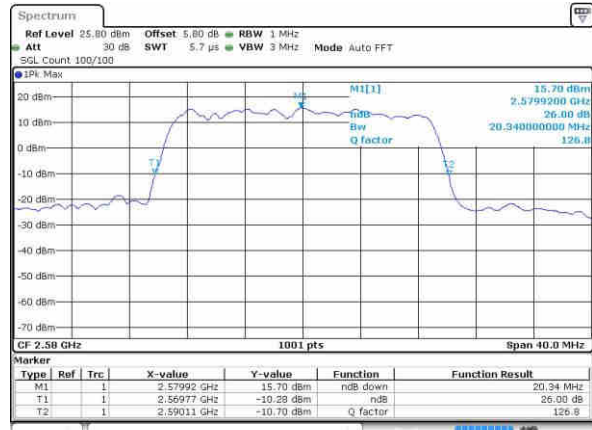


Middle Channel / 20MHz / QPSK

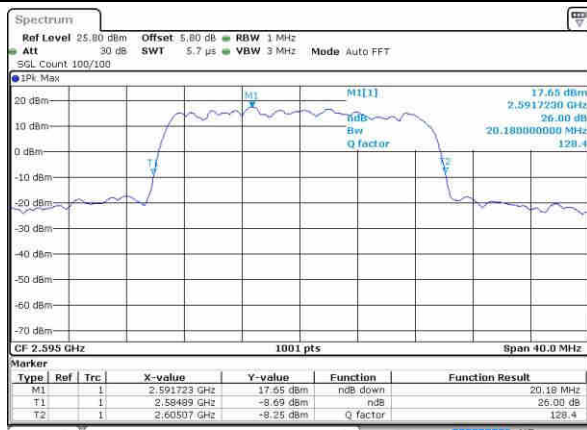


Middle Channel / 20MHz / 16QAM

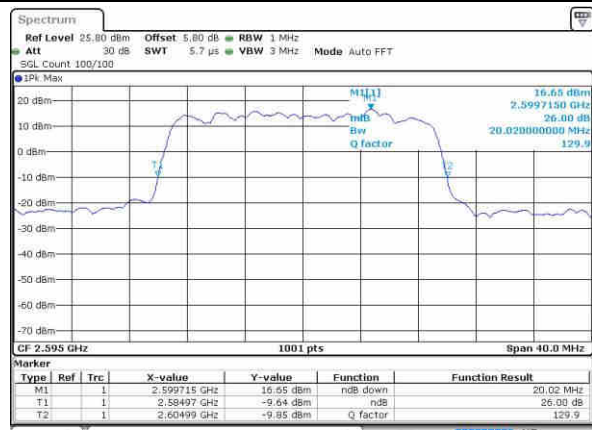

Highest Channel / 20MHz / QPSK

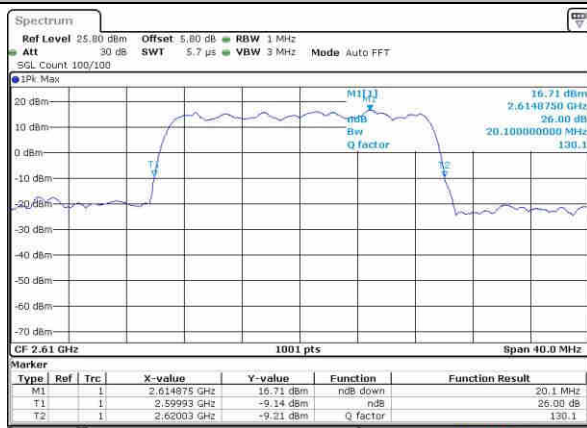


Highest Channel / 20MHz / 16QAM

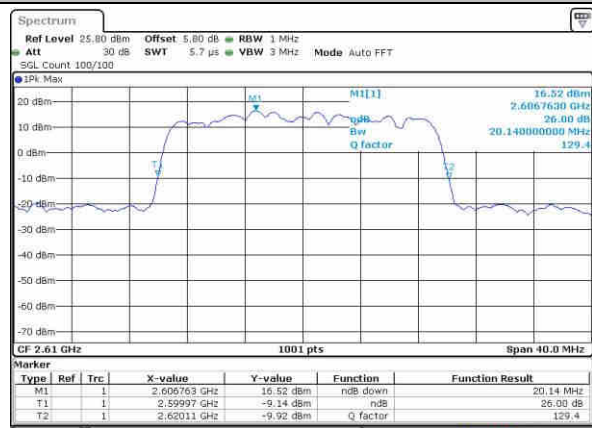




LTE Band 41

Lowest Channel / 5MHz / QPSK

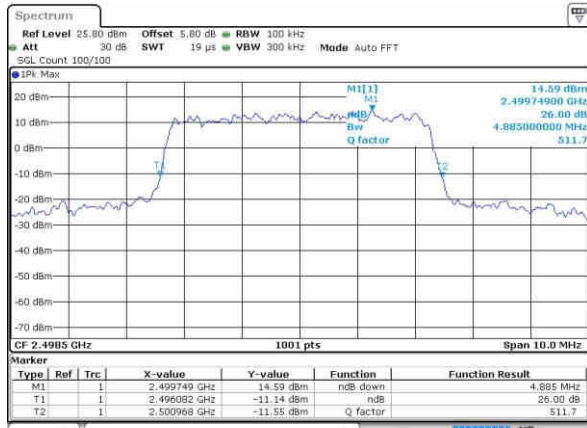


Date: 10 APR 2017 05:10:07

Lowest Channel / 5MHz / 16QAM

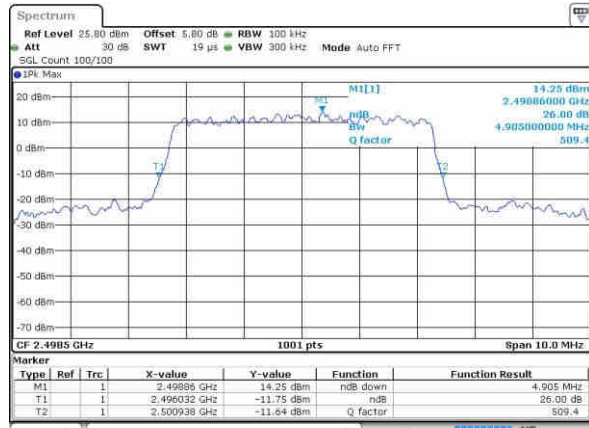


Date: 10 APR 2017 05:10:29

Middle Channel / 5MHz / QPSK

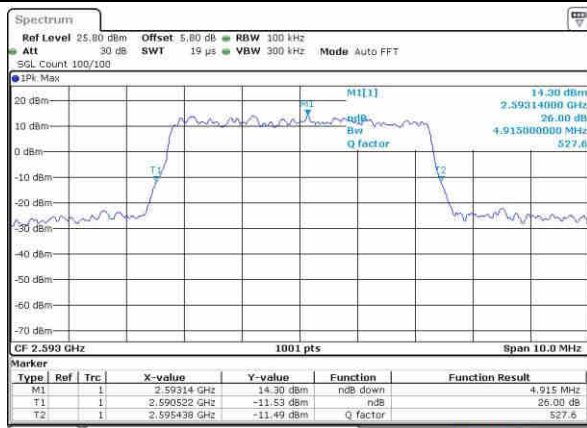


Date: 10 APR 2017 05:11:40

Middle Channel / 5MHz / 16QAM

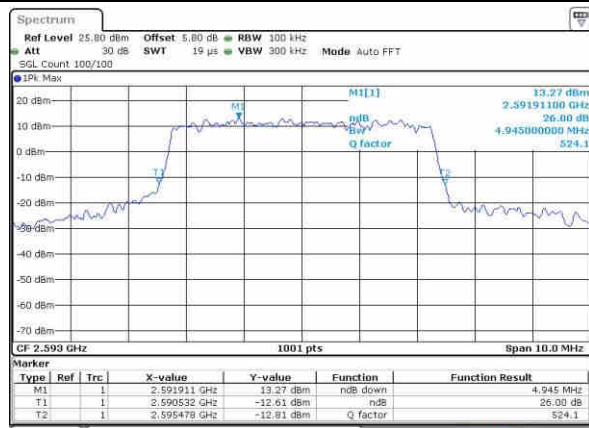


Date: 10 APR 2017 05:10:52

Highest Channel / 5MHz / QPSK

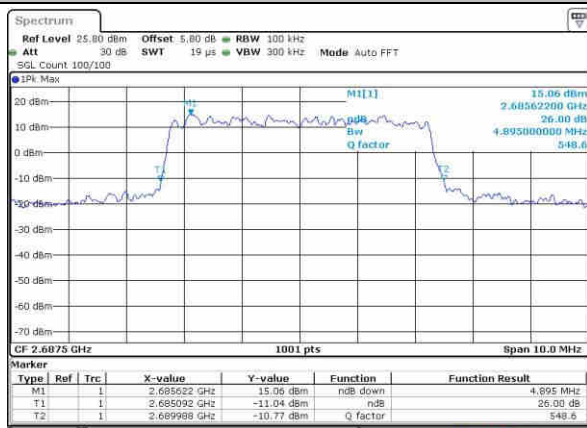

Date: 10 APR 2017 05:12:06

Highest Channel / 5MHz / 16QAM

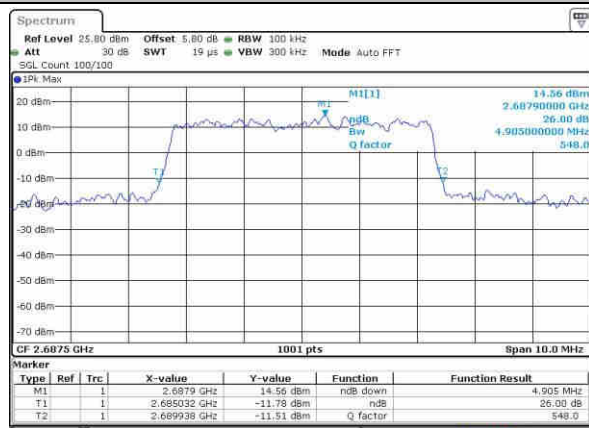


Date: 10 APR 2017 05:12:31




LTE Band 41


Lowest Channel / 10MHz / QPSK

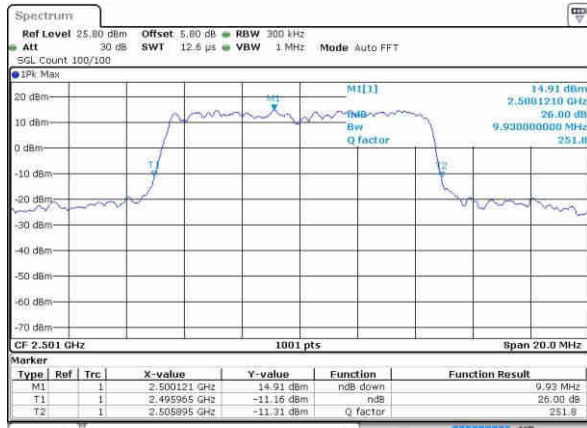


Lowest Channel / 10MHz / 16QAM

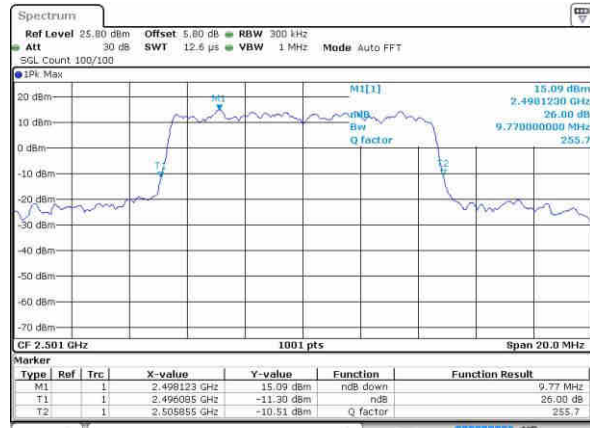


Middle Channel / 10MHz / QPSK

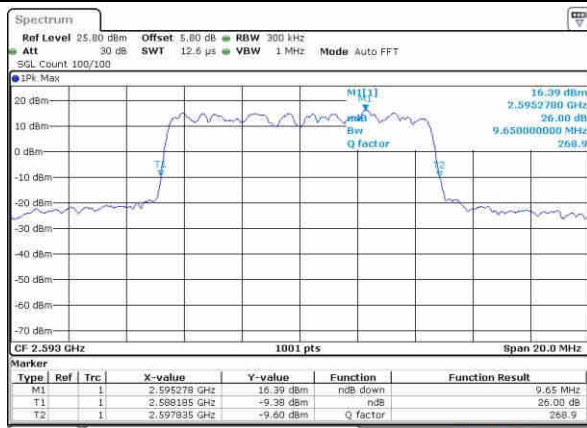


Middle Channel / 10MHz / 16QAM

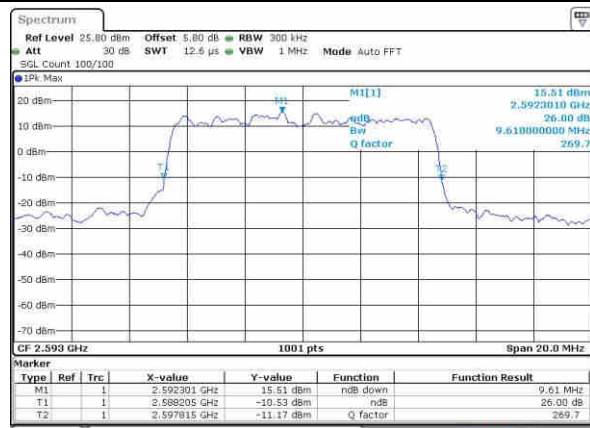

Highest Channel / 10MHz / QPSK

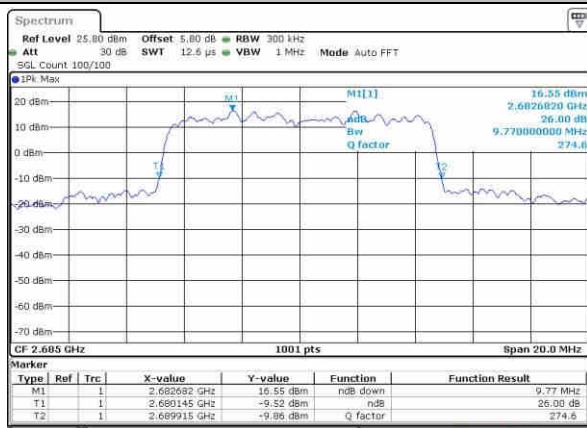


Highest Channel / 10MHz / 16QAM

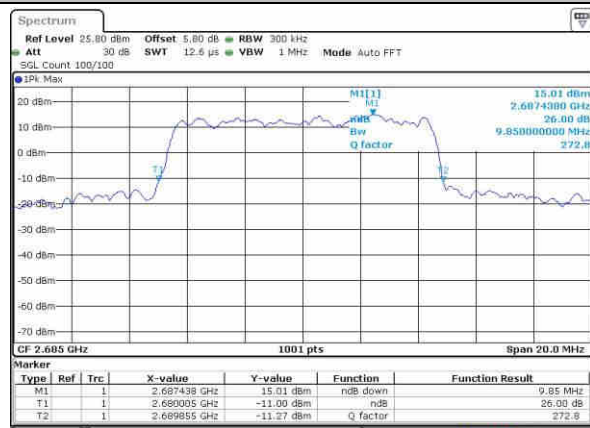




LTE Band 41

Lowest Channel / 15MHz / QPSK

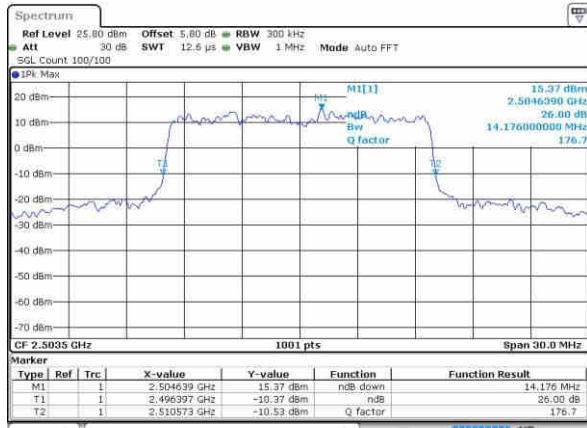


Date: 10 APR 2017 05:15:57

Lowest Channel / 15MHz / 16QAM

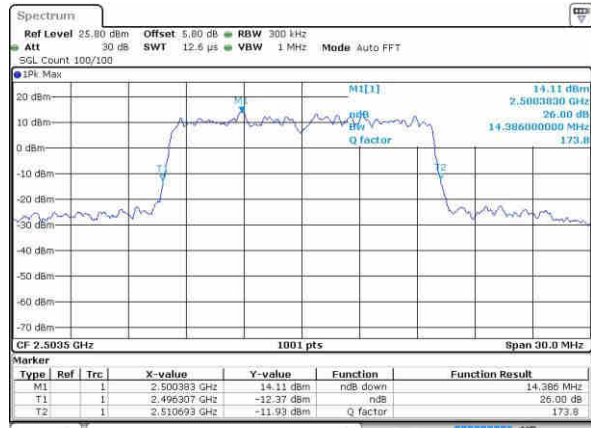


Date: 10 APR 2017 05:16:54

Middle Channel / 15MHz / QPSK

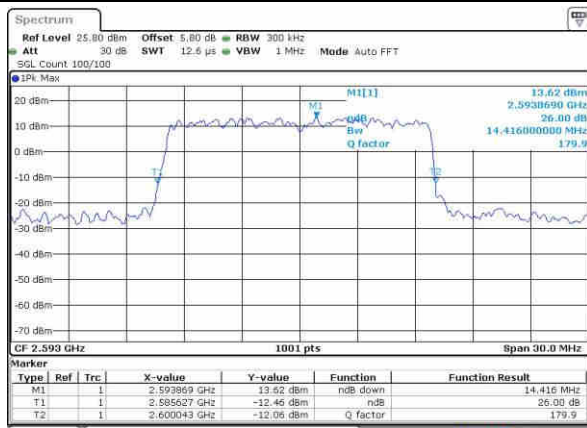


Date: 10 APR 2017 05:18:56

Middle Channel / 15MHz / 16QAM

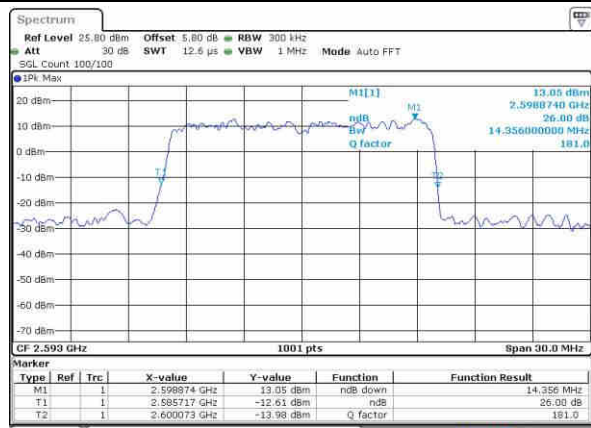


Date: 10 APR 2017 05:18:23

Highest Channel / 15MHz / QPSK

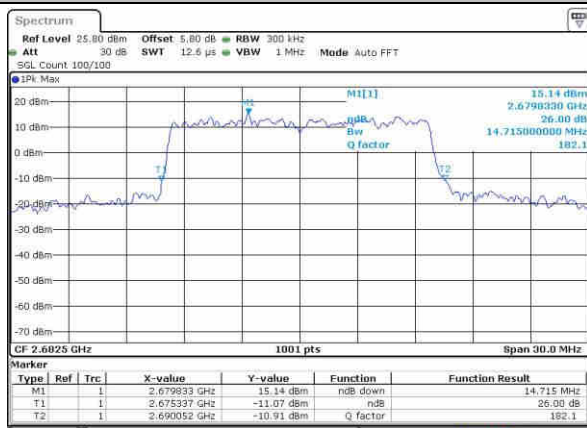

Date: 10 APR 2017 05:19:27

Highest Channel / 15MHz / 16QAM

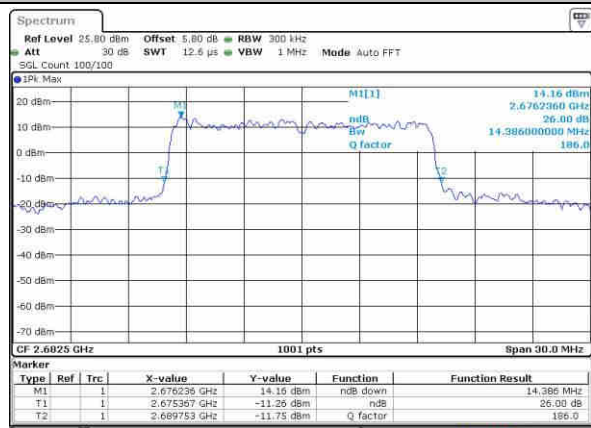


Date: 10 APR 2017 05:20:14




LTE Band 41

Lowest Channel / 20MHz / QPSK

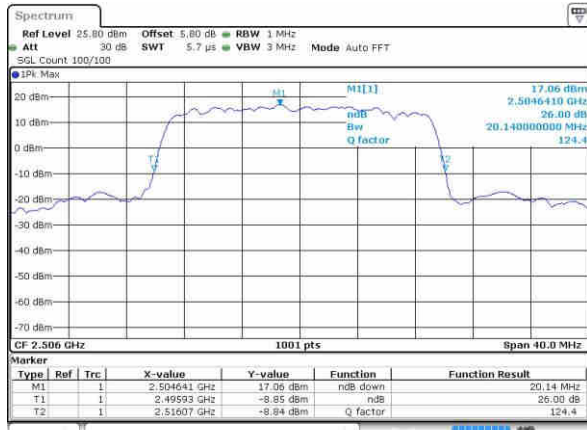


Date: 10 APR 2017 05:21:14

Lowest Channel / 20MHz / 16QAM

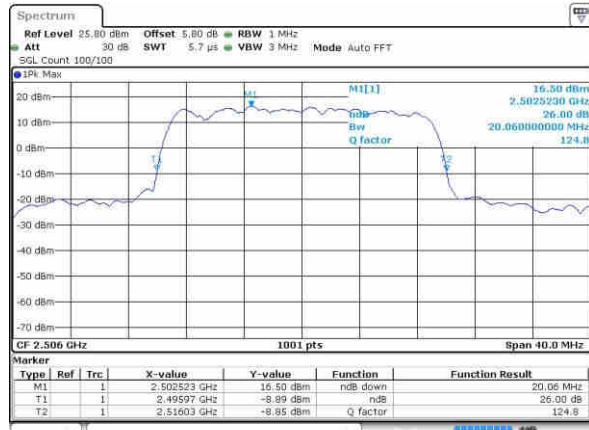


Date: 10 APR 2017 05:20:43

Middle Channel / 20MHz / QPSK

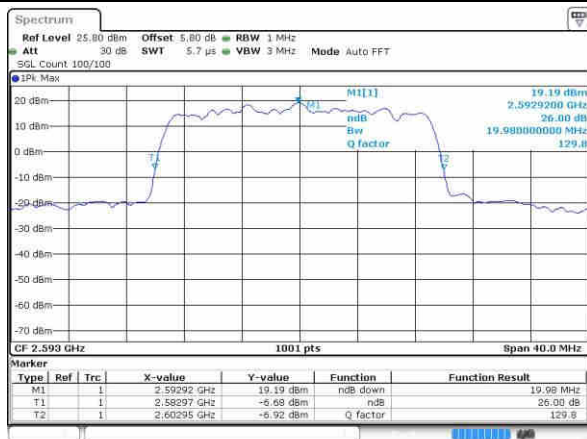


Date: 10 APR 2017 05:21:37

Middle Channel / 20MHz / 16QAM

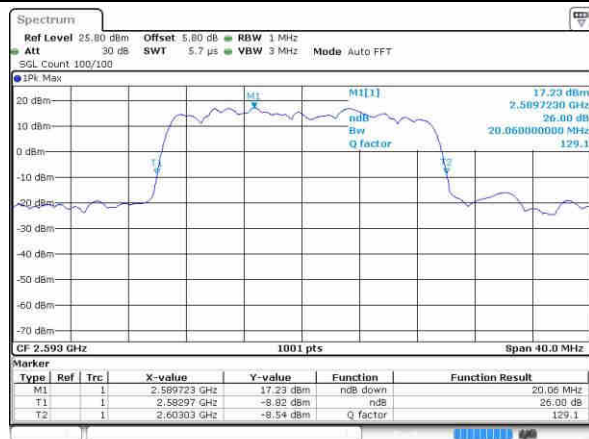


Date: 10 APR 2017 05:22:02

Highest Channel / 20MHz / QPSK

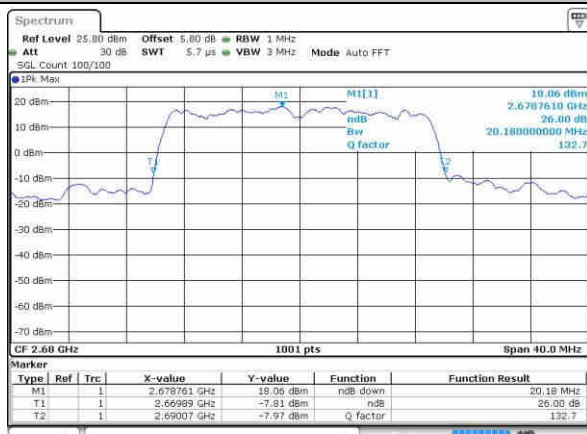

Date: 10 APR 2017 05:22:52

Highest Channel / 20MHz / 16QAM

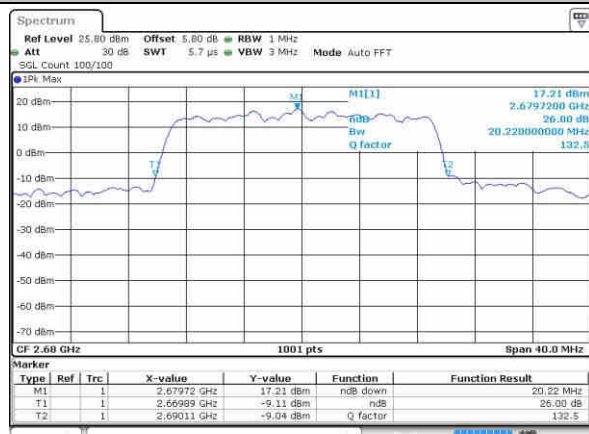

Date: 10 APR 2017 05:23:16

**Occupied Bandwidth**


Mode	LTE Band 38 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.47	4.47	9.01	9.01	13.37	13.37	18.34	18.46
Middle CH	-	-	-	-	4.49	4.49	8.89	8.95	13.43	13.37	18.1	18.34
Highest CH	-	-	-	-	4.49	4.49	9.01	9.01	13.34	13.46	18.26	18.46

Mode	LTE Band 41 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.47	4.48	9.03	9.01	13.43	13.46	18.42	18.26
Middle CH	-	-	-	-	4.5	4.47	9.01	9.03	13.52	13.46	18.22	18.26
Highest CH	-	-	-	-	4.51	4.52	8.97	8.99	13.4	13.43	18.42	18.34




LTE Band 38


Lowest Channel / 5MHz / QPSK

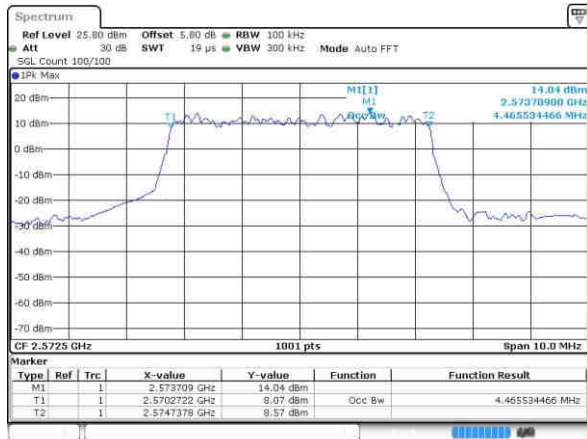


Lowest Channel / 5MHz / 16QAM

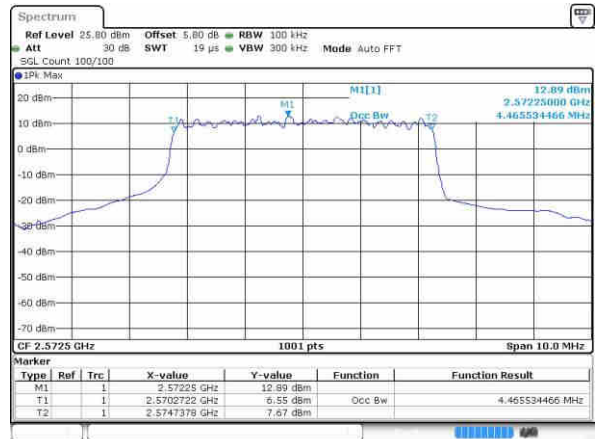


Middle Channel / 5MHz / QPSK

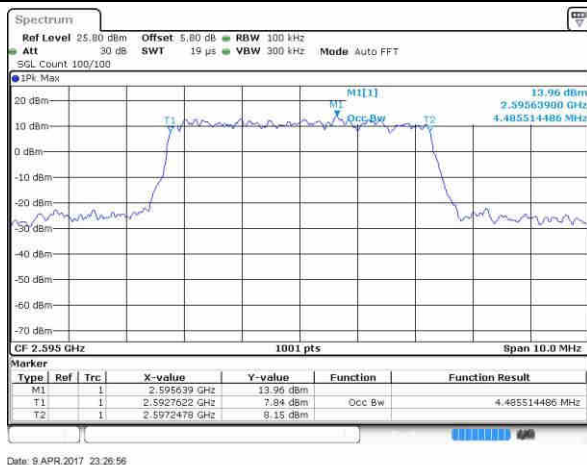


Middle Channel / 5MHz / 16QAM

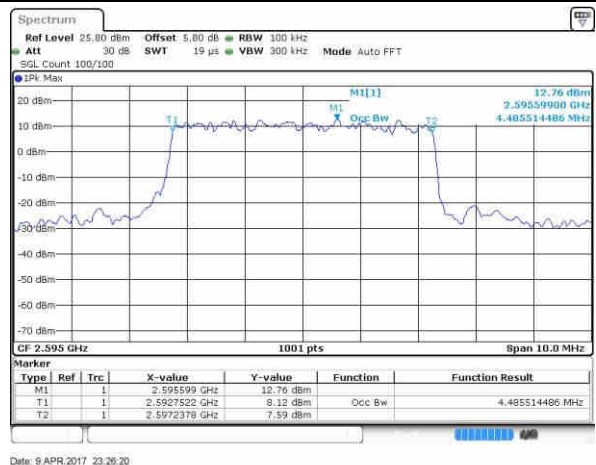

Highest Channel / 5MHz / QPSK

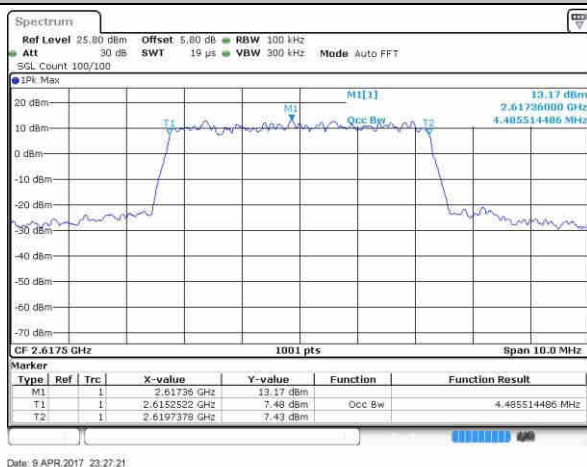


Highest Channel / 5MHz / 16QAM

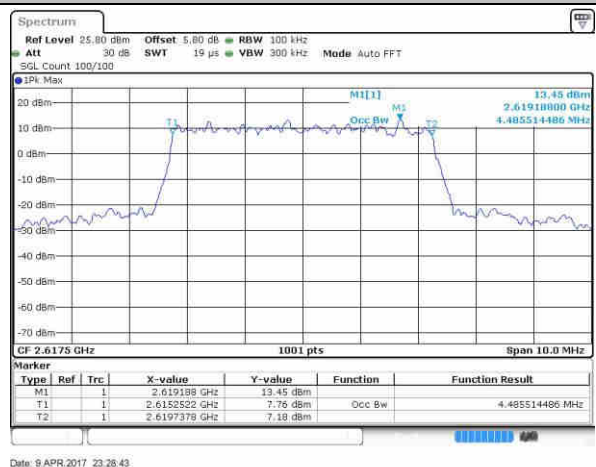




LTE Band 38

Lowest Channel / 10MHz / QPSK

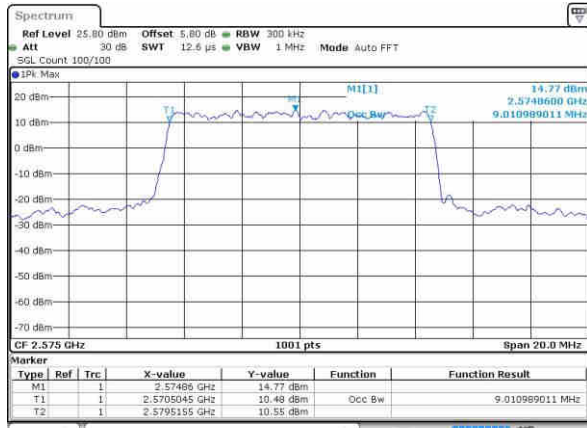


Date: 9 APR 2017 23:29:46

Lowest Channel / 10MHz / 16QAM

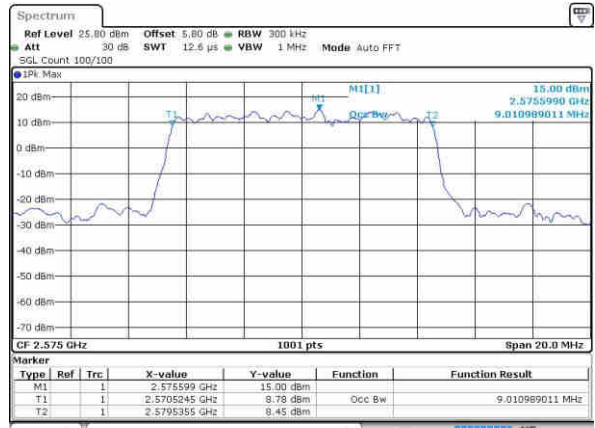


Date: 9 APR 2017 23:29:23

Middle Channel / 10MHz / QPSK

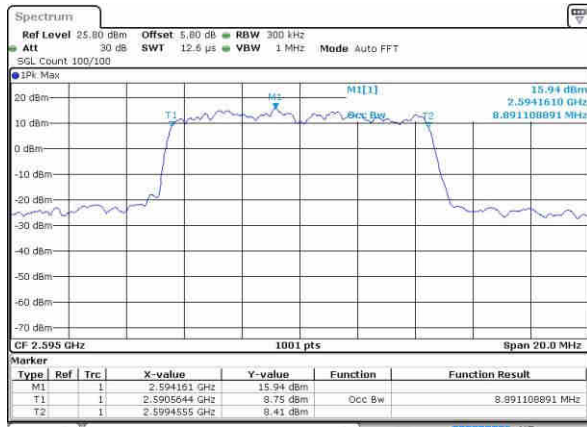


Date: 9 APR 2017 23:30:08

Middle Channel / 10MHz / 16QAM

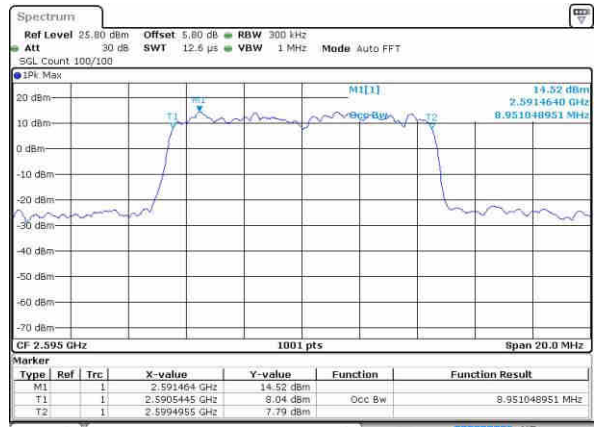


Date: 9 APR 2017 23:30:40

Highest Channel / 10MHz / QPSK

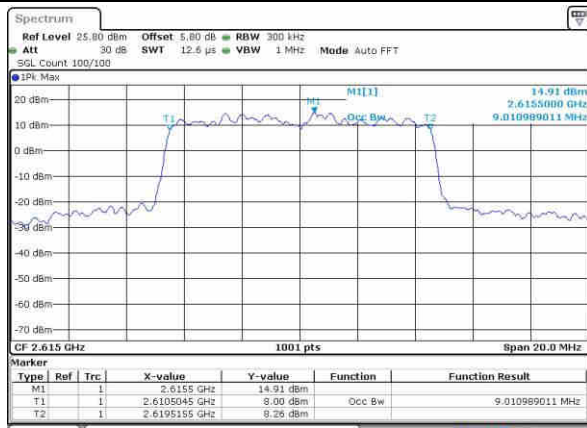

Date: 9 APR 2017 23:31:37

Highest Channel / 10MHz / 16QAM

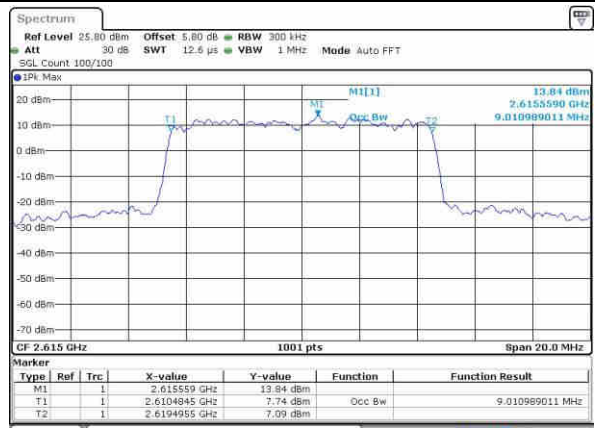


Date: 9 APR 2017 23:31:04




LTE Band 38


Lowest Channel / 15MHz / QPSK

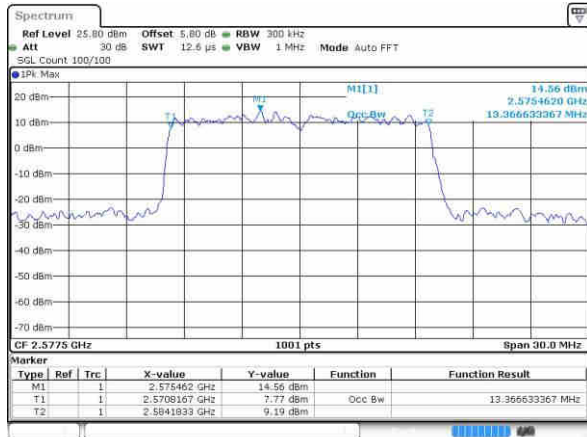


Lowest Channel / 15MHz / 16QAM

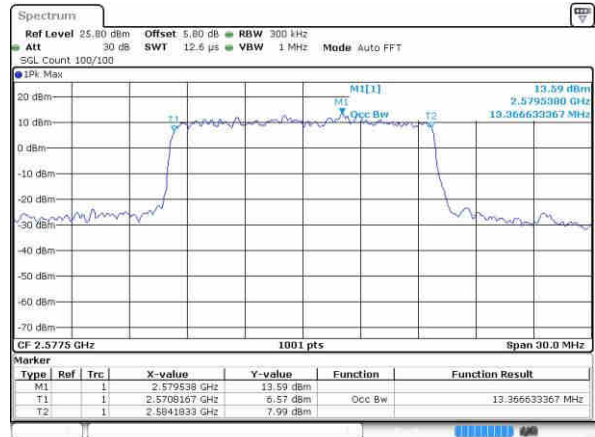


Middle Channel / 15MHz / QPSK

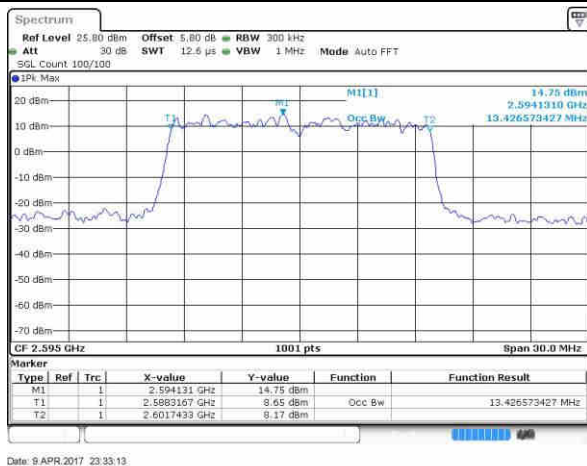


Middle Channel / 15MHz / 16QAM

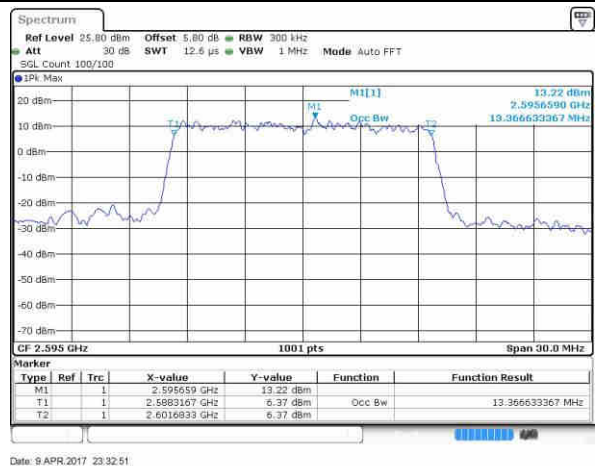

Highest Channel / 15MHz / QPSK

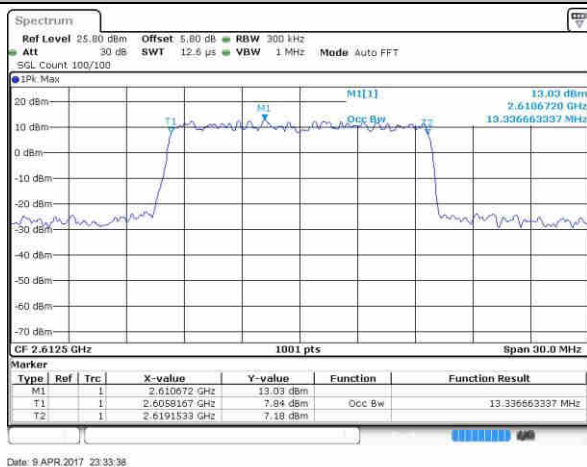


Highest Channel / 15MHz / 16QAM

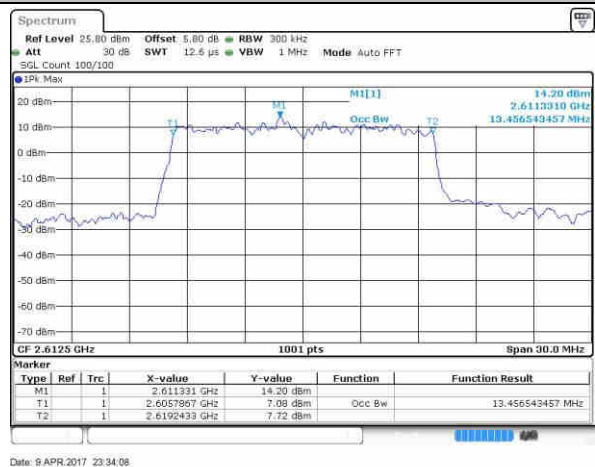




LTE Band 38

Lowest Channel / 20MHz / QPSK

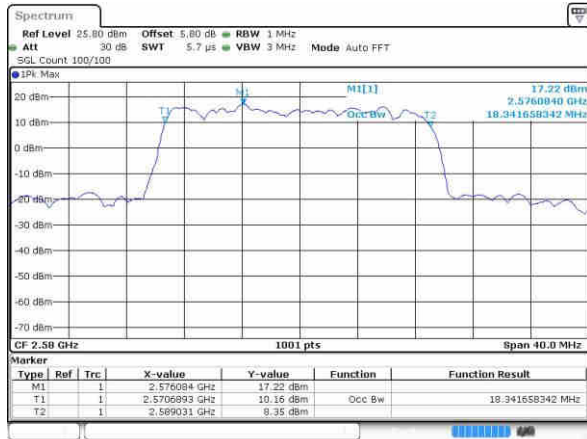


Date: 9 APR 2017 23:34:46

Lowest Channel / 20MHz / 16QAM

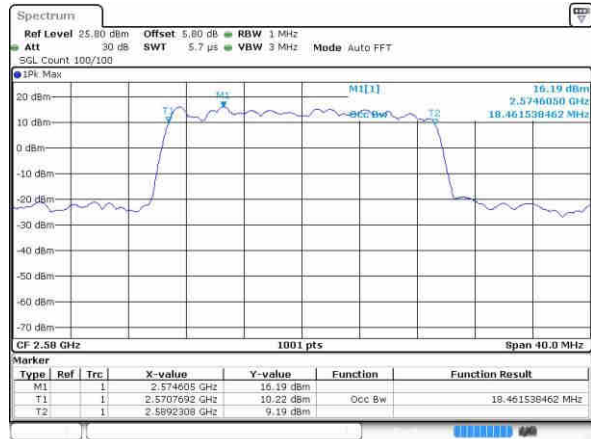


Date: 9 APR 2017 23:35:08

Middle Channel / 20MHz / QPSK

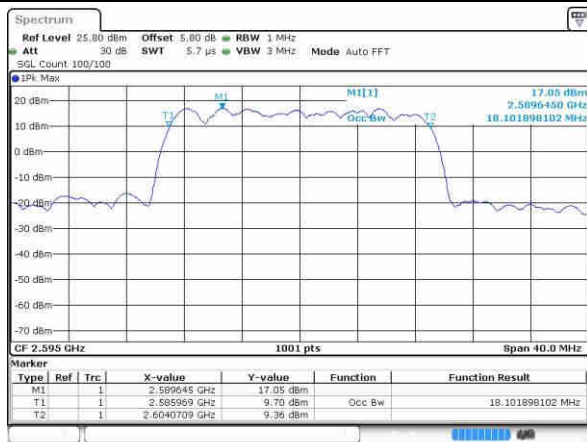


Date: 9 APR 2017 23:35:05

Middle Channel / 20MHz / 16QAM

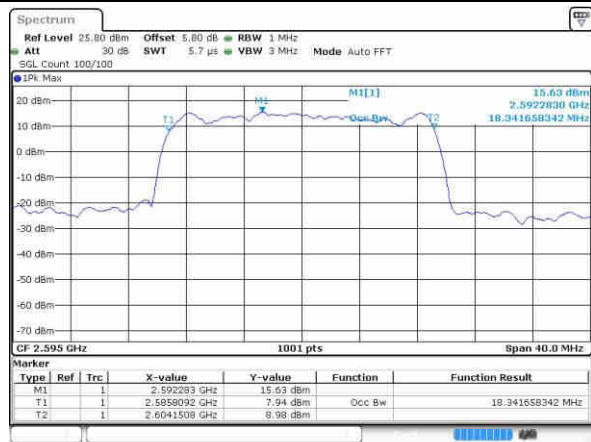


Date: 9 APR 2017 23:35:32

Highest Channel / 20MHz / QPSK

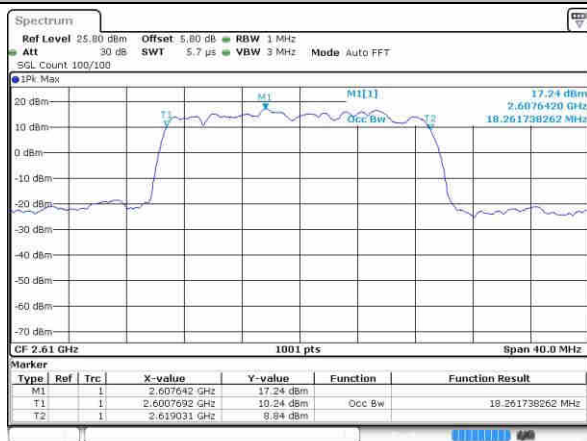

Date: 9 APR 2017 23:36:31

Highest Channel / 20MHz / 16QAM

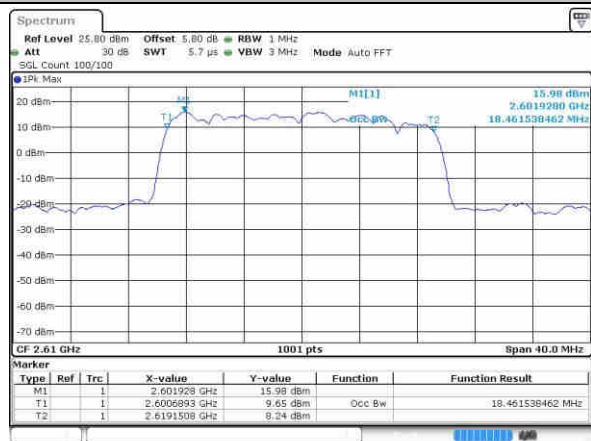


Date: 9 APR 2017 23:36:54




LTE Band 41


Lowest Channel / 5MHz / QPSK

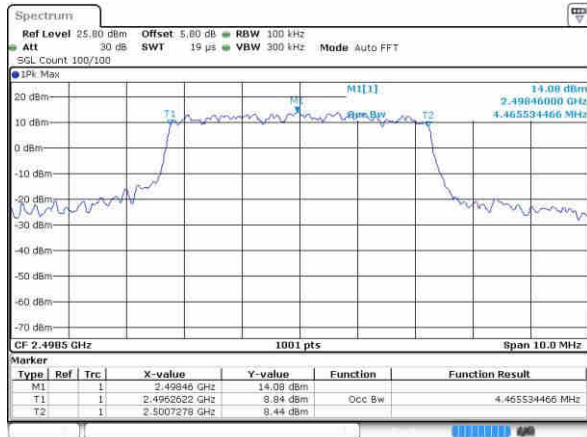


Lowest Channel / 5MHz / 16QAM

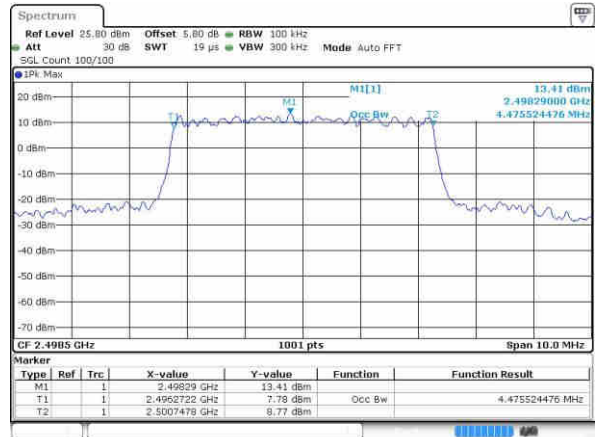


Middle Channel / 5MHz / QPSK

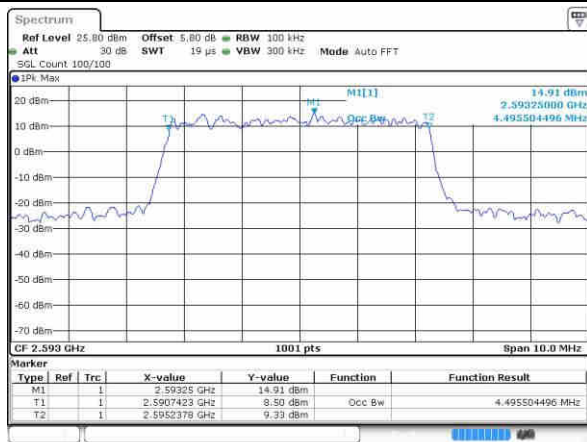


Middle Channel / 5MHz / 16QAM

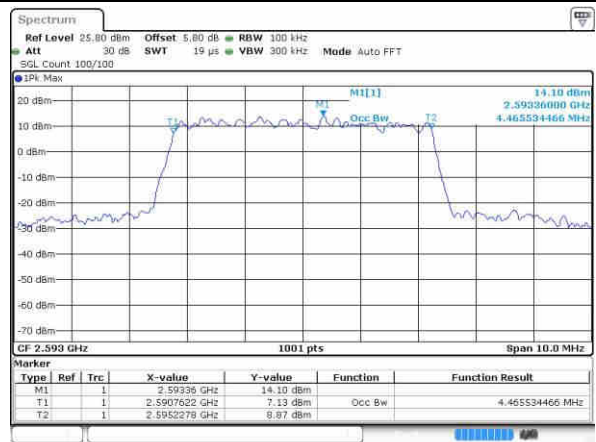

Highest Channel / 5MHz / QPSK

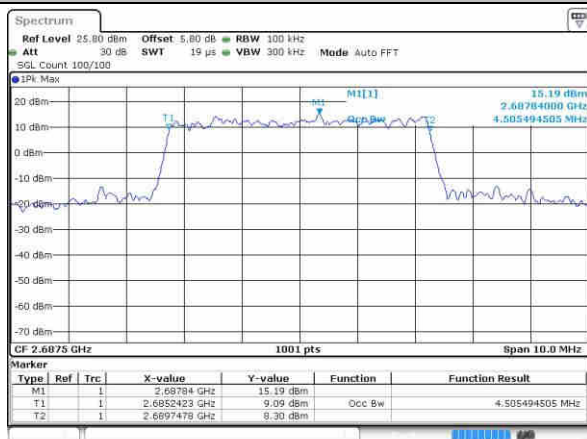


Highest Channel / 5MHz / 16QAM

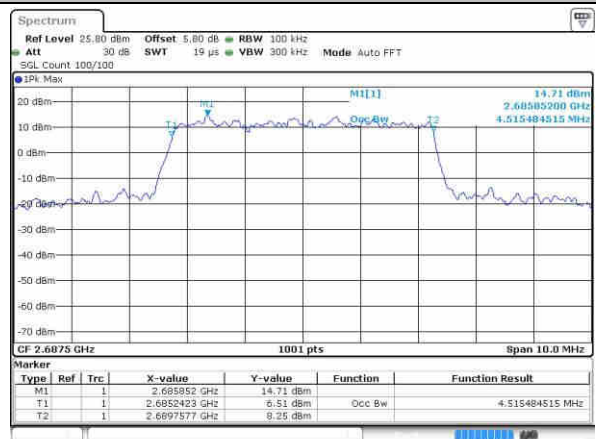




LTE Band 41


Lowest Channel / 10MHz / QPSK

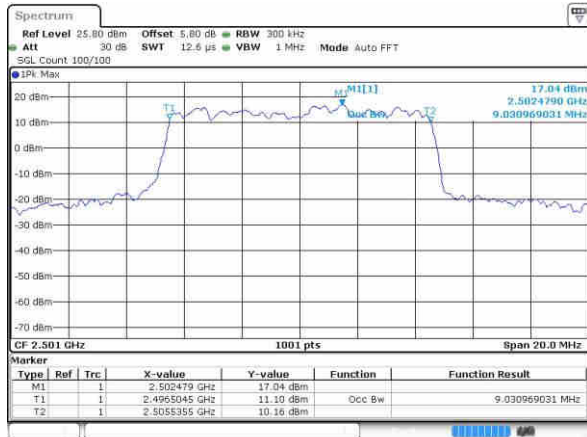


Lowest Channel / 10MHz / 16QAM

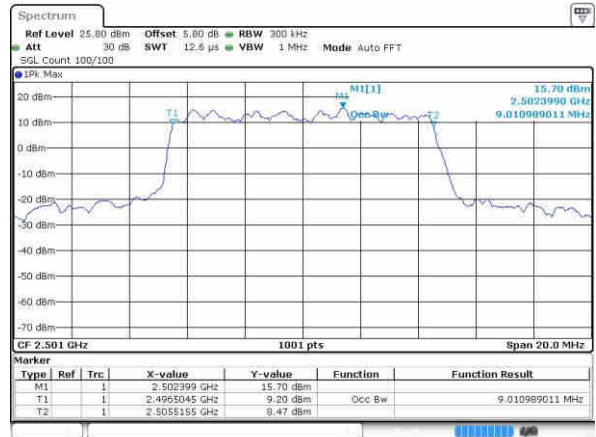


Middle Channel / 10MHz / QPSK

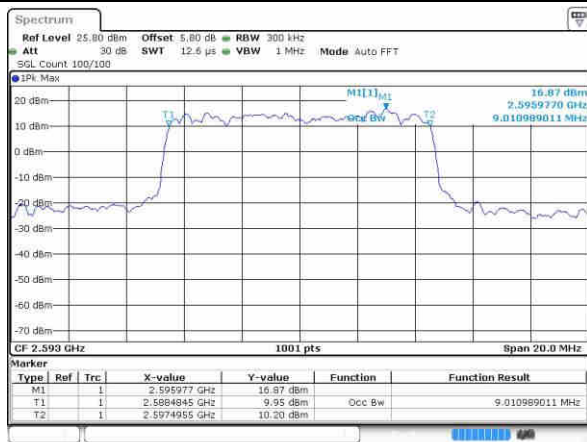


Middle Channel / 10MHz / 16QAM

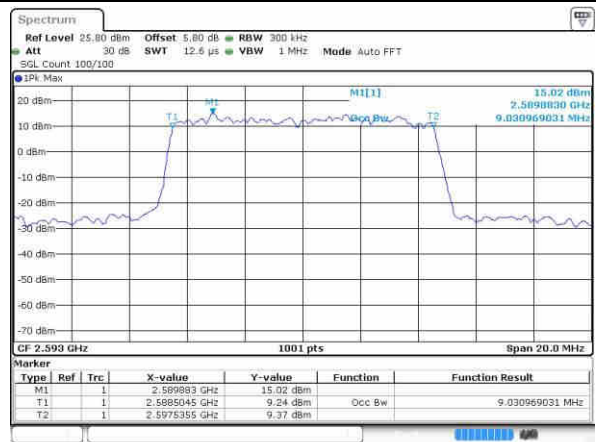

Highest Channel / 10MHz / QPSK

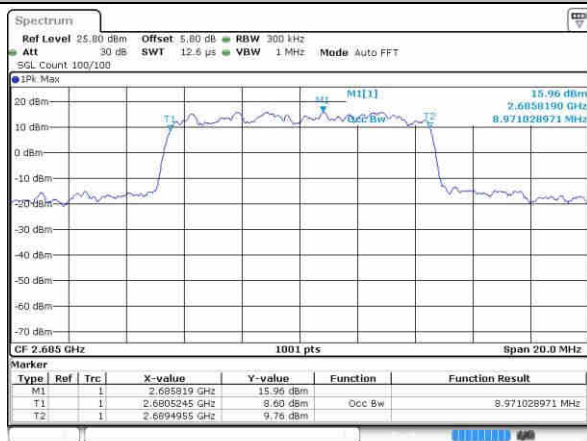


Highest Channel / 10MHz / 16QAM

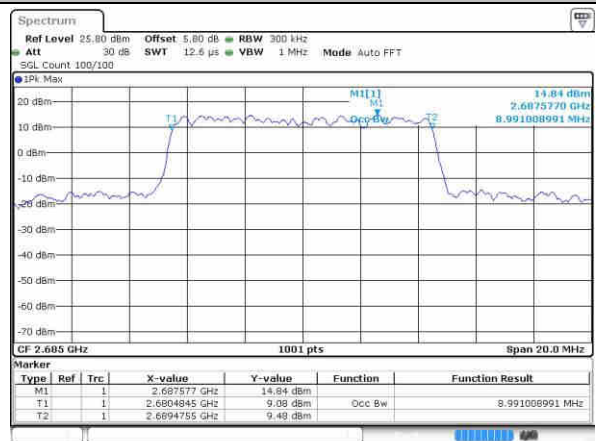




LTE Band 41

Lowest Channel / 15MHz / QPSK

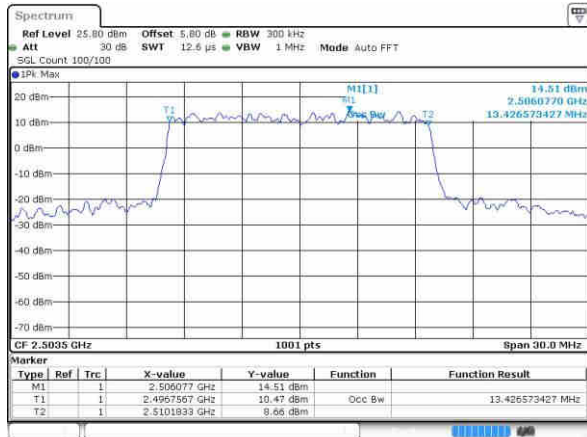


Lowest Channel / 15MHz / 16QAM

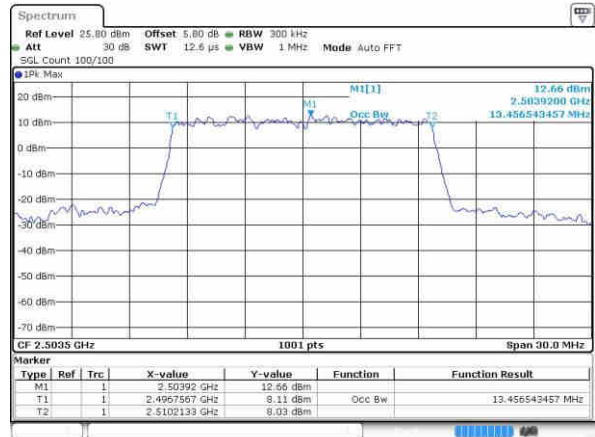


Middle Channel / 15MHz / QPSK




Middle Channel / 15MHz / 16QAM

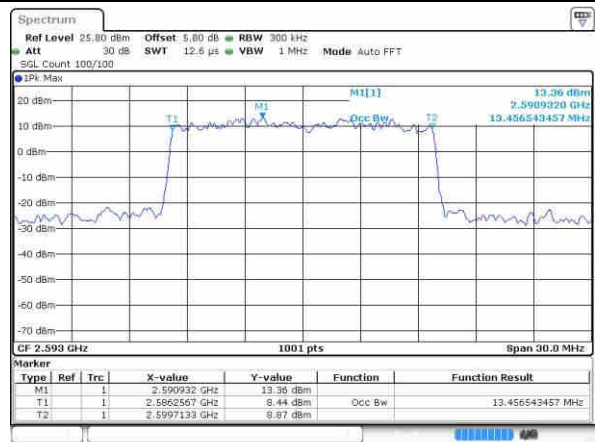

Highest Channel / 15MHz / QPSK

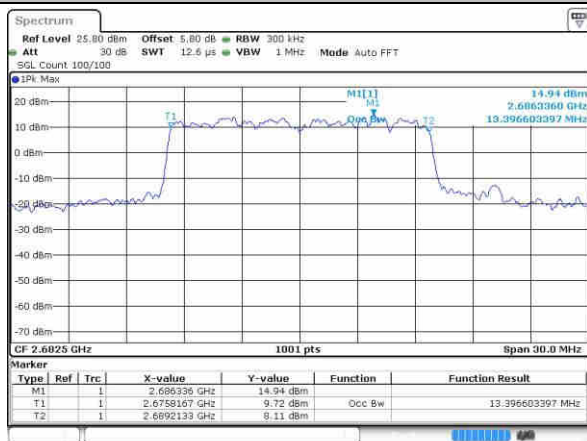


Highest Channel / 15MHz / 16QAM

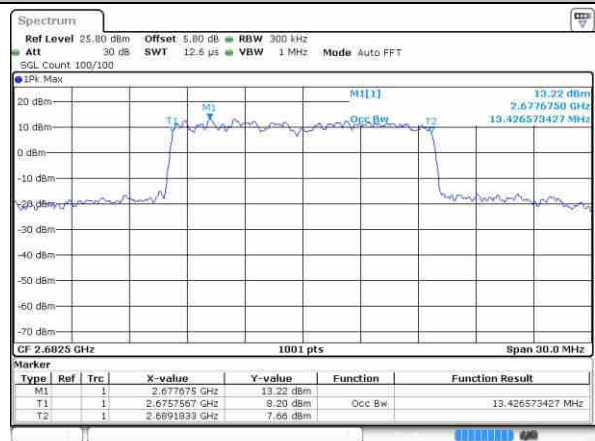




LTE Band 41


Lowest Channel / 20MHz / QPSK

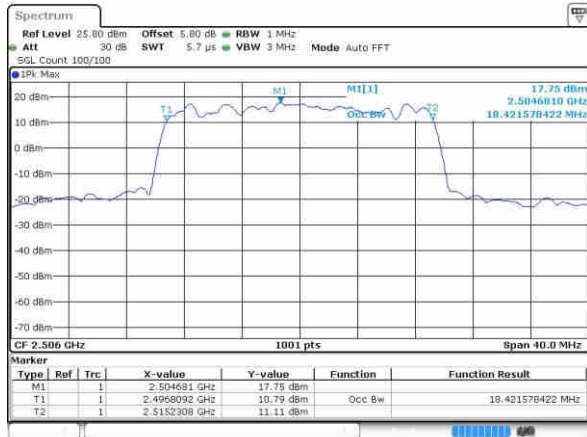


Lowest Channel / 20MHz / 16QAM

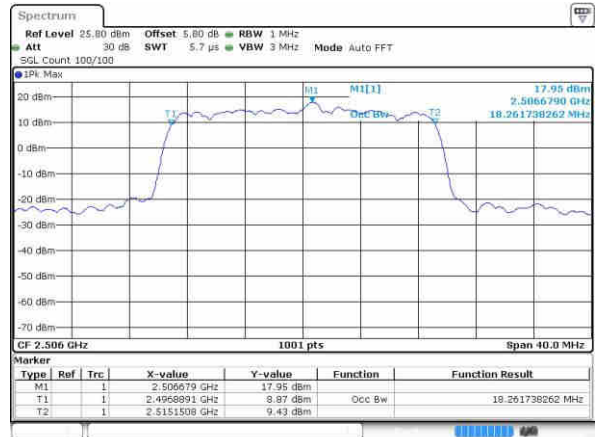


Middle Channel / 20MHz / QPSK

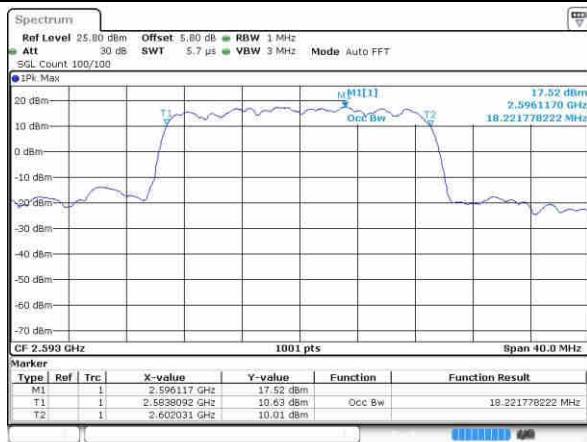


Middle Channel / 20MHz / 16QAM

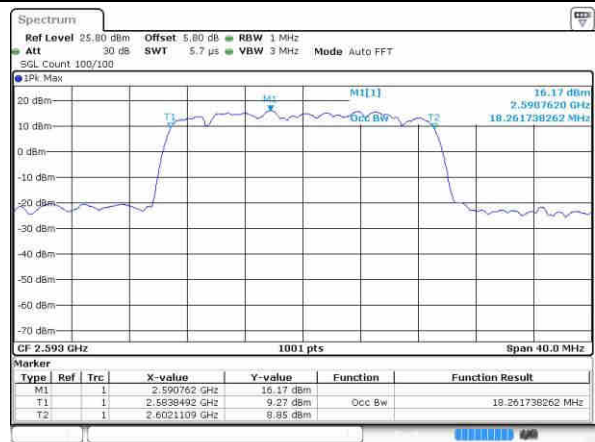

Highest Channel / 20MHz / QPSK

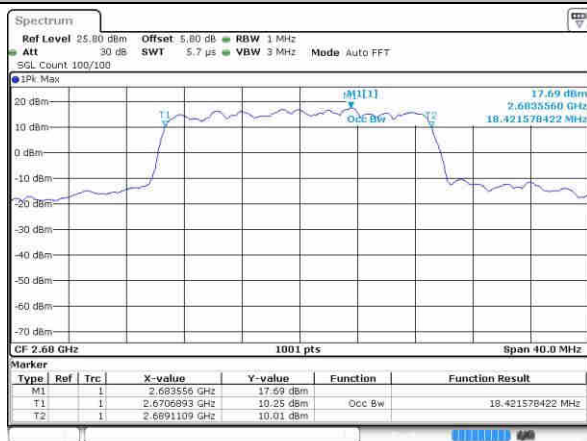

Highest Channel / 20MHz / 16QAM

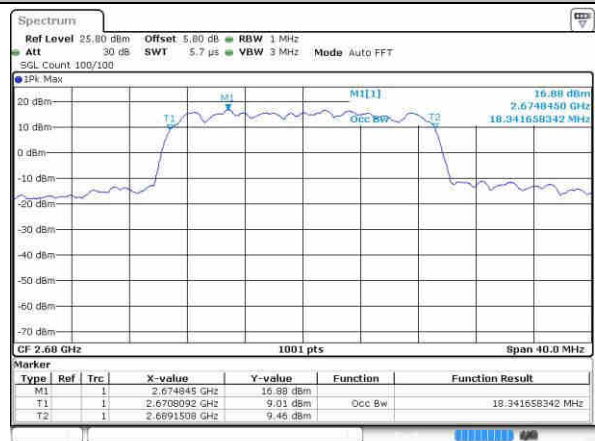





Conducted Band Edge

LTE Band 38 / 5MHz / QPSK

Lowest Band Edge / 1 RB

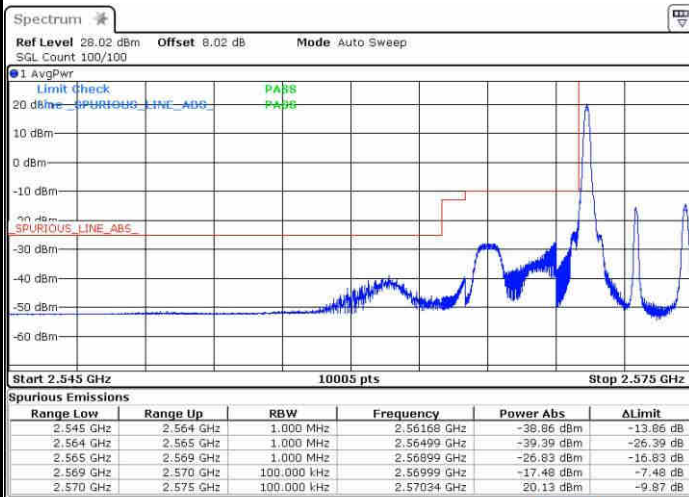


Highest Band Edge / 1 RB

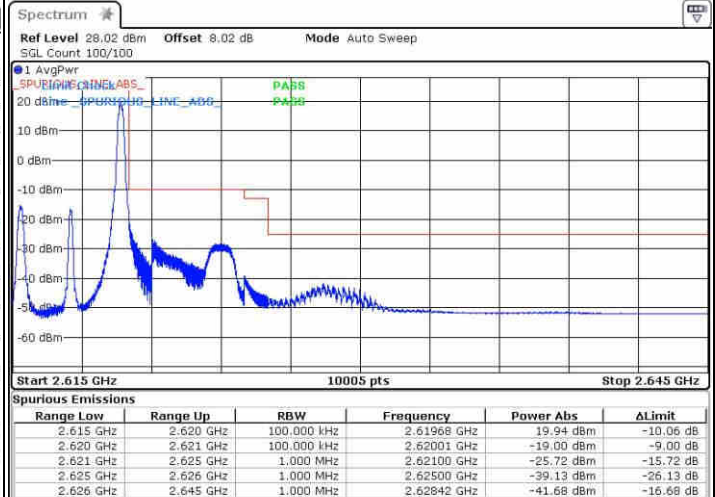

Lowest Band Edge / Full RB




Highest Band Edge / Full RB

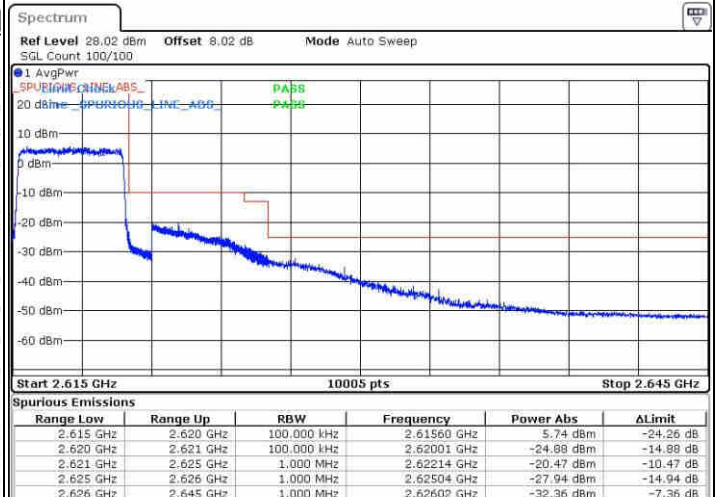



LTE Band 38 / 5MHz / 16QAM


Lowest Band Edge / 1RB

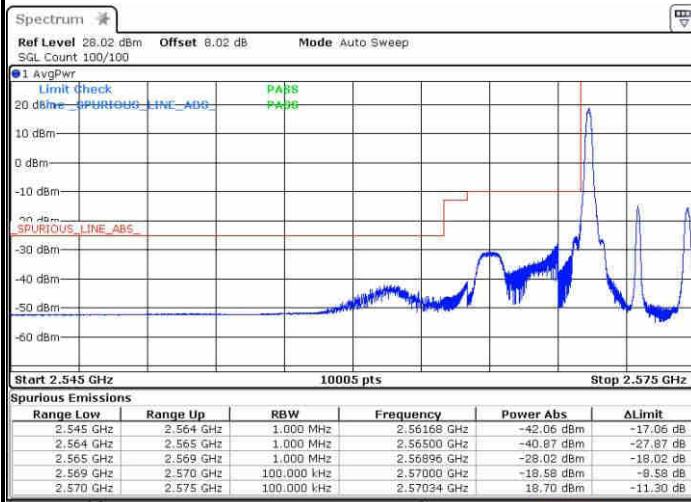


Highest Band Edge / 1 RB



Lowest Band Edge / Full RB

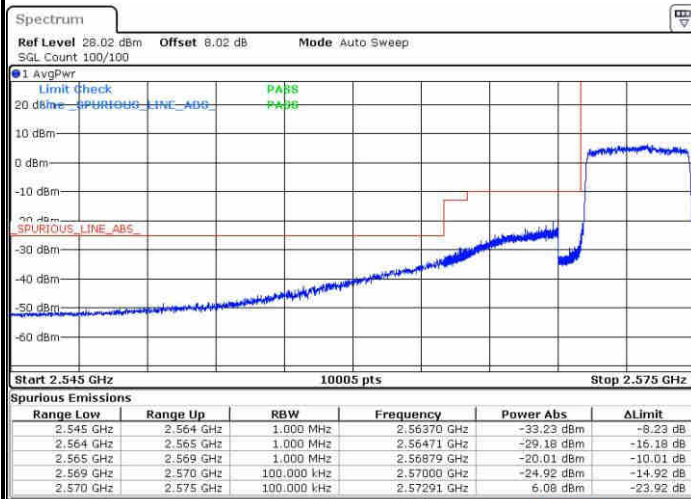


Highest Band Edge / Full RB

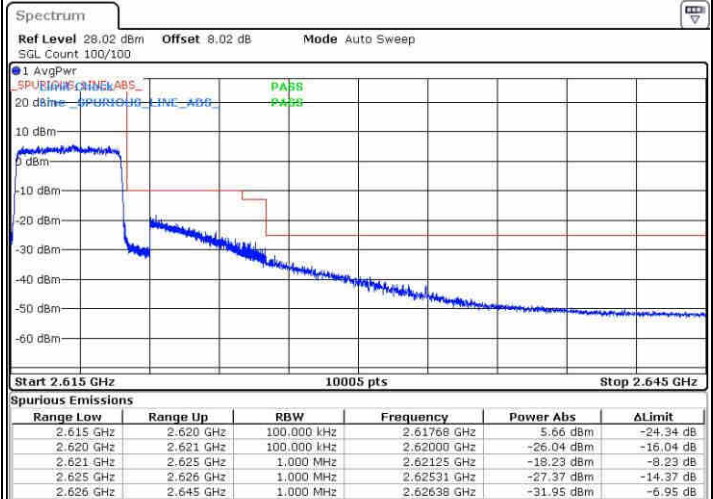




LTE Band 38 / 10MHz / QPSK


Lowest Band Edge / 1 RB

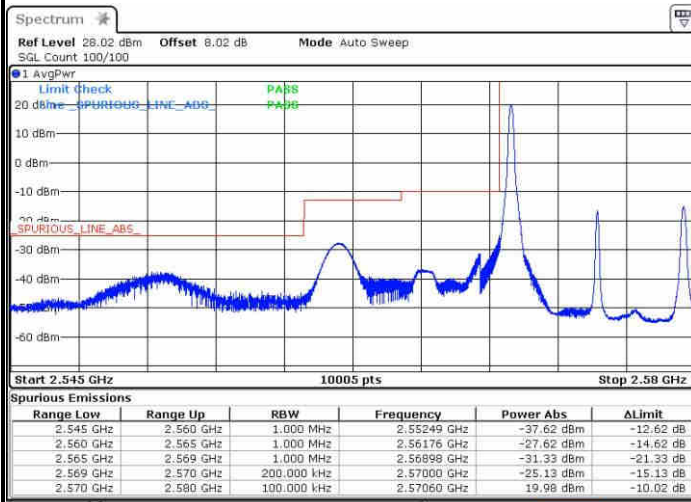


Highest Band Edge / 1 RB

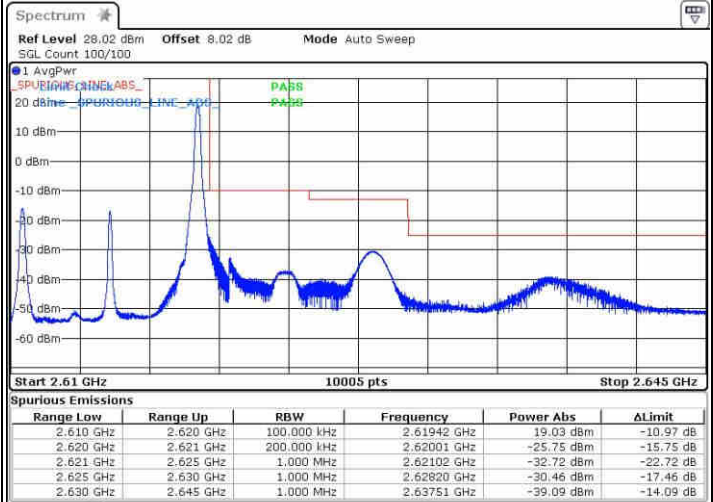

Lowest Band Edge / Full RB

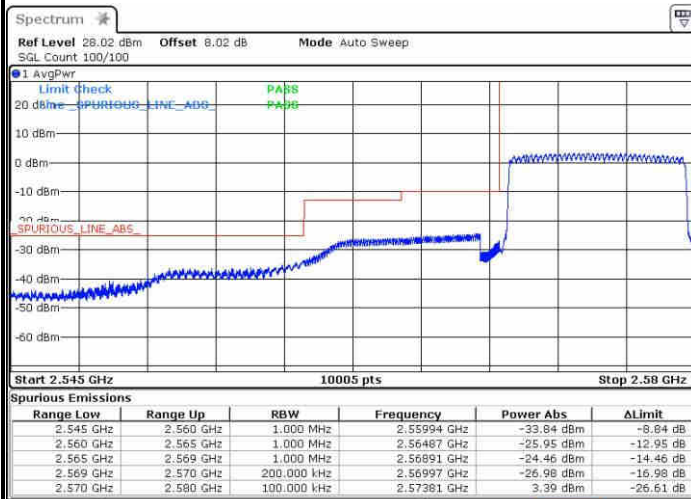


Highest Band Edge / Full RB

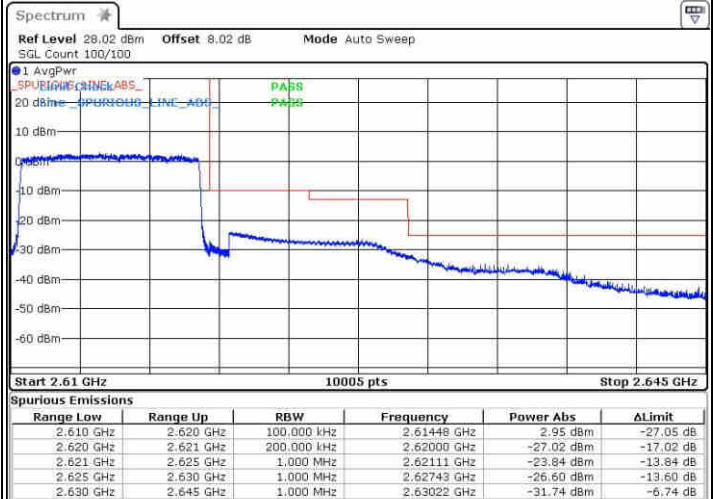




LTE Band 38 / 10MHz / 16QAM


Lowest Band Edge / 1 RB

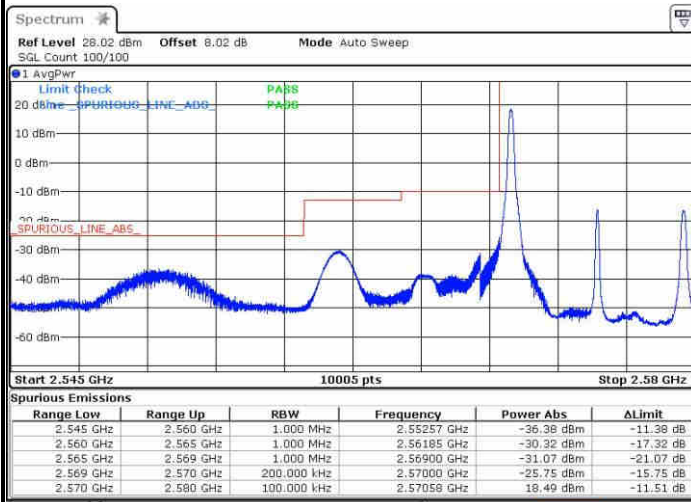


Highest Band Edge / 1 RB

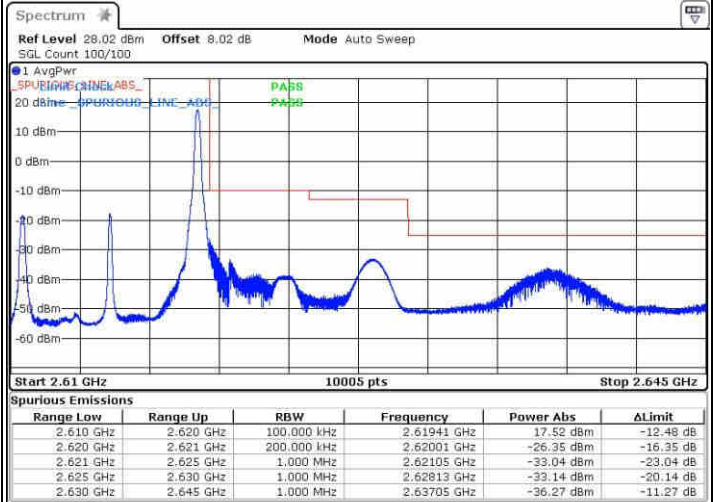

Lowest Band Edge / Full RB

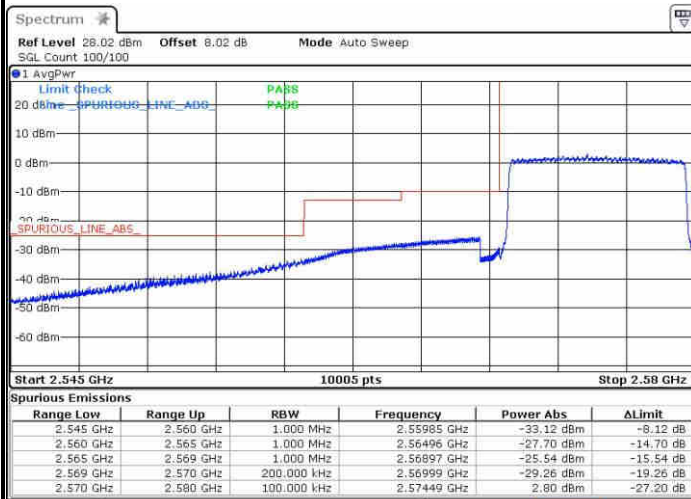


Highest Band Edge / Full RB

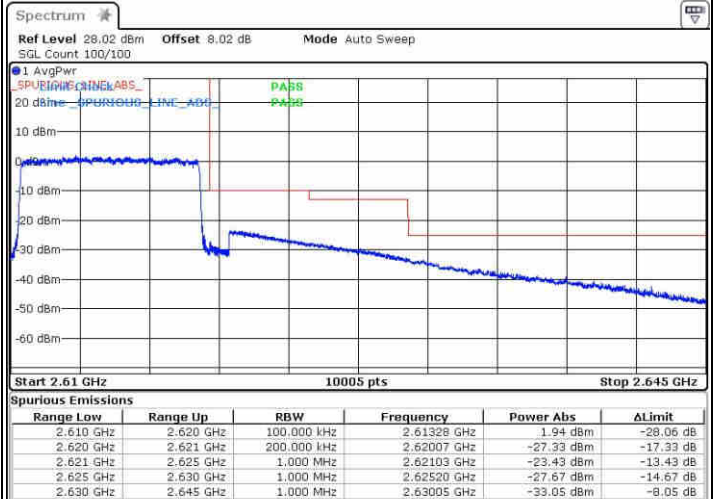




LTE Band 38 / 15MHz / QPSK


Lowest Band Edge / 1 RB

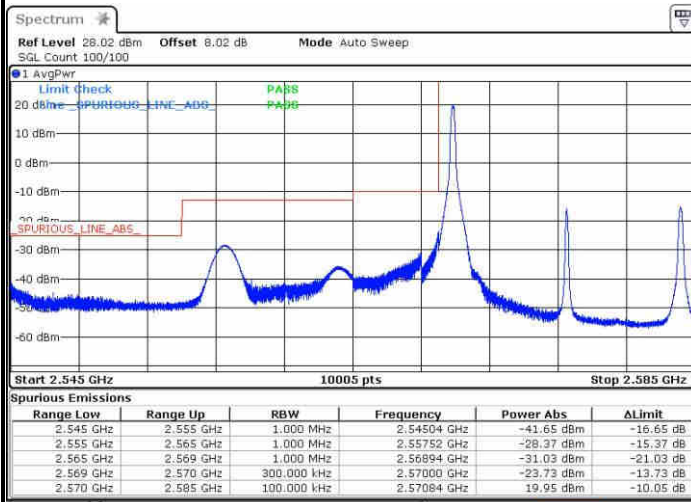

Highest Band Edge / 1 RB

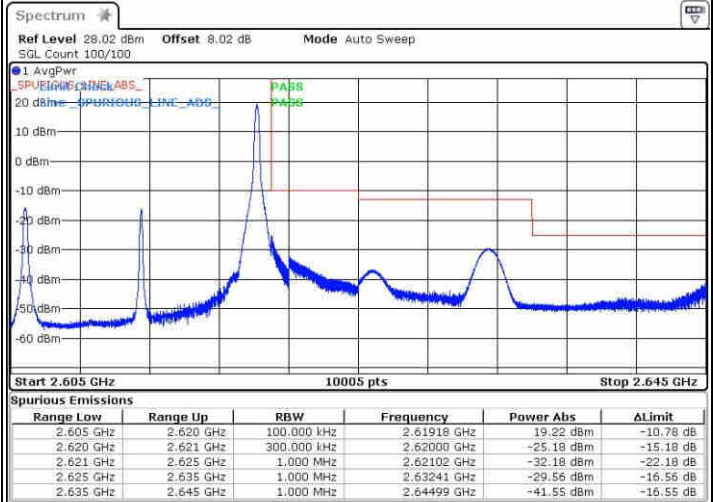

Lowest Band Edge / Full RB

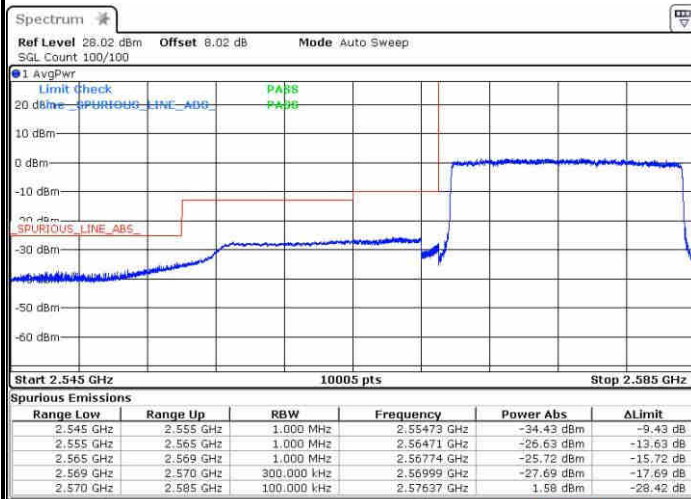

Highest Band Edge / Full RB

