



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : 10713  
**FCC ID** : IHDT56WC5  
**STANDARD** : FCC Part 15 Subpart C §15.225  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

The product was received on Apr. 27, 2017 and testing was completed on Jun. 20, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**Sporton International (KunShan) INC.**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



TABLE OF CONTENTS

SUMMARY OF THE TEST RESULT .....4
1. GENERAL INFORMATION.....5
1.1 Applicant.....5
1.2 Manufacturer .....5
1.3 Product Feature of Equipment Under Test.....5
1.4 Product Specification of Equipment Under Test .....6
1.5 Specification of Accessory.....6
1.6 Modification of EUT .....7
1.7 Testing Location .....7
1.8 Applicable Standards.....7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....8
2.1 Descriptions of Test Mode .....8
2.2 Connection Diagram of Test System .....8
2.3 Table for Supporting Units .....9
2.4 EUT Operation Test Setup .....9
3. TEST RESULTS.....10
3.1 AC Power Line Conducted Emissions Measurement .....10
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....12
3.3 Frequency Stability Measurement .....13
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....14
3.5 Radiated Emissions Measurement .....16
3.6 Antenna Requirements.....19
4. LIST OF MEASURING EQUIPMENT .....20
APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST
APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS
B1. Test Result of 20dB Spectrum Bandwidth
B2. Test Result of Frequency Stability
APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS
C1. Test Result of Field Strength of Fundamental Emissions
C2. Results of Radiated Emissions (9 kHz~30MHz)
C3. Results of Radiated Emissions (30MHz~1GHz)
APPENDIX D. SETUP PHOTOGRAPHS





## SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 6.10 dB at 13.560MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	61.62 dB at 13.560 MHz
3.5	15.225(d) 15.209	Radiated Emissions	Complies	3.18 dB at 40.670 MHz
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±5.2dB	Confidence levels of 95%



# 1. GENERAL INFORMATION

## 1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10713
FCC ID	IHDT56WC5
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 355638080036377 Conduction: 355638080037888 Radiation: 355638080036401
HW Version	WKGMA1A4-3
SW Version	woods- userdebug 7.0 NMA25.27 314 intcfg,test-keys
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.49 KHz
99%OBW	2.11 KHz
Antenna Type	PIFA Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.5 Specification of Accessory

Specification of Accessory				
AC Adapter(EU)	Brand Name	Motorola (Chenyang)	Model Name	C-P57 SPN5985A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5.0Vdc, 1000mA		
AC Adapter(US)	Brand Name	Motorola (Chenyang)	Model Name	C-P56 SPN5987A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5.0Vdc, 1000mA		
AC Adapter(UK)	Brand Name	Motorola (Chenyang)	Model Name	C-P58 SPN5981A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5.0Vdc, 1000mA		
AC Adapter(IN)	Brand Name	Motorola (Chenyang)	Model Name	C-P45 SPN5982A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5.0Vdc, 1000mA		
AC Adapter(AU)	Brand Name	Motorola (Chenyang)	Model Name	C-P59 SPN5983A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5.0Vdc, 1000mA		
Battery	Brand Name	Motorola (ATL)	Model Name	GK40
	Power Rating	3.8Vdc,2685/2800mAh (Min/Typ)	Type	Li-ion
Earphone	Brand Name	Motorola (Tenji)	Model Name	TJ101247P
	Signal Line Type	1.32 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (Liqi)	Model Name	LQ-02300032
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Testing Location

<b>Test Site</b>	Sporton International (KunShan) INC.			
<b>Test Site Location</b>	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>  418269
	TH01-KS	CO01-KS	03CH02-KS	
<b>Test Engineer</b>	Silent Hai	Amos Zhang	Maker Qi	
<b>Temperature</b>	21~25°C	22~24°C	21~22°C	
<b>Relative Humidity</b>	51~55%	42~46%	41~42%	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013

## 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F. The worst type (type F) was recorded in this report.


Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

### 2.2 Connection Diagram of Test System

#### <AC Conducted Emissions>

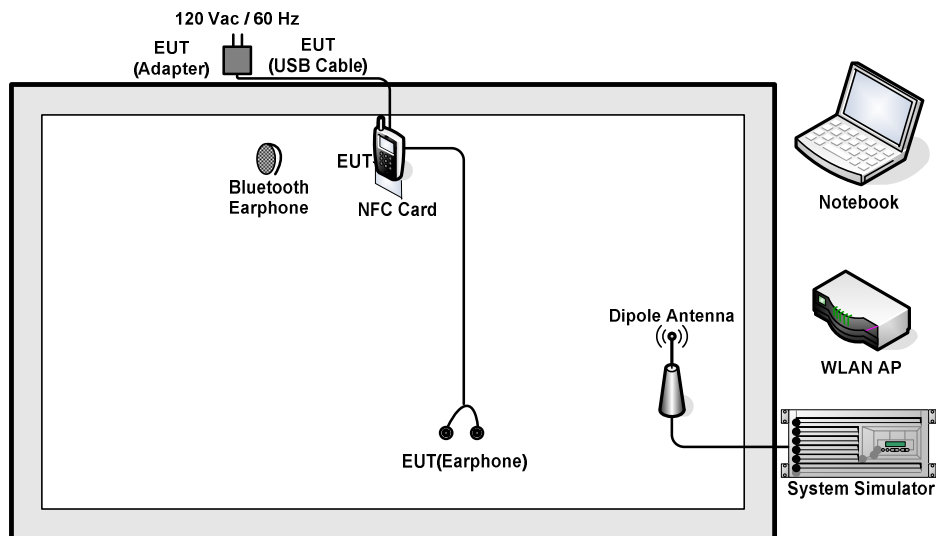

< For Fundamental Emissions and Mask and Radiated Emissions Measurement >

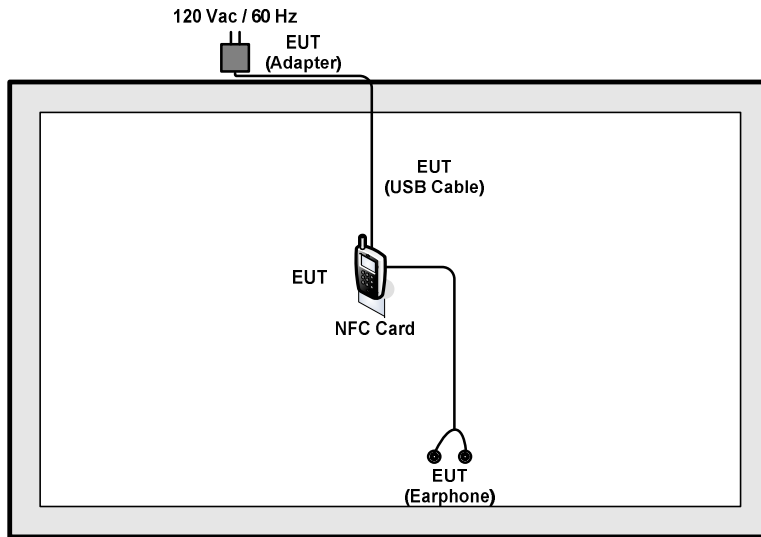

### 2.3 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
System Simulator	R&S	CMU 200	N/A
WLAN AP	D-Link	DIR-855	KA2DIR855A2
Bluetooth Earphone	Lenovo	LBH308	N/A
Notebook	Lenovo	G480	N/A
SD Card	Kingston	8GB	N/A
NFC Card	N/A	N/A	N/A

### 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.



### 3. TEST RESULTS

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test setup

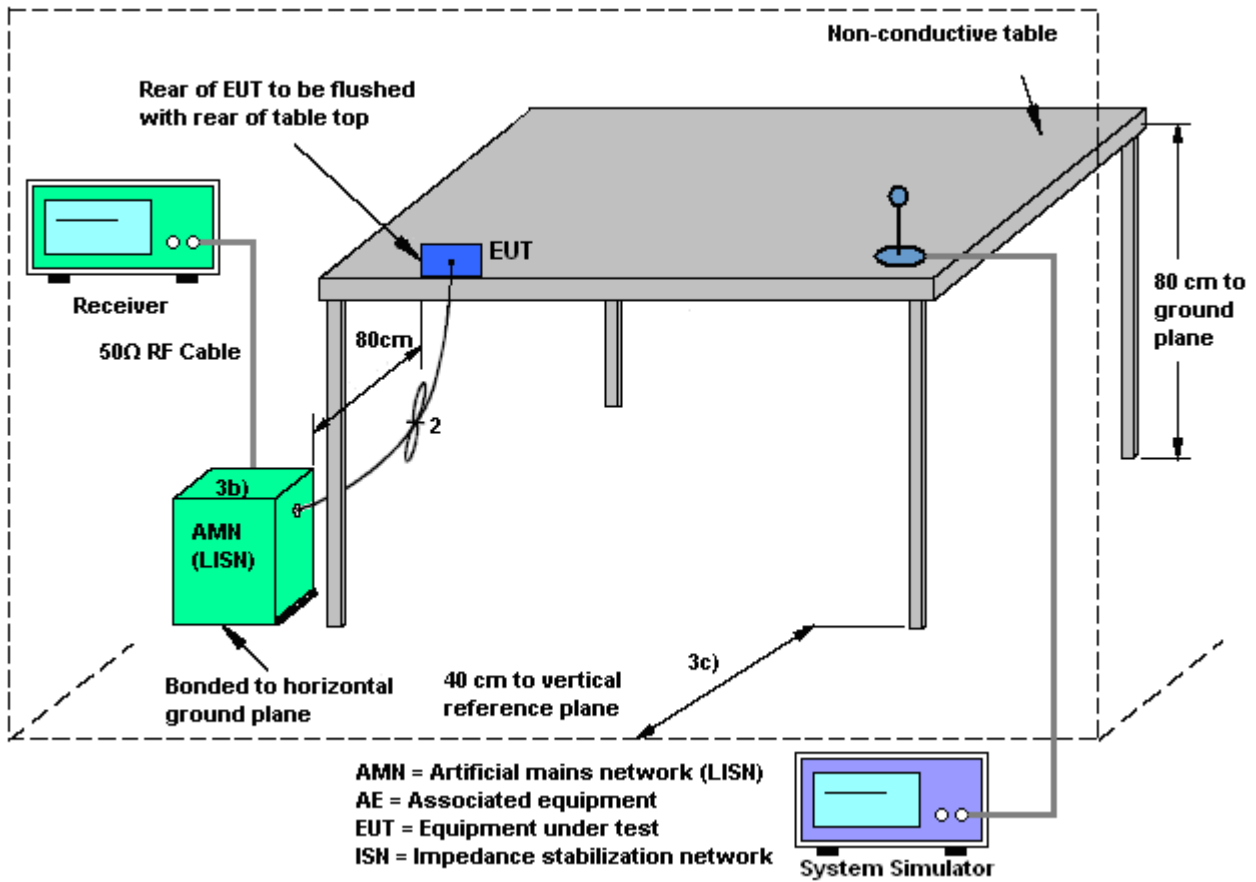

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

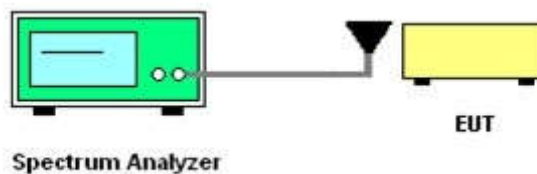

### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

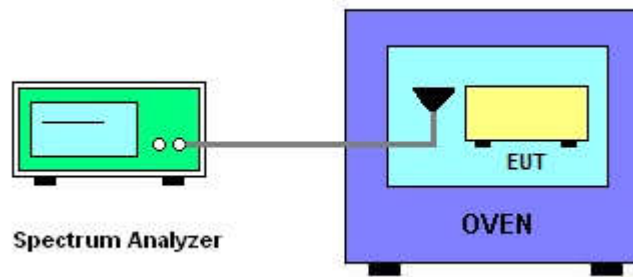

#### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μV/m) at 30m	Field Strength (dBμV/m) at 30m	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.

5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.  
Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

For radiated emissions below 30MHz

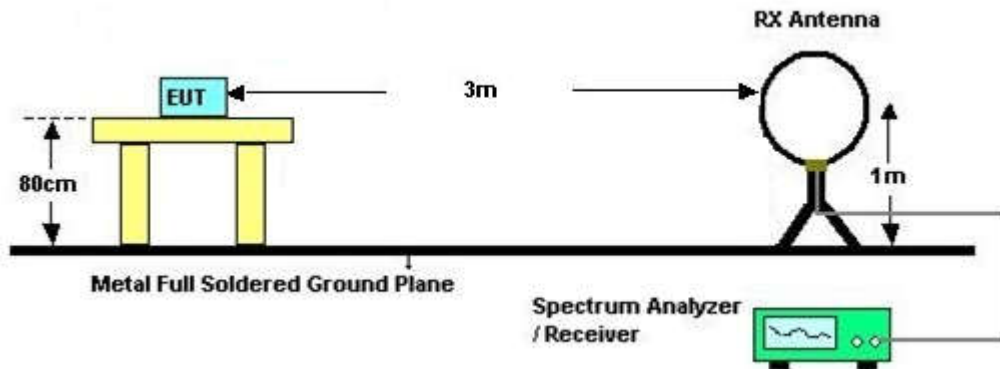

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (µV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




### **3.5.4 Test Procedures**

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

### 3.5.5 Test Setup

For radiated emissions above 30MHz

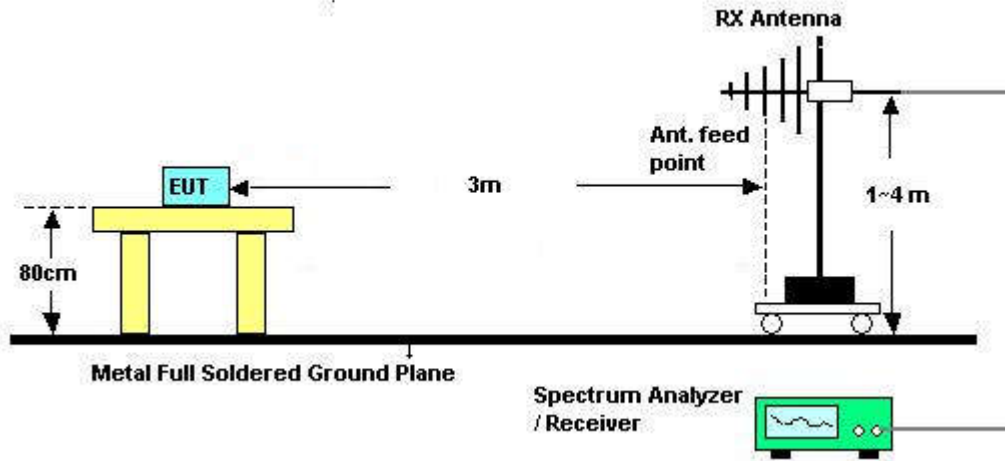

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



### 4. LIST OF MEASURING EQUIPMENT


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jun. 20, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Jun. 20, 2017	Oct. 12, 2017	Conducted (TH01-KS)
AC Power Source	Chroma	61602	ABP000000 811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jun. 20, 2017	Oct. 12, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Jun. 08, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Jun. 08, 2017	Nov. 22, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Jun. 08, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 09, 2016	Jun. 08, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Jun. 08, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 08, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 08, 2017	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Jun. 20, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jun. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jun. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000 811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jun. 20, 2017	Oct. 12, 2017	Conduction (CO01-KS)

NCR: No Calibration Required



## Appendix A. Test Results of Conducted Emission Test

Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery + NFC Tx		

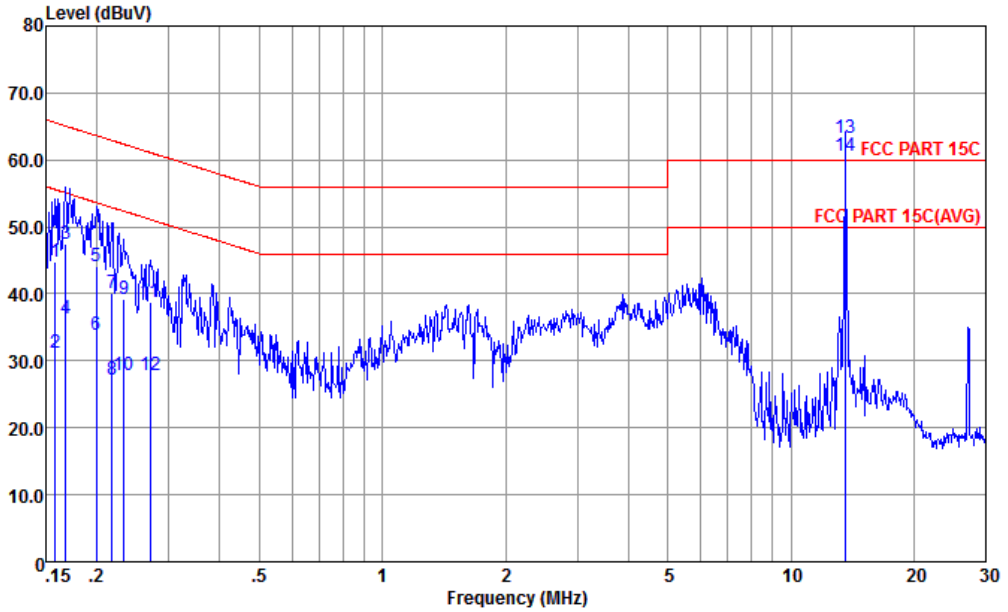

Site : CO01-KS  
Condition : FCC PART 15C LISN-L-161017-060103 LINE


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.158	44.79	-20.77	65.56	33.91	0.50	10.38	QP
2	0.158	31.19	-24.37	55.56	20.31	0.50	10.38	Average
3	0.168	47.41	-17.67	65.08	36.60	0.44	10.37	QP
4	0.168	36.41	-18.67	55.08	25.60	0.44	10.37	Average
5	0.200	44.10	-19.52	63.62	33.50	0.27	10.33	QP
6	0.200	33.90	-19.72	53.62	23.30	0.27	10.33	Average
7	0.217	40.19	-22.73	62.92	29.60	0.27	10.32	QP
8	0.217	27.19	-25.73	52.92	16.60	0.27	10.32	Average
9	0.233	39.17	-23.18	62.35	28.60	0.27	10.30	QP
10	0.233	27.87	-24.48	52.35	17.30	0.27	10.30	Average
11	0.270	38.85	-22.27	61.12	28.30	0.27	10.28	QP
12	0.270	27.85	-23.27	51.12	17.30	0.27	10.28	Average
13 *	13.560	63.30	3.30	60.00	52.59	0.29	10.42	QP
14 *	13.560	60.60	10.60	50.00	49.89	0.29	10.42	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery + NFC Tx		

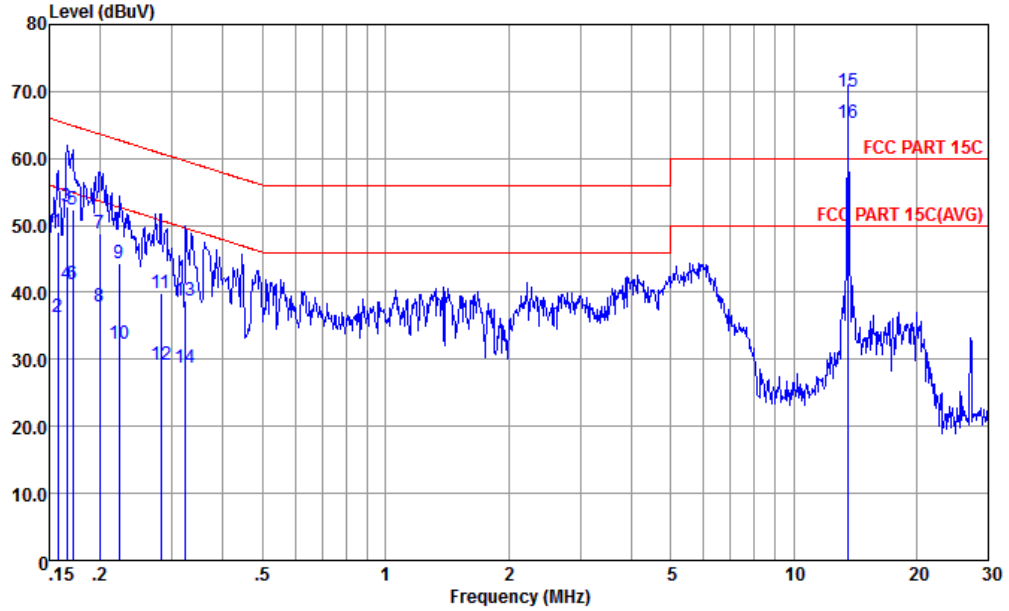

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	49.02	-16.58	65.60	38.30	0.34	10.38	QP
2	0.157	36.32	-19.28	55.60	25.60	0.34	10.38	Average
3	0.166	52.91	-12.25	65.16	42.20	0.34	10.37	QP
4	0.166	41.31	-13.85	55.16	30.60	0.34	10.37	Average
5	0.171	52.30	-12.60	64.90	41.59	0.34	10.37	QP
6	0.171	41.30	-13.60	54.90	30.59	0.34	10.37	Average
7	0.200	48.86	-14.76	63.62	38.20	0.33	10.33	QP
8	0.200	37.96	-15.66	53.62	27.30	0.33	10.33	Average
9	0.222	44.25	-18.49	62.74	33.60	0.34	10.31	QP
10	0.222	32.25	-20.49	52.74	21.60	0.34	10.31	Average
11	0.282	39.92	-20.84	60.76	29.30	0.35	10.27	QP
12	0.282	29.22	-21.54	50.76	18.60	0.35	10.27	Average
13	0.323	38.80	-20.82	59.62	28.20	0.36	10.24	QP
14	0.323	28.70	-20.92	49.62	18.10	0.36	10.24	Average
15 *	13.560	70.00	10.00	60.00	59.30	0.28	10.42	QP
16 *	13.560	65.40	15.40	50.00	54.70	0.28	10.42	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery + NFC Tx		

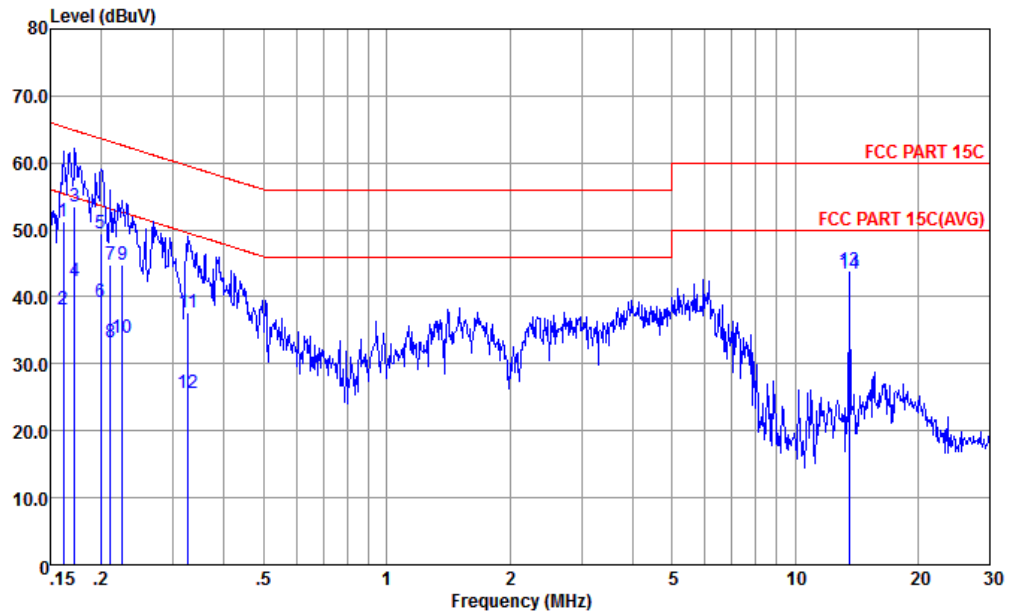

Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-161017-060103 LINE


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	51.16	-14.22	65.38	40.30	0.48	10.38	QP
2	0.162	38.16	-17.22	55.38	27.30	0.48	10.38	Average
3	0.172	53.58	-11.28	64.86	42.81	0.41	10.36	QP
4	0.172	42.38	-12.48	54.86	31.61	0.41	10.36	Average
5	0.200	49.50	-14.12	63.62	38.90	0.27	10.33	QP
6	0.200	39.20	-14.42	53.62	28.60	0.27	10.33	Average
7	0.211	44.89	-18.29	63.18	34.30	0.27	10.32	QP
8	0.211	33.19	-19.99	53.18	22.60	0.27	10.32	Average
9	0.226	44.78	-17.83	62.61	34.20	0.27	10.31	QP
10	0.226	33.78	-18.83	52.61	23.20	0.27	10.31	Average
11	0.327	37.71	-21.82	59.53	27.20	0.27	10.24	QP
12	0.327	25.71	-23.82	49.53	15.20	0.27	10.24	Average
13	13.560	43.90	-16.10	60.00	33.19	0.29	10.42	QP
14 *	13.560	43.50	-6.50	50.00	32.79	0.29	10.42	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per C63.4.



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery + NFC Tx		

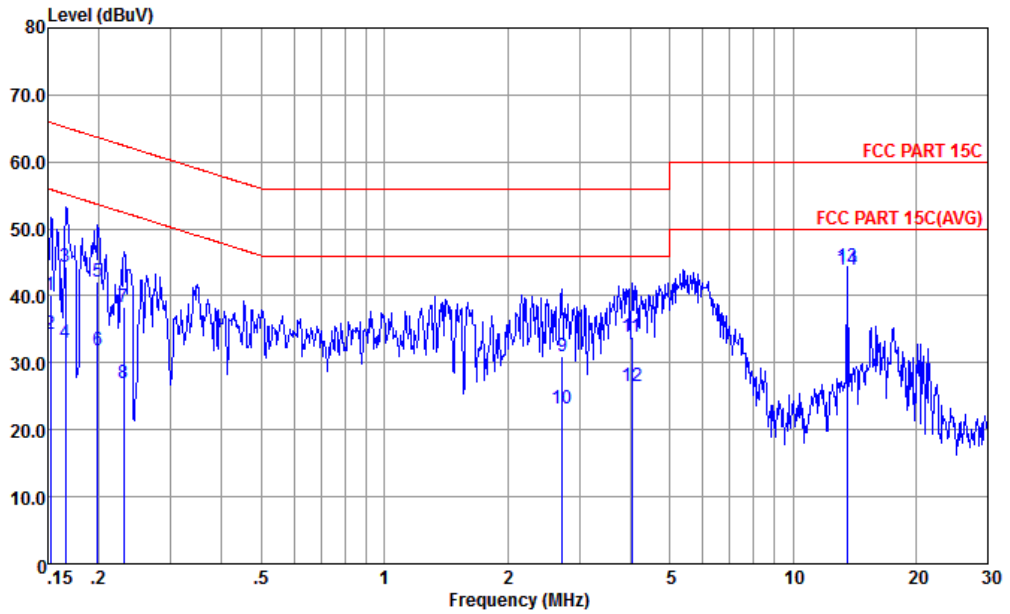

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	40.03	-25.84	65.87	29.30	0.34	10.39	QP
2	0.152	34.33	-21.54	55.87	23.60	0.34	10.39	Average
3	0.166	44.31	-20.85	65.16	33.60	0.34	10.37	QP
4	0.166	33.01	-22.15	55.16	22.30	0.34	10.37	Average
5	0.199	42.17	-21.50	63.67	31.51	0.33	10.33	QP
6	0.199	31.97	-21.70	53.67	21.31	0.33	10.33	Average
7	0.230	38.24	-24.20	62.44	27.60	0.34	10.30	QP
8	0.230	26.94	-25.50	52.44	16.30	0.34	10.30	Average
9	2.721	30.91	-25.09	56.00	20.30	0.40	10.21	QP
10	2.721	23.11	-22.89	46.00	12.50	0.40	10.21	Average
11	4.027	33.93	-22.07	56.00	23.30	0.39	10.24	QP
12	4.027	26.53	-19.47	46.00	15.90	0.39	10.24	Average
13	13.560	44.30	-15.70	60.00	33.60	0.28	10.42	QP
14 *	13.560	43.90	-6.10	50.00	33.20	0.28	10.42	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per C63.4.



## Appendix B. Test Results of Conducted Test Items

### B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56
<b>20dB Bandwidth (kHz)</b>	2.49	<b>99% Occupied BW(kHz)</b>	2.11
<b>Frequency range (MHz)</b>	$f_L > 13.553$	13.559103	<b>Test Result</b>
	$f_H < 13.567$	13.561592	<b>Complies</b>




B2. Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
120	13.560348	-20	13.560348
102	13.560348	-10	13.560348
138	13.560348	0	13.560348
		10	13.560348
		20	13.560348
		30	13.560348
		40	13.560348
		50	13.560348
<b>Max.Deviation (MHz)</b>	0.000348	<b>Max.Deviation (MHz)</b>	0.000348
<b>Max.Deviation (ppm)</b>	25.6637	<b>Max.Deviation (ppm)</b>	25.6637
<b>Limit</b>	<b>FS &lt; ±100 ppm</b>	<b>Limit</b>	<b>FS &lt; ±100 ppm</b>
<b>Test Result</b>	<b>PASS</b>	<b>Test Result</b>	<b>PASS</b>



## Appendix C. Test Results of Radiated Test Items

### C1. Test Result of Field Strength of Fundamental Emissions

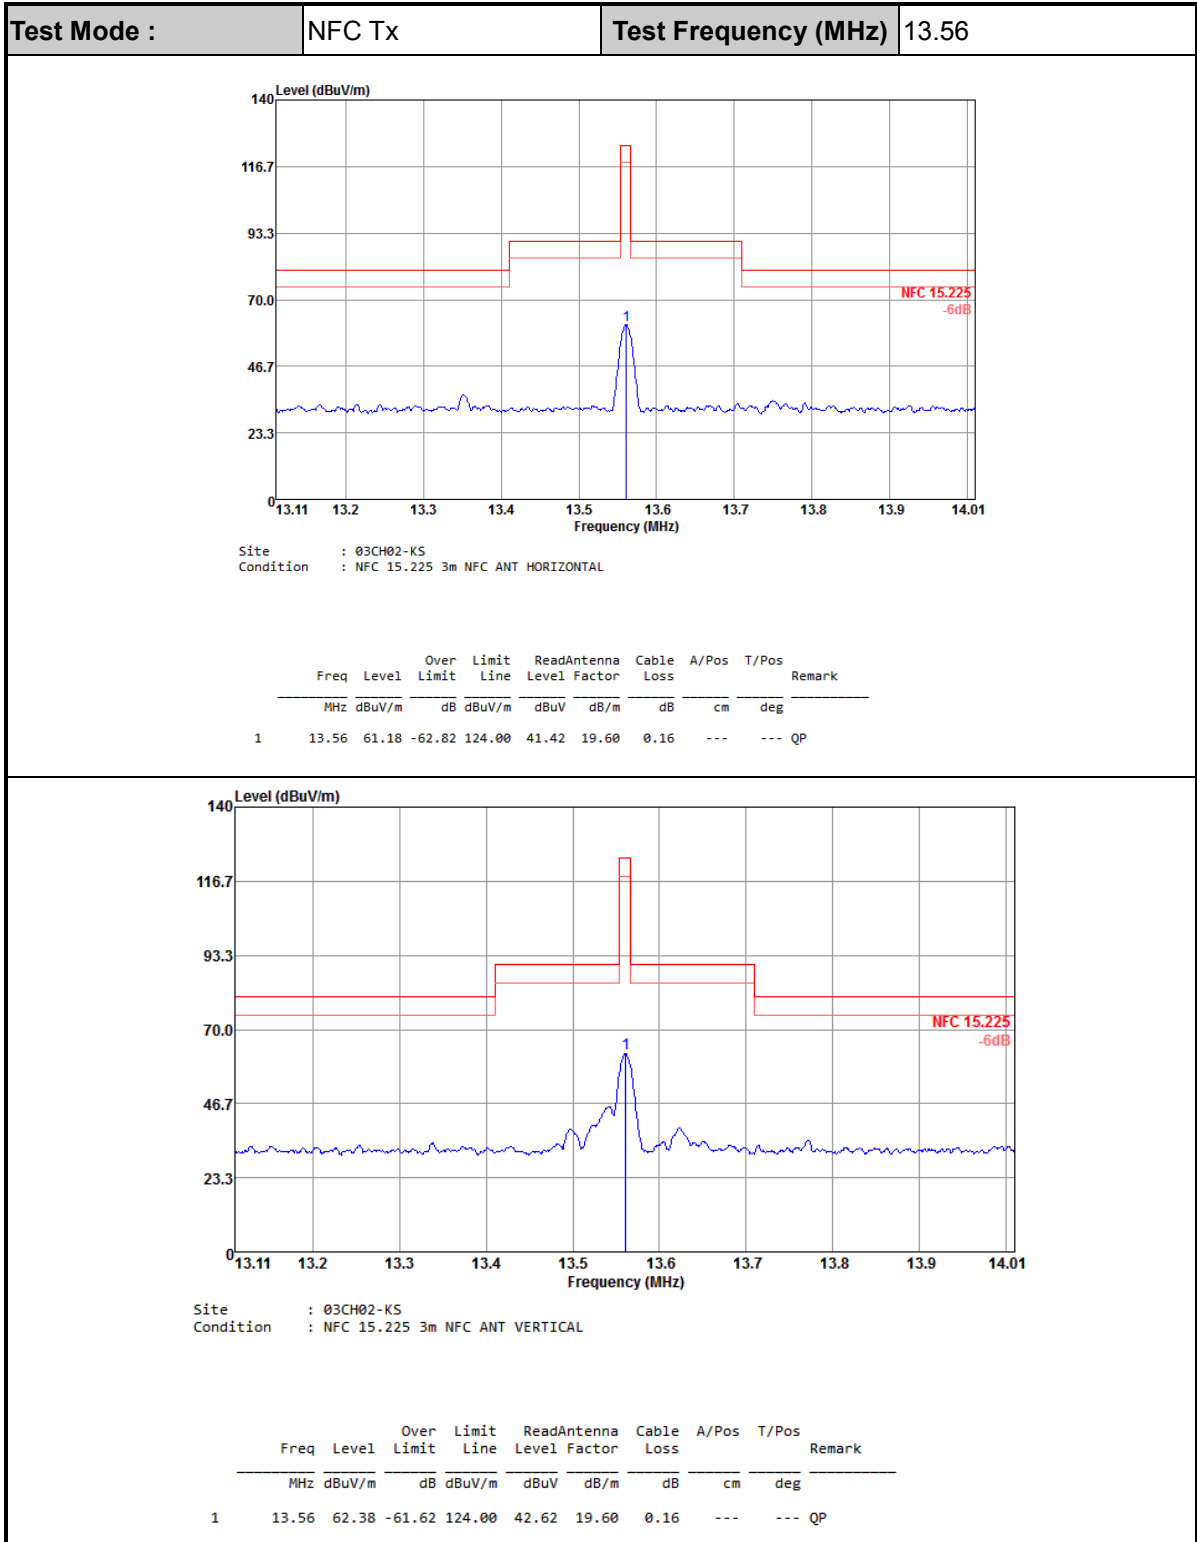



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :	NFC Tx	Polarization :	Horizontal
-------------	--------	----------------	------------

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.02987	58.31	-59.78	118.09	38.8	19.5	0.01	-	-	Average
0.07795	54.09	-55.67	109.76	34.48	19.6	0.01	-	-	Average
0.60325	55.94	-16.04	71.98	35.92	20	0.02	-	-	QP
0.9862	50.54	-17.17	67.71	30.12	20.4	0.02	-	-	QP
4.598	39.04	-30.5	69.54	18.88	20.1	0.06	-	-	QP
15.942	35.81	-33.73	69.54	16.5	19.12	0.19	-	-	QP

Test Mode :	NFC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01915	53.48	-68.48	121.96	32.57	20.9	0.01	-	-	Average
0.07781	55.52	-54.25	109.77	35.91	19.6	0.01	-	-	Average
0.62545	49.56	-22.1	71.66	29.51	20.03	0.02	-	-	QP
1.012	43.72	-23.77	67.49	23.3	20.4	0.02	-	-	QP
4.958	37.32	-32.22	69.54	17.16	20.1	0.06	-	-	QP
8.814	40.21	-29.33	69.54	20.38	19.72	0.11	-	-	QP

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. Limit line = specific limits (dBμV) + distance extrapolation factor.



**C3. Results of Radiated Spurious Emissions (30MHz~1GHz)**

<b>Test Mode :</b>	NFC Tx	<b>Polarization :</b>	Horizontal
--------------------	--------	-----------------------	------------

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.67	26.53	-13.47	40	37.52	19.64	0.61	31.24			Peak
67.83	36.74	-3.26	40	54.16	13.22	0.8	31.44	100	176	Peak
103.72	31.81	-11.69	43.5	44.36	17.76	0.41	30.72			Peak
176.47	33.11	-10.39	43.5	46.36	16.45	1.31	31.01			Peak
202.66	30.16	-13.34	43.5	43.66	15.83	1.78	31.11			Peak
244.37	33.19	-12.81	46	45.17	17.65	1.56	31.19			Peak

<b>Test Mode :</b>	NFC Tx	<b>Polarization :</b>	Vertical
--------------------	--------	-----------------------	----------

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.67	36.82	-3.18	40	47.81	19.64	0.61	31.24	100	72	Peak
67.83	30.27	-9.73	40	47.69	13.22	0.8	31.44			Peak
103.72	28.32	-15.18	43.5	40.87	17.76	0.41	30.72			Peak
200.72	29.84	-13.66	43.5	43.4	15.74	1.8	31.1			Peak
296.75	25.26	-20.74	46	35.55	19.5	1.69	31.48			Peak
952.47	30.2	-15.8	46	28.08	30.25	3.18	31.31			Peak

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.