



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10714
FCC ID : IHDT56WC6
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 27, 2017 and testing was completed on Jun. 21, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Specification of Accessory	6
1.6. Modification of EUT	6
1.7. Testing Location	7
1.8. Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Carrier Frequency and Channel	8
2.2. Pre-Scanned RF Power	9
2.3. Test Mode	10
2.4. Connection Diagram of Test System	10
2.5. EUT Operation Test Setup	11
2.6. Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1. 6dB Bandwidth Measurement	12
3.2. Output Power Measurement	14
3.3. Power Spectral Density Measurement	15
3.4. Conducted Band Edges and Spurious Emission Measurement	17
3.5. Radiated Band Edges and Spurious Emission Measurement	27
3.6. AC Conducted Emission Measurement	31
3.7. Antenna Requirements	33
4 LIST OF MEASURING EQUIPMENT	34
5 UNCERTAINTY OF EVALUATION	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	
APPENDIX E. PRODUCT EQUALITY DECLARATION	
APPENDIX F. ORIGINAL REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR742708C	Rev. 01	Initial issue of report	Jul. 07, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.35 dB at 30.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Not tested	Note
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Note: The section of AC Conducted Emission is not required to be tested according to the Product Equality Declaration provide by manufacturer.



1 General Description

1.1. Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10714
FCC ID	IHDT56WC6
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 355641080065412/355641080065420 Radiated: N/A
HW Version	WKGMA1A4-3
SW Version	woods- userdebug 7.0 NMA25.27 314 intcfg,test-keys
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for 10714. The product equality declaration could be referred to Appendix E. Based on the similarity between current and previous project, only Conducted and Radiated were full test for differences, other test cases were performed on original report which can be referred to Sporton Report Number FR711913C.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.58 dBm (0.1143 W) 802.11g : 23.36 dBm (0.2168 W) 802.11n HT20 : 23.48 dBm (0.2228 W)
Antenna Type / Gain	PIFA Antenna with gain -0.60 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5. Specification of Accessory

Specification of Accessory				
AC Adapter IN	Brand Name	Motorola (Chenyang)	Model Name	C-P45 SPN5982A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
AC Adapter US	Brand Name	Motorola (Chenyang)	Model Name	C-P56 SPN5987A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
AC Adapter EU	Brand Name	Motorola (Chenyang)	Model Name	C-P57 SPN5985A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
AC Adapter UK	Brand Name	Motorola (Chenyang)	Model Name	C-P58 SPN5981A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
AC Adapter AU	Brand Name	Motorola (Chenyang)	Model Name	C-P59 SPN5983A
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA		
Battery	Brand Name	Motorola (ATL)	Model Name	GK40
	Power Rating	3.8Vdc, 2685/2800mAh (Min/Typ)	Type	Li-ion
Earphone	Brand Name	Motorola (Tenji)	Model Name	TJ101247P
	Signal Line Type	1.3 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (LIQI)	Model Name	LQ-02300032
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		

1.6. Modification of EUT

No modifications are made to the EUT during all test items.



1.7. Testing Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1. Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2. Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

802.11b mode Peak Power (dBm)					
Channel	Freq. (MHz)	Data Rate (MHz)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412 MHz	18.42	18.41	18.37	18.39
CH 06	2437 MHz	20.58	20.56	20.47	20.51
CH 11	2462 MHz	19.01	18.99	18.93	18.99

802.11g mode Peak Power (dBm)									
Channel	Freq. (MHz)	Data Rate (MHz)							
		6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 01	2412 MHz	21.75	21.76	21.96	22.14	21.66	21.77	22.18	22.22
CH 06	2437 MHz	22.45	22.32	23.22	23.12	22.36	22.52	23.34	23.36
CH 11	2462 MHz	21.26	21.29	22.36	22.32	21.08	21.26	22.55	22.61

802.11n HT20 mode Peak Power (dBm)									
Channel	Freq. (MHz)	Data Rate (MHz)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	21.81	21.56	21.72	21.67	21.48	21.89	22.27	22.31
CH 06	2437 MHz	22.51	22.23	22.34	22.25	22.36	23.44	23.42	23.48
CH 11	2462 MHz	21.78	21.59	21.57	21.63	21.37	22.58	22.66	22.69


2.3. Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

2.4. Connection Diagram of Test System

<WLAN Tx Mode>

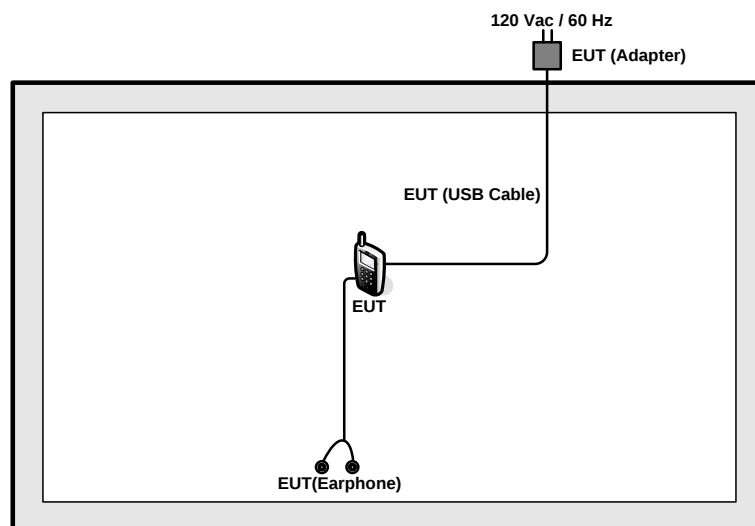

2.5. EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1. 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

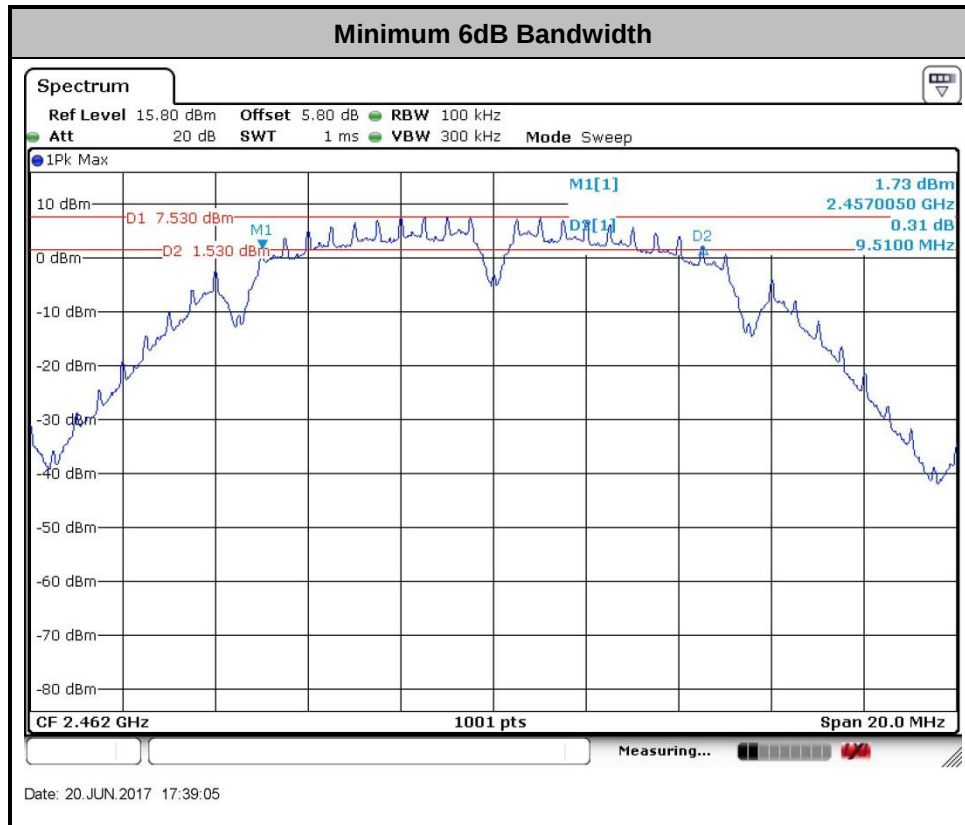

3.2. Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3. Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

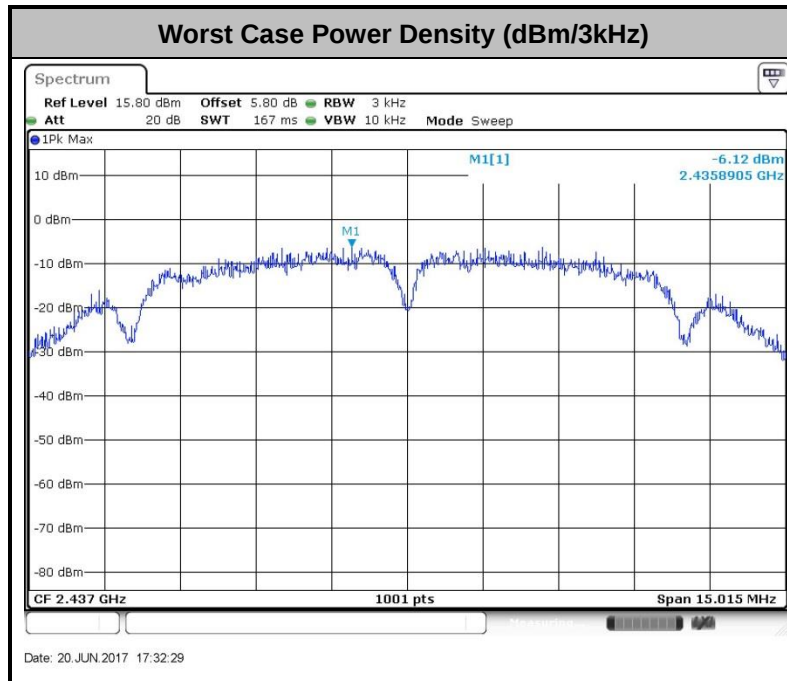

3.4. Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

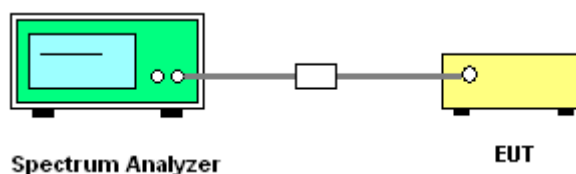



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55°C
Test Channel :	01	Test Engineer :	Silent

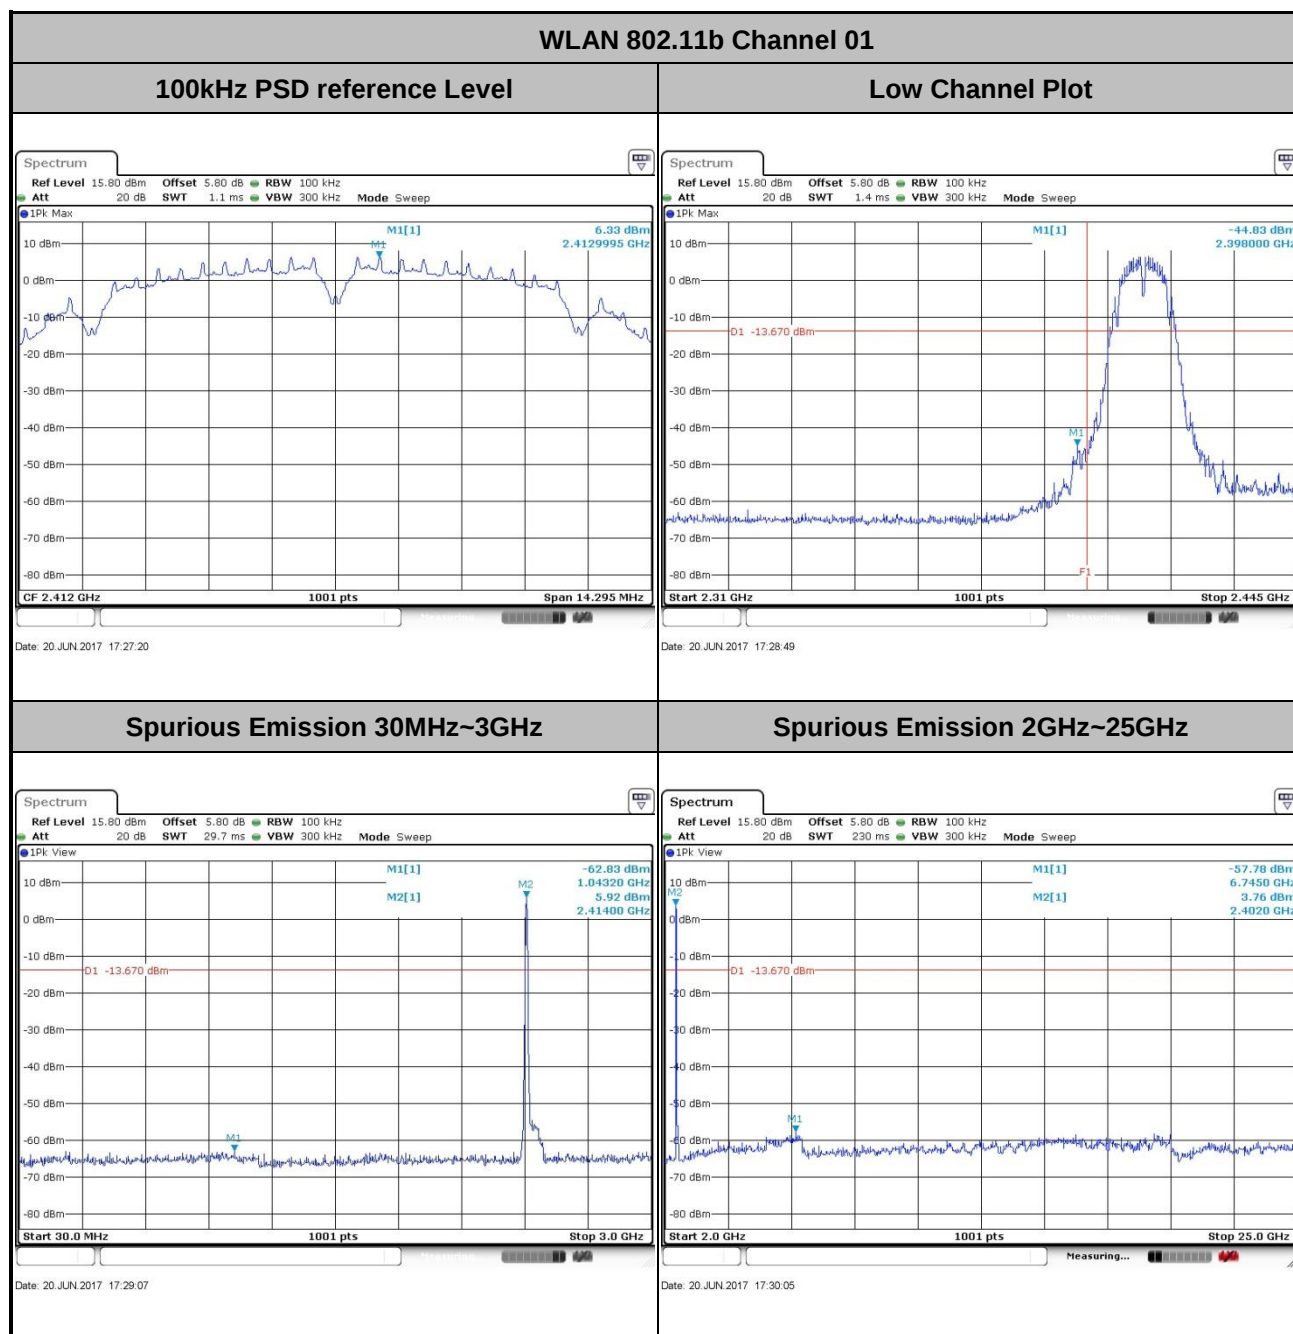





Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55°C
Test Channel :	06	Test Engineer :	Silent

WLAN 802.11b Channel 06


100kHz PSD reference Level

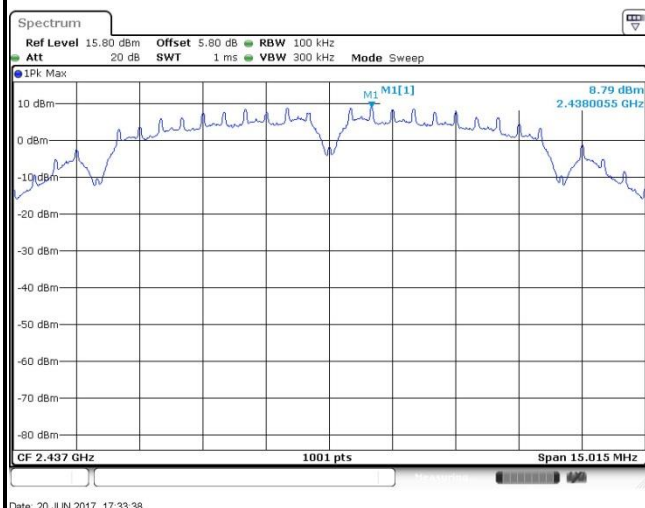

Spurious Emission 30MHz~3GHz

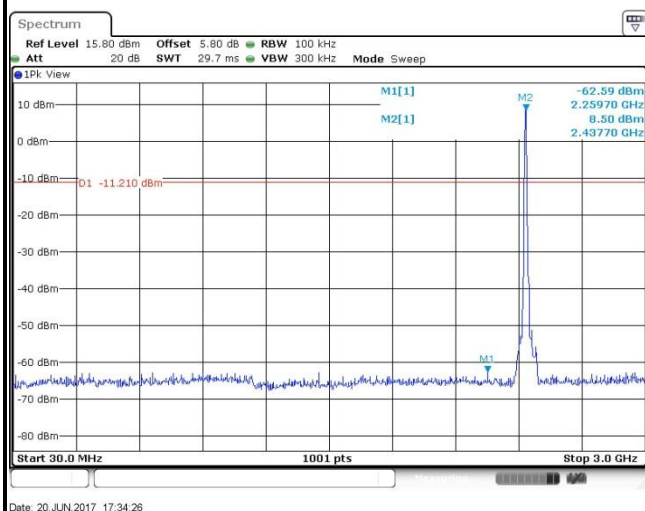

Spurious Emission 2GHz~25GHz

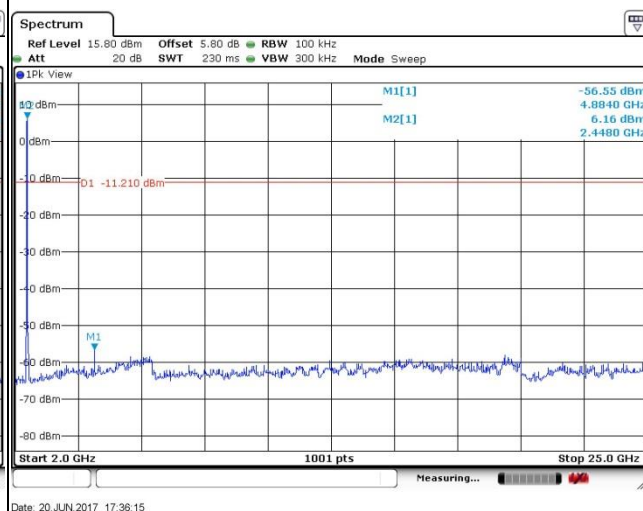




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55°C
Test Channel :	11	Test Engineer :	Silent


WLAN 802.11b Channel 11

100kHz PSD reference Level

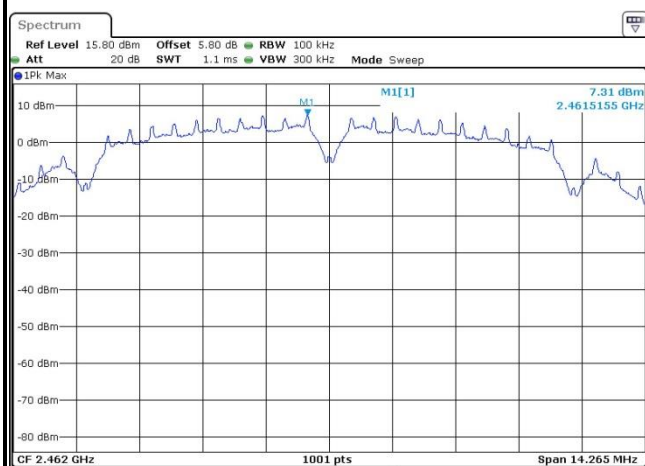


Date: 20 JUN 2017 17:40:03

High Channel Plot

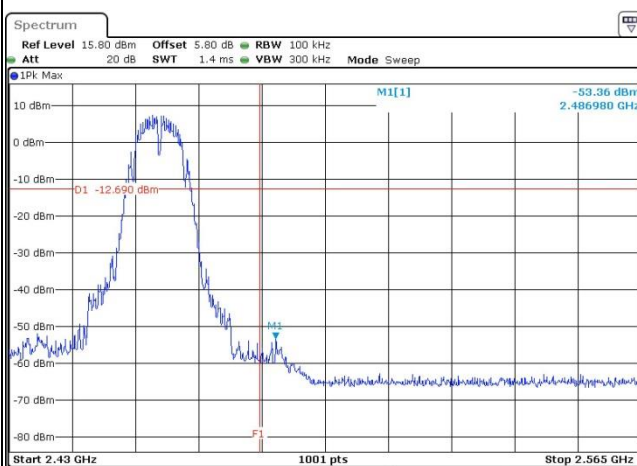


Date: 20 JUN 2017 17:40:22

Spurious Emission 30MHz~3GHz

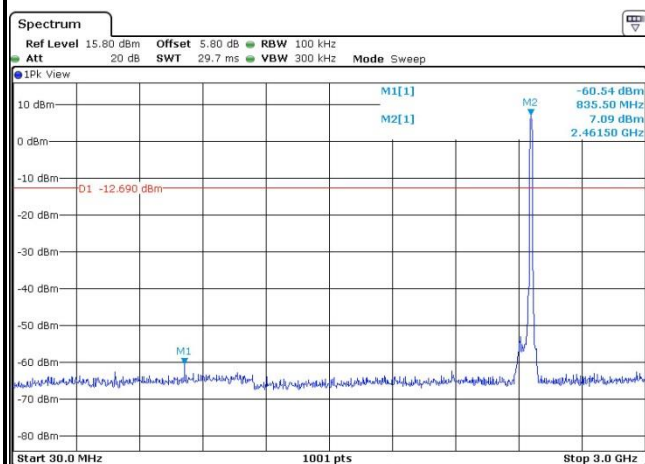

Date: 20 JUN 2017 17:44:14

Spurious Emission 2GHz~25GHz

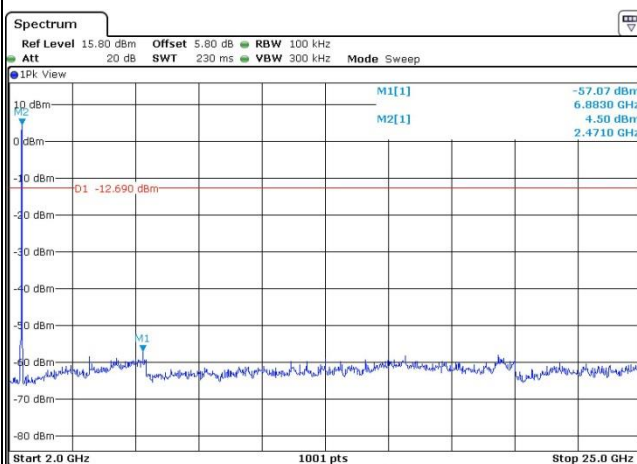


Date: 20 JUN 2017 17:41:56




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55°C
Test Channel :	01	Test Engineer :	Silent

WLAN 802.11g Channel 01


100kHz PSD reference Level

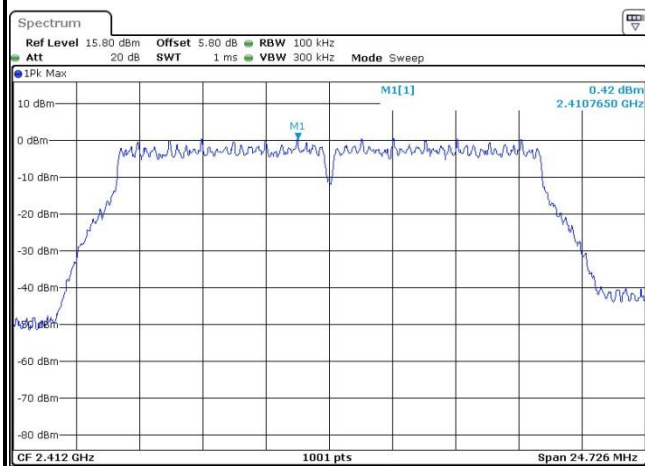


Low Channel Plot

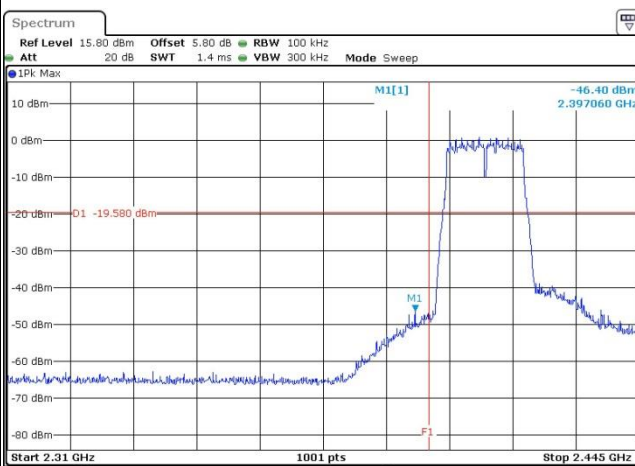

Spurious Emission 30MHz~3GHz

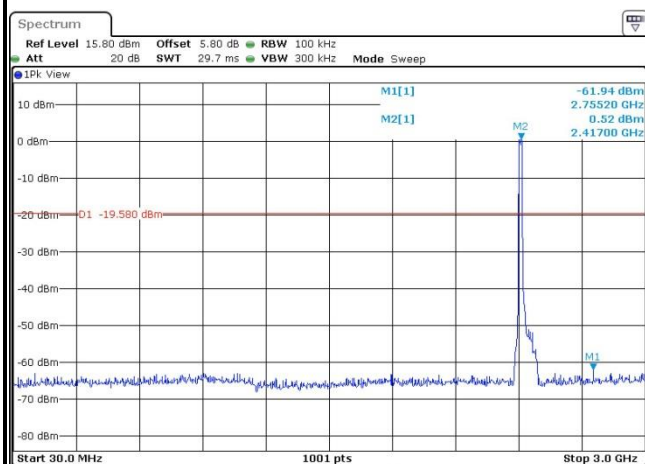

Spurious Emission 2GHz~25GHz

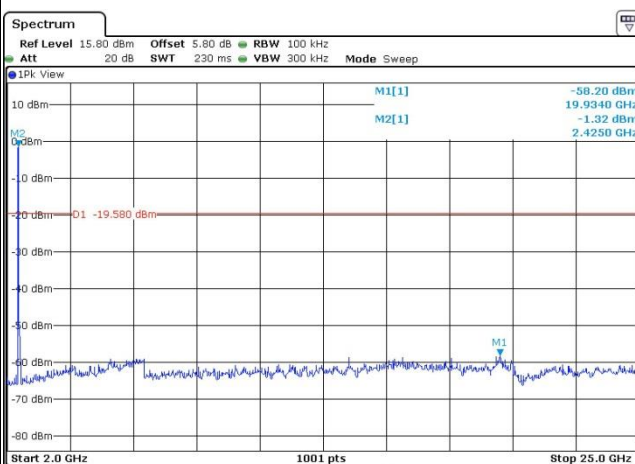





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55°C
Test Channel :	06	Test Engineer :	Silent

WLAN 802.11g Channel 06


100kHz PSD reference Level

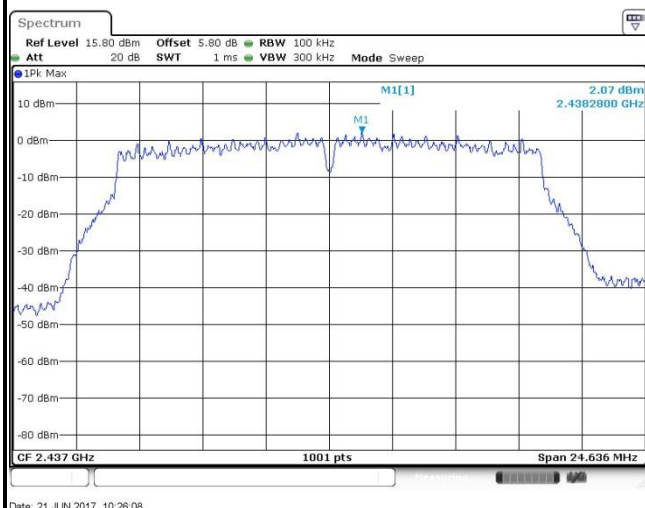

Spurious Emission 30MHz~3GHz




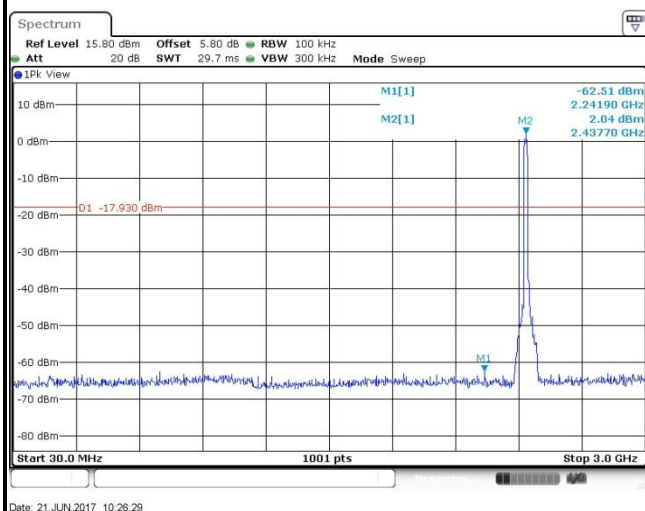


Spurious Emission 2GHz~25GHz

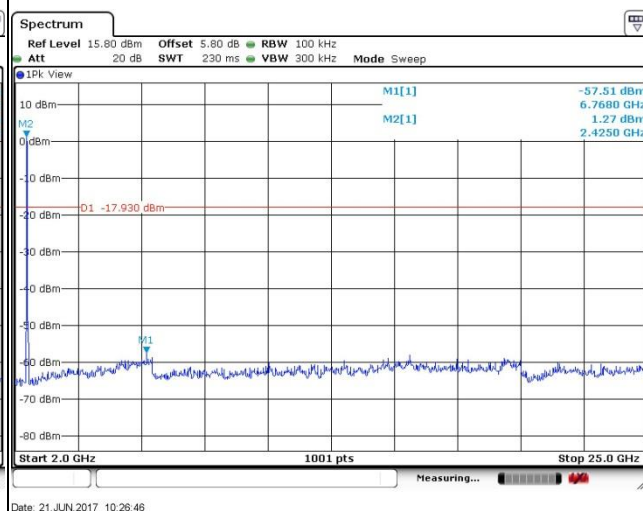




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55°C
Test Channel :	11	Test Engineer :	Silent

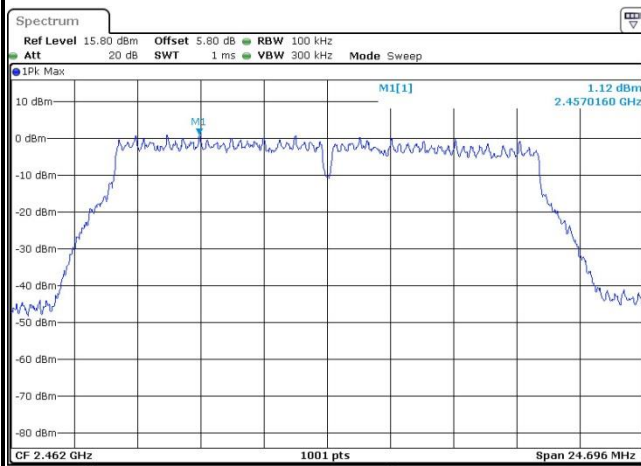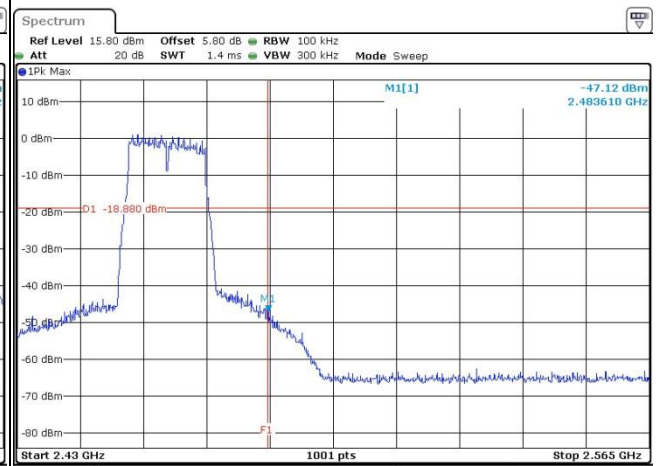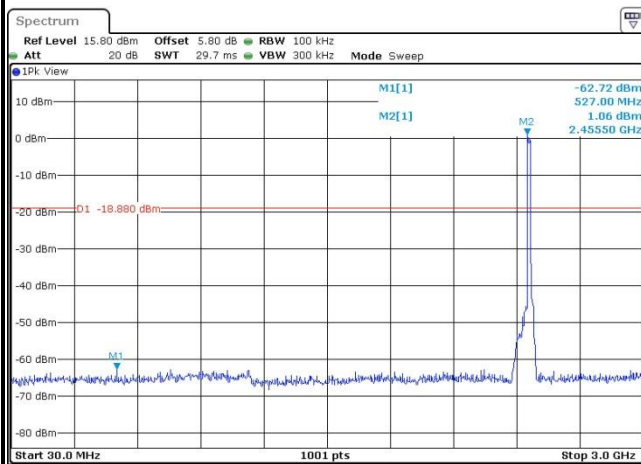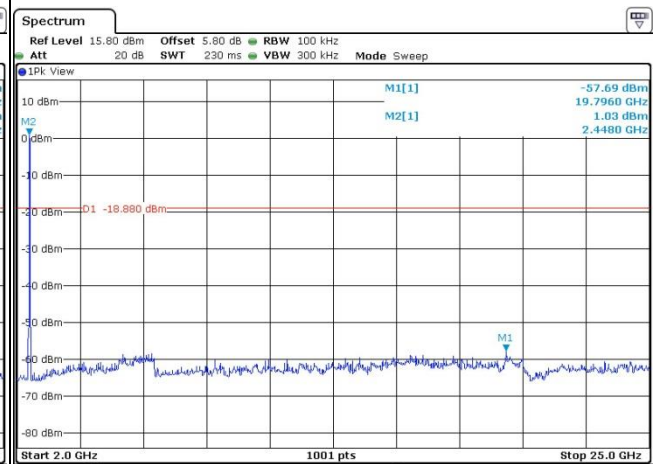WLAN 802.11g Channel 11**100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**






Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55°C
Test Channel :	01	Test Engineer :	Silent

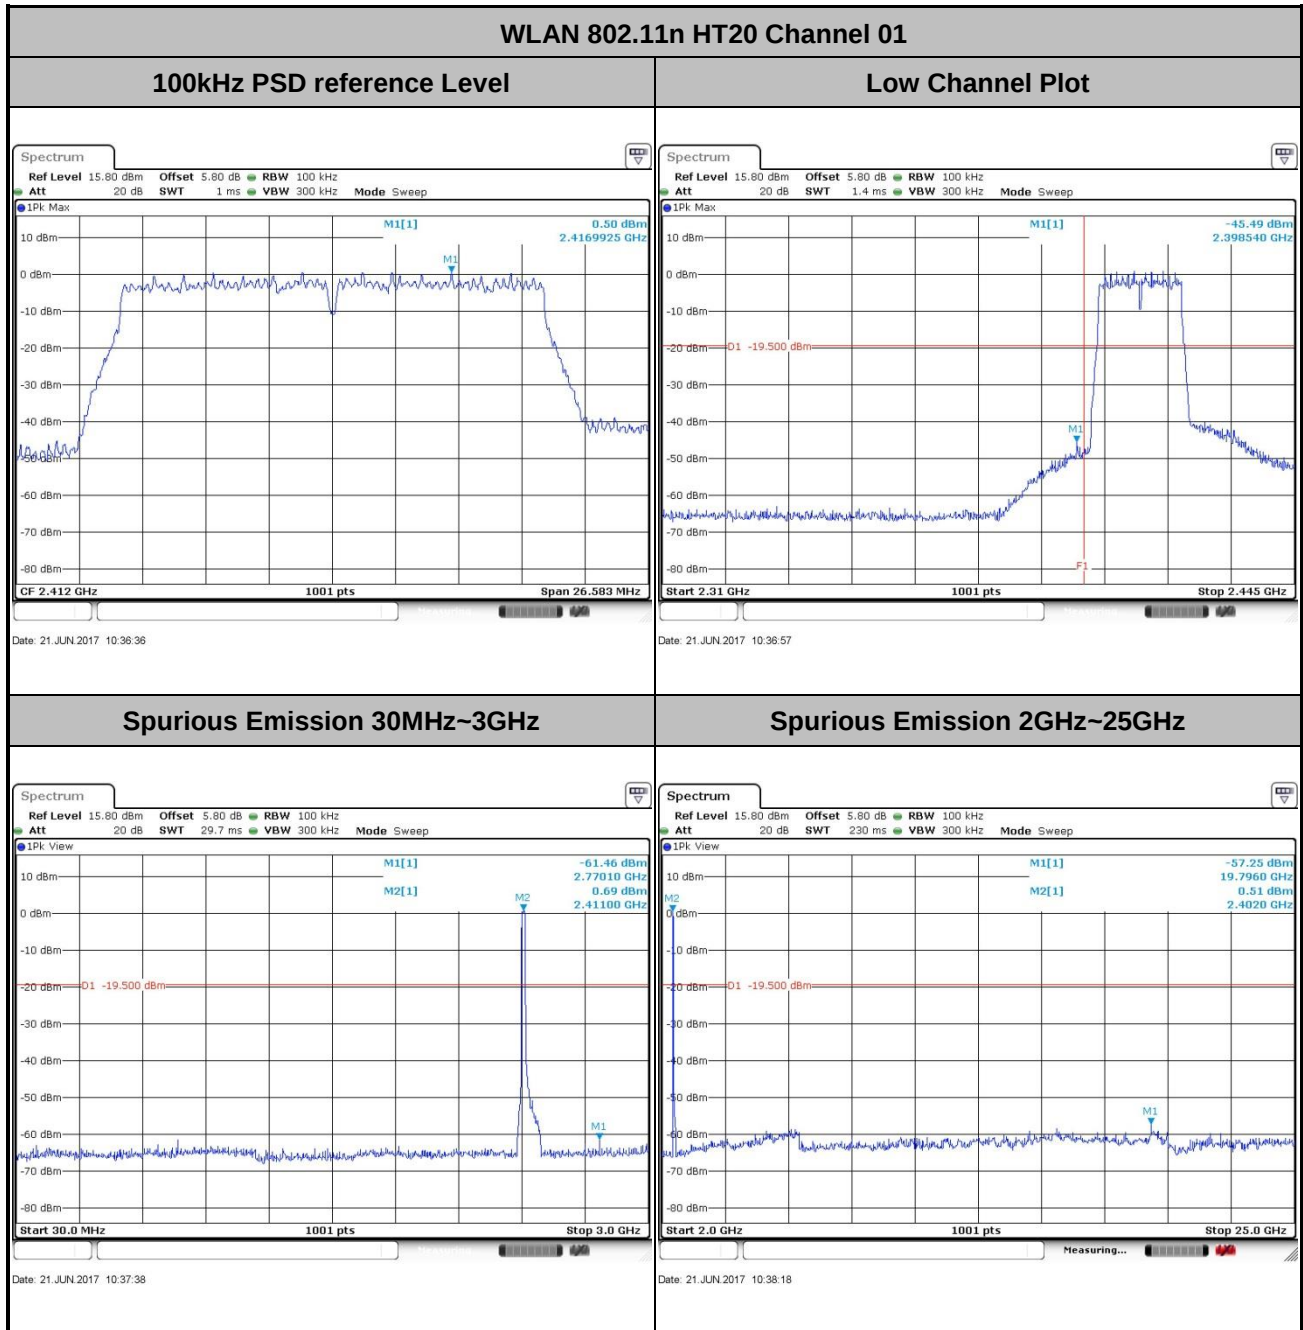



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55°C
Test Channel :	06	Test Engineer :	Silent

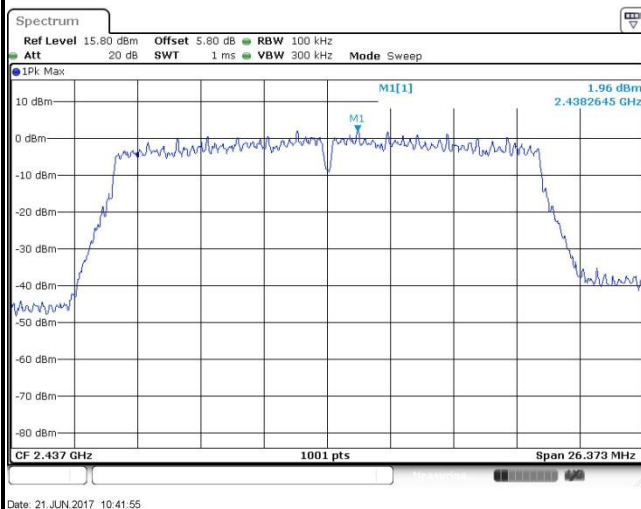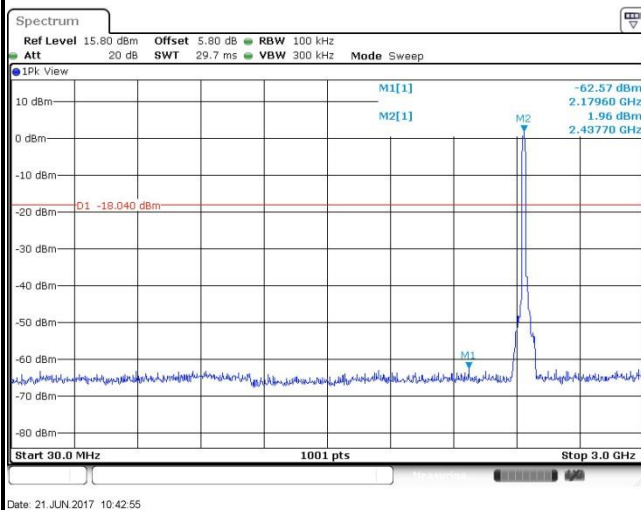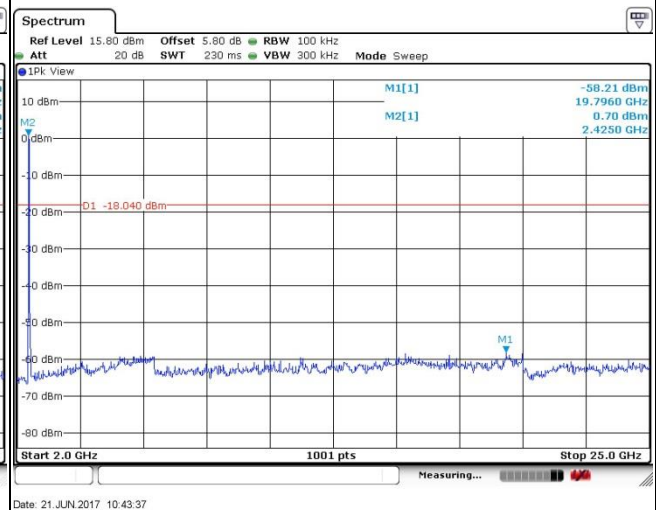
WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55°C
Test Channel :	11	Test Engineer :	Silent

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

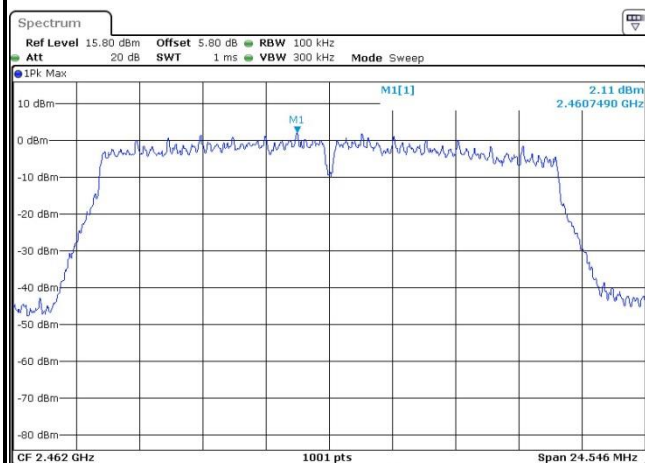


High Channel Plot

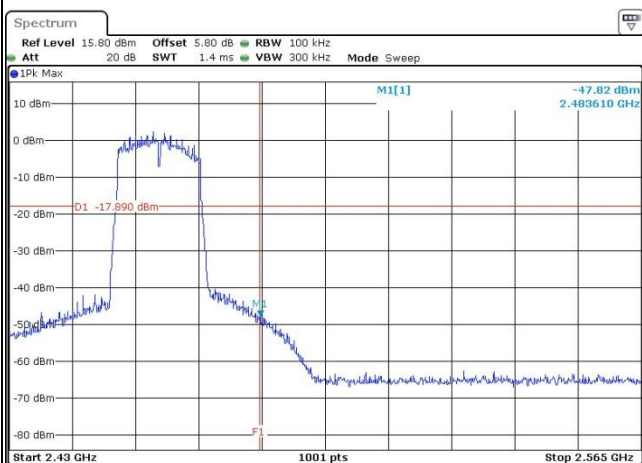

Spurious Emission 30MHz~3GHz

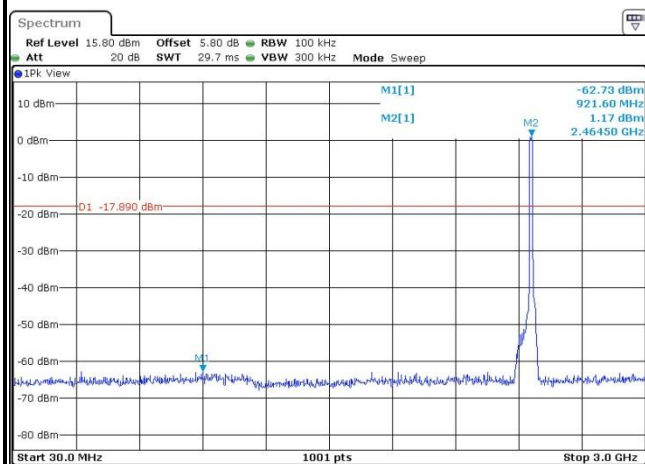

Spurious Emission 2GHz~25GHz

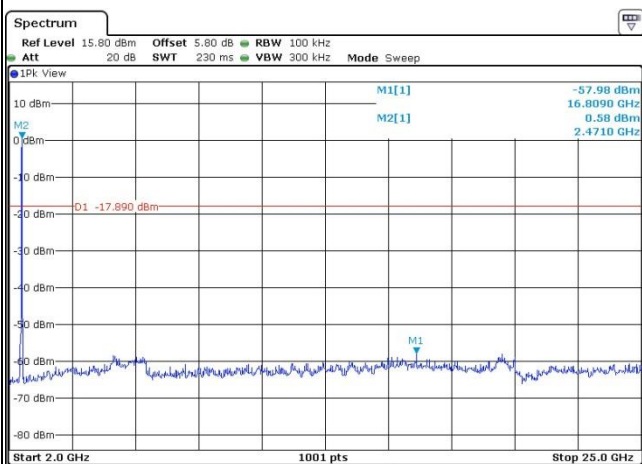

3.5. Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

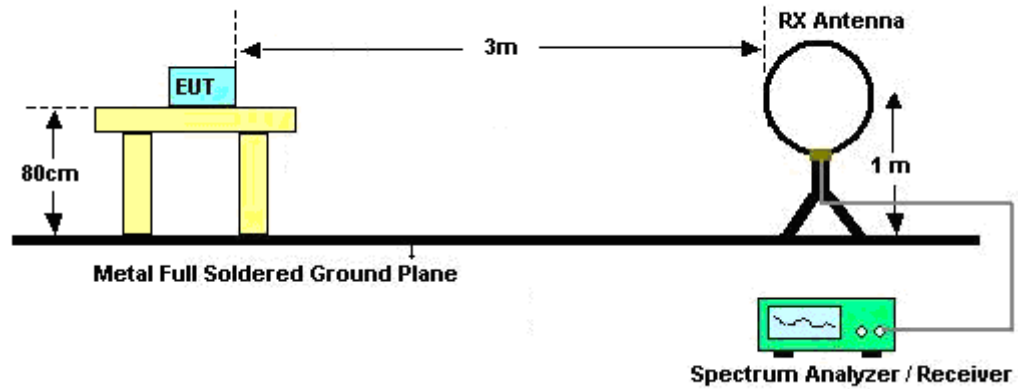

For radiated emissions from 30MHz to 1GHz

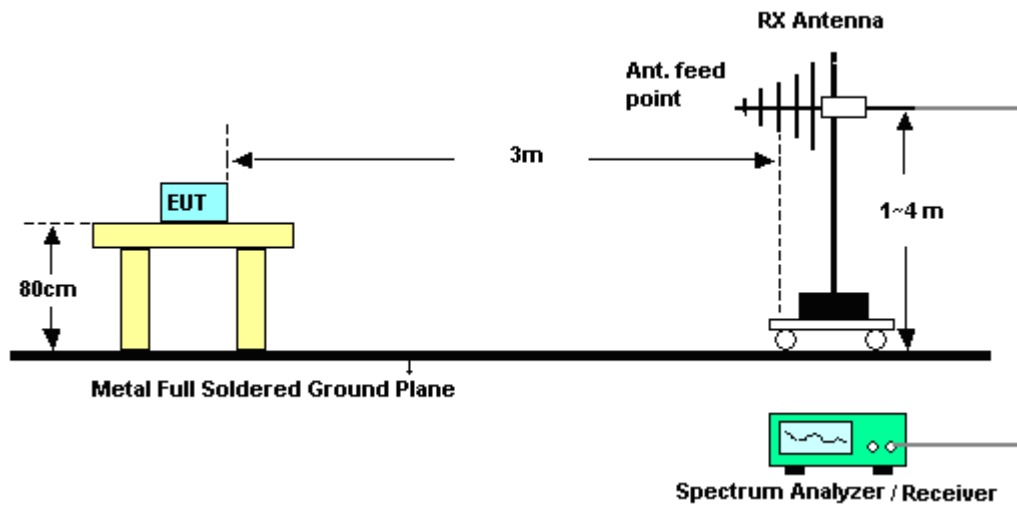

For radiated emissions above 1GHz

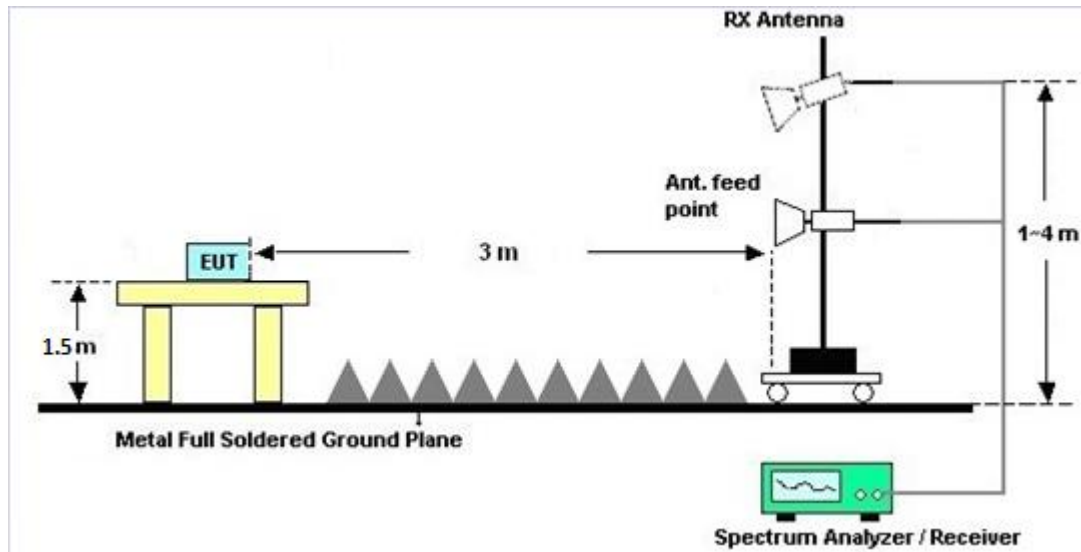

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6. AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

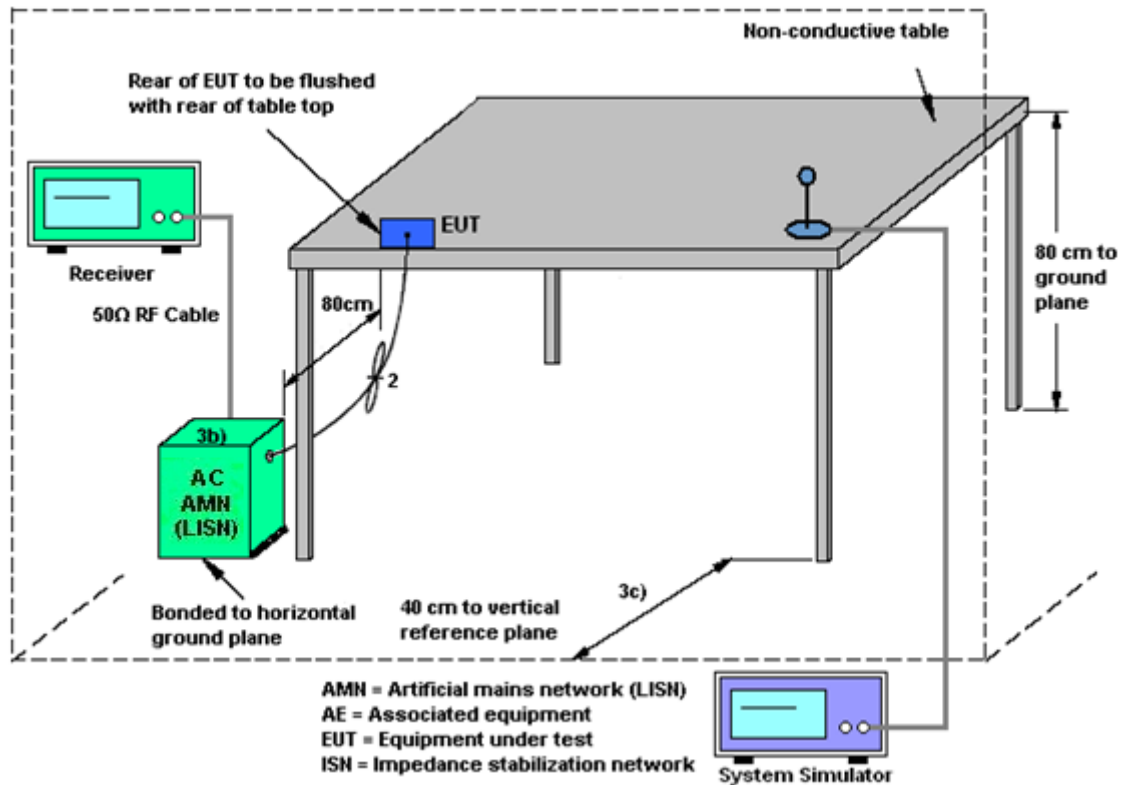

3.6.5 Test Result of AC Conducted Emission

This section is not required to be tested according to the Product Equality Declaration provide by manufacturer.



3.7. Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jun. 20, 2017~ Jun. 21, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Jun. 20, 2017~ Jun. 21, 2017	Jan. 19, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Jun. 20, 2017~ Jun. 21, 2017	Jan. 19, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz; Max 30dBm	Oct. 22, 2016	May 22, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 18, 2017	May 22, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	May 22, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	May 22, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-135 6	1GHz~18GHz	Apr. 22, 2017	May 22, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	May 22, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	May 22, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	May 22, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 18, 2017	May 22, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Oct. 13, 2016	May 22, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	May 22, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 22, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 22, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
--	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/6/20~2017/6/21	Relative Humidity:	51~55	%

TEST RESULTS DATA
6dB Occupied Bandwidth

2.4GHz Band							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	9.53	0.50	Pass
11b	1Mbps	1	6	2437	10.01	0.50	Pass
11b	1Mbps	1	11	2462	9.51	0.50	Pass
11g	54Mbps	1	1	2412	16.48	0.50	Pass
11g	54Mbps	1	6	2437	16.42	0.50	Pass
11g	54Mbps	1	11	2462	16.46	0.50	Pass
HT20	MCS7	1	1	2412	17.72	0.50	Pass
HT20	MCS7	1	6	2437	17.58	0.50	Pass
HT20	MCS7	1	11	2462	16.36	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.42	30.00	-0.60	17.82	36.00	Pass
11b	1Mbps	1	6	2437	20.58	30.00	-0.60	19.98	36.00	Pass
11b	1Mbps	1	11	2462	19.01	30.00	-0.60	18.41	36.00	Pass
11g	54Mbps	1	1	2412	22.22	30.00	-0.60	21.62	36.00	Pass
11g	54Mbps	1	6	2437	23.36	30.00	-0.60	22.76	36.00	Pass
11g	54Mbps	1	11	2462	22.61	30.00	-0.60	22.01	36.00	Pass
HT20	MCS7	1	1	2412	22.31	30.00	-0.60	21.71	36.00	Pass
HT20	MCS7	1	6	2437	23.48	30.00	-0.60	22.88	36.00	Pass
HT20	MCS7	1	11	2462	22.69	30.00	-0.60	22.09	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	15.38
11b	1Mbps	1	6	2437	0.00	17.64
11b	1Mbps	1	11	2462	0.00	15.95
11g	54Mbps	1	1	2412	0.81	11.84
11g	54Mbps	1	6	2437	0.81	12.82
11g	54Mbps	1	11	2462	0.81	11.74
HT20	MCS7	1	1	2412	0.87	11.84
HT20	MCS7	1	6	2437	0.87	12.86
HT20	MCS7	1	11	2462	0.87	12.32

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-8.40	-0.60	8.00	Pass
11b	1Mbps	1	6	2437	-6.12	-0.60	8.00	Pass
11b	1Mbps	1	11	2462	-6.29	-0.60	8.00	Pass
11g	54Mbps	1	1	2412	-12.86	-0.60	8.00	Pass
11g	54Mbps	1	6	2437	-12.58	-0.60	8.00	Pass
11g	54Mbps	1	11	2462	-12.70	-0.60	8.00	Pass
HT20	MCS7	1	1	2412	-12.67	-0.60	8.00	Pass
HT20	MCS7	1	6	2437	-11.56	-0.60	8.00	Pass
HT20	MCS7	1	11	2462	-12.23	-0.60	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2387.22	49.96	-24.04	74	55.11	25.8	5.47	36.42	317	36	P	H
		2389.17	38.96	-15.04	54	44.11	25.8	5.47	36.42	317	36	A	H
	*	2412	102.87	-	-	108	25.83	5.47	36.43	317	36	P	H
	*	2414	99.74	-	-	104.87	25.83	5.47	36.43	317	36	A	H
		2389.3	50.4	-23.6	74	55.55	25.8	5.47	36.42	185	274	P	V
		2387.09	39.47	-14.53	54	44.62	25.8	5.47	36.42	185	274	A	V
	*	2412	106.49	-	-	111.62	25.83	5.47	36.43	185	274	P	V
	*	2410	103.25	-	-	108.38	25.83	5.47	36.43	185	274	A	V
802.11b CH 06 2437MHz		2385.01	50.26	-23.74	74	55.11	26.16	5.45	36.46	389	49	P	H
		2389.56	39.4	-14.6	54	44.05	26.3	5.47	36.42	389	49	A	H
	*	2438	108.03	-	-	112.82	26.17	5.49	36.45	389	49	P	H
	*	2438	104.88	-	-	109.67	26.17	5.49	36.45	389	49	A	H
		2486.62	50.62	-23.38	74	55.49	26.09	5.51	36.47	389	49	P	H
		2487.76	39.83	-14.17	54	44.75	26.04	5.52	36.48	389	49	A	H
		2389.82	50.23	-23.77	74	54.88	26.3	5.47	36.42	311	266	P	V
		2389.95	39.57	-14.43	54	44.22	26.3	5.47	36.42	311	266	A	V
	*	2436	107.57	-	-	112.32	26.21	5.48	36.44	311	266	P	V
	*	2438	104.45	-	-	109.24	26.17	5.49	36.45	311	266	A	V
		2484.88	51.43	-22.57	74	56.3	26.09	5.51	36.47	311	266	P	V
		2483.56	40	-14	54	44.87	26.09	5.51	36.47	311	266	A	V



802.11b CH 11 2462MHz	*	2462	103.69	-	-	108.74	25.91	5.5	36.46	360	339	P	H
	*	2460	100.35	-	-	105.4	25.91	5.5	36.46	360	339	A	H
		2488	50.58	-23.42	74	55.57	25.97	5.52	36.48	360	339	P	H
		2486.86	40.27	-13.73	54	45.29	25.94	5.51	36.47	360	339	A	H
	*	2462	107.54	-	-	112.59	25.91	5.5	36.46	205	280	P	V
	*	2460	104.38	-	-	109.43	25.91	5.5	36.46	205	280	A	V
		2483.8	52.58	-21.42	74	57.6	25.94	5.51	36.47	205	280	P	V
		2486.8	41.9	-12.1	54	46.92	25.94	5.51	36.47	205	280	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	41.71	-32.29	74	39.82	30.68	7.72	36.51	100	360	P	H
		4824	40.7	-33.3	74	38.81	30.68	7.72	36.51	100	360	P	V
802.11b CH 06 2437MHz		4872	41.65	-32.35	74	39.45	30.97	7.76	36.53	100	360	P	H
		7308	47.47	-26.53	74	38.93	35.03	9.76	36.25	100	360	P	H
		4872	41.41	-32.59	74	39.21	30.97	7.76	36.53	100	360	P	V
		7308	46.72	-27.28	74	38.18	35.03	9.76	36.25	100	360	P	V
802.11b CH 11 2462MHz		4926	41.51	-32.49	74	39.25	31.02	7.8	36.56	100	360	P	H
		7386	47.5	-26.5	74	38.89	35.03	9.86	36.28	100	360	P	H
		4926	42.13	-31.87	74	39.87	31.02	7.8	36.56	100	360	P	V
		7386	46.84	-27.16	74	38.23	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2338.6	49.68	-24.32	74	55.4	25.42	5.41	36.55	294	35	P	H
		2386.05	41.79	-12.21	54	46.94	25.8	5.47	36.42	294	35	A	H
	*	2414	100.68	-	-	105.81	25.83	5.47	36.43	294	35	P	H
	*	2410	94.06	-	-	99.19	25.83	5.47	36.43	294	35	A	H
		2389.56	50.05	-23.95	74	55.2	25.8	5.47	36.42	100	90	P	V
		2388.78	42.43	-11.57	54	47.58	25.8	5.47	36.42	100	90	A	V
	*	2410	101.39	-	-	106.52	25.83	5.47	36.43	100	90	P	V
	*	2410	94.69	-	-	99.82	25.83	5.47	36.43	100	90	A	V
802.11g CH 06 2437MHz		2388.39	50.36	-23.64	74	55.51	25.8	5.47	36.42	301	42	P	H
		2389.17	42.2	-11.8	54	47.35	25.8	5.47	36.42	301	42	A	H
	*	2440	106.73	-	-	111.8	25.89	5.49	36.45	301	42	P	H
	*	2438	99.54	-	-	104.61	25.89	5.49	36.45	301	42	A	H
		2489.44	53.34	-20.66	74	58.33	25.97	5.52	36.48	301	42	P	H
		2483.86	44.48	-9.52	54	49.5	25.94	5.51	36.47	301	42	A	H
		2388.78	50.35	-23.65	74	55.5	25.8	5.47	36.42	100	139	P	V
		2389.82	42.56	-11.44	54	47.71	25.8	5.47	36.42	100	139	A	V
	*	2440	107.82	-	-	112.89	25.89	5.49	36.45	100	139	P	V
	*	2436	100.24	-	-	105.34	25.86	5.48	36.44	100	139	A	V
		2488.36	52.95	-21.05	74	57.94	25.97	5.52	36.48	100	139	P	V
		2484.82	44.05	-9.95	54	49.07	25.94	5.51	36.47	100	139	A	V



802.11g CH 11 2462MHz	*	2464	104.93	-	-	109.98	25.91	5.5	36.46	347	37	P	H
	*	2462	98.07	-	-	103.12	25.91	5.5	36.46	347	37	A	H
		2484.22	61.44	-12.56	74	66.46	25.94	5.51	36.47	347	37	P	H
	!	2483.51	48.29	-5.71	54	53.31	25.94	5.51	36.47	347	37	A	H
	*	2464	103.87	-	-	108.92	25.91	5.5	36.46	100	65	P	V
	*	2464	96.7	-	-	101.75	25.91	5.5	36.46	100	65	A	V
		2486.02	59.99	-14.01	74	65.01	25.94	5.51	36.47	100	65	P	V
	!	2484.28	48.43	-5.57	54	53.45	25.94	5.51	36.47	100	65	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	41.01	-32.99	74	39.12	30.68	7.72	36.51	100	360	P	H
		4824	41.08	-32.92	74	39.19	30.68	7.72	36.51	100	360	P	V
802.11g CH 06 2437MHz		4872	42.1	-31.9	74	40.02	30.85	7.76	36.53	100	360	P	H
		7308	46.28	-27.72	74	37.96	34.81	9.76	36.25	100	360	P	H
		4872	41.03	-32.97	74	38.95	30.85	7.76	36.53	100	360	P	V
		7308	46.74	-27.26	74	38.42	34.81	9.76	36.25	100	360	P	V
802.11g CH 11 2462MHz		4926	41.43	-32.57	74	39.17	31.02	7.8	36.56	100	360	P	H
		7386	46.71	-27.29	74	38.1	35.03	9.86	36.28	100	360	P	H
		4926	41.63	-32.37	74	39.37	31.02	7.8	36.56	100	360	P	V
		7386	46.36	-27.64	74	37.75	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.82	53.78	-20.22	74	58.93	25.8	5.47	36.42	261	223	P	H
		2389.69	45.07	-8.93	54	50.22	25.8	5.47	36.42	261	223	A	H
	*	2414	105.39	-	-	110.52	25.83	5.47	36.43	261	223	P	H
	*	2410	97.36	-	-	102.49	25.83	5.47	36.43	261	223	A	H
		2389.3	50.38	-23.62	74	55.53	25.8	5.47	36.42	305	259	P	V
		2389.56	42.04	-11.96	54	47.19	25.8	5.47	36.42	305	259	A	V
	*	2412	100.61	-	-	105.74	25.83	5.47	36.43	305	259	P	V
	*	2410	94.31	-	-	99.44	25.83	5.47	36.43	305	259	A	V
802.11n HT20 CH 06 2437MHz		2388.13	51.09	-22.91	74	56.24	25.8	5.47	36.42	314	224	P	H
		2389.82	43.09	-10.91	54	48.24	25.8	5.47	36.42	314	224	A	H
	*	2436	107.62	-	-	112.72	25.86	5.48	36.44	314	224	P	H
	*	2436	100.87	-	-	105.97	25.86	5.48	36.44	314	224	A	H
		2484.7	53.71	-20.29	74	58.73	25.94	5.51	36.47	314	224	P	H
		2486.98	44.5	-9.5	54	49.52	25.94	5.51	36.47	314	224	A	H
		2389.56	50.27	-23.73	74	55.42	25.8	5.47	36.42	270	256	P	V
		2389.82	41.68	-12.32	54	46.83	25.8	5.47	36.42	270	256	A	V
	*	2438	104.1	-	-	109.17	25.89	5.49	36.45	270	256	P	V
	*	2438	97.19	-	-	102.26	25.89	5.49	36.45	270	256	A	V
		2486.08	51.87	-22.13	74	56.89	25.94	5.51	36.47	270	256	P	V
		2485.78	42.83	-11.17	54	47.85	25.94	5.51	36.47	270	256	A	V



802.11n HT20 CH 11 2462MHz	*	2464	104.5	-	-	109.55	25.91	5.5	36.46	351	230	P	H
	*	2460	96.89	-	-	101.94	25.91	5.5	36.46	351	230	A	H
		2484.58	61.91	-12.09	74	66.93	25.94	5.51	36.47	351	230	P	H
	!	2484.76	49.61	-4.39	54	54.63	25.94	5.51	36.47	351	230	A	H
	*	2462	100.75	-	-	105.8	25.91	5.5	36.46	325	256	P	V
	*	2462	93.65	-	-	98.7	25.91	5.5	36.46	325	256	A	V
		2486.14	58.03	-15.97	74	63.05	25.94	5.51	36.47	325	256	P	V
		2483.74	45.63	-8.37	54	50.65	25.94	5.51	36.47	325	256	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	42.78	-31.22	74	40.89	30.68	7.72	36.51	100	360	P	H
		4824	40.41	-33.59	74	38.52	30.68	7.72	36.51	100	360	P	V
802.11n HT20 CH 06 2437MHz		4872	41.46	-32.54	74	39.38	30.85	7.76	36.53	100	360	P	H
		7308	47.28	-26.72	74	38.96	34.81	9.76	36.25	100	360	P	H
		4872	41.38	-32.62	74	39.3	30.85	7.76	36.53	100	360	P	V
		7308	46.3	-27.7	74	37.98	34.81	9.76	36.25	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	41.66	-32.34	74	39.4	31.02	7.8	36.56	100	360	P	H
		7386	47.03	-26.97	74	38.42	35.03	9.86	36.28	100	360	P	H
		4926	41.97	-32.03	74	39.71	31.02	7.8	36.56	100	360	P	V
		7386	47.28	-26.72	74	38.67	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30	30.48	-9.52	40	34.13	27.2	0.42	31.27	100	295	P	H
		33.88	30.08	-9.92	40	34.99	25.84	0.58	31.33	-	-	P	H
		94.99	30.37	-13.13	43.5	41.84	18.5	1.48	31.45	-	-	P	H
		189.08	29.21	-14.29	43.5	42.83	16.25	1.63	31.5	-	-	P	H
		448.07	26	-20	46	29.51	25.41	2.32	31.24	-	-	P	H
		826.37	30.48	-15.52	46	29.31	28.48	3.63	30.94	-	-	P	H
	!	30	35.65	-4.35	40	39.3	27.2	0.42	31.27	100	46	P	V
	!	39.7	34.57	-5.43	40	43.06	22.2	0.68	31.37	-	-	P	V
	!	46.49	34.11	-5.89	40	46.13	18.3	1.1	31.42	-	-	P	V
		53.28	31.34	-8.66	40	45.96	15.3	1.48	31.4	-	-	P	V
		94.02	32.04	-11.46	43.5	43.81	18.3	1.38	31.45	-	-	P	V
		179.38	29.68	-13.82	43.5	43.07	16.66	1.47	31.52	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	-	-	-	10Hz
802.11g	82.88	0.175	5.714	10KHz
802.11n HT20	81.89	0.164	6.098	10KHz


802.11b



Date: 14.FEB.2017 18:17:55




802.11g

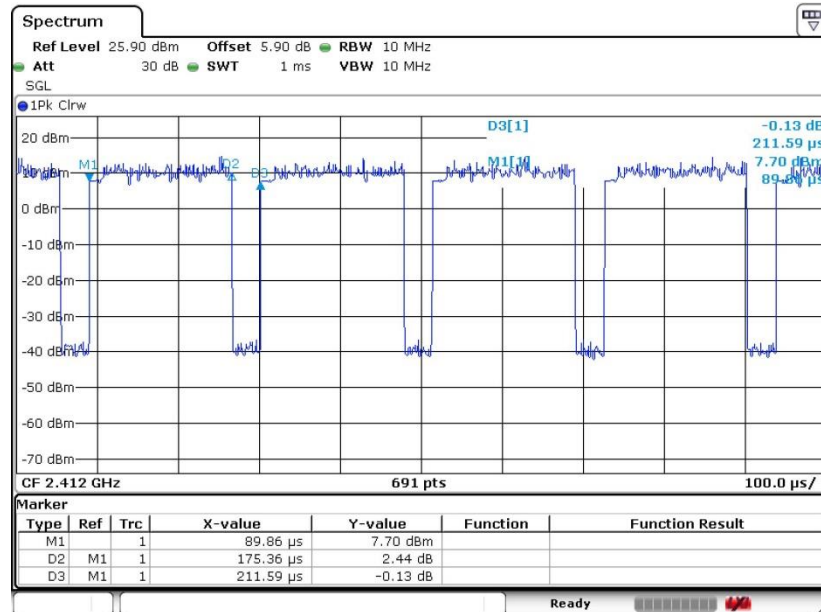

Date: 14.FEB.2017 18:30:18

802.11n HT20

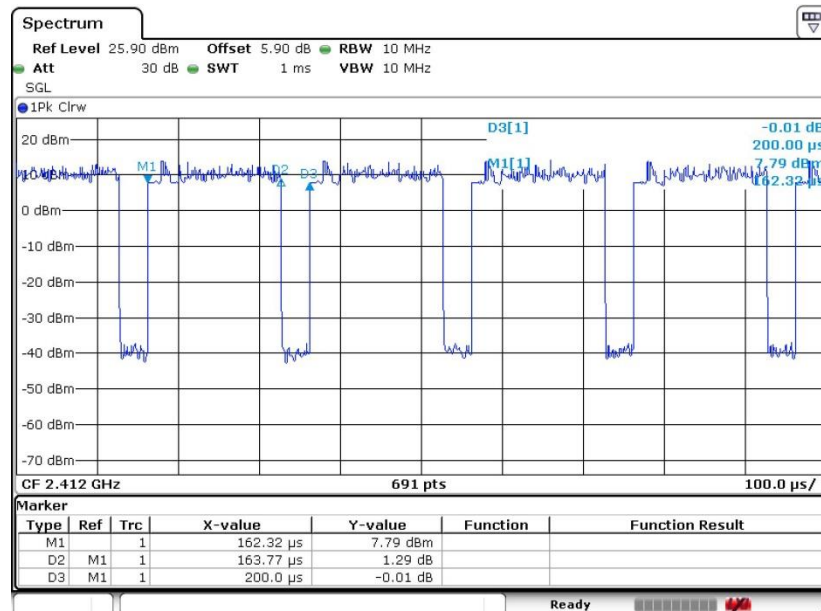

Date: 14.FEB.2017 18:38:05



Appendix E. Product Equality Declaration



Appendix F. Original Report

Please refer to Sporton report number FR711913C which is issued separately.