

# FCC RF Test Report


**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT1921-6, XT1921-1  
**FCC ID** : IHDT56XC1  
**STANDARD** : FCC 47 CFR Part 2, 27  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Dec. 20, 2017 and completely tested on Jan. 29, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-E and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56XC1

Page Number : 1 of 23

Report Issued Date : Feb. 23, 2018

Report Version : Rev. 01

Report Template No.: BU5-FGLTE27D Version 2.0



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 6
1.5 Modification of EUT ..... 6
1.6 Emission Designator ..... 6
1.7 Testing Site ..... 7
1.8 Applied Standards ..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System ..... 10
2.3 Support Unit used in test configuration and system ..... 10
2.4 Measurement Results Explanation Example ..... 11
2.5 Frequency List of Low/Middle/High Channels ..... 11
3 CONDUCTED TEST ITEMS ..... 12
3.1 Measuring Instruments ..... 12
3.2 Test Setup ..... 12
3.3 Test Result of Conducted Test ..... 12
3.4 Conducted Output Power Measurement ..... 13
3.5 Peak-to-Average Ratio ..... 14
3.6 EIRP Power Density ..... 15
3.7 Occupied Bandwidth ..... 16
3.8 Conducted Band Edge Measurement ..... 17
3.9 Conducted Spurious Emission Measurement ..... 18
3.10 Frequency Stability Measurement ..... 19
4 RADIATED TEST ITEMS ..... 20
4.1 Measuring Instruments ..... 20
4.2 Test Setup ..... 20
4.3 Test Result of Radiated Test ..... 20
4.4 Radiated Spurious Emission Measurement ..... 21
5 LIST OF MEASURING EQUIPMENT ..... 22
6 UNCERTAINTY OF EVALUATION ..... 23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF EIRP AND RADIATED TEST





### SUMMARY OF TEST RESULT

| Report Section | FCC Rule                 | Description                                  | Limit                               | Result | Remark                                    |
|----------------|--------------------------|----------------------------------------------|-------------------------------------|--------|-------------------------------------------|
| 3.4            | §2.1046                  | Conducted Output Power                       | Reporting Only                      | PASS   | -                                         |
| 3.5            | -                        | Peak-to-Average Ratio                        | <13dB                               | N/A    | Reporting only                            |
| 3.6            | §27.50 (a)(3)            | EIRP Power Density                           | EIRP < 250mW/5MHz                   | PASS   | -                                         |
| 3.7            | §2.1049                  | Occupied Bandwidth                           | Reporting Only                      | PASS   | -                                         |
| 3.8            | §2.1051<br>§27.53 (a)(4) | Conducted Band Edge Measurement              | Refer standard                      | PASS   | -                                         |
| 3.9            | §2.1051<br>§27.53 (a)(4) | Conducted Spurious Emission                  | < 70+10log <sub>10</sub> (P[Watts]) | PASS   | -                                         |
| 3.10           | §2.1055<br>§27.54        | Frequency Stability<br>Temperature & Voltage | Within the band                     | PASS   | -                                         |
| 4.4            | §2.1053<br>§27.53 (a)(4) | Radiated Spurious Emission                   | < 70+10log <sub>10</sub> (P[Watts]) | PASS   | Under limit<br>3.96 dB at<br>6942.000 MHz |



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W. Merchandise Mart Plaza, Chicago IL 60654, USA

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Equipment                       | Mobile Cellular Phone                                                                                           |
| Brand Name                      | Motorola                                                                                                        |
| Model Name                      | XT1921-6, XT1921-1                                                                                              |
| FCC ID                          | IHDT56XC1                                                                                                       |
| IMEI Code                       | 351838090014992 (for Radiation)<br>351838090015965 (for Conducted)                                              |
| EUT supports Radios application | CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM/GNSS<br>WLAN 11b/g/n HT20<br>WLAN 11a/n HT20/HT40<br>Bluetooth BR/EDR/LE |
| HW Version                      | DVT1B                                                                                                           |
| EUT Stage                       | Identical Prototype                                                                                             |

| Accessory List |                                          |
|----------------|------------------------------------------|
| AC Adapter 1   | Brand Name : Motorola                    |
|                | Model Name : C-P35                       |
| AC Adapter 2   | Brand Name : Motorola                    |
|                | Model Name : SSW-2919UMTJ C-P35 SPN5945A |
| AC Adapter 3   | Brand Name : Motorola                    |
|                | Model Name : C-P56                       |
| AC Adapter 4   | Brand Name : Motorola                    |
|                | Model Name : C-P56                       |
| Battery        | Brand Name : Motorola                    |
|                | Model Name : GK40                        |
| USB Cable      | Brand Name : Saibao                      |
|                | Model Name : SWT-A083A                   |



### 1.4 Product Specification of Equipment Under Test

| Product Feature                 |                                   |
|---------------------------------|-----------------------------------|
| Tx Frequency                    | LTE Band 30 : 2305 MHz ~ 2315 MHz |
| Rx Frequency                    | LTE Band 30 : 2350 MHz ~ 2360 MHz |
| Bandwidth                       | 5MHz / 10MHz                      |
| Maximum Output Power to Antenna | LTE Band 30 : 23.15 dBm           |
| Antenna Gain                    | LTE Band 30 : 0.578 dBi           |
| Type of Modulation              | QPSK / 16QAM                      |

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Emission Designator

| LTE Band 30 |                       | QPSK                         |                           |                            | 16QAM                        |                           |                            |
|-------------|-----------------------|------------------------------|---------------------------|----------------------------|------------------------------|---------------------------|----------------------------|
| BW (MHz)    | Frequency Range (MHz) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum Conducted power(W) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum Conducted power(W) |
| 5           | 2307.5 ~ 2312.5       | 4M51G7D                      | -                         | 0.2343                     | 4M49W7D                      | -                         | 0.1725                     |
| 10          | 2310.0                | 9M09G7D                      | 0.0063                    | 0.2359                     | 9M03W7D                      | -                         | 0.1798                     |



### 1.7 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                           |                                                                                                                                                                  |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                                                                       |
| <b>Test Site Location</b> | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                          |
|                           | TH05-HY                                                                                                                                                          |

|                           |                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                                             |
| <b>Test Site Location</b> | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                |
|                           | 03CH11-HY                                                                                                                              |



## **1.8 Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA -603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

| Conducted Test Cases        | Band                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Bandwidth (MHz) |   |   |    |    |    | Modulation |       | RB # |      |      | Test Channel |   |   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---|---|----|----|----|------------|-------|------|------|------|--------------|---|---|
|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1.4             | 3 | 5 | 10 | 15 | 20 | QPSK       | 16QAM | 1    | Half | Full | L            | M | H |
| Max. Output Power           | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - | V | V  | -  | -  | V          | V     | V    | V    | V    | V            | V | V |
| Peak-to-Average Ratio       | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - |   |    | -  | -  |            |       |      |      |      |              |   |   |
| E.I.R.P PSD                 | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - |   | V  | -  | -  | V          | V     | V    |      |      | V            | V | V |
| 26dB and 99% Bandwidth      | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - | V | V  | -  | -  | V          | V     |      |      | V    | V            | V | V |
| Conducted Band Edge         | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - | V | V  | -  | -  | V          | V     | V    |      | V    | V            |   | V |
| Conducted Spurious Emission | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - | V | V  | -  | -  | V          | V     | V    |      |      | V            | V | V |
| Frequency Stability         | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -               | - | V | V  | -  | -  | V          |       |      |      | V    |              | V |   |
| Radiated Spurious Emission  | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Worst case      |   |   |    |    |    |            |       |      |      | V    | V            | V |   |
| Note                        | <ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Adapter 1.</li> </ol> |                 |   |   |    |    |    |            |       |      |      |      |              |   |   |

## 2.2 Connection Diagram of Test System

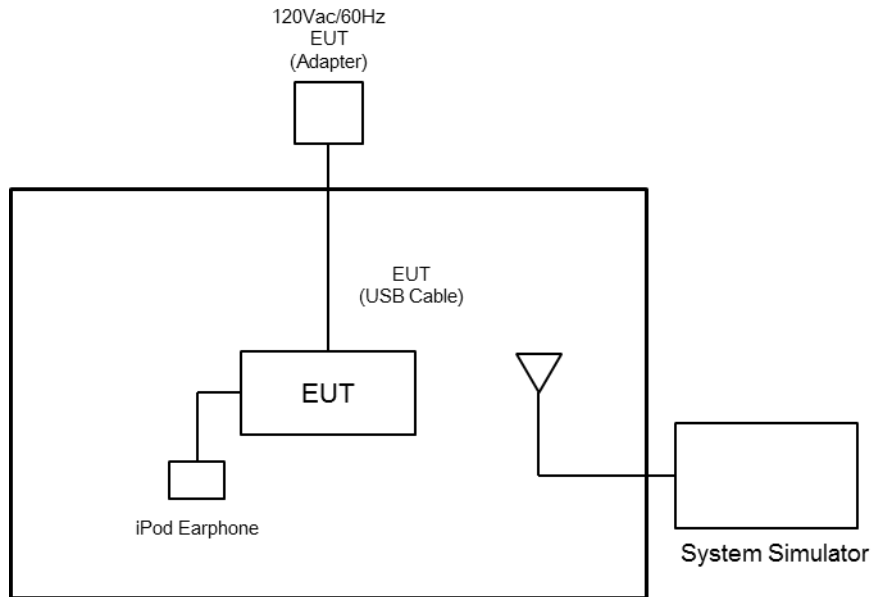

## 2.3 Support Unit used in test configuration and system

| Item | Equipment        | Trade Name | Model No. | FCC ID       | Data Cable       | Power Cord        |
|------|------------------|------------|-----------|--------------|------------------|-------------------|
| 1.   | System Simulator | Anritsu    | MT8820C   | N/A          | N/A              | Unshielded, 1.8 m |
| 2.   | iPod Earphone    | Apple      | N/A       | Verification | Unshielded, 1.0m | N/A               |

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

| LTE Band 30 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 10                                     | Channel                | -      | 27710  | -       |
|                                        | Frequency              | -      | 2310   | -       |
| 5                                      | Channel                | 27685  | 27710  | 27735   |
|                                        | Frequency              | 2307.5 | 2310   | 2312.5  |


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

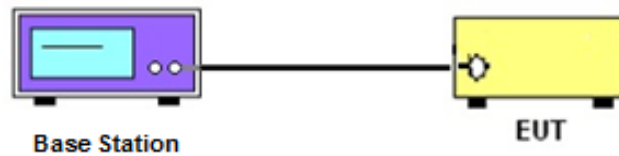

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

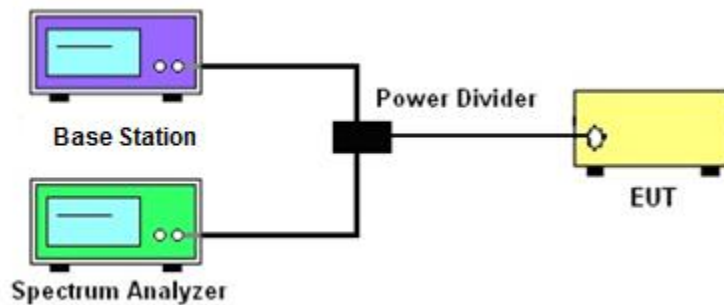

##### 3.2.3 Frequency Stability

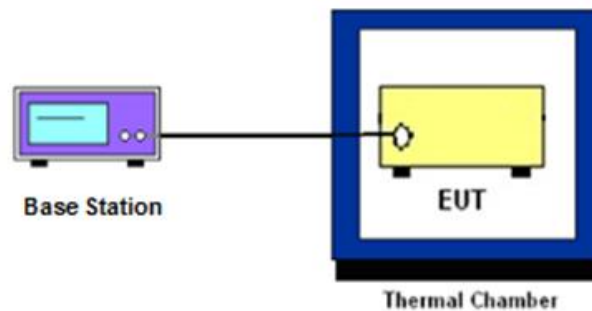

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power Measurement**

### **3.4.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 v03 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 EIRP Power Density

### 3.6.1 Description of EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. Set instrument center frequency to OBW center frequency.
3. Set span to at least 1.5 times the OBW.
4. Set the RBW to the specified reference bandwidth (5MHz).
5. Set VBW  $\geq 3 \times$  RBW.
6. Detector = RMS (power averaging).
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
8. Sweep time = auto couple.
9. Employ trace averaging (RMS) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.1 and 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.8 Conducted Band Edge Measurement

#### 3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;
- (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

#### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $70 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [70 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[70 + 10\log(P)]$  (dB)  
= -40dBm



## **3.10 Frequency Stability Measurement**

### **3.10.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **3.10.2 Test Procedures for Temperature Variation**

11. The testing follows FCC KDB 971168 v02r02 Section 9.0.
12. The EUT was set up in the thermal chamber and connected with the system simulator.
13. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
14. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.10.3 Test Procedures for Voltage Variation**

15. The testing follows FCC KDB 971168 v02r02 Section 9.0.
16. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
17. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
18. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

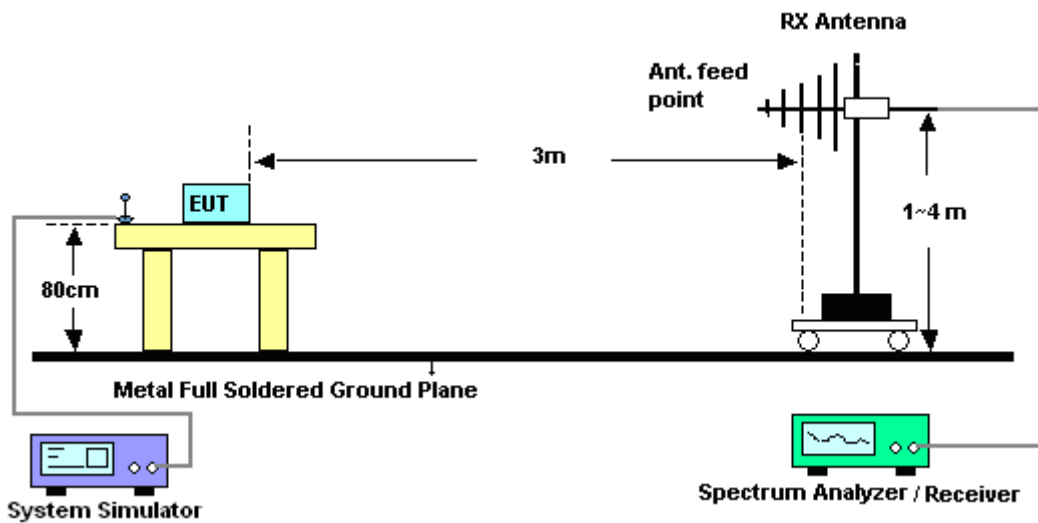

#### 4.2.2 For radiated test above 1GHz

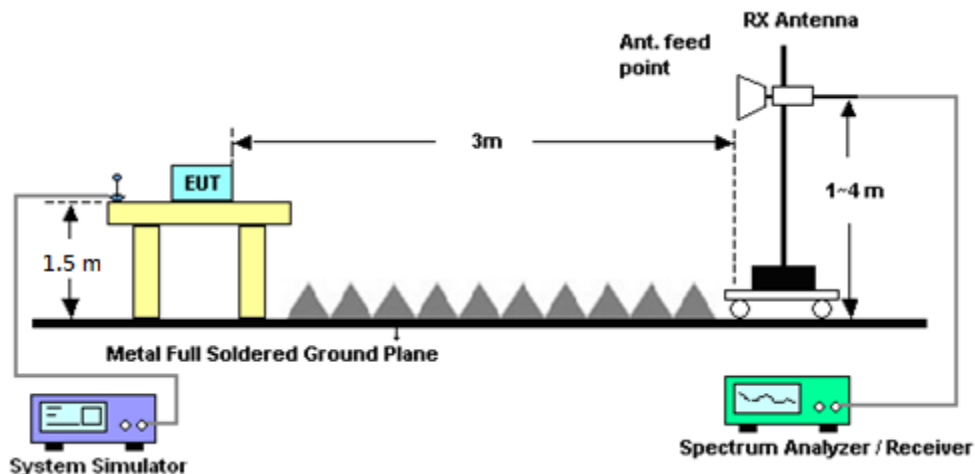

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [70 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [70 + 10log(P)] (dB)  
= -40dBm.



## 5 List of Measuring Equipment

| Instrument                | Manufacturer      | Model No.               | Serial No.     | Characteristics               | Calibration Date | Test Date                     | Due Date      | Remark                |
|---------------------------|-------------------|-------------------------|----------------|-------------------------------|------------------|-------------------------------|---------------|-----------------------|
| LTE Base Station          | Anritsu           | MT8820C                 | 6201432821     | GSM/GPRS /WCDMA/LTE           | Oct. 13, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Oct. 12, 2018 | Conducted (TH05-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz   | FSV40                   | 101397         | 10Hz~40GHz                    | Nov. 07, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Nov. 06, 2018 | Conducted (TH05-HY)   |
| Spectrum Analyzer         | Rohde & Schwarz   | FSV30                   | 100895         | 9kHz~30GHz                    | Apr. 25, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Apr. 24, 2018 | Conducted (TH05-HY)   |
| Temperature Chamber       | ESPEC             | SH-641                  | 92013720       | -30℃~70℃                      | Aug. 28, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Aug. 27, 2018 | Conducted (TH05-HY)   |
| Programmable Power Supply | GW Instek         | PSS-2005                | EL890001       | 1V~20V 0.5A~5A                | Oct. 06, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Oct. 05, 2018 | Conducted (TH05-HY)   |
| Coupler                   | Warison           | 1-18GHz 20dB 25WSMA Dir | #B             | 1G~18GHz                      | Feb. 20, 2017    | Jan. 03, 2018 ~ Jan. 29, 2018 | Feb. 19, 2018 | Conducted (TH05-HY)   |
| Amplifier                 | MITEQ             | TTA1840-35-HG           | 1871923        | 18GHz~40GHz, VSWR : 2.5:1 max | Jul. 18, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Jul. 17, 2018 | Radiation (03CH13-HY) |
| Bilog Antenna             | TESEQ             | CBL 6111D&N-6-06        | 35414&AT-N0602 | 30MHz~1GHz                    | Oct. 14, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Oct. 13, 2018 | Radiation (03CH13-HY) |
| Amplifier                 | Sonoma-Instrument | 310 N                   | 187282         | 9KHz~1GHz                     | Dec. 21, 2016    | Jan. 17, 2018 ~ Jan. 22, 2018 | Dec. 20, 2018 | Radiation (03CH13-HY) |
| Horn Antenna              | SCHWARZBECK       | BBHA 9120 D             | 9120D-1241     | 1GHz ~ 18GHz                  | Jun. 15, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Jun. 14, 2018 | Radiation (03CH13-HY) |
| Preamplifier              | MITEQ             | AMF-7D-00101 800-30-10P | 1590074        | 1GHz~18GHz                    | May 22, 2017     | Jan. 17, 2018 ~ Jan. 22, 2018 | May 21, 2018  | Radiation (03CH13-HY) |
| Spectrum Analyzer         | Keysight          | N9010A                  | MY55370526     | 10Hz~44GHz                    | Mar. 15, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Mar. 14, 2018 | Radiation (03CH13-HY) |
| Antenna Mast              | EMEC              | AM-BS-4500-B            | N/A            | 1m~4m                         | N/A              | Jan. 17, 2018 ~ Jan. 22, 2018 | N/A           | Radiation (03CH13-HY) |
| Turn Table                | EMEC              | TT2000                  | N/A            | 0~360 Degree                  | N/A              | Jan. 17, 2018 ~ Jan. 22, 2018 | N/A           | Radiation (03CH13-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK       | BBHA 9170               | BBHA9170251    | 18GHz- 40GHz                  | Nov. 10, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Nov. 09, 2018 | Radiation (03CH13-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK       | BBHA 9170               | BBHA9170584    | 18GHz- 40GHz                  | Nov. 27, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Nov. 26, 2018 | Radiation (03CH13-HY) |
| Horn Antenna              | SCHWARZBECK       | BBHA 9120 D             | 9120D-1522     | 1G~18GHz                      | Mar. 17, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Mar. 16, 2018 | Radiation (03CH13-HY) |
| Signal Generator          | Rohde & Schwarz   | SMF100A                 | 101107         | 100kHz~40GHz                  | May 22, 2017     | Jan. 17, 2018 ~ Jan. 22, 2018 | May 21, 2018  | Radiation (03CH13-HY) |
| Preamplifier              | Keysight          | 83017A                  | MY53270264     | 1GHz ~ 26.5GHz                | Dec. 05, 2017    | Jan. 17, 2018 ~ Jan. 22, 2018 | Dec. 04, 2018 | Radiation (03CH13-HY) |



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 3.07 |
|-------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 3.48 |
|-------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 3.92 |
|-------------------------------------------------------------------------|------|



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

| LTE Band 30 Maximum Average Power [dBm] |         |           |        |        |        |         |
|-----------------------------------------|---------|-----------|--------|--------|--------|---------|
| BW [MHz]                                | RB Size | RB Offset | Mod    | Lowest | Middle | Highest |
| 10                                      | 1       | 0         | QPSK   |        | 23.13  |         |
| 10                                      | 1       | 25        |        |        | 23.15  |         |
| 10                                      | 1       | 49        |        |        | 22.94  |         |
| 10                                      | 25      | 0         |        |        | 22.23  |         |
| 10                                      | 25      | 12        |        |        | 22.03  |         |
| 10                                      | 25      | 25        |        |        | 22.04  |         |
| 10                                      | 50      | 0         |        |        | 22.14  |         |
| 10                                      | 1       | 0         | 16-QAM |        | 21.91  |         |
| 10                                      | 1       | 25        |        |        | 21.97  |         |
| 10                                      | 1       | 49        |        |        | 21.85  |         |
| 10                                      | 25      | 0         |        |        | 21.23  |         |
| 10                                      | 25      | 12        |        |        | 20.97  |         |
| 10                                      | 25      | 25        |        |        | 21.08  |         |
| 10                                      | 50      | 0         |        |        | 21.09  |         |
| 5                                       | 1       | 0         | QPSK   | 22.70  | 22.93  | 22.83   |
| 5                                       | 1       | 12        |        | 23.06  | 23.05  | 23.08   |
| 5                                       | 1       | 24        |        | 22.73  | 22.89  | 23.12   |
| 5                                       | 12      | 0         |        | 22.12  | 22.19  | 22.26   |
| 5                                       | 12      | 7         |        | 22.02  | 22.12  | 22.08   |
| 5                                       | 12      | 13        |        | 21.98  | 22.01  | 22.08   |
| 5                                       | 25      | 0         |        | 22.10  | 22.15  | 22.13   |
| 5                                       | 1       | 0         | 16-QAM | 21.55  | 21.56  | 21.53   |
| 5                                       | 1       | 12        |        | 21.68  | 21.79  | 21.64   |
| 5                                       | 1       | 24        |        | 21.64  | 21.68  | 21.52   |
| 5                                       | 12      | 0         |        | 21.08  | 21.16  | 21.08   |
| 5                                       | 12      | 7         |        | 21.03  | 21.00  | 20.97   |
| 5                                       | 12      | 13        |        | 20.93  | 21.07  | 20.84   |
| 5                                       | 25      | 0         |        | 20.95  | 21.11  | 21.11   |



## A2. LTE Band 30


### Peak-to-Average Ratio

| Mode       | LTE Band 30 / 10MHz |         |       |         |             |
|------------|---------------------|---------|-------|---------|-------------|
| Mod.       | QPSK                |         | 16QAM |         | Limit: 13dB |
| RB Size    | 1RB                 | Full RB | 1RB   | Full RB | Result      |
| Lowest CH  | -                   | -       | -     | -       | PASS        |
| Middle CH  | 4                   | 4.61    | 5.1   | 5.68    |             |
| Highest CH | -                   | -       | -     | -       |             |




LTE Band 30 / 10MHz / QPSK

Middle Channel / 1RB

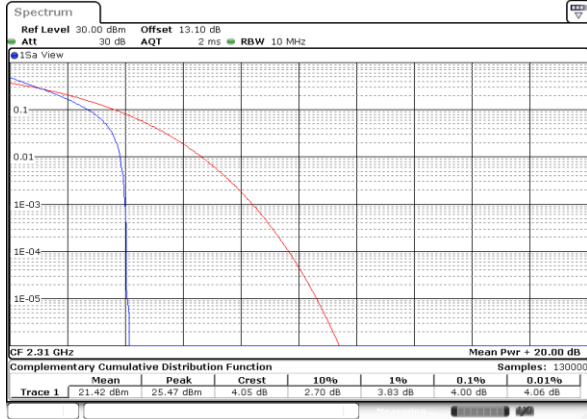

Date: 6.JAN.2018 21:02:13


Middle Channel / Full RB

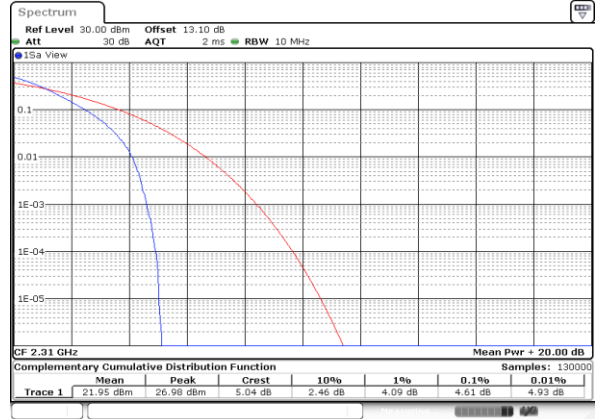

Date: 6.JAN.2018 21:02:27


LTE Band 30 / 10MHz / 16QAM

Middle Channel / 1RB

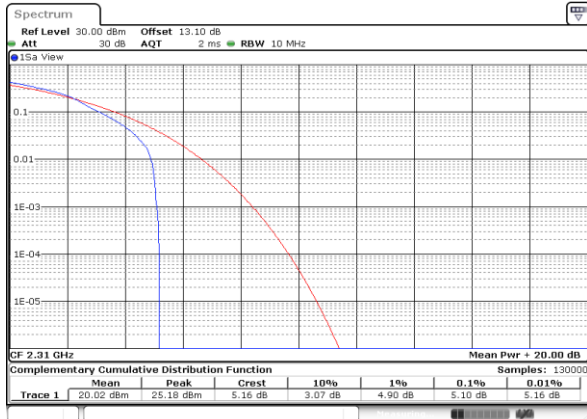

Date: 6.JAN.2018 21:01:55

Middle Channel / Full RB

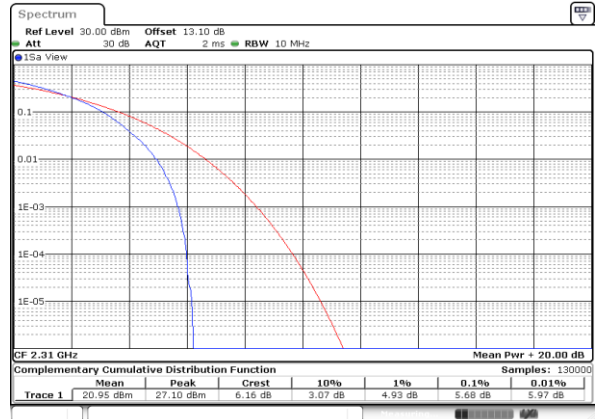

Date: 6.JAN.2018 21:02:03



### EIRP Power Density


| Mode       | LTE Band 30 : Conducted Power Density (dBm/5MHz) |       |      |       |       |       |       |       |       |       |       |       |
|------------|--------------------------------------------------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | 1.4MHz                                           |       | 3MHz |       | 5MHz  |       | 10MHz |       | 15MHz |       | 20MHz |       |
| BW         | QPSK                                             | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Mod.       | QPSK                                             | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Lowest CH  | -                                                | -     | -    | -     | 24.01 | 22.5  | -     | -     | -     | -     | -     | -     |
| Middle CH  | -                                                | -     | -    | -     | 24.55 | 22.57 | 24.21 | 23.25 | -     | -     | -     | -     |
| Highest CH | -                                                | -     | -    | -     | 23.95 | 23.29 | -     | -     | -     | -     | -     | -     |

| Mode         | LTE Band 30 : EIRP Power Density (dBm/5MHz) |       |      |       |       |       |       |       |       |       |       |       |
|--------------|---------------------------------------------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|              | 1.4MHz                                      |       | 3MHz |       | 5MHz  |       | 10MHz |       | 15MHz |       | 20MHz |       |
| BW           | QPSK                                        | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Mod.         | QPSK                                        | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Lowest CH    | -                                           | -     | -    | -     | 20.57 | 19.06 | -     | -     | -     | -     | -     | -     |
| Middle CH    | -                                           | -     | -    | -     | 21.11 | 19.13 | 20.77 | 19.81 | -     | -     | -     | -     |
| Highest CH   | -                                           | -     | -    | -     | 20.51 | 19.85 | -     | -     | -     | -     | -     | -     |
| Antenna Gain | -3.44 dBi                                   |       |      |       |       |       |       |       |       |       |       |       |
| Limit        | 250mW / 5MHz = 24dBm / 5MHz                 |       |      |       |       |       |       |       |       |       |       |       |
| Result       | Pass                                        |       |      |       |       |       |       |       |       |       |       |       |




LTE Band 30 / 5MHz


Lowest Channel / 5MHz / 1RB0 / QPSK

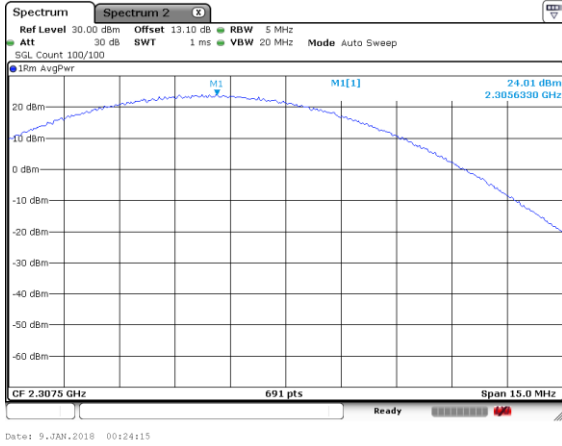


Lowest Channel / 5MHz / 1RB0 / 16QAM

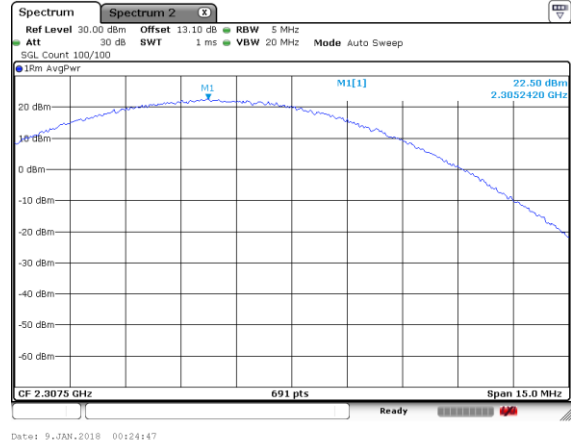


Middle Channel / 5MHz / 1RB0 / QPSK

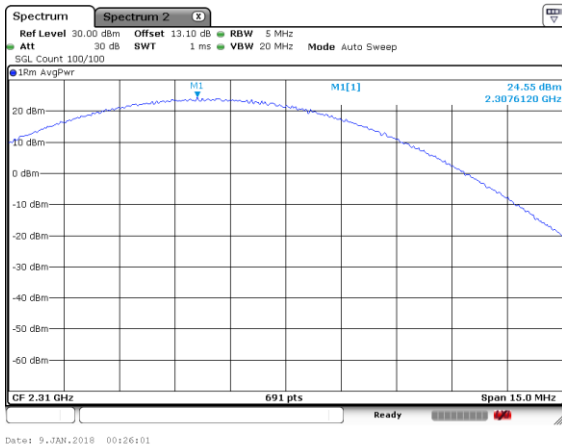


Middle Channel / 5MHz / 1RBmax / 16QAM

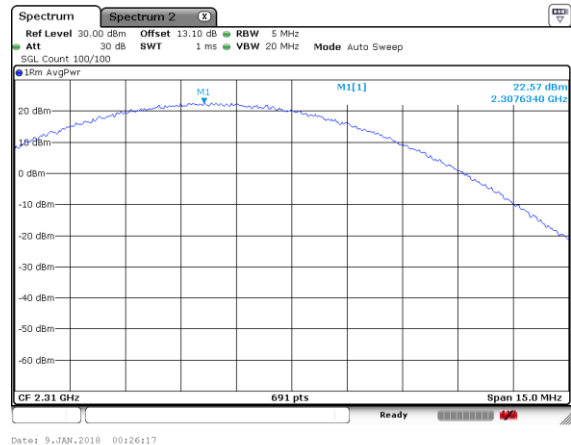

Highest Channel / 5MHz / Full RB / QPSK

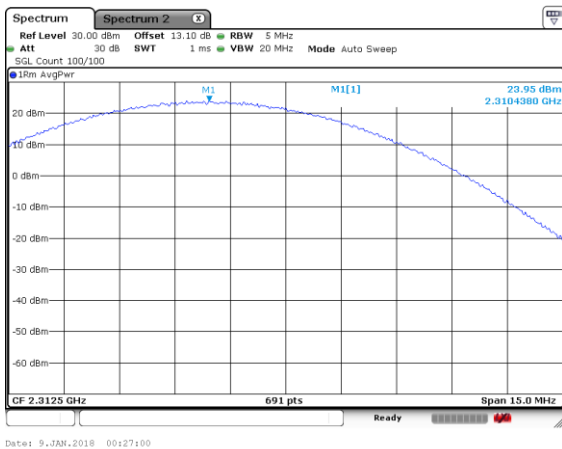


Highest Channel / 5MHz / Full RB / 16QAM

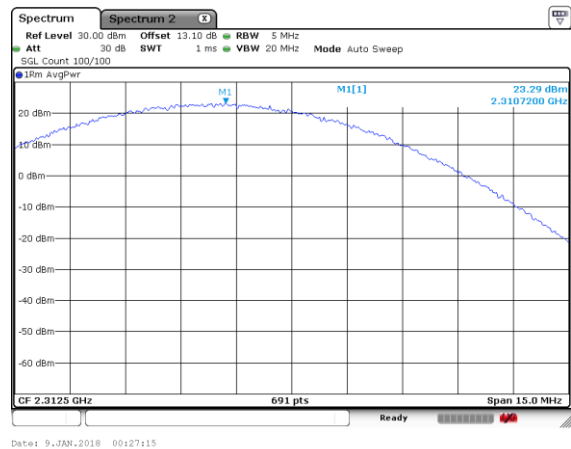




LTE Band 30 / 10MHz

Lowest Channel / 10MHz / 1RB0 / QPSK

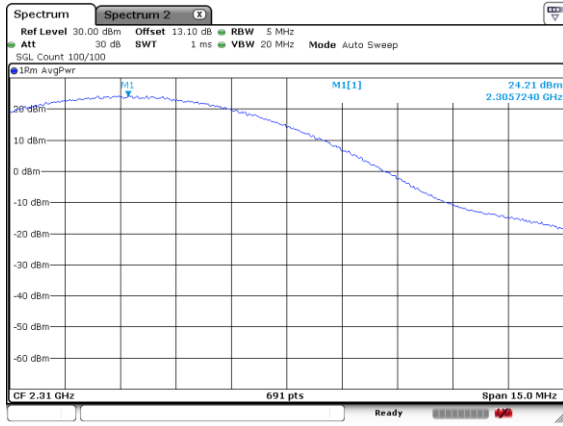

Date: 9.JAN.2018 00:28:30

Lowest Channel / 10MHz / 1RB0 / 16QAM

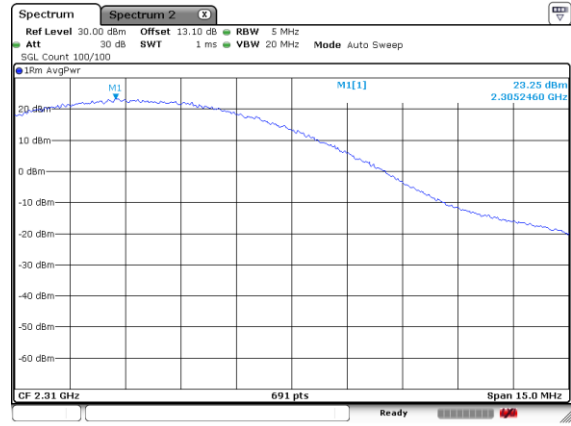

Date: 9.JAN.2018 00:28:43




**26dB Bandwidth**

| Mode       | LTE Band 30 : 26dB BW(MHz) |       |      |       |      |       |       |       |       |       |       |       |
|------------|----------------------------|-------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|
|            | 1.4MHz                     |       | 3MHz |       | 5MHz |       | 10MHz |       | 15MHz |       | 20MHz |       |
| BW         |                            |       |      |       |      |       |       |       |       |       |       |       |
| Mod.       | QPSK                       | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Lowest CH  | -                          | -     | -    | -     | 4.94 | 4.97  | -     | -     | -     | -     | -     | -     |
| Middle CH  | -                          | -     | -    | -     | 4.95 | 4.95  | 9.73  | 9.75  | -     | -     | -     | -     |
| Highest CH | -                          | -     | -    | -     | 4.98 | 4.92  | -     | -     | -     | -     | -     | -     |




LTE Band 30

Lowest Channel / 5MHz / QPSK

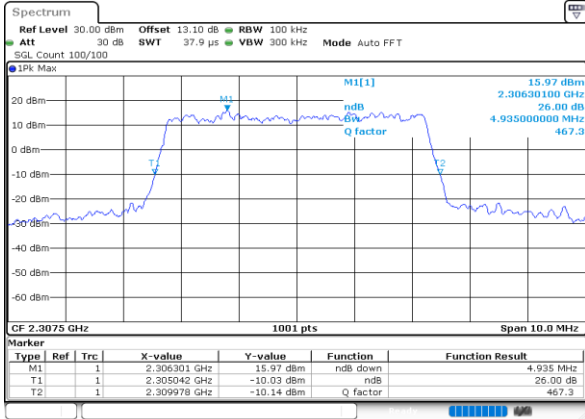


Date: 6.JAN.2018 20:41:50

Lowest Channel / 5MHz / 16QAM

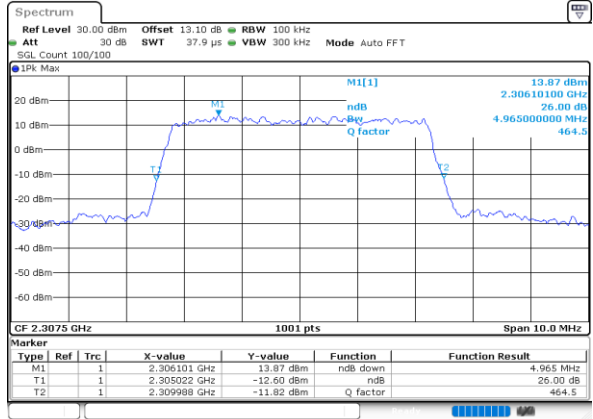


Date: 6.JAN.2018 20:42:00

Middle Channel / 5MHz / QPSK

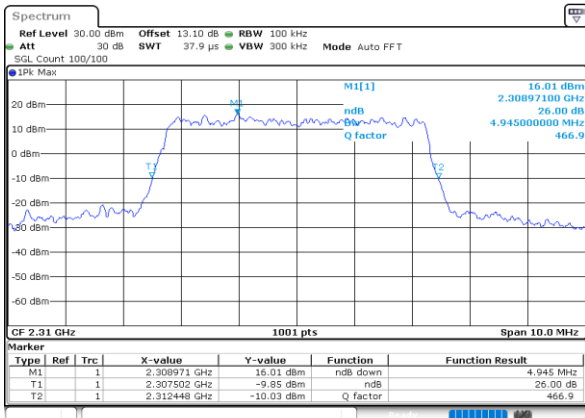


Date: 6.JAN.2018 20:47:04

Middle Channel / 5MHz / 16QAM

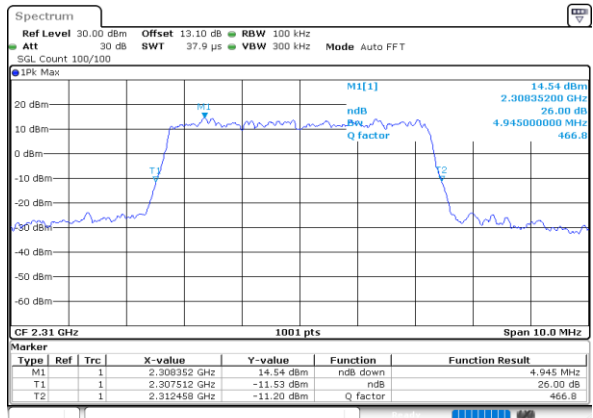


Date: 6.JAN.2018 20:47:14

Highest Channel / 5MHz / QPSK

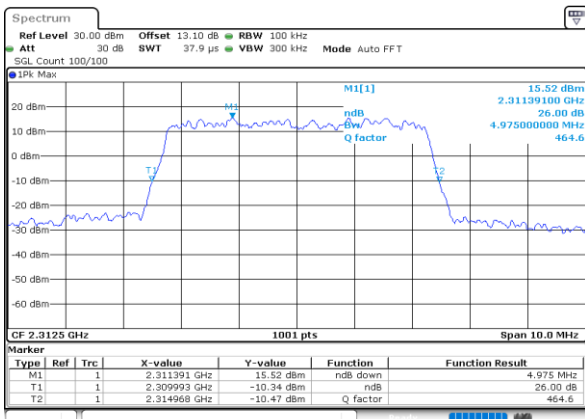

Date: 6.JAN.2018 20:47:44

Highest Channel / 5MHz / 16QAM

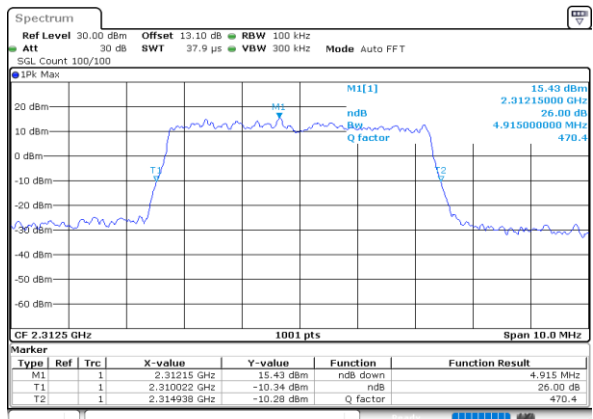


Date: 6.JAN.2018 20:47:54




LTE Band 30

Middle Channel / 10MHz / QPSK

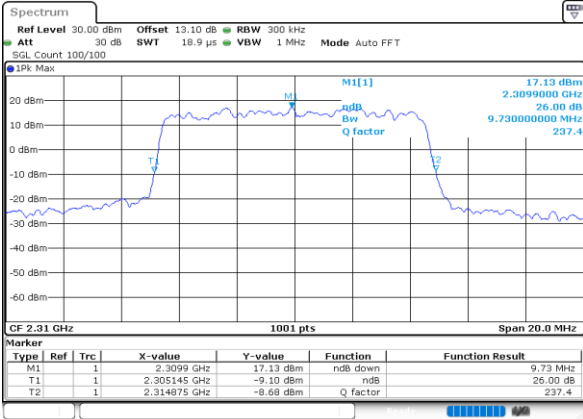

Date: 6.JAN.2018 20:52:17

Middle Channel / 10MHz / 16QAM

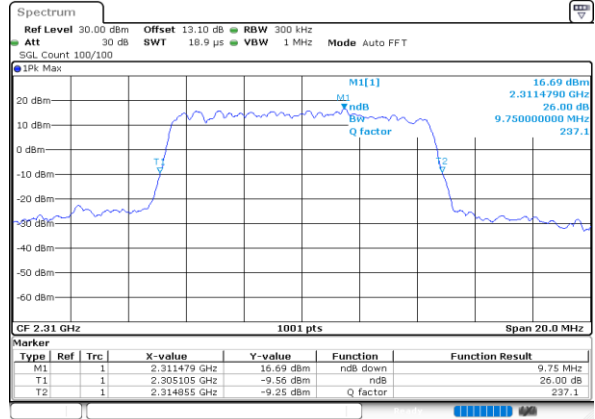

Date: 6.JAN.2018 20:53:07




### Occupied Bandwidth

| Mode       | LTE Band 30 : 99%OBW(MHz) |       |      |       |      |       |       |       |       |       |       |       |
|------------|---------------------------|-------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|
|            | 1.4MHz                    |       | 3MHz |       | 5MHz |       | 10MHz |       | 15MHz |       | 20MHz |       |
| BW         |                           |       |      |       |      |       |       |       |       |       |       |       |
| Mod.       | QPSK                      | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM | QPSK  | 16QAM |
| Lowest CH  | -                         | -     | -    | -     | 4.51 | 4.49  | -     | -     | -     | -     | -     | -     |
| Middle CH  | -                         | -     | -    | -     | 4.49 | 4.49  | 9.09  | 9.03  | -     | -     | -     | -     |
| Highest CH | -                         | -     | -    | -     | 4.48 | 4.47  | -     | -     | -     | -     | -     | -     |




LTE Band 30

Lowest Channel / 5MHz / QPSK

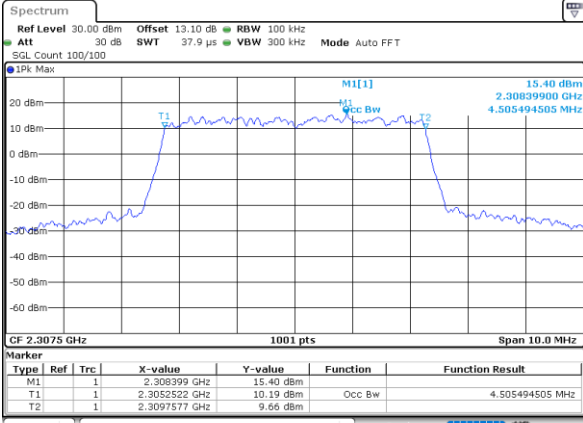


Date: 6 JAN 2018 20:41:31

Lowest Channel / 5MHz / 16QAM

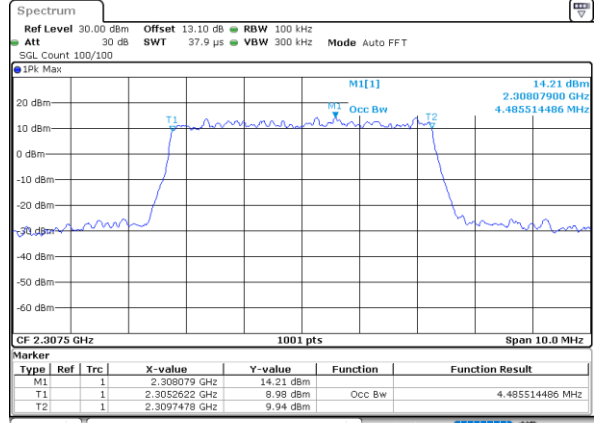


Date: 6 JAN 2018 20:41:41

Middle Channel / 5MHz / QPSK

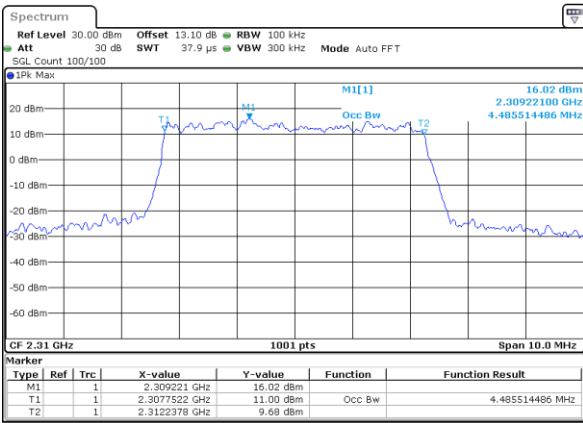


Date: 6 JAN 2018 20:46:44

Middle Channel / 5MHz / 16QAM

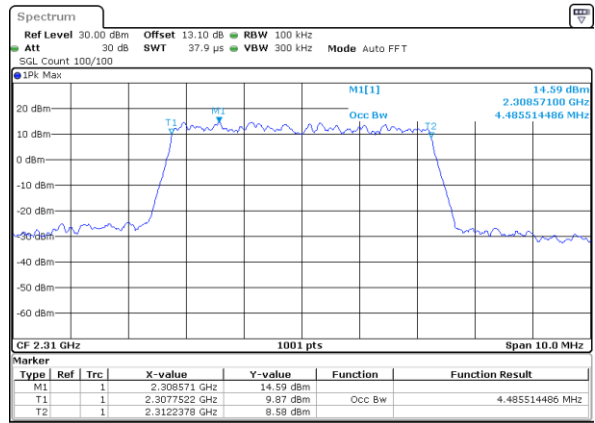


Date: 6 JAN 2018 20:46:54

Highest Channel / 5MHz / QPSK

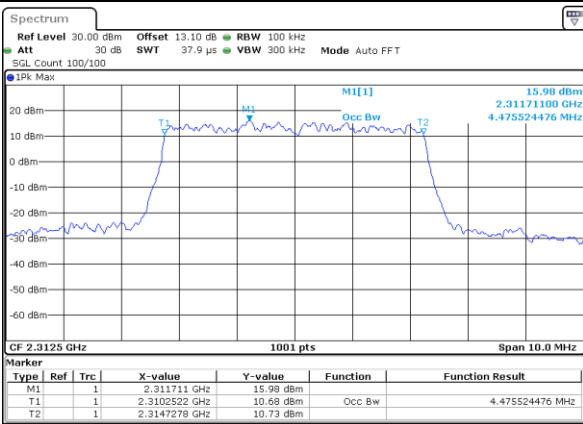

Date: 6 JAN 2018 20:47:24

Highest Channel / 5MHz / 16QAM

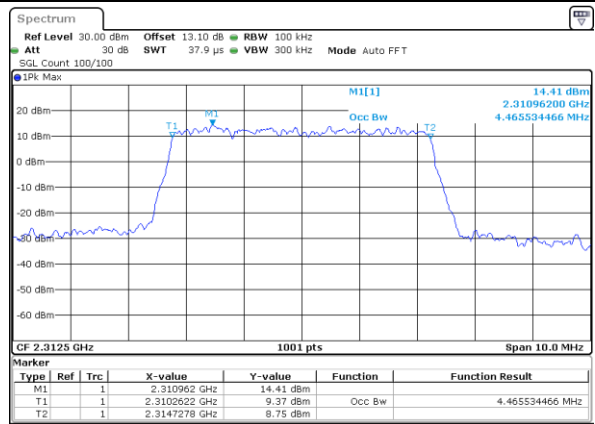


Date: 6 JAN 2018 20:47:34




LTE Band 30

Middle Channel / 10MHz / QPSK

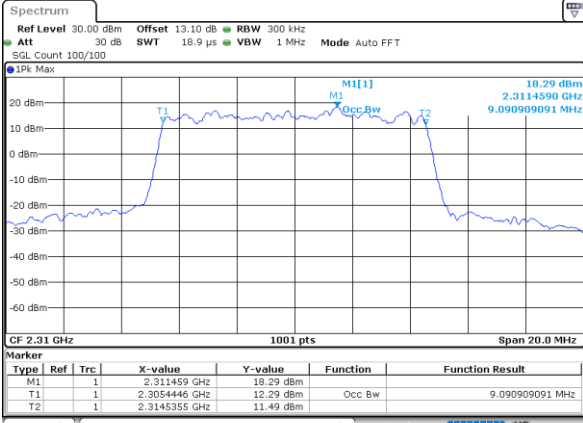

Date: 6-JAN-2018 20:52:18

Middle Channel / 10MHz / 16QAM

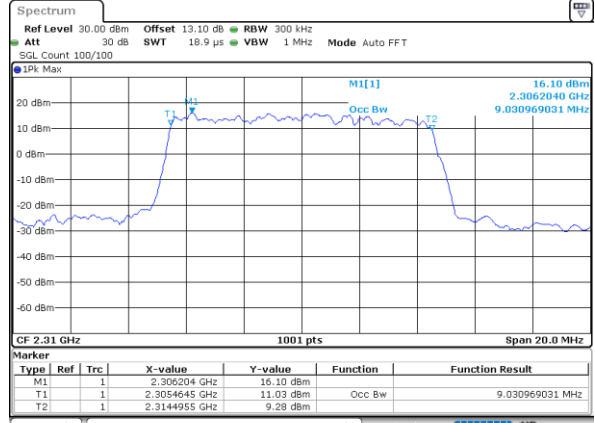


Date: 6-JAN-2018 20:52:48



# Conducted Band Edge


## LTE Band 30 / 5MHz / QPSK

### Lowest Band Edge / 1 RB

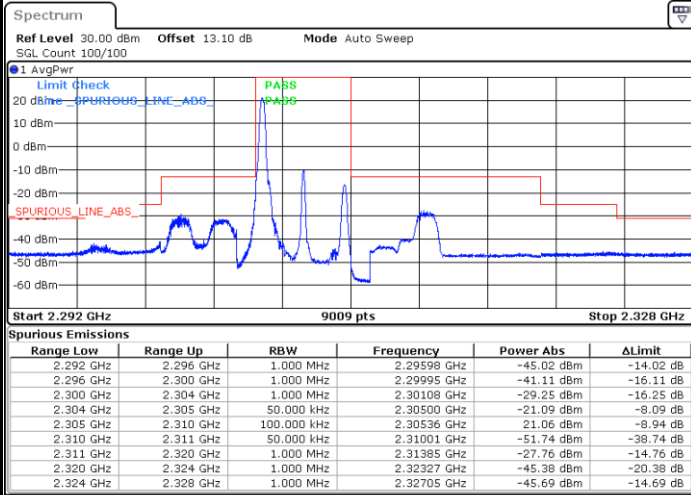


Date: 6.JAN.2018 20:43:09

### Highest Band Edge / 1 RB

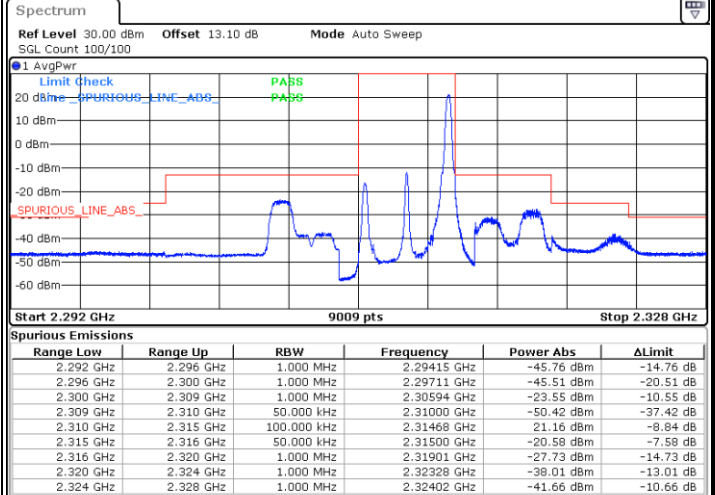


Date: 6.JAN.2018 20:49:02

### Lowest Band Edge / Full RB

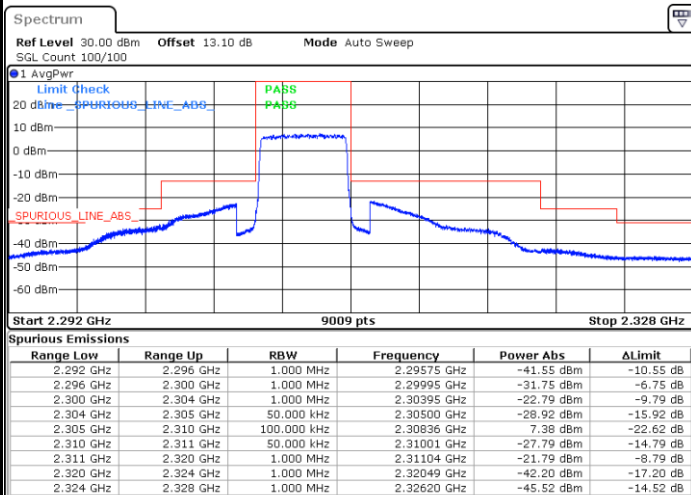

Date: 6.JAN.2018 20:45:26

### Highest Band Edge / Full RB

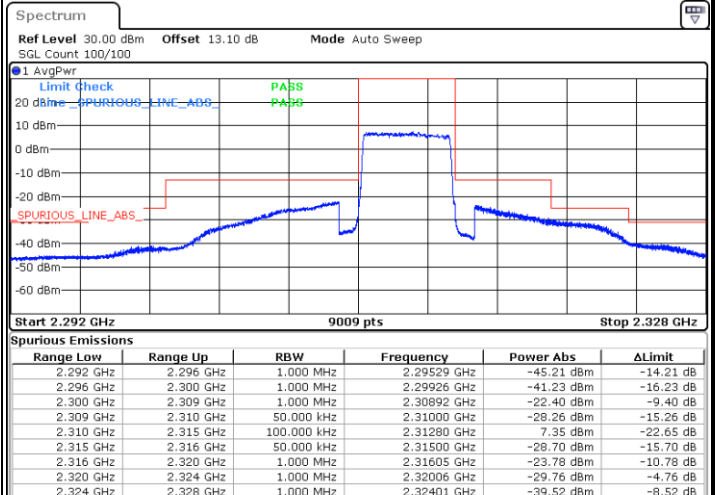



Date: 6.JAN.2018 20:51:19



LTE Band 30 / 5MHz / 16QAM

Lowest Band Edge / 1RB

Highest Band Edge / 1 RB

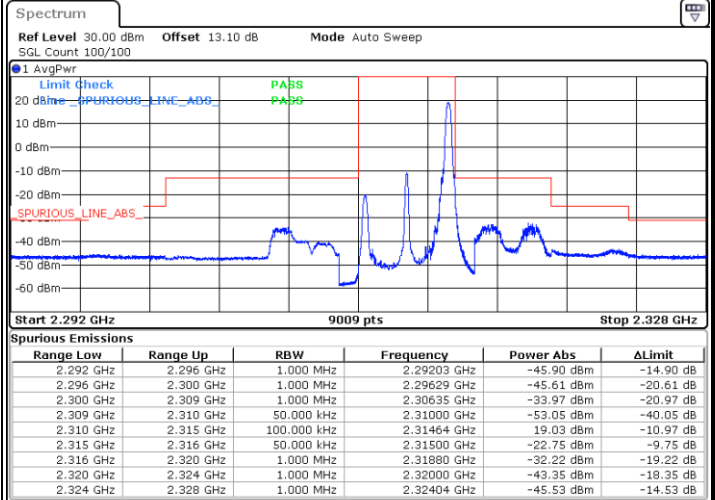
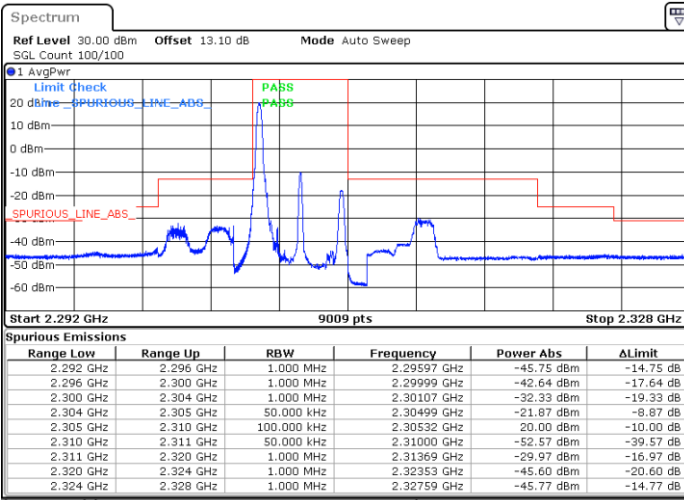


Date: 6.JAN.2018 20:44:17

Date: 6.JAN.2018 20:50:10

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

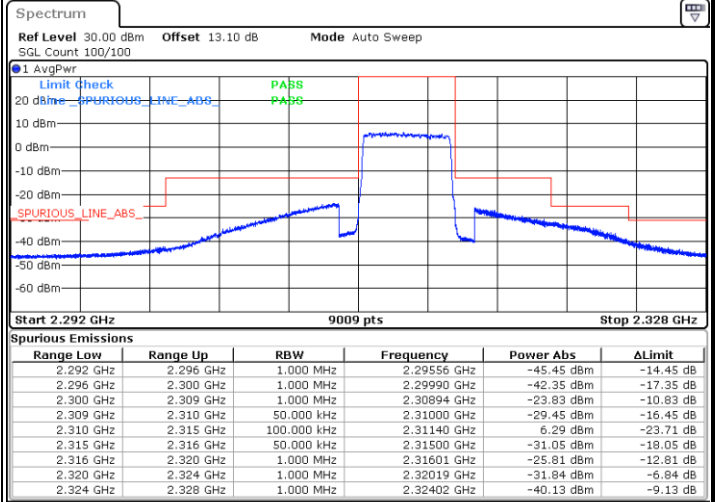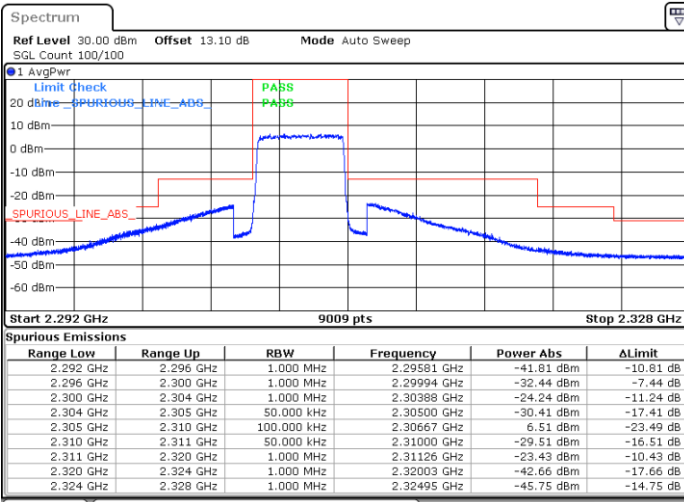

Date: 6.JAN.2018 20:46:34


Date: 6.JAN.2018 20:52:28




LTE Band 30 / 10MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

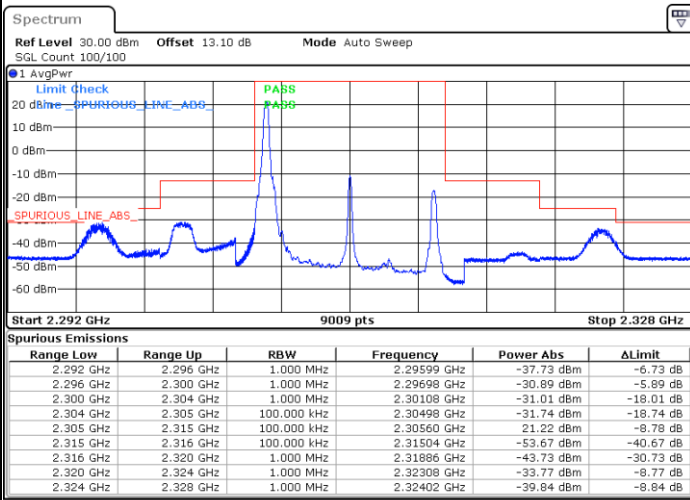


Date: 6.JAN.2018 20:54:16

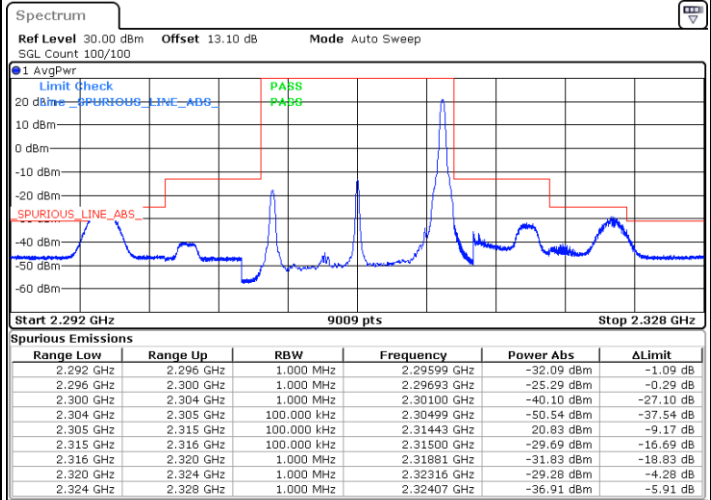

Date: 6.JAN.2018 20:56:33

Band Edge / Full RB

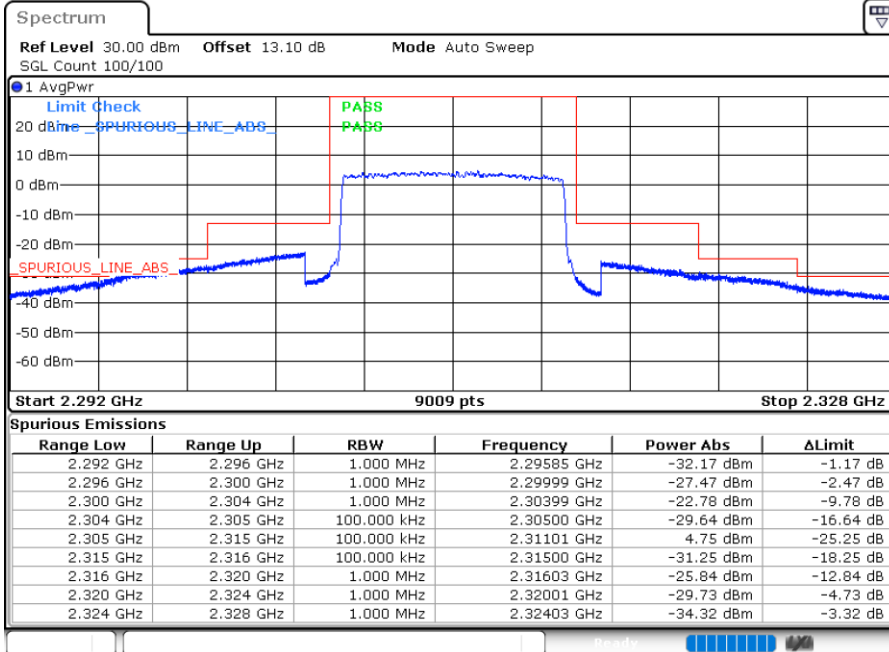


Date: 6.JAN.2018 20:58:50




LTE Band 30 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

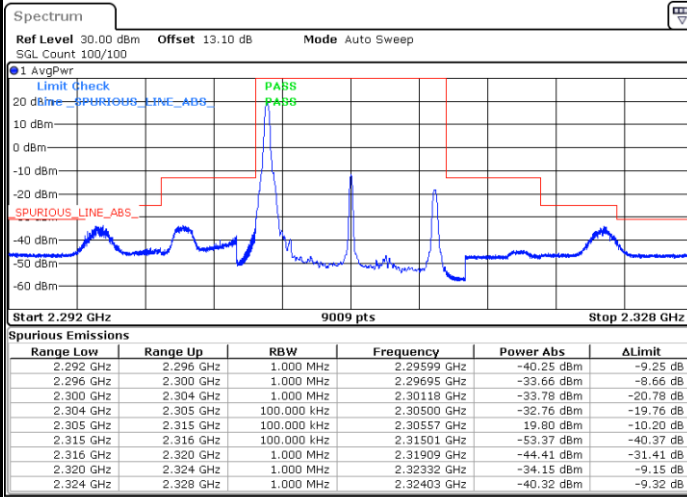


Date: 6.JAN.2018 20:55:24

Highest Band Edge / 1 RB

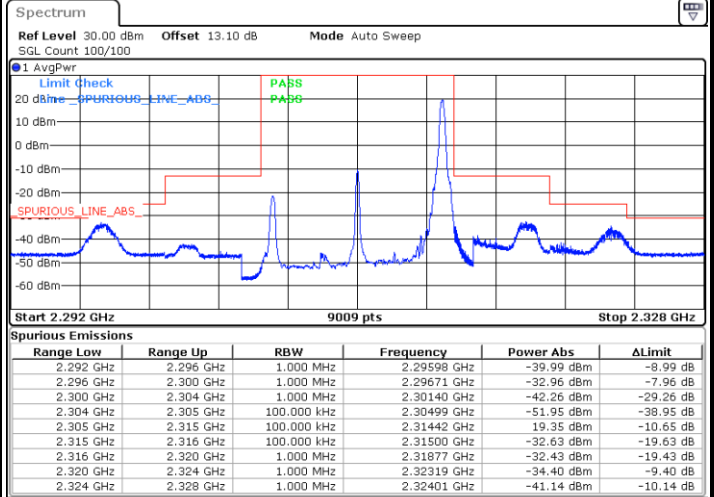

Date: 6.JAN.2018 20:57:41


Band Edge / Full RB

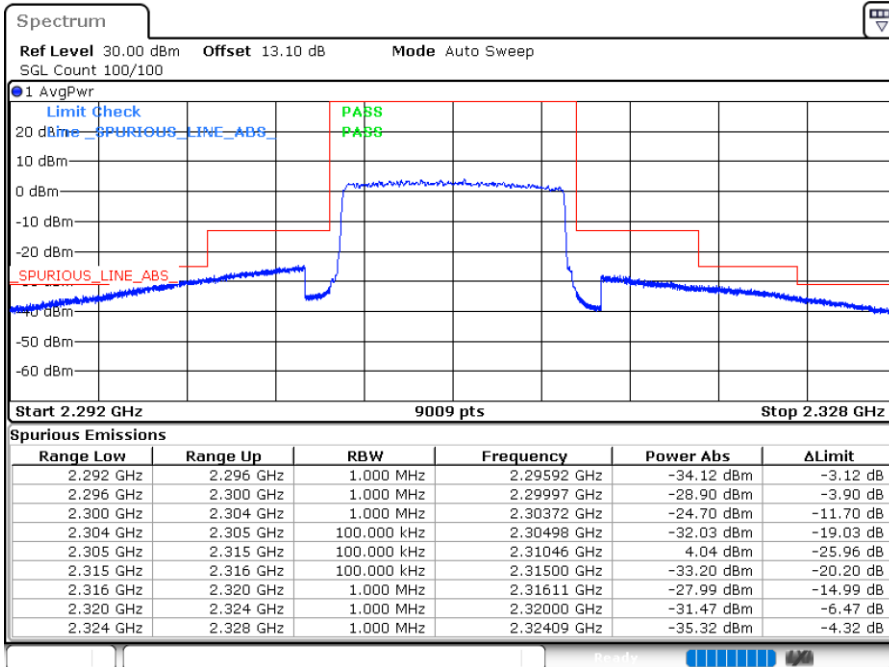

Date: 6.JAN.2018 20:59:58




# Conducted Spurious Emission

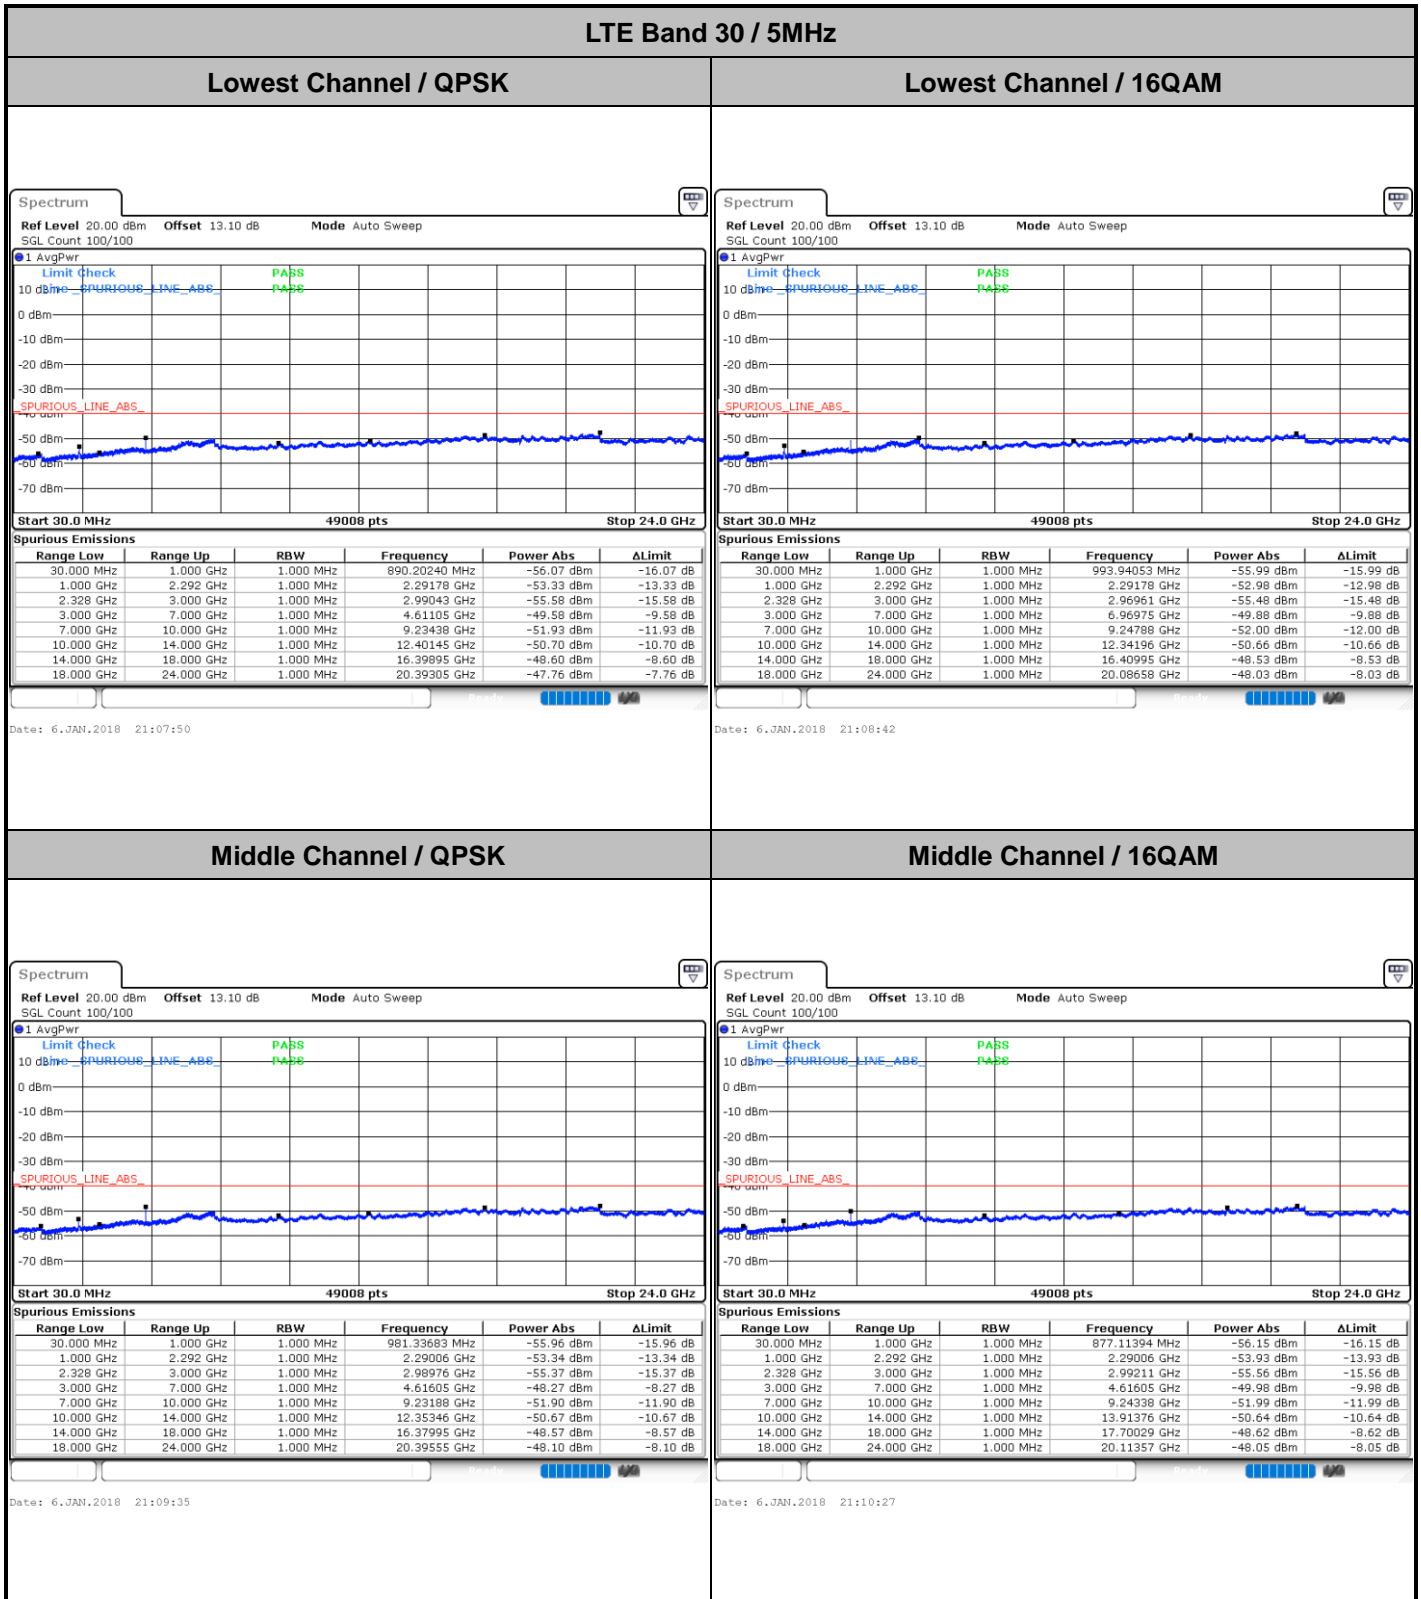




LTE Band 30 / 5MHz

Highest Channel / QPSK

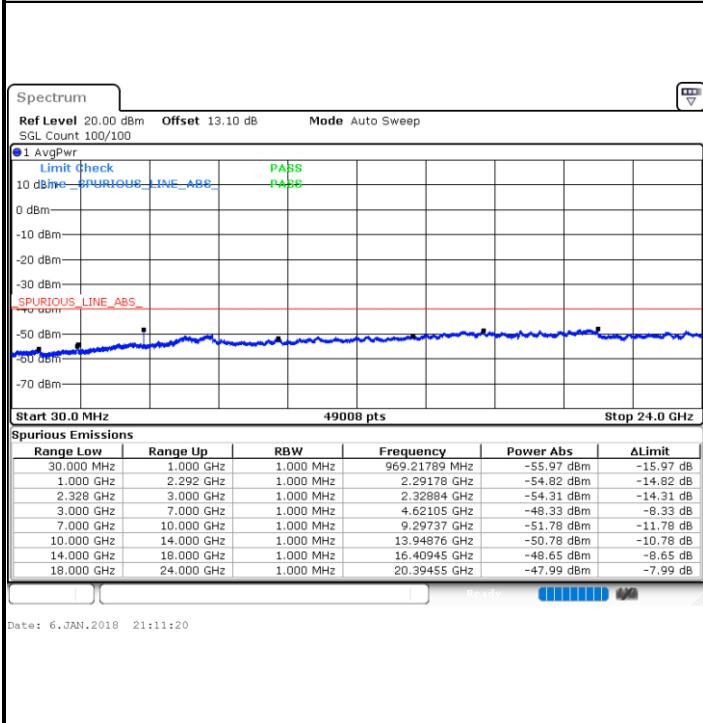


Highest Channel / 16QAM

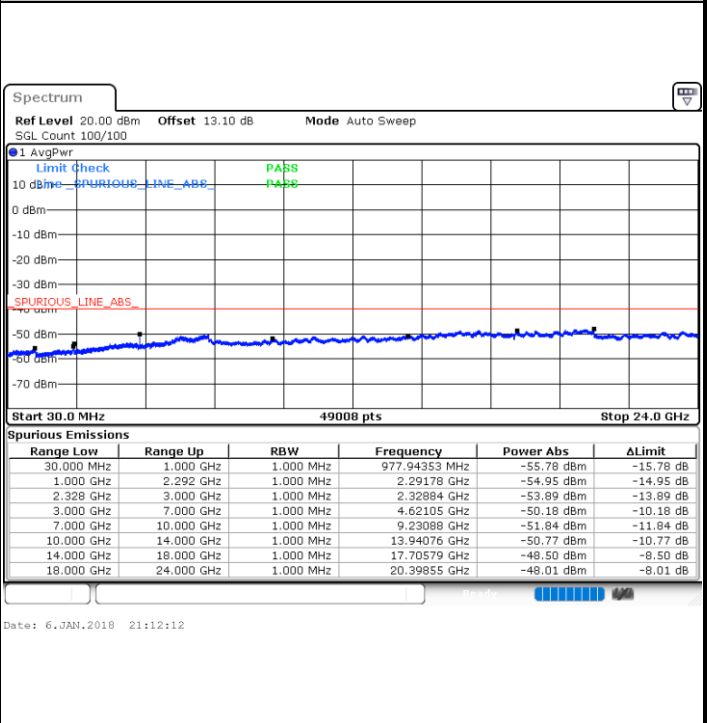


LTE Band 30 / 10MHz

Middle Channel / QPSK

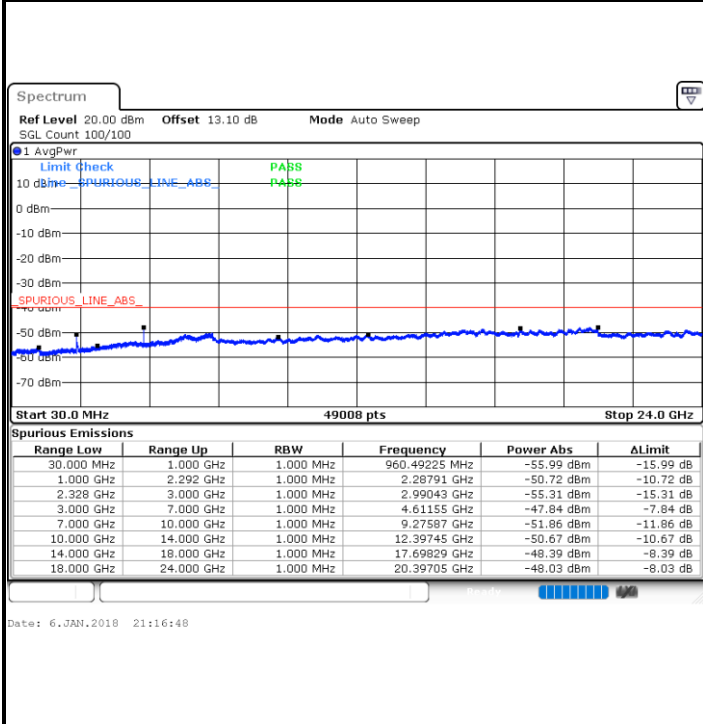

Middle Channel / 16QAM

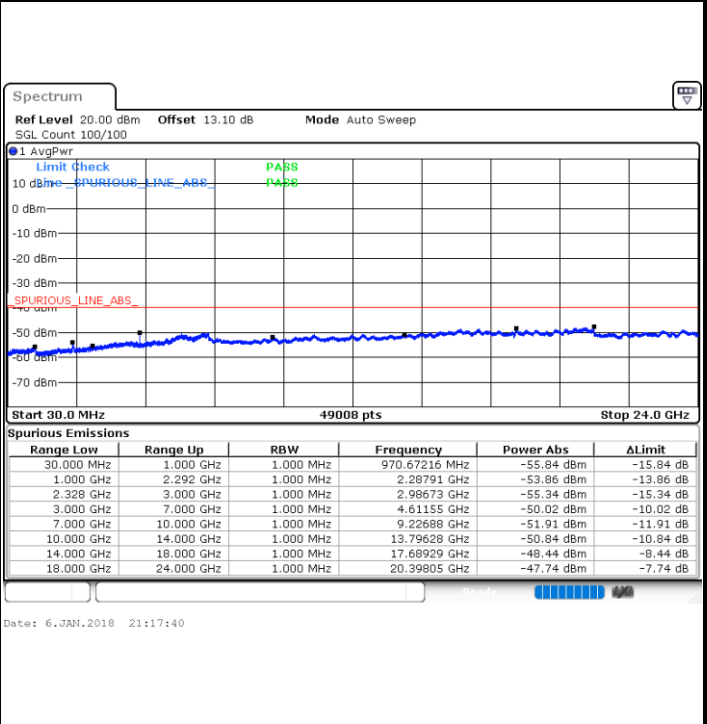



**Frequency Stability**

| Test Conditions  |                   | LTE Band 30 (QPSK) / Middle Channel | Limit   |
|------------------|-------------------|-------------------------------------|---------|
| Temperature (°C) | Voltage (Volt)    | BW 10MHz                            | Note 2. |
|                  |                   | Deviation (ppm)                     | Result  |
| 50               | Normal Voltage    | 0.0053                              | PASS    |
| 40               | Normal Voltage    | 0.0004                              |         |
| 30               | Normal Voltage    | 0.0063                              |         |
| 20(Ref.)         | Normal Voltage    | 0.0000                              |         |
| 10               | Normal Voltage    | 0.0003                              |         |
| 0                | Normal Voltage    | 0.0051                              |         |
| -10              | Normal Voltage    | 0.0057                              |         |
| -20              | Normal Voltage    | 0.0063                              |         |
| -30              | Normal Voltage    | 0.0003                              |         |
| 20               | Maximum Voltage   | 0.0010                              |         |
| 20               | Normal Voltage    | 0.0000                              |         |
| 20               | Battery End Point | 0.0058                              |         |

**Note:**

1. Normal Voltage =3.8 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of EIRP and Radiated Test

### EIRP

| LTE Band 30 / 5MHz (Average) (GT - LC = 0.578 dB) |              |      |        |             |               |           |         |
|---------------------------------------------------|--------------|------|--------|-------------|---------------|-----------|---------|
| Channel                                           | Mode         | RB   |        | Conducted   |               | EIRP      |         |
|                                                   |              | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest                                            | QPSK         | 1    | 24     | 22.73       | 0.1875        | 23.31     | 0.2142  |
| Middle                                            |              | 1    | 24     | 22.89       | 0.1945        | 23.47     | 0.2222  |
| Highest                                           |              | 1    | 24     | 23.12       | 0.2051        | 23.70     | 0.2343  |
| Lowest                                            | 16QAM        | 1    | 12     | 21.68       | 0.1472        | 22.26     | 0.1682  |
| Middle                                            |              | 1    | 12     | 21.79       | 0.1510        | 22.37     | 0.1725  |
| Highest                                           |              | 1    | 12     | 21.64       | 0.1459        | 22.22     | 0.1666  |
| Limit                                             | EIRP < 0.25W |      |        | Result      |               | PASS      |         |

| LTE Band 30 / 10MHz (Average) (GT - LC = 0.578 dB) |              |      |        |             |               |           |         |
|----------------------------------------------------|--------------|------|--------|-------------|---------------|-----------|---------|
| Channel                                            | Mode         | RB   |        | Conducted   |               | EIRP      |         |
|                                                    |              | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest                                             | QPSK         | -    | -      | -           | -             | -         | -       |
| Middle                                             |              | 1    | 25     | 23.15       | 0.2065        | 23.73     | 0.2359  |
| Highest                                            |              | -    | -      | -           | -             | -         | -       |
| Lowest                                             | 16QAM        | -    | -      | -           | -             | -         | -       |
| Middle                                             |              | 1    | 25     | 21.97       | 0.1574        | 22.55     | 0.1798  |
| Highest                                            |              | -    | -      | -           | -             | -         | -       |
| Limit                                              | EIRP < 0.25W |      |        | Result      |               | PASS      |         |



**Radiated Spurious Emission**

**Part27D LTE Band 30**

| LTE Band 30 / 5MHz / QPSK |                   |              |               |                   |                   |                    |                      |                       |                    |
|---------------------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel                   | Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading (dBm) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Lowest                    | 4620              | -63.84       | -40           | -23.84            | -60.74            | -75.25             | 0.79                 | 12.20                 | H                  |
|                           | 6930              | -52.40       | -40           | -12.40            | -59.6             | -62.85             | 1.01                 | 11.45                 | H                  |
|                           | 9234              | -54.28       | -40           | -14.28            | -66.48            | -64.85             | 1.38                 | 11.94                 | H                  |
|                           | 16164             | -48.13       | -40           | -8.13             | -71.96            | -63.26             | 1.80                 | 16.94                 | H                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                           | 4620              | -60.67       | -40           | -20.67            | -57.57            | -72.08             | 0.79                 | 12.20                 | V                  |
|                           | 6930              | -53.57       | -40           | -13.57            | -60.77            | -64.02             | 1.01                 | 11.45                 | V                  |
|                           | 9234              | -55.30       | -40           | -15.30            | -67.5             | -65.87             | 1.38                 | 11.94                 | V                  |
|                           | 16164             | -50.30       | -40           | -10.30            | -74.13            | -65.43             | 1.80                 | 16.94                 | V                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | V                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | V                  |
| Middle                    | 4626              | -63.05       | -40           | -23.05            | -59.95            | -74.48             | 0.77                 | 12.20                 | H                  |
|                           | 6936              | -50.42       | -40           | -10.42            | -57.62            | -60.84             | 1.02                 | 11.44                 | H                  |
|                           | 9252              | -52.59       | -40           | -12.59            | -64.86            | -63.1              | 1.39                 | 11.89                 | H                  |
|                           | 16182             | -45.17       | -40           | -5.17             | -69.06            | -60.27             | 1.81                 | 16.91                 | H                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                           | 4626              | -60.36       | -40           | -20.36            | -57.26            | -71.79             | 0.77                 | 12.20                 | V                  |
|                           | 6936              | -51.35       | -40           | -11.35            | -58.55            | -61.77             | 1.02                 | 11.44                 | V                  |
|                           | 9252              | -52.63       | -40           | -12.63            | -64.9             | -63.14             | 1.39                 | 11.89                 | V                  |
|                           | 16182             | -47.87       | -40           | -7.87             | -71.76            | -62.97             | 1.81                 | 16.91                 | V                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | V                  |
|                           |                   |              |               |                   |                   |                    |                      |                       | V                  |



|         |       |        |     |        |        |        |      |       |   |
|---------|-------|--------|-----|--------|--------|--------|------|-------|---|
| Highest | 4632  | -54.08 | -40 | -14.08 | -51.07 | -65.54 | 0.74 | 12.20 | H |
|         | 6942  | -43.96 | -40 | -3.96  | -51.19 | -54.35 | 1.03 | 11.43 | H |
|         | 9252  | -52.50 | -40 | -12.50 | -64.77 | -63.01 | 1.39 | 11.89 | H |
|         | 16200 | -45.39 | -40 | -5.39  | -69.34 | -60.46 | 1.81 | 16.88 | H |
|         |       |        |     |        |        |        |      |       | H |
|         |       |        |     |        |        |        |      |       | H |
|         |       |        |     |        |        |        |      |       | H |
|         | 4632  | -54.69 | -40 | -14.69 | -51.68 | -66.15 | 0.74 | 12.20 | V |
|         | 6942  | -46.85 | -40 | -6.85  | -54.08 | -57.24 | 1.03 | 11.43 | V |
|         | 9252  | -53.70 | -40 | -13.70 | -65.97 | -64.21 | 1.39 | 11.89 | V |
|         | 16200 | -46.60 | -40 | -6.60  | -70.55 | -61.67 | 1.81 | 16.88 | V |
|         |       |        |     |        |        |        |      |       | V |
|         |       |        |     |        |        |        |      |       | V |
|         |       |        |     |        |        |        |      |       | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



| LTE Band 30 / 10MHz / QPSK |                   |              |               |                   |                   |                    |                      |                       |                    |
|----------------------------|-------------------|--------------|---------------|-------------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel                    | Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | SPA Reading (dBm) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle                     | 4620              | -62.75       | -40           | -22.75            | -59.65            | -74.16             | 0.79                 | 12.20                 | H                  |
|                            | 6930              | -51.26       | -40           | -11.26            | -58.46            | -61.71             | 1.01                 | 11.45                 | H                  |
|                            | 9234              | -54.09       | -40           | -14.09            | -66.29            | -64.66             | 1.38                 | 11.94                 | H                  |
|                            | 16164             | -44.48       | -40           | -4.48             | -68.31            | -59.61             | 1.80                 | 16.94                 | H                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | H                  |
|                            | 4620              | -60.05       | -40           | -20.05            | -56.95            | -71.46             | 0.79                 | 12.20                 | V                  |
|                            | 6930              | -52.25       | -40           | -12.25            | -58.45            | -62.7              | 1.01                 | 11.45                 | V                  |
|                            | 9234              | -53.27       | -40           | -13.27            | -65.47            | -63.84             | 1.38                 | 11.94                 | V                  |
|                            | 16164             | -47.18       | -40           | -7.18             | -71.01            | -62.31             | 1.80                 | 16.94                 | V                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | V                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | V                  |
|                            |                   |              |               |                   |                   |                    |                      |                       | V                  |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.