



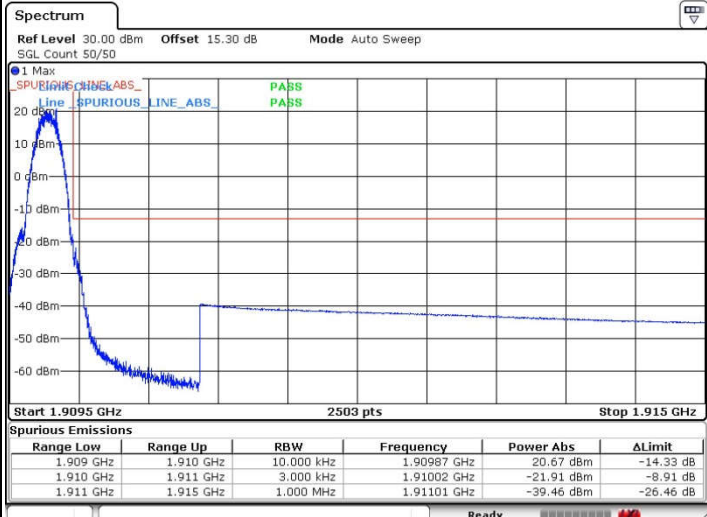

GSM1900 (GSM)

Lowest Band Edge

Highest Band Edge

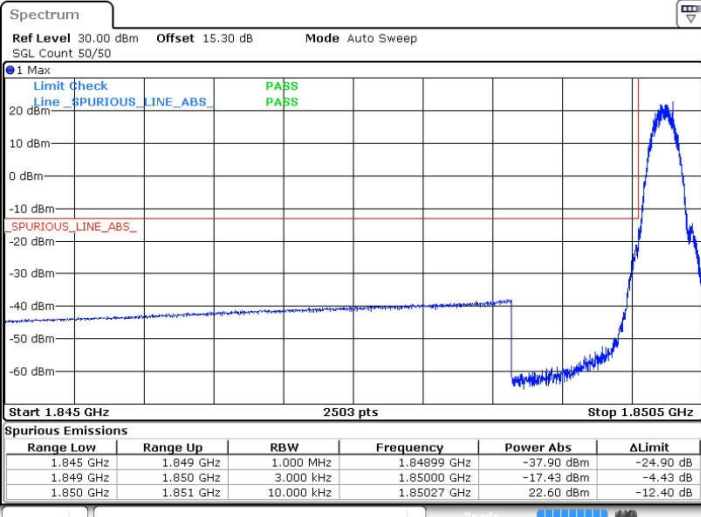



Date: 23 MAY 2018 11:11:19

Date: 23 MAY 2018 11:18:51

GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

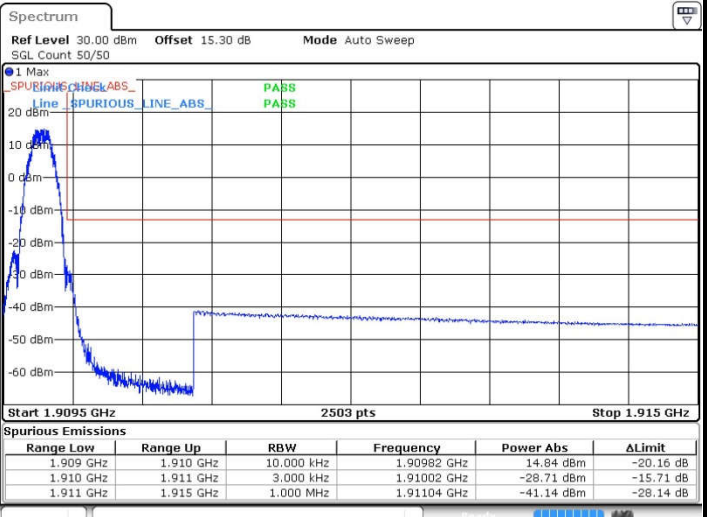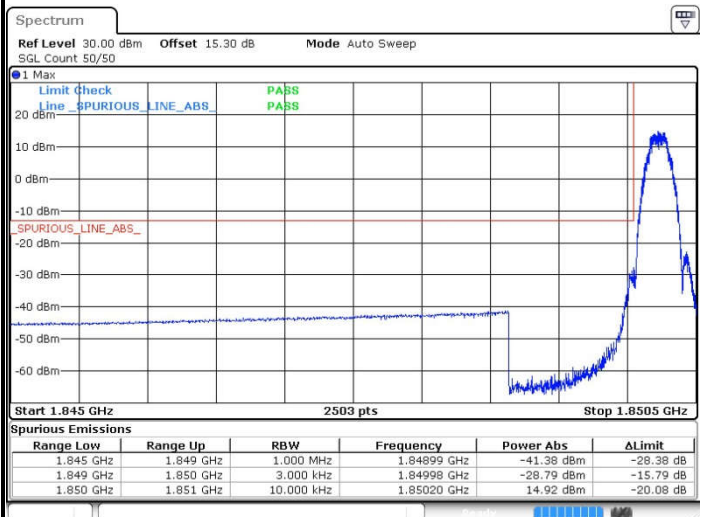

Date: 23 MAY 2018 14:01:51


Date: 23 MAY 2018 14:03:27




WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

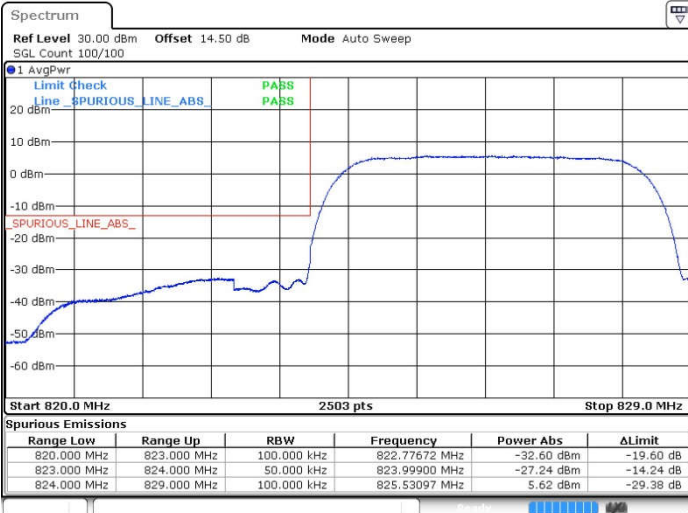

Date: 23 MAY 2018 11:51:52

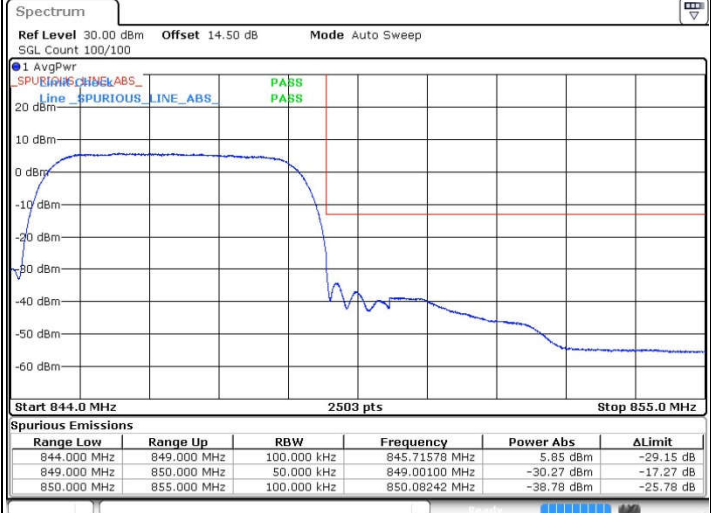


Date: 23 MAY 2018 11:54:33


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

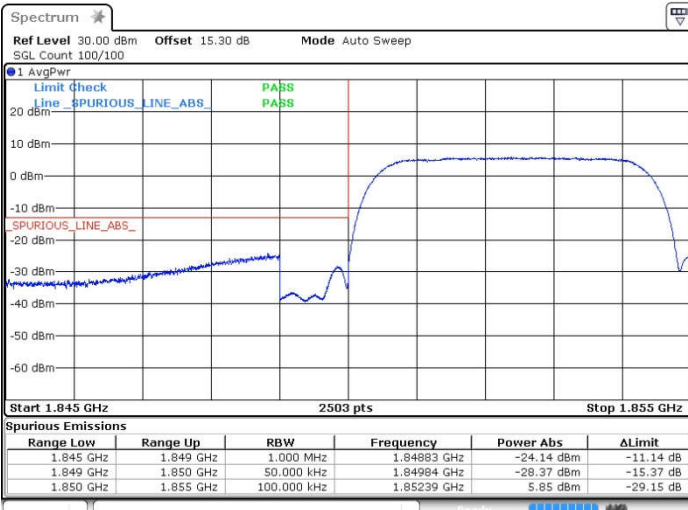

Date: 23 MAY 2018 11:30:50

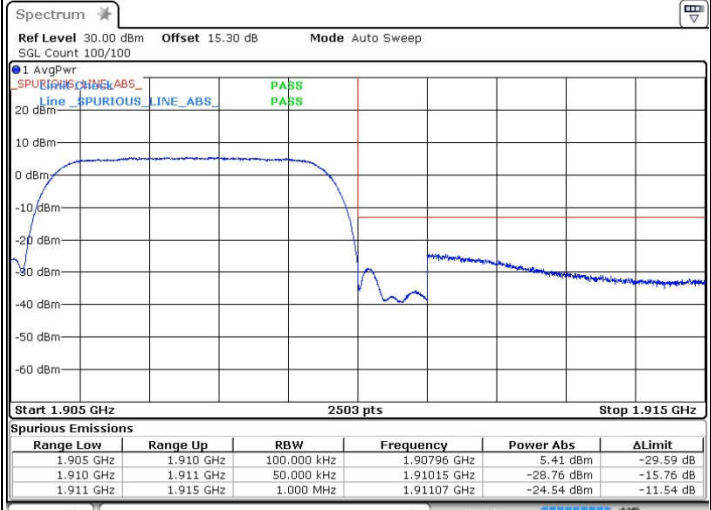


Date: 23 MAY 2018 11:33:32




CDMA BC0 (1xRTT)

Lowest Band Edge

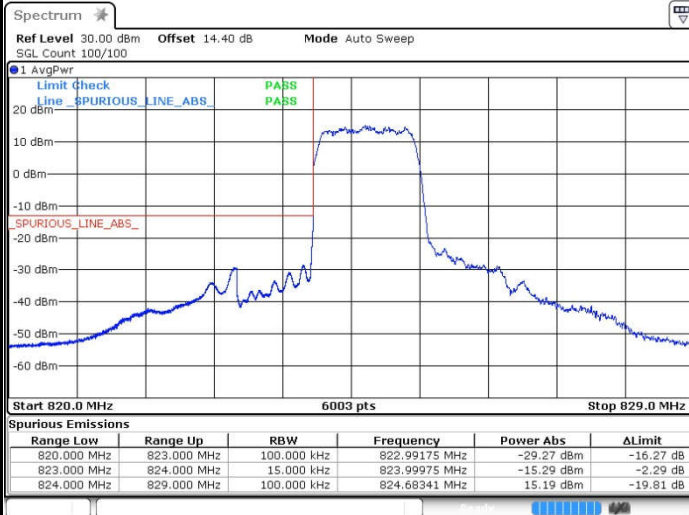

Date: 29 MAY 2018 14:39:11


Highest Band Edge

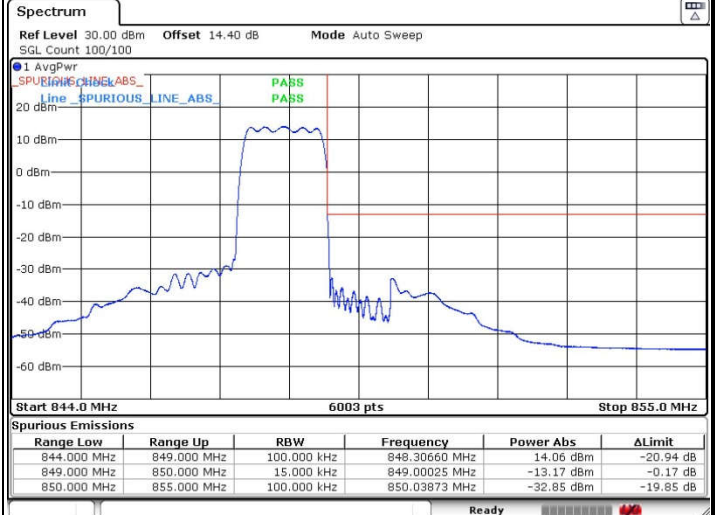

Date: 26 MAY 2018 14:46:10


CDMA BC1 (1xRTT)

Lowest Band Edge

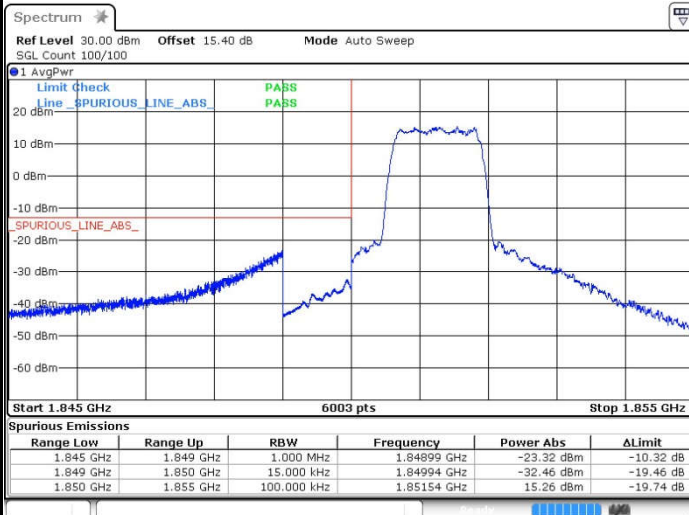

Date: 22 MAY 2018 21:31:23


Highest Band Edge

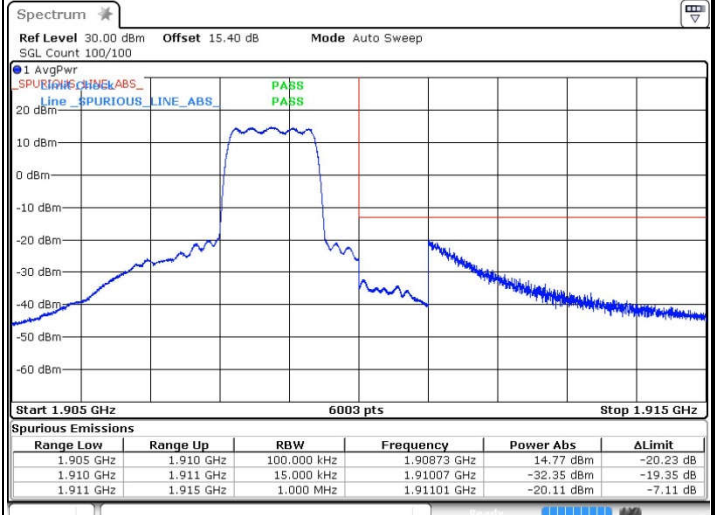

Date: 22 MAY 2018 21:34:39




Conducted Spurious Emission

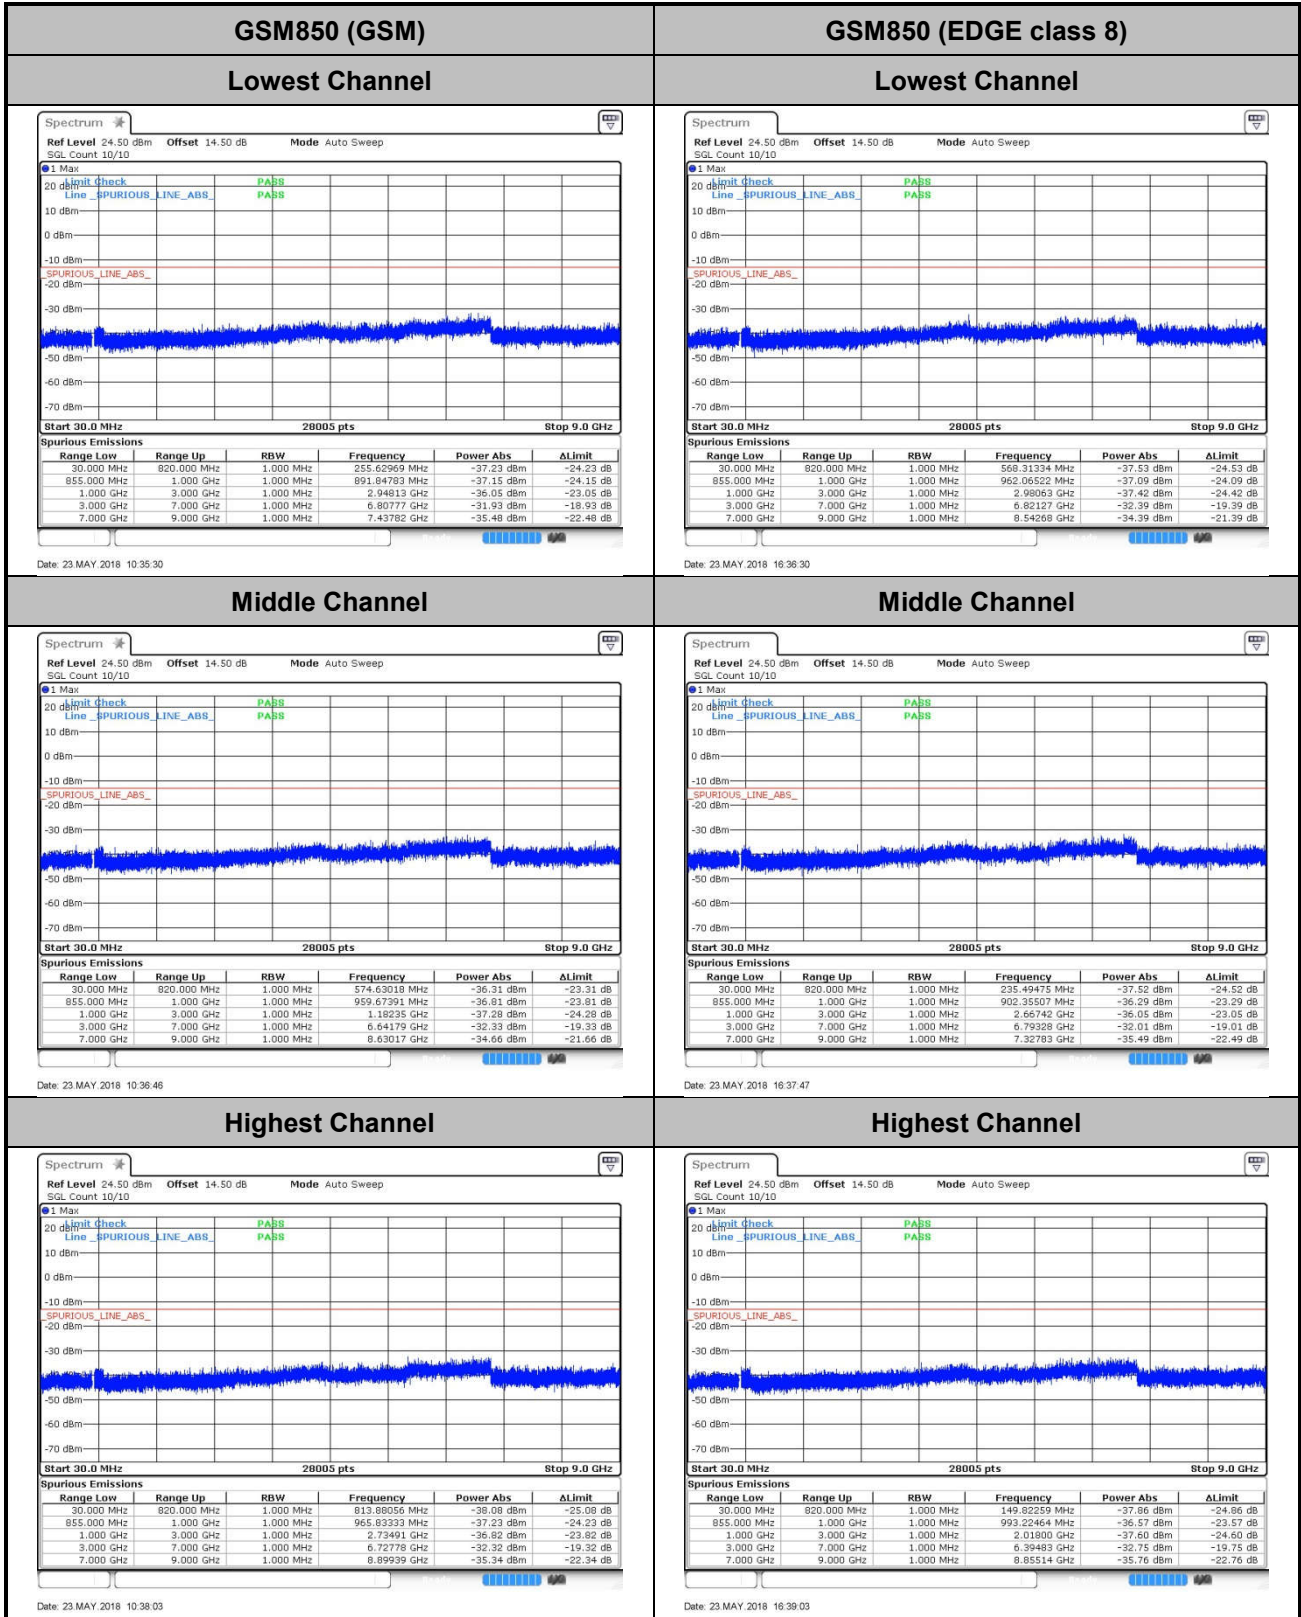



GSM1900 (GSM)


Lowest Channel

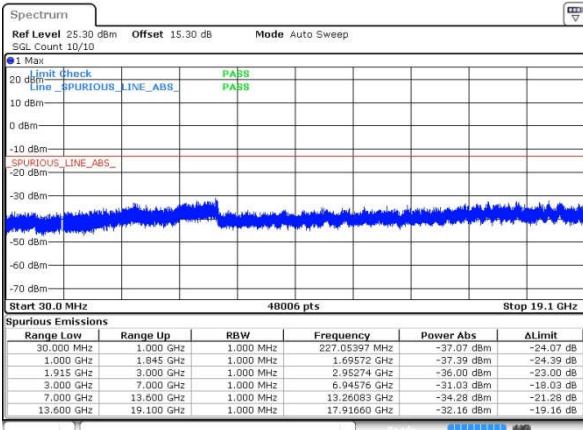

Date: 23 MAY 2018 11:06:29


GSM1900 (EDGE class 8)

Lowest Channel

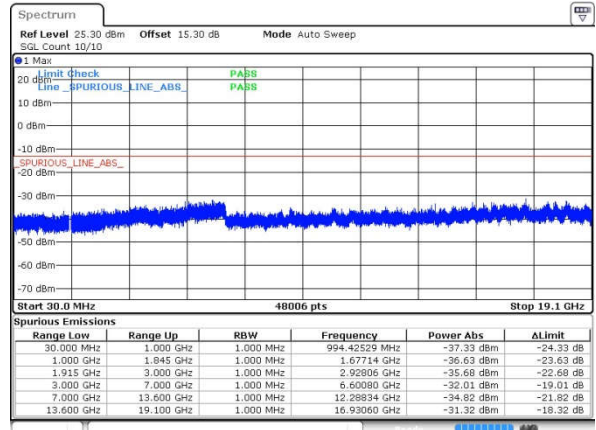


Date: 23 MAY 2018 13:56:58

Middle Channel

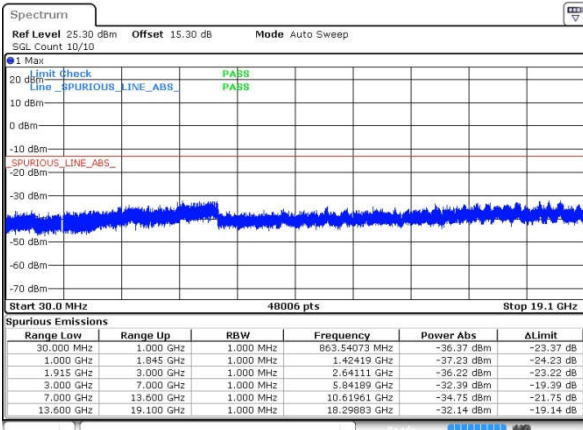


Date: 23 MAY 2018 11:07:45

Middle Channel

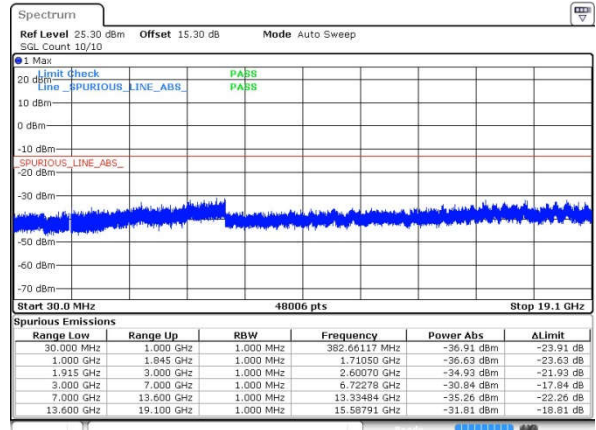


Date: 23 MAY 2018 13:58:14

Highest Channel

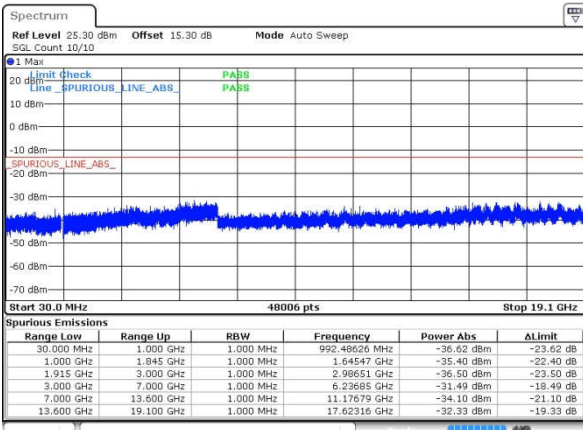

Date: 23 MAY 2018 11:09:00

Highest Channel

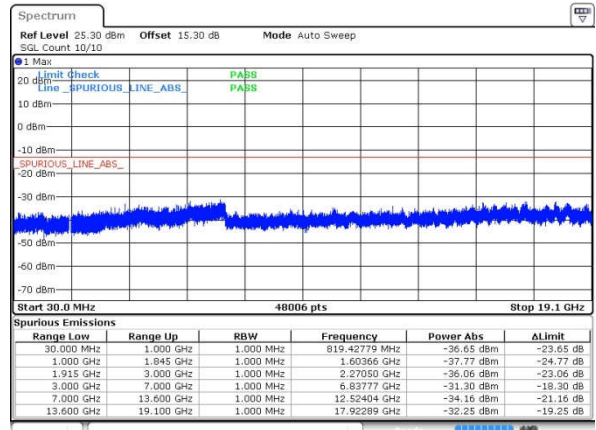


Date: 23 MAY 2018 13:59:43



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

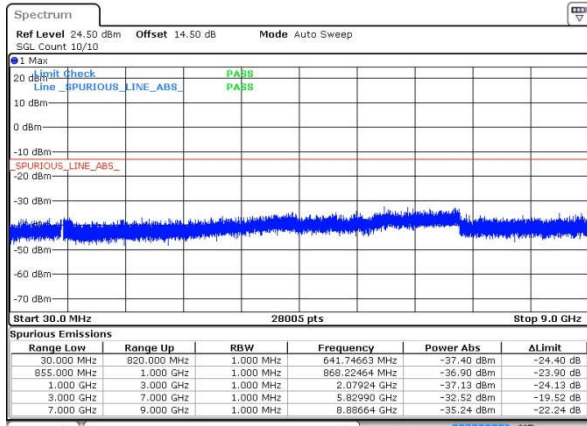

Date: 23 MAY 2018 11:55:52


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

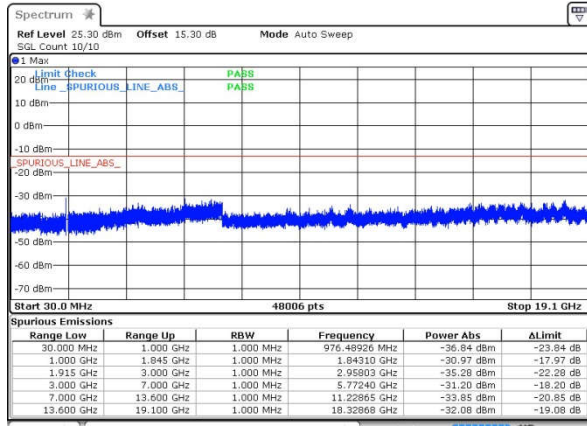


Date: 23 MAY 2018 11:34:53

Middle Channel

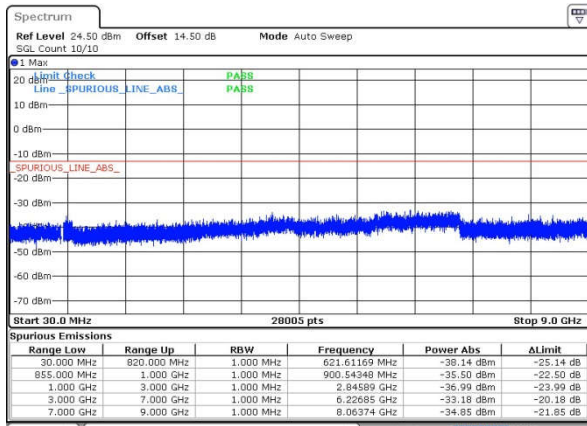


Date: 23 MAY 2018 11:57:07

Middle Channel

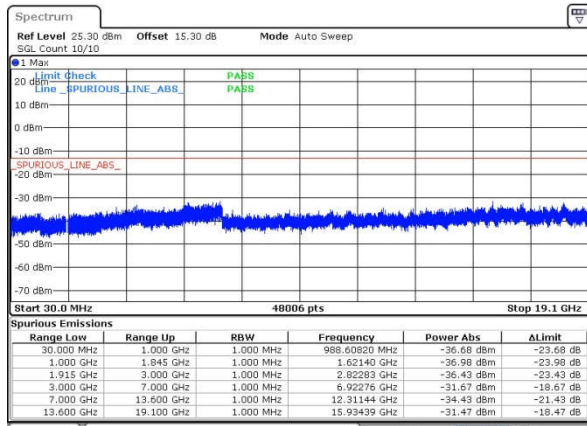


Date: 23 MAY 2018 11:38:08

Highest Channel

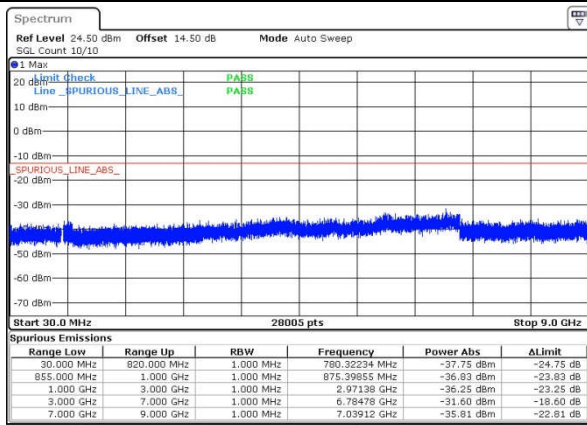

Date: 23 MAY 2018 11:58:22

Highest Channel

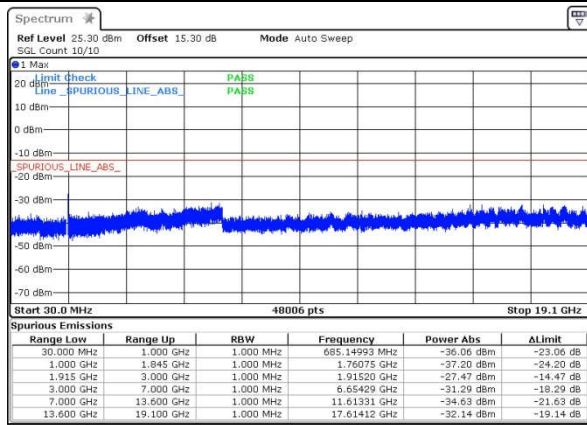


Date: 23 MAY 2018 11:37:24



CDMA BC0 (1xRTT)


Lowest Channel

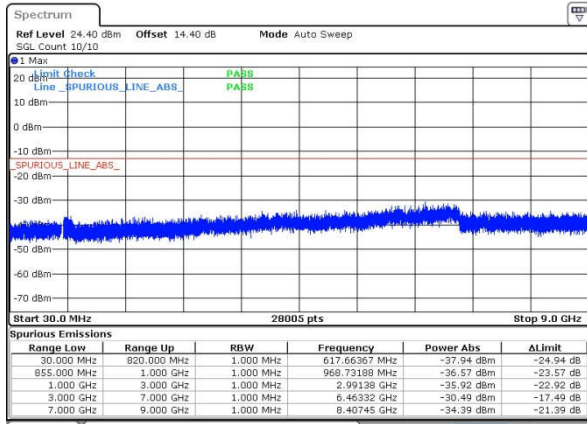

Date: 29 MAY 2018 14:58:53


CDMA BC1 (1xRTT)

Lowest Channel

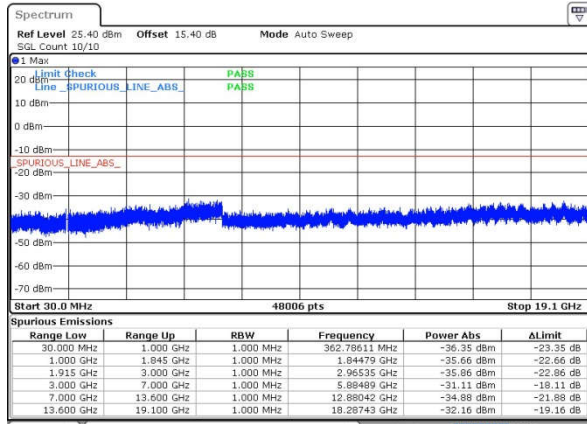


Date: 22 MAY 2018 21:43:08

Middle Channel

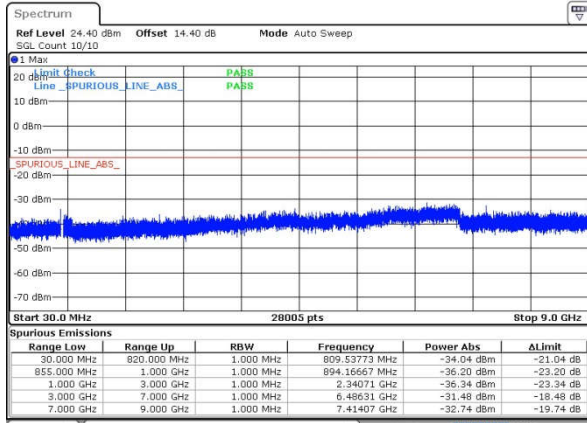


Date: 29 MAY 2018 15:00:09

Middle Channel

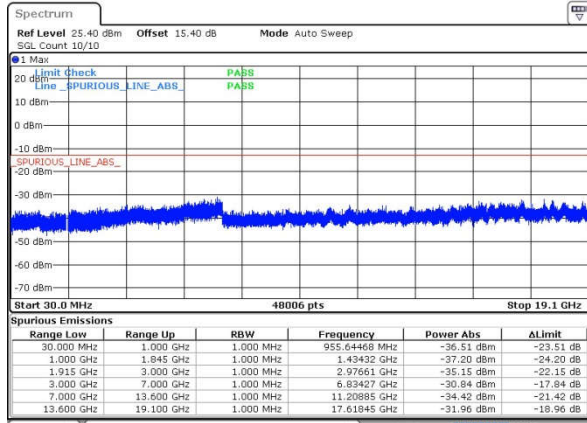


Date: 22 MAY 2018 21:45:28

Highest Channel

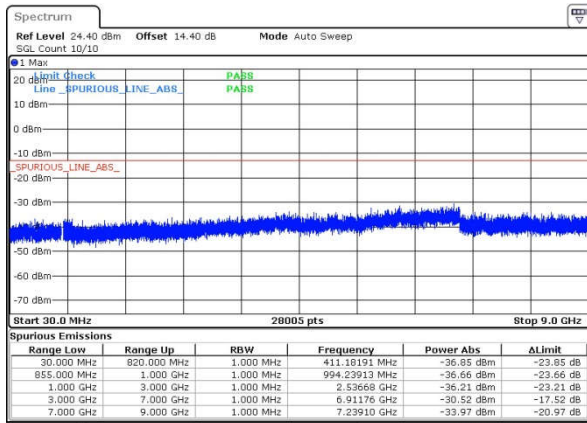

Date: 29 MAY 2018 15:01:25

Highest Channel

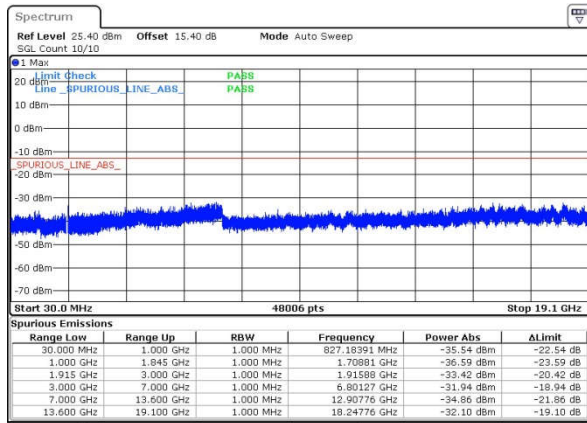

Date: 22 MAY 2018 21:50:49



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0155	0.0155	PASS
40	Normal Voltage	0.0383	0.0072	
30	Normal Voltage	0.0012	0.0299	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0371	0.0227	
0	Normal Voltage	0.0060	0.0430	
-10	Normal Voltage	0.0251	0.0227	
-20	Normal Voltage	0.0012	0.0072	
-30	Normal Voltage	0.0024	0.0239	
20	Maximum Voltage	0.0036	0.0239	
20	Normal Voltage	0.0036	0.0108	
20	Battery End Point	0.0191	0.0024	

Note: Normal Voltage = 3.9V. : Battery End Point (BEP) =3.4V. : Maximum Voltage =4.35 V



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0016	0.0005	PASS
40	Normal Voltage	0.0043	0.0011	
30	Normal Voltage	0.0191	0.0207	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0011	0.0016	
0	Normal Voltage	0.0186	0.0191	
-10	Normal Voltage	0.0154	0.0005	
-20	Normal Voltage	0.0122	0.0016	
-30	Normal Voltage	0.0016	0.0011	
20	Maximum Voltage	0.0053	0.0165	
20	Normal Voltage	0.0021	0.0037	
20	Battery End Point	0.0128	0.0016	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	PASS
40	Normal Voltage	0.0418	
30	Normal Voltage	0.0120	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0179	
0	Normal Voltage	0.0347	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0203	
-30	Normal Voltage	0.0418	
20	Maximum Voltage	0.0514	
20	Normal Voltage	0.0191	
20	Battery End Point	0.0048	

Note: Normal Voltage = 3.9V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.35 V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0011	PASS
40	Normal Voltage	0.0027	
30	Normal Voltage	0.0154	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0021	
0	Normal Voltage	0.0011	
-10	Normal Voltage	0.0117	
-20	Normal Voltage	0.0101	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0027	
20	Normal Voltage	0.0144	
20	Battery End Point	0.0106	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.35V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Test Conditions	Middle Channel	CDMA BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0466	PASS
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0311	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0347	
0	Normal Voltage	0.0287	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0167	
20	Maximum Voltage	0.0072	
20	Normal Voltage	0.0024	
20	Battery End Point	0.0490	

Note: Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.35V



Test Conditions	Middle Channel	CDMA BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0170	PASS
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0202	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0032	
0	Normal Voltage	0.0176	
-10	Normal Voltage	0.0255	
-20	Normal Voltage	0.0277	
-30	Normal Voltage	0.0053	
20	Maximum Voltage	0.0074	
20	Normal Voltage	0.0027	
20	Battery End Point	0.0261	

Note:

1. Normal Voltage = 3.9V. ; Battery End Point (BEP) = 3.4V. ; Maximum Voltage =4.35V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Conducted Test

Radiated Spurious Emission

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-60.85	-13	-47.85	-73.19	-62.61	0.98	4.89	H
	2472	-55.68	-13	-42.68	-73.26	-57.56	1.28	5.32	H
	3296	-58.48	-13	-45.48	-78.07	-61.89	1.54	7.10	H
	1648	-55.26	-13	-42.26	-68.08	-57.02	0.98	4.89	V
	2472	-53.65	-13	-40.65	-71.73	-55.53	1.28	5.32	V
	3296	-58.18	-13	-45.18	-78.11	-61.59	1.54	7.10	V
Middle	1672	-57.51	-13	-44.51	-70.14	-59.19	0.99	4.82	H
	2512	-55.24	-13	-42.24	-72.84	-57.21	1.29	5.41	H
	3344	-58.01	-13	-45.01	-77.91	-61.62	1.56	7.31	H
	1672	-51.64	-13	-38.64	-64.71	-53.32	0.99	4.82	V
	2512	-48.94	-13	-35.94	-66.97	-50.91	1.29	5.41	V
	3344	-58.54	-13	-45.54	-78.6	-62.15	1.56	7.31	V
Highest	1696	-44.25	-13	-31.25	-57.02	-45.85	1.00	4.75	H
	2544	-54.11	-13	-41.11	-71.73	-56.09	1.30	5.44	H
	3392	-58.24	-13	-45.24	-78.38	-62.04	1.57	7.52	H
	1696	-46.02	-13	-33.02	-59.24	-47.62	1.00	4.75	V
	2544	-54.18	-13	-41.18	-72.29	-56.16	1.30	5.44	V
	3392	-56.63	-13	-43.63	-76.84	-60.43	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.13	-13	-50.13	-75.51	-64.89	0.98	4.89	H
	2472	-57.27	-13	-44.27	-74.84	-59.15	1.28	5.32	H
	3296	-58.54	-13	-45.54	-78.02	-61.95	1.54	7.10	H
	1648	-61.88	-13	-48.88	-74.64	-63.64	0.98	4.89	V
	2472	-57.21	-13	-44.21	-74.17	-59.09	1.28	5.32	V
	3296	-57.73	-13	-44.73	-77.75	-61.14	1.54	7.10	V
Middle	1672	-63.21	-13	-50.21	-75.92	-64.89	0.99	4.82	H
	2512	-56.94	-13	-43.94	-74.6	-58.91	1.29	5.41	H
	3344	-58.26	-13	-45.26	-78.07	-61.87	1.56	7.31	H
	1672	-61.01	-13	-48.01	-74.11	-62.69	0.99	4.82	V
	2512	-55.61	-13	-42.61	-73.65	-57.58	1.29	5.41	V
	3344	-58.06	-13	-45.06	-78.15	-61.67	1.56	7.31	V
Highest	1696	-61.94	-13	-48.94	-74.69	-63.54	1.00	4.75	H
	2544	-54.94	-13	-41.94	-72.6	-56.92	1.30	5.44	H
	3392	-57.83	-13	-44.83	-77.94	-61.63	1.57	7.52	H
	1696	-58.06	-13	-45.06	-71.28	-59.66	1.00	4.75	V
	2544	-56.05	-13	-43.05	-74.14	-58.03	1.30	5.44	V
	3392	-57.71	-13	-44.71	-77.94	-61.51	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-45.32	-13	-32.32	-65.7	-51.89	1.67	8.24	H
	5550	-42.93	-13	-29.93	-67.83	-50	2.65	9.72	H
	7404	-48.47	-13	-35.47	-74.98	-57.62	2.46	11.61	H
	3702	-42.52	-13	-29.52	-62.81	-49.09	1.67	8.24	V
	5550	-35.86	-13	-22.86	-60.72	-42.93	2.65	9.72	V
	7404	-49.27	-13	-36.27	-76.07	-58.42	2.46	11.61	V
Middle	3762	-43.53	-13	-30.53	-63.85	-50.16	1.69	8.31	H
	5640	-42.62	-13	-29.62	-67.61	-49.67	2.71	9.76	H
	7518	-49.72	-13	-36.72	-76.52	-59.11	2.42	11.81	H
	3762	-43.18	-13	-30.18	-63.37	-49.81	1.69	8.31	V
	5640	-37.84	-13	-24.84	-62.83	-44.89	2.71	9.76	V
	7518	-48.07	-13	-35.07	-75.09	-57.46	2.42	11.81	V
Highest	3822	-42.34	-13	-29.34	-62.59	-49.02	1.71	8.39	H
	5730	-39.62	-13	-26.62	-64.94	-46.65	2.76	9.79	H
	7638	-47.63	-13	-34.63	-74.74	-57.13	2.38	11.88	H
	3822	-43.94	-13	-30.94	-64.29	-50.62	1.71	8.39	V
	5730	-39.22	-13	-26.22	-64.53	-46.25	2.76	9.79	V
	7638	-45.66	-13	-32.66	-73.03	-55.16	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-46.11	-13	-33.11	-66.47	-52.68	1.67	8.24	H
	5550	-40.89	-13	-27.89	-65.74	-47.96	2.65	9.72	H
	7404	-49.07	-13	-36.07	-75.84	-58.22	2.46	11.61	H
	3702	-40.75	-13	-27.75	-61.07	-47.32	1.67	8.24	V
	5550	-38.69	-13	-25.69	-63.63	-45.76	2.65	9.72	V
	7404	-51.46	-13	-38.46	-78.46	-60.61	2.46	11.61	V
Middle	3762	-43.56	-13	-30.56	-63.79	-50.19	1.69	8.31	H
	5640	-42.73	-13	-29.73	-67.79	-49.78	2.71	9.76	H
	7518	-47.67	-13	-34.67	-74.45	-57.06	2.42	11.81	H
	3762	-40.74	-13	-27.74	-61.02	-47.37	1.69	8.31	V
	5640	-38.96	-13	-25.96	-63.97	-46.01	2.71	9.76	V
	7518	-49.48	-13	-36.48	-76.33	-58.87	2.42	11.81	V
Highest	3822	-43.64	-13	-30.64	-63.94	-50.32	1.71	8.39	H
	5730	-40.35	-13	-27.35	-65.67	-47.38	2.76	9.79	H
	7638	-45.62	-13	-32.62	-72.73	-55.12	2.38	11.88	H
	3822	-42.71	-13	-29.71	-63.07	-49.39	1.71	8.39	V
	5730	-40.41	-13	-27.41	-65.66	-47.44	2.76	9.79	V
	7638	-41.92	-13	-28.92	-69.29	-51.42	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.28	-13	-50.28	-75.36	-65.04	0.98	4.89	H
	2472	-59.30	-13	-46.30	-76.58	-61.18	1.28	5.32	H
	3296	-58.37	-13	-45.37	-77.73	-61.78	1.54	7.10	H
	1648	-62.83	-13	-49.83	-75.37	-64.59	0.98	4.89	V
	2472	-59.26	-13	-46.26	-76.91	-61.14	1.28	5.32	V
	3296	-57.36	-13	-44.36	-76.99	-60.77	1.54	7.10	V
Middle	1672	-63.09	-13	-50.09	-75.49	-64.77	0.99	4.82	H
	2512	-59.57	-13	-46.57	-76.87	-61.54	1.29	5.41	H
	3344	-58.56	-13	-45.56	-78.13	-62.17	1.56	7.31	H
	1672	-62.88	-13	-49.88	-75.74	-64.56	0.99	4.82	V
	2512	-59.42	-13	-46.42	-77.23	-61.39	1.29	5.41	V
	3344	-57.66	-13	-44.66	-77.44	-61.27	1.56	7.31	V
Highest	1696	-63.44	-13	-50.44	-75.95	-65.04	1.00	4.75	H
	2544	-59.67	-13	-46.67	-77.06	-61.65	1.30	5.44	H
	3392	-58.08	-13	-45.08	-77.92	-61.88	1.57	7.52	H
	1696	-63.17	-13	-50.17	-76.1	-64.77	1.00	4.75	V
	2544	-59.24	-13	-46.24	-77.11	-61.22	1.30	5.44	V
	3392	-57.96	-13	-44.96	-77.87	-61.76	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3708	-45.54	-13	-32.54	-65.9	-52.12	1.67	8.25	H
	5556	-47.02	-13	-34.02	-71.9	-54.09	2.66	9.72	H
	7404	-50.72	-13	-37.72	-77.42	-59.87	2.46	11.61	H
	3708	-45.71	-13	-32.71	-66.09	-52.29	1.67	8.25	V
	5556	-40.68	-13	-27.68	-65.62	-47.75	2.66	9.72	V
	7404	-50.49	-13	-37.49	-77.25	-59.64	2.46	11.61	V
Middle	3762	-50.05	-13	-37.05	-70.29	-56.68	1.69	8.31	H
	5640	-46.93	-13	-33.93	-71.91	-53.98	2.71	9.76	H
	7518	-50.07	-13	-37.07	-76.89	-59.46	2.42	11.81	H
	3762	-44.76	-13	-31.76	-65.2	-51.39	1.69	8.31	V
	5640	-43.03	-13	-30.03	-68.1	-50.08	2.71	9.76	V
	7518	-50.92	-13	-37.92	-77.94	-60.31	2.42	11.81	V
Highest	3816	-45.46	-13	-32.46	-65.7	-52.14	1.70	8.38	H
	5718	-42.93	-13	-29.93	-68.16	-49.97	2.75	9.79	H
	7632	-49.02	-13	-36.02	-76.12	-58.51	2.39	11.88	H
	3816	-47.84	-13	-34.84	-68.15	-54.52	1.70	8.38	V
	5718	-43.59	-13	-30.59	-68.91	-50.63	2.75	9.79	V
	7632	-48.95	-13	-35.95	-76.28	-58.44	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC0(1xRTT)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-60.85	-13	-47.85	-73.19	-62.61	0.98	4.89	H
	2472	-55.68	-13	-42.68	-73.26	-57.56	1.28	5.32	H
	3296	-58.48	-13	-45.48	-78.07	-61.89	1.54	7.10	H
	1648	-55.26	-13	-42.26	-68.08	-57.02	0.98	4.89	V
	2472	-53.65	-13	-40.65	-71.73	-55.53	1.28	5.32	V
	3296	-58.18	-13	-45.18	-78.11	-61.59	1.54	7.10	V
Middle	1672	-57.51	-13	-44.51	-70.14	-59.19	0.99	4.82	H
	2512	-55.24	-13	-42.24	-72.84	-57.21	1.29	5.41	H
	3344	-58.01	-13	-45.01	-77.91	-61.62	1.56	7.31	H
	1672	-51.64	-13	-38.64	-64.71	-53.32	0.99	4.82	V
	2512	-48.94	-13	-35.94	-66.97	-50.91	1.29	5.41	V
	3344	-58.54	-13	-45.54	-78.6	-62.15	1.56	7.31	V
Highest	1696	-44.25	-13	-31.25	-57.02	-45.85	1.00	4.75	H
	2544	-54.11	-13	-41.11	-71.73	-56.09	1.30	5.44	H
	3392	-58.24	-13	-45.24	-78.38	-62.04	1.57	7.52	H
	1696	-46.02	-13	-33.02	-59.24	-47.62	1.00	4.75	V
	2544	-54.18	-13	-41.18	-72.29	-56.16	1.30	5.44	V
	3392	-56.63	-13	-43.63	-76.84	-60.43	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC1(1xRTT)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-42.43	-13	-29.43	-62.75	-49	1.67	8.24	H
	5556	-35.65	-13	-22.65	-60.62	-42.72	2.66	9.72	H
	7404	-40.99	-13	-27.99	-67.69	-50.14	2.46	11.61	H
	3702	-36.11	-13	-23.11	-56.41	-42.68	1.67	8.24	V
	5556	-35.18	-13	-22.18	-59.98	-42.25	2.66	9.72	V
	7404	-46.28	-13	-33.28	-73.27	-55.43	2.46	11.61	V
Middle	3762	-50.05	-13	-37.05	-70.29	-56.68	1.69	8.31	H
	5640	-46.93	-13	-33.93	-71.91	-53.98	2.71	9.76	H
	7518	-50.07	-13	-37.07	-76.89	-59.46	2.42	11.81	H
	3762	-44.76	-13	-31.76	-65.2	-51.39	1.69	8.31	V
	5640	-43.03	-13	-30.03	-68.1	-50.08	2.71	9.76	V
	7518	-50.92	-13	-37.92	-77.94	-60.31	2.42	11.81	V
Highest	3816	-39.71	-13	-26.71	-60.01	-46.39	1.70	8.38	H
	5724	-35.41	-13	-22.41	-60.74	-42.45	2.75	9.79	H
	7638	-41.01	-13	-28.01	-68.2	-50.51	2.38	11.88	H
	3816	-41.13	-13	-28.13	-61.37	-47.81	1.70	8.38	V
	5724	-31.51	-13	-18.51	-56.8	-38.55	2.75	9.79	V
	7638	-39.75	-13	-26.75	-67.12	-49.25	2.38	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.