

28_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 53.398$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.53, 7.53, 7.53); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch11/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.674 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.973 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.729 W/kg
SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.181 W/kg
Maximum value of SAR (measured) = 0.523 W/kg

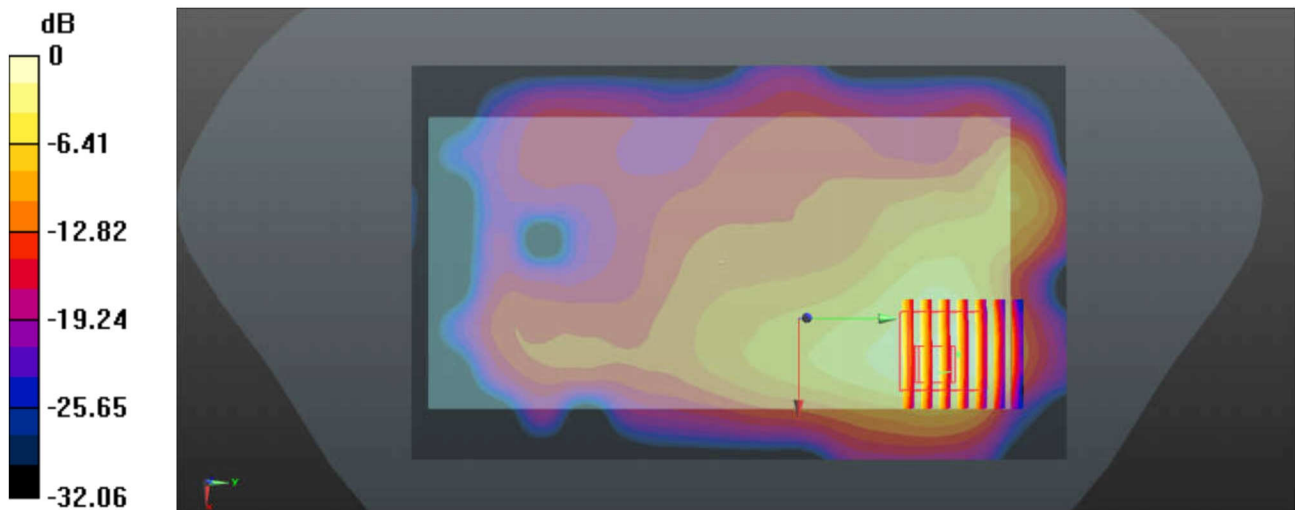

0 dB = 0.674 W/kg = -1.71 dBW/kg

29_WLAN5.2GHz_802.11a 6Mbps_Left Side_5mm_Ch40


Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1.018
 Medium: MSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.438$ S/m; $\epsilon_r = 48.043$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.62, 4.62, 4.62); Calibrated: 2018.1.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40/Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.99 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 1.699 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 3.48 W/kg
SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.268 W/kg
 Maximum value of SAR (measured) = 1.98 W/kg

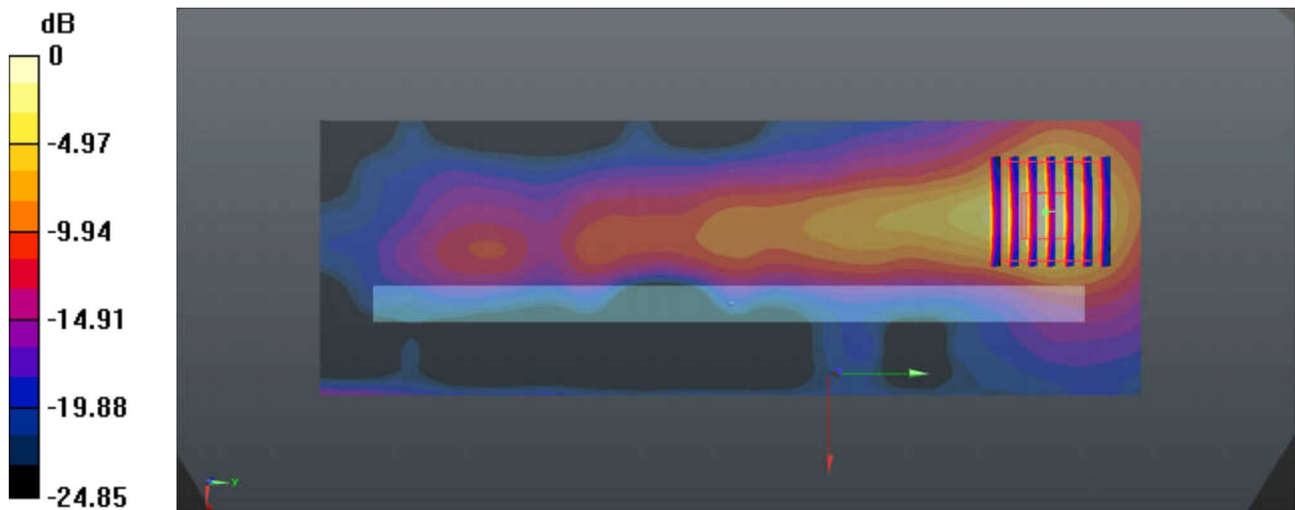

0 dB = 1.99 W/kg = 2.99 dBW/kg

30_WLAN5.8GHz_802.11a 6Mbps_Left Side_5mm_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.018
 Medium: MSL_5000 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.206 \text{ S/m}$; $\epsilon_r = 47.073$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.18, 4.18, 4.18); Calibrated: 2018.1.31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (51x181x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.91 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 1.887 V/m ; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 3.47 W/kg
SAR(1 g) = 0.733 W/kg ; SAR(10 g) = 0.222 W/kg
 Maximum value of SAR (measured) = 1.91 W/kg

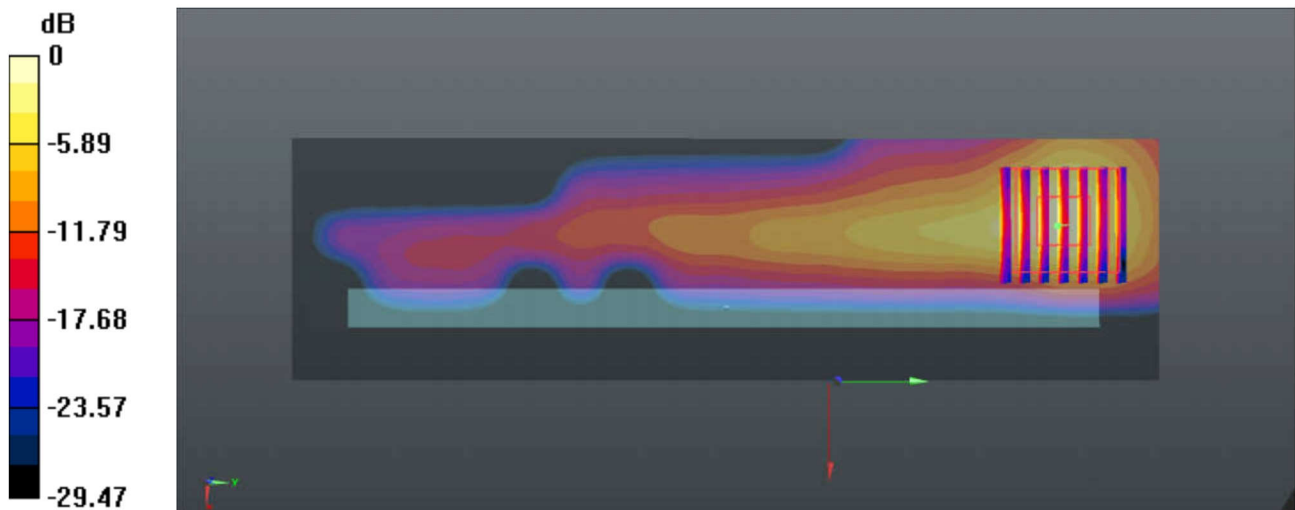

0 dB = $1.91 \text{ W/kg} = 2.81 \text{ dBW/kg}$

31_Bluetooth_1Mbps_Back_5mm_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298
Medium: MSL_2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 53.608$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.53, 7.53, 7.53); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (151x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.595 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.730 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.592 W/kg
SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.137 W/kg
Maximum value of SAR (measured) = 0.435 W/kg

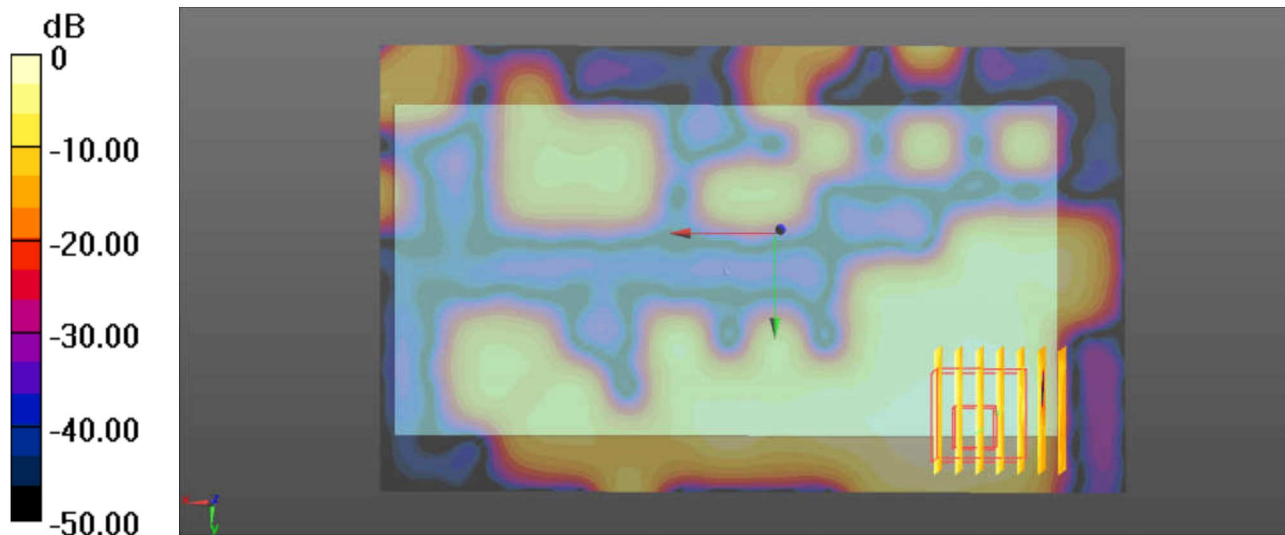

0 dB = 0.435 W/kg = -3.62 dBW/kg

32_GSM850_GPRS 3 Tx slots_Back_5mm_Ch251

Communication System: UID 0, GPRS/EDGE (3 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.77
 Medium: MSL_835 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 55.026$;

$\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.938 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.11 V/m ; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.695 W/kg ; SAR(10 g) = 0.375 W/kg
 Maximum value of SAR (measured) = 0.986 W/kg

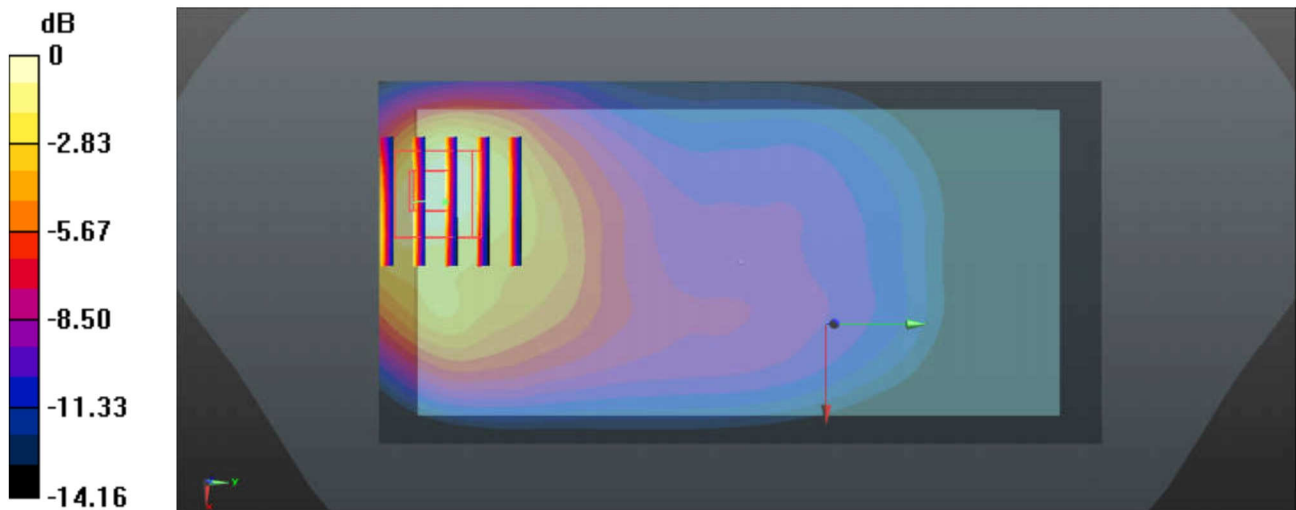

$0 \text{ dB} = 0.938 \text{ W/kg} = -0.28 \text{ dBW/kg}$

33_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch810

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
 Medium: MSL_1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.792$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.443 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.653 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

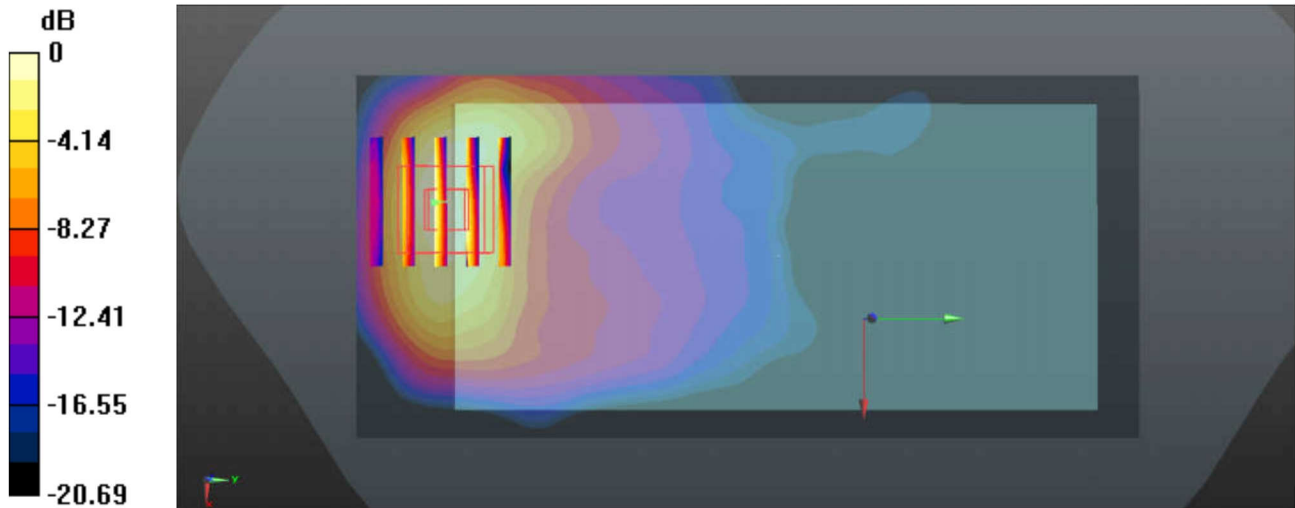

0 dB = 0.443 W/kg = -3.54 dBW/kg

34_WCDMA Band V_RMC12.2Kbps_Back_5mm_Ch4233


Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium: MSL_835 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 55.04$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.41 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.98 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.85 W/kg
SAR(1 g) = 0.923 W/kg ; SAR(10 g) = 0.493 W/kg
 Maximum value of SAR (measured) = 1.36 W/kg

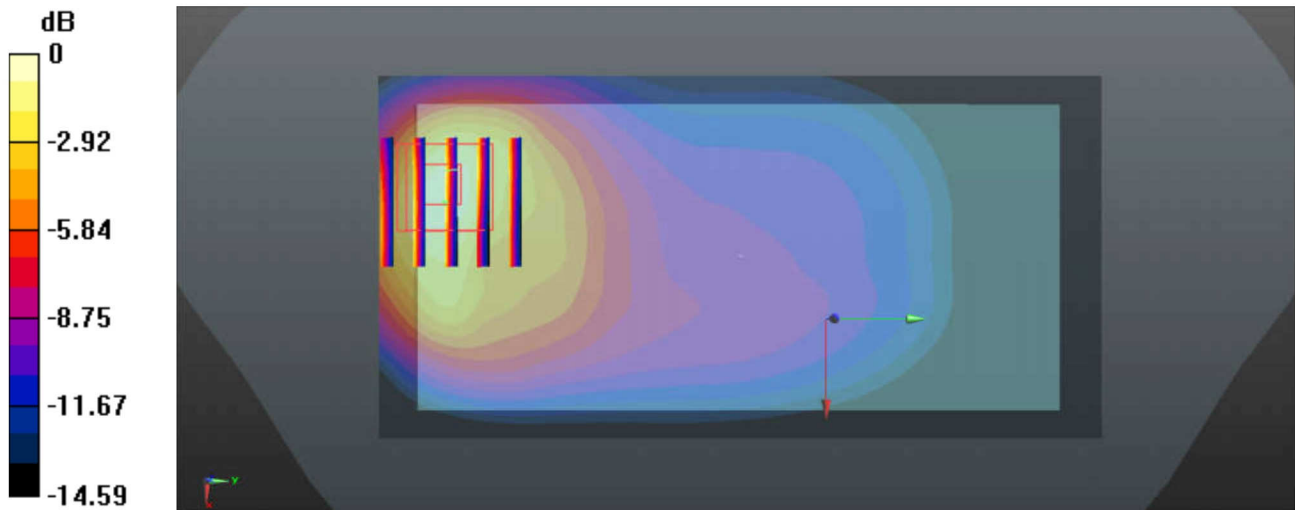

0 dB = $1.41 \text{ W/kg} = 1.49 \text{ dBW/kg}$

35_WCDMA Band II_RMC12.2Kbps_Back_5mm_Ch9538


Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: MSL_1900 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.799$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.547 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.932 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.862 W/kg
SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.237 W/kg
 Maximum value of SAR (measured) = 0.690 W/kg

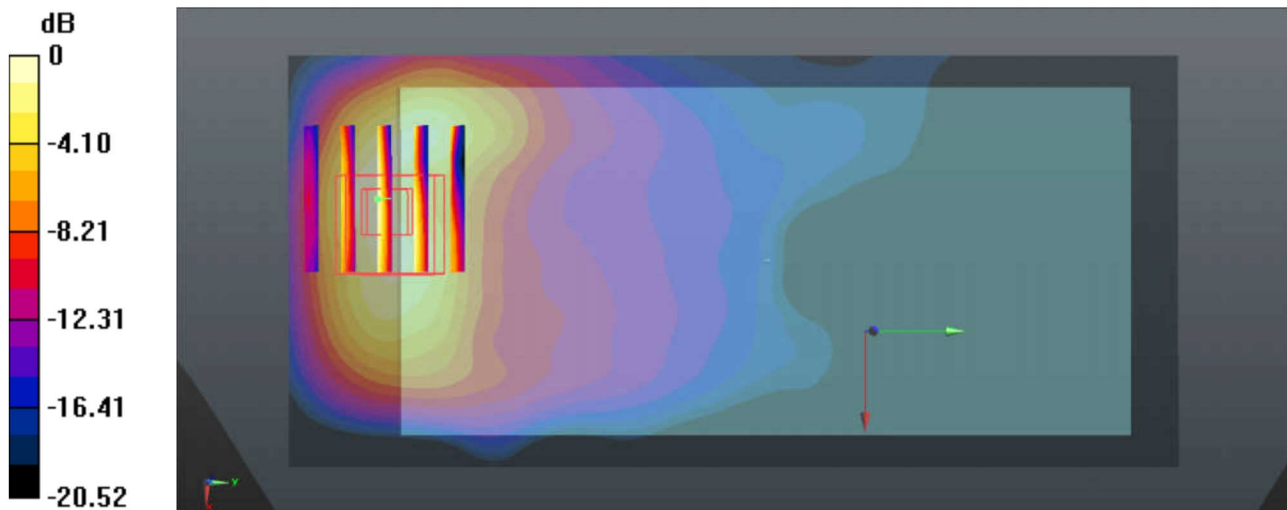

0 dB = 0.547 W/kg = -2.62 dBW/kg

36_CDMA2000 BC0_RC3 SO32 (F+SCH) _Back_5mm_Ch777


Communication System: UID 0, CDMA2000 (0); Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium: MSL_835 Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.985 \text{ S/m}$; $\epsilon_r = 55.029$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch777/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.903 W/kg

Ch777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.12 V/m ; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.648 W/kg ; SAR(10 g) = 0.352 W/kg
 Maximum value of SAR (measured) = 0.942 W/kg

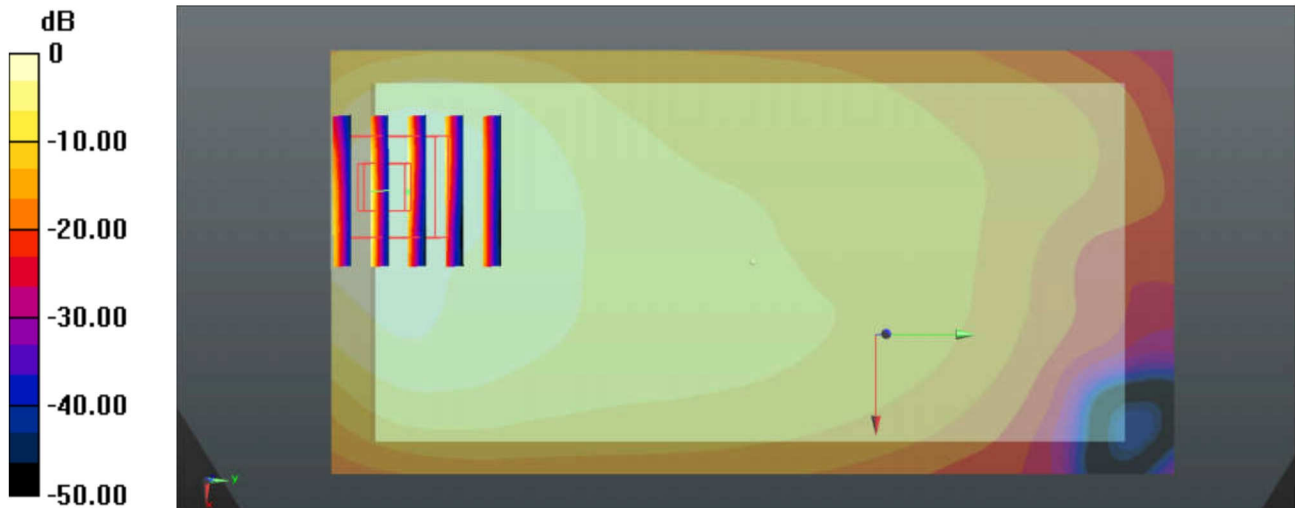

$0 \text{ dB} = 0.903 \text{ W/kg} = -0.44 \text{ dBW/kg}$

37_CDMA2000 BC1_RC3 SO32_Back_5mm_Ch1175


Communication System: UID 0, CDMA2000 (0); Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium: MSL_1900 Medium parameters used: $f = 1908.75 \text{ MHz}$; $\sigma = 1.524 \text{ S/m}$; $\epsilon_r = 52.799$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.03, 8.03, 8.03); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1175/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.512 W/kg

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.120 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.866 W/kg
SAR(1 g) = 0.459 W/kg ; SAR(10 g) = 0.222 W/kg
 Maximum value of SAR (measured) = 0.646 W/kg

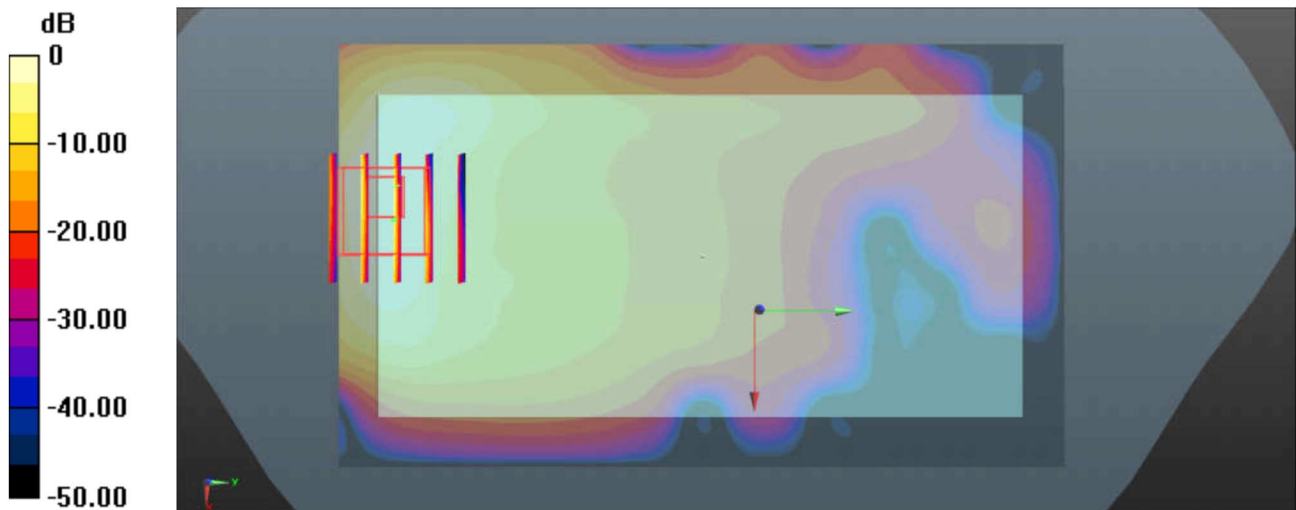

$0 \text{ dB} = 0.512 \text{ W/kg} = -2.91 \text{ dBW/kg}$

38_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230


Communication System: UID 0, FDD_LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: MSL_835 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 55.684$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.21, 10.21, 10.21); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23230/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.967 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.91 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.722 W/kg ; SAR(10 g) = 0.392 W/kg
 Maximum value of SAR (measured) = 1.07 W/kg

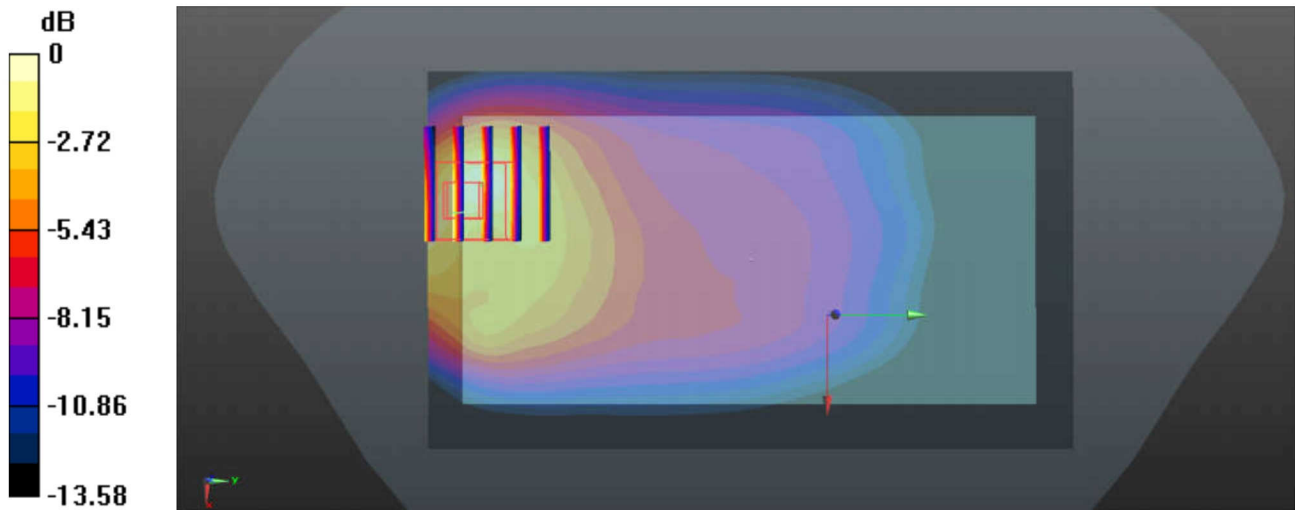

0 dB = $0.967 \text{ W/kg} = -0.15 \text{ dBW/kg}$

39_LTE Band 5_10M_QPSK_1RB_25Offset_Back_5mm_Ch20525


Communication System: UID 0, FDD_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium: MSL_835 Medium parameters used : $f = 836.5 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 55.148$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.02, 10.02, 10.02); Calibrated: 2018.1.31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.26 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.17 V/m ; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 0.926 W/kg ; SAR(10 g) = 0.506 W/kg
 Maximum value of SAR (measured) = 1.30 W/kg

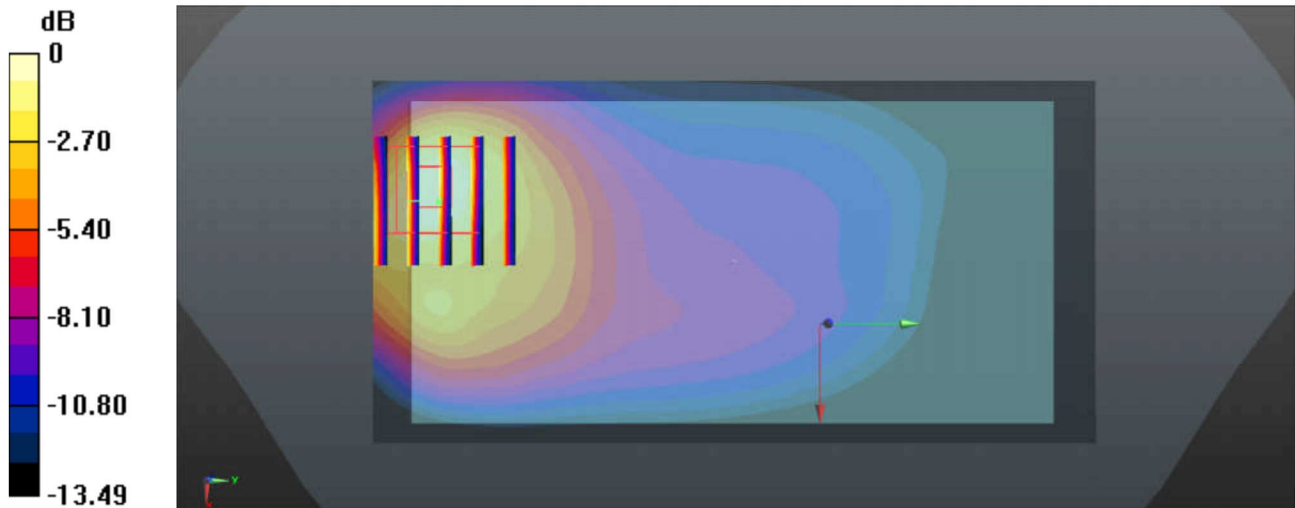

0 dB = $1.26 \text{ W/kg} = 1.00 \text{ dBW/kg}$