



FCC RADIO TEST REPORT

FCC ID : IHDT56XJ1
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Applicant : Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA
Standard : 47 CFR Part 2, 22(H), 24(E)

The product was received on May 29, 2018 and testing was started from Jun. 26, 2018 and completed on Jun. 27, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	7
2.3 Support Unit used in test configuration	8
2.4 Frequency List of Low/Middle/High Channels	8
3 Radiated Test Items	9
3.1 Measuring Instruments.....	9
3.2 Test Setup	9
3.3 Test Result of Radiated Test.....	9
3.4 Field Strength of Spurious Radiation Measurement	10
4 List of Measuring Equipment.....	11
5 Uncertainty of Evaluation	12
Appendix A. Test Results of Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG852917A	01	Initial issue of report	Jul. 26, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.4	§2.1053 §22.917 (a) §24.238 (a)	Field Strength of Spurious Radiation	Pass	Under limit 6.15 dB at 1648.000 MHz

Reviewed by: Joseph Lin

Report Producer: Polly Tsai

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
FCC ID	IHDT56XJ1
IMEI Code	355550090016168
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/GNSS/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
WPC Cover	Brand Name : Motorola
	Model Name : MD100W

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM: 850: 824.2 MHz ~ 848.8 MHz
Rx Frequency	GSM: 850: 869.2 MHz ~ 893.8 MHz
Antenna Type	Fixed Internal Antenna
Antenna Gain	Cellular Band: -1.8 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850.


All modes and data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
GSM 850	■ GSM Link

2.2 Connection Diagram of Test System

<WPC Charging Mode>

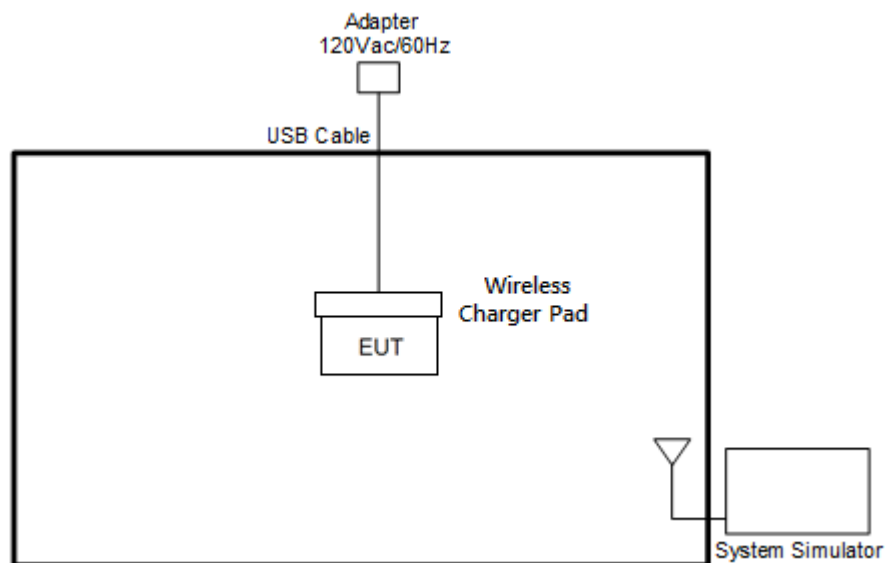
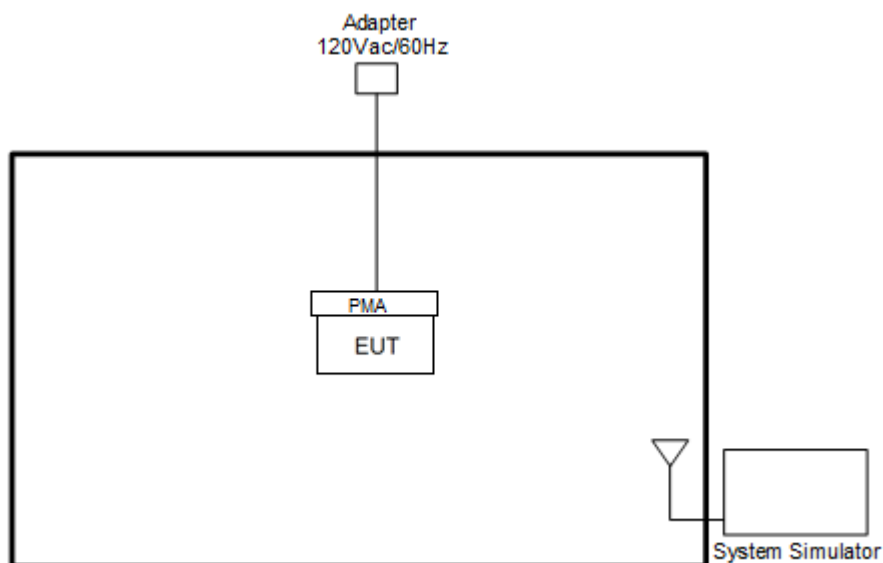
<PMA Charging Mode>

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LG Charging Pad	LG	WCD-110	FCC DoC	N/A	N/A
3.	PMA Charging Pad	DURACELL	M-018B518A	FCC DoC	N/A	N/A
4.	USB Cable	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A

2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

For radiated test from 30MHz to 1GHz

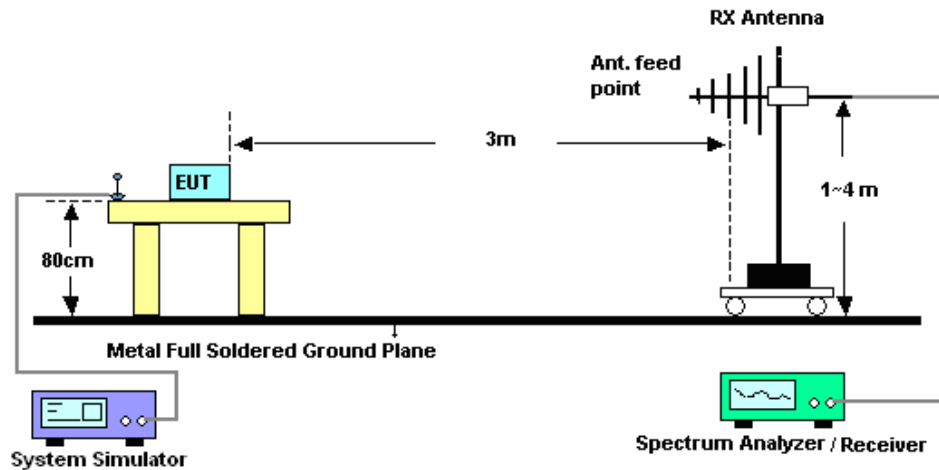

For radiated test above 1GHz

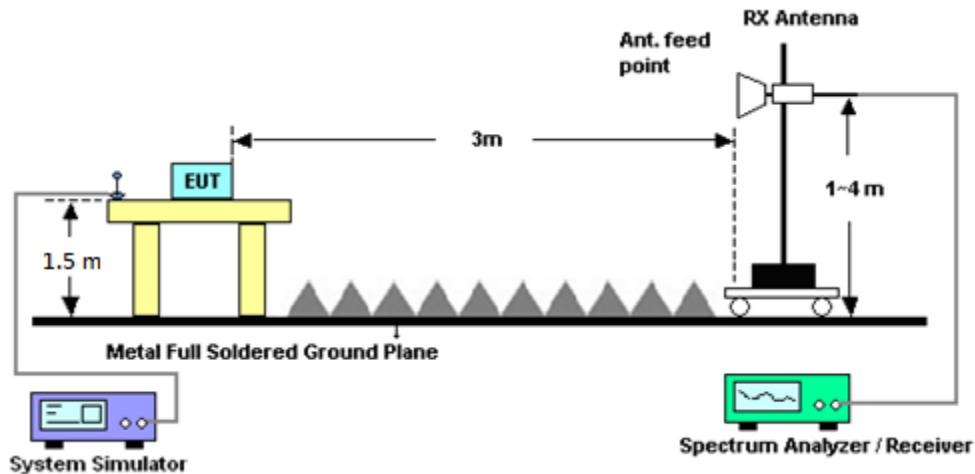

3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 Field Strength of Spurious Radiation Measurement

3.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	May 21, 2018	Jun. 26, 2018 ~ Jun. 27, 2018	May 20, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Jun. 26, 2018 ~ Jun. 27, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 26, 2018 ~ Jun. 27, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 26, 2018 ~ Jun. 27, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 26, 2018 ~ Jun. 27, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Nov. 26, 2018	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	80504004656 H	N/A	N/A	Jun. 26, 2018 ~ Jun. 27, 2018	N/A	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Jun. 26, 2018 ~ Jun. 27, 2018	Jan. 14, 2019	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Sep. 06, 2017	Jun. 26, 2018 ~ Jun. 27, 2018	Sep. 05, 2018	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.05
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.95
---	------



Appendix A. Test Results of Radiated Test

GSM850

<WPC Charging Mode>

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-32.06	-13	-19.06	-44.35	-33.82	0.98	4.89	H
	2472	-26.55	-13	-13.55	-44.11	-28.43	1.28	5.32	H
	3296	-25.96	-13	-12.96	-45.49	-29.37	1.54	7.10	H
	4120	-27.94	-13	-14.94	-48.86	-32.58	1.83	8.62	H
	4944	-32.41	-13	-19.41	-55.94	-37.54	2.30	9.59	H
	5768	-33.44	-13	-20.44	-59.12	-38.32	2.78	9.81	H
	6592	-43.72	-13	-30.72	-70.32	-49.16	2.72	10.31	H
	7416	-43.22	-13	-30.22	-70.63	-50.25	2.46	11.63	H
	8240	-42.79	-13	-29.79	-71.24	-50.61	2.32	12.29	H
	1648	-25.48	-13	-12.48	-38.31	-27.24	0.98	4.89	V
	2472	-21.59	-13	-8.59	-39.47	-23.47	1.28	5.32	V
	3296	-30.62	-13	-17.62	-50.53	-34.03	1.54	7.10	V
	4120	-22.51	-13	-9.51	-43.58	-27.15	1.83	8.62	V
	4944	-34.82	-13	-21.82	-58.36	-39.95	2.30	9.59	V
	5768	-32.75	-13	-19.75	-58.33	-37.63	2.78	9.81	V
	6592	-37.81	-13	-24.81	-64.34	-43.25	2.72	10.31	V
	7416	-44.06	-13	-31.06	-71.62	-51.09	2.46	11.63	V
	8240	-42.32	-13	-29.32	-71.08	-50.14	2.32	12.29	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GSM850****<PMA Charging Mode>**

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-19.15	-13	-6.15	-31.47	-20.91	0.98	4.89	H
	2472	-22.26	-13	-9.26	-39.79	-24.14	1.28	5.32	H
	3296	-24.32	-13	-11.32	-43.87	-27.73	1.54	7.10	H
	4120	-20.87	-13	-7.87	-41.77	-25.51	1.83	8.62	H
	4944	-34.33	-13	-21.33	-57.82	-39.46	2.30	9.59	H
	5768	-37.09	-13	-24.09	-62.55	-41.97	2.78	9.81	H
	6592	-43.78	-13	-30.78	-70.46	-49.22	2.72	10.31	H
	7416	-41.05	-13	-28.05	-68.43	-48.08	2.46	11.63	H
	8240	-42.41	-13	-29.41	-70.93	-50.23	2.32	12.29	H
	1648	-31.24	-13	-18.24	-44.04	-33	0.98	4.89	V
	2472	-21.73	-13	-8.73	-39.73	-23.61	1.28	5.32	V
	3296	-24.18	-13	-11.18	-44.11	-27.59	1.54	7.10	V
	4120	-25.23	-13	-12.23	-46.25	-29.87	1.83	8.62	V
	4944	-36.14	-13	-23.14	-59.6	-41.27	2.30	9.59	V
	5768	-29.71	-13	-16.71	-55.14	-34.59	2.78	9.81	V
	6592	-40.97	-13	-27.97	-67.34	-46.41	2.72	10.31	V
	7416	-40.52	-13	-27.52	-68.13	-47.55	2.46	11.63	V
	8240	-41.22	-13	-28.22	-70.04	-49.04	2.32	12.29	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.