

HAC_E_Dipole_2450**DUT: HAC Dipole 2450 MHz**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 2019/1/30
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2018/5/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

E Scan - measurement distance from the probe sensor center to CD2450 = 10mm & 15mm
2/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 77.22 V/m; Power Drift = 0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 90.32 V/m

Average value of Total=(88.47+90.32) / 2 = 89.395 V/m

PMF scaled E-field


Grid 1 M3 87.50 V/m	Grid 2 M3 88.47 V/m	Grid 3 M3 85.66 V/m
Grid 4 M3 77.73 V/m	Grid 5 M3 78.12 V/m	Grid 6 M3 76.25 V/m
Grid 7 M3 88.97 V/m	Grid 8 M3 90.32 V/m	Grid 9 M3 87.45 V/m

Cursor:

Total = 90.32 V/m

E Category: M3

Location: 0.5, 24.5, 8.7 mm

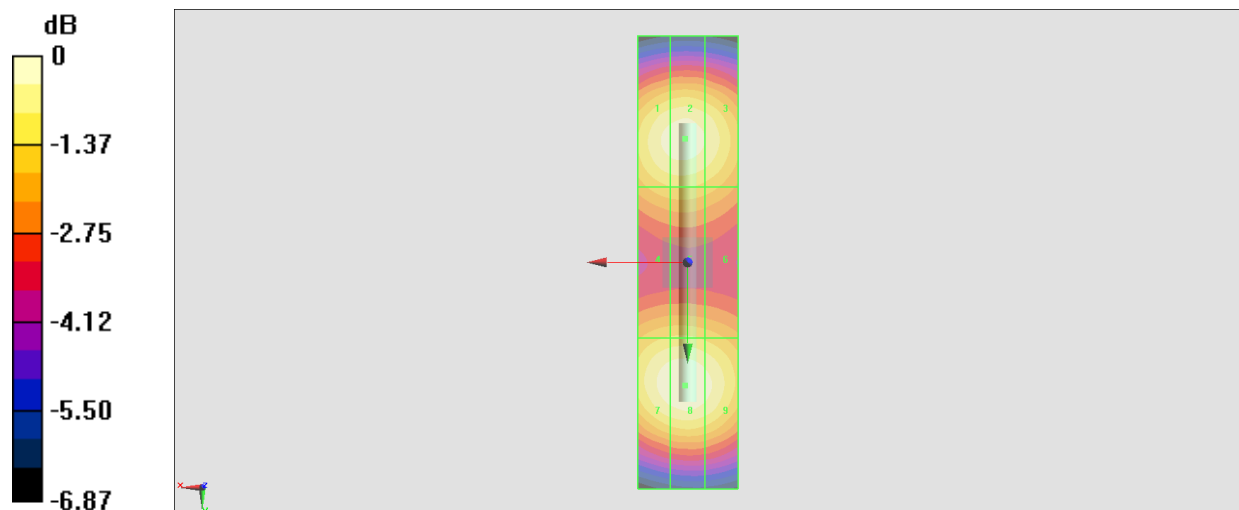

0 dB = 90.32 V/m = 39.12 dBV/m