

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1962-6
FCC ID : IHDT56XP4
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Sep. 10, 2018 and testing was started from Oct. 08, 2018 and completed on Oct. 23, 2018. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 Specification of Accessory	8
4.3 General LTE SAR Test and Reporting Considerations	9
5. Proximity Sensor Triggering Test.....	11
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	11
6. RF Exposure Limits.....	23
6.1 Uncontrolled Environment.....	23
6.2 Controlled Environment.....	23
7. Specific Absorption Rate (SAR).....	24
7.1 Introduction	24
7.2 SAR Definition	24
8. System Description and Setup	25
8.1 E-Field Probe	26
8.2 Data Acquisition Electronics (DAE)	26
8.3 Phantom.....	27
8.4 Device Holder.....	28
9. Measurement Procedures	29
9.1 Spatial Peak SAR Evaluation	29
9.2 Power Reference Measurement.....	30
9.3 Area Scan	30
9.4 Zoom Scan.....	31
9.5 Volume Scan Procedures.....	31
9.6 Power Drift Monitoring.....	31
10. Test Equipment List.....	32
11. System Verification	33
11.1 Tissue Simulating Liquids	33
11.2 Tissue Verification	34
11.3 System Performance Check Results	35
12. RF Exposure Positions	37
12.1 Ear and handset reference point	37
12.2 Definition of the cheek position	38
12.3 Definition of the tilt position	39
12.4 Body Worn Accessory	40
12.5 Product Specific 10g SAR Exposure.....	41
12.6 Wireless Router.....	41
13. Conducted RF Output Power (Unit: dBm).....	42
14. Antenna Location	111
15. SAR Test Results	113
15.1 Head SAR	116
15.2 Hotspot SAR	119
15.3 Body Worn Accessory SAR.....	124
15.4 Product specific 10g SAR	129
15.5 Repeated SAR Measurement	132
16. Simultaneous Transmission Analysis	133
16.1 Head Exposure Conditions	134
16.2 Hotspot Exposure Conditions.....	135
16.3 Body-Worn Accessory Exposure Conditions	137
16.4 Product specific 10g SAR Exposure Conditions.....	138
16.5 SPLSR Evaluation and Analysis.....	139
17. Supplemental Tuner Tests Results.....	167
17.1 Supplemental Tuner Head & Body SAR Results.....	167
18. Uncertainty Assessment	168
19. References	169
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. Supplemental Tuner Head & Body SAR Results	
Appendix D. DASY Calibration Certificate	
Appendix E. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA891009-03	Rev. 01	Initial issue of report	Nov. 08, 2018



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1962-6**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.26	1.31	1.31	1.59
		GSM1900	<0.10	1.35	1.43	
	WCDMA	Band V	0.30	1.18	1.18	
		Band IV	0.12	1.34	1.43	
		Band II	0.15	1.20	1.43	
	LTE	Band 26/Band 5	0.29	1.14	1.14	
		Band 4	0.16	1.05	1.16	
		Band 2	0.14	1.29	1.44	
		Band 7	0.39	1.39	1.39	
		Band 41/ Band 38	0.25	1.33	1.33	
DTS		WLAN	2.4GHz WLAN	0.48	0.32	0.32
NII	5GHz WLAN		0.72	0.70	0.84	1.55
DSS	Bluetooth	2.4GHz Bluetooth	0.23	0.13	0.13	1.55
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	3.51			3.99
	WCDMA	Band IV	3.26			
		Band II	3.50			
	LTE	Band 4	3.43			
		Band 2	3.46			
		Band 7	2.90			
		Band 41/ Band 38	3.22			
NII	WLAN	5GHz WLAN	0.49		3.99	
Date of Testing:			2018/10/8~2018/10/23			
Remark: This device supports both LTE B5/38 and B26/41. Since the supported frequency span for LTE B5/38 falls completely within the supports frequency span for LTE B26/41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B26/41.						

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1962-6
FCC ID	IHDT56XP4
IMEI Code	SIM1: 355579090014097 SIM2: 355579090014105
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	DVT1B
SW Version	PPO29.62
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.
5. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
6. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41.
7. This device hotspot reduced power and P-sensor reduced power level are the same for LTE Band 7/38/41. And for other Bands are differences.
8. P-sensor can detect handheld state, WCDMA band II/IV, LTE band 2/4/7/38/41 for front/back/bottom sides for



front/back/top sides of product specific 10g SAR condition reduced powers will be active.

9. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
10. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
11. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA and LTE modes of WWAN antenna 1. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner are included in the operational description and supplemental data for additional information on section17.

4.2 Specification of Accessory

Accessories Information				
AC Adapter 1 US	Brand Name	Motorola(Salom)	Model Name	SC-51 SA18C30100
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 1 EU	Brand Name	Motorola(Salom)	Model Name	SC-52 SA18C30101
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 1 UK	Brand Name	Motorola(Salom)	Model Name	SC-53 SA18C30102
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 1 AU	Brand Name	Motorola(Salom)	Model Name	SC-55 SA18C30104
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 1 IN	Brand Name	Motorola(Salom)	Model Name	SC-55 SA18C30103
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 1 IN Local Build	Brand Name	Motorola(Flex)	Model Name	SC-54 SA18C35665
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 2 US	Brand Name	Motorola(Chenyang)	Model Name	SC-51 SA18C30116
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 2 EU	Brand Name	Motorola(Chenyang)	Model Name	SC-52 SA18C30117
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 2 UK	Brand Name	Motorola(Chenyang)	Model Name	SC-53 SA18C30118
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 2 AU	Brand Name	Motorola(Chenyang)	Model Name	SC-55 SA18C30120
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
AC Adapter 2 IN Local Build	Brand Name	Motorola(Axiom)	Model Name	SC-54 SA18C35664
	Power Rating	I/P: 100-240 Vac, 600 mA, O/P: 5 Vdc, 3000 mA, 9 Vdc, 2000 mA, 12 Vdc, 1500 mA		
Battery 1	Brand Name	Amperex(motorola)	Model Name	JG30
	Power Rating	3.8 Vdc, 3000 mAh	Type	Li-ion
Earphone 1	Brand Name	Lyand	Model Name	SH38C37773
	Signal Line	1.11 meter, non-shielded cable, with w/o ferrite core		
USB Cable 1	Brand Name	Cabletech	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		
USB Cable 2	Brand Name	Saibao	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		
USB Cable 3	Brand Name	Luxshare	Model Name	SKN6473A
	Signal Line	1 meter, non-shielded cable, with w/o ferrite core		

4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																							
FCC ID	IHDT56XP4																																																																						
Equipment Name	Mobile Cellular Phone																																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz																																																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used	QPSK / 16QAM																																																																						
LTE Voice / Data requirements	Voice and Data																																																																						
LTE Release Version	R10, Cat6																																																																						
CA Support	Not Supported																																																																						
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance	Yes 1. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) 2. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41. 3. P-sensor can detect handheld state, WCDMA band II/IV, LTE band 2/4/7/38/41 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.																																																																						

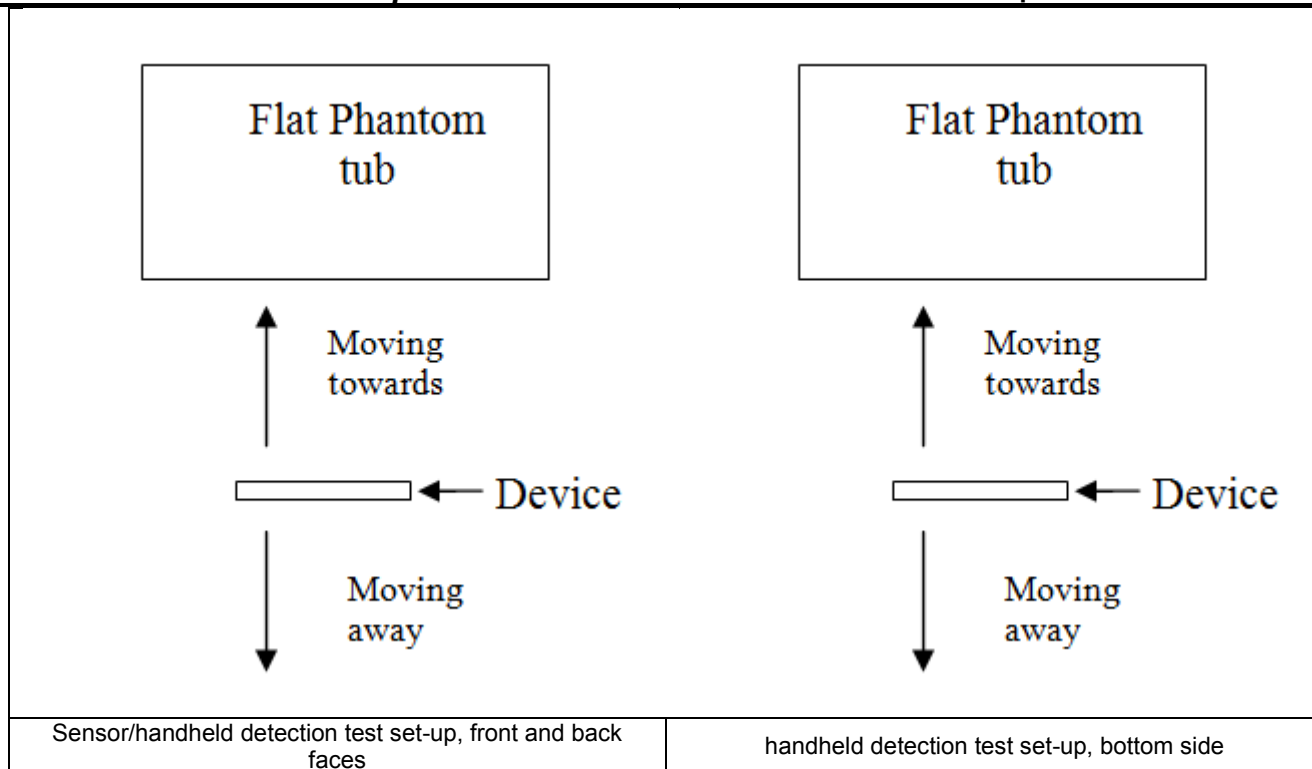


Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26965	841.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545	40140	2545	40140	2545
M	40385	2569.5	40390	2570	40395	2570.5	40400	2571	40400	2571	40400	2571
H	40705	2601.5	40690	2600	40685	2599.5	40670	2598	40670	2598	40670	2598
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645	41140	2645	41140	2645

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (850MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front or back side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. P-sensor can detect handheld state, WCDMA band II/IV, LTE band 2/4/7/38/41 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.




<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	15	17	19


TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GSM1900 GPRS 4Tx slots	24.5	19	5.5
WCDMA Band II	23.5	16.5	7
WCDMA Band IV	23.5	17	6.5
LTE Band2	23.5	16	7.5
LTE Band4	23.5	17	6.5
LTE Band7	23.5	19	4.5
LTE Band38	24.5	21	3.5
LTE Band41	24.5	21	3.5

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	19	19	19	19	19	19	19	19	19
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21

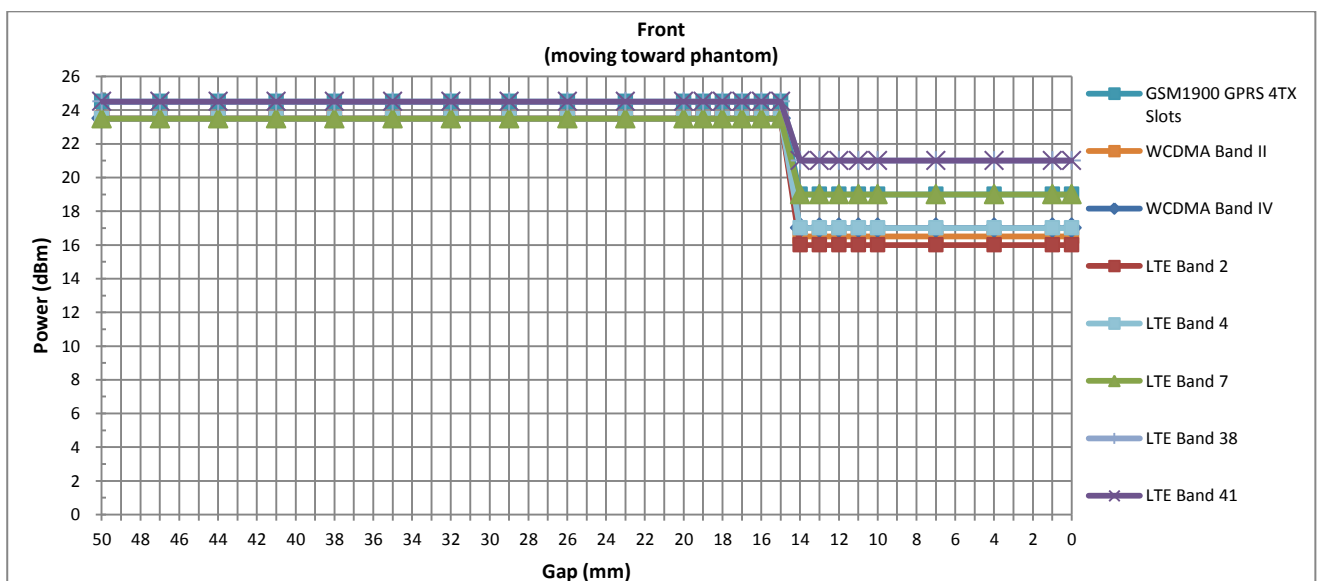





Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	19	19	19	19	19	19	19	19	19	19
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21

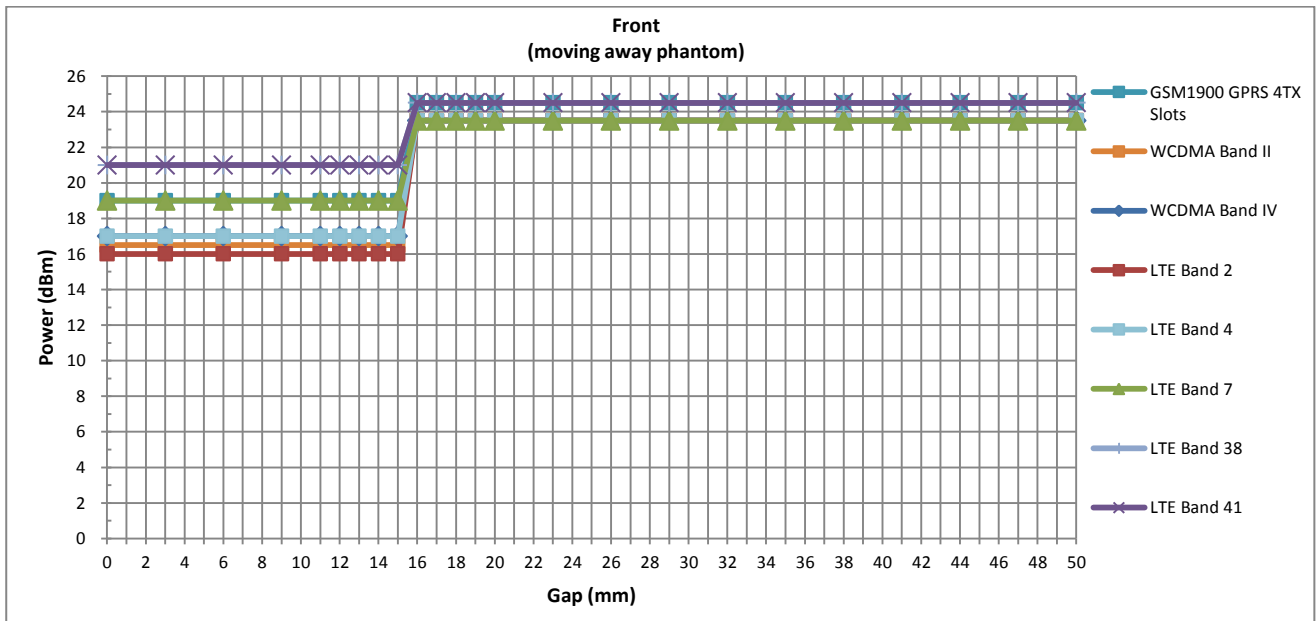

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	19	19	19	19	19	19	19	19	19	19	19	19
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21

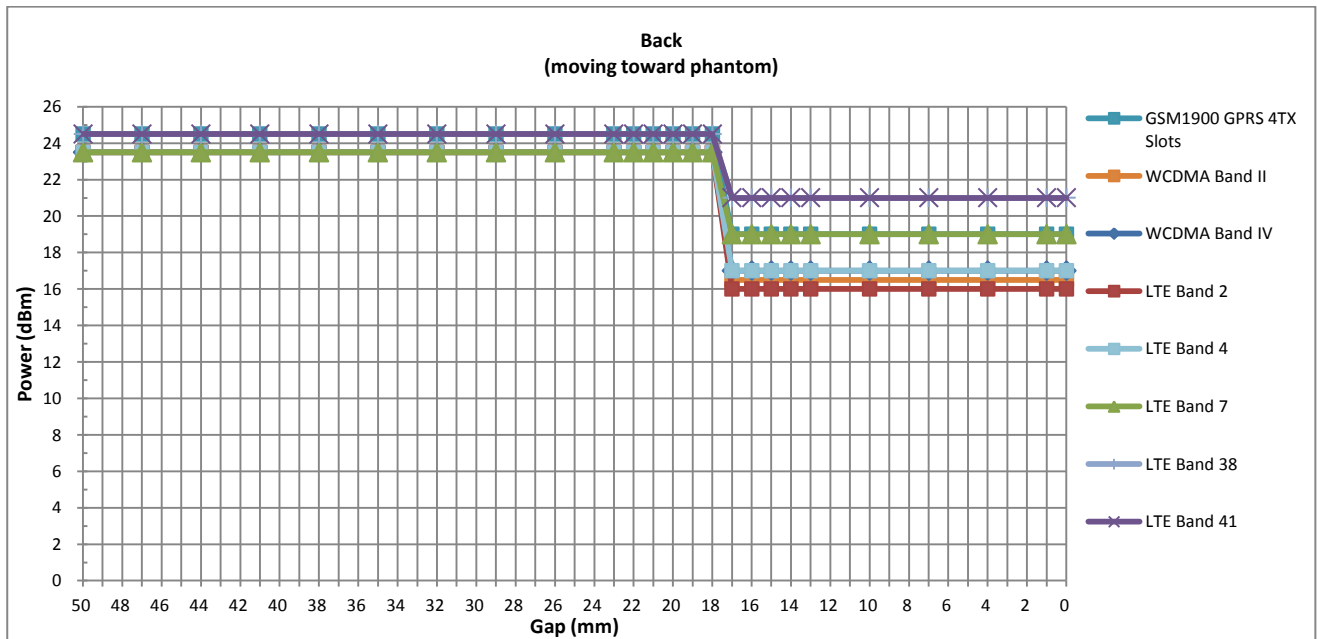

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	19	19	19	19	19	19	19	19	19	19	19	19	19	19
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	16	16	16	16	16	16	16	16	16	16	16	16	16	16
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	17	17	17	17	17	17	17	17	17	17	17	17	17	17
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19	19	19	19	19	19	19	19	19	19	19	19	19	19
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21

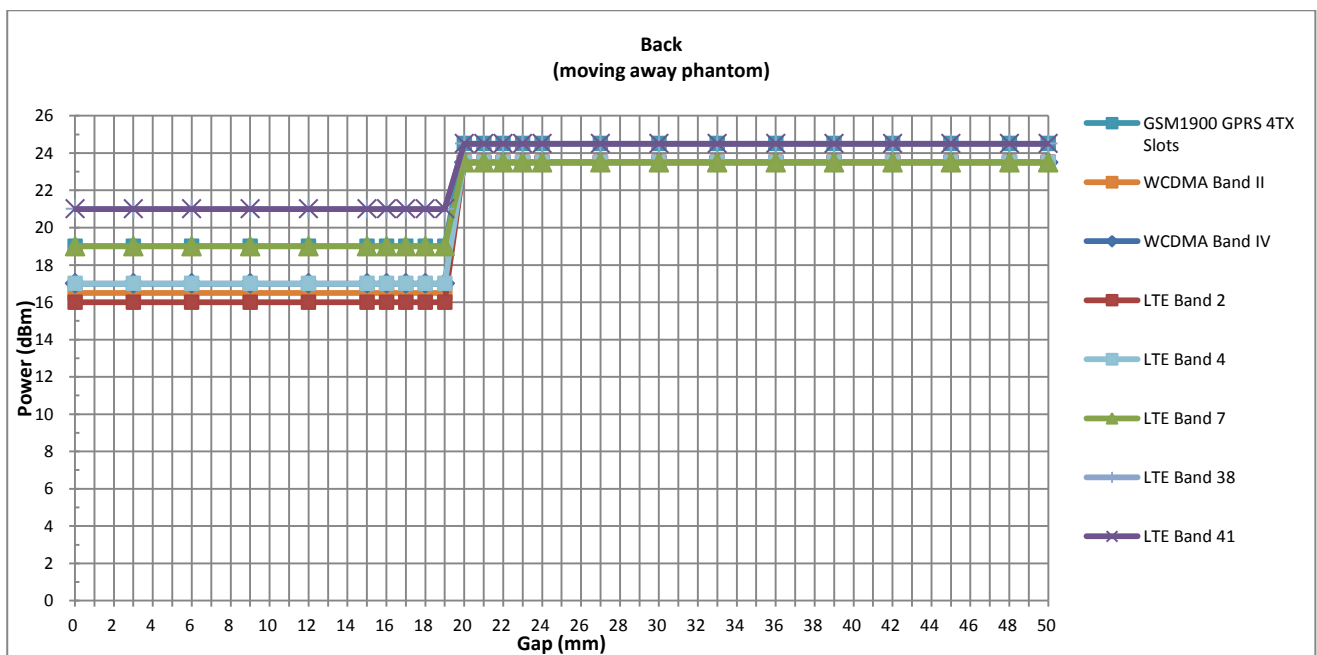


<Handheld>

Handheld Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	15	17	19	21	23

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit (dBm)	
WCDMA Band II	23.5	21	2.5
WCDMA Band IV	23.5	20	3.5
LTE Band2	23.5	20.5	3
LTE Band4	23.5	21	2.5
LTE Band7	23.5	19.5	4
LTE Band38	24.5	23	1.5
LTE Band41	24.5	23	1.5


Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23

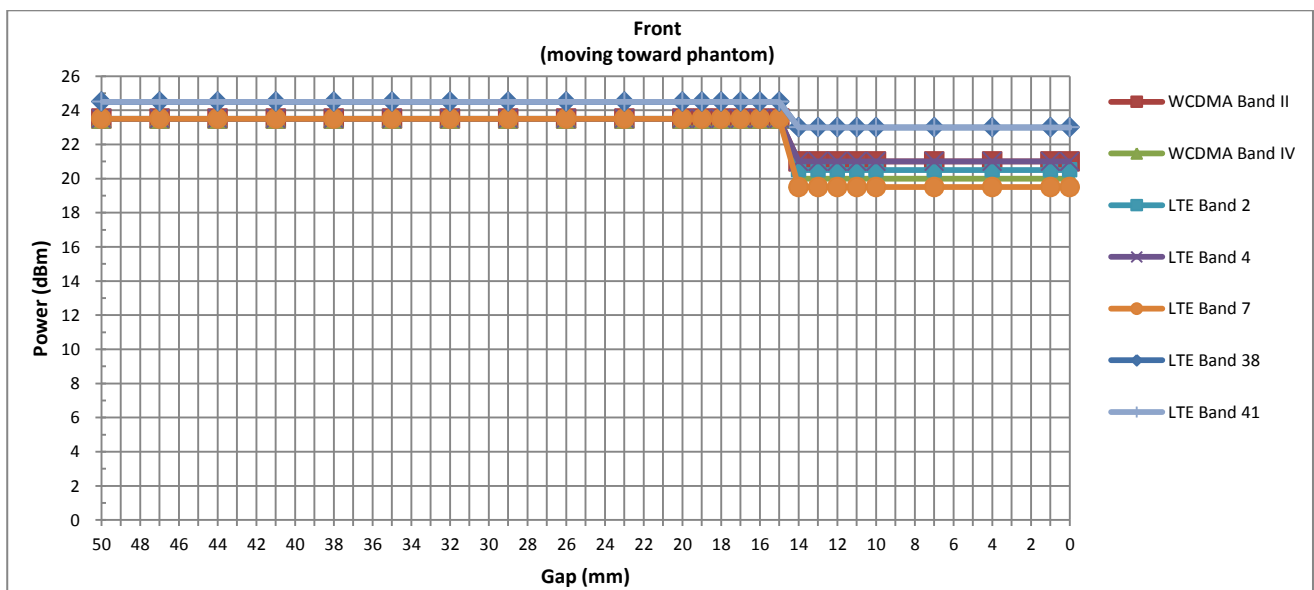



Handheld Triggering Distance (mm) and Triggering Power (dBm)


Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23

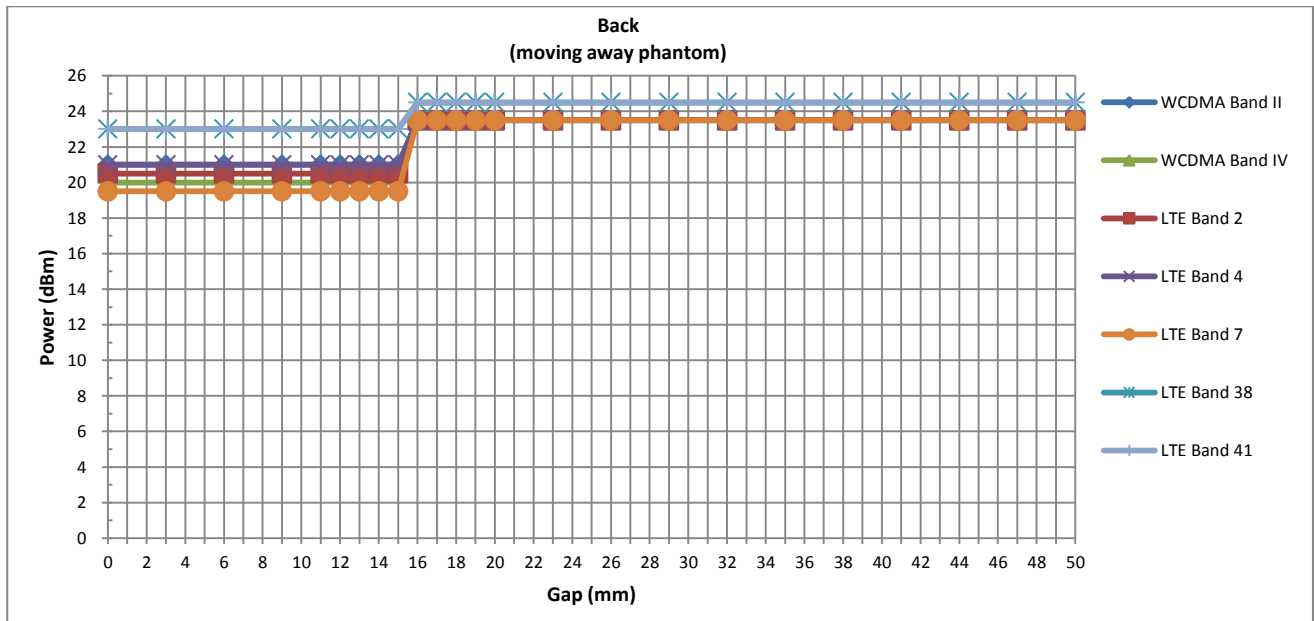



Handheld Triggering Distance (mm) and Triggering Power (dBm)


Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23

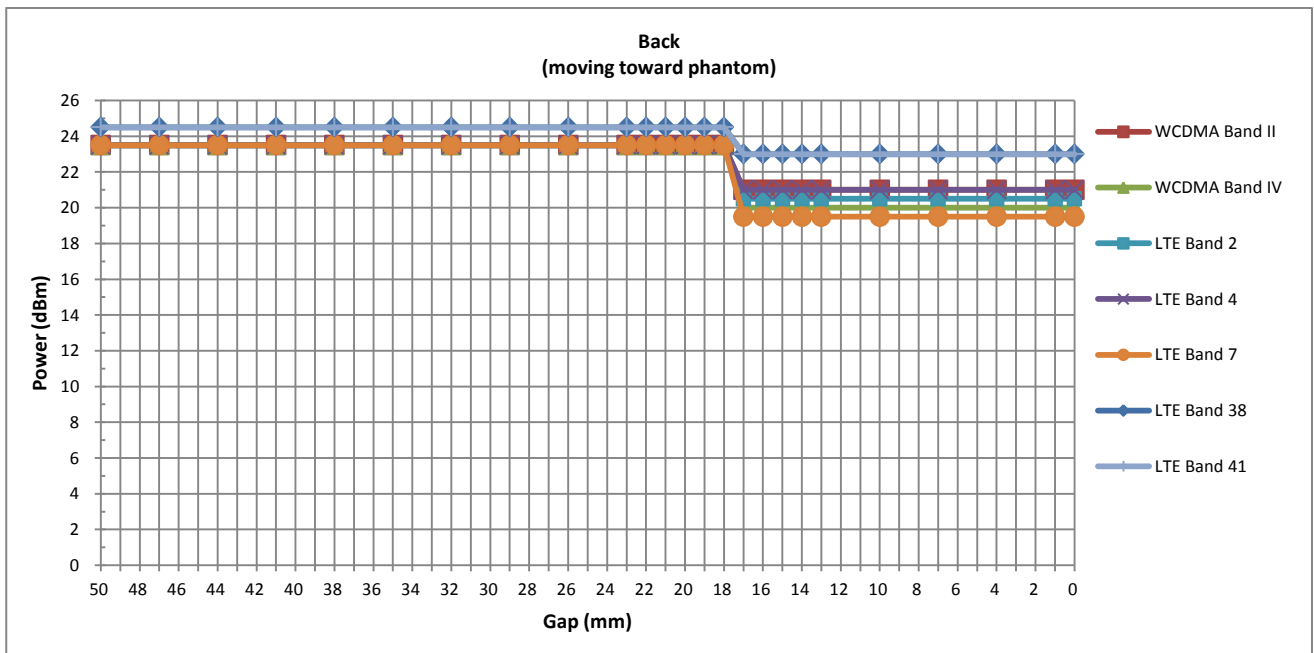




Handheld Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23

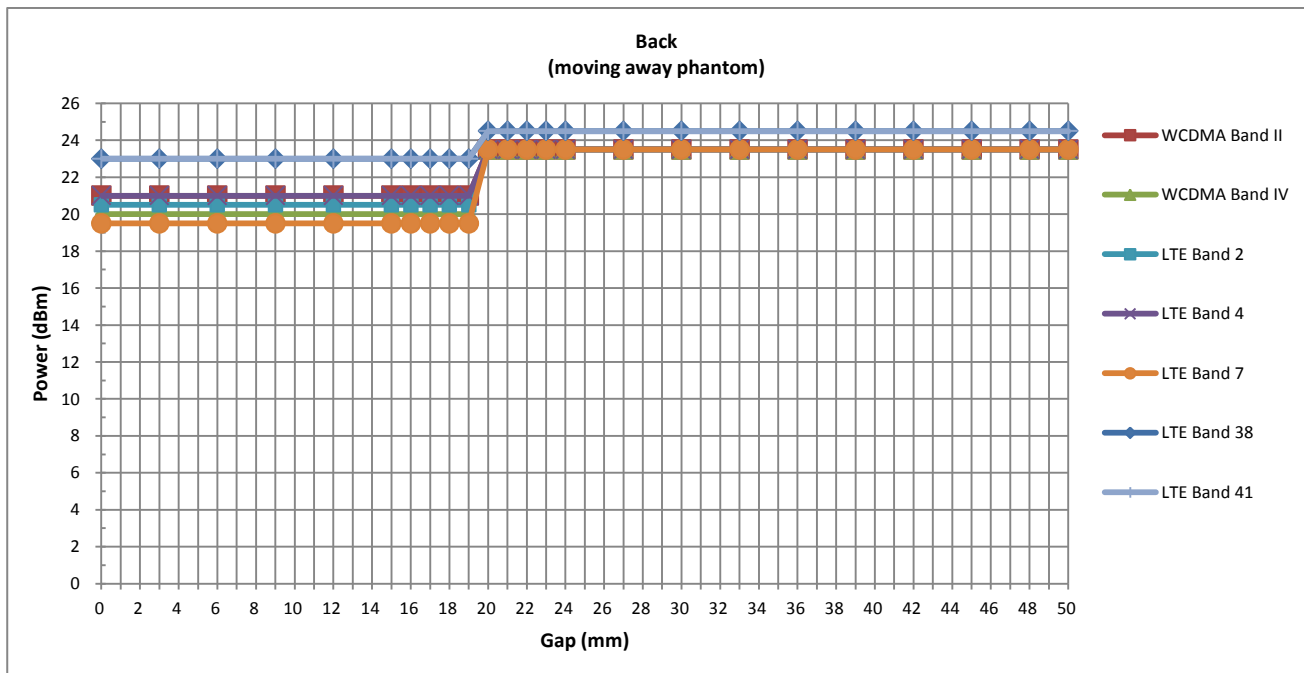

Handheld Triggering Distance (mm) and Triggering Power (dBm)
Bottom Side


Distance	50	47	44	41	38	35	32	29	26	23	21	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23

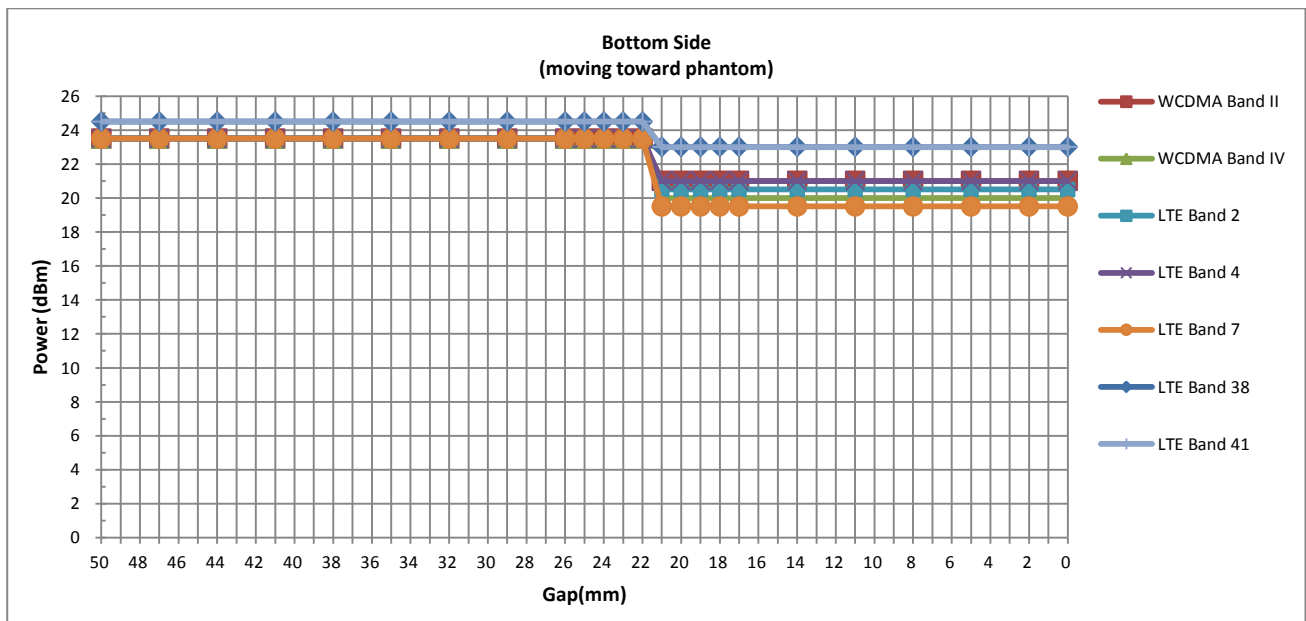



Handheld Triggering Distance (mm) and Triggering Power (dBm)

Bottom Side																									
Distance	50	47	44	41	38	35	32	29	26	23	21	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA Band II	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
LTE Band2	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band4	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
LTE Band7	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band38	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
LTE Band41	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23

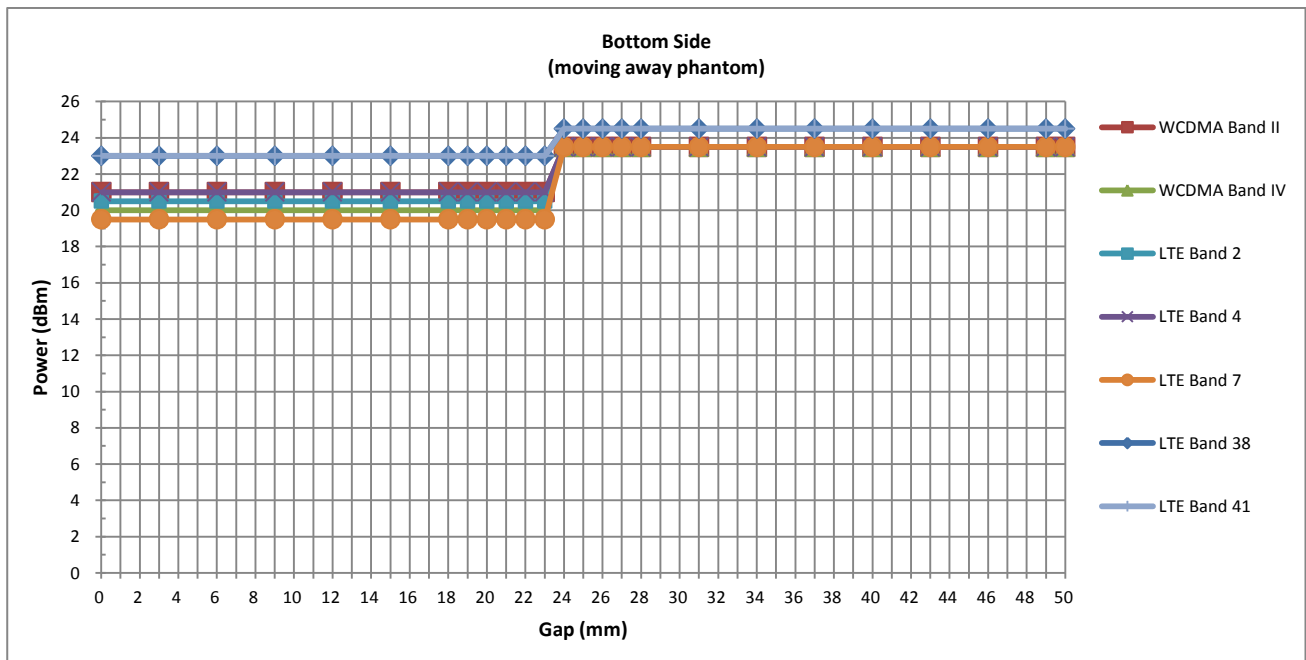

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

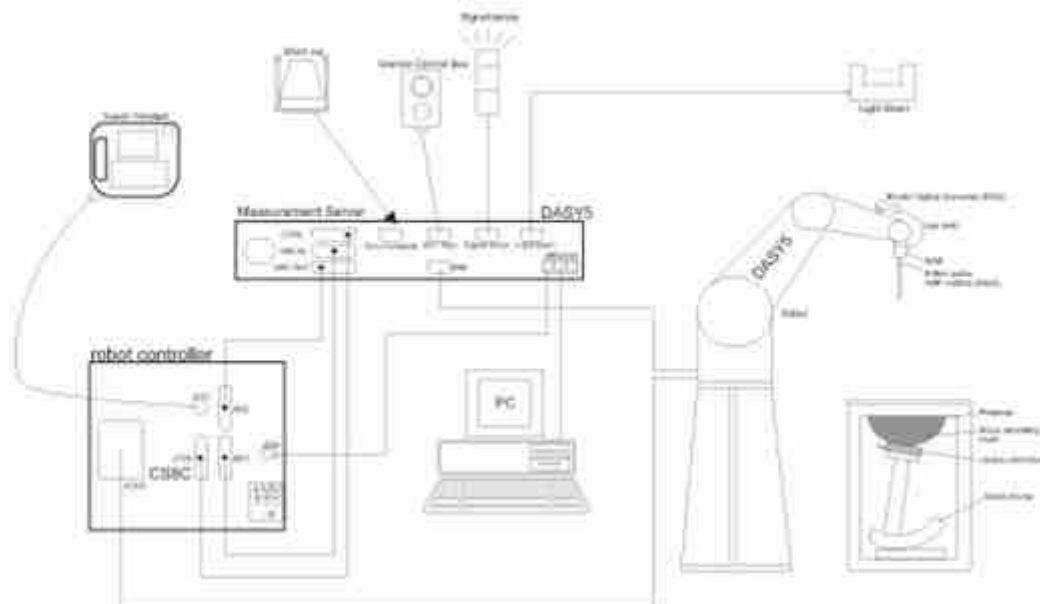The DASY system used for performing compliance tests consists of the following items:




- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.
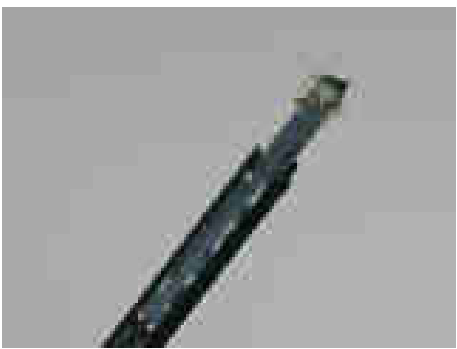
<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

**10. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	2017/12/5	2018/12/4
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2017/12/5	2018/12/4
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2017/12/6	2018/12/5
SPEAG	2450MHz System Validation Kit	D2450V2	840	2017/12/7	2018/12/6
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2017/12/7	2018/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1203	2017/12/14	2018/12/14
SPEAG	Data Acquisition Electronics	DAE4	1305	2018/5/11	2019/5/10
SPEAG	Data Acquisition Electronics	DAE4	1358	2018/4/19	2019/4/18
SPEAG	Data Acquisition Electronics	DAE4	1210	2018/5/28	2019/5/27
SPEAG	Dosimetric E-Field Probe	ES3DV3	3088	2018/7/19	2019/7/18
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2018/1/31	2019/1/30
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2018/9/27	2019/9/26
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563814	2018/1/18	2019/1/17
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	DAK Kit	DAK-3.5	1138	2017/11/28	2018/11/27
Anritsu	Vector Signal Generator	MG3710A	6201682672	2018/2/6	2019/2/5
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101246	2018/1/26	2019/1/25
EXA	Spectrum Analyzer	FSV7	101632	2018/1/26	2019/1/25
Testo	Thermometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	50422	Note	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note	
AR	Amplifier	5S1G4	333096	Note	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.7	0.914	42.773	0.90	41.50	1.56	3.07	±5	2018/10/10
1750	Head	22.7	1.403	41.477	1.37	40.10	2.41	3.43	±5	2018/10/14
1900	Head	22.8	1.464	39.142	1.40	40.00	4.57	-2.14	±5	2018/10/16
2450	Head	22.7	1.864	39.568	1.80	39.20	3.56	0.94	±5	2018/10/22
2600	Head	22.6	2.022	38.375	1.96	39.00	3.16	-1.60	±5	2018/10/15
5250	Head	22.7	4.834	37.112	4.71	35.90	2.63	3.38	±5	2018/10/22
5600	Head	22.7	5.201	36.587	5.07	35.50	2.58	3.06	±5	2018/10/22
5750	Head	22.7	5.362	36.382	5.22	35.40	2.72	2.77	±5	2018/10/22
835	Body	22.8	0.984	56.510	0.97	55.20	1.44	2.37	±5	2018/10/9
1750	Body	22.6	1.491	54.729	1.49	53.40	0.07	2.49	±5	2018/10/17
1900	Body	22.8	1.537	53.469	1.52	53.30	1.12	0.32	±5	2018/10/17
2450	Body	22.6	2.021	53.033	1.95	52.70	3.64	0.63	±5	2018/10/23
2600	Body	22.7	2.231	52.422	2.16	52.50	3.29	-0.15	±5	2018/10/8
5250	Body	22.6	5.506	47.956	5.36	48.90	2.72	-1.93	±5	2018/10/23
5600	Body	22.6	5.954	47.367	5.77	48.50	3.19	-2.34	±5	2018/10/23
5750	Body	22.6	6.154	47.115	5.94	48.30	3.60	-2.45	±5	2018/10/23

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/10/10	835	Head	250	4d091	3954	1210	2.24	9.48	8.972	-5.36
2018/10/14	1750	Head	250	1069	3843	1305	9.06	37.00	36.24	-2.05
2018/10/16	1900	Head	250	5d118	3843	1305	10.50	39.70	42	5.79
2018/10/22	2450	Head	250	840	3843	1305	12.50	52.60	50	-4.94
2018/10/15	2600	Head	250	1061	3088	1305	14.10	58.20	56.4	-3.09
2018/10/22	5250	Head	100	1203	3857	1358	7.87	80.80	78.7	-2.60
2018/10/22	5600	Head	100	1203	3857	1358	8.12	84.10	81.2	-3.45
2018/10/22	5750	Head	100	1203	3857	1358	7.89	80.50	78.9	-1.99
2018/10/9	835	Body	250	4d091	3954	1210	2.53	9.72	10.12	4.12
2018/10/17	1750	Body	250	1069	3843	1305	9.01	38.00	36.04	-5.16
2018/10/17	1900	Body	250	5d118	3843	1305	9.50	40.40	38	-5.94
2018/10/23	2450	Body	250	840	3857	1358	13.90	51.90	55.6	7.13
2018/10/8	2600	Body	250	1061	3843	1305	14.20	56.40	56.8	0.71
2018/10/23	5250	Body	100	1203	3857	1358	7.31	77.50	73.1	-5.68
2018/10/23	5600	Body	100	1203	3857	1358	8.10	79.30	81	2.14
2018/10/23	5750	Body	100	1203	3857	1358	7.23	76.80	72.3	-5.86

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/10/17	1900	Body	250	5d118	3843	1305	5.16	21.10	20.64	-2.18
2018/10/8	2600	Body	250	1061	3843	1305	6.55	25.00	26.2	4.80
2018/10/23	5250	Body	100	1203	3857	1358	2.08	21.50	20.8	-3.26
2018/10/23	5600	Body	100	1203	3857	1358	2.26	22.10	22.6	2.26

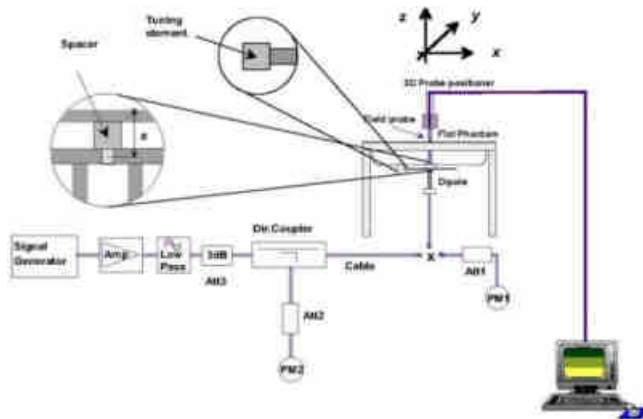

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

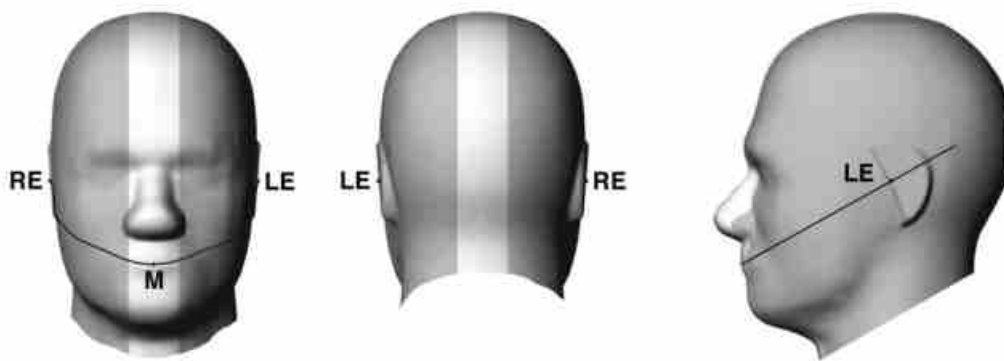


Fig 12.1.1 Front, back, and side views of SAM twin phantom

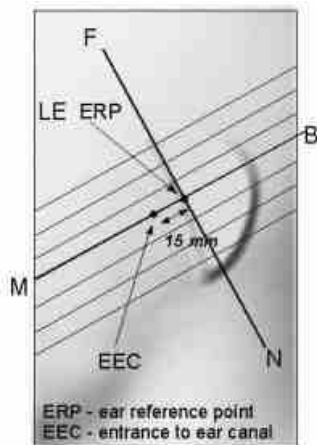


Fig 12.1.2 Close-up side view of phantom showing the ear region.

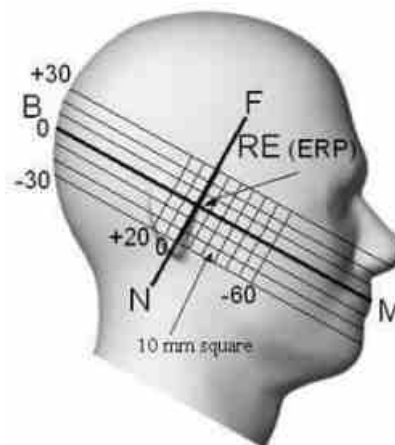


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

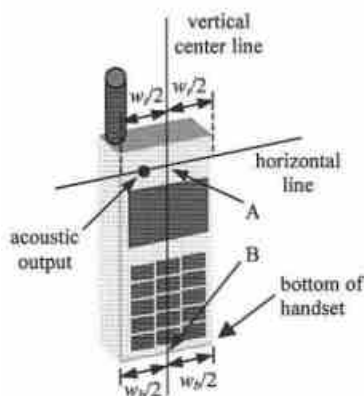


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

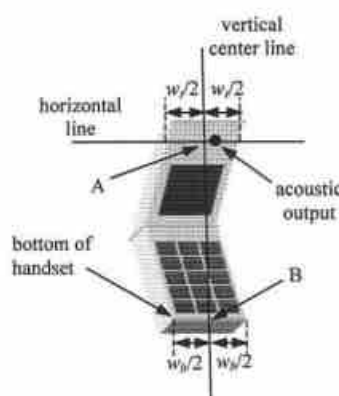


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”






Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point



Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters) only the accessory that dictates the closest spacing to the body is tested.

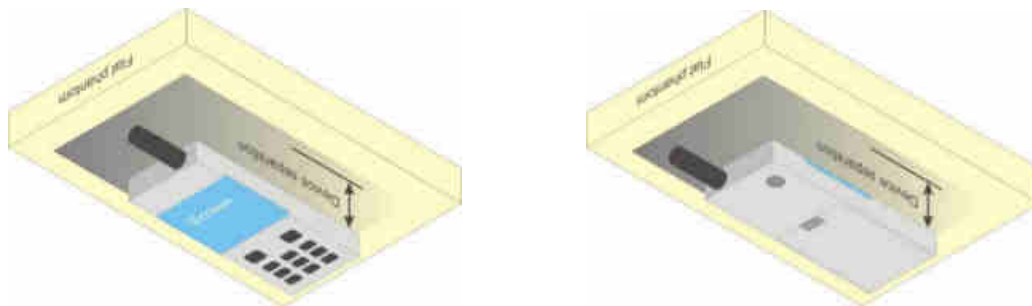


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
4. Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM850/1900 band, and p-sensor detects handheld state for product specific 10g SAR condition is implemented in GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

<Full Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.86	32.96	33.00	33.50	23.86	23.96	24.00	24.50
GPRS 1 Tx slot	32.85	32.95	32.98	33.50	23.85	23.95	23.98	24.50
GPRS 2 Tx slots	30.10	29.89	29.92	30.50	24.10	23.89	23.92	24.50
GPRS 3 Tx slots	28.05	27.60	27.93	28.50	23.79	23.34	23.67	24.24
GPRS 4 Tx slots	26.67	26.45	26.51	27.50	23.67	23.45	23.51	24.50
EDGE 1 Tx slot	26.54	26.50	26.75	27.50	17.54	17.50	17.75	18.50
EDGE 2 Tx slots	26.34	26.30	26.45	27.50	20.34	20.30	20.45	21.50
EDGE 3 Tx slots	25.68	25.48	25.68	26.50	21.42	21.22	21.42	22.24
EDGE 4 Tx slots	24.17	24.07	24.18	25.00	21.17	21.07	21.18	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.55	29.35	29.35	30.50	20.55	20.35	20.35	21.50
GPRS 1 Tx slot	29.54	29.34	29.33	30.50	20.54	20.34	20.33	21.50
GPRS 2 Tx slots	26.78	26.59	26.67	27.50	20.78	20.59	20.67	21.50
GPRS 3 Tx slots	24.91	24.87	24.85	25.50	20.65	20.61	20.59	21.24
GPRS 4 Tx slots	23.58	23.50	23.42	24.50	20.58	20.50	20.42	21.50
EDGE 1 Tx slot	25.66	25.86	25.79	27.00	16.66	16.86	16.79	18.00
EDGE 2 Tx slots	25.45	25.61	25.64	27.00	19.45	19.61	19.64	21.00
EDGE 3 Tx slots	24.00	24.24	24.25	25.00	19.74	19.98	19.99	20.74
EDGE 4 Tx slots	22.39	22.49	22.72	23.50	19.39	19.49	19.72	20.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor On >

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	24.57	24.62	24.65	25.00	15.57	15.62	15.65	16.00
GPRS 1 Tx slot	24.58	24.65	24.67	25.00	15.58	15.65	15.67	16.00
GPRS 2 Tx slots	21.34	21.44	21.40	22.00	15.34	15.44	15.40	16.00
GPRS 3 Tx slots	19.67	19.63	19.57	20.00	15.41	15.37	15.31	15.74
GPRS 4 Tx slots	18.15	18.05	18.05	19.00	15.15	15.05	15.05	16.00
EDGE 1 Tx slot	21.34	21.32	21.31	21.50	12.34	12.32	12.31	12.50
EDGE 2 Tx slots	21.12	21.10	21.18	21.50	15.12	15.10	15.18	15.50
EDGE 3 Tx slots	19.06	19.09	19.14	19.50	14.80	14.83	14.88	15.24
EDGE 4 Tx slots	17.81	17.80	17.76	18.00	14.81	14.80	14.76	15.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Hotspot On >

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	23.14	23.12	23.12	24.00	14.14	14.12	14.12	15.00
GPRS 1 Tx slot	23.12	23.10	23.10	24.00	14.12	14.10	14.10	15.00
GPRS 2 Tx slots	20.05	20.10	20.06	21.00	14.05	14.10	14.06	15.00
GPRS 3 Tx slots	17.91	17.92	18.00	19.00	13.65	13.66	13.74	14.74
GPRS 4 Tx slots	16.66	16.65	16.63	18.00	13.66	13.65	13.63	15.00
EDGE 1 Tx slot	19.79	19.72	19.73	20.50	10.79	10.72	10.73	11.50
EDGE 2 Tx slots	19.64	19.70	19.58	20.50	13.64	13.70	13.58	14.50
EDGE 3 Tx slots	17.81	17.75	17.78	18.50	13.55	13.49	13.52	14.24
EDGE 4 Tx slots	16.94	16.90	16.98	17.00	13.94	13.90	13.98	14.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{DC}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -25 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - Select HSDPA Uplink Parameters
 - Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Subtest 1: $\beta_c/\beta_d=2/15$
 - Subtest 2: $\beta_c/\beta_d=12/15$
 - Subtest 3: $\beta_c/\beta_d=15/8$
 - Subtest 4: $\beta_c/\beta_d=15/4$
 - Set Delta ACK, Delta NACK and Delta CQI = 8
 - Set Ack-Nack Repetition Factor to 3
 - Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2
 - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTIs	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{inf})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

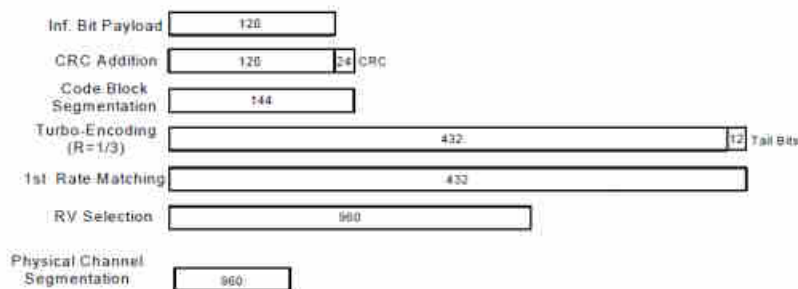


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Full Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.88	22.76	22.98	23.50	22.98	23.04	23.06	23.50	23.38	23.36	23.33	23.50
3GPP Rel 99	RMC 12.2Kbps	22.89	22.78	22.99	23.50	22.99	23.06	23.08	23.50	23.40	23.37	23.34	23.50
3GPP Rel 6	HSDPA Subtest-1	22.73	22.76	22.71	23.00	22.31	22.19	22.18	23.00	22.42	22.31	22.27	23.00
3GPP Rel 6	HSDPA Subtest-2	22.70	22.64	22.66	23.00	22.29	22.19	22.11	23.00	22.45	22.29	22.26	23.00
3GPP Rel 6	HSDPA Subtest-3	22.25	22.17	22.18	22.50	21.85	21.67	21.68	22.50	21.97	21.79	21.76	22.50
3GPP Rel 6	HSDPA Subtest-4	22.21	22.15	22.21	22.50	21.84	21.67	21.71	22.50	21.98	21.80	21.74	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.68	22.71	22.72	23.00	22.28	22.21	22.23	23.00	22.38	22.28	22.35	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.63	22.75	22.64	23.00	22.19	22.08	22.05	23.00	22.42	22.31	22.28	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.18	22.15	22.08	22.50	22.01	21.62	21.84	22.50	21.98	21.79	21.79	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.19	22.08	22.06	22.50	22.25	21.71	21.81	22.50	21.96	21.81	21.80	22.50
3GPP Rel 6	HSUPA Subtest-1	22.19	22.16	22.14	23.00	21.64	21.71	21.64	23.00	21.96	21.80	21.77	23.00
3GPP Rel 6	HSUPA Subtest-2	20.81	20.62	20.64	21.50	20.44	20.16	20.14	21.50	20.47	20.28	20.26	21.50
3GPP Rel 6	HSUPA Subtest-3	21.72	21.62	21.46	22.50	21.44	21.12	21.07	22.50	21.48	21.31	21.24	22.50
3GPP Rel 6	HSUPA Subtest-4	20.72	20.65	20.49	21.50	19.94	20.15	19.99	21.50	20.47	20.29	20.19	21.50
3GPP Rel 6	HSUPA Subtest-5	22.79	22.61	22.61	23.50	22.19	22.01	22.11	23.50	22.49	22.41	22.41	23.50



<Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	16.04	16.03	16.21	16.50	16.53	16.51	16.60	17.00
3GPP Rel 99	RMC 12.2Kbps	16.06	16.04	16.23	16.50	16.54	16.53	16.62	17.00
3GPP Rel 6	HSDPA Subtest-1	15.90	16.09	15.93	16.50	16.26	16.28	16.26	17.00
3GPP Rel 6	HSDPA Subtest-2	15.94	16.13	15.94	16.50	16.25	16.22	16.24	17.00
3GPP Rel 6	HSDPA Subtest-3	15.44	15.57	15.45	16.00	15.74	15.77	15.77	16.50
3GPP Rel 6	HSDPA Subtest-4	15.42	15.62	15.44	16.00	15.79	15.75	15.77	16.50
3GPP Rel 8	DC-HSDPA Subtest-1	15.91	15.89	15.81	16.50	16.26	16.21	16.28	17.00
3GPP Rel 8	DC-HSDPA Subtest-2	15.98	15.91	15.96	16.50	16.18	16.32	16.21	17.00
3GPP Rel 8	DC-HSDPA Subtest-3	15.48	15.32	15.28	16.00	15.71	15.81	15.78	16.50
3GPP Rel 8	DC-HSDPA Subtest-4	15.31	15.28	15.43	16.00	15.76	15.70	15.81	16.50
3GPP Rel 6	HSUPA Subtest-1	15.90	15.98	15.90	16.50	16.23	16.27	16.23	17.00
3GPP Rel 6	HSUPA Subtest-2	13.89	13.99	13.97	14.50	14.22	14.25	14.37	15.00
3GPP Rel 6	HSUPA Subtest-3	14.96	15.00	14.88	15.50	15.24	15.22	15.27	16.00
3GPP Rel 6	HSUPA Subtest-4	13.88	13.95	13.91	14.50	14.23	14.24	14.25	15.00
3GPP Rel 6	HSUPA Subtest-5	16.00	16.10	15.90	16.50	16.20	16.20	16.30	17.00

<Reduced Power Mode for Hotspot On >

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	14.61	14.62	14.68	15.00	15.52	15.56	15.58	16.00
3GPP Rel 99	RMC 12.2Kbps	14.63	14.63	14.71	15.00	15.53	15.57	15.59	16.00
3GPP Rel 6	HSDPA Subtest-1	14.22	14.36	14.49	15.00	15.28	15.42	15.46	16.00
3GPP Rel 6	HSDPA Subtest-2	14.28	14.39	14.46	15.00	15.35	15.37	15.51	16.00
3GPP Rel 6	HSDPA Subtest-3	13.80	13.86	14.02	14.50	14.80	14.91	15.00	15.50
3GPP Rel 6	HSDPA Subtest-4	13.77	13.86	14.03	14.50	14.51	14.89	15.01	15.50
3GPP Rel 8	DC-HSDPA Subtest-1	14.28	14.31	14.42	15.00	15.21	15.28	15.31	16.00
3GPP Rel 8	DC-HSDPA Subtest-2	14.25	14.31	14.28	15.00	15.28	15.21	15.28	16.00
3GPP Rel 8	DC-HSDPA Subtest-3	13.98	13.78	13.91	14.50	14.85	14.81	14.91	15.50
3GPP Rel 8	DC-HSDPA Subtest-4	13.81	13.91	13.87	14.50	14.81	14.78	14.86	15.50
3GPP Rel 6	HSUPA Subtest-1	14.21	14.37	14.48	15.00	15.30	15.40	15.47	16.00
3GPP Rel 6	HSUPA Subtest-2	12.23	12.43	12.44	13.00	13.34	13.38	13.42	14.00
3GPP Rel 6	HSUPA Subtest-3	13.21	13.36	13.47	14.00	14.32	14.40	14.44	15.00
3GPP Rel 6	HSUPA Subtest-4	12.24	12.29	12.49	13.00	13.30	13.40	13.43	14.00
3GPP Rel 6	HSUPA Subtest-5	14.20	14.40	14.50	15.00	15.30	15.30	15.50	16.00

**<Reduced Power Mode for Handheld>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	19.58	19.50	19.71	21.00	19.50	19.48	19.60	20.00
3GPP Rel 99	RMC 12.2Kbps	19.59	19.53	19.74	21.00	19.52	19.49	19.61	20.00
3GPP Rel 6	HSDPA Subtest-1	19.54	19.50	19.59	21.00	19.56	19.38	19.34	20.00
3GPP Rel 6	HSDPA Subtest-2	19.58	19.54	19.32	21.00	19.56	19.40	19.30	20.00
3GPP Rel 6	HSDPA Subtest-3	19.06	19.02	19.10	20.50	19.04	18.90	18.82	19.50
3GPP Rel 6	HSDPA Subtest-4	19.08	19.04	19.12	20.50	19.06	18.88	18.81	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.41	19.35	19.41	21.00	19.41	19.35	19.51	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.48	19.48	19.35	21.00	19.48	19.32	19.48	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	19.01	19.06	19.12	20.50	19.01	18.89	18.98	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.25	19.08	19.01	20.50	19.05	18.91	19.01	19.50
3GPP Rel 6	HSUPA Subtest-1	19.54	19.46	19.60	21.00	19.51	19.39	19.26	20.00
3GPP Rel 6	HSUPA Subtest-2	17.55	17.46	17.54	19.00	17.53	17.36	17.30	18.00
3GPP Rel 6	HSUPA Subtest-3	18.53	18.44	18.59	20.00	18.50	18.34	18.22	19.00
3GPP Rel 6	HSUPA Subtest-4	17.60	17.45	17.59	19.00	17.52	17.34	17.27	18.00
3GPP Rel 6	HSUPA Subtest-5	19.60	19.50	19.60	21.00	19.50	19.40	19.30	20.00

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 / 38 SAR test was covered by Band 26 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.58	22.36	22.29	23.5	0
20	QPSK	1	49	22.33	22.26	22.42		
20	QPSK	1	99	22.40	22.37	22.26		
20	QPSK	50	0	22.21	21.98	21.86	23	0.5
20	QPSK	50	24	21.92	21.87	21.82		
20	QPSK	50	50	21.87	21.86	21.86		
20	QPSK	100	0	21.99	21.86	21.95		
20	16QAM	1	0	22.25	22.35	22.32	23	0.5
20	16QAM	1	49	22.05	22.07	22.17		
20	16QAM	1	99	22.23	22.11	21.96		
20	16QAM	50	0	21.03	20.96	20.89	22	1.5
20	16QAM	50	24	20.94	20.89	20.79		
20	16QAM	50	50	20.93	20.88	20.87		
20	16QAM	100	0	21.01	20.94	20.89		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.47	22.38	22.41	23.5	0
15	QPSK	1	37	22.13	22.05	22.04		
15	QPSK	1	74	22.34	22.31	22.23		
15	QPSK	36	0	22.17	22.04	22.03	23	0.5
15	QPSK	36	20	21.84	21.78	21.73		
15	QPSK	36	39	21.78	21.76	21.66		
15	QPSK	75	0	21.97	21.90	21.89		
15	16QAM	1	0	22.21	22.27	22.14	23	0.5
15	16QAM	1	37	21.91	22.01	21.89		
15	16QAM	1	74	22.16	22.07	22.08		
15	16QAM	36	0	21.18	21.08	21.01	22	1.5
15	16QAM	36	20	20.83	20.78	20.76		
15	16QAM	36	39	20.74	20.74	20.64		
15	16QAM	75	0	20.97	20.90	20.91		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.36	22.37	22.21	23.5	0
10	QPSK	1	25	22.41	22.37	22.22		
10	QPSK	1	49	22.26	22.41	22.26		
10	QPSK	25	0	22.05	22.01	21.93	23	0.5
10	QPSK	25	12	22.08	21.96	21.94		
10	QPSK	25	25	21.86	21.78	21.77		
10	QPSK	50	0	21.94	21.86	21.82	23	0.5
10	16QAM	1	0	22.09	22.13	22.12		
10	16QAM	1	25	22.17	22.12	22.09		
10	16QAM	1	49	21.77	21.67	21.65	22	1.5
10	16QAM	25	0	21.04	20.96	20.92		
10	16QAM	25	12	21.08	20.96	20.90		
10	16QAM	25	25	20.92	20.79	20.73	22	1.5
10	16QAM	50	0	21.00	20.90	20.81		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.27	22.24	22.28	23.5	0
5	QPSK	1	12	22.39	22.33	22.26		
5	QPSK	1	24	22.42	22.30	22.26		
5	QPSK	12	0	22.07	22.00	21.95	23	0.5
5	QPSK	12	7	22.02	21.90	21.88		
5	QPSK	12	13	22.00	21.83	21.87		
5	QPSK	25	0	22.05	21.92	21.87	23	0.5
5	16QAM	1	0	22.28	22.26	22.21		
5	16QAM	1	12	22.15	22.09	22.03		
5	16QAM	1	24	22.20	22.09	22.02	22	1.5
5	16QAM	12	0	21.04	21.03	20.94		
5	16QAM	12	7	21.06	20.99	20.95		
5	16QAM	12	13	21.03	20.90	20.88	22	1.5
5	16QAM	25	0	20.99	20.89	20.87		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.41	22.36	22.24	23.5	0
3	QPSK	1	8	22.44	22.30	22.30		
3	QPSK	1	14	22.40	22.31	22.24		
3	QPSK	8	0	22.05	21.94	21.88	23	0.5
3	QPSK	8	4	22.02	21.90	21.89		
3	QPSK	8	7	21.99	21.85	21.86		
3	QPSK	15	0	21.97	21.91	21.84	23	0.5
3	16QAM	1	0	22.33	22.16	22.13		
3	16QAM	1	8	22.30	22.11	22.11		
3	16QAM	1	14	22.24	22.10	22.10	22	1.5
3	16QAM	8	0	21.05	20.99	20.95		
3	16QAM	8	4	21.07	21.02	20.94		
3	16QAM	8	7	21.05	20.89	20.91	22	1.5
3	16QAM	15	0	21.07	20.96	20.87		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.37	22.35	22.35	23.5	0
1.4	QPSK	1	3	22.41	22.25	22.35		
1.4	QPSK	1	5	22.34	22.27	22.23		
1.4	QPSK	3	0	22.47	22.21	22.30		
1.4	QPSK	3	1	22.37	22.24	22.28		
1.4	QPSK	3	3	22.35	22.21	22.24	23	0.5
1.4	QPSK	6	0	21.92	21.81	21.86		
1.4	16QAM	1	0	22.23	21.98	22.12	23	0.5
1.4	16QAM	1	3	22.23	22.01	22.11		
1.4	16QAM	1	5	22.17	21.95	22.04		
1.4	16QAM	3	0	21.89	21.76	21.81		
1.4	16QAM	3	1	21.92	21.80	21.84		
1.4	16QAM	3	3	21.86	21.75	21.83	22	1.5
1.4	16QAM	6	0	21.10	20.87	20.91		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.85	22.90	22.84		
20	QPSK	1	49	22.68	22.56	22.67	23.5	0
20	QPSK	1	99	22.56	22.69	22.91		
20	QPSK	50	0	22.02	21.69	21.85		
20	QPSK	50	24	21.87	21.64	21.96	23	0.5
20	QPSK	50	50	21.73	21.67	22.06		
20	QPSK	100	0	21.87	21.81	22.07		
20	16QAM	1	0	22.38	22.05	21.97	23	0.5
20	16QAM	1	49	22.06	21.77	22.22		
20	16QAM	1	99	21.89	22.06	22.62		
20	16QAM	50	0	20.99	20.69	20.85	22	1.5
20	16QAM	50	24	20.85	20.69	20.98		
20	16QAM	50	50	20.75	20.72	21.07		
20	16QAM	100	0	20.91	20.72	20.90		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.75	22.32	22.41	23.5	0
15	QPSK	1	37	22.62	22.34	22.70		
15	QPSK	1	74	22.53	22.59	22.75		
15	QPSK	36	0	22.54	22.14	22.35	23	0.5
15	QPSK	36	20	22.15	21.86	22.22		
15	QPSK	36	39	21.97	21.83	22.25		
15	QPSK	75	0	22.23	21.98	22.25	23	0.5
15	16QAM	1	0	22.23	22.81	22.78		
15	16QAM	1	37	22.14	22.13	22.23		
15	16QAM	1	74	22.30	22.34	22.88	22	1.5
15	16QAM	36	0	21.47	21.28	21.36		
15	16QAM	36	20	21.14	20.85	21.18		
15	16QAM	36	39	20.93	20.81	21.28		
15	16QAM	75	0	21.21	20.98	21.32		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.67	22.24	22.33	23.5	0
10	QPSK	1	25	22.54	22.26	22.62		
10	QPSK	1	49	22.45	22.51	22.67		
10	QPSK	25	0	22.46	22.06	22.27	23	0.5
10	QPSK	25	12	22.07	21.78	22.14		
10	QPSK	25	25	21.89	21.75	22.17		
10	QPSK	50	0	22.15	21.90	22.17	23	0.5
10	16QAM	1	0	22.15	22.73	22.70		
10	16QAM	1	25	22.06	22.05	22.15		
10	16QAM	1	49	22.22	22.26	22.80	22	1.5
10	16QAM	25	0	21.39	21.10	21.28		
10	16QAM	25	12	21.06	20.77	21.10		
10	16QAM	25	25	20.85	20.73	21.20	22	1.5
10	16QAM	50	0	21.13	20.90	21.24		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.51	22.61	22.44	23.5	0
5	QPSK	1	12	22.60	22.25	22.83		
5	QPSK	1	24	22.56	22.34	22.82		
5	QPSK	12	0	22.23	21.78	22.41	23	0.5
5	QPSK	12	7	22.15	21.79	22.43		
5	QPSK	12	13	22.06	21.83	22.39		
5	QPSK	25	0	22.17	21.81	22.44	23	0.5
5	16QAM	1	0	22.61	22.15	22.68		
5	16QAM	1	12	22.24	21.91	22.53		
5	16QAM	1	24	22.27	22.08	22.82	22	1.5
5	16QAM	12	0	21.25	20.80	21.44		
5	16QAM	12	7	21.20	20.80	21.41		
5	16QAM	12	13	21.14	20.82	21.46	22	1.5
5	16QAM	25	0	21.14	20.81	21.42		



FCC SAR Test Report

Report No. : FA891009-03

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.59	22.16	22.25	23.5	0
3	QPSK	1	8	22.46	22.18	22.54		
3	QPSK	1	14	22.37	22.43	22.59		
3	QPSK	8	0	22.38	21.98	22.19	23	0.5
3	QPSK	8	4	21.99	21.70	22.06		
3	QPSK	8	7	21.81	21.67	22.09		
3	QPSK	15	0	22.07	21.82	22.09		
3	16QAM	1	0	22.07	22.65	22.62	23	0.5
3	16QAM	1	8	21.98	21.97	22.07		
3	16QAM	1	14	22.14	22.18	22.72		
3	16QAM	8	0	21.31	21.02	21.20	22	1.5
3	16QAM	8	4	20.98	20.69	21.02		
3	16QAM	8	7	20.77	20.65	21.12		
3	16QAM	15	0	21.05	20.82	21.16		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.66	22.19	22.15	23.5	0
1.4	QPSK	1	3	22.79	22.36	22.87		
1.4	QPSK	1	5	22.56	22.21	22.86		
1.4	QPSK	3	0	22.63	22.24	22.45		
1.4	QPSK	3	1	22.64	22.28	22.69		
1.4	QPSK	3	3	22.65	22.28	22.70		
1.4	QPSK	6	0	22.14	21.75	22.41	23	0.5
1.4	16QAM	1	0	22.44	22.05	22.69	23	0.5
1.4	16QAM	1	3	22.46	22.14	22.72		
1.4	16QAM	1	5	22.37	22.06	22.69		
1.4	16QAM	3	0	22.17	21.77	22.45		
1.4	16QAM	3	1	22.18	21.79	22.48		
1.4	16QAM	3	3	22.19	21.78	22.48		
1.4	16QAM	6	0	21.17	20.81	21.47	22	1.5



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.99	22.87	23.09	23.5	0
10	QPSK	1	25	23.20	23.11	22.92		
10	QPSK	1	49	22.68	22.61	22.64		
10	QPSK	25	0	22.06	22.03	21.86	23	0.5
10	QPSK	25	12	22.17	22.10	21.98		
10	QPSK	25	25	22.02	21.98	21.86		
10	QPSK	50	0	22.08	21.97	21.89	23	0.5
10	16QAM	1	0	22.01	21.88	21.91		
10	16QAM	1	25	22.29	22.27	22.13		
10	16QAM	1	49	21.93	21.72	21.62	22	1.5
10	16QAM	25	0	21.07	21.01	20.83		
10	16QAM	25	12	21.14	21.13	20.95		
10	16QAM	25	25	21.02	20.96	20.85	22	1.5
10	16QAM	50	0	21.04	21.00	20.84		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.70	22.69	22.94	23.5	0
5	QPSK	1	12	23.13	23.06	22.86		
5	QPSK	1	24	23.12	23.06	22.89		
5	QPSK	12	0	22.22	22.14	21.96	23	0.5
5	QPSK	12	7	22.20	22.15	21.95		
5	QPSK	12	13	22.17	22.11	21.93		
5	QPSK	25	0	22.22	22.14	21.96	23	0.5
5	16QAM	1	0	22.44	22.39	22.17		
5	16QAM	1	12	22.23	22.24	22.01		
5	16QAM	1	24	22.34	22.31	22.11	22	1.5
5	16QAM	12	0	21.20	21.21	21.02		
5	16QAM	12	7	21.19	21.16	21.02		
5	16QAM	12	13	21.20	21.15	21.00	22	1.5
5	16QAM	25	0	21.16	21.11	21.00		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.77	22.80	22.80	23.5	0
3	QPSK	1	8	23.16	23.07	22.93		
3	QPSK	1	14	23.13	23.01	22.86		
3	QPSK	8	0	22.20	22.10	21.93	23	0.5
3	QPSK	8	4	22.19	22.13	21.95		
3	QPSK	8	7	22.20	22.10	21.94		
3	QPSK	15	0	22.18	22.10	21.95		
3	16QAM	1	0	22.34	22.27	22.16	23	0.5
3	16QAM	1	8	22.40	22.33	22.16		
3	16QAM	1	14	22.35	22.28	22.05		
3	16QAM	8	0	21.25	21.19	21.02	22	1.5
3	16QAM	8	4	21.26	21.23	20.99		
3	16QAM	8	7	21.23	21.22	20.99		
3	16QAM	15	0	21.17	21.10	20.95		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.11	23.04	23.07	23.5	0
1.4	QPSK	1	3	23.06	23.09	22.92		
1.4	QPSK	1	5	23.02	23.05	22.86		
1.4	QPSK	3	0	23.11	23.07	22.85		
1.4	QPSK	3	1	23.03	23.07	22.88		
1.4	QPSK	3	3	23.15	23.07	22.86		
1.4	QPSK	6	0	22.14	22.11	21.95	23	0.5
1.4	16QAM	1	0	22.39	22.24	22.11	23	0.5
1.4	16QAM	1	3	22.42	22.37	22.18		
1.4	16QAM	1	5	22.32	22.31	22.07		
1.4	16QAM	3	0	22.14	22.08	21.93		
1.4	16QAM	3	1	22.20	22.18	22.01		
1.4	16QAM	3	3	22.07	22.12	21.90		
1.4	16QAM	6	0	21.01	21.16	20.97	22	1.5

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.96	22.83	22.75	23.5	0
20	QPSK	1	49	22.60	22.52	22.66		
20	QPSK	1	99	22.70	22.72	22.63		
20	QPSK	50	0	21.89	21.75	21.68	23	0.5
20	QPSK	50	24	21.64	21.59	21.61		
20	QPSK	50	50	21.71	21.61	21.60		
20	QPSK	100	0	21.71	21.67	21.61	23	0.5
20	16QAM	1	0	21.97	21.92	22.08		
20	16QAM	1	49	21.86	21.77	21.91		
20	16QAM	1	99	21.95	22.02	22.07	22	1.5
20	16QAM	50	0	20.68	20.66	20.68		
20	16QAM	50	24	20.61	20.61	20.72		
20	16QAM	50	50	20.75	20.75	20.84	22	1.5
20	16QAM	100	0	20.68	20.61	20.72		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.87	22.61	22.68	23.5	0
15	QPSK	1	37	22.58	22.47	22.66		
15	QPSK	1	74	22.74	22.87	22.94		
15	QPSK	36	0	21.91	21.76	21.91	23	0.5
15	QPSK	36	20	21.77	21.63	21.85		
15	QPSK	36	39	21.69	21.73	21.83		
15	QPSK	75	0	21.79	21.73	21.90	23	0.5
15	16QAM	1	0	22.29	22.28	22.35		
15	16QAM	1	37	21.83	21.75	21.90		
15	16QAM	1	74	22.09	22.06	22.13	22	1.5
15	16QAM	36	0	20.89	20.78	20.92		
15	16QAM	36	20	20.78	20.67	20.81		
15	16QAM	36	39	20.65	20.71	20.78	22	1.5
15	16QAM	75	0	20.83	20.77	20.91		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.84	22.77	22.88	23.5	0
10	QPSK	1	25	22.91	22.77	22.77		
10	QPSK	1	49	22.66	22.55	22.60		
10	QPSK	25	0	22.05	21.94	21.93	23	0.5
10	QPSK	25	12	22.11	22.01	22.09		
10	QPSK	25	25	21.99	21.86	21.94		
10	QPSK	50	0	22.00	21.94	21.96	23	0.5
10	16QAM	1	0	21.96	21.92	22.02		
10	16QAM	1	25	22.26	22.17	22.29		
10	16QAM	1	49	21.89	21.80	21.87	22	1.5
10	16QAM	25	0	21.10	20.98	20.94		
10	16QAM	25	12	21.17	21.00	21.07		
10	16QAM	25	25	20.99	20.83	20.98	22	1.5
10	16QAM	50	0	21.08	20.89	20.94		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.93	22.87	22.90	23.5	0
5	QPSK	1	12	22.91	22.79	23.09		
5	QPSK	1	24	22.70	22.96	22.99		
5	QPSK	12	0	22.16	22.06	22.08	23	0.5
5	QPSK	12	7	22.11	22.04	22.11		
5	QPSK	12	13	22.13	21.99	22.07		
5	QPSK	25	0	22.13	22.03	22.08	23	0.5
5	16QAM	1	0	22.29	22.23	22.34		
5	16QAM	1	12	22.25	22.18	22.24		
5	16QAM	1	24	22.25	22.23	22.21	22	1.5
5	16QAM	12	0	21.14	21.07	21.11		
5	16QAM	12	7	21.18	21.06	21.13		
5	16QAM	12	13	21.13	21.01	21.10	22	1.5
5	16QAM	25	0	21.12	21.03	21.09		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.05	22.92	22.99	23.5	0
15	QPSK	1	37	23.26	22.95	23.04		
15	QPSK	1	74	23.08	22.94	22.86		
15	QPSK	36	0	22.28	22.12	22.03	23	0.5
15	QPSK	36	20	22.26	22.09	21.94		
15	QPSK	36	39	22.11	22.01	21.90		
15	QPSK	75	0	22.26	22.09	22.02	23	0.5
15	16QAM	1	0	22.57	22.52	22.32		
15	16QAM	1	37	22.41	22.25	22.06		
15	16QAM	1	74	22.36	22.30	22.16	22	1.5
15	16QAM	36	0	21.24	21.17	21.04		
15	16QAM	36	20	21.23	21.07	20.96		
15	16QAM	36	39	21.10	20.99	20.89	22	1.5
15	16QAM	75	0	21.22	21.08	21.03		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.92	22.85	23.08	23.5	0
10	QPSK	1	25	23.21	23.07	22.91		
10	QPSK	1	49	22.72	22.92	22.83		
10	QPSK	25	0	22.15	22.03	21.88	23	0.5
10	QPSK	25	12	22.23	22.12	21.98		
10	QPSK	25	25	22.05	21.91	21.84		
10	QPSK	50	0	22.11	21.95	21.86	23	0.5
10	16QAM	1	0	22.04	21.97	21.99		
10	16QAM	1	25	22.47	22.29	22.20		
10	16QAM	1	49	21.98	21.77	21.94	22	1.5
10	16QAM	25	0	21.16	21.02	20.85		
10	16QAM	25	12	21.26	21.12	20.94		
10	16QAM	25	25	21.08	20.92	20.78	22	1.5
10	16QAM	50	0	21.11	20.95	20.82		



FCC SAR Test Report

Report No. : FA891009-03

Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.87	22.96	22.77	23.5	0
5	QPSK	1	12	23.11	22.94	22.79		
5	QPSK	1	24	23.12	22.87	22.75		
5	QPSK	12	0	22.25	22.07	21.97	23	0.5
5	QPSK	12	7	22.24	22.04	21.94		
5	QPSK	12	13	22.21	22.00	21.91		
5	QPSK	25	0	22.24	22.02	21.94		
5	16QAM	1	0	22.38	22.28	22.18	23	0.5
5	16QAM	1	12	22.32	22.18	22.04		
5	16QAM	1	24	22.38	22.20	22.02		
5	16QAM	12	0	21.25	21.13	21.00	22	1.5
5	16QAM	12	7	21.26	21.11	21.00		
5	16QAM	12	13	21.25	21.09	20.97		
5	16QAM	25	0	21.19	21.03	20.86		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.95	23.00	22.86	23.5	0
3	QPSK	1	8	23.12	22.79	22.95		
3	QPSK	1	14	23.05	22.90	22.82		
3	QPSK	8	0	22.17	22.00	21.92	23	0.5
3	QPSK	8	4	22.19	22.00	21.94		
3	QPSK	8	7	22.16	21.97	21.90		
3	QPSK	15	0	22.17	21.98	21.92		
3	16QAM	1	0	22.39	22.23	22.07	23	0.5
3	16QAM	1	8	22.38	22.18	22.12		
3	16QAM	1	14	22.32	22.14	22.04		
3	16QAM	8	0	21.29	21.13	21.03	22	1.5
3	16QAM	8	4	21.28	21.14	21.06		
3	16QAM	8	7	21.31	21.09	21.03		
3	16QAM	15	0	21.21	21.00	20.90		



FCC SAR Test Report

Report No. : FA891009-03

Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.87	22.66	22.62	23.5	0
1.4	QPSK	1	3	23.00	22.79	22.77		
1.4	QPSK	1	5	22.92	22.65	22.60		
1.4	QPSK	3	0	22.89	22.72	22.68		
1.4	QPSK	3	1	22.91	22.74	22.65		
1.4	QPSK	3	3	22.85	22.67	22.56		
1.4	QPSK	6	0	22.31	22.22	22.19	23	0.5
1.4	16QAM	1	0	22.79	22.54	22.50	23	0.5
1.4	16QAM	1	3	22.79	22.59	22.56		
1.4	16QAM	1	5	22.71	22.51	22.50		
1.4	16QAM	3	0	22.30	22.23	22.26		
1.4	16QAM	3	1	22.37	22.34	22.33		
1.4	16QAM	3	3	22.33	22.19	22.17		
1.4	16QAM	6	0	21.49	21.27	21.13	22	1.5



<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.38	15.30	15.28	16	0
20	QPSK	1	49	15.20	15.20	15.26		
20	QPSK	1	99	15.28	15.28	15.23		
20	QPSK	50	0	15.45	15.39	15.40	16	0
20	QPSK	50	24	15.24	15.15	15.33		
20	QPSK	50	50	15.30	15.21	15.33		
20	QPSK	100	0	15.32	15.24	15.32	16	0
20	16QAM	1	0	15.75	15.76	15.63		
20	16QAM	1	49	15.48	15.35	15.60		
20	16QAM	1	99	15.62	15.61	15.74	16	0
20	16QAM	50	0	15.34	15.34	15.39		
20	16QAM	50	24	15.25	15.18	15.39		
20	16QAM	50	50	15.28	15.23	15.41	16	0
20	16QAM	100	0	15.35	15.30	15.45		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.57	15.60	15.49	16	0
15	QPSK	1	37	15.08	15.40	15.03		
15	QPSK	1	74	15.49	15.52	15.52		
15	QPSK	36	0	15.69	15.56	15.61	16	0
15	QPSK	36	20	15.43	15.28	15.31		
15	QPSK	36	39	15.30	15.29	15.35		
15	QPSK	75	0	15.54	15.41	15.49	16	0
15	16QAM	1	0	15.50	15.45	15.40		
15	16QAM	1	37	15.54	15.43	15.51		
15	16QAM	1	74	15.74	15.73	15.68	16	0
15	16QAM	36	0	15.72	15.56	15.63		
15	16QAM	36	20	15.40	15.25	15.34		
15	16QAM	36	39	15.33	15.29	15.35	16	0
15	16QAM	75	0	15.58	15.44	15.51		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	15.04	15.23	15.10	16	0
10	QPSK	1	25	15.21	15.01	15.25		
10	QPSK	1	49	15.50	15.20	15.13		
10	QPSK	25	0	15.39	15.16	15.39	16	0
10	QPSK	25	12	15.38	15.18	15.44		
10	QPSK	25	25	15.28	15.11	15.31		
10	QPSK	50	0	15.29	15.09	15.37	16	0
10	16QAM	1	0	15.67	15.51	15.62		
10	16QAM	1	25	15.68	15.43	15.64		
10	16QAM	1	49	15.21	15.07	15.29	16	0
10	16QAM	25	0	15.38	15.14	15.36		
10	16QAM	25	12	15.40	15.14	15.41		
10	16QAM	25	25	15.22	15.09	15.27	16	0
10	16QAM	50	0	15.34	15.14	15.32		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.20	15.23	15.05	16	0
5	QPSK	1	12	15.22	15.09	15.23		
5	QPSK	1	24	15.29	15.14	15.32		
5	QPSK	12	0	15.47	15.23	15.42	16	0
5	QPSK	12	7	15.42	15.21	15.41		
5	QPSK	12	13	15.35	15.12	15.37		
5	QPSK	25	0	15.40	15.22	15.40	16	0
5	16QAM	1	0	15.74	15.50	15.74		
5	16QAM	1	12	15.60	15.39	15.56		
5	16QAM	1	24	15.56	15.42	15.53	16	0
5	16QAM	12	0	15.52	15.26	15.49		
5	16QAM	12	7	15.45	15.23	15.45		
5	16QAM	12	13	15.42	15.21	15.43	16	0
5	16QAM	25	0	15.38	15.15	15.36		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.30	15.40	15.40	16	0
3	QPSK	1	8	15.31	15.08	15.33		
3	QPSK	1	14	15.26	15.01	15.25		
3	QPSK	8	0	15.37	15.17	15.39	16	0
3	QPSK	8	4	15.42	15.14	15.41		
3	QPSK	8	7	15.36	15.12	15.37		
3	QPSK	15	0	15.36	15.18	15.36	16	0
3	16QAM	1	0	15.66	15.31	15.55		
3	16QAM	1	8	15.64	15.33	15.54		
3	16QAM	1	14	15.55	15.21	15.43	16	0
3	16QAM	8	0	15.54	15.30	15.55		
3	16QAM	8	4	15.50	15.30	15.47		
3	16QAM	8	7	15.46	15.24	15.46	16	0
3	16QAM	15	0	15.37	15.21	15.40		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.18	15.38	15.50	16	0
1.4	QPSK	1	3	15.27	15.02	15.24		
1.4	QPSK	1	5	15.18	15.25	15.17		
1.4	QPSK	3	0	15.28	15.06	15.23		
1.4	QPSK	3	1	15.35	15.10	15.29		
1.4	QPSK	3	3	15.27	15.07	15.24		
1.4	QPSK	6	0	15.31	15.13	15.35	16	0
1.4	16QAM	1	0	15.41	15.22	15.52	16	0
1.4	16QAM	1	3	15.45	15.29	15.48		
1.4	16QAM	1	5	15.44	15.20	15.37		
1.4	16QAM	3	0	15.41	15.20	15.39		
1.4	16QAM	3	1	15.44	15.25	15.40		
1.4	16QAM	3	3	15.38	15.11	15.39		
1.4	16QAM	6	0	15.40	15.16	15.34	16	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.12	16.34	16.44	17	0
20	QPSK	1	49	16.64	16.50	16.48		
20	QPSK	1	99	16.41	16.45	16.80		
20	QPSK	50	0	16.49	16.27	16.52	17	0
20	QPSK	50	24	16.56	16.40	16.41		
20	QPSK	50	50	16.83	16.51	16.53		
20	QPSK	100	0	16.72	16.44	16.61	17	0
20	16QAM	1	0	16.83	16.51	16.82		
20	16QAM	1	49	16.50	16.73	16.77		
20	16QAM	1	99	16.50	16.25	16.54	17	0
20	16QAM	50	0	16.44	16.27	16.46		
20	16QAM	50	24	16.57	16.41	16.41		
20	16QAM	50	50	16.88	16.52	16.52	17	0
20	16QAM	100	0	16.76	16.43	16.53		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.69	16.51	16.45	17	0
15	QPSK	1	37	16.42	16.28	16.39		
15	QPSK	1	74	16.25	16.75	16.80		
15	QPSK	36	0	16.76	16.71	16.84	17	0
15	QPSK	36	20	16.66	16.50	16.61		
15	QPSK	36	39	16.75	16.55	16.57		
15	QPSK	75	0	16.76	16.61	16.72	17	0
15	16QAM	1	0	16.57	16.38	16.78		
15	16QAM	1	37	16.82	16.62	16.82		
15	16QAM	1	74	16.57	16.38	16.29	17	0
15	16QAM	36	0	16.77	16.70	16.85		
15	16QAM	36	20	16.61	16.49	16.59		
15	16QAM	36	39	16.76	16.54	16.54	17	0
15	16QAM	75	0	16.80	16.58	16.71		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.67	15.71	15.90	17	0
10	QPSK	1	25	16.25	16.20	16.25		
10	QPSK	1	49	16.06	16.06	16.00		
10	QPSK	25	0	16.16	16.23	16.41	17	0
10	QPSK	25	12	16.28	16.29	16.40		
10	QPSK	25	25	16.24	16.22	16.24		
10	QPSK	50	0	16.22	16.27	16.32	17	0
10	16QAM	1	0	16.51	16.49	16.70		
10	16QAM	1	25	16.54	16.62	16.76		
10	16QAM	1	49	16.44	16.43	16.35	17	0
10	16QAM	25	0	16.17	16.19	16.40		
10	16QAM	25	12	16.22	16.32	16.34		
10	16QAM	25	25	16.26	16.18	16.23	17	0
10	16QAM	50	0	16.23	16.26	16.30		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.80	15.85	16.03	17	0
5	QPSK	1	12	16.09	16.21	16.28		
5	QPSK	1	24	16.18	16.33	16.37		
5	QPSK	12	0	16.20	16.29	16.45	17	0
5	QPSK	12	7	16.17	16.32	16.37		
5	QPSK	12	13	16.13	16.32	16.33		
5	QPSK	25	0	16.19	16.38	16.39	17	0
5	16QAM	1	0	16.44	16.64	16.73		
5	16QAM	1	12	16.34	16.55	16.57		
5	16QAM	1	24	16.54	16.61	16.53	17	0
5	16QAM	12	0	16.23	16.36	16.51		
5	16QAM	12	7	16.27	16.40	16.48		
5	16QAM	12	13	16.24	16.37	16.45	17	0
5	16QAM	25	0	16.17	16.29	16.31		



FCC SAR Test Report

Report No. : FA891009-03

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.62	16.56	16.50	17	0
3	QPSK	1	8	16.00	16.29	16.23		
3	QPSK	1	14	16.35	16.16	16.10		
3	QPSK	8	0	15.34	16.24	16.32	17	0
3	QPSK	8	4	16.12	16.31	16.33		
3	QPSK	8	7	16.11	16.26	16.26		
3	QPSK	15	0	16.15	16.29	16.35	17	0
3	16QAM	1	0	16.35	16.39	16.41		
3	16QAM	1	8	16.40	16.48	16.54		
3	16QAM	1	14	16.33	16.42	16.26	17	0
3	16QAM	8	0	16.21	16.32	16.44		
3	16QAM	8	4	16.21	16.37	16.40		
3	16QAM	8	7	16.13	16.33	16.33	17	0
3	16QAM	15	0	16.16	16.28	16.28		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.01	15.66	15.80	17	0
1.4	QPSK	1	3	16.03	16.18	16.26		
1.4	QPSK	1	5	15.99	16.11	16.18		
1.4	QPSK	3	0	16.04	16.22	16.30		
1.4	QPSK	3	1	16.11	16.27	16.34		
1.4	QPSK	3	3	16.09	16.25	16.29		
1.4	QPSK	6	0	16.04	16.25	16.29	17	0
1.4	16QAM	1	0	16.31	16.43	16.39	17	0
1.4	16QAM	1	3	16.37	16.52	16.39		
1.4	16QAM	1	5	16.33	16.48	16.36		
1.4	16QAM	3	0	16.12	16.31	16.48		
1.4	16QAM	3	1	16.15	16.42	16.47		
1.4	16QAM	3	3	16.07	16.32	16.38		
1.4	16QAM	6	0	16.20	16.28	16.29	17	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.10	17.86	17.86	19	0
20	QPSK	1	49	17.66	17.69	18.07		
20	QPSK	1	99	17.93	18.00	17.89		
20	QPSK	50	0	18.09	17.89	17.99	19	0
20	QPSK	50	24	17.77	17.82	18.06		
20	QPSK	50	50	17.91	17.88	18.03		
20	QPSK	100	0	18.12	17.96	18.10	19	0
20	16QAM	1	0	18.30	18.23	18.17		
20	16QAM	1	49	18.07	18.03	18.50		
20	16QAM	1	99	18.27	18.39	17.91	19	0
20	16QAM	50	0	17.91	17.94	18.02		
20	16QAM	50	24	17.83	17.84	18.10		
20	16QAM	50	50	17.94	17.95	18.05	19	0
20	16QAM	100	0	17.85	17.89	18.19		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.78	17.70	17.72	19	0
15	QPSK	1	37	17.70	17.68	18.18		
15	QPSK	1	74	18.00	18.06	18.26		
15	QPSK	36	0	18.13	18.06	18.06	19	0
15	QPSK	36	20	17.94	17.91	18.08		
15	QPSK	36	39	17.92	17.93	18.11		
15	QPSK	75	0	17.99	17.96	18.10	19	0
15	16QAM	1	0	18.23	18.50	18.09		
15	16QAM	1	37	18.08	17.98	18.50		
15	16QAM	1	74	18.37	18.32	18.18	19	0
15	16QAM	36	0	18.09	18.03	18.03		
15	16QAM	36	20	17.91	17.89	18.05		
15	16QAM	36	39	17.88	17.88	18.16	19	0
15	16QAM	75	0	18.04	18.01	18.03		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.58	18.00	17.89	19	0
10	QPSK	1	25	17.77	17.81	17.60		
10	QPSK	1	49	17.36	17.42	17.97		
10	QPSK	25	0	17.77	17.79	18.04	19	0
10	QPSK	25	12	17.83	17.84	17.93		
10	QPSK	25	25	17.75	17.75	17.90		
10	QPSK	50	0	17.73	17.72	18.04	19	0
10	16QAM	1	0	17.85	17.89	18.20		
10	16QAM	1	25	18.03	18.04	17.90		
10	16QAM	1	49	17.65	17.67	17.94	19	0
10	16QAM	25	0	17.77	17.79	18.03		
10	16QAM	25	12	17.85	17.85	17.92		
10	16QAM	25	25	17.76	17.70	17.98	19	0
10	16QAM	50	0	17.79	17.77	17.92		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.00	17.89	17.89	19	0
5	QPSK	1	12	17.77	17.80	17.96		
5	QPSK	1	24	17.79	17.74	18.03		
5	QPSK	12	0	17.86	17.82	17.99	19	0
5	QPSK	12	7	17.83	17.83	17.97		
5	QPSK	12	13	17.82	17.86	18.02		
5	QPSK	25	0	17.87	17.87	18.33	19	0
5	16QAM	1	0	18.10	18.05	18.20		
5	16QAM	1	12	18.06	18.01	18.21		
5	16QAM	1	24	18.06	18.03	18.05	19	0
5	16QAM	12	0	17.91	17.89	18.07		
5	16QAM	12	7	17.90	17.90	18.04		
5	16QAM	12	13	17.90	17.83	18.01	19	0
5	16QAM	25	0	17.85	17.83	18.19		



<Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	13.81	13.48	13.53	14.5	0
20	QPSK	1	49	13.57	13.58	13.65		
20	QPSK	1	99	13.80	13.74	13.79		
20	QPSK	50	0	13.82	13.83	13.81	14.5	0
20	QPSK	50	24	13.66	13.63	13.80		
20	QPSK	50	50	13.72	13.71	13.81		
20	QPSK	100	0	13.76	13.71	13.68	14.5	0
20	16QAM	1	0	14.39	14.33	14.29		
20	16QAM	1	49	13.88	13.83	14.01		
20	16QAM	1	99	14.10	14.06	14.19	14.5	0
20	16QAM	50	0	13.85	13.78	13.92		
20	16QAM	50	24	13.65	13.64	13.79		
20	16QAM	50	50	13.76	13.69	13.91	14.5	0
20	16QAM	100	0	13.81	13.76	13.91		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	14.00	13.99	14.04	14.5	0
15	QPSK	1	37	13.57	13.45	13.56		
15	QPSK	1	74	13.97	13.97	14.03		
15	QPSK	36	0	14.17	14.02	14.12	14.5	0
15	QPSK	36	20	13.86	13.74	13.83		
15	QPSK	36	39	13.77	13.77	13.81		
15	QPSK	75	0	13.97	13.88	13.98	14.5	0
15	16QAM	1	0	13.96	13.91	13.95		
15	16QAM	1	37	14.00	13.81	13.95		
15	16QAM	1	74	14.34	14.33	14.39	14.5	0
15	16QAM	36	0	14.18	14.08	14.09		
15	16QAM	36	20	13.84	13.73	13.77		
15	16QAM	36	39	13.79	13.77	13.83	14.5	0
15	16QAM	75	0	14.00	13.87	14.02		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	13.23	13.10	13.32	14.5	0
10	QPSK	1	25	13.66	13.48	13.72		
10	QPSK	1	49	13.29	13.20	13.43		
10	QPSK	25	0	13.84	13.65	13.83	14.5	0
10	QPSK	25	12	13.80	13.65	13.89		
10	QPSK	25	25	13.72	13.58	13.79		
10	QPSK	50	0	13.72	13.56	13.80	14.5	0
10	16QAM	1	0	14.05	13.94	14.14		
10	16QAM	1	25	14.03	13.86	14.10		
10	16QAM	1	49	13.62	13.51	13.70	14.5	0
10	16QAM	25	0	13.80	13.64	13.80		
10	16QAM	25	12	13.78	13.63	13.87		
10	16QAM	25	25	13.71	13.55	13.75	14.5	0
10	16QAM	50	0	13.81	13.59	13.78		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	13.39	13.09	13.35	14.5	0
5	QPSK	1	12	13.71	13.51	13.71		
5	QPSK	1	24	13.75	13.64	13.78		
5	QPSK	12	0	13.91	13.75	13.96	14.5	0
5	QPSK	12	7	13.88	13.67	13.89		
5	QPSK	12	13	13.81	13.66	13.86		
5	QPSK	25	0	13.88	13.68	13.92	14.5	0
5	16QAM	1	0	14.21	13.95	14.19		
5	16QAM	1	12	14.08	13.85	14.05		
5	16QAM	1	24	14.05	13.86	14.05	14.5	0
5	16QAM	12	0	13.97	13.77	13.99		
5	16QAM	12	7	13.92	13.73	13.94		
5	16QAM	12	13	13.89	13.70	13.95	14.5	0
5	16QAM	25	0	13.82	13.67	13.86		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	13.24	13.00	13.20	14.5	0
3	QPSK	1	8	13.73	13.58	13.80		
3	QPSK	1	14	13.72	13.52	13.72		
3	QPSK	8	0	13.86	13.65	13.86	14.5	0
3	QPSK	8	4	13.86	13.68	13.87		
3	QPSK	8	7	13.83	13.63	13.84		
3	QPSK	15	0	13.87	13.66	13.86	14.5	0
3	16QAM	1	0	13.96	13.84	14.10		
3	16QAM	1	8	14.03	13.87	14.03		
3	16QAM	1	14	13.94	13.78	13.91	14.5	0
3	16QAM	8	0	13.96	13.78	14.02		
3	16QAM	8	4	13.94	13.79	13.95		
3	16QAM	8	7	13.90	13.72	13.99	14.5	0
3	16QAM	15	0	13.85	13.71	13.87		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	13.65	13.55	13.06	14.5	0
1.4	QPSK	1	3	13.71	13.66	13.77		
1.4	QPSK	1	5	13.60	13.53	13.66		
1.4	QPSK	3	0	13.72	13.53	13.77	14.5	0
1.4	QPSK	3	1	13.76	13.61	13.78		
1.4	QPSK	3	3	13.67	13.54	13.76		
1.4	QPSK	6	0	13.75	13.59	13.82	14.5	0
1.4	16QAM	1	0	14.05	13.79	13.93	14.5	0
1.4	16QAM	1	3	14.12	13.89	13.96		
1.4	16QAM	1	5	14.03	13.82	13.91		
1.4	16QAM	3	0	13.83	13.65	13.87	14.5	0
1.4	16QAM	3	1	13.90	13.69	13.95		
1.4	16QAM	3	3	13.77	13.60	13.83		
1.4	16QAM	6	0	13.82	13.71	13.89	14.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.15	15.20	15.15		
20	QPSK	1	49	15.56	15.34	15.46	16	0
20	QPSK	1	99	15.35	15.43	15.66		
20	QPSK	50	0	15.42	15.23	15.48		
20	QPSK	50	24	15.55	15.29	15.39	16	0
20	QPSK	50	50	15.81	15.42	15.50		
20	QPSK	100	0	15.68	15.41	15.57		
20	16QAM	1	0	15.72	15.53	15.86	16	0
20	16QAM	1	49	15.83	15.63	15.75		
20	16QAM	1	99	15.80	15.80	15.97		
20	16QAM	50	0	15.42	15.19	15.46	16	0
20	16QAM	50	24	15.54	15.34	15.41		
20	16QAM	50	50	15.83	15.43	15.48		
20	16QAM	100	0	15.70	15.34	15.52		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.67	15.43	15.79		
15	QPSK	1	37	15.37	15.21	15.32	16	0
15	QPSK	1	74	15.50	15.84	15.77		
15	QPSK	36	0	15.69	15.61	15.76		
15	QPSK	36	20	15.61	15.40	15.56	16	0
15	QPSK	36	39	15.73	15.45	15.52		
15	QPSK	75	0	15.74	15.54	15.69		
15	16QAM	1	0	15.80	15.65	15.60	16	0
15	16QAM	1	37	15.77	15.51	15.68		
15	16QAM	1	74	15.46	15.23	15.18		
15	16QAM	36	0	15.71	15.62	15.77	16	0
15	16QAM	36	20	15.57	15.40	15.56		
15	16QAM	36	39	15.70	15.47	15.54		
15	16QAM	75	0	15.76	15.53	15.70		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	14.86	15.02	15.12	16	0
10	QPSK	1	25	15.16	15.12	15.26		
10	QPSK	1	49	15.03	14.99	14.95		
10	QPSK	25	0	15.19	15.13	15.40	16	0
10	QPSK	25	12	15.26	15.24	15.39		
10	QPSK	25	25	15.21	15.16	15.24		
10	QPSK	50	0	15.17	15.15	15.25	16	0
10	16QAM	1	0	15.39	15.37	15.62		
10	16QAM	1	25	15.49	15.53	15.67		
10	16QAM	1	49	15.39	15.40	15.31	16	0
10	16QAM	25	0	15.14	15.13	15.41		
10	16QAM	25	12	15.22	15.21	15.33		
10	16QAM	25	25	15.18	15.12	15.18	16	0
10	16QAM	50	0	15.20	15.16	15.26		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	14.98	14.99	15.00	16	0
5	QPSK	1	12	15.01	15.13	15.23		
5	QPSK	1	24	15.20	15.21	15.28		
5	QPSK	12	0	15.19	15.23	15.45	16	0
5	QPSK	12	7	15.18	15.26	15.38		
5	QPSK	12	13	15.13	15.23	15.34		
5	QPSK	25	0	15.20	15.26	15.40	16	0
5	16QAM	1	0	15.48	15.46	15.76		
5	16QAM	1	12	15.38	15.42	15.59		
5	16QAM	1	24	15.45	15.53	15.60	16	0
5	16QAM	12	0	15.18	15.27	15.48		
5	16QAM	12	7	15.22	15.28	15.43		
5	16QAM	12	13	15.16	15.26	15.36	16	0
5	16QAM	25	0	15.13	15.19	15.32		



FCC SAR Test Report

Report No. : FA891009-03

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.03	15.13	15.28	16	0
3	QPSK	1	8	15.10	15.17	15.25		
3	QPSK	1	14	15.04	15.14	15.20		
3	QPSK	8	0	15.11	15.18	15.37	16	0
3	QPSK	8	4	15.09	15.22	15.37		
3	QPSK	8	7	15.07	15.20	15.32		
3	QPSK	15	0	15.10	15.24	15.31	16	0
3	16QAM	1	0	15.33	15.39	15.60		
3	16QAM	1	8	15.34	15.40	15.63		
3	16QAM	1	14	15.34	15.39	15.54	16	0
3	16QAM	8	0	15.20	15.27	15.48		
3	16QAM	8	4	15.18	15.31	15.43		
3	16QAM	8	7	15.10	15.24	15.42	16	0
3	16QAM	15	0	15.10	15.23	15.30		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	15.05	15.20	15.12	16	0
1.4	QPSK	1	3	15.13	15.15	15.26		
1.4	QPSK	1	5	15.05	15.05	15.16		
1.4	QPSK	3	0	15.03	15.16	15.28	16	0
1.4	QPSK	3	1	15.08	15.22	15.33		
1.4	QPSK	3	3	14.98	15.19	15.27		
1.4	QPSK	6	0	15.05	15.19	15.28	16	0
1.4	16QAM	1	0	15.33	15.41	15.46	16	0
1.4	16QAM	1	3	15.36	15.53	15.53		
1.4	16QAM	1	5	15.32	15.43	15.48		
1.4	16QAM	3	0	15.15	15.28	15.35	16	0
1.4	16QAM	3	1	15.19	15.33	15.43		
1.4	16QAM	3	3	15.09	15.26	15.33		
1.4	16QAM	6	0	15.12	15.23	15.29	16	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.10	17.86	17.86	19	0
20	QPSK	1	49	17.66	17.69	18.07		
20	QPSK	1	99	17.93	18.00	17.89		
20	QPSK	50	0	18.09	17.89	17.99	19	0
20	QPSK	50	24	17.77	17.82	18.06		
20	QPSK	50	50	17.91	17.88	18.03		
20	QPSK	100	0	18.12	17.96	18.10	19	0
20	16QAM	1	0	18.30	18.23	18.17		
20	16QAM	1	49	18.07	18.03	18.50		
20	16QAM	1	99	18.27	18.39	17.91	19	0
20	16QAM	50	0	17.91	17.94	18.02		
20	16QAM	50	24	17.83	17.84	18.10		
20	16QAM	50	50	17.94	17.95	18.05	19	0
20	16QAM	100	0	17.85	17.89	18.19		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.78	17.70	17.72	19	0
15	QPSK	1	37	17.70	17.68	18.18		
15	QPSK	1	74	18.00	18.06	18.26		
15	QPSK	36	0	18.13	18.06	18.06	19	0
15	QPSK	36	20	17.94	17.91	18.08		
15	QPSK	36	39	17.92	17.93	18.11		
15	QPSK	75	0	17.99	17.96	18.10	19	0
15	16QAM	1	0	18.23	18.50	18.09		
15	16QAM	1	37	18.08	17.98	18.50		
15	16QAM	1	74	18.37	18.32	18.18	19	0
15	16QAM	36	0	18.09	18.03	18.03		
15	16QAM	36	20	17.91	17.89	18.05		
15	16QAM	36	39	17.88	17.88	18.16	19	0
15	16QAM	75	0	18.04	18.01	18.03		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.58	18.00	17.89	19	0
10	QPSK	1	25	17.77	17.81	17.60		
10	QPSK	1	49	17.36	17.42	17.97		
10	QPSK	25	0	17.77	17.79	18.04	19	0
10	QPSK	25	12	17.83	17.84	17.93		
10	QPSK	25	25	17.75	17.75	17.90		
10	QPSK	50	0	17.73	17.72	18.04	19	0
10	16QAM	1	0	17.85	17.89	18.20		
10	16QAM	1	25	18.03	18.04	17.90		
10	16QAM	1	49	17.65	17.67	17.94	19	0
10	16QAM	25	0	17.77	17.79	18.03		
10	16QAM	25	12	17.85	17.85	17.92		
10	16QAM	25	25	17.76	17.70	17.98	19	0
10	16QAM	50	0	17.79	17.77	17.92		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.00	17.89	17.89	19	0
5	QPSK	1	12	17.77	17.80	17.96		
5	QPSK	1	24	17.79	17.74	18.03		
5	QPSK	12	0	17.86	17.82	17.99	19	0
5	QPSK	12	7	17.83	17.83	17.97		
5	QPSK	12	13	17.82	17.86	18.02		
5	QPSK	25	0	17.87	17.87	18.33	19	0
5	16QAM	1	0	18.10	18.05	18.20		
5	16QAM	1	12	18.06	18.01	18.21		
5	16QAM	1	24	18.06	18.03	18.05	19	0
5	16QAM	12	0	17.91	17.89	18.07		
5	16QAM	12	7	17.90	17.90	18.04		
5	16QAM	12	13	17.90	17.83	18.01	19	0
5	16QAM	25	0	17.85	17.83	18.19		

<Reduced Power Mode for Handheld>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	20.5	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.95	18.82	18.86	20.5	0
20	QPSK	1	49	18.65	18.70	18.80		
20	QPSK	1	99	18.82	18.83	18.80		
20	QPSK	50	0	18.89	18.77	18.88	20.5	0
20	QPSK	50	24	18.59	18.63	18.78		
20	QPSK	50	50	18.66	18.64	18.81		
20	QPSK	100	0	18.92	18.64	18.90	20.5	0
20	16QAM	1	0	19.40	19.32	19.36		
20	16QAM	1	49	18.86	18.86	18.96		
20	16QAM	1	99	19.11	19.06	19.21	20.5	0
20	16QAM	50	0	18.73	18.74	18.86		
20	16QAM	50	24	18.59	18.56	18.79		
20	16QAM	50	50	18.71	18.66	18.87	20.5	0
20	16QAM	100	0	18.77	18.72	18.86		
Channel				18675	18900	19125	20.5	0
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.03	19.01	18.83	20.5	0
15	QPSK	1	37	18.55	18.58	18.59		
15	QPSK	1	74	18.91	18.92	18.96		
15	QPSK	36	0	19.07	18.98	19.08	20.5	0
15	QPSK	36	20	18.84	18.70	18.75		
15	QPSK	36	39	18.71	18.70	18.79		
15	QPSK	75	0	18.93	18.82	18.94	20.5	0
15	16QAM	1	0	18.87	18.86	18.88		
15	16QAM	1	37	18.82	18.75	18.85		
15	16QAM	1	74	19.30	19.30	19.37	20.5	0
15	16QAM	36	0	19.16	18.98	19.10		
15	16QAM	36	20	18.81	18.68	18.76		
15	16QAM	36	39	18.66	18.73	18.82	20.5	0
15	16QAM	75	0	18.99	18.83	18.95		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.60	18.68	18.63	20.5	0
10	QPSK	1	25	18.63	18.68	18.72		
10	QPSK	1	49	18.64	18.66	18.62		
10	QPSK	25	0	18.81	18.57	18.85	20.5	0
10	QPSK	25	12	18.79	18.60	18.85		
10	QPSK	25	25	18.64	18.59	18.75		
10	QPSK	50	0	18.69	18.59	18.78	20.5	0
10	16QAM	1	0	18.99	18.93	19.08		
10	16QAM	1	25	19.07	18.90	19.10		
10	16QAM	1	49	18.52	18.58	18.70	20.5	0
10	16QAM	25	0	18.73	18.55	18.79		
10	16QAM	25	12	18.76	18.57	18.79		
10	16QAM	25	25	18.65	18.54	18.70	20.5	0
10	16QAM	50	0	18.71	18.52	18.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.57	18.54	18.58	20.5	0
5	QPSK	1	12	18.61	18.51	18.68		
5	QPSK	1	24	18.68	18.56	18.70		
5	QPSK	12	0	18.86	18.66	18.91	20.5	0
5	QPSK	12	7	18.82	18.65	18.83		
5	QPSK	12	13	18.77	18.53	18.78		
5	QPSK	25	0	18.84	18.61	18.83	20.5	0
5	16QAM	1	0	19.02	18.91	19.15		
5	16QAM	1	12	18.90	18.74	18.94		
5	16QAM	1	24	18.94	18.78	18.97	20.5	0
5	16QAM	12	0	18.92	18.69	18.94		
5	16QAM	12	7	18.85	18.70	18.88		
5	16QAM	12	13	18.83	18.60	18.89	20.5	0
5	16QAM	25	0	18.74	18.57	18.79		



FCC SAR Test Report

Report No. : FA891009-03

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.62	18.58	18.55	20.5	0
3	QPSK	1	8	18.64	18.59	18.78		
3	QPSK	1	14	18.60	18.64	18.70		
3	QPSK	8	0	18.74	18.58	18.80	20.5	0
3	QPSK	8	4	18.77	18.55	18.84		
3	QPSK	8	7	18.71	18.51	18.81		
3	QPSK	15	0	18.71	18.58	18.78	20.5	0
3	16QAM	1	0	18.97	18.69	18.93		
3	16QAM	1	8	18.99	18.72	18.95		
3	16QAM	1	14	18.94	18.62	18.89	20.5	0
3	16QAM	8	0	18.92	18.76	18.97		
3	16QAM	8	4	18.90	18.73	18.92		
3	16QAM	8	7	18.88	18.70	18.89	20.5	0
3	16QAM	15	0	18.76	18.61	18.83		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.77	18.70	18.55	20.5	0
1.4	QPSK	1	3	18.54	18.68	18.76		
1.4	QPSK	1	5	18.62	18.72	18.63		
1.4	QPSK	3	0	18.77	18.57	18.70	20.5	0
1.4	QPSK	3	1	18.81	18.51	18.71		
1.4	QPSK	3	3	18.75	18.58	18.70		
1.4	QPSK	6	0	18.84	18.54	18.80	20.5	0
1.4	16QAM	1	0	18.91	18.66	18.94	20.5	0
1.4	16QAM	1	3	18.99	18.70	18.95		
1.4	16QAM	1	5	18.84	18.58	18.95		
1.4	16QAM	3	0	18.92	18.63	18.85	20.5	0
1.4	16QAM	3	1	18.94	18.69	18.91		
1.4	16QAM	3	3	18.85	18.62	18.83		
1.4	16QAM	6	0	18.92	18.56	18.81	20.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.25	19.50	19.38		
20	QPSK	1	49	19.56	19.45	19.48	21	0
20	QPSK	1	99	19.60	19.50	19.84		
20	QPSK	50	0	19.38	19.52	19.35		
20	QPSK	50	24	19.46	19.59	19.31	21	0
20	QPSK	50	50	19.69	19.45	19.38		
20	QPSK	100	0	19.57	19.47	19.42		
20	16QAM	1	0	19.76	19.84	19.74	21	0
20	16QAM	1	49	19.90	19.85	19.62		
20	16QAM	1	99	19.50	19.49	19.93		
20	16QAM	50	0	19.29	19.44	19.29	21	0
20	16QAM	50	24	19.43	19.58	19.25		
20	16QAM	50	50	19.72	19.69	19.34		
20	16QAM	100	0	19.59	19.60	19.38		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.61	19.75	19.80		
15	QPSK	1	37	19.32	19.57	19.23	21	0
15	QPSK	1	74	19.50	19.50	19.65		
15	QPSK	36	0	19.61	19.85	19.66		
15	QPSK	36	20	19.53	19.73	19.45	21	0
15	QPSK	36	39	19.61	19.78	19.42		
15	QPSK	75	0	19.66	19.85	19.59		
15	16QAM	1	0	19.42	19.61	19.56	21	0
15	16QAM	1	37	19.58	19.80	19.58		
15	16QAM	1	74	19.48	19.62	19.20		
15	16QAM	36	0	19.67	19.74	19.69	21	0
15	16QAM	36	20	19.52	19.75	19.48		
15	16QAM	36	39	19.63	19.76	19.43		
15	16QAM	75	0	19.68	19.85	19.61		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.61	19.54	19.84	21	0
10	QPSK	1	25	19.07	19.42	19.19		
10	QPSK	1	49	19.35	19.31	19.51		
10	QPSK	25	0	19.13	19.44	19.29	21	0
10	QPSK	25	12	19.17	19.52	19.30		
10	QPSK	25	25	19.11	19.44	19.14		
10	QPSK	50	0	19.07	19.47	19.16	21	0
10	16QAM	1	0	19.41	19.74	19.52		
10	16QAM	1	25	19.53	19.90	19.63		
10	16QAM	1	49	19.32	19.72	19.23	21	0
10	16QAM	25	0	19.09	19.40	19.26		
10	16QAM	25	12	19.11	19.50	19.23		
10	16QAM	25	25	19.09	19.40	19.12	21	0
10	16QAM	50	0	19.12	19.45	19.18		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.26	19.07	19.27	21	0
5	QPSK	1	12	19.24	19.40	19.13		
5	QPSK	1	24	19.12	19.53	19.18		
5	QPSK	12	0	19.11	19.56	19.34	21	0
5	QPSK	12	7	19.10	19.55	19.30		
5	QPSK	12	13	19.10	19.53	19.25		
5	QPSK	25	0	19.11	19.57	19.30	21	0
5	16QAM	1	0	19.41	19.75	19.61		
5	16QAM	1	12	19.19	19.67	19.39		
5	16QAM	1	24	19.33	19.72	19.39	21	0
5	16QAM	12	0	19.17	19.62	19.41		
5	16QAM	12	7	19.18	19.62	19.36		
5	16QAM	12	13	19.17	19.61	19.31	21	0
5	16QAM	25	0	19.05	19.52	19.24		



FCC SAR Test Report

Report No. : FA891009-03

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.05	19.04	19.21	21	0
3	QPSK	1	8	19.06	19.54	19.23		
3	QPSK	1	14	19.03	19.46	19.13		
3	QPSK	8	0	19.05	19.47	19.20	21	0
3	QPSK	8	4	19.05	19.52	19.22		
3	QPSK	8	7	19.02	19.49	19.17		
3	QPSK	15	0	19.05	19.56	19.24	21	0
3	16QAM	1	0	19.18	19.54	19.35		
3	16QAM	1	8	19.20	19.68	19.39		
3	16QAM	1	14	19.13	19.59	19.25	21	0
3	16QAM	8	0	19.23	19.68	19.40		
3	16QAM	8	4	19.17	19.68	19.37		
3	16QAM	8	7	19.23	19.70	19.37	21	0
3	16QAM	15	0	19.03	19.50	19.22		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.10	19.27	19.15	21	0
1.4	QPSK	1	3	19.22	19.46	19.20		
1.4	QPSK	1	5	19.24	19.36	19.02		
1.4	QPSK	3	0	19.02	19.48	19.19	21	0
1.4	QPSK	3	1	19.05	19.54	19.23		
1.4	QPSK	3	3	19.02	19.50	19.18		
1.4	QPSK	6	0	19.28	19.49	19.19	21	0
1.4	16QAM	1	0	19.06	19.56	19.27	21	0
1.4	16QAM	1	3	19.18	19.60	19.35		
1.4	16QAM	1	5	19.05	19.49	19.26		
1.4	16QAM	3	0	19.17	19.63	19.39	21	0
1.4	16QAM	3	1	19.22	19.72	19.40		
1.4	16QAM	3	3	19.11	19.61	19.34		
1.4	16QAM	6	0	19.04	19.54	19.23	21	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.10	17.86	17.86	19.5	0
20	QPSK	1	49	17.66	17.69	18.07		
20	QPSK	1	99	17.93	18.00	17.89		
20	QPSK	50	0	18.09	17.89	17.99	19.5	0
20	QPSK	50	24	17.77	17.82	18.06		
20	QPSK	50	50	17.91	17.88	18.03		
20	QPSK	100	0	18.12	17.96	18.10	19.5	0
20	16QAM	1	0	18.30	18.23	18.17		
20	16QAM	1	49	18.07	18.03	18.50		
20	16QAM	1	99	18.27	18.39	17.91	19.5	0
20	16QAM	50	0	17.91	17.94	18.02		
20	16QAM	50	24	17.83	17.84	18.10		
20	16QAM	50	50	17.94	17.95	18.05	19.5	0
20	16QAM	100	0	17.85	17.89	18.19		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.78	17.70	17.72	19.5	0
15	QPSK	1	37	17.70	17.68	18.18		
15	QPSK	1	74	18.00	18.06	18.26		
15	QPSK	36	0	18.13	18.06	18.06	19.5	0
15	QPSK	36	20	17.94	17.91	18.08		
15	QPSK	36	39	17.92	17.93	18.11		
15	QPSK	75	0	17.99	17.96	18.10	19.5	0
15	16QAM	1	0	18.23	18.50	18.09		
15	16QAM	1	37	18.08	17.98	18.50		
15	16QAM	1	74	18.37	18.32	18.18	19.5	0
15	16QAM	36	0	18.09	18.03	18.03		
15	16QAM	36	20	17.91	17.89	18.05		
15	16QAM	36	39	17.88	17.88	18.16	19.5	0
15	16QAM	75	0	18.04	18.01	18.03		



FCC SAR Test Report

Report No. : FA891009-03

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.58	18.00	17.89	19.5	0
10	QPSK	1	25	17.77	17.81	17.60		
10	QPSK	1	49	17.52	17.52	17.97		
10	QPSK	25	0	17.77	17.79	18.04	19.5	0
10	QPSK	25	12	17.83	17.84	17.93		
10	QPSK	25	25	17.75	17.75	17.90		
10	QPSK	50	0	17.73	17.72	18.04	19.5	0
10	16QAM	1	0	17.85	17.89	18.20		
10	16QAM	1	25	18.03	18.04	17.90		
10	16QAM	1	49	17.65	17.67	17.94	19.5	0
10	16QAM	25	0	17.77	17.79	18.03		
10	16QAM	25	12	17.85	17.85	17.92		
10	16QAM	25	25	17.76	17.70	17.98	19.5	0
10	16QAM	50	0	17.79	17.77	17.92		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.00	17.89	17.89	19.5	0
5	QPSK	1	12	17.77	17.80	17.96		
5	QPSK	1	24	17.79	17.74	18.03		
5	QPSK	12	0	17.86	17.82	17.99	19.5	0
5	QPSK	12	7	17.83	17.83	17.97		
5	QPSK	12	13	17.82	17.86	18.02		
5	QPSK	25	0	17.87	17.87	18.33	19.5	0
5	16QAM	1	0	18.10	18.05	18.20		
5	16QAM	1	12	18.06	18.01	18.21		
5	16QAM	1	24	18.06	18.03	18.05	19.5	0
5	16QAM	12	0	17.91	17.89	18.07		
5	16QAM	12	7	17.90	17.90	18.04		
5	16QAM	12	13	17.90	17.83	18.01	19.5	0
5	16QAM	25	0	17.85	17.83	18.19		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

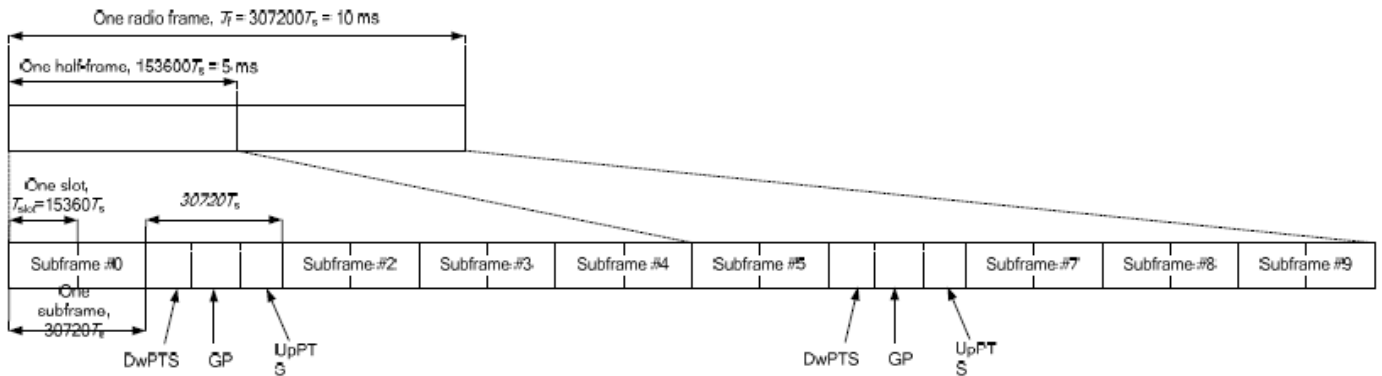


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<Full Power Mode>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150	24.5	0
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.68	22.80	22.99		
20	QPSK	1	49	22.79	22.70	22.50	23.5	1
20	QPSK	1	99	22.95	22.76	22.67		
20	QPSK	50	0	21.94	21.82	21.64		
20	QPSK	50	24	21.93	21.84	21.61	23.5	1
20	QPSK	50	50	22.02	21.84	21.62		
20	QPSK	100	0	22.06	21.84	21.65		
20	16QAM	1	0	22.24	22.15	22.08	23.5	1
20	16QAM	1	49	22.11	21.99	21.81		
20	16QAM	1	99	22.19	22.01	21.92		
20	16QAM	50	0	20.96	20.86	20.63	22.5	2
20	16QAM	50	24	20.95	20.87	20.66		
20	16QAM	50	50	21.06	20.87	20.64		
Channel				37825	38000	38175	24.5	0
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.83	22.71	22.58		
15	QPSK	1	37	22.92	22.79	22.58	23.5	1
15	QPSK	1	74	23.04	22.97	22.77		
15	QPSK	36	0	22.13	22.04	21.79		
15	QPSK	36	20	22.04	21.86	21.56	23.5	1
15	QPSK	36	39	21.91	21.78	21.63		
15	QPSK	75	0	22.11	21.91	21.67		
15	16QAM	1	0	21.58	21.52	21.89	23.5	1
15	16QAM	1	37	21.95	21.73	21.52		
15	16QAM	1	74	22.19	22.09	21.95		
15	16QAM	36	0	21.15	21.09	20.82	22.5	2
15	16QAM	36	20	20.99	20.84	20.61		
15	16QAM	36	39	20.88	20.76	20.62		
15	16QAM	75	0	21.17	20.98	20.65		



FCC SAR Test Report

Report No. : FA891009-03

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.96	22.85	22.75	24.5	0
10	QPSK	1	25	22.82	22.59	22.55		
10	QPSK	1	49	22.52	22.52	22.58		
10	QPSK	25	0	21.83	21.70	22.57	23.5	1
10	QPSK	25	12	21.91	21.77	21.59		
10	QPSK	25	25	21.73	21.59	21.51		
10	QPSK	50	0	21.79	21.66	21.59		
10	16QAM	1	0	21.92	21.81	21.65	23.5	1
10	16QAM	1	25	22.10	21.96	21.74		
10	16QAM	1	49	21.71	21.52	21.51		
10	16QAM	25	0	20.88	20.71	20.53	22.5	2
10	16QAM	25	12	20.98	20.78	20.59		
10	16QAM	25	25	20.75	20.55	20.56		
10	16QAM	50	0	20.85	20.66	20.59		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.78	22.87	22.65	24.5	0
5	QPSK	1	12	22.79	22.60	22.57		
5	QPSK	1	24	22.79	22.53	22.52		
5	QPSK	12	0	21.88	21.77	21.61	23.5	1
5	QPSK	12	7	21.92	21.74	21.57		
5	QPSK	12	13	21.89	21.74	21.57		
5	QPSK	25	0	21.90	21.71	21.54		
5	16QAM	1	0	22.15	21.99	21.80	23.5	1
5	16QAM	1	12	22.15	21.98	21.82		
5	16QAM	1	24	22.10	21.83	21.77		
5	16QAM	12	0	20.96	20.81	20.67	22.5	2
5	16QAM	12	7	20.95	20.82	20.64		
5	16QAM	12	13	20.94	20.80	20.61		
5	16QAM	25	0	20.92	20.78	20.57		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	24.12	23.98	23.89	23.79	24.5	0
20	QPSK	1	49	23.90	23.92	23.82	23.47		
20	QPSK	1	99	24.00	24.18	23.93	23.54		
20	QPSK	50	0	21.82	21.88	21.77	21.71	23.5	1
20	QPSK	50	24	21.79	21.88	21.73	21.76		
20	QPSK	50	50	21.83	21.94	21.79	21.70		
20	QPSK	100	0	21.81	21.89	21.81	21.76		
20	16QAM	1	0	22.15	22.22	22.10	21.86	23.5	1
20	16QAM	1	49	22.02	22.02	21.92	21.71		
20	16QAM	1	99	22.10	22.11	21.99	21.77		
20	16QAM	50	0	20.87	20.95	20.81	20.80	22.5	2
20	16QAM	50	24	20.86	20.94	20.77	20.76		
20	16QAM	50	50	20.85	20.97	20.82	20.74		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	23.57	23.54	23.59	23.70	24.5	0
15	QPSK	1	37	24.12	23.97	23.89	23.60		
15	QPSK	1	74	24.12	24.16	24.03	23.78		
15	QPSK	36	0	22.00	22.04	21.87	21.75	23.5	1
15	QPSK	36	20	21.79	21.86	21.74	21.73		
15	QPSK	36	39	21.85	21.88	21.77	21.79		
15	QPSK	75	0	21.97	22.02	21.86	21.71		
15	16QAM	1	0	22.50	22.50	22.51	22.11	23.5	1
15	16QAM	1	37	21.76	21.81	21.79	22.06		
15	16QAM	1	74	22.19	22.22	22.13	21.81		
15	16QAM	36	0	21.01	21.06	20.93	20.74	22.5	2
15	16QAM	36	20	20.83	20.89	20.79	20.78		
15	16QAM	36	39	20.85	20.84	20.76	20.75		
15	16QAM	75	0	20.97	21.08	20.88	20.73		



FCC SAR Test Report

Report No. : FA891009-03

Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	23.72	23.82	23.81	23.59	24.5	0
10	QPSK	1	25	23.88	24.16	23.96	23.68		
10	QPSK	1	49	23.52	23.69	23.51	23.70		
10	QPSK	25	0	21.78	21.81	21.78	21.78	23.5	1
10	QPSK	25	12	21.75	21.97	21.80	21.71		
10	QPSK	25	25	21.74	21.78	21.75	21.79		
10	QPSK	50	0	21.72	21.86	21.69	21.76		
10	16QAM	1	0	21.75	21.97	21.81	21.80	23.5	1
10	16QAM	1	25	21.98	22.17	22.04	21.77		
10	16QAM	1	49	21.78	21.81	21.89	21.80		
10	16QAM	25	0	20.81	20.90	20.83	20.76	22.5	2
10	16QAM	25	12	20.80	21.03	20.85	20.75		
10	16QAM	25	25	20.78	20.86	20.77	20.70		
10	16QAM	50	0	20.72	20.93	20.72	20.74		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	23.83	24.03	23.99	23.85	24.5	0
5	QPSK	1	12	23.84	24.00	23.86	23.55		
5	QPSK	1	24	23.85	24.00	23.86	23.60		
5	QPSK	12	0	21.75	21.94	21.79	21.75	23.5	1
5	QPSK	12	7	21.73	22.01	21.76	21.76		
5	QPSK	12	13	21.74	21.95	21.84	21.76		
5	QPSK	25	0	21.75	21.97	21.80	21.70		
5	16QAM	1	0	22.00	22.14	22.07	21.81	23.5	1
5	16QAM	1	12	21.93	22.20	22.01	21.80		
5	16QAM	1	24	21.91	22.12	22.00	21.78		
5	16QAM	12	0	20.86	20.99	20.94	20.70	22.5	2
5	16QAM	12	7	20.82	21.08	20.88	20.78		
5	16QAM	12	13	20.79	21.01	20.92	20.75		
5	16QAM	25	0	20.79	21.04	20.84	20.70		

<Reduced Power Mode for P-Sensor On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.45	20.65	20.50	21	0
20	QPSK	1	49	20.40	20.42	20.36		
20	QPSK	1	99	20.72	20.71	20.59		
20	QPSK	50	0	20.47	20.50	20.41	21	0
20	QPSK	50	24	20.45	20.47	20.36		
20	QPSK	50	50	20.57	20.46	20.41		
20	QPSK	100	0	20.49	20.54	20.36	21	0
20	16QAM	1	0	20.70	20.72	20.71		
20	16QAM	1	49	20.46	20.46	20.33		
20	16QAM	1	99	20.67	20.68	20.53	21	0
20	16QAM	50	0	20.51	20.55	20.41		
20	16QAM	50	24	20.49	20.51	20.42		
20	16QAM	50	50	20.59	20.51	20.44	21	0
20	16QAM	100	0	20.53	20.57	20.35		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.32	20.32	20.27	21	0
15	QPSK	1	37	20.33	20.32	20.20		
15	QPSK	1	74	20.77	20.71	20.62		
15	QPSK	36	0	20.63	20.62	20.60	21	0
15	QPSK	36	20	20.48	20.51	20.35		
15	QPSK	36	39	20.48	20.46	20.38		
15	QPSK	75	0	20.58	20.64	20.45	21	0
15	16QAM	1	0	20.86	20.78	20.45		
15	16QAM	1	37	20.20	20.15	20.50		
15	16QAM	1	74	20.83	20.71	20.64	21	0
15	16QAM	36	0	20.62	20.66	20.58		
15	16QAM	36	20	20.46	20.51	20.32		
15	16QAM	36	39	20.43	20.45	20.36	21	0
15	16QAM	75	0	20.64	20.67	20.50		



FCC SAR Test Report

Report No. : FA891009-03

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.71	20.72	20.56	21	0
10	QPSK	1	25	20.49	20.50	20.37		
10	QPSK	1	49	20.25	20.14	20.08		
10	QPSK	25	0	20.46	20.52	20.37	21	0
10	QPSK	25	12	20.49	20.57	20.44		
10	QPSK	25	25	20.41	20.35	20.30		
10	QPSK	50	0	20.43	20.48	20.32		
10	16QAM	1	0	20.39	20.45	20.39	21	0
10	16QAM	1	25	20.56	20.67	20.48		
10	16QAM	1	49	20.27	20.23	20.12		
10	16QAM	25	0	20.48	20.54	20.39	21	0
10	16QAM	25	12	20.52	20.57	20.44		
10	16QAM	25	25	20.47	20.39	20.31		
10	16QAM	50	0	20.42	20.53	20.37		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.80	20.89	20.70	21	0
5	QPSK	1	12	20.46	20.52	20.38		
5	QPSK	1	24	20.46	20.44	20.35		
5	QPSK	12	0	20.54	20.62	20.45	21	0
5	QPSK	12	7	20.49	20.59	20.41		
5	QPSK	12	13	20.52	20.56	20.42		
5	QPSK	25	0	20.50	20.57	20.45		
5	16QAM	1	0	20.64	20.73	20.51	21	0
5	16QAM	1	12	20.58	20.69	20.50		
5	16QAM	1	24	20.60	20.58	20.51		
5	16QAM	12	0	20.52	20.60	20.46	21	0
5	16QAM	12	7	20.51	20.62	20.45		
5	16QAM	12	13	20.50	20.60	20.42		
5	16QAM	25	0	20.55	20.60	20.46		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	20.90	20.35	20.62	20.62	21	0
20	QPSK	1	49	20.76	20.77	20.60	20.50		
20	QPSK	1	99	20.95	20.98	20.56	20.53		
20	QPSK	50	0	20.83	20.86	20.70	20.55	21	0
20	QPSK	50	24	20.79	20.82	20.63	20.54		
20	QPSK	50	50	20.91	20.92	20.59	20.64		
20	QPSK	100	0	20.88	20.88	20.72	20.61		
20	16QAM	1	0	20.96	20.99	20.98	20.80	21	0
20	16QAM	1	49	20.74	20.88	20.73	20.50		
20	16QAM	1	99	20.94	20.91	20.77	20.62		
20	16QAM	50	0	20.90	20.90	20.74	20.66	21	0
20	16QAM	50	24	20.83	20.86	20.60	20.55		
20	16QAM	50	50	20.96	20.91	20.61	20.60		
20	16QAM	100	0	20.95	20.92	20.70	20.62		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	20.43	20.72	20.38	20.16	21	0
15	QPSK	1	37	20.76	20.72	20.56	20.40		
15	QPSK	1	74	20.91	20.94	20.88	20.73		
15	QPSK	36	0	20.98	20.93	20.84	20.70	21	0
15	QPSK	36	20	20.79	20.86	20.71	20.54		
15	QPSK	36	39	20.83	20.92	20.71	20.58		
15	QPSK	75	0	20.90	20.99	20.82	20.65		
15	16QAM	1	0	20.95	20.91	20.95	20.94	21	0
15	16QAM	1	37	20.48	20.73	20.35	20.34		
15	16QAM	1	74	20.96	20.93	20.95	20.83		
15	16QAM	36	0	20.92	20.91	20.88	20.69	21	0
15	16QAM	36	20	20.78	20.83	20.69	20.55		
15	16QAM	36	39	20.78	20.86	20.68	20.54		
15	16QAM	75	0	20.93	20.93	20.83	20.73		



FCC SAR Test Report

Report No. : FA891009-03

Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.65	20.45	20.64	20.50	21	0
10	QPSK	1	25	20.73	20.82	20.70	20.61		
10	QPSK	1	49	20.50	20.52	20.45	20.30		
10	QPSK	25	0	20.76	20.56	20.42	20.56	21	0
10	QPSK	25	12	20.81	20.66	20.74	20.40		
10	QPSK	25	25	20.63	20.68	20.56	20.49		
10	QPSK	50	0	20.72	20.71	20.69	20.56		
10	16QAM	1	0	20.70	20.72	20.62	20.50	21	0
10	16QAM	1	25	20.85	20.87	20.72	20.66		
10	16QAM	1	49	20.52	20.53	20.40	20.29		
10	16QAM	25	0	20.77	20.74	20.69	20.59	21	0
10	16QAM	25	12	20.82	20.83	20.80	20.66		
10	16QAM	25	25	20.67	20.64	20.61	20.50		
10	16QAM	50	0	20.76	20.76	20.74	20.62		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.65	20.45	20.55	20.60	21	0
5	QPSK	1	12	20.69	20.79	20.71	20.65		
5	QPSK	1	24	20.69	20.78	20.74	20.64		
5	QPSK	12	0	20.80	20.95	20.84	20.74	21	0
5	QPSK	12	7	20.81	20.88	20.78	20.73		
5	QPSK	12	13	20.76	20.86	20.73	20.67		
5	QPSK	25	0	20.80	20.88	20.80	20.73	21	0
5	16QAM	1	0	20.88	20.97	20.96	20.85		
5	16QAM	1	12	20.82	20.91	20.83	20.84		
5	16QAM	1	24	20.84	20.91	20.89	20.79	21	0
5	16QAM	12	0	20.80	20.92	20.82	20.76		
5	16QAM	12	7	20.79	20.86	20.80	20.71		
5	16QAM	12	13	20.76	20.84	20.76	20.70		
5	16QAM	25	0	20.80	20.91	20.80	20.73		

<Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.45	20.65	20.50	21	0
20	QPSK	1	49	20.40	20.42	20.36		
20	QPSK	1	99	20.72	20.71	20.59		
20	QPSK	50	0	20.47	20.50	20.41	21	0
20	QPSK	50	24	20.45	20.47	20.36		
20	QPSK	50	50	20.57	20.46	20.41		
20	QPSK	100	0	20.49	20.54	20.36	21	0
20	16QAM	1	0	20.70	20.72	20.71		
20	16QAM	1	49	20.46	20.46	20.33		
20	16QAM	1	99	20.67	20.68	20.53	21	0
20	16QAM	50	0	20.51	20.55	20.41		
20	16QAM	50	24	20.49	20.51	20.42		
20	16QAM	50	50	20.59	20.51	20.44		
20	16QAM	100	0	20.53	20.57	20.35		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.32	20.32	20.27	21	0
15	QPSK	1	37	20.33	20.32	20.20		
15	QPSK	1	74	20.77	20.71	20.62		
15	QPSK	36	0	20.63	20.62	20.60	21	0
15	QPSK	36	20	20.48	20.51	20.35		
15	QPSK	36	39	20.48	20.46	20.38		
15	QPSK	75	0	20.58	20.64	20.45	21	0
15	16QAM	1	0	20.86	20.78	20.45		
15	16QAM	1	37	20.20	20.15	20.50		
15	16QAM	1	74	20.83	20.71	20.64	21	0
15	16QAM	36	0	20.62	20.66	20.58		
15	16QAM	36	20	20.46	20.51	20.32		
15	16QAM	36	39	20.43	20.45	20.36		
15	16QAM	75	0	20.64	20.67	20.50		



FCC SAR Test Report

Report No. : FA891009-03

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.71	20.72	20.56	21	0
10	QPSK	1	25	20.49	20.50	20.37		
10	QPSK	1	49	20.25	20.14	20.08		
10	QPSK	25	0	20.46	20.52	20.37	21	0
10	QPSK	25	12	20.49	20.57	20.44		
10	QPSK	25	25	20.41	20.35	20.30		
10	QPSK	50	0	20.43	20.48	20.32		
10	16QAM	1	0	20.39	20.45	20.39	21	0
10	16QAM	1	25	20.56	20.67	20.48		
10	16QAM	1	49	20.27	20.23	20.12		
10	16QAM	25	0	20.48	20.54	20.39	21	0
10	16QAM	25	12	20.52	20.57	20.44		
10	16QAM	25	25	20.47	20.39	20.31		
10	16QAM	50	0	20.42	20.53	20.37		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.80	20.89	20.70	21	0
5	QPSK	1	12	20.46	20.52	20.38		
5	QPSK	1	24	20.46	20.44	20.35		
5	QPSK	12	0	20.54	20.62	20.45	21	0
5	QPSK	12	7	20.49	20.59	20.41		
5	QPSK	12	13	20.52	20.56	20.42		
5	QPSK	25	0	20.50	20.57	20.45		
5	16QAM	1	0	20.64	20.73	20.51	21	0
5	16QAM	1	12	20.58	20.69	20.50		
5	16QAM	1	24	20.60	20.58	20.51		
5	16QAM	12	0	20.52	20.60	20.46	21	0
5	16QAM	12	7	20.51	20.62	20.45		
5	16QAM	12	13	20.50	20.60	20.42		
5	16QAM	25	0	20.55	20.60	20.46		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140	21	0
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	20.90	20.35	20.62	20.62		
20	QPSK	1	49	20.76	20.77	20.60	20.50	21	0
20	QPSK	1	99	20.95	20.98	20.56	20.53		
20	QPSK	50	0	20.83	20.86	20.70	20.55		
20	QPSK	50	24	20.79	20.82	20.63	20.54	21	0
20	QPSK	50	50	20.91	20.92	20.59	20.64		
20	QPSK	100	0	20.88	20.88	20.72	20.61		
20	16QAM	1	0	20.96	20.99	20.98	20.80	21	0
20	16QAM	1	49	20.74	20.88	20.73	20.50		
20	16QAM	1	99	20.94	20.91	20.77	20.62		
20	16QAM	50	0	20.90	20.90	20.74	20.66	21	0
20	16QAM	50	24	20.83	20.86	20.60	20.55		
20	16QAM	50	50	20.96	20.91	20.61	20.60		
20	16QAM	100	0	20.95	20.92	20.70	20.62	21	0
Channel				40115	40395	40685	41165		
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	20.43	20.72	20.38	20.16	21	0
15	QPSK	1	37	20.76	20.72	20.56	20.40		
15	QPSK	1	74	20.91	20.94	20.88	20.73		
15	QPSK	36	0	20.98	20.93	20.84	20.70	21	0
15	QPSK	36	20	20.79	20.86	20.71	20.54		
15	QPSK	36	39	20.83	20.92	20.71	20.58		
15	QPSK	75	0	20.90	20.99	20.82	20.65	21	0
15	16QAM	1	0	20.95	20.91	20.95	20.94		
15	16QAM	1	37	20.48	20.73	20.35	20.34		
15	16QAM	1	74	20.96	20.93	20.95	20.83	21	0
15	16QAM	36	0	20.92	20.91	20.88	20.69		
15	16QAM	36	20	20.78	20.83	20.69	20.55		
15	16QAM	36	39	20.78	20.86	20.68	20.54	21	0
15	16QAM	75	0	20.93	20.93	20.83	20.73		



FCC SAR Test Report

Report No. : FA891009-03

Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.65	20.45	20.64	20.50	21	0
10	QPSK	1	25	20.73	20.82	20.70	20.61		
10	QPSK	1	49	20.50	20.52	20.45	20.30		
10	QPSK	25	0	20.76	20.56	20.42	20.56	21	0
10	QPSK	25	12	20.81	20.66	20.74	20.40		
10	QPSK	25	25	20.63	20.68	20.56	20.49		
10	QPSK	50	0	20.72	20.71	20.69	20.56		
10	16QAM	1	0	20.70	20.72	20.62	20.50	21	0
10	16QAM	1	25	20.85	20.87	20.72	20.66		
10	16QAM	1	49	20.52	20.53	20.40	20.29		
10	16QAM	25	0	20.77	20.74	20.69	20.59	21	0
10	16QAM	25	12	20.82	20.83	20.80	20.66		
10	16QAM	25	25	20.67	20.64	20.61	20.50		
10	16QAM	50	0	20.76	20.76	20.74	20.62		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.65	20.45	20.55	20.60	21	0
5	QPSK	1	12	20.69	20.79	20.71	20.65		
5	QPSK	1	24	20.69	20.78	20.74	20.64		
5	QPSK	12	0	20.80	20.95	20.84	20.74	21	0
5	QPSK	12	7	20.81	20.88	20.78	20.73		
5	QPSK	12	13	20.76	20.86	20.73	20.67		
5	QPSK	25	0	20.80	20.88	20.80	20.73	21	0
5	16QAM	1	0	20.88	20.97	20.96	20.85		
5	16QAM	1	12	20.82	20.91	20.83	20.84		
5	16QAM	1	24	20.84	20.91	20.89	20.79	21	0
5	16QAM	12	0	20.80	20.92	20.82	20.76		
5	16QAM	12	7	20.79	20.86	20.80	20.71		
5	16QAM	12	13	20.76	20.84	20.76	20.70		
5	16QAM	25	0	20.80	20.91	20.80	20.73		



<Reduced Power Mode for Handheld>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.58	21.58	21.62	23	0
20	QPSK	1	49	21.92	21.93	21.86		
20	QPSK	1	99	22.19	22.20	22.10		
20	QPSK	50	0	21.97	22.05	21.95	23	0
20	QPSK	50	24	22.00	21.97	21.88		
20	QPSK	50	50	22.08	22.00	21.93		
20	QPSK	100	0	22.03	22.02	21.86	23	0
20	16QAM	1	0	22.28	22.23	22.27		
20	16QAM	1	49	22.08	22.04	21.90		
20	16QAM	1	99	22.28	22.25	22.13	23	0
20	16QAM	50	0	21.49	21.55	21.47		
20	16QAM	50	24	21.47	21.51	21.41		
20	16QAM	50	50	21.59	21.52	21.44	23	0
20	16QAM	100	0	21.57	21.57	21.37		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	21.85	21.82	21.75	23	0
15	QPSK	1	37	21.88	21.92	21.72		
15	QPSK	1	74	22.28	22.20	22.12		
15	QPSK	36	0	22.13	22.15	22.08	23	0
15	QPSK	36	20	21.98	22.01	21.81		
15	QPSK	36	39	21.99	21.95	21.90		
15	QPSK	75	0	22.10	22.14	21.98	23	0
15	16QAM	1	0	22.30	22.23	22.12		
15	16QAM	1	37	22.27	22.02	21.59		
15	16QAM	1	74	22.12	22.29	22.19	23	0
15	16QAM	36	0	21.59	21.65	21.62		
15	16QAM	36	20	21.45	21.47	21.35		
15	16QAM	36	39	21.43	21.43	21.36	23	0
15	16QAM	75	0	21.65	21.67	21.48		



FCC SAR Test Report

Report No. : FA891009-03

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	21.12	21.18	21.13	23	0
10	QPSK	1	25	21.96	21.99	21.83		
10	QPSK	1	49	21.71	21.63	21.54		
10	QPSK	25	0	21.94	22.02	21.84	23	0
10	QPSK	25	12	21.98	22.05	21.87		
10	QPSK	25	25	21.92	21.85	21.76		
10	QPSK	50	0	21.91	21.98	21.83		
10	16QAM	1	0	21.91	22.01	21.90	23	0
10	16QAM	1	25	22.11	22.15	21.97		
10	16QAM	1	49	21.82	21.73	21.61		
10	16QAM	25	0	21.41	21.56	21.35	23	0
10	16QAM	25	12	21.47	21.60	21.40		
10	16QAM	25	25	21.42	21.38	21.29		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.31	21.30	21.16	23	0
5	QPSK	1	12	21.93	22.03	21.83		
5	QPSK	1	24	21.95	21.93	21.85		
5	QPSK	12	0	21.98	22.06	21.95	23	0
5	QPSK	12	7	21.99	22.08	21.94		
5	QPSK	12	13	22.00	22.07	21.91		
5	QPSK	25	0	22.01	22.09	21.94		
5	16QAM	1	0	22.18	22.21	22.05	23	0
5	16QAM	1	12	22.14	22.16	22.03		
5	16QAM	1	24	22.19	22.06	22.02		
5	16QAM	12	0	21.45	21.57	21.44	23	0
5	16QAM	12	7	21.46	21.57	21.43		
5	16QAM	12	13	21.46	21.55	21.40		
5	16QAM	25	0	21.52	21.56	21.42		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	22.38	22.60	22.39	22.32	23	0
20	QPSK	1	49	22.35	22.32	22.19	22.04		
20	QPSK	1	99	22.49	22.61	22.40	22.25		
20	QPSK	50	0	22.42	22.41	22.31	22.11	23	0
20	QPSK	50	24	22.36	22.33	22.23	22.06		
20	QPSK	50	50	22.47	22.50	22.18	22.19		
20	QPSK	100	0	22.44	22.45	22.28	22.16		
20	16QAM	1	0	22.77	22.75	22.74	22.58	23	0
20	16QAM	1	49	22.49	22.45	22.31	22.30		
20	16QAM	1	99	22.61	22.76	22.46	22.57		
20	16QAM	50	0	21.44	21.40	21.32	21.13	23	0
20	16QAM	50	24	21.40	21.37	21.26	21.13		
20	16QAM	50	50	21.51	21.43	21.24	21.15		
20	16QAM	100	0	21.43	21.46	21.31	21.15		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	22.04	22.02	21.91	22.60	23	0
15	QPSK	1	37	22.37	22.25	22.16	22.01		
15	QPSK	1	74	22.66	22.58	22.44	22.28		
15	QPSK	36	0	22.51	22.55	22.39	22.24	23	0
15	QPSK	36	20	22.32	22.37	22.25	22.11		
15	QPSK	36	39	22.36	22.44	22.27	22.11		
15	QPSK	75	0	22.46	22.53	22.36	22.20		
15	16QAM	1	0	22.80	22.78	22.70	22.78	23	0
15	16QAM	1	37	22.45	22.43	22.40	22.24		
15	16QAM	1	74	22.74	22.68	22.60	22.47		
15	16QAM	36	0	21.52	21.53	21.43	21.21	23	0
15	16QAM	36	20	21.32	21.34	21.22	21.06		
15	16QAM	36	39	21.33	21.38	21.21	21.07		
15	16QAM	75	0	21.42	21.56	21.38	21.26		



FCC SAR Test Report

Report No. : FA891009-03

Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	22.23	22.16	22.15	22.06	23	0
10	QPSK	1	25	22.27	22.32	22.24	22.12		
10	QPSK	1	49	22.01	22.02	21.92	21.82		
10	QPSK	25	0	22.31	22.27	22.22	22.16	23	0
10	QPSK	25	12	22.33	22.35	22.32	22.21		
10	QPSK	25	25	22.14	22.20	22.14	22.07		
10	QPSK	50	0	22.22	22.29	22.20	22.08		
10	16QAM	1	0	22.25	22.46	22.27	22.14	23	0
10	16QAM	1	25	22.45	22.49	22.41	22.27		
10	16QAM	1	49	22.11	22.08	22.02	21.99		
10	16QAM	25	0	21.26	21.26	21.22	21.18	23	0
10	16QAM	25	12	21.33	21.36	21.34	21.23		
10	16QAM	25	25	21.15	21.22	21.16	21.10		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	22.31	22.29	22.35	22.20	23	0
5	QPSK	1	12	22.22	22.32	22.22	22.13		
5	QPSK	1	24	22.25	22.30	22.26	22.14		
5	QPSK	12	0	22.33	22.48	22.36	22.27	23	0
5	QPSK	12	7	22.34	22.37	22.31	22.25		
5	QPSK	12	13	22.27	22.39	22.25	22.19		
5	QPSK	25	0	22.33	22.42	22.32	22.25		
5	16QAM	1	0	22.47	22.51	22.50	22.45	23	0
5	16QAM	1	12	22.42	22.55	22.43	22.36		
5	16QAM	1	24	22.38	22.46	22.47	22.39		
5	16QAM	12	0	21.31	21.39	21.34	21.26	23	0
5	16QAM	12	7	21.32	21.37	21.28	21.20		
5	16QAM	12	13	21.26	21.33	21.26	21.18		
5	16QAM	25	0	21.31	21.38	21.27	21.25		

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.36	17.00	97.28
		6	2437	16.24	17.00	
		11	2462	16.82	17.00	
	802.11g 6Mbps	1	2412	11.33	12.00	86.68
		6	2437	13.89	14.00	
		11	2462	10.57	11.00	
	802.11n-HT20 MCS0	1	2412	11.30	12.00	86.40
		6	2437	11.33	12.00	
		11	2462	9.03	9.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.73	15.00	87.22
		40	5200	14.32	15.00	
		44	5220	14.43	15.00	
		48	5240	14.40	15.00	
	802.11n-HT20 MCS0	36	5180	13.73	15.00	86.53
		40	5200	14.20	15.00	
		44	5220	14.29	15.00	
		48	5240	14.07	15.00	
	802.11n-HT40 MCS0	38	5190	10.53	11.50	88.18
		46	5230	14.05	15.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.17	15.00	87.22
		56	5280	14.11	15.00	
		60	5300	14.14	15.00	
		64	5320	14.20	15.00	
	802.11n-HT20 MCS0	52	5260	14.04	15.00	86.53
		56	5280	14.08	15.00	
		60	5300	14.14	15.00	
		64	5320	14.30	15.00	
	802.11n-HT40 MCS0	54	5270	14.27	15.00	88.18
		62	5310	11.00	12.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	14.19	15.00	87.22
		116	5580	14.30	15.00	
		124	5620	14.18	15.00	
		132	5660	14.21	15.00	
		140	5700	14.32	15.00	
	802.11n-HT20 MCS0	100	5500	14.21	15.00	86.53
		116	5580	13.91	15.00	
		124	5620	13.95	15.00	
		132	5660	13.98	15.00	
		140	5700	12.44	13.00	
	802.11n-HT40 MCS0	102	5510	12.04	13.00	88.18
		110	5550	14.23	15.00	
		126	5630	14.34	15.00	
		134	5670	14.40	15.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	14.32	15.00	87.22
		157	5785	14.30	15.00	
		165	5825	14.20	15.00	
	802.11n-HT20 MCS0	149	5745	14.24	15.00	86.53
		157	5785	14.25	15.00	
		165	5825	14.18	15.00	
	802.11n-HT40 MCS0	151	5755	14.43	15.00	88.18
		159	5795	13.81	15.00	

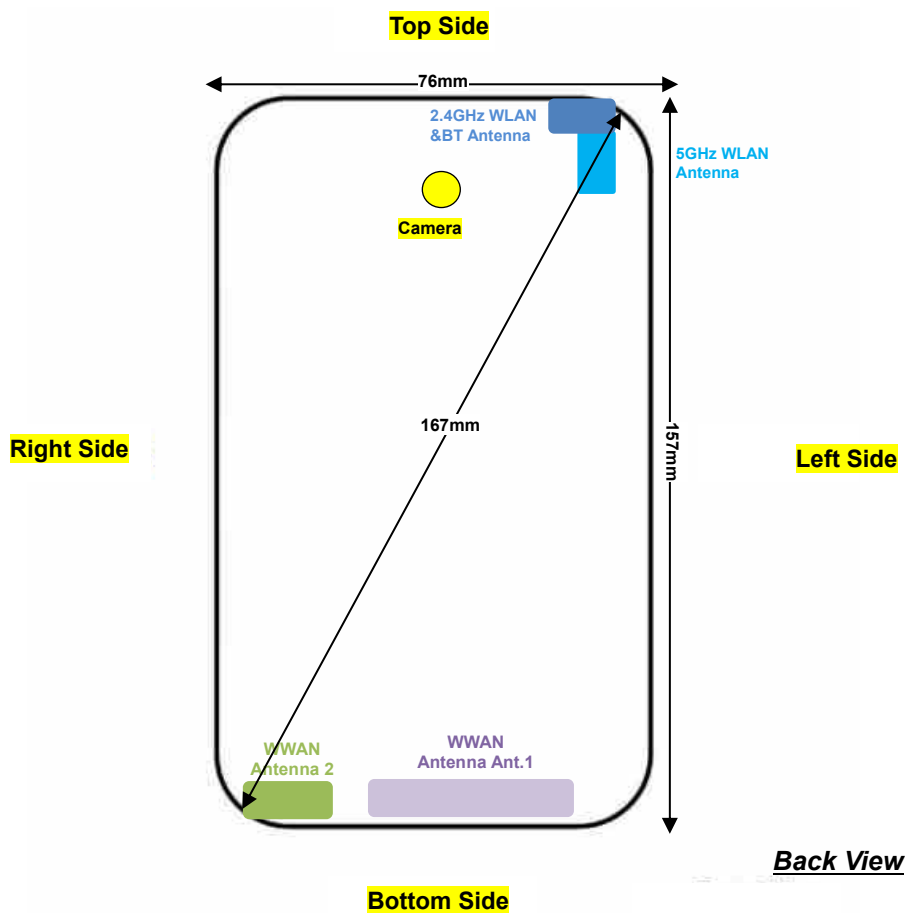
**<2.4GHz Bluetooth>****General Note:**

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.13 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	8.95
	CH 39	2441	10.89
	CH 78	2480	9.77
Tune-up limit (dBm)			11.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	0.18
	CH 19	2440	1.86
	CH 39	2480	0.62
Tune-up Limit			2.00

14. Antenna Location



Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	Yes	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	No	Yes
5GHz WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

1. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
6. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV, and LTE band 2/4/7/38/41.
7. This device hotspot reduced power and P-sensor reduced power level are the same for LTE Band 7/38/41. And for other Bands are differences.
8. P-sensor can detect handheld state, WCDMA band II/IV, LTE band 2/4/7/38/41 for front/back/bottom sides for front/back/top sides of product specific 10g SAR condition reduced powers will be active.
9. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device and WWAN antenna 2 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
10. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to reduced power mode for product specific 10g SAR is higher than 1.2W/kg of WCDMA Band II/IV, LTE Band 2/4/7/38/41, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode/p-sensor on is implemented in GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5 / 38 SAR test was covered by Band 26 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - c. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Right Cheek	Full	128	824.2	26.67	27.50	1.211	0.02	0.153	0.185
	GSM850	GPRS 4 Tx slots	Right Tilted	Full	128	824.2	26.67	27.50	1.211	-0.07	0.105	0.127
01	GSM850	GPRS 4 Tx slots	Left Cheek	Full	128	824.2	26.67	27.50	1.211	-0.02	0.214	0.259
	GSM850	GPRS 4 Tx slots	Left Tilted	Full	128	824.2	26.67	27.50	1.211	0.05	0.087	0.106
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Full	512	1850.2	23.58	24.50	1.236	-0.03	0.064	0.079
	GSM1900	GPRS 4 Tx slots	Right Tilted	Full	512	1850.2	23.58	24.50	1.236	0.06	0.037	0.046
	GSM1900	GPRS 4 Tx slots	Left Cheek	Full	512	1850.2	23.58	24.50	1.236	0.06	0.052	0.064
	GSM1900	GPRS 4 Tx slots	Left Tilted	Full	512	1850.2	23.58	24.50	1.236	0.02	0.033	0.041

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Full	4132	826.4	23.40	23.50	1.023	0.01	0.191	0.195
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Full	4132	826.4	23.40	23.50	1.023	0.01	0.118	0.121
03	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Full	4132	826.4	23.40	23.50	1.023	-0.02	0.288	0.295
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Full	4132	826.4	23.40	23.50	1.023	0.02	0.135	0.138
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Full	1513	1752.6	23.08	23.50	1.102	0.03	0.085	0.094
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Full	1513	1752.6	23.08	23.50	1.102	-0.14	0.049	0.054
04	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Full	1513	1752.6	23.08	23.50	1.102	-0.13	0.106	0.117
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Full	1513	1752.6	23.08	23.50	1.102	0.06	0.037	0.041
05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Full	9538	1907.6	22.99	23.50	1.125	-0.13	0.136	0.153
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Full	9538	1907.6	22.99	23.50	1.125	0.06	0.060	0.067
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Full	9538	1907.6	22.99	23.50	1.125	-0.13	0.106	0.119
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Full	9538	1907.6	22.99	23.50	1.125	0.06	0.037	0.041



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full	26865	831.5	22.95	23.50	1.135	0.02	0.178	0.202
	LTE Band 26	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	22.12	23.00	1.225	0.06	0.109	0.133
	LTE Band 26	15M	QPSK	1	37	Right Tilted	Full	26865	831.5	22.95	23.50	1.135	0.03	0.108	0.123
	LTE Band 26	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	22.12	23.00	1.225	0.05	0.063	0.077
06	LTE Band 26	15M	QPSK	1	37	Left Cheek	Full	26865	831.5	22.95	23.50	1.135	-0.09	0.252	0.286
	LTE Band 26	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	22.12	23.00	1.225	0.02	0.131	0.160
	LTE Band 26	15M	QPSK	1	37	Left Tilted	Full	26865	831.5	22.95	23.50	1.135	0.02	0.117	0.133
	LTE Band 26	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	22.12	23.00	1.225	0.02	0.063	0.077
	LTE Band 4	20M	QPSK	1	99	Right Cheek	Full	20175	1732.5	22.69	23.50	1.205	-0.13	0.108	0.130
	LTE Band 4	20M	QPSK	50	50	Right Cheek	Full	20175	1732.5	21.67	23.00	1.358	0.03	0.072	0.098
	LTE Band 4	20M	QPSK	1	99	Right Tilted	Full	20175	1732.5	22.69	23.50	1.205	0.05	0.062	0.075
	LTE Band 4	20M	QPSK	50	50	Right Tilted	Full	20175	1732.5	21.67	23.00	1.358	0.03	0.042	0.057
07	LTE Band 4	20M	QPSK	1	99	Left Cheek	Full	20175	1732.5	22.69	23.50	1.205	-0.09	0.135	0.163
	LTE Band 4	20M	QPSK	50	50	Left Cheek	Full	20175	1732.5	21.67	23.00	1.358	0.03	0.090	0.122
	LTE Band 4	20M	QPSK	1	99	Left Tilted	Full	20175	1732.5	22.69	23.50	1.205	-0.03	0.054	0.065
	LTE Band 4	20M	QPSK	50	50	Left Tilted	Full	20175	1732.5	21.67	23.00	1.358	0.06	0.036	0.049
08	LTE Band 2	20M	QPSK	1	0	Right Cheek	Full	18700	1860	22.58	23.50	1.236	-0.14	0.112	0.138
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Full	18700	1860	22.21	23.00	1.199	-0.18	0.073	0.088
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Full	18700	1860	22.58	23.50	1.236	0.03	0.062	0.076
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Full	18700	1860	22.21	23.00	1.199	0.03	0.038	0.046
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Full	18700	1860	22.58	23.50	1.236	0.06	0.106	0.131
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Full	18700	1860	22.21	23.00	1.199	0.02	0.066	0.079
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Full	18700	1860	22.58	23.50	1.236	0.03	0.038	0.047
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Full	18700	1860	22.21	23.00	1.199	0.06	0.024	0.028
09	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	20850	2510	22.96	23.50	1.132	-0.05	0.341	0.386
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Full	20850	2510	21.89	23.00	1.291	0.03	0.194	0.250
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Full	20850	2510	22.96	23.50	1.132	0.06	0.150	0.170
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Full	20850	2510	21.89	23.00	1.291	0.04	0.083	0.107
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Full	20850	2510	22.96	23.50	1.132	0.03	0.258	0.292
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Full	20850	2510	21.89	23.00	1.291	0.03	0.133	0.172
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Full	20850	2510	22.96	23.50	1.132	0.06	0.298	0.337
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Full	20850	2510	21.89	23.00	1.291	0.05	0.155	0.200



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
10	LTE Band 41	20M	QPSK	1	99	Right Cheek	Full	40400	2571	24.18	24.50	1.076	62.9	1.006	-0.03	0.226	0.245
	LTE Band 41	20M	QPSK	50	50	Right Cheek	Full	40400	2571	21.94	23.50	1.432	62.9	1.006	0.06	0.138	0.199
	LTE Band 41	20M	QPSK	1	99	Right Tilted	Full	40400	2571	24.18	24.50	1.076	62.9	1.006	0.03	0.095	0.103
	LTE Band 41	20M	QPSK	50	50	Right Tilted	Full	40400	2571	21.94	23.50	1.432	62.9	1.006	0.02	0.057	0.083
	LTE Band 41	20M	QPSK	1	99	Left Cheek	Full	40400	2571	24.18	24.50	1.076	62.9	1.006	0.03	0.149	0.161
	LTE Band 41	20M	QPSK	50	50	Left Cheek	Full	40400	2571	21.94	23.50	1.432	62.9	1.006	0.08	0.090	0.129
	LTE Band 41	20M	QPSK	1	99	Left Tilted	Full	40400	2571	24.18	24.50	1.076	62.9	1.006	-0.03	0.183	0.198
	LTE Band 41	20M	QPSK	50	50	Left Tilted	Full	40400	2571	21.94	23.50	1.432	62.9	1.006	-0.06	0.106	0.153

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	11	2462	16.82	17.00	1.042	97.28	1.028	-0.03	0.747	0.451	0.483
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	16.82	17.00	1.042	97.28	1.028	-0.06	0.703	0.370	0.396
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	11	2462	16.82	17.00	1.042	97.28	1.028		0.531		
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	11	2462	16.82	17.00	1.042	97.28	1.028		0.488		

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	Bluetooth	1Mbps	Right Cheek	39	2441	10.89	11.50	1.151	77.13	1.080	0.03	0.185	0.230
	Bluetooth	1Mbps	Right Tilted	39	2441	10.89	11.50	1.151	77.13	1.080	-0.07	0.180	0.224
	Bluetooth	1Mbps	Left Cheek	39	2441	10.89	11.50	1.151	77.13	1.080	0.03	0.112	0.139
	Bluetooth	1Mbps	Left Tilted	39	2441	10.89	11.50	1.151	77.13	1.080	0.03	0.103	0.128

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	54	5270	14.27	15.00	1.184	88.18	1.134	-0.02	1.217	0.539	0.724
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	54	5270	14.27	15.00	1.184	88.18	1.134	0.08	1.079	0.477	0.640
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	54	5270	14.27	15.00	1.184	88.18	1.134		0.686		
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	54	5270	14.27	15.00	1.184	88.18	1.134		0.679		
14	WLAN5.5GHz	802.11n-HT40 MCS0	Right Cheek	134	5670	14.40	15.00	1.149	88.18	1.134	-0.06	1.239	0.507	0.661
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Tilted	134	5670	14.40	15.00	1.149	88.18	1.134	0.06	0.998	0.435	0.567
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	134	5670	14.40	15.00	1.149	88.18	1.134		0.984		
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	134	5670	14.40	15.00	1.149	88.18	1.134		0.838		
15	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Cheek	151	5755	14.43	15.00	1.141	88.18	1.134	0.04	1.054	0.390	0.505
	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Tilted	151	5755	14.43	15.00	1.141	88.18	1.134	0.08	0.915	0.368	0.476
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Cheek	151	5755	14.43	15.00	1.141	88.18	1.134		0.734		
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Tilted	151	5755	14.43	15.00	1.141	88.18	1.134		0.548		

**15.2 Hotspot SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4Tx slots)	Front	5	Full	128	824.2	26.67	27.50	1.211	-0.05	0.458	0.554
	GSM850	GPRS (4Tx slots)	Back	5	Full	128	824.2	26.67	27.50	1.211	-0.02	1.010	1.223
	GSM850	GPRS (4Tx slots)	Back	5	Full	189	836.4	26.45	27.50	1.274	-0.09	0.951	1.211
16	GSM850	GPRS (4Tx slots)	Back	5	Full	251	848.8	26.51	27.50	1.256	-0.01	1.040	1.306
	GSM850	GPRS (4Tx slots)	Left Side	5	Full	128	824.2	26.67	27.50	1.211	0.05	0.456	0.552
	GSM850	GPRS (4Tx slots)	Right Side	5	Full	128	824.2	26.67	27.50	1.211	0.02	0.208	0.252
	GSM850	GPRS (4Tx slots)	Bottom Side	5	Full	128	824.2	26.67	27.50	1.211	0.02	0.483	0.585
	GSM1900	GPRS (4Tx slots)	Front	5	Hotspot On	512	1850.2	16.66	18.00	1.361	0.01	0.587	0.799
	GSM1900	GPRS (4Tx slots)	Back	5	Hotspot On	512	1850.2	16.66	18.00	1.361	-0.03	0.863	1.175
	GSM1900	GPRS (4Tx slots)	Back	5	Hotspot On	661	1880	16.65	18.00	1.365	0.05	0.791	1.079
	GSM1900	GPRS (4Tx slots)	Back	5	Hotspot On	810	1909.8	16.63	18.00	1.371	0.05	0.836	1.146
	GSM1900	GPRS (4Tx slots)	Left Side	5	Hotspot On	512	1850.2	16.66	18.00	1.361	-0.03	0.041	0.056
	GSM1900	GPRS (4Tx slots)	Right Side	5	Hotspot On	512	1850.2	16.66	18.00	1.361	-0.02	0.021	0.028
	GSM1900	GPRS (4Tx slots)	Bottom Side	5	Hotspot On	512	1850.2	16.66	18.00	1.361	-0.11	0.940	1.280
	GSM1900	GPRS (4Tx slots)	Bottom Side	5	Hotspot On	661	1880	16.65	18.00	1.365	-0.11	0.885	1.208
17	GSM1900	GPRS (4Tx slots)	Bottom Side	5	Hotspot On	810	1909.8	16.63	18.00	1.371	-0.1	0.986	1.352



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	Full	4132	826.4	23.40	23.50	1.023	0.02	0.663	0.678
	WCDMA Band V	RMC 12.2Kbps	Back	5	Full	4132	826.4	23.40	23.50	1.023	0.01	0.949	0.971
	WCDMA Band V	RMC 12.2Kbps	Back	5	Full	4182	836.4	23.37	23.50	1.030	0.02	1.100	1.133
18	WCDMA Band V	RMC 12.2Kbps	Back	5	Full	4233	846.6	23.34	23.50	1.038	-0.01	1.140	1.183
	WCDMA Band V	RMC 12.2Kbps	Left Side	5	Full	4132	826.4	23.40	23.50	1.023	0.01	0.381	0.390
	WCDMA Band V	RMC 12.2Kbps	Right Side	5	Full	4132	826.4	23.40	23.50	1.023	0.02	0.164	0.168
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	5	Full	4132	826.4	23.40	23.50	1.023	0.02	0.718	0.735
	WCDMA Band IV	RMC 12.2Kbps	Front	5	Hotspot On	1513	1752.6	15.59	16.00	1.099	0.04	0.626	0.688
	WCDMA Band IV	RMC 12.2Kbps	Back	5	Hotspot On	1513	1752.6	15.59	16.00	1.099	0.04	0.917	1.008
	WCDMA Band IV	RMC 12.2Kbps	Back	5	Hotspot On	1312	1712.4	15.53	16.00	1.114	-0.12	0.874	0.974
	WCDMA Band IV	RMC 12.2Kbps	Back	5	Hotspot On	1413	1732.6	15.57	16.00	1.104	-0.09	0.987	1.090
	WCDMA Band IV	RMC 12.2Kbps	Left Side	5	Hotspot On	1513	1752.6	15.59	16.00	1.099	-0.03	0.053	0.058
	WCDMA Band IV	RMC 12.2Kbps	Right Side	5	Hotspot On	1513	1752.6	15.59	16.00	1.099	-0.03	0.033	0.036
19	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	5	Hotspot On	1513	1752.6	15.59	16.00	1.099	-0.04	1.220	1.341
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	5	Hotspot On	1312	1712.4	15.53	16.00	1.114	-0.13	0.975	1.086
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	5	Hotspot On	1413	1732.6	15.57	16.00	1.104	-0.11	1.100	1.214
	WCDMA Band II	RMC 12.2Kbps	Front	5	Hotspot On	9538	1907.6	14.71	15.00	1.069	0.08	0.570	0.609
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9538	1907.6	14.71	15.00	1.069	0.08	0.977	1.044
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9262	1852.4	14.63	15.00	1.089	0.05	0.907	0.988
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9400	1880	14.63	15.00	1.089	0.07	0.907	0.988
	WCDMA Band II	RMC 12.2Kbps	Left Side	5	Hotspot On	9538	1907.6	14.71	15.00	1.069	0.02	0.037	0.040
	WCDMA Band II	RMC 12.2Kbps	Right Side	5	Hotspot On	9538	1907.6	14.71	15.00	1.069	0.01	0.024	0.025
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9538	1907.6	14.71	15.00	1.069	-0.12	1.080	1.155
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9262	1852.4	14.63	15.00	1.089	-0.12	1.020	1.111
20	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9400	1880	14.63	15.00	1.089	-0.06	1.100	1.198



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
21	LTE Band 26	15M	QPSK	1	37	Front	5	Full	26865	831.5	22.95	23.50	1.135	-0.01	0.637	0.723
	LTE Band 26	15M	QPSK	36	0	Front	5	Full	26865	831.5	22.12	23.00	1.225	-0.08	0.352	0.431
	LTE Band 26	15M	QPSK	1	37	Back	5	Full	26865	831.5	22.95	23.50	1.135	-0.01	1.000	1.135
	LTE Band 26	15M	QPSK	36	0	Back	5	Full	26865	831.5	22.12	23.00	1.225	0.02	0.574	0.703
	LTE Band 26	15M	QPSK	75	0	Back	5	Full	26865	831.5	22.09	23.00	1.233	0.02	0.564	0.695
	LTE Band 26	15M	QPSK	1	37	Left Side	5	Full	26865	831.5	22.95	23.50	1.135	0.02	0.356	0.404
	LTE Band 26	15M	QPSK	36	0	Left Side	5	Full	26865	831.5	22.12	23.00	1.225	0.02	0.206	0.252
	LTE Band 26	15M	QPSK	1	37	Right Side	5	Full	26865	831.5	22.95	23.50	1.135	0.02	0.128	0.145
	LTE Band 26	15M	QPSK	36	0	Right Side	5	Full	26865	831.5	22.12	23.00	1.225	0.02	0.074	0.091
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5	Full	26865	831.5	22.95	23.50	1.135	0.02	0.648	0.735
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5	Full	26865	831.5	22.12	23.00	1.225	0.03	0.350	0.429
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5	Full	26865	831.5	22.12	23.00	1.225	0.03	0.350	0.429
22	LTE Band 4	20M	QPSK	1	99	Front	5	Hotspot On	20175	1732.5	15.43	16.00	1.140	0.02	0.560	0.639
	LTE Band 4	20M	QPSK	50	50	Front	5	Hotspot On	20175	1732.5	15.42	16.00	1.143	0.01	0.539	0.616
	LTE Band 4	20M	QPSK	1	99	Back	5	Hotspot On	20175	1732.5	15.43	16.00	1.140	0.11	0.729	0.831
	LTE Band 4	20M	QPSK	50	50	Back	5	Hotspot On	20175	1732.5	15.42	16.00	1.143	0.01	0.716	0.818
	LTE Band 4	20M	QPSK	100	0	Back	5	Hotspot On	20175	1732.5	15.41	16.00	1.146	0.02	0.724	0.829
	LTE Band 4	20M	QPSK	1	99	Left Side	5	Hotspot On	20175	1732.5	15.43	16.00	1.140	-0.03	0.048	0.054
	LTE Band 4	20M	QPSK	50	50	Left Side	5	Hotspot On	20175	1732.5	15.42	16.00	1.143	-0.03	0.048	0.054
	LTE Band 4	20M	QPSK	1	99	Right Side	5	Hotspot On	20175	1732.5	15.43	16.00	1.140	-0.03	0.031	0.035
	LTE Band 4	20M	QPSK	50	50	Right Side	5	Hotspot On	20175	1732.5	15.42	16.00	1.143	-0.03	0.031	0.035
	LTE Band 4	20M	QPSK	1	99	Bottom Side	5	Hotspot On	20175	1732.5	15.43	16.00	1.140	-0.09	0.920	1.049
	LTE Band 4	20M	QPSK	50	50	Bottom Side	5	Hotspot On	20175	1732.5	15.42	16.00	1.143	-0.09	0.882	1.008
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5	Hotspot On	20175	1732.5	15.41	16.00	1.146	-0.14	0.867	0.993
23	LTE Band 2	20M	QPSK	1	0	Front	5	Hotspot On	18700	1860	13.81	14.50	1.172	0.12	0.476	0.558
	LTE Band 2	20M	QPSK	50	0	Front	5	Hotspot On	18700	1860	13.82	14.50	1.169	0.1	0.486	0.568
	LTE Band 2	20M	QPSK	1	0	Back	5	Hotspot On	18700	1860	13.81	14.50	1.172	0.05	0.839	0.983
	LTE Band 2	20M	QPSK	1	0	Back	5	Hotspot On	18900	1880	13.48	14.50	1.265	0.04	0.853	1.079
	LTE Band 2	20M	QPSK	1	0	Back	5	Hotspot On	19100	1900	13.53	14.50	1.250	0.04	0.830	1.038
	LTE Band 2	20M	QPSK	50	0	Back	5	Hotspot On	18700	1860	13.82	14.50	1.169	0.06	0.777	0.909
	LTE Band 2	20M	QPSK	50	0	Back	5	Hotspot On	18900	1880	13.83	14.50	1.167	0.07	0.852	0.994
	LTE Band 2	20M	QPSK	50	0	Back	5	Hotspot On	19100	1900	13.81	14.50	1.172	0.07	0.830	0.973
	LTE Band 2	20M	QPSK	100	0	Back	5	Hotspot On	18700	1860	13.76	14.50	1.186	0.03	0.812	0.963
	LTE Band 2	20M	QPSK	1	0	Left Side	5	Hotspot On	18700	1860	13.81	14.50	1.172	-0.09	0.031	0.036
	LTE Band 2	20M	QPSK	50	0	Left Side	5	Hotspot On	18700	1860	13.82	14.50	1.169	-0.03	0.027	0.031
	LTE Band 2	20M	QPSK	1	0	Right Side	5	Hotspot On	18700	1860	13.81	14.50	1.172	-0.03	0.019	0.022
	LTE Band 2	20M	QPSK	50	0	Right Side	5	Hotspot On	18700	1860	13.82	14.50	1.169	-0.05	0.021	0.025
23	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	18700	1860	13.81	14.50	1.172	-0.18	0.882	1.034
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	18900	1880	13.48	14.50	1.265	0.04	0.986	1.247
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Hotspot On	19100	1900	13.53	14.50	1.250	-0.13	1.030	1.288
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	18700	1860	13.82	14.50	1.169	-0.15	0.926	1.083
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	18900	1880	13.83	14.50	1.167	-0.16	0.896	1.045
23	LTE Band 2	20M	QPSK	50	0	Bottom Side	5	Hotspot On	19100	1900	13.81	14.50	1.172	-0.1	1.040	1.219
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5	Hotspot On	18700	1860	13.76	14.50	1.186	-0.15	0.918	1.089



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	20850	2510	18.10	19.00	1.230	0.01	0.549	0.675
	LTE Band 7	20M	QPSK	50	0	Front	5	Hotspot On	20850	2510	18.09	19.00	1.233	-0.05	0.534	0.658
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	20850	2510	18.10	19.00	1.230	-0.16	0.912	1.122
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21100	2535	17.86	19.00	1.300	-0.15	0.910	1.183
24	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21350	2560	17.86	19.00	1.300	-0.11	1.070	1.391
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	20850	2510	18.09	19.00	1.233	-0.08	0.866	1.068
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	21100	2535	17.89	19.00	1.291	0	0.850	1.098
	LTE Band 7	20M	QPSK	50	0	Back	5	Hotspot On	21350	2560	17.99	19.00	1.262	0.02	0.945	1.192
	LTE Band 7	20M	QPSK	100	0	Back	5	Hotspot On	20850	2510	18.12	19.00	1.225	0.06	0.872	1.068
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Hotspot On	20850	2510	18.10	19.00	1.230	0.03	0.055	0.068
	LTE Band 7	20M	QPSK	50	0	Left Side	5	Hotspot On	20850	2510	18.09	19.00	1.233	0.06	0.054	0.067
	LTE Band 7	20M	QPSK	1	0	Right Side	5	Hotspot On	20850	2510	18.10	19.00	1.230	0.03	0.450	0.554
	LTE Band 7	20M	QPSK	50	0	Right Side	5	Hotspot On	20850	2510	18.09	19.00	1.233	0.06	0.453	0.559
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Hotspot On	20850	2510	18.10	19.00	1.230	-0.17	0.598	0.736
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Hotspot On	20850	2510	18.09	19.00	1.233	-0.12	0.581	0.716

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	5	Hotspot On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.08	0.649	0.656
	LTE Band 41	20M	QPSK	1	99	Front	5	Hotspot On	40140	2545	20.95	21.00	1.012	62.9	1.006	-0.12	0.641	0.652
	LTE Band 41	20M	QPSK	1	99	Front	5	Hotspot On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.1	0.658	0.733
	LTE Band 41	20M	QPSK	1	99	Front	5	Hotspot On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.09	0.719	0.806
	LTE Band 41	20M	QPSK	50	50	Front	5	Hotspot On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.11	0.671	0.688
	LTE Band 41	20M	QPSK	50	50	Front	5	Hotspot On	40140	2545	20.91	21.00	1.021	62.9	1.006	-0.09	0.665	0.683
	LTE Band 41	20M	QPSK	50	50	Front	5	Hotspot On	40670	2598	20.59	21.00	1.099	62.9	1.006	-0.1	0.665	0.735
	LTE Band 41	20M	QPSK	50	50	Front	5	Hotspot On	41140	2645	20.64	21.00	1.086	62.9	1.006	-0.05	0.739	0.808
	LTE Band 41	20M	QPSK	100	0	Front	5	Hotspot On	40400	2571	20.88	21.00	1.028	62.9	1.006	-0.06	0.702	0.726
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.19	1.040	1.051
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40140	2545	20.95	21.00	1.012	62.9	1.006	-0.06	1.020	1.038
	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.1	1.030	1.147
25	LTE Band 41	20M	QPSK	1	99	Back	5	Hotspot On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.12	1.190	1.334
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.08	1.040	1.066
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40140	2545	20.91	21.00	1.021	62.9	1.006	-0.04	1.030	1.000
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	40670	2598	20.59	21.00	1.099	62.9	1.006	-0.07	1.020	1.128
	LTE Band 41	20M	QPSK	50	50	Back	5	Hotspot On	41140	2645	20.64	21.00	1.086	62.9	1.006	-0.14	0.964	1.054
	LTE Band 41	20M	QPSK	100	0	Back	5	Hotspot On	40400	2571	20.88	21.00	1.028	62.9	1.006	-0.12	0.980	1.014
	LTE Band 41	20M	QPSK	1	99	Left Side	5	Hotspot On	40400	2571	20.98	21.00	1.005	62.9	1.006	0.03	0.064	0.064
	LTE Band 41	20M	QPSK	50	50	Left Side	5	Hotspot On	40400	2571	20.92	21.00	1.019	62.9	1.006	0.06	0.062	0.064
	LTE Band 41	20M	QPSK	1	99	Right Side	5	Hotspot On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.08	0.487	0.492
	LTE Band 41	20M	QPSK	50	50	Right Side	5	Hotspot On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.12	0.495	0.507
	LTE Band 41	20M	QPSK	1	99	Bottom Side	5	Hotspot On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.02	0.562	0.568
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Hotspot On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.07	0.534	0.547



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	11	2462	16.82	17.00	1.042	97.28	1.028		0.208		
26	WLAN2.4GHz	802.11b 1Mbps	Back	5	11	2462	16.82	17.00	1.042	97.28	1.028	-0.12	0.406	0.298	0.319
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5	11	2462	16.82	17.00	1.042	97.28	1.028		0.079		
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	11	2462	16.82	17.00	1.042	97.28	1.028		0.263		

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	39	2441	10.89	11.50	1.151	77.13	1.080	-0.08	0.065	0.080
27	Bluetooth	1Mbps	Back	5	39	2441	10.89	11.50	1.151	77.13	1.080	-0.07	0.107	0.133
	Bluetooth	1Mbps	Left Side	5	39	2441	10.89	11.50	1.151	77.13	1.080	-0.03	0.024	0.030
	Bluetooth	1Mbps	Top Side	5	39	2441	10.89	11.50	1.151	77.13	1.080	-0.06	0.100	0.124

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	5	46	5230	14.05	15.00	1.246	88.18	1.134		0.149		
28	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5	46	5230	14.05	15.00	1.246	88.18	1.134	-0.04	0.604	0.384	0.542
	WLAN5.2GHz	802.11n-HT40 MCS0	Left Side	5	46	5230	14.05	15.00	1.246	88.18	1.134		0.099		
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	5	46	5230	14.05	15.00	1.246	88.18	1.134	-0.01	0.171	0.097	0.137
	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	5	151	5755	14.43	15.00	1.141	88.18	1.134	0.06	0.181	0.137	0.177
29	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	5	151	5755	14.43	15.00	1.141	88.18	1.134	-0.03	0.910	0.537	0.695
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Side	5	151	5755	14.43	15.00	1.141	88.18	1.134		0.097		
	WLAN 5.8GHz	802.11n-HT40 MCS0	Top Side	5	151	5755	14.43	15.00	1.141	88.18	1.134	-0.19	0.259	0.163	0.211

**15.3 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4Tx slots)	Front	5	-	Full	128	824.2	26.67	27.50	1.211	-0.05	0.458	0.554
	GSM850	GPRS (4Tx slots)	Back	5	-	Full	128	824.2	26.67	27.50	1.211	-0.02	1.010	1.223
	GSM850	GPRS (4Tx slots)	Back	5	-	Full	189	836.4	26.45	27.50	1.274	-0.09	0.951	1.211
30	GSM850	GPRS (4Tx slots)	Back	5	-	Full	251	848.8	26.51	27.50	1.256	-0.01	1.040	1.306
	GSM850	GPRS (4Tx slots)	Back	5	Headset	Full	251	848.8	26.51	27.50	1.256	0.01	0.341	0.428
	GSM850	GPRS (4Tx slots)	Back	5	Headset	Full	128	824.2	26.67	27.50	1.211	-0.02	0.528	0.639
	GSM850	GPRS (4Tx slots)	Back	5	Headset	Full	189	836.4	26.45	27.50	1.274	0.02	0.411	0.523
	GSM1900	GPRS (4Tx slots)	Front	5	-	P-Sensor On	512	1850.2	18.15	19.00	1.216	-0.04	0.958	1.165
	GSM1900	GPRS (4Tx slots)	Front	5	-	P-Sensor On	661	1880	18.05	19.00	1.245	-0.02	1.020	1.269
	GSM1900	GPRS (4Tx slots)	Front	5	-	P-Sensor On	810	1909.8	18.05	19.00	1.245	-0.03	0.905	1.126
	GSM1900	GPRS (4Tx slots)	Back	5	-	P-Sensor On	512	1850.2	18.15	19.00	1.216	0.06	1.150	1.399
	GSM1900	GPRS (4Tx slots)	Back	5	-	P-Sensor On	661	1880	18.05	19.00	1.245	-0.02	1.140	1.419
31	GSM1900	GPRS (4Tx slots)	Back	5	-	P-Sensor On	810	1909.8	18.05	19.00	1.245	-0.06	1.150	1.431
	GSM1900	GPRS (4Tx slots)	Front	5	Headset	P-Sensor On	512	1850.2	18.15	19.00	1.216	0.05	0.991	1.205
	GSM1900	GPRS (4Tx slots)	Front	5	Headset	P-Sensor On	661	1880	18.05	19.00	1.245	0.06	0.953	1.186
	GSM1900	GPRS (4Tx slots)	Front	5	Headset	P-Sensor On	810	1909.8	18.05	19.00	1.245	0.19	0.924	1.150
	GSM1900	GPRS (4Tx slots)	Back	5	Headset	P-Sensor On	512	1850.2	18.15	19.00	1.216	0.01	1.140	1.386
	GSM1900	GPRS (4Tx slots)	Back	5	Headset	P-Sensor On	661	1880	18.05	19.00	1.245	0.15	1.050	1.307
	GSM1900	GPRS (4Tx slots)	Back	5	Headset	P-Sensor On	810	1909.8	18.05	19.00	1.245	0.03	1.040	1.294



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	-	Full	4132	826.4	23.40	23.50	1.023	0.02	0.663	0.678
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	Full	4132	826.4	23.40	23.50	1.023	0.01	0.949	0.971
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	Full	4182	836.4	23.37	23.50	1.030	0.02	1.100	1.133
32	WCDMA Band V	RMC 12.2Kbps	Back	5	-	Full	4233	846.6	23.34	23.50	1.038	-0.01	1.140	1.183
	WCDMA Band IV	RMC 12.2Kbps	Front	5	-	P-Sensor On	1513	1752.6	16.62	17.00	1.091	-0.06	0.824	0.899
	WCDMA Band IV	RMC 12.2Kbps	Front	5	-	P-Sensor On	1312	1537	16.54	17.00	1.112	-0.07	0.826	0.918
	WCDMA Band IV	RMC 12.2Kbps	Front	5	-	P-Sensor On	1413	1638	16.53	17.00	1.114	-0.05	0.932	1.039
	WCDMA Band IV	RMC 12.2Kbps	Back	5	-	P-Sensor On	1513	1752.6	16.62	17.00	1.091	-0.17	1.130	1.233
	WCDMA Band IV	RMC 12.2Kbps	Back	5	-	P-Sensor On	1312	1537	16.54	17.00	1.112	0.13	0.974	1.083
	WCDMA Band IV	RMC 12.2Kbps	Back	5	-	P-Sensor On	1413	1638	16.53	17.00	1.114	0.03	1.260	1.404
33	WCDMA Band IV	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	1513	1752.6	16.62	17.00	1.091	-0.13	1.310	1.430
	WCDMA Band IV	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	1312	1537	16.54	17.00	1.112	0.05	1.070	1.190
	WCDMA Band IV	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	1413	1638	16.53	17.00	1.114	0.03	1.280	1.426
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9538	1907.6	16.23	16.50	1.064	-0.02	0.971	1.033
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9262	1852.4	16.06	16.50	1.107	0.01	0.781	0.864
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9400	1880	16.04	16.50	1.112	-0.02	0.895	0.995
34	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9538	1907.6	16.23	16.50	1.064	0.04	1.340	1.426
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9262	1852.4	16.06	16.50	1.107	0.03	1.210	1.339
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9400	1880	16.04	16.50	1.112	0.02	1.280	1.423
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9538	1907.6	16.23	16.50	1.064	0	1.110	1.181
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9262	1852.4	16.06	16.50	1.107	0.02	1.120	1.239
	WCDMA Band II	RMC 12.2Kbps	Back	5	Headset	P-Sensor On	9400	1880	16.04	16.50	1.112	-0.03	1.170	1.301



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Front	5	-	Full	26865	831.5	22.95	23.50	1.135	-0.01	0.637	0.723
	LTE Band 26	15M	QPSK	36	0	Front	5	-	Full	26865	831.5	22.12	23.00	1.225	-0.08	0.352	0.431
35	LTE Band 26	15M	QPSK	1	37	Back	5	-	Full	26865	831.5	22.95	23.50	1.135	-0.01	1.000	1.135
	LTE Band 26	15M	QPSK	36	0	Back	5	-	Full	26865	831.5	22.12	23.00	1.225	0.02	0.574	0.703
	LTE Band 26	15M	QPSK	75	0	Back	5	-	Full	26865	831.5	22.09	23.00	1.233	0.02	0.564	0.695
	LTE Band 4	20M	QPSK	1	99	Front	5	-	P-Sensor On	20175	1732.5	16.45	17.00	1.135	-0.11	0.687	0.780
	LTE Band 4	20M	QPSK	50	50	Front	5	-	P-Sensor On	20175	1732.5	16.51	17.00	1.119	-0.11	0.669	0.749
36	LTE Band 4	20M	QPSK	1	99	Back	5	-	P-Sensor On	20175	1732.5	16.45	17.00	1.135	0.01	1.020	1.158
	LTE Band 4	20M	QPSK	50	50	Back	5	-	P-Sensor On	20175	1732.5	16.51	17.00	1.119	-0.07	0.872	0.976
	LTE Band 4	20M	QPSK	100	0	Back	5	-	P-Sensor On	20175	1732.5	16.44	17.00	1.138	-0.03	0.838	0.953
	LTE Band 2	20M	QPSK	1	0	Front	5	-	P-Sensor On	18700	1860	15.38	16.00	1.153	-0.05	0.882	1.017
	LTE Band 2	20M	QPSK	1	0	Front	5	-	P-Sensor On	18900	1880	15.30	16.00	1.175	-0.04	0.932	1.095
	LTE Band 2	20M	QPSK	1	0	Front	5	-	P-Sensor On	19100	1900	15.28	16.00	1.180	0.03	0.934	1.102
	LTE Band 2	20M	QPSK	50	0	Front	5	-	P-Sensor On	18700	1860	15.45	16.00	1.135	0.01	0.873	0.991
	LTE Band 2	20M	QPSK	50	0	Front	5	-	P-Sensor On	18900	1880	15.39	16.00	1.151	0.04	0.909	1.046
	LTE Band 2	20M	QPSK	50	0	Front	5	-	P-Sensor On	19100	1900	15.40	16.00	1.148	0.02	0.912	1.047
	LTE Band 2	20M	QPSK	100	0	Front	5	-	P-Sensor On	18700	1860	15.32	16.00	1.169	-0.01	0.908	1.062
	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	18700	1860	15.38	16.00	1.153	-0.17	1.140	1.315
	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	18900	1880	15.30	16.00	1.175	-0.13	1.110	1.304
37	LTE Band 2	20M	QPSK	1	0	Back	5	-	P-Sensor On	19100	1900	15.28	16.00	1.180	-0.09	1.220	1.440
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	18700	1860	15.45	16.00	1.135	-0.01	0.875	0.993
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	18900	1880	15.39	16.00	1.151	0.02	1.090	1.254
	LTE Band 2	20M	QPSK	50	0	Back	5	-	P-Sensor On	19100	1900	15.40	16.00	1.148	0.02	1.200	1.378
	LTE Band 2	20M	QPSK	100	0	Back	5	-	P-Sensor On	18700	1860	15.32	16.00	1.169	-0.09	1.100	1.286
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	18700	1860	15.38	16.00	1.153	-0.08	1.070	1.234
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	18900	1880	15.30	16.00	1.175	-0.02	1.040	1.222
	LTE Band 2	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	19100	1900	15.28	16.00	1.180	-0.05	1.060	1.251
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	20850	2510	18.10	19.00	1.230	0.01	0.549	0.675
	LTE Band 7	20M	QPSK	50	0	Front	5	-	P-Sensor On	20850	2510	18.09	19.00	1.233	-0.05	0.534	0.658
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	20850	2510	18.10	19.00	1.230	-0.16	0.912	1.122
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21100	2535	17.86	19.00	1.300	-0.15	0.910	1.183
38	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21350	2560	17.86	19.00	1.300	-0.11	1.070	1.391
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	20850	2510	18.09	19.00	1.233	-0.08	0.866	1.068
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	21100	2535	17.89	19.00	1.291	0	0.850	1.098
	LTE Band 7	20M	QPSK	50	0	Back	5	-	P-Sensor On	21350	2560	17.99	19.00	1.262	0.02	0.945	1.192
	LTE Band 7	20M	QPSK	100	0	Back	5	-	P-Sensor On	20850	2510	18.12	19.00	1.225	0.06	0.872	1.068
	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	20850	2510	18.10	19.00	1.230	0.13	0.805	0.990
	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	21100	2535	17.86	19.00	1.300	0.1	0.882	1.147
	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	21350	2560	17.86	19.00	1.300	0.09	0.942	1.225



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	5	-	P-Sensor On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.08	0.649	0.656
	LTE Band 41	20M	QPSK	1	99	Front	5	-	P-Sensor On	40140	2545	20.95	21.00	1.012	62.9	1.006	-0.12	0.641	0.652
	LTE Band 41	20M	QPSK	1	99	Front	5	-	P-Sensor On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.1	0.658	0.733
	LTE Band 41	20M	QPSK	1	99	Front	5	-	P-Sensor On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.09	0.719	0.806
	LTE Band 41	20M	QPSK	50	50	Front	5	-	P-Sensor On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.11	0.671	0.688
	LTE Band 41	20M	QPSK	50	50	Front	5	-	P-Sensor On	40140	2545	20.91	21.00	1.021	62.9	1.006	-0.09	0.665	0.683
	LTE Band 41	20M	QPSK	50	50	Front	5	-	P-Sensor On	40670	2598	20.59	21.00	1.099	62.9	1.006	-0.1	0.665	0.735
	LTE Band 41	20M	QPSK	50	50	Front	5	-	P-Sensor On	41140	2645	20.64	21.00	1.086	62.9	1.006	-0.05	0.739	0.808
	LTE Band 41	20M	QPSK	100	0	Front	5	-	P-Sensor On	40400	2571	20.88	21.00	1.028	62.9	1.006	-0.06	0.702	0.726
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.19	1.040	1.051
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40140	2545	20.95	21.00	1.012	62.9	1.006	-0.06	1.020	1.038
	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.1	1.030	1.147
39	LTE Band 41	20M	QPSK	1	99	Back	5	-	P-Sensor On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.12	1.190	1.334
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40400	2571	20.92	21.00	1.019	62.9	1.006	-0.08	1.040	1.066
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40140	2545	20.91	21.00	1.021	62.9	1.006	-0.04	1.030	1.000
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	40670	2598	20.59	21.00	1.099	62.9	1.006	-0.07	1.020	1.128
	LTE Band 41	20M	QPSK	50	50	Back	5	-	P-Sensor On	41140	2645	20.64	21.00	1.086	62.9	1.006	-0.14	0.964	1.054
	LTE Band 41	20M	QPSK	100	0	Back	5	-	P-Sensor On	40400	2571	20.88	21.00	1.028	62.9	1.006	-0.12	0.980	1.014
	LTE Band 41	20M	QPSK	1	99	Back	5	Headset	P-Sensor On	40400	2571	20.98	21.00	1.005	62.9	1.006	-0.15	0.926	0.936
	LTE Band 41	20M	QPSK	1	99	Back	5	Headset	P-Sensor On	40140	2545	20.95	21.00	1.012	62.9	1.006	-0.17	0.908	0.924
	LTE Band 41	20M	QPSK	1	99	Back	5	Headset	P-Sensor On	40670	2598	20.56	21.00	1.107	62.9	1.006	-0.05	0.951	1.059
	LTE Band 41	20M	QPSK	1	99	Back	5	Headset	P-Sensor On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.09	0.904	1.013

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	-	11	2462	16.82	17.00	1.042	97.28	1.028		0.208		
40	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	11	2462	16.82	17.00	1.042	97.28	1.028	-0.12	0.406	0.298	0.319

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	-	39	2441	10.89	11.50	1.151	77.13	1.080	-0.08	0.065	0.080
41	Bluetooth	1Mbps	Back	5	-	39	2441	10.89	11.50	1.151	77.13	1.080	-0.07	0.107	0.133

**<WLAN 5GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	5	-	54	5270	14.27	15.00	1.184	88.18	1.134	0.01	0.125	0.168
42	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5	-	54	5270	14.27	15.00	1.184	88.18	1.134	-0.06	0.499	0.670
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	5	-	134	5670	14.40	15.00	1.149	88.18	1.134	-0.01	0.154	0.201
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5	-	134	5670	14.40	15.00	1.149	88.18	1.134	-0.01	0.633	0.825
43	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5	-	126	5630	14.34	15.00	1.164	88.18	1.134	-0.07	0.636	0.840
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	5	-	151	5755	14.43	15.00	1.141	88.18	1.134	0.06	0.137	0.177
44	WLAN5.8GHz	802.11n-HT40 MCS0	Back	5	-	151	5755	14.43	15.00	1.141	88.18	1.134	-0.03	0.537	0.695



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM1900	GPRS 4 Tx slots	Front	0	Full	512	1850.2	23.58	24.50	1.236	0.02	2.350	2.904
	GSM1900	GPRS 4 Tx slots	Front	0	Full	661	1880	23.50	24.50	1.259	0.08	2.200	2.770
	GSM1900	GPRS 4 Tx slots	Front	0	Full	810	1909.8	23.42	24.50	1.282	-0.18	1.910	2.449
45	GSM1900	GPRS 4 Tx slots	Back	0	Full	512	1850.2	23.58	24.50	1.236	-0.03	2.840	3.510
	GSM1900	GPRS 4 Tx slots	Back	0	Full	661	1880	23.50	24.50	1.259	-0.06	2.780	3.500
	GSM1900	GPRS 4 Tx slots	Back	0	Full	810	1909.8	23.42	24.50	1.282	-0.03	2.550	3.270
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	512	1850.2	23.58	24.50	1.236	-0.01	2.010	2.484
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	661	1880	23.50	24.50	1.259	-0.11	2.050	2.581
	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Full	810	1909.8	23.42	24.50	1.282	-0.01	1.940	2.488

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Handheld On	1513	1752.6	19.61	20.00	1.094	0.01	2.150	2.352
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Handheld On	1312	1712.4	19.52	20.00	1.117	0.07	1.910	2.133
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Handheld On	1413	1732.6	19.49	20.00	1.125	0.02	2.160	2.429
46	WCDMA Band IV	RMC 12.2Kbps	Back	0	Handheld On	1513	1752.6	19.61	20.00	1.094	0.01	2.980	3.260
	WCDMA Band IV	RMC 12.2Kbps	Back	0	Handheld On	1312	1712.4	19.52	20.00	1.117	0.04	2.710	3.027
	WCDMA Band IV	RMC 12.2Kbps	Back	0	Handheld On	1413	1732.6	19.49	20.00	1.125	-0.05	2.860	3.216
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Handheld On	1513	1752.6	19.61	20.00	1.094	-0.05	2.440	2.669
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Handheld On	1312	1712.4	19.52	20.00	1.117	-0.06	2.730	3.049
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Handheld On	1413	1732.6	19.49	20.00	1.125	-0.08	2.790	3.138
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9538	1907.6	19.74	21.00	1.337	-0.19	2.000	2.673
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9262	1852.4	19.59	21.00	1.384	-0.17	2.010	2.781
	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9400	1880	19.53	21.00	1.403	-0.02	2.210	3.100
	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9538	1907.6	19.74	21.00	1.337	-0.02	2.540	3.395
47	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9262	1852.4	19.59	21.00	1.384	-0.01	2.530	3.500
	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9400	1880	19.53	21.00	1.403	-0.02	2.430	3.409
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9538	1907.6	19.74	21.00	1.337	-0.03	2.230	2.981
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9262	1852.4	19.59	21.00	1.384	-0.01	2.010	2.781
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9400	1880	19.53	21.00	1.403	-0.09	2.200	3.086



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	99	Front	0	Handheld On	20175	1732.5	19.50	21.00	1.413	0.02	1.800	2.543
	LTE Band 4	20M	QPSK	50	50	Front	0	Handheld On	20175	1732.5	19.45	21.00	1.429	0.13	1.740	2.486
	LTE Band 4	20M	QPSK	100	0	Front	0	Handheld On	20175	1732.5	19.47	21.00	1.422	0.09	1.700	2.418
48	LTE Band 4	20M	QPSK	1	99	Back	0	Handheld On	20175	1732.5	19.50	21.00	1.413	-0.08	2.430	3.432
	LTE Band 4	20M	QPSK	50	50	Back	0	Handheld On	20175	1732.5	19.45	21.00	1.429	-0.15	2.340	3.344
	LTE Band 4	20M	QPSK	100	0	Back	0	Handheld On	20175	1732.5	19.47	21.00	1.422	-0.02	2.380	3.385
	LTE Band 4	20M	QPSK	1	99	Bottom Side	0	Handheld On	20175	1732.5	19.50	21.00	1.413	-0.04	2.290	3.235
	LTE Band 4	20M	QPSK	50	50	Bottom Side	0	Handheld On	20175	1732.5	19.45	21.00	1.429	-0.1	2.390	3.415
	LTE Band 4	20M	QPSK	100	0	Bottom Side	0	Handheld On	20175	1732.5	19.47	21.00	1.422	-0.12	2.410	3.428
	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	18700	1860	18.95	20.50	1.429	0.1	1.950	2.786
	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	18900	1880	18.82	20.50	1.472	0.09	1.940	2.856
	LTE Band 2	20M	QPSK	1	0	Front	0	Handheld On	19100	1900	18.86	20.50	1.459	0.01	2.000	2.918
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	18700	1860	18.89	20.50	1.449	0.11	1.920	2.782
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	18900	1880	18.77	20.50	1.489	0.08	1.930	2.874
	LTE Band 2	20M	QPSK	50	0	Front	0	Handheld On	19100	1900	18.88	20.50	1.452	0.07	1.950	2.832
	LTE Band 2	20M	QPSK	100	0	Front	0	Handheld On	18700	1860	18.92	20.50	1.439	0.09	1.880	2.705
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	18700	1860	18.95	20.50	1.429	-0.18	2.120	3.029
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	18900	1880	18.82	20.50	1.472	-0.1	2.220	3.269
	LTE Band 2	20M	QPSK	1	0	Back	0	Handheld On	19100	1900	18.86	20.50	1.459	-0.09	2.180	3.180
49	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	18700	1860	18.89	20.50	1.449	-0.02	2.390	3.463
	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	18900	1880	18.77	20.50	1.489	-0.01	2.220	3.306
	LTE Band 2	20M	QPSK	50	0	Back	0	Handheld On	19100	1900	18.88	20.50	1.452	-0.16	2.160	3.137
	LTE Band 2	20M	QPSK	100	0	Back	0	Handheld On	18700	1860	18.92	20.50	1.439	-0.03	2.140	3.079
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	18700	1860	18.95	20.50	1.429	-0.06	1.910	2.729
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	18900	1880	18.82	20.50	1.472	-0.05	2.130	3.136
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Handheld On	19100	1900	18.86	20.50	1.459	-0.05	2.120	3.093
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	18700	1860	18.89	20.50	1.449	-0.07	1.940	2.811
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	18900	1880	18.77	20.50	1.489	-0.04	2.150	3.202
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Handheld On	19100	1900	18.88	20.50	1.452	-0.02	2.140	3.108
	LTE Band 2	20M	QPSK	100	0	Bottom Side	0	Handheld On	18700	1860	18.92	20.50	1.439	-0.02	1.780	2.561
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	20850	2510	18.10	19.50	1.380	0.04	1.850	2.554
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21100	2535	17.86	19.50	1.459	0.04	1.870	2.728
50	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21350	2560	17.86	19.50	1.459	0.11	1.990	2.903
	LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	20850	2510	18.09	19.50	1.384	-0.02	1.830	2.532
	LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	21100	2535	17.89	19.50	1.449	0.03	1.760	2.550
	LTE Band 7	20M	QPSK	50	0	Back	0	Handheld On	21350	2560	17.99	19.50	1.416	0.06	1.860	2.633
	LTE Band 7	20M	QPSK	100	0	Back	0	Handheld On	20850	2510	18.12	19.50	1.374	0.04	1.830	2.514



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	99	Front	0	Handheld On	40400	2571	22.61	23.00	1.094	62.9	1.006	-0.03	1.720	1.893
	LTE Band 41	20M	QPSK	50	50	Front	0	Handheld On	40400	2571	22.50	23.00	1.122	62.9	1.006	-0.19	1.280	1.445
	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.61	23.00	1.094	62.9	1.006	-0.01	2.870	3.158
	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40140	2545	22.49	23.00	1.125	62.9	1.006	-0.11	2.810	3.179
51	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	40670	2598	22.40	23.00	1.148	62.9	1.006	-0.1	2.790	3.223
	LTE Band 41	20M	QPSK	1	99	Back	0	Handheld On	41140	2645	22.25	23.00	1.189	62.9	1.006	-0.11	2.650	3.168
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40400	2571	22.50	23.00	1.122	62.9	1.006	-0.19	2.180	2.461
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40140	2545	22.47	23.00	1.130	62.9	1.006	-0.11	2.120	2.410
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	40670	2598	22.18	23.00	1.208	62.9	1.006	-0.02	2.120	2.576
	LTE Band 41	20M	QPSK	50	50	Back	0	Handheld On	41140	2645	22.19	23.00	1.205	62.9	1.006	-0.1	1.990	2.412
	LTE Band 41	20M	QPSK	100	0	Back	0	Handheld On	40400	2571	22.45	23.00	1.135	62.9	1.006	-0.13	2.140	2.443

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0	54	5270	14.27	15.00	1.184	88.18	1.134		0.853		
52	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0	54	5270	14.27	15.00	1.184	88.18	1.134	-0.01	2.668	0.342	0.459
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Side	0	54	5270	14.27	15.00	1.184	88.18	1.134		0.543		
	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0	54	5270	14.27	15.00	1.184	88.18	1.134		0.589		
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	0	134	5670	14.40	15.00	1.149	88.18	1.134		0.887		
53	WLAN 5.5GHz	802.11n-HT40 MCS0	Back	0	134	5670	14.40	15.00	1.149	88.18	1.134	-0.09	2.619	0.379	0.494
	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Side	0	134	5670	14.40	15.00	1.149	88.18	1.134		0.366		
	WLAN 5.5GHz	802.11n-HT40 MCS0	Top Side	0	134	5670	14.40	15.00	1.149	88.18	1.134		0.704		

**15.5 Repeated SAR Measurement****<1g SAR>**

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Back	5	-	Full	4233	846.6	23.34	23.50	1.038	-	-	-0.01	1.140	1	1.183
2nd	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Back	5	-	Full	4233	846.6	23.34	23.50	1.038	-	-	0.03	1.120	1.018	1.162
1st	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Back	5	Headset	P-Sensor On	1513	1752.6	16.62	17.00	1.091	-	-	-0.13	1.310	1	1.430
2nd	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Back	5	Headset	P-Sensor On	1513	1752.6	16.62	17.00	1.091	-	-	-0.01	1.290	1.016	1.408
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	5	-	P-Sensor On	9538	1907.6	16.23	16.50	1.064	-	-	0.04	1.340	1	1.426
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	5	-	P-Sensor On	9538	1907.6	16.23	16.50	1.064	-	-	0.05	1.310	1.023	1.394
1st	LTE Band 41	-	20M	QPSK	1	99	Back	5	-	P-Sensor On	41140	2645	20.53	21.00	1.114	62.9	1.006	-0.12	1.190	1	1.334
2nd	LTE Band 41	-	20M	QPSK	1	99	Back	5	-	P-Sensor On	41140	2645	20.53	21.00	1.114	62.9	1.006	0.02	1.180	1.008	1.323

<10g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	GSM1900	GPRS (4 Tx slots)	-	-	-	-	Back	0	Full	512	1850.2	23.58	24.50	1.236	-	-	-0.03	2.840	1	3.510
2nd	GSM1900	GPRS (4 Tx slots)	-	-	-	-	Back	0	Full	512	1850.2	23.58	24.50	1.236	-	-	0.05	2.820	1.007	3.485
1st	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Back	0	Handheld On	1513	1752.6	19.61	20.00	1.094	-	-	0.01	2.980	1	3.260
2nd	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Back	0	Handheld On	1513	1752.6	19.61	20.00	1.094	-	-	0.03	2.970	1.003	3.249
1st	LTE Band 41	-	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.61	23.00	1.094	62.9	1.006	-0.01	2.870	1	3.158
2nd	LTE Band 41	-	20M	QPSK	1	99	Back	0	Handheld On	40400	2571	22.61	23.00	1.094	62.9	1.006	0.03	2.840	1.011	3.125

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.