


FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1955-5, XT1955DL, XT1955-6
FCC ID : IHDT56XQ1
STANDARD : FCC 47 CFR Part 2, 90(R)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 28, 2018 and completely tested on Nov. 01, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Maximum ERP Power, Frequency Tolerance, and Emission Designator	6
1.5 Specification of Accessory.....	6
1.6 Testing Site.....	7
1.7 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power and ERP	12
3.5 Occupied Bandwidth.....	13
3.6 Conducted Band Edge Measurement	14
3.7 Emission Mask.....	15
3.8 Conducted Spurious Emission Measurement	16
3.9 Frequency Stability Measurement.....	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Radiated Spurious Emission Measurement	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION.....	21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG892801D	Rev. 01	Initial issue of report	Dec. 26, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting only	PASS	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.5	§2.1049	Occupied Bandwidth	Reporting only	PASS	-
3.6	§2.1053 §90.543 (e)(2)(3)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.7	§2.1051 §90.210(n)	Emission Mask	Mask B	PASS	-
3.8	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
4.4	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 27.77 dB at 1578.000 MHz



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1955-5, XT1955DL, XT1955-6
FCC ID	IHDT56XQ1
Tx Frequency	LTE Band 14: 790.5 MHz ~ 795.5 MHz
Rx Frequency	LTE Band 14: 760.5 MHz ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 14: 22.94 dBm
Type of Modulation	QPSK / 16QAM / 64QAM
IMEI Code	Conducted: 359525090014179 Radiation: 359525090014666
HW Version	DVT2
SW Version	PPO29.60
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model names are for different market purpose.

1.4 Maximum ERP Power, Frequency Tolerance, and Emission Designator

LTE Band 14		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	790.5~795.5	4M52G7D	-	0.0551	4M50W7D	-	0.0470
10	793	8M94G7D	0.0049	0.0561	8M94W7D	-	0.0461
LTE Band 14		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum ERP(W)	
5	790.5~795.5	4M53W7D		-		0.0356	
10	793	8M94W7D		-		0.0357	

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola (Salom)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
AC Adapter 2	Brand Name	Motorola (Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5Vdc,3000mA; 9Vdc,2000mA; 12Vdc,1500mA		
Battery	Brand Name	Motorola (ATL)	Model Name	JK50
	Power Rating	3.8Vdc,5000mAh	Type	Li-ion, Polymer
USB Cable	Brand Name	Motorola (Saibao)	Model Name	711310002491
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		

1.6 Testing Site

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS 03CH06-KS	CN5013	630927

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	V	-	-	-	V	V	V	V	V	V	V	V	V
	14	-	-		V	-	-	V	V	V	V	V	V		V	
26dB and 99% Bandwidth	14	-	-	V		-	-	V	V	V			V	V	V	V
	14	-	-		V	-	-	V	V	V			V		V	
Conducted Band Edge	14	-	-	V		-	-	V	V	V	V		V	V		V
	14	-	-		V	-	-	V	V	V	V		V		V	
Emission Mask	14	-	-	V		-	-	V	V	V	V		V	V	V	V
	14	-	-		V	-	-	V	V	V	V		V		V	
Conducted Spurious Emission	14	-	-	V		-	-	V	V	V	V			V	V	V
	14	-	-		V	-	-	V	V	V	V				V	
Frequency Stability	14	-	-		V	-	-	V					V		V	
E.R.P	14	-	-	V		-	-	V	V	V	V			V	V	V
	14	-	-		V	-	-	V	V	V	V				V	
Radiated Spurious Emission	14	Worst Case													V	
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

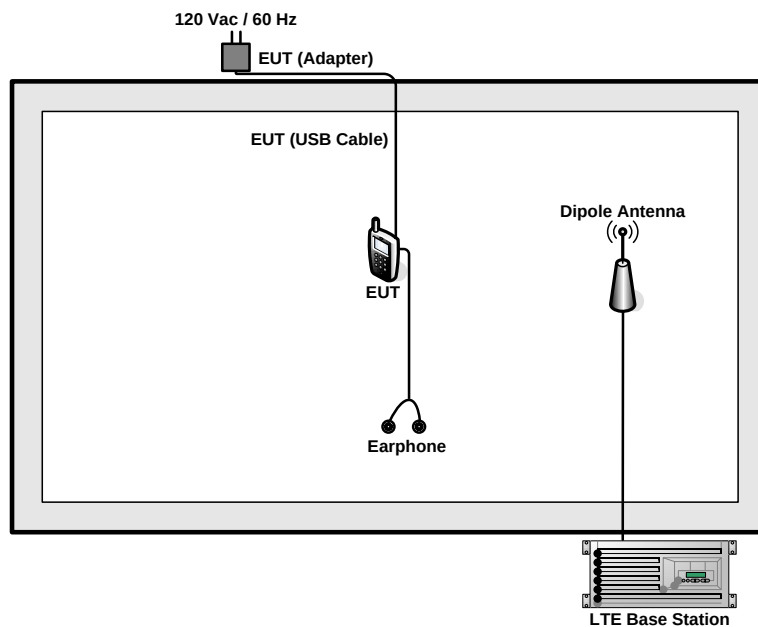

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 4.3 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 4.3 (dB)


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

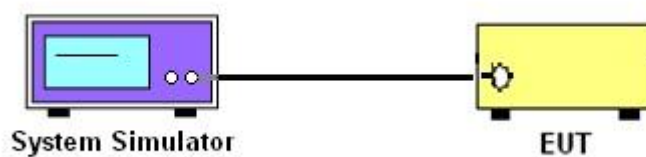

3.2.2 Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

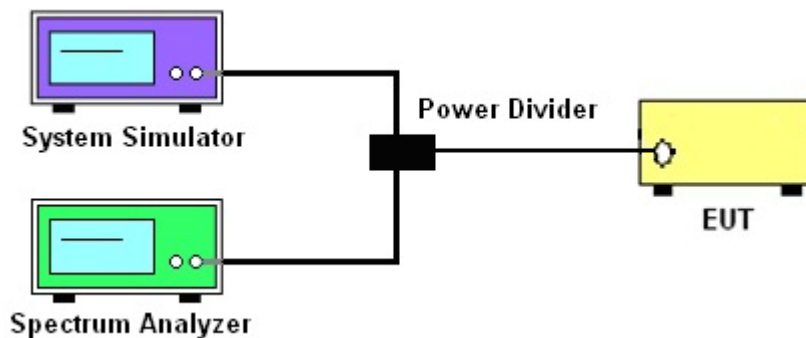

3.2.3 Frequency Stability

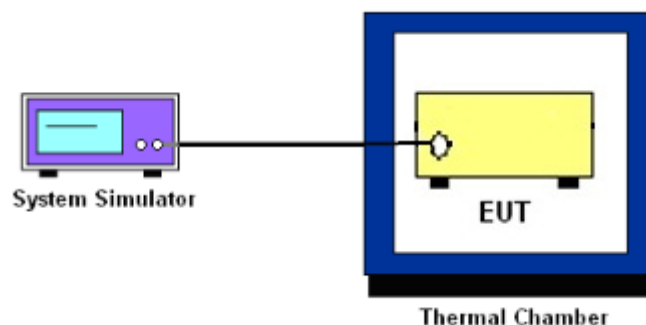

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP

3.4.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.

3.6 Conducted Band Edge Measurement

3.6.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

3.6.2 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. Set spectrum analyzer with RMS detector.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
4. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P (Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.7 Emission Mask

3.7.1 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.2 Test Setup

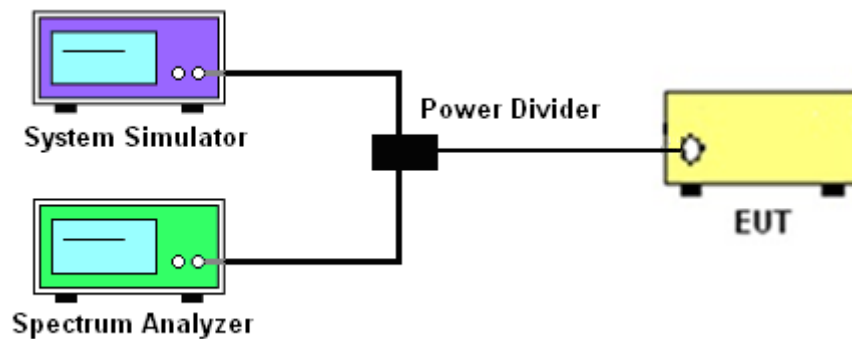

3.8 Conducted Spurious Emission Measurement

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability Measurement

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 1.25 ppm of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

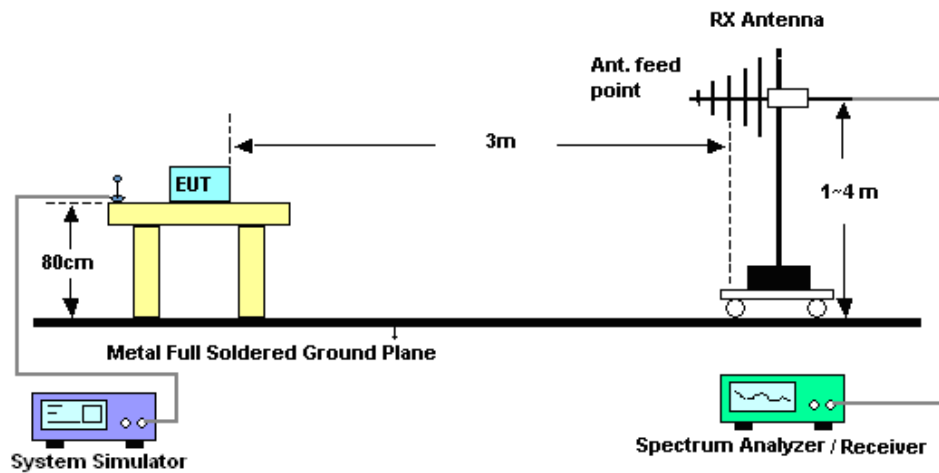

4.2.2 For radiated test above 1GHz

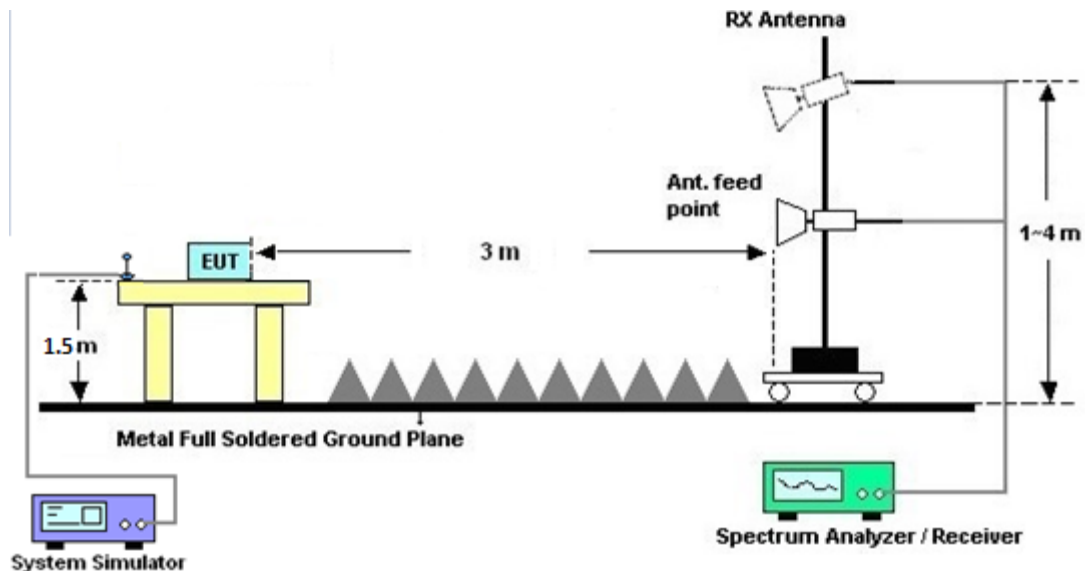

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26..

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5.3 Measurement of spurious emissions using substitution method.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

12. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
 $\text{ERP (dBm)} = \text{EIRP} - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Oct. 22, 2018~ Oct. 23, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Oct. 22, 2018~ Oct. 23, 2018	Jun. 26, 2019	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jun. 25, 2018	Nov. 01, 2018	Jun. 24, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Jan. 29, 2018	Nov. 01, 2018	Jan. 28, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	Nov. 01, 2018	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Nov. 01, 2018	Feb. 06, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	Nov. 01, 2018	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 08, 2018	Nov. 01, 2018	Feb. 07, 2019	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Nov. 01, 2018	Apr. 16, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Dec. 16, 2017	Nov. 01, 2018	Dec. 15, 2018	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 01, 2018	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 01, 2018	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 01, 2018	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.0 dB
--	--------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.82	22.86	22.80
5	1	12		22.78	22.73	22.77
5	1	24		22.75	22.76	22.73
5	12	0		21.81	21.76	21.77
5	12	7		21.81	21.77	21.63
5	12	13		21.75	21.72	21.70
5	25	0		21.85	21.76	21.80
5	1	0	16-QAM	22.10	22.17	22.04
5	1	12		21.98	21.93	21.98
5	1	24		22.06	22.09	22.04
5	12	0		20.83	20.76	20.80
5	12	7		20.89	20.77	20.71
5	12	13		20.85	20.79	20.79
5	25	0		20.76	20.74	20.71
5	1	0	64QAM	20.90	20.97	20.90
5	1	12		20.83	20.77	20.76
5	1	24		20.89	20.93	20.95
5	12	0		19.75	19.69	19.79
5	12	7		19.82	19.74	19.73
5	12	13		19.78	19.73	19.82
5	25	0		19.81	19.74	19.79

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		22.94	
10	1	25			22.50	
10	1	49			22.66	
10	25	0			21.75	
10	25	12			21.70	
10	25	25			21.73	
10	50	0			21.67	
10	1	0	16-QAM		22.09	
10	1	25			21.83	
10	1	49			21.99	
10	25	0			20.76	
10	25	12			20.68	
10	25	25			20.63	
10	50	0			20.73	
10	1	0	64QAM		20.98	
10	1	25			20.81	
10	1	49			20.93	
10	25	0			19.76	
10	25	12			19.67	
10	25	25			19.71	
10	50	0			19.68	

ERP

LTE Band 14 ($G_T - L_C = -3.30$ dBi) QPSK						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	22.82	22.86	22.80		22.94	
Conducted Power (Watts)	0.1914	0.1932	0.1905		0.1968	
ERP(dBm)	17.37	17.41	17.35		17.49	
ERP(Watts)	0.0546	0.0551	0.0543		0.0561	

LTE Band 14 ($G_T - L_C = -3.30$ dBi) 16QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	22.10	22.17	22.04		22.09	
Conducted Power (Watts)	0.1622	0.1648	0.1600		0.1618	
ERP(dBm)	16.65	16.72	16.59		16.64	
ERP(Watts)	0.0462	0.0470	0.0456		0.0461	



LTE Band 14 ($G_T - L_C = -3.30$ dBi) 64QAM						
Bandwidth	5M			10M		
Channel	23305	23330	23355		23330	
	(Low)	(Mid)	(High)		(Mid)	
Frequency	790.5	793	795.5		793	
(MHz)						
Conducted Power (dBm)	20.90	20.97	20.90		20.98	
Conducted Power (Watts)	0.1230	0.1250	0.1230		0.1253	
ERP(dBm)	15.45	15.52	15.45		15.53	
ERP(Watts)	0.0351	0.0356	0.0351		0.0357	




26dB Bandwidth

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.935	4.935	-	-	-	-	-	-
Middle CH	-	-	-	-	4.935	4.935	9.465	9.638	-	-	-	-
Highest CH	-	-	-	-	4.92	4.863	-	-	-	-	-	-
BW	5MHz						10MHz					
Mod.	64QAM						64QAM					
Lowest CH	4.877						-					
Middle CH	4.964						9.580					
Highest CH	4.891						-					




LTE Band 14

Lowest Channel / 5MHz / QPSK

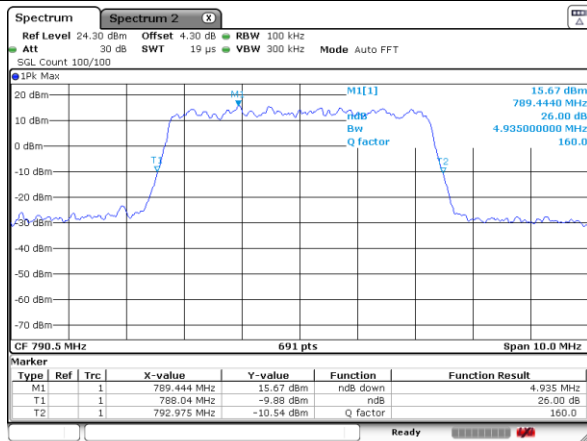


Date: 23.OCT.2018 00:19:35

Lowest Channel / 5MHz / 16QAM

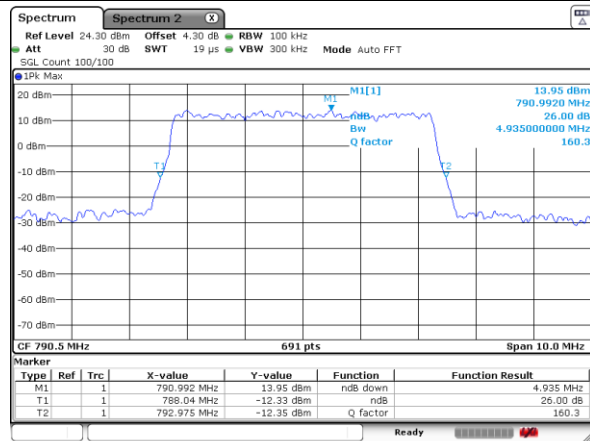


Date: 23.OCT.2018 00:19:23

Middle Channel / 5MHz / QPSK

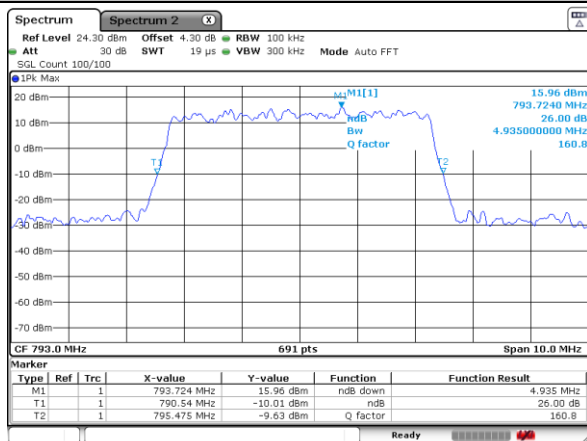


Date: 23.OCT.2018 00:17:38

Middle Channel / 5MHz / 16QAM

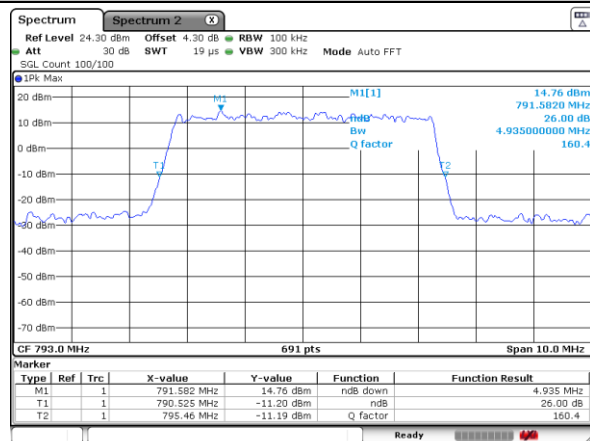


Date: 23.OCT.2018 00:17:55

Highest Channel / 5MHz / QPSK

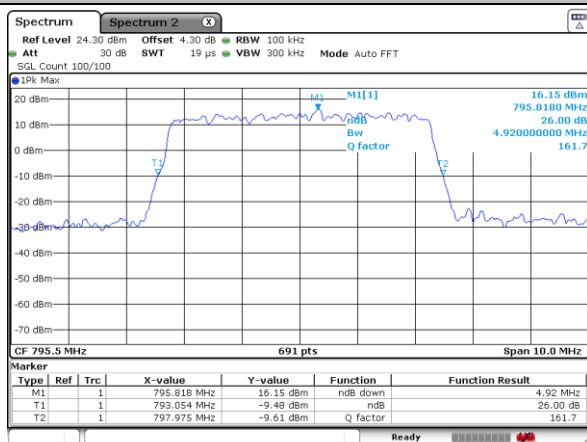

Date: 23.OCT.2018 00:22:09

Highest Channel / 5MHz / 16QAM

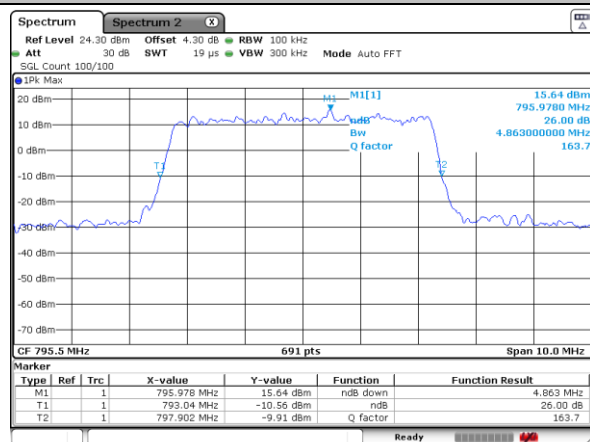


Date: 23.OCT.2018 00:22:27




LTE Band 14

Middle Channel / 10MHz / QPSK

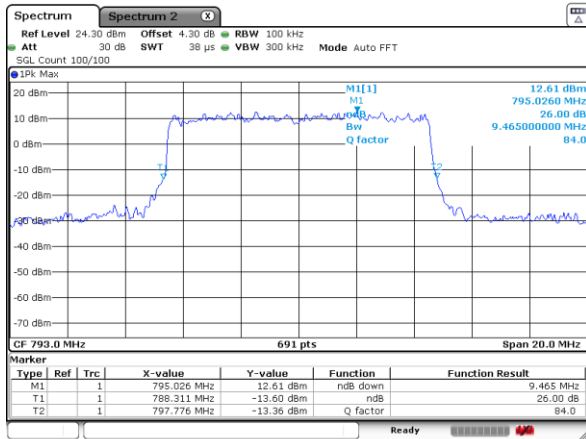

Date: 23.OCT.2018 00:14:09

Middle Channel / 10MHz / 16QAM

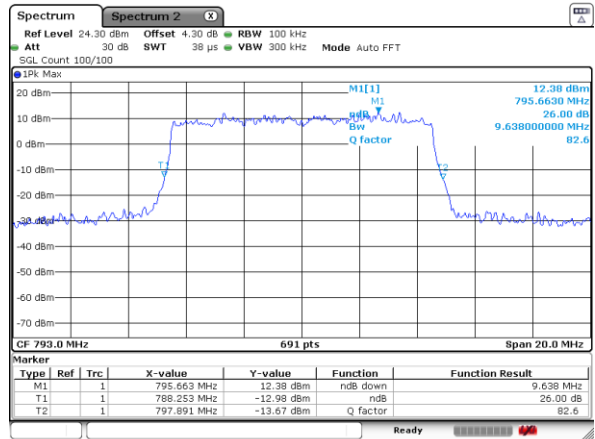


Date: 23.OCT.2018 00:15:27




LTE Band 14

Lowest Channel / 5MHz / 64QAM

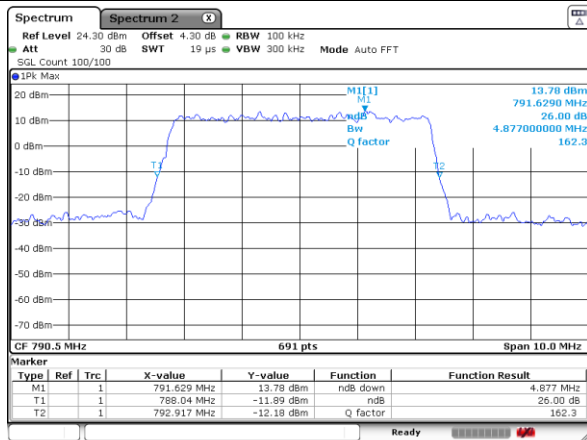


Date: 23.OCT.2018 00:19:04

Middle Channel / 5MHz / 64QAM

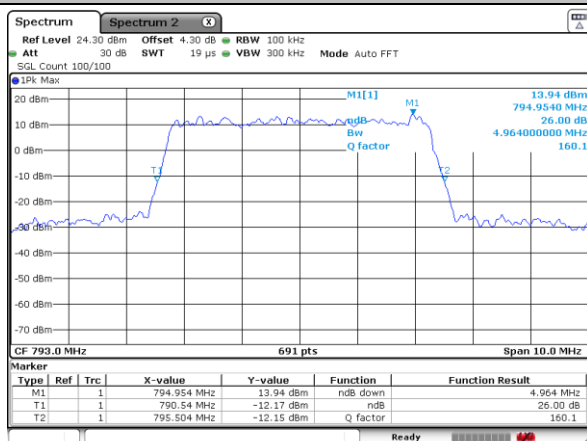


Date: 23.OCT.2018 00:18:09

Middle Channel / 10MHz / 64QAM

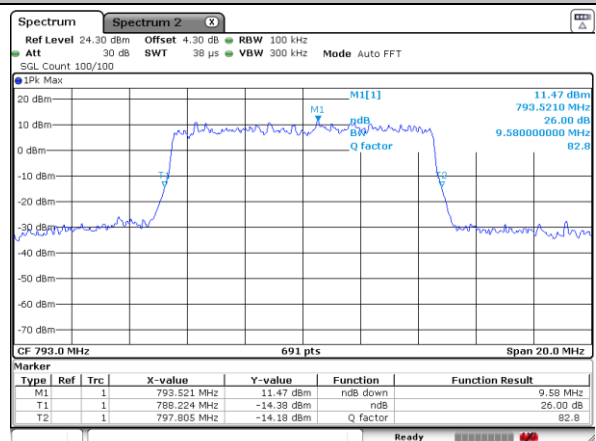

Date: 23.OCT.2018 00:15:48

Highest Channel / 5MHz / 64QAM

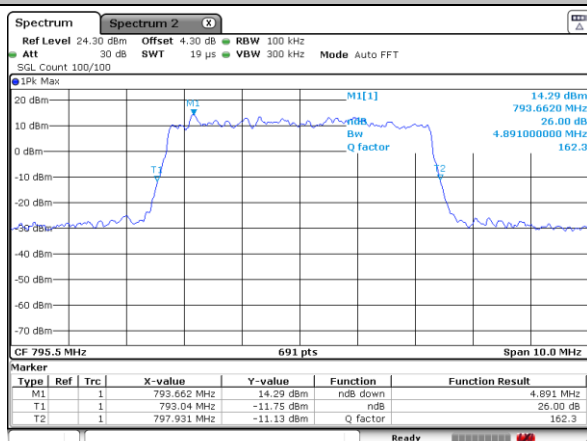

Date: 23.OCT.2018 00:22:40




Occupied Bandwidth

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.52	4.47	-	-	-	-	-	-
Middle CH	-	-	-	-	4.49	4.49	8.94	8.94	-	-	-	-
Highest CH	-	-	-	-	4.49	4.50	-	-	-	-	-	-
BW	5MHz						10MHz					
Mod.	64QAM						64QAM					
Lowest CH	4.50						-					
Middle CH	4.53						8.94					
Highest CH	4.50						-					




LTE Band 14

Lowest Channel / 5MHz / QPSK

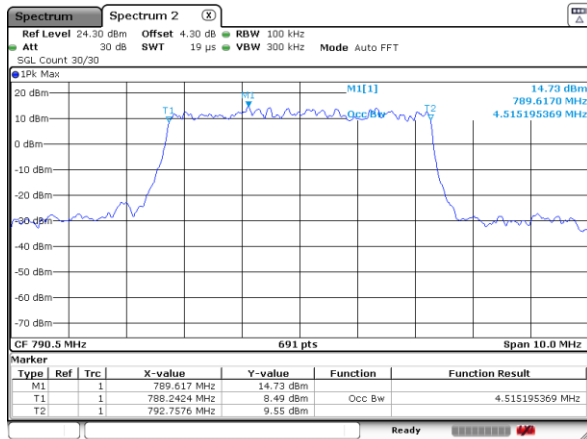


Date: 23.OCT.2018 00:20:03

Lowest Channel / 5MHz / 16QAM

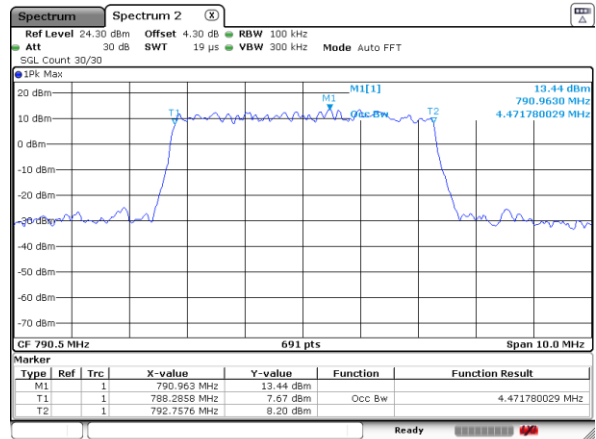


Date: 23.OCT.2018 00:20:29

Middle Channel / 5MHz / QPSK

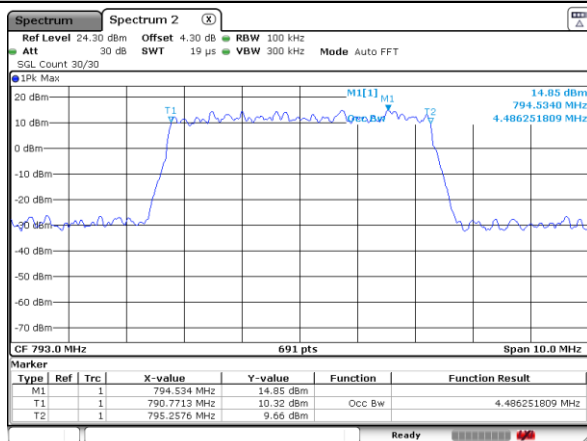


Date: 23.OCT.2018 00:17:18

Middle Channel / 5MHz / 16QAM

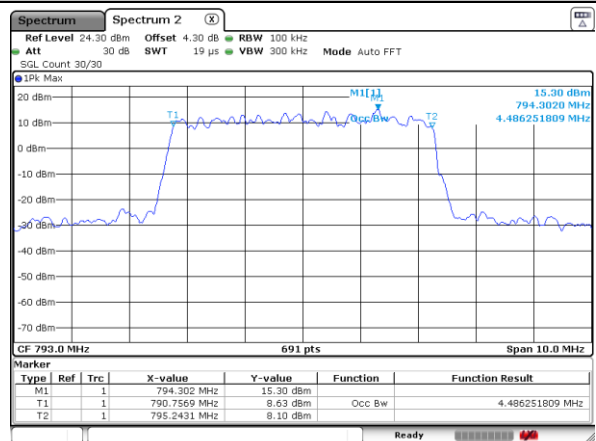


Date: 23.OCT.2018 00:17:06

Highest Channel / 5MHz / QPSK

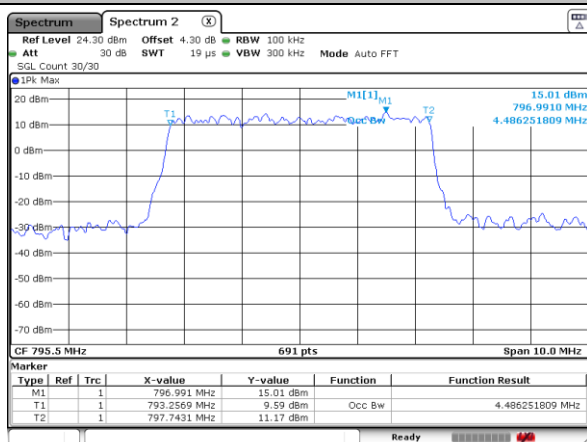

Date: 23.OCT.2018 00:21:50

Highest Channel / 5MHz / 16QAM

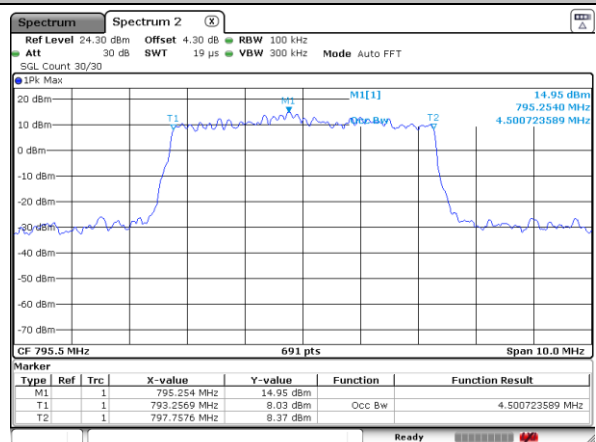


Date: 23.OCT.2018 00:21:37




LTE Band 14

Middle Channel / 10MHz / QPSK

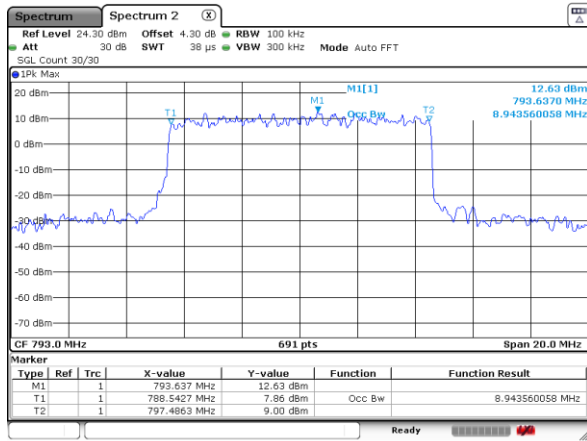

Date: 23.OCT.2018 00:14:44

Middle Channel / 10MHz / 16QAM

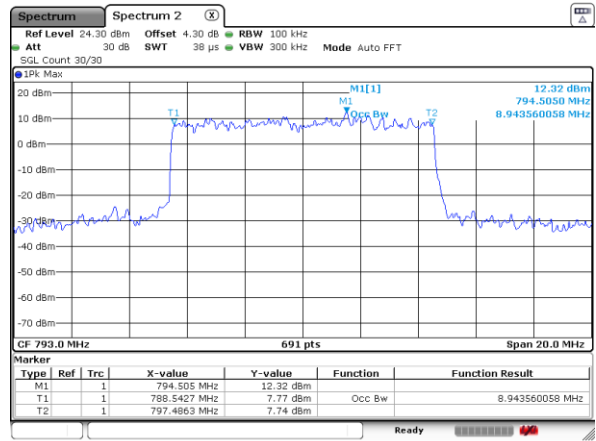


Date: 23.OCT.2018 00:15:07




LTE Band 14

Lowest Channel / 5MHz / 64QAM

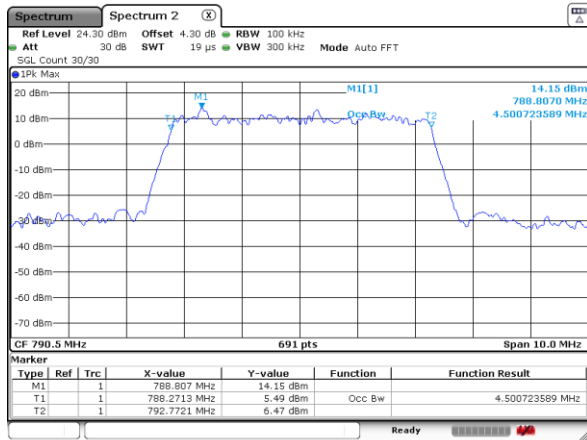


Date: 23.OCT.2018 00:20:45

Middle Channel / 5MHz / 64QAM

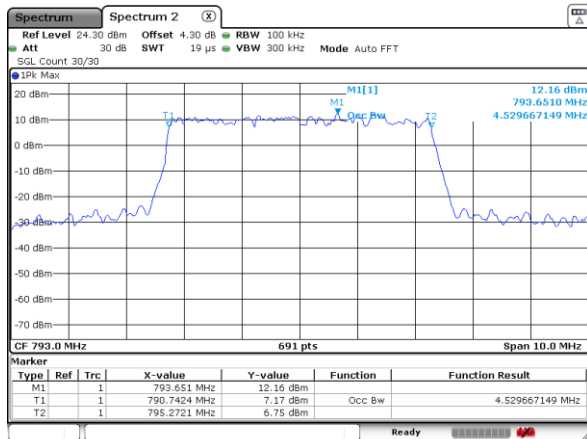


Date: 23.OCT.2018 00:16:39

Middle Channel / 10MHz / 64QAM

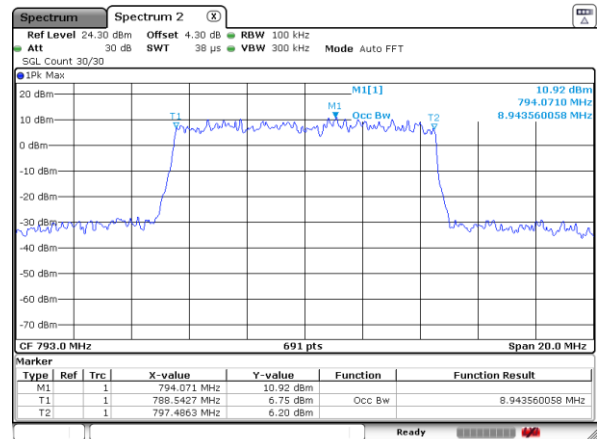

Date: 23.OCT.2018 00:16:02

Highest Channel / 5MHz / 64QAM

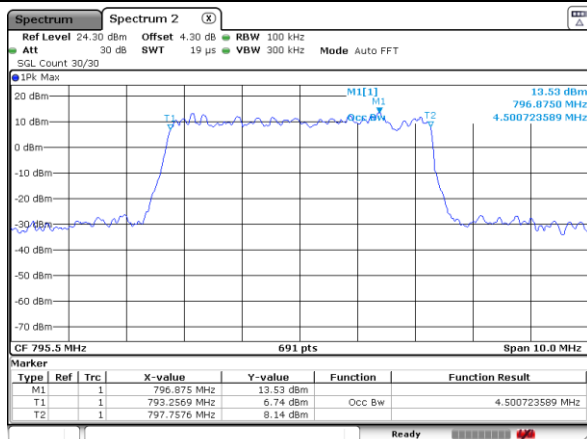


Date: 23.OCT.2018 00:21:15



Conducted Band Edge


LTE Band 14 / 5MHz / QPSK

Lowest Band Edge / 1 RB

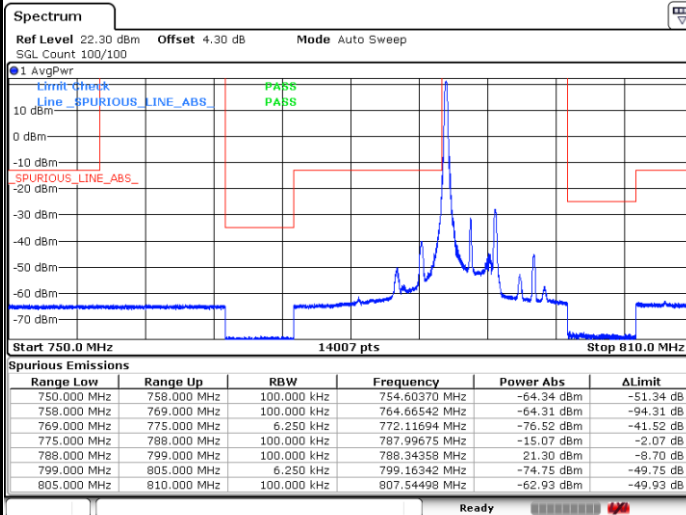


Date: 23.OCT.2018 04:34:05

Highest Band Edge / 1 RB

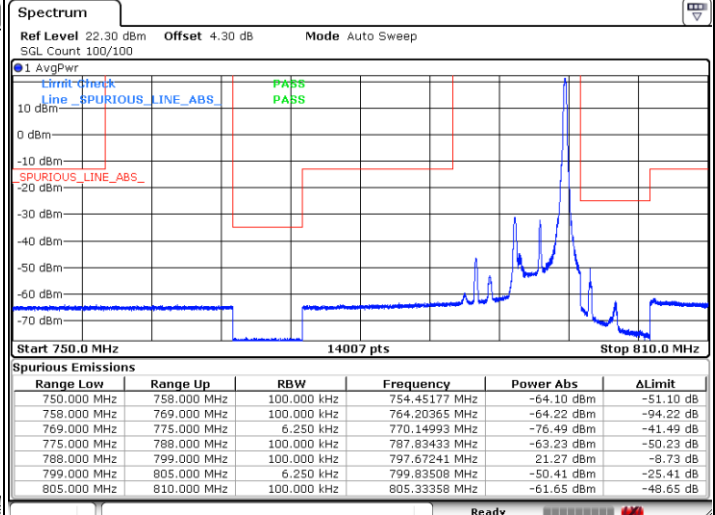


Date: 23.OCT.2018 04:34:58

Lowest Band Edge / Full RB

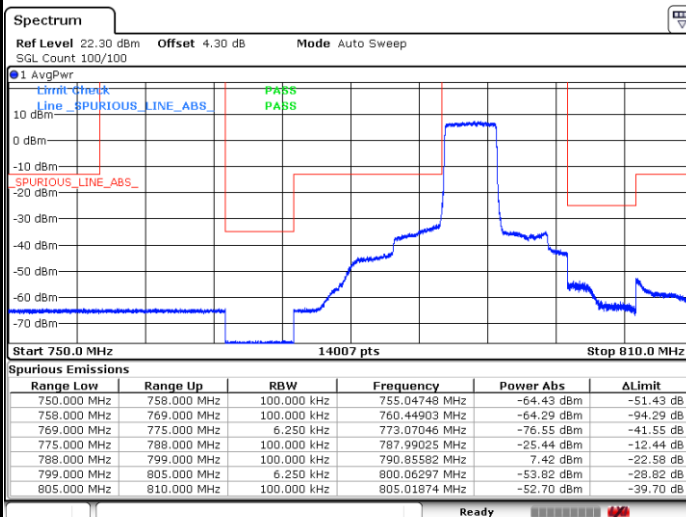

Date: 23.OCT.2018 04:30:58

Highest Band Edge / Full RB

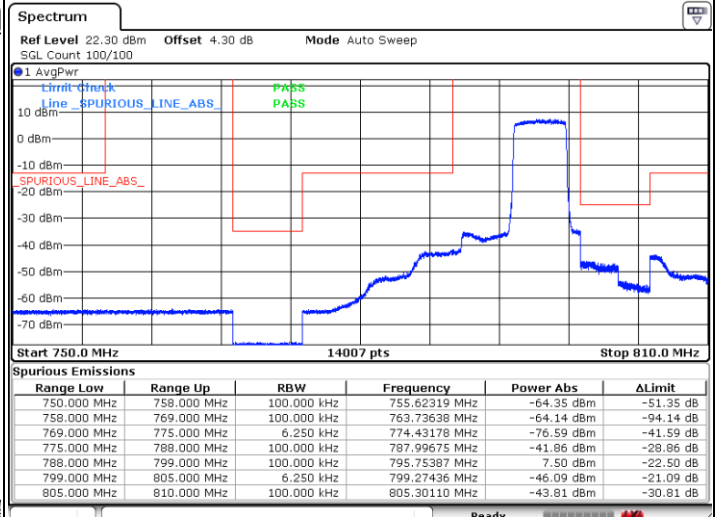


Date: 23.OCT.2018 04:38:43




LTE Band 14 / 5MHz / 16QAM

Lowest Band Edge /1 RB

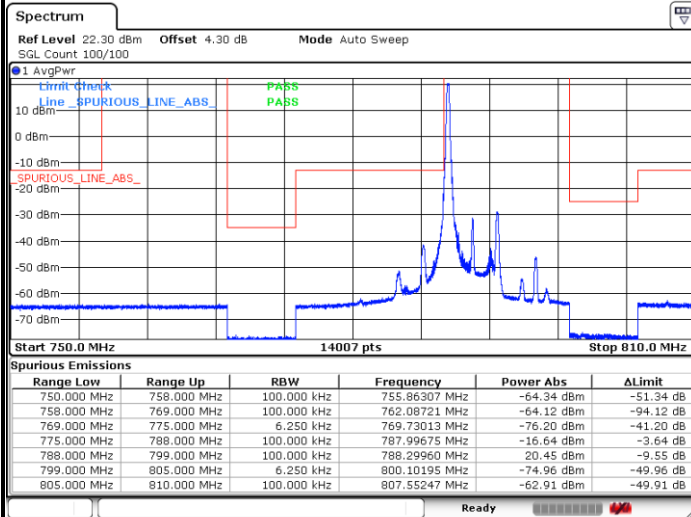


Date: 23.OCT.2018 04:33:30

Highest Band Edge / 1 RB

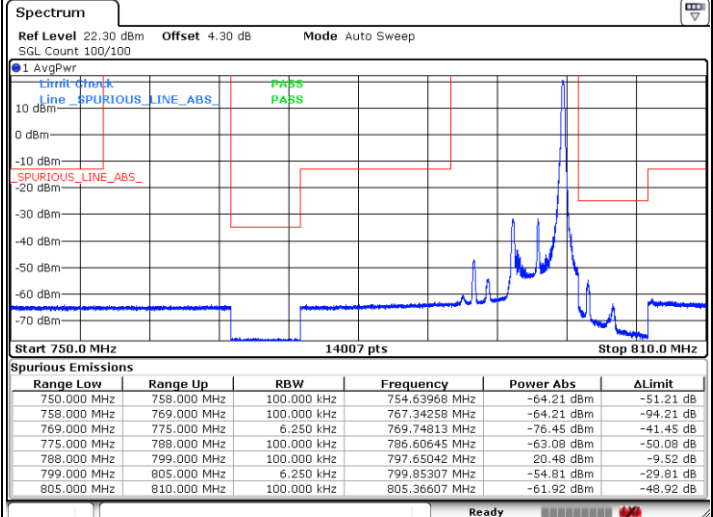


Date: 23.OCT.2018 04:36:24

Lowest Band Edge / Full RB

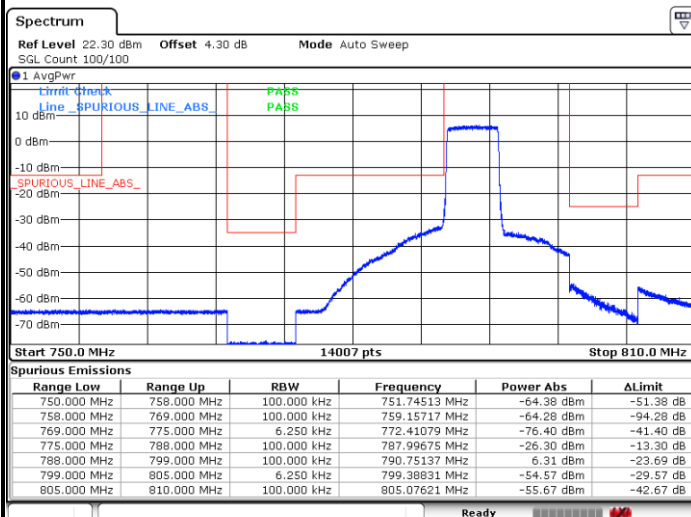

Date: 23.OCT.2018 04:31:47

Highest Band Edge / Full RB

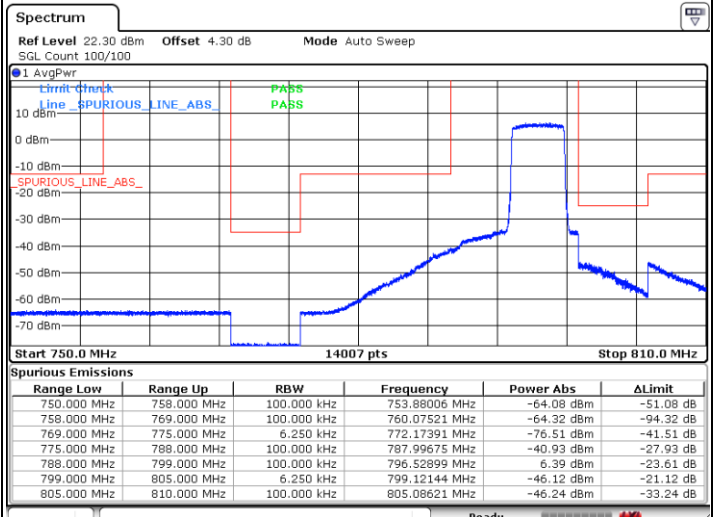


Date: 23.OCT.2018 04:38:09




LTE Band 14 / 10MHz / QPSK

Lowest Band Edge / 1 RB

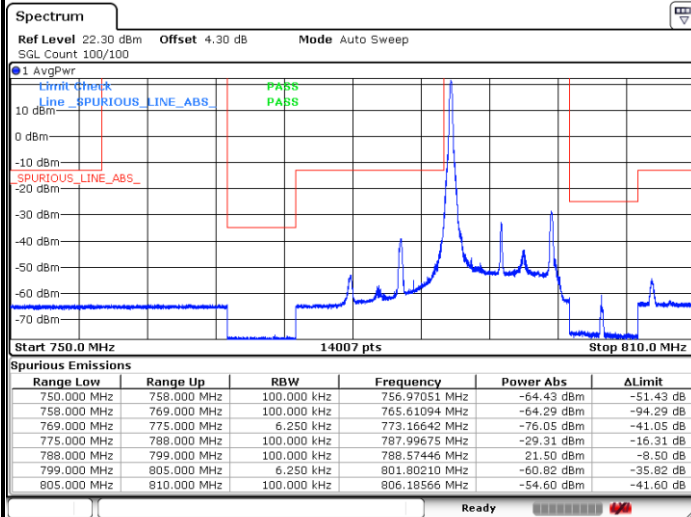


Date: 23.OCT.2018 04:25:11

Highest Band Edge / 1 RB

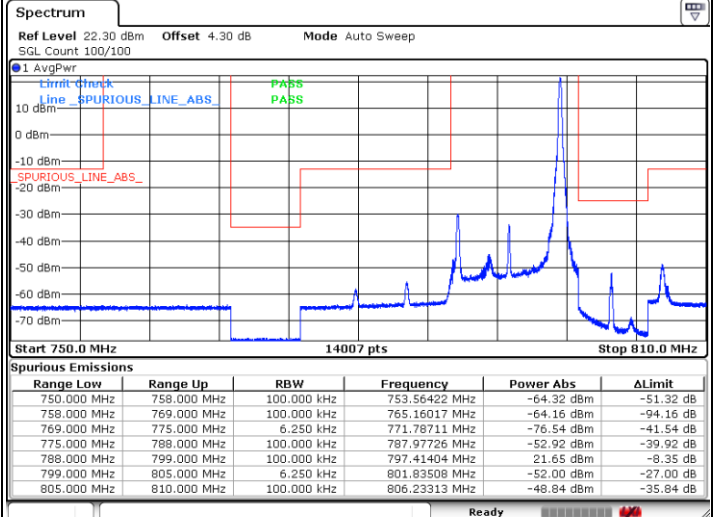

Date: 23.OCT.2018 04:24:37

Band Edge / Full RB

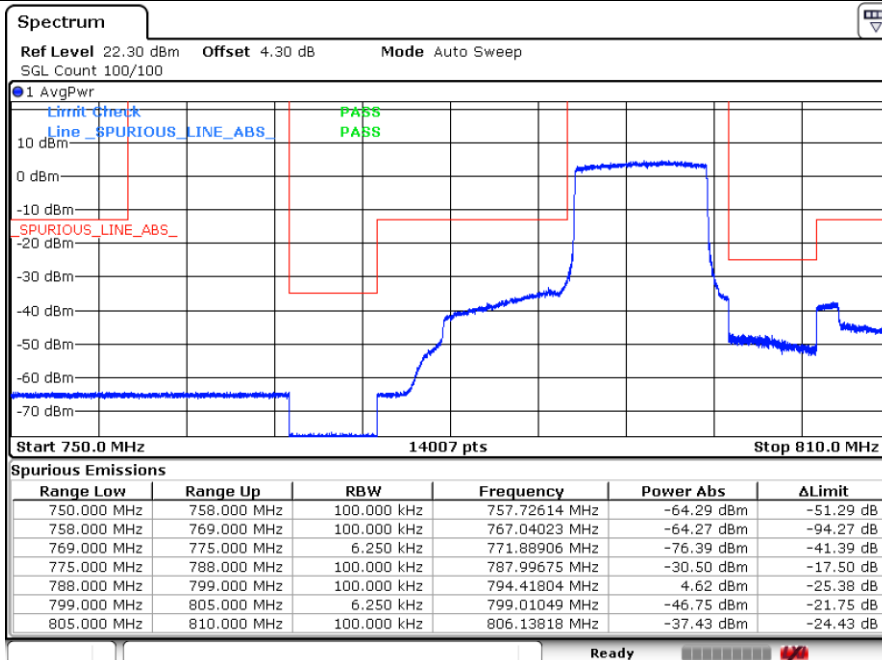


Date: 23.OCT.2018 04:28:24




LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

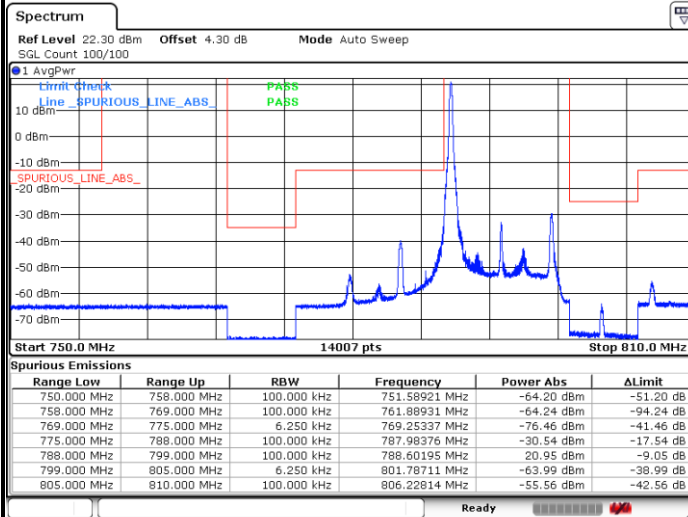


Date: 23.OCT.2018 04:25:44

Highest Band Edge / 1 RB

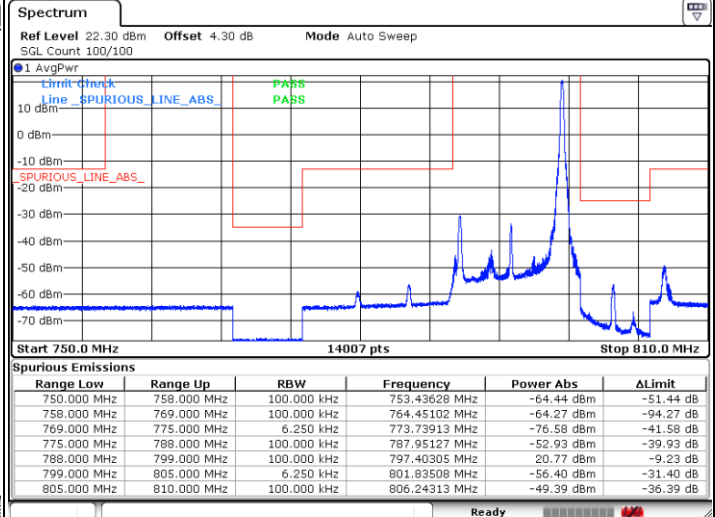

Date: 23.OCT.2018 04:24:03

Band Edge / Full RB

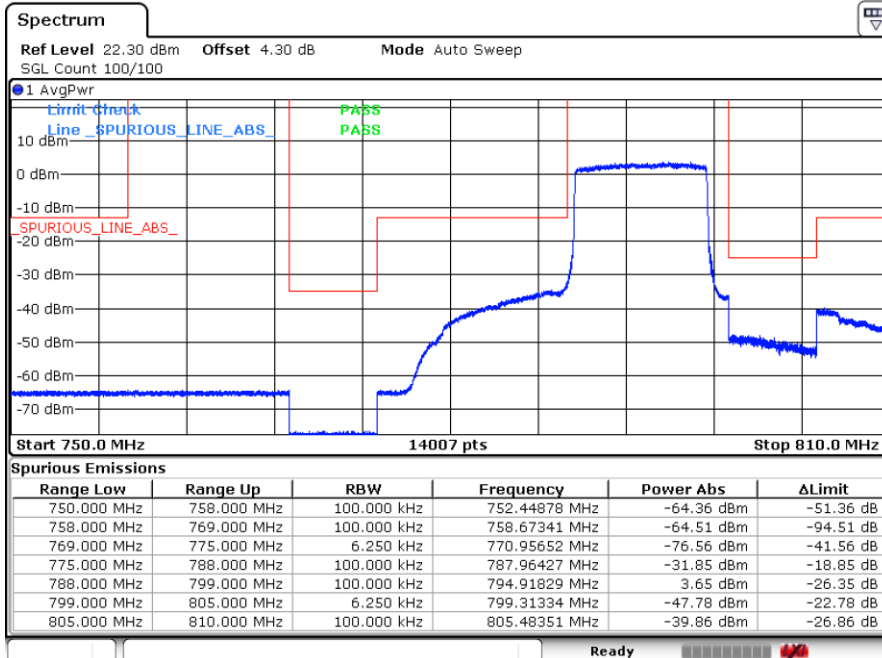


Date: 23.OCT.2018 04:27:30




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge /1 RB

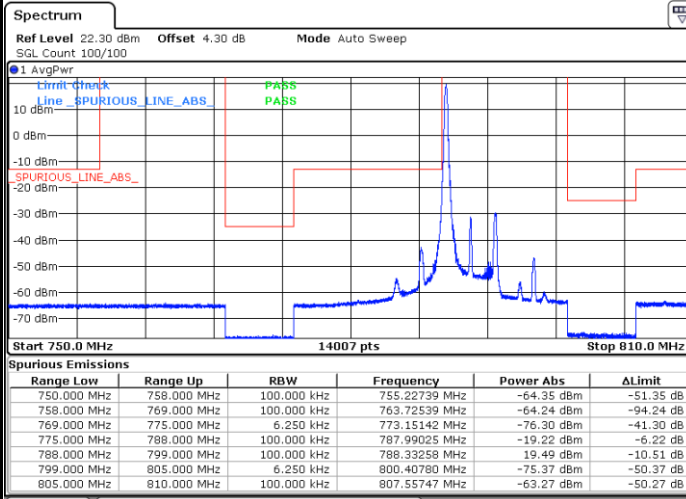


Date: 23.OCT.2018 04:32:56

Highest Band Edge / 1 RB

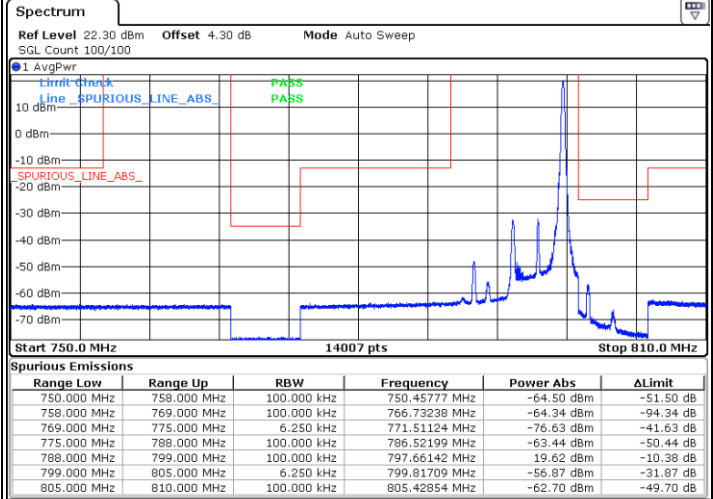


Date: 23.OCT.2018 04:36:56

Lowest Band Edge / Full RB

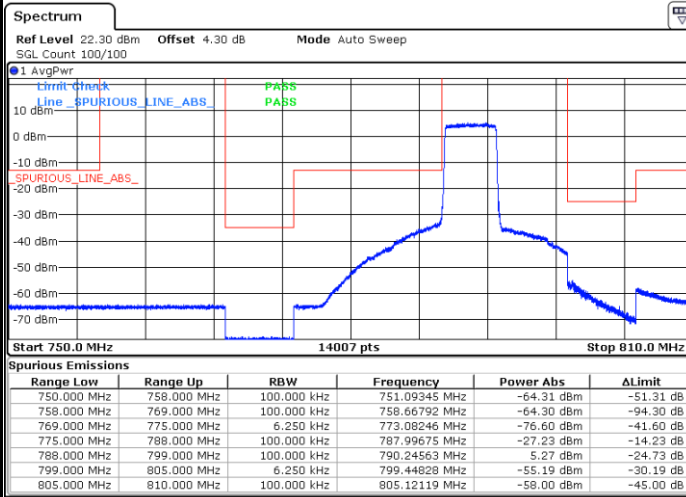

Date: 23.OCT.2018 04:32:20

Highest Band Edge / Full RB

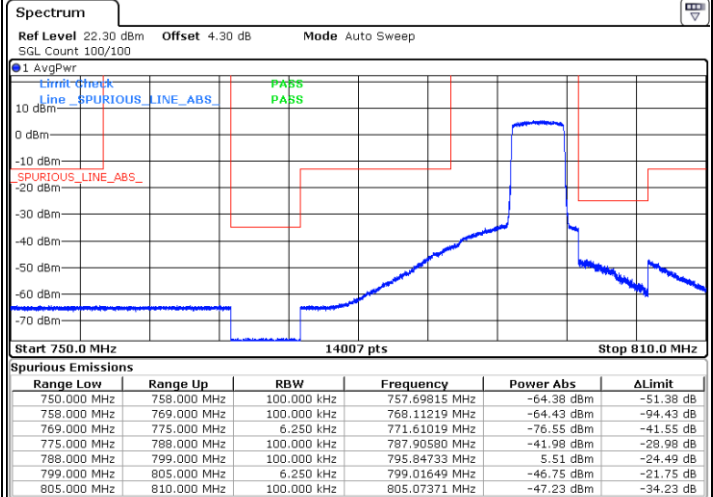


Date: 23.OCT.2018 04:37:32




LTE Band 14 / 10MHz / 64QAM

Band Edge / 1 RB

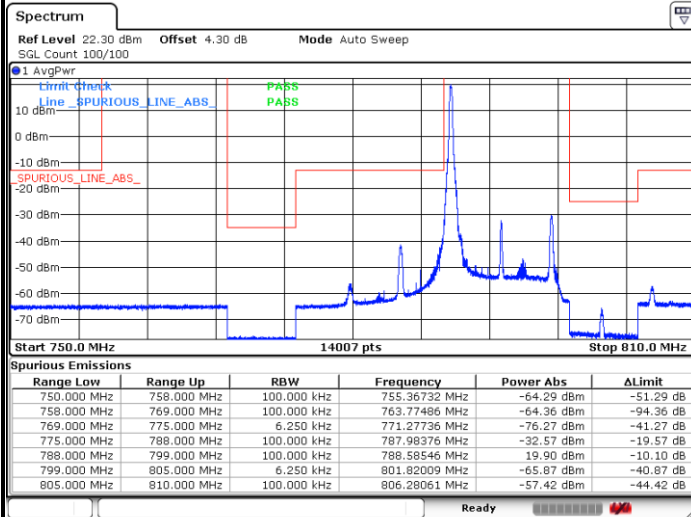


Date: 23.OCT.2018 04:26:20

Band Edge / 1 RBMax






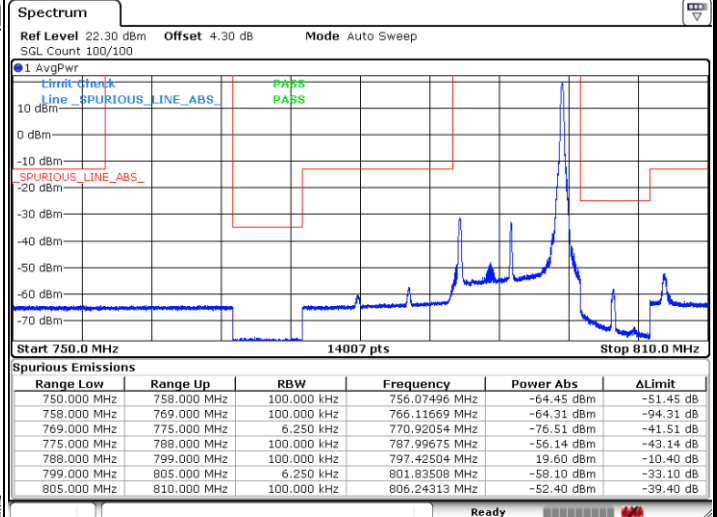


Date: 23.OCT.2018 04:23:22

Band Edge / Full RB

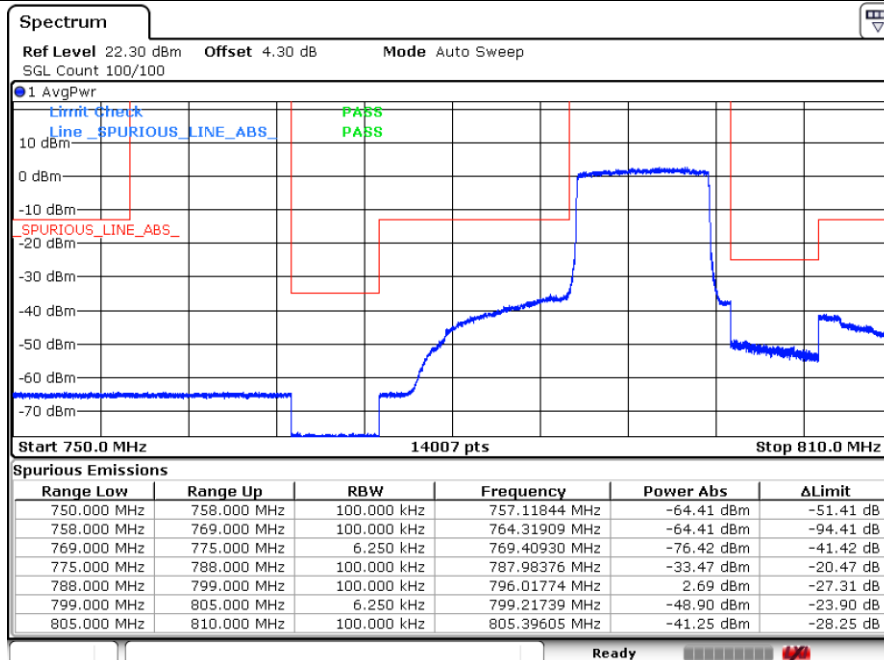


Date: 23.OCT.2018 04:26:57

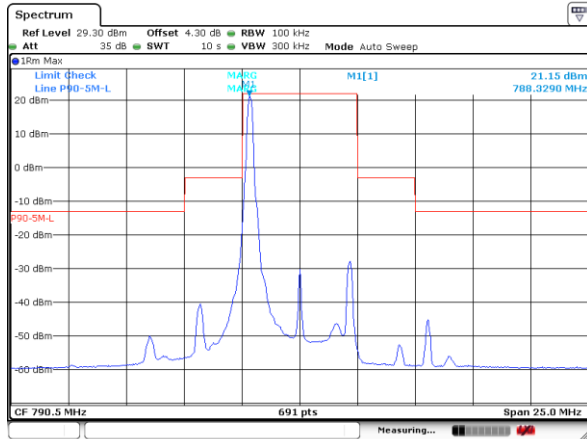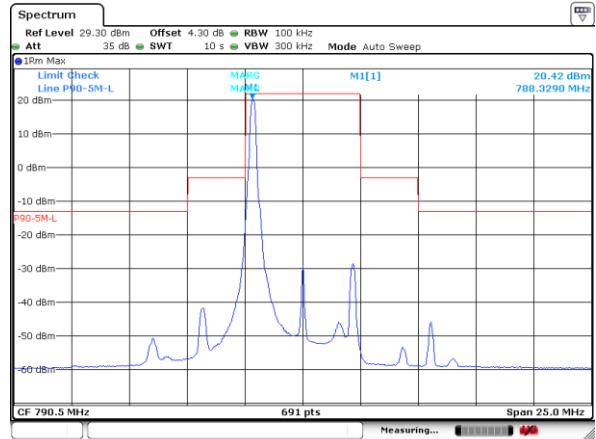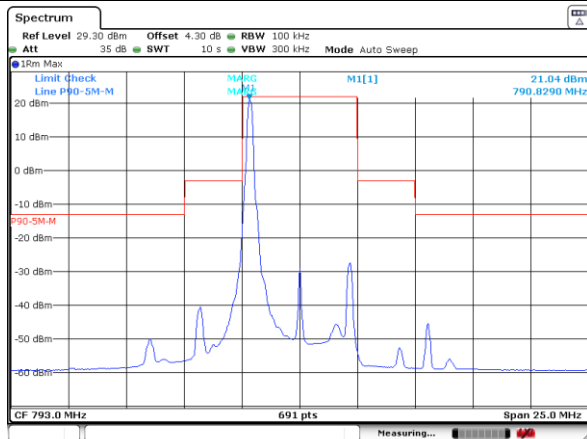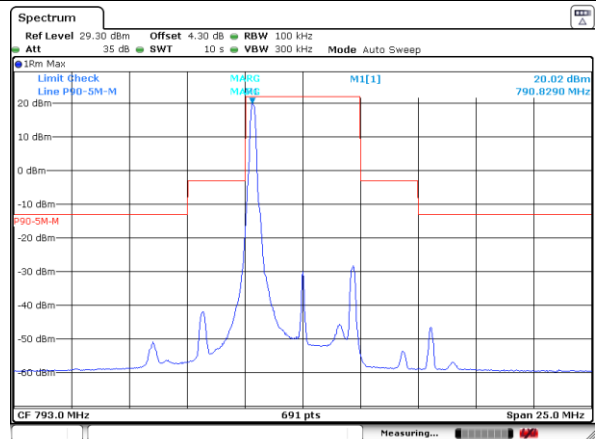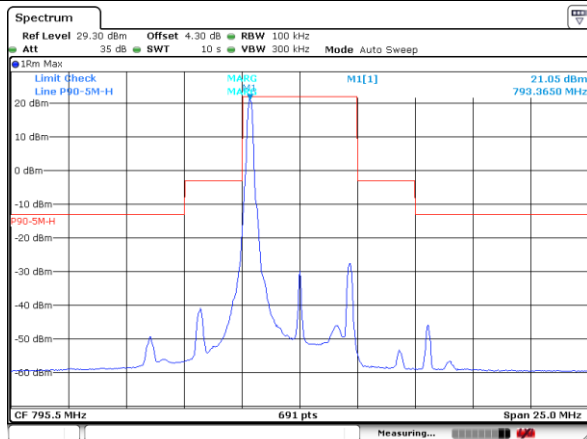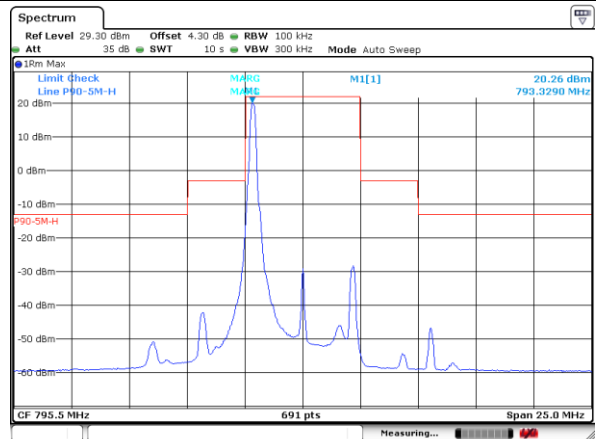
**Emission Mask B****LTE Band 14/ 5MHz****Lowest Channel / 5MHz / QPSK****Lowest Channel / 5MHz / 16QAM****Middle Channel / 5MHz / QPSK****Middle Channel / 5MHz / 16QAM****Highest Channel / 5MHz / QPSK****Highest Channel / 5MHz / 16QAM**

LTE Band 14/ 5MHz


Lowest Channel / 5MHz / QPSK

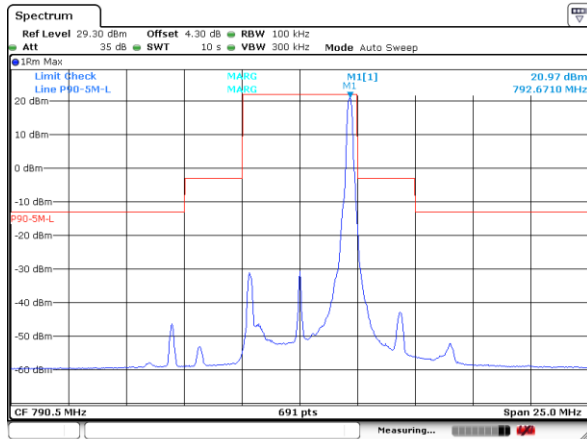


Lowest Channel / 5MHz / 16QAM

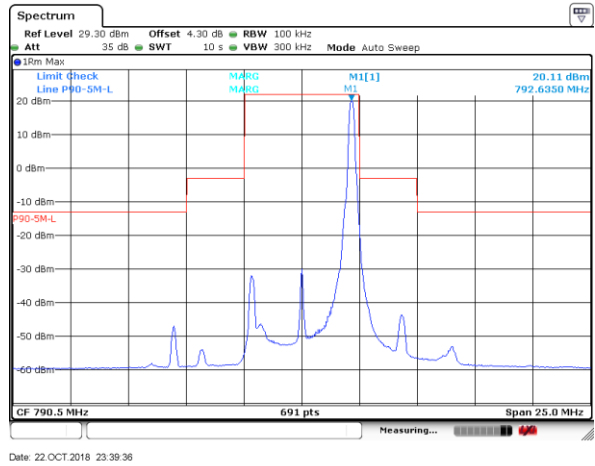


Middle Channel / 5MHz / QPSK

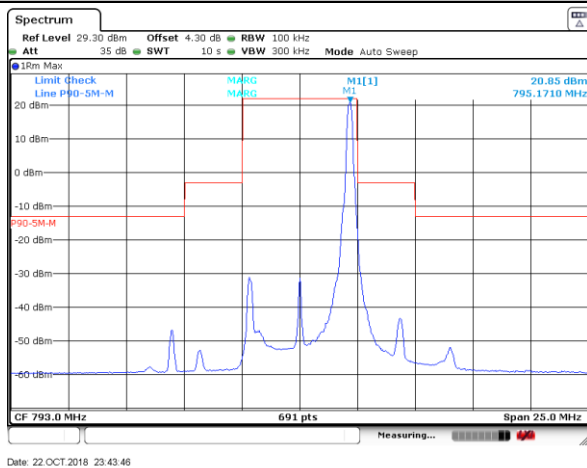


Middle Channel / 5MHz / 16QAM

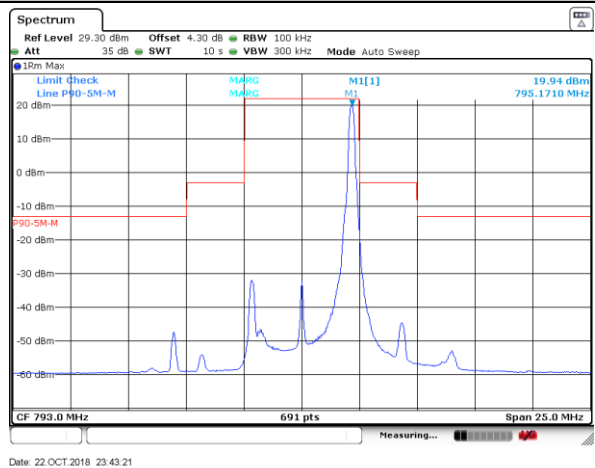

Highest Channel / 5MHz / QPSK

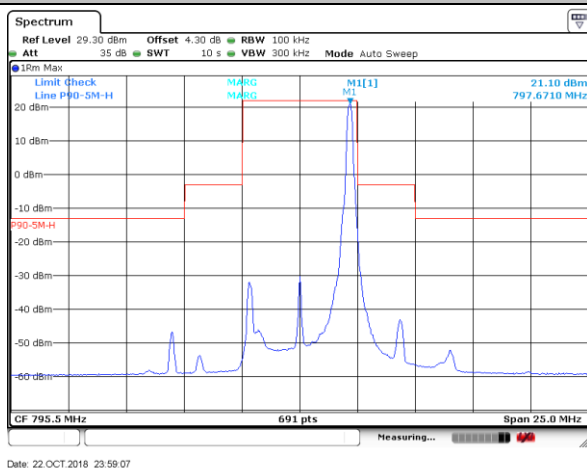


Highest Channel / 5MHz / 16QAM

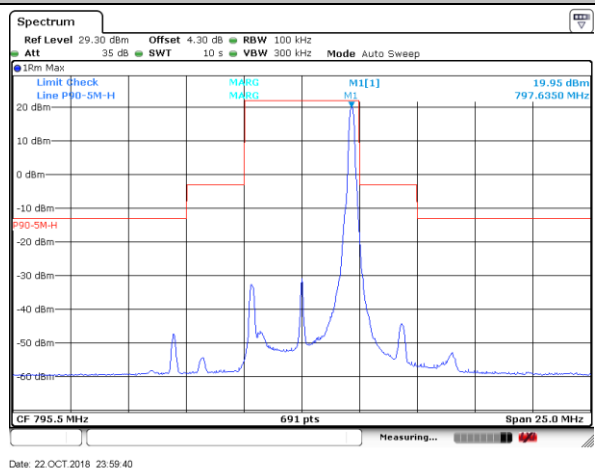


LTE Band 14/ 5MHz


Lowest Channel / 5MHz / QPSK

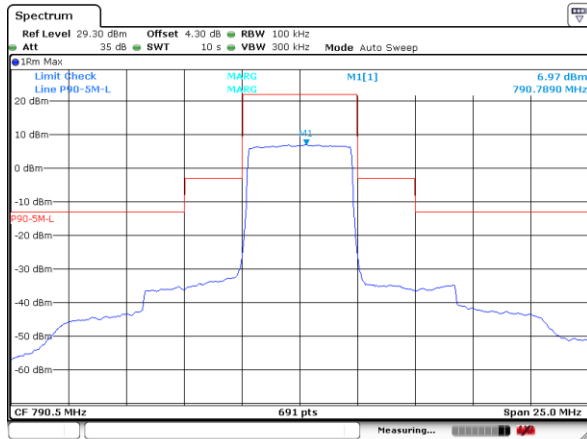


Lowest Channel / 5MHz / 16QAM

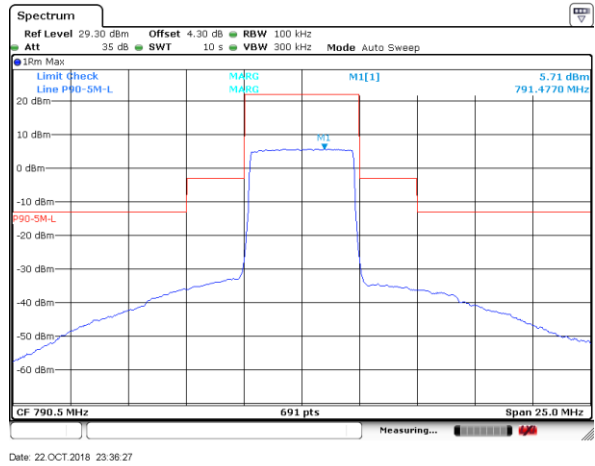


Middle Channel / 5MHz / QPSK

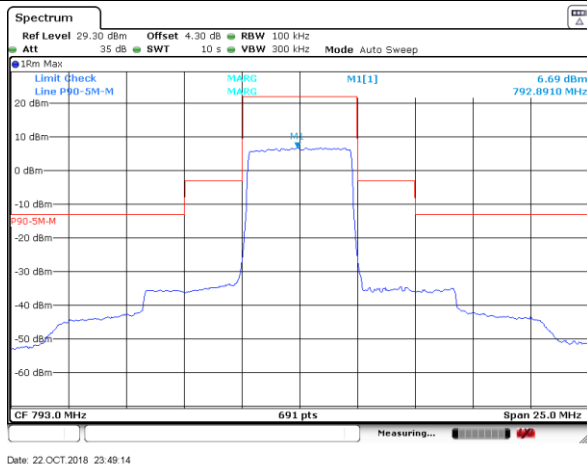


Middle Channel / 5MHz / 16QAM

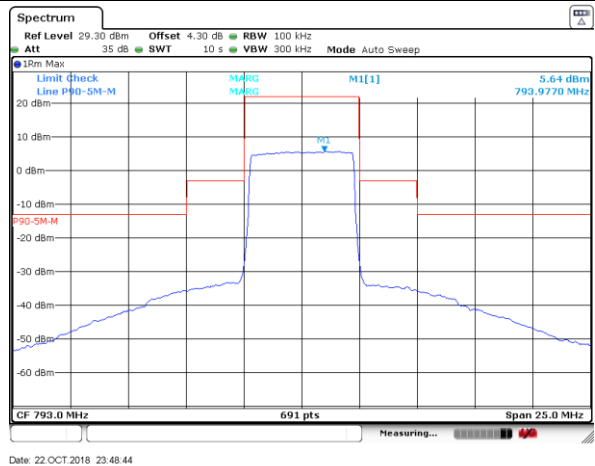

Highest Channel / 5MHz / QPSK

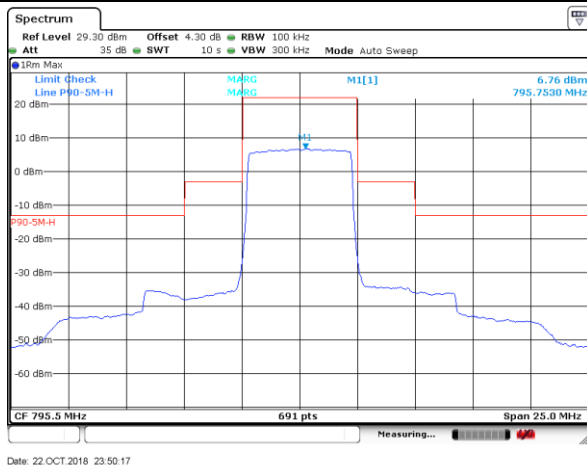


Highest Channel / 5MHz / 16QAM

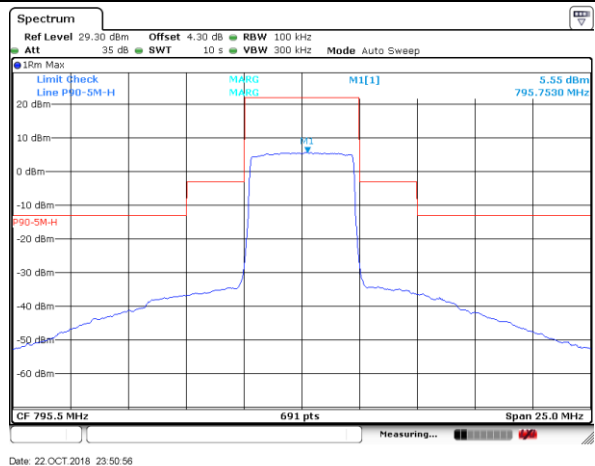


LTE Band 14/ 10MHz

Middle Channel / 1RB0 / QPSK

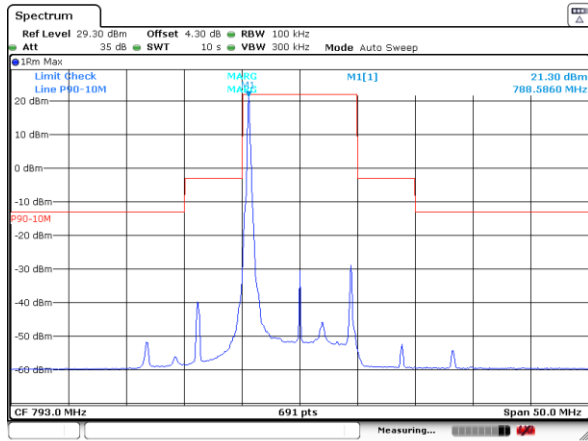


Date: 23.OCT.2018 00:02:42

Middle Channel / 1RB0 / 16QAM

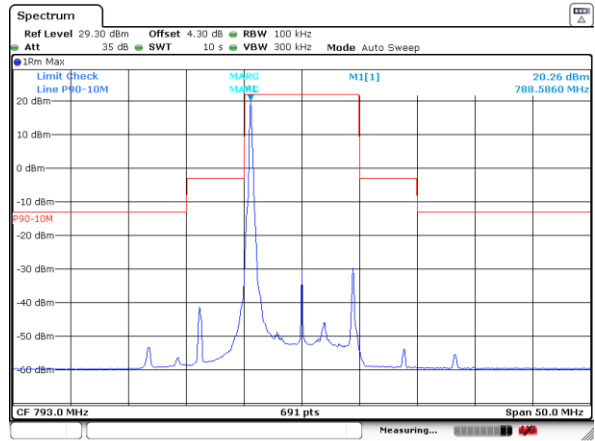


Date: 23.OCT.2018 00:03:16

Middle Channel / 1RBmax / QPSK

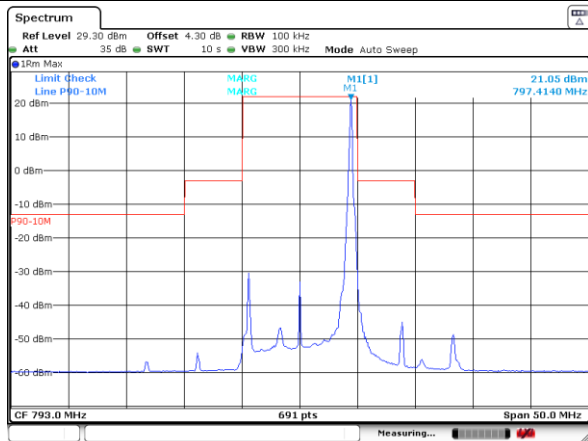


Date: 23.OCT.2018 00:05:08

Middle Channel / 1RBmax / 16QAM

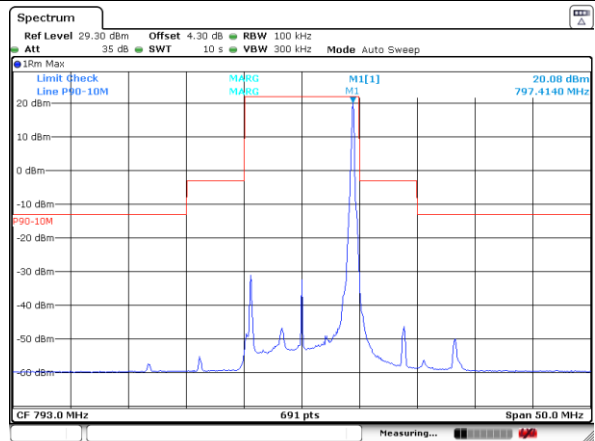


Date: 23.OCT.2018 00:04:42

Middle Channel / fullRB0 / QPSK






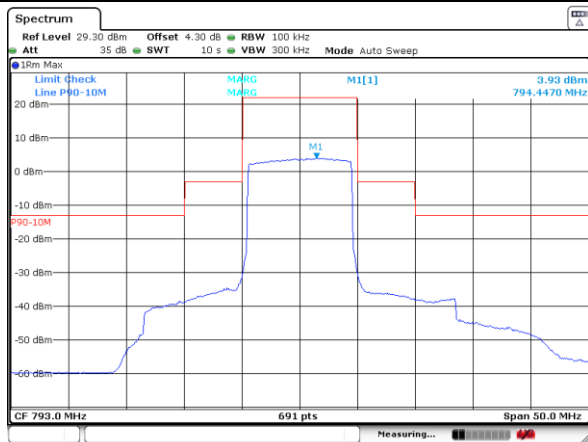


Date: 23.OCT.2018 00:02:17

Middle Channel / fullRB0 / 16QAM

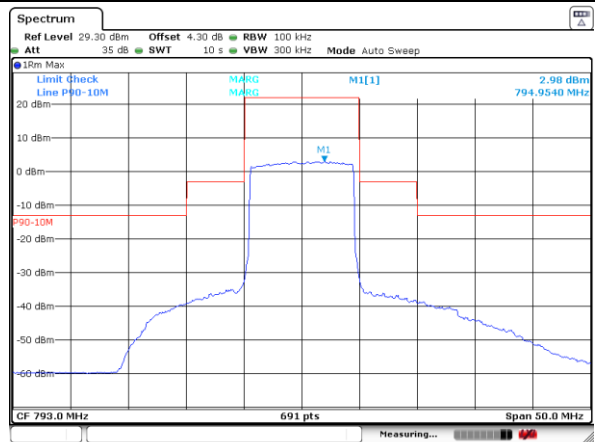


Date: 23.OCT.2018 00:01:52

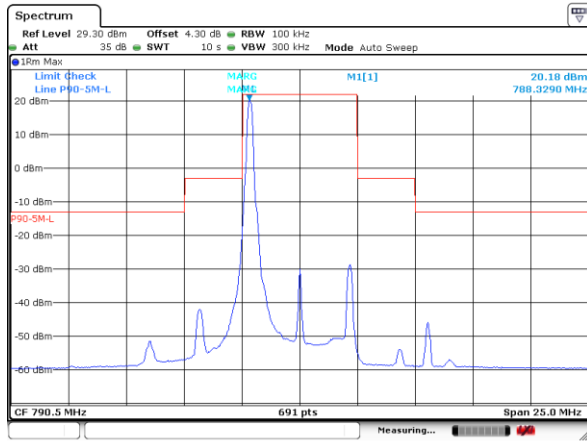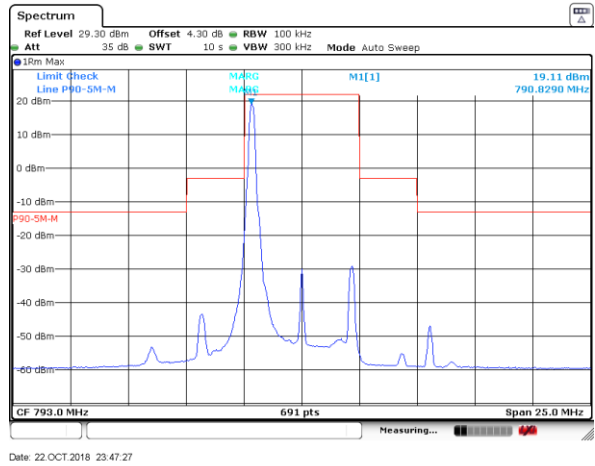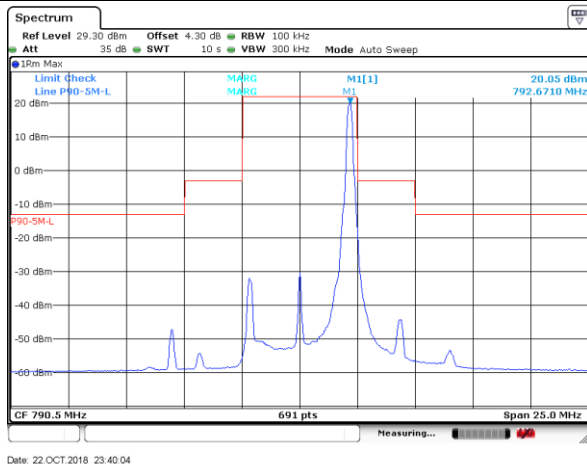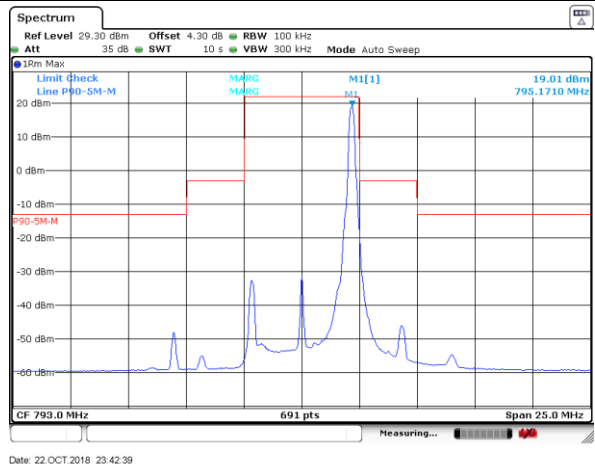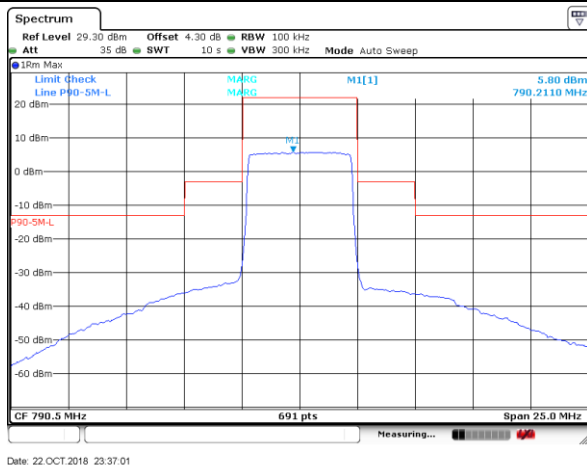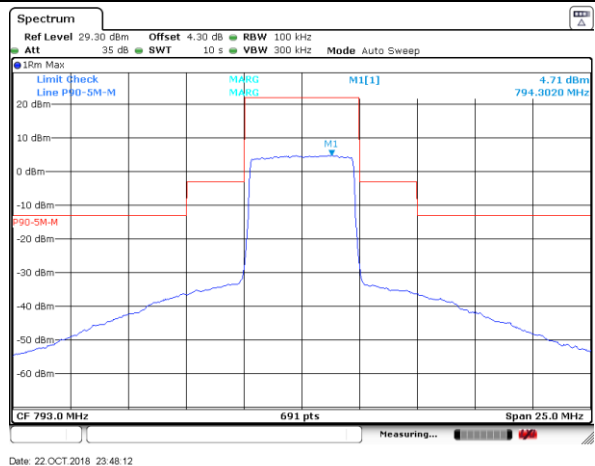LTE Band 14 /5MHz
Lowest / 5MHz / 1RB0/ 64QAM

Middle / 5MHz / 1RB0/ 64QAM

Lowest / 5MHz / 1RBmax/ 64QAM

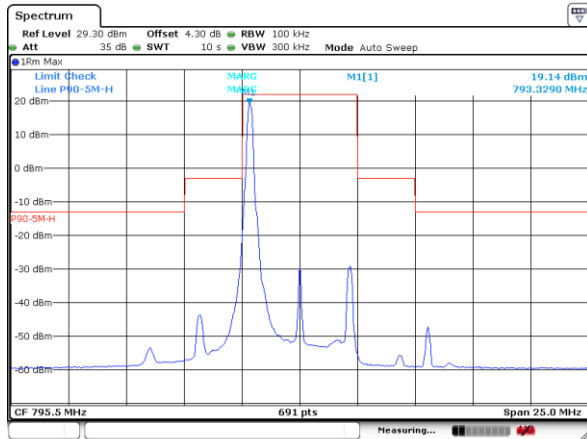Middle / 5MHz / 1RBmax/ 64QAM

Lowest / 5MHz / Full RB / 64QAM

Middle / 5MHz / Full RB / 64QAM


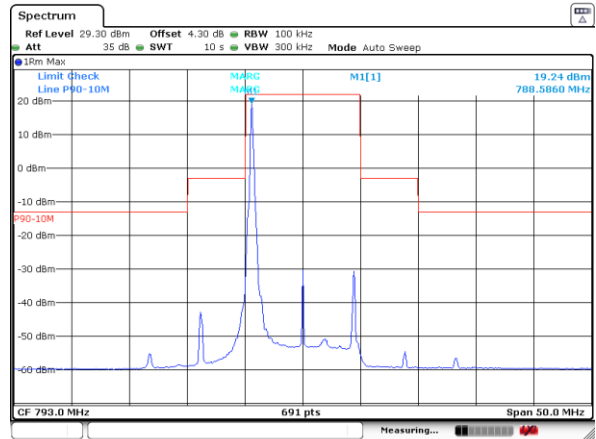
LTE Band 14 /5MHz

Highest / 5MHz / Full RB/ 64QAM




Date: 22.OCT.2018 23:51:52

Middle / 10MHz / 1RB0 / 64QAM




Date: 23.OCT.2018 00:03:45

Highest / 5MHz / 1RBMax / 64QAM

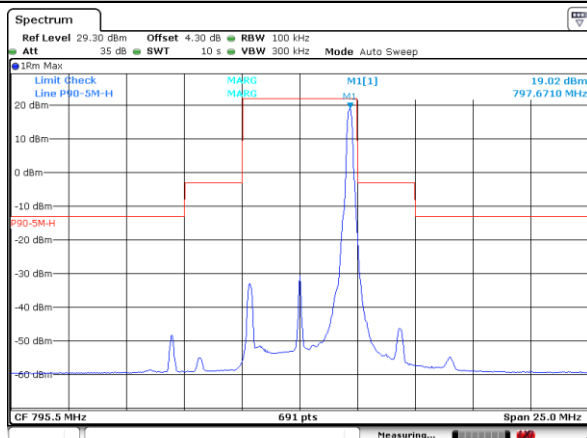


Date: 23.OCT.2018 00:00:08

Middle / 10MHz / 1RBMax / 64QAM

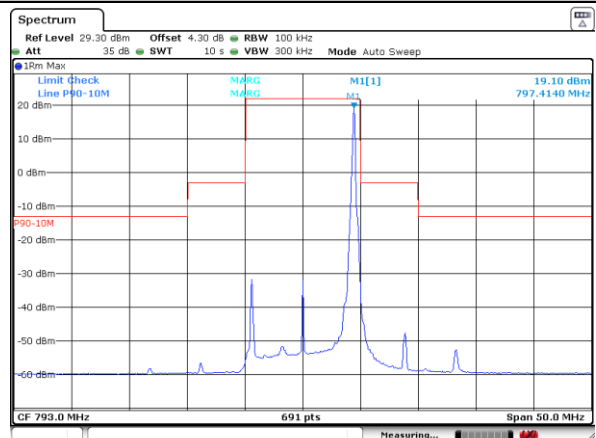


Date: 23.OCT.2018 00:04:16

Highest / 5MHz / Full RB / 64QAM

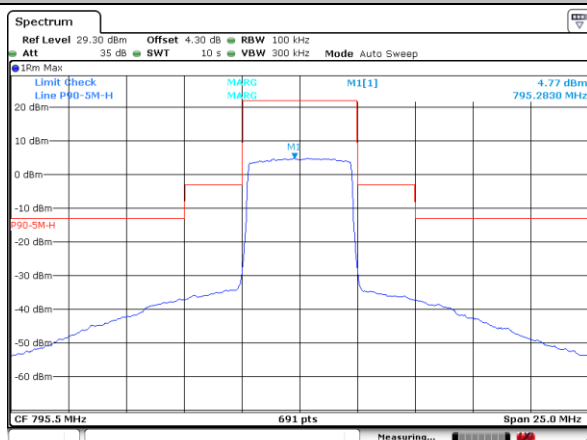

Date: 22.OCT.2018 23:51:22


Middle /10MHz / Full RB / 64QAM

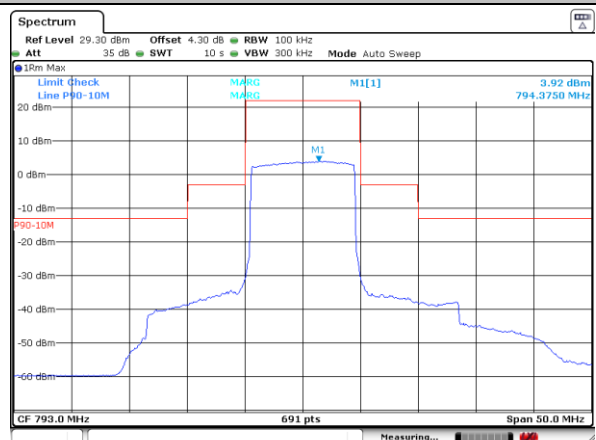

Date: 23.OCT.2018 00:07:37




Conducted Spurious Emission

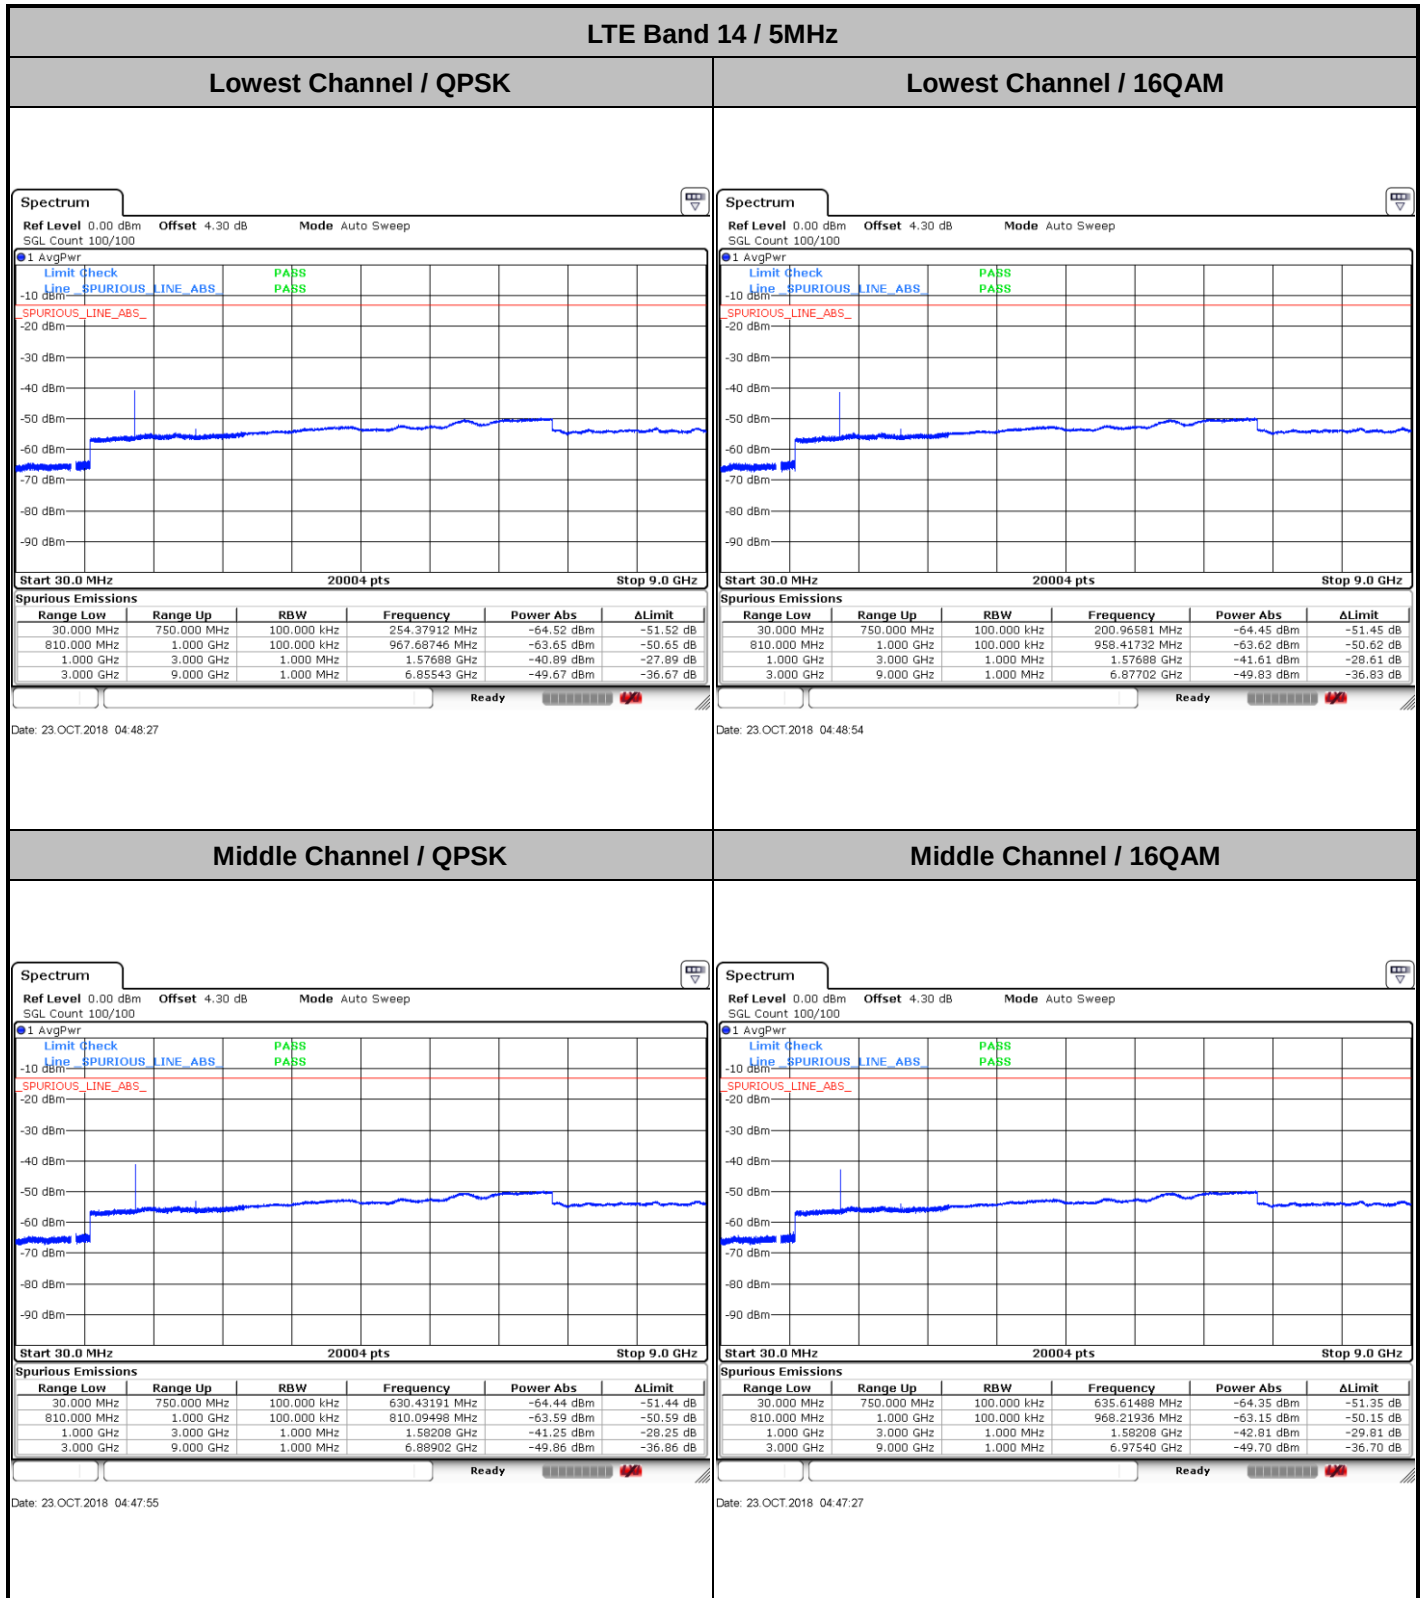




LTE Band 14 / 5MHz

Highest Channel / QPSK

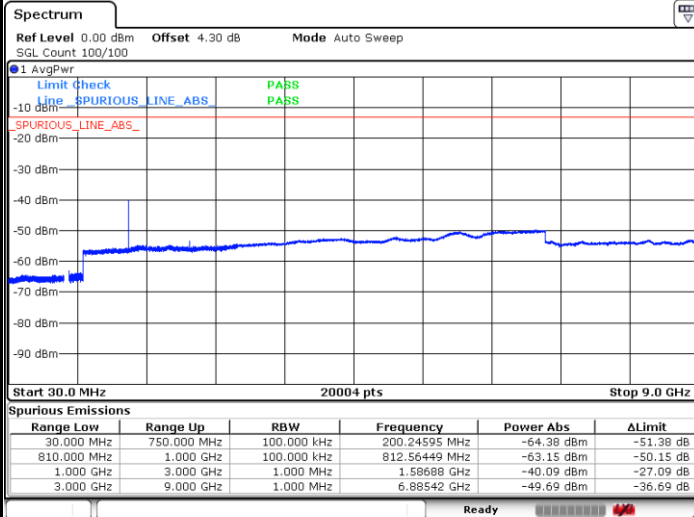

Date: 23.OCT.2018 04:45:28


Highest Channel / 16QAM

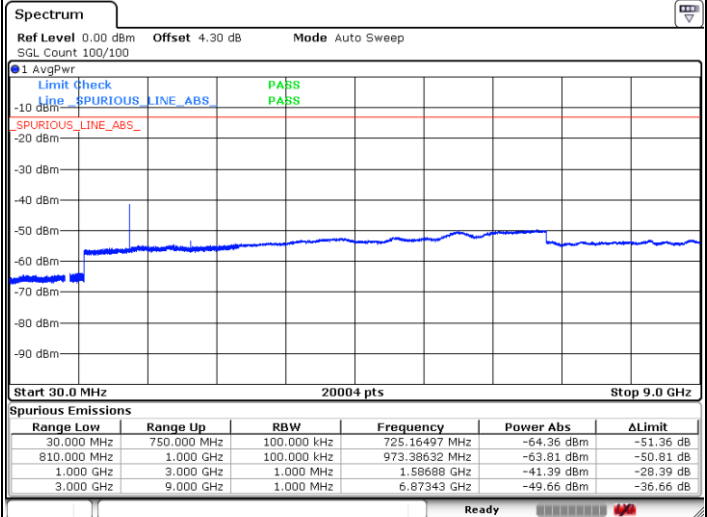

Date: 23.OCT.2018 04:46:07


LTE Band 14 / 10MHz

Middle Channel / QPSK

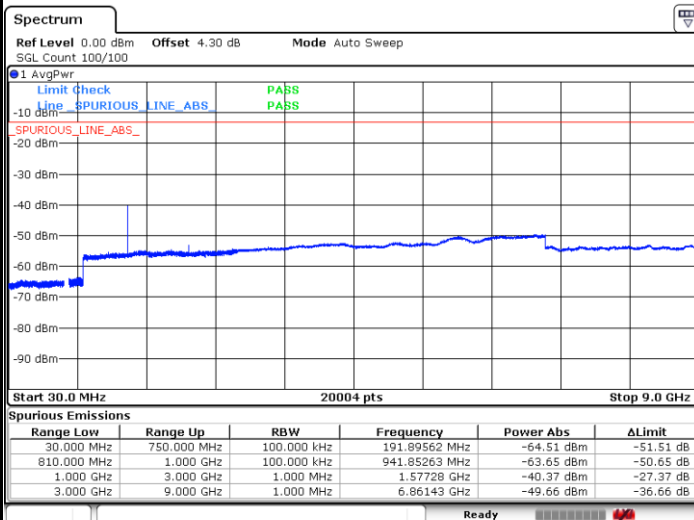

Date: 23.OCT.2018 04:51:19

Middle Channel / 16QAM

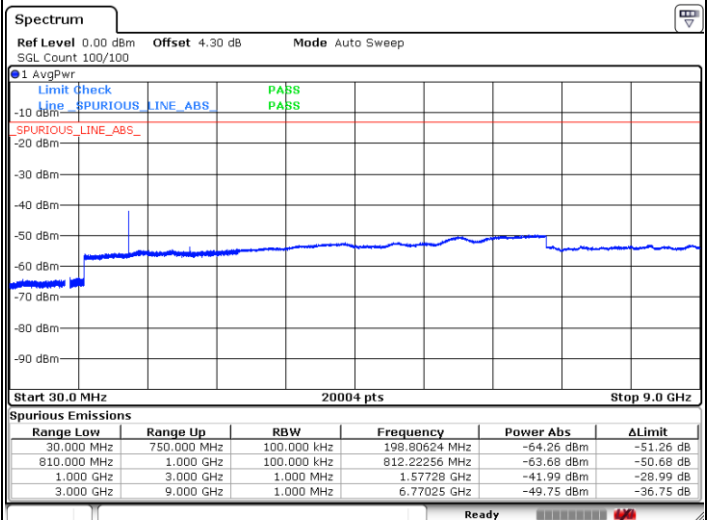


Date: 23.OCT.2018 04:50:53




LTE Band 14 / 5MHz

Lowest Channel / 64QAM

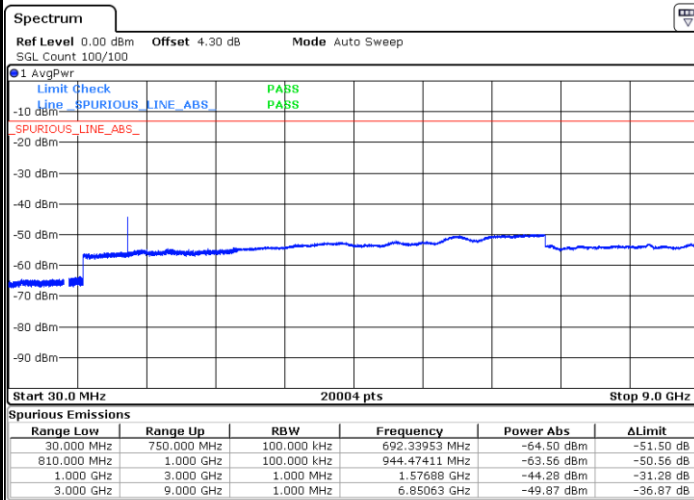

Date: 23.OCT.2018 04:49:17


Middle Channel / 64QAM

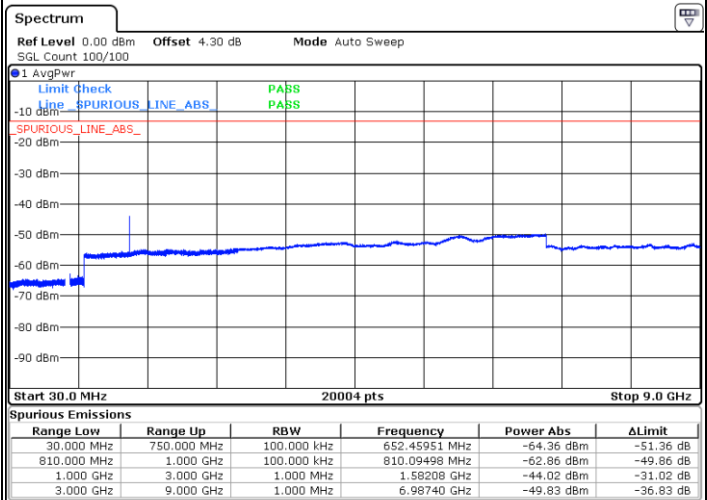

Date: 23.OCT.2018 04:47:01

LTE Band 14 / 5MHz


Highest Channel / 64QAM

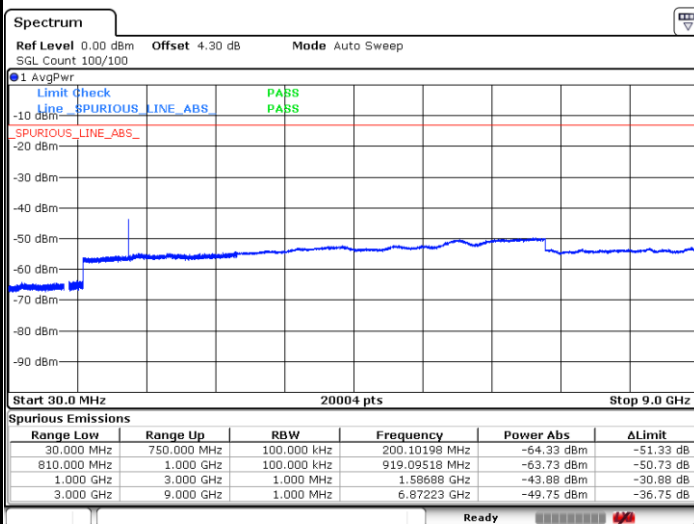

Date: 23.OCT.2018 04:46:29

LTE Band 14 / 10MHz

Middle Channel / 64QAM

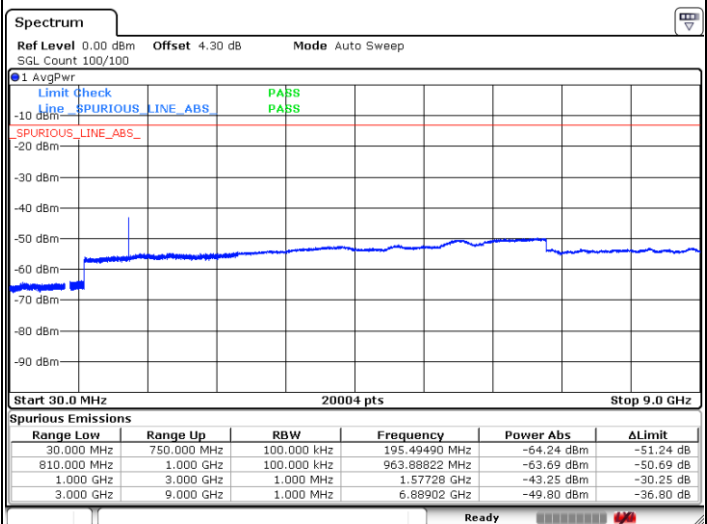

Date: 23.OCT.2018 04:50:10

Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	1.25ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0049	PASS
40	Normal Voltage	0.0013	
30	Normal Voltage	0.0035	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0038	
0	Normal Voltage	0.0043	
-10	Normal Voltage	0.0040	
-20	Normal Voltage	0.0044	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0037	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0033	

Note: Normal Voltage =3.8V. ; Battery End Point (BEP) =3.6 V. ; Maximum Voltage =4.1 V.



Appendix B. Test Results of Radiated Test

Field Strength of Spurious Radiated

LTE Band 14 / QPSK / RB Size 1 Offset 0								
Bandwidth	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
10MHz	1578	-67.90	-40	-27.90	-71.76	2.23	6.09	H
	2365.77	-65.55	-13	-52.55	-66.08	2.83	5.51	H
	3156	-64.35	-13	-51.35	-66.29	3.21	7.30	H
	1578	-67.77	-40	-27.77	-71.63	2.23	6.09	V
	2365.77	-65.67	-13	-52.67	-66.20	2.83	5.51	V
	3156	-64.25	-13	-51.25	-66.19	3.21	7.30	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			