



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1952-3;XT1952-4;XT1952DL
FCC ID : IHDT56XR1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 21, 2018 and testing was completed on Oct. 26, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Specification of Accessory	6
1.7 Testing Location.....	6
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel.....	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system.....	10
2.5 EUT Operation Test Setup.....	10
2.6 Measurement Results Explanation Example	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement.....	11
3.2 Output Power Measurement	13
3.3 Power Spectral Density Measurement.....	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 AC Conducted Emission Measurement	30
3.7 Antenna Requirements	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR892103C	Rev. 01	Initial issue of report	Dec. 20, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.76 dB at 2483.510 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.59 dB at 0.153 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1952-3;XT1952-4;XT1952DL
FCC ID	IHDT56XR1
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM/GNSS WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth BR/EDR/LE
IMEI Code	Conducted : 359515090007257 Radiation : 359515090007653 Conduction : 359515090007620
HW Version	DVT 2
SW Version	PPY29.17
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.99 dBm (0.1256 W) 802.11g : 23.54 dBm (0.2259 W) 802.11n HT20 : 22.75 dBm (0.1884 W)
99% Occupied Bandwidth	802.11b : 13.99MHz 802.11g : 19.68MHz 802.11n HT20 : 19.83MHz
Antenna Type / Gain	Fixed Internal Monopole Antenna type with gain -1.3 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name	SC-41
	Power Rating	I/P: 100 - 240 Vac, 0.13A, O/P: 5Vdc 2000mA		
AC Adapter 2	Brand Name	Motorola(Acbel)	Model Name	SC-41
	Power Rating	I/P: 100 - 240 Vac, 0.13A, O/P: 5Vdc 2000mA		
Battery	Brand Name	Motorola(SCUD)	Model Name	JE40
	Power Rating	3.8Vdc, 3000mAh	Type	Li-ion
USB Cable 1	Brand Name	LiQi	Model Name	L32B-053000100/ L32B-053000100L
	Signal Line	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	SaiBao	Model Name	S32B-053000100/ S32B-053000100L
	Signal Line	1.0 meter, shielded cable, without ferrite core		

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH05-KS	CN5013	630927



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 Meas. Guidance v05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Earphone + USB Cable 2 (Charging from Adapter 2)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System

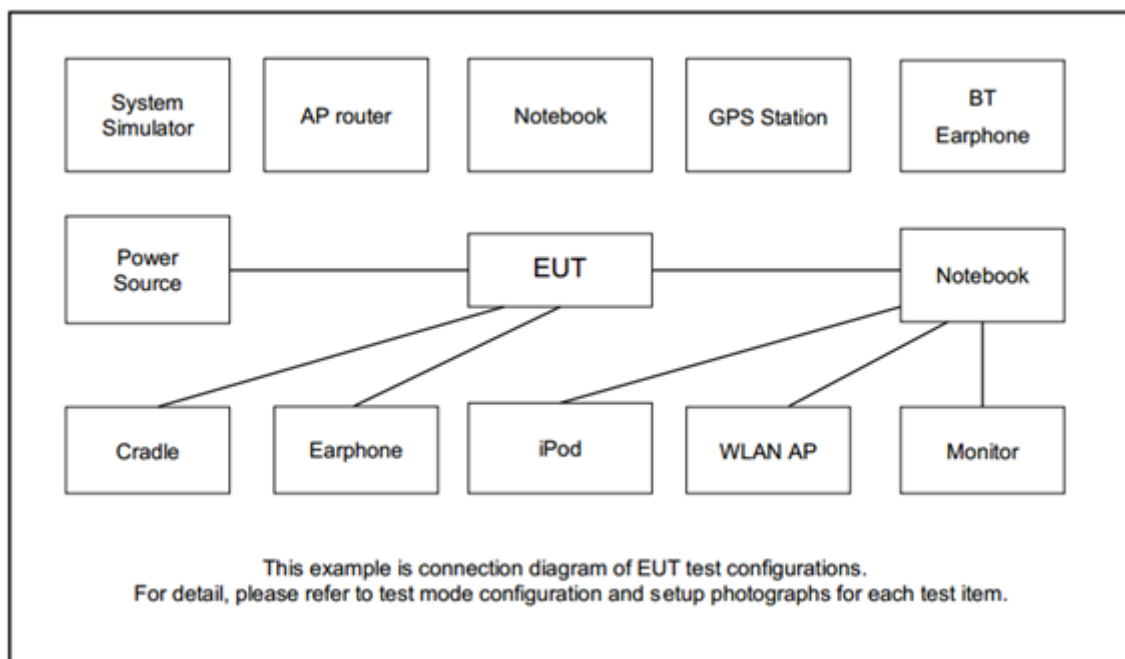

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A
6.	Earphone	Lianyun	LYM500-036-002	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

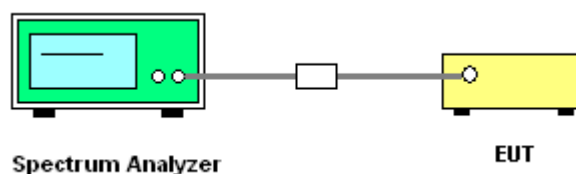

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

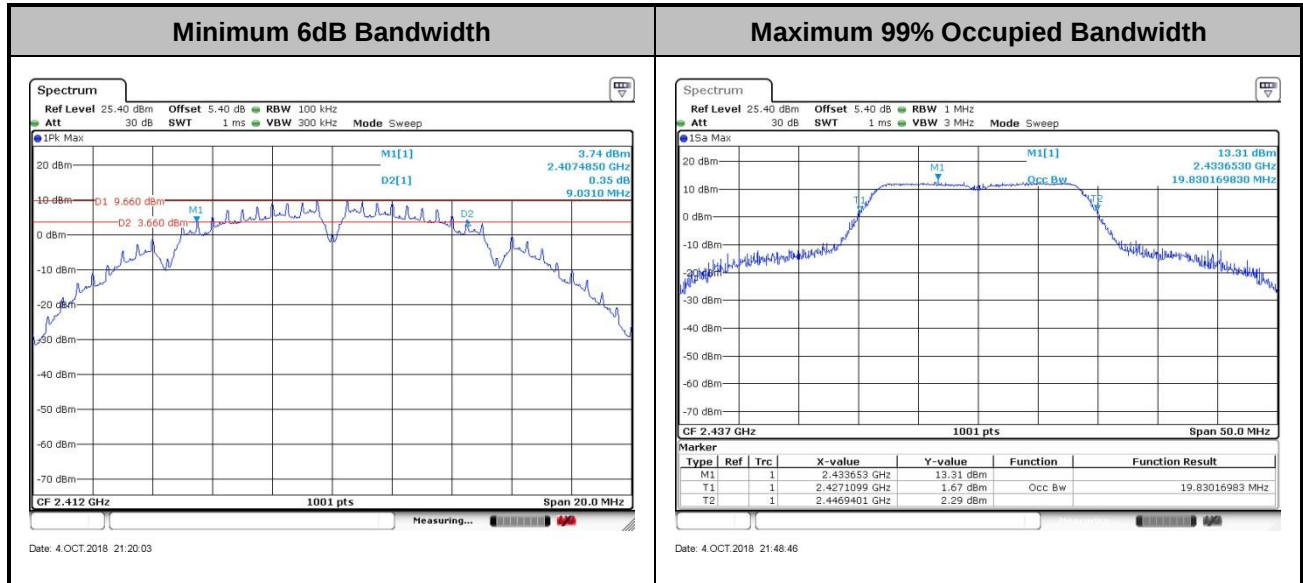

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v05 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

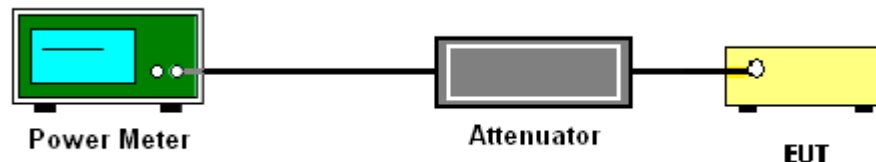

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

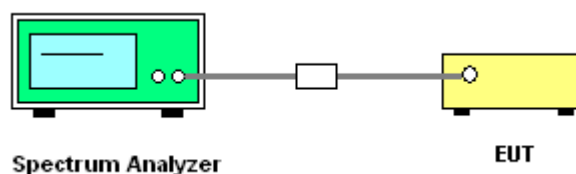

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

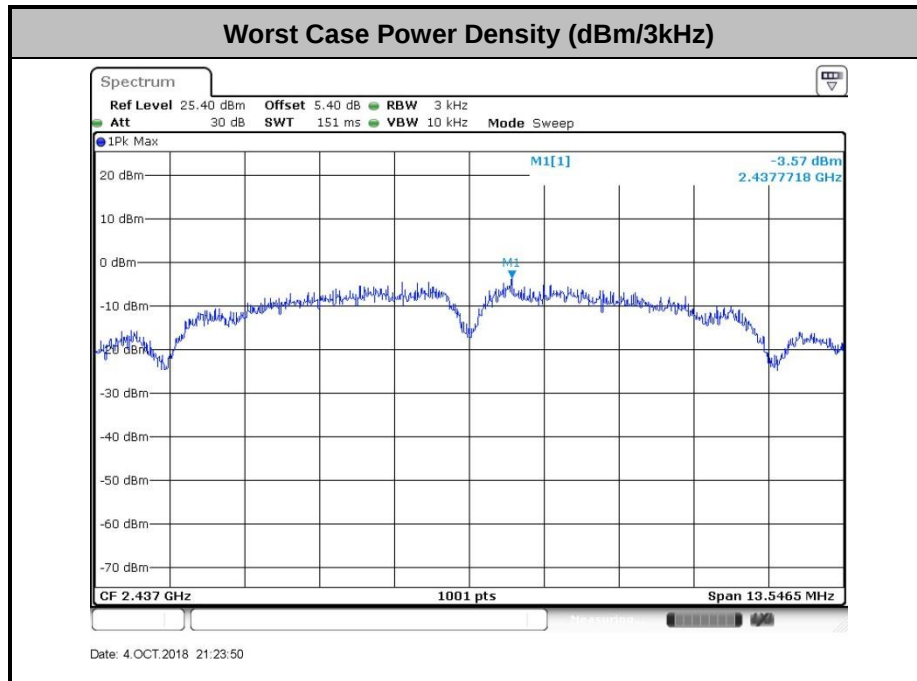

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

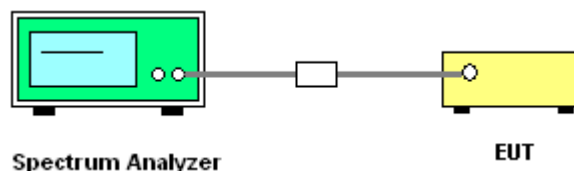




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Start Xu	Temperature :	21~25°C
		Relative Humidity :	51~54%

Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

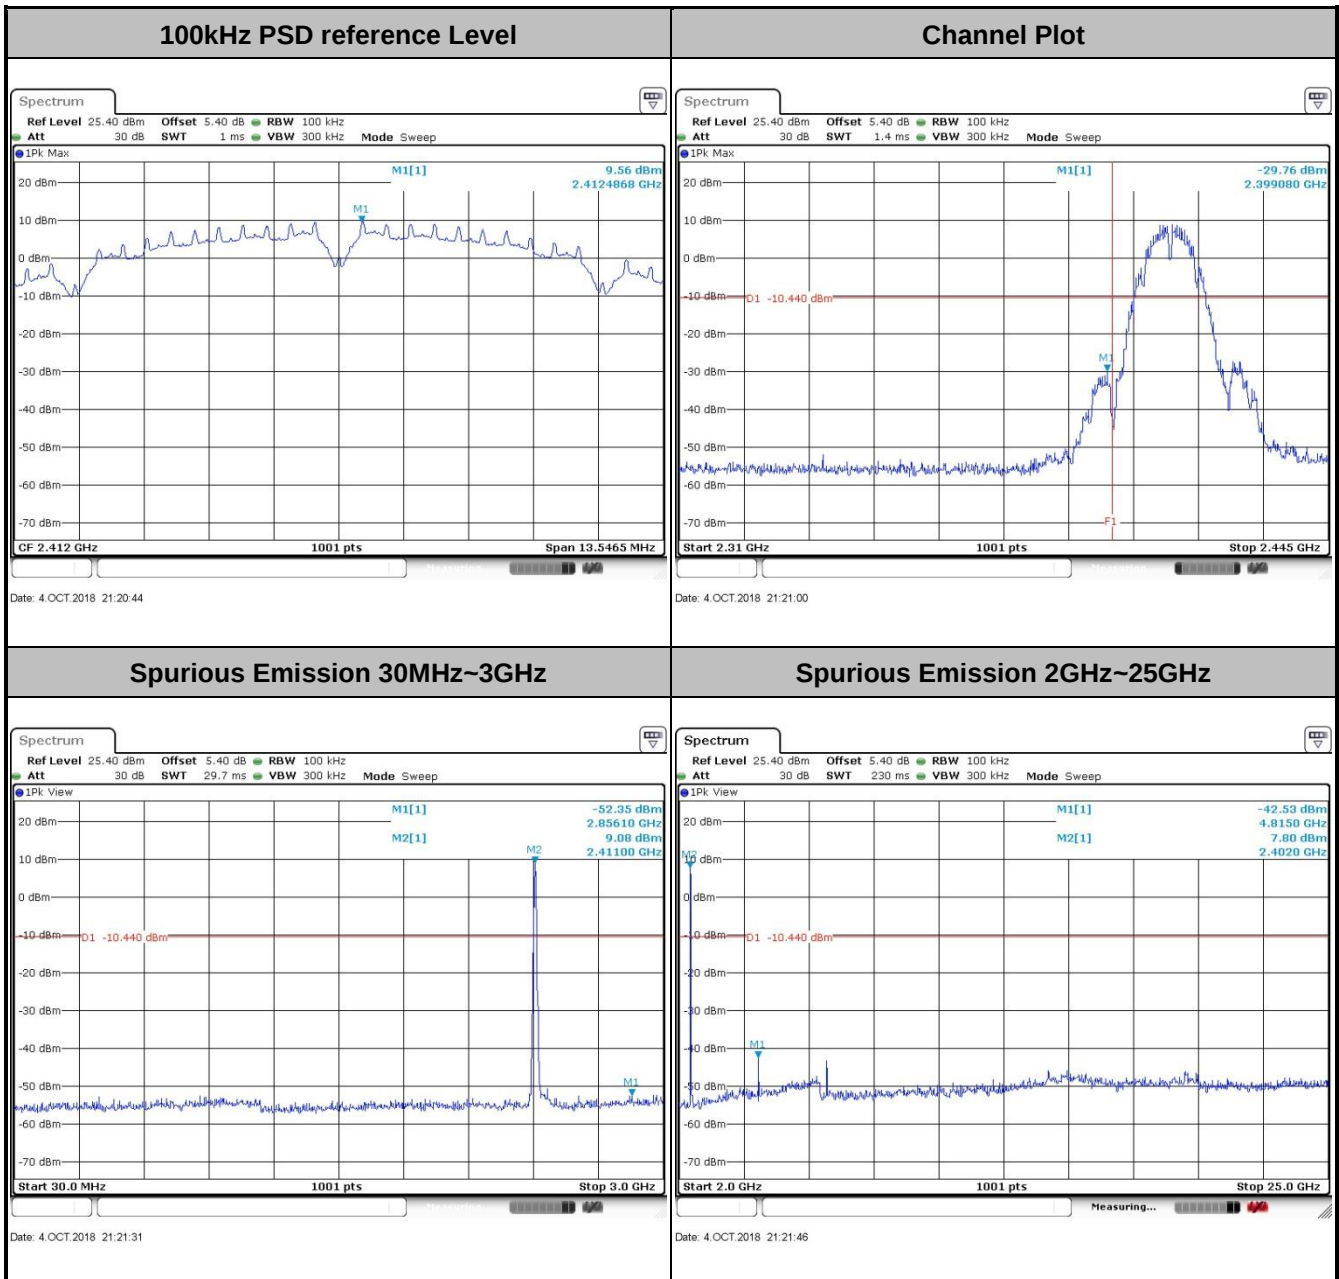




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

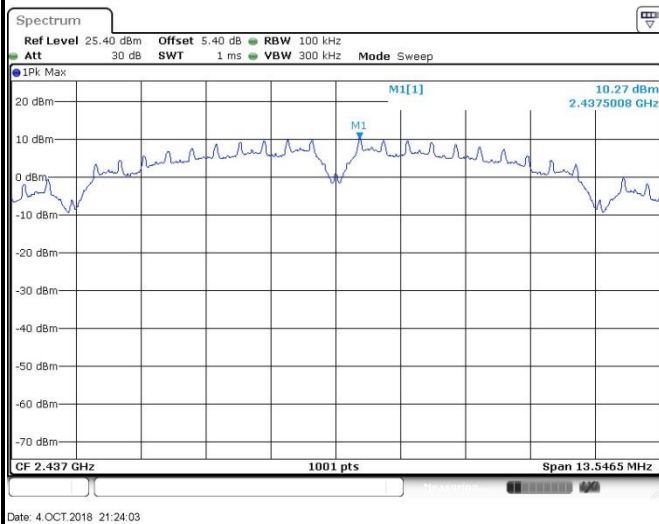


Channel Plot

Spurious Emission 30MHz~3GHz

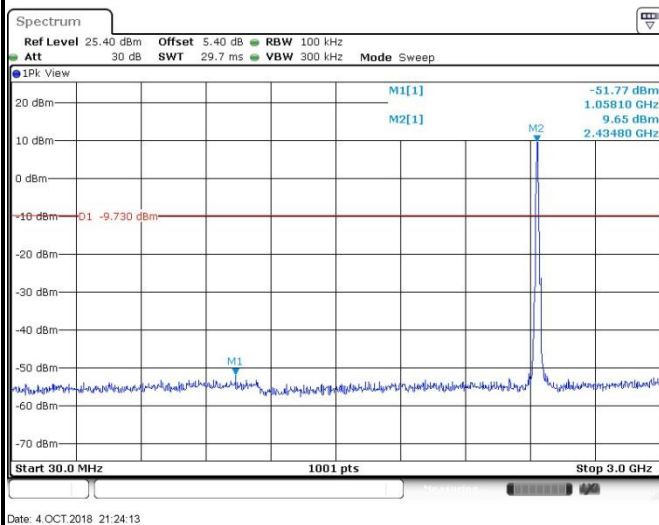

Spurious Emission 2GHz~25GHz

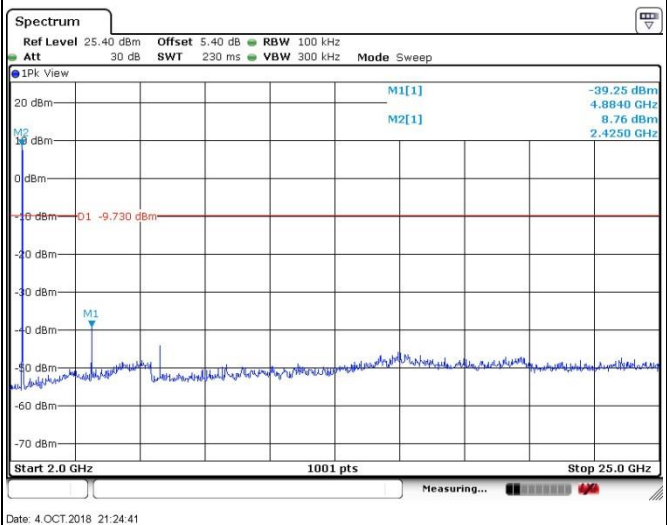




Test Mode : 802.11b


Test Channel : 11

100kHz PSD reference Level

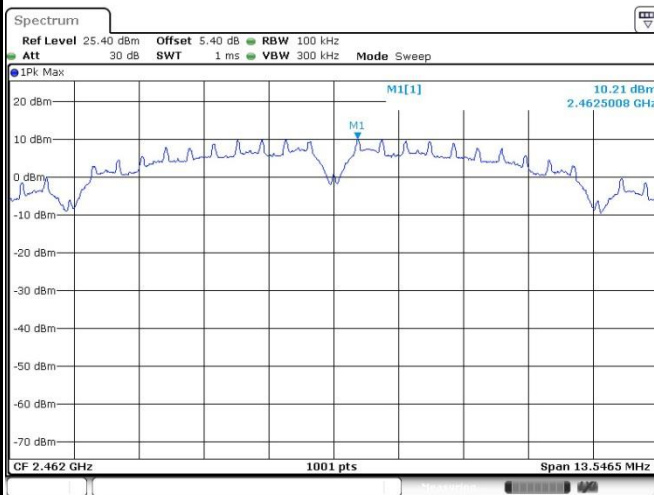


Date: 4.OCT.2018 21:27:47

Channel Plot

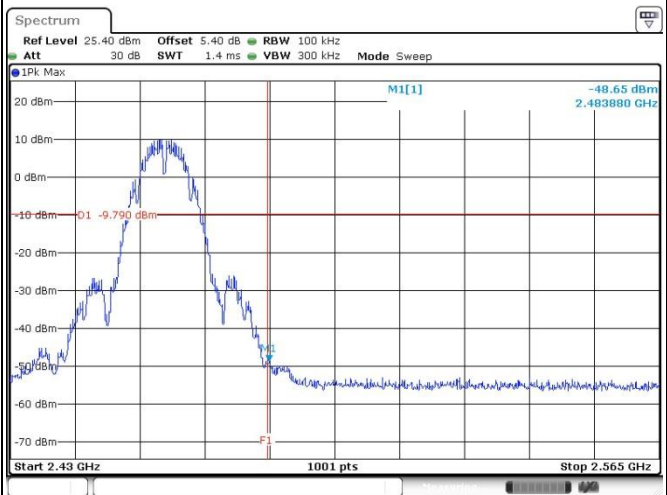


Date: 4.OCT.2018 21:27:55

Spurious Emission 30MHz~3GHz

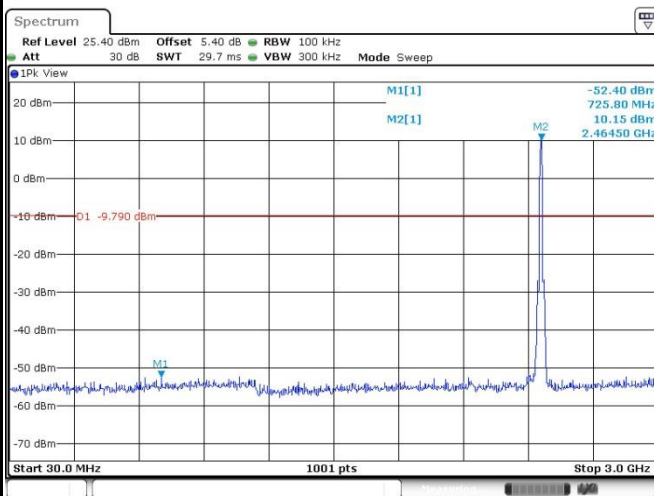

Date: 4.OCT.2018 21:28:08


Spurious Emission 2GHz~25GHz

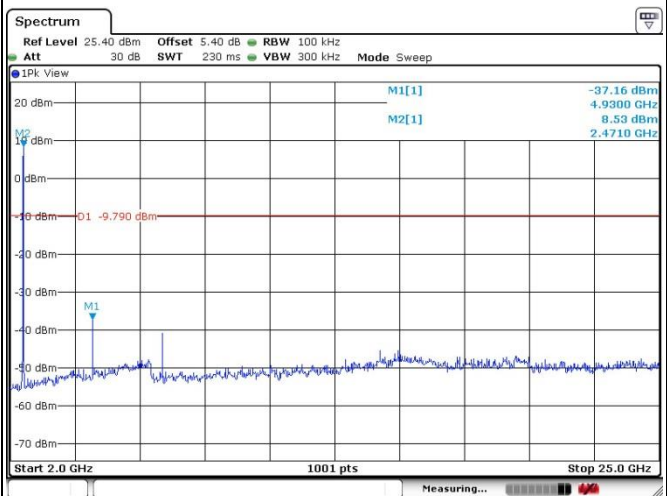

Date: 4.OCT.2018 21:28:33

Test Mode :	802.11g
-------------	---------


Test Channel :	01
----------------	----

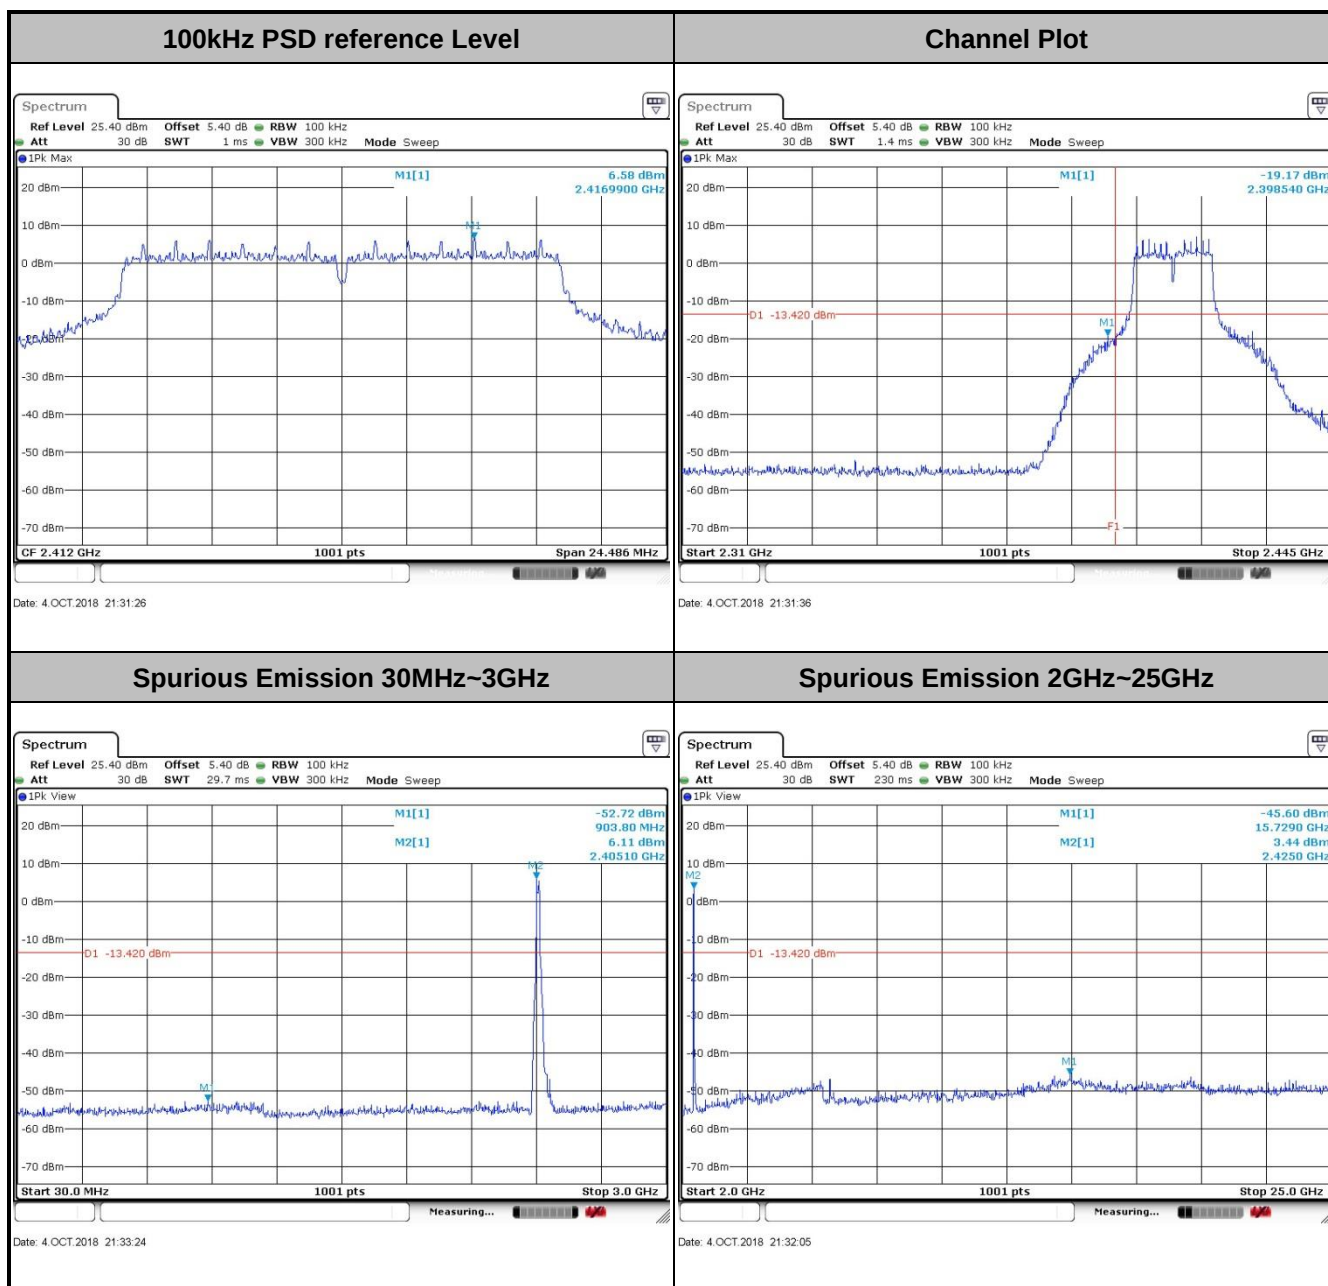



Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

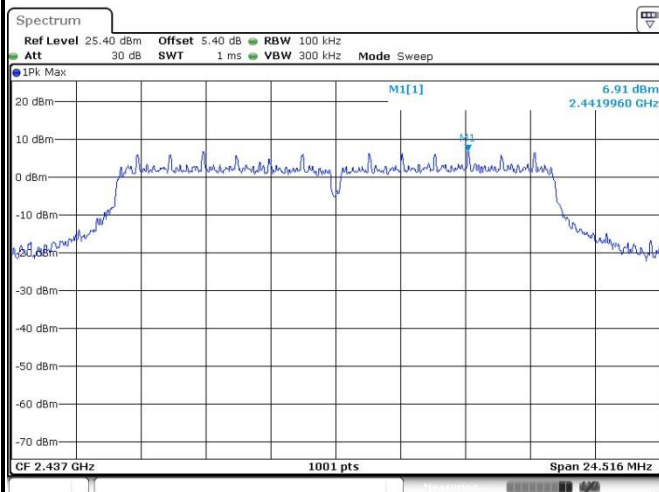

Date: 4.OCT.2018 21:35:51


Channel Plot

Spurious Emission 30MHz~3GHz

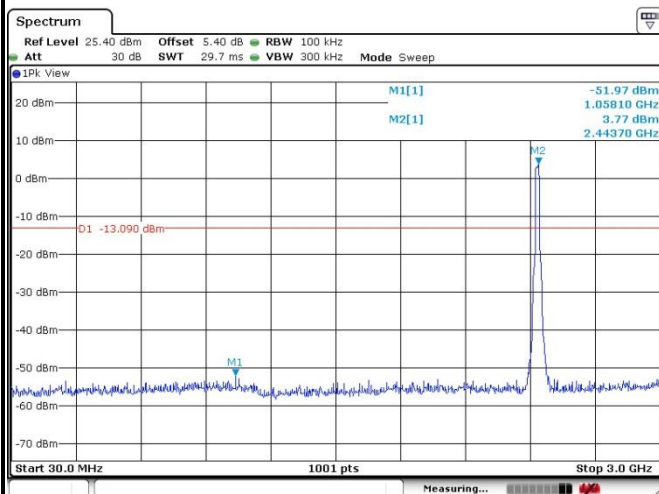

Date: 4.OCT.2018 21:37:15

Spurious Emission 2GHz~25GHz

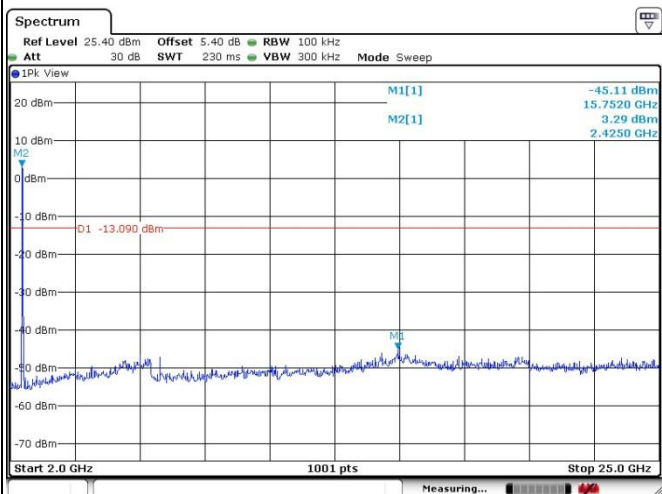


Date: 4.OCT.2018 21:36:42



Test Mode : 802.11g


Test Channel : 11

100kHz PSD reference Level

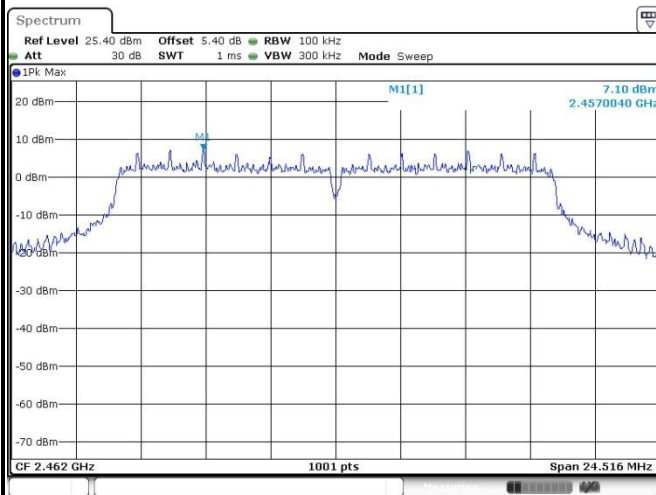


Date: 4.OCT.2018 21:40:04

Channel Plot

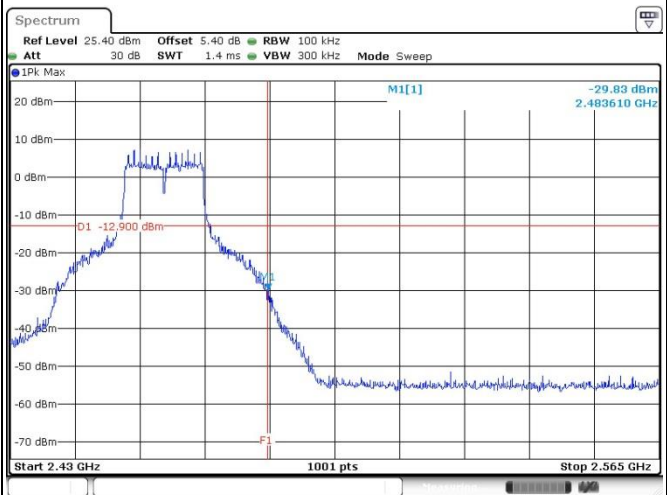


Date: 4.OCT.2018 21:40:12

Spurious Emission 30MHz~3GHz

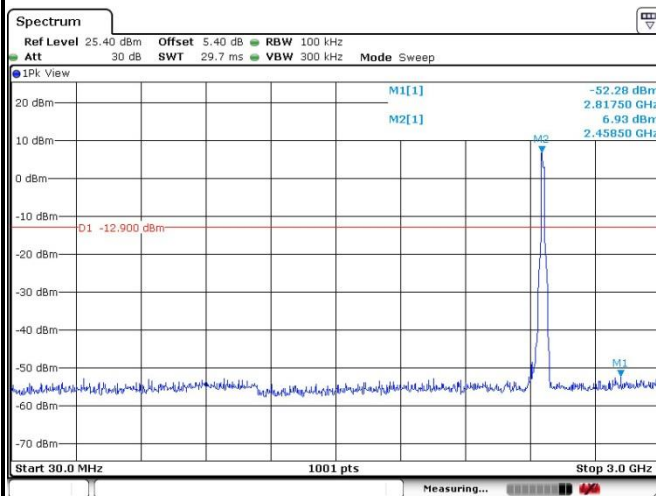

Date: 4.OCT.2018 21:41:13

Spurious Emission 2GHz~25GHz

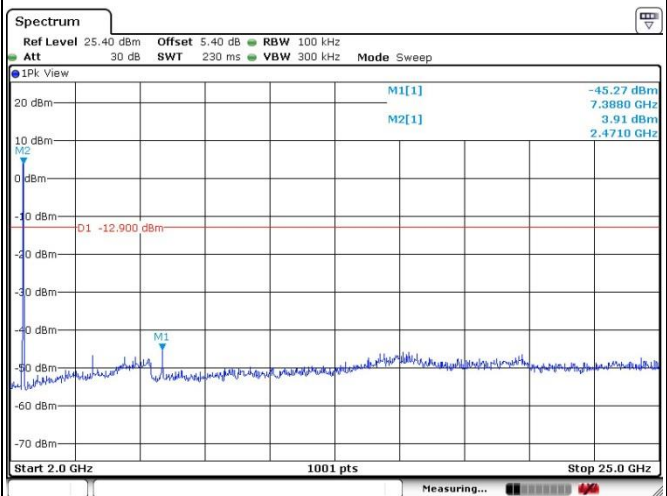


Date: 4.OCT.2018 21:40:38



Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

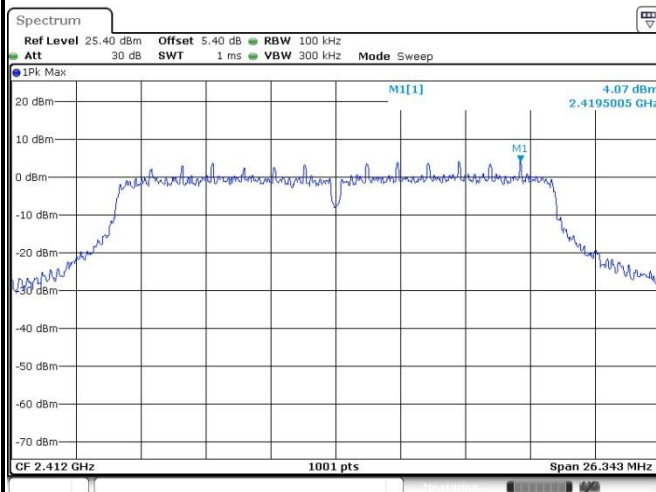


Date: 4.OCT.2018 21:43:41

Channel Plot

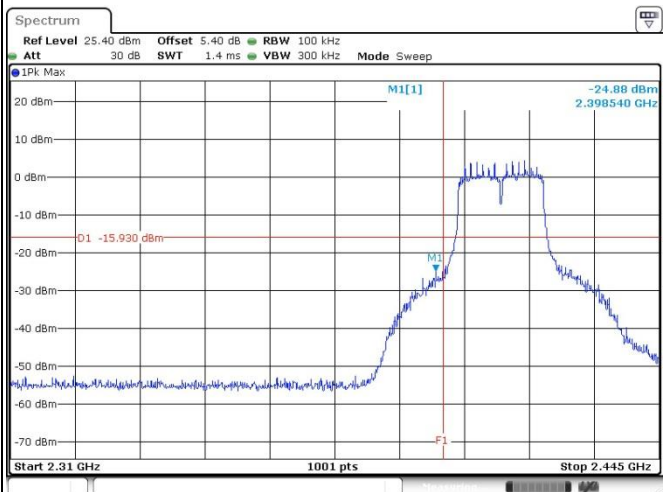


Date: 4.OCT.2018 21:44:12

Spurious Emission 30MHz~3GHz

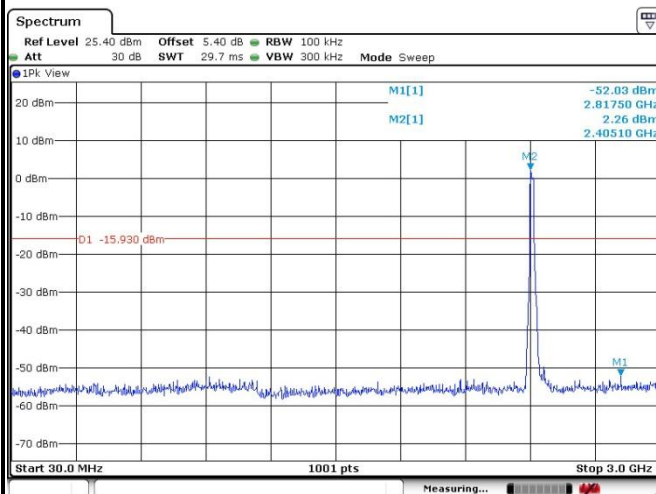

Date: 4.OCT.2018 21:45:14

Spurious Emission 2GHz~25GHz

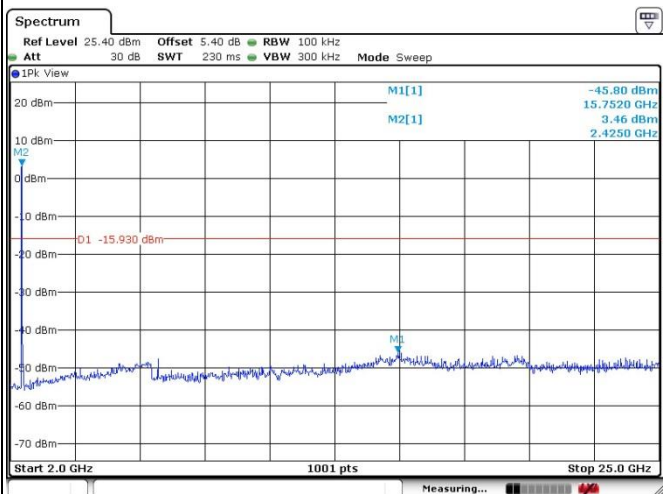


Date: 4.OCT.2018 21:44:36



Test Mode : 802.11n HT20

Test Channel : 06


100kHz PSD reference Level

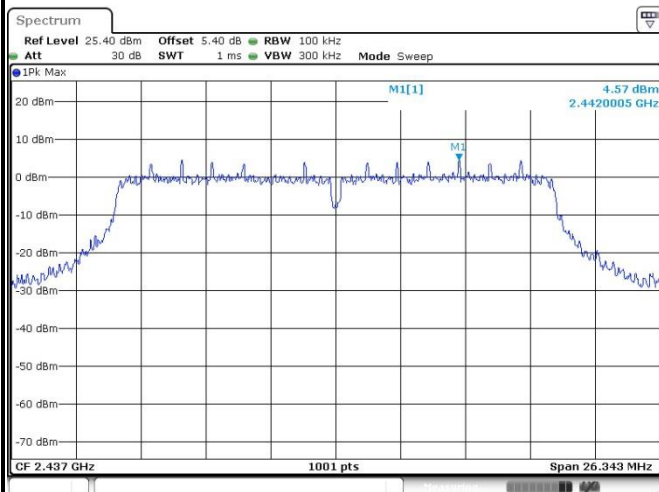

Date: 4.OCT.2018 21:47:53


Channel Plot

Spurious Emission 30MHz~3GHz

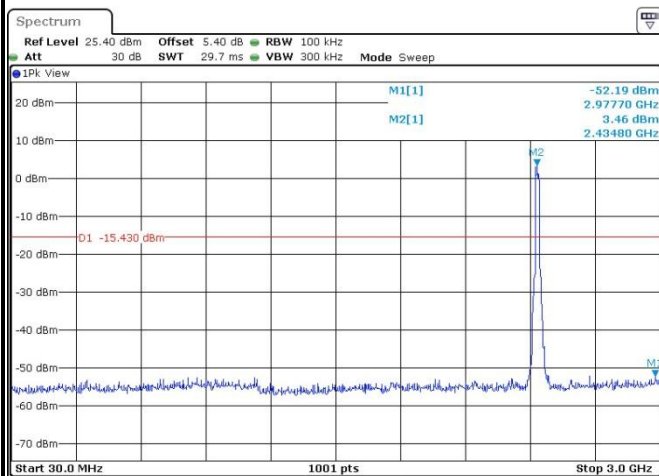

Date: 4.OCT.2018 21:48:03

Spurious Emission 2GHz~25GHz

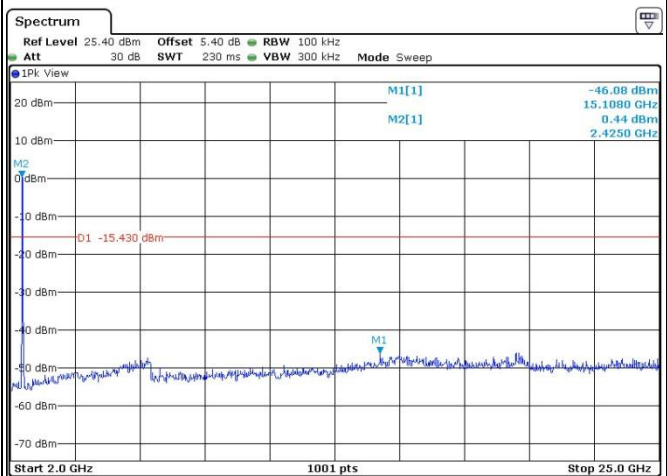


Date: 4.OCT.2018 21:48:17



Test Mode : 802.11n HT20


Test Channel : 11

100kHz PSD reference Level

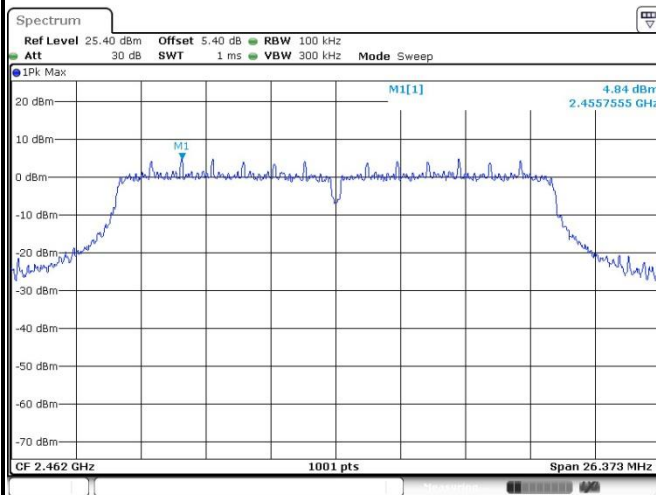


Date: 4.OCT.2018 21:50:46

Channel Plot

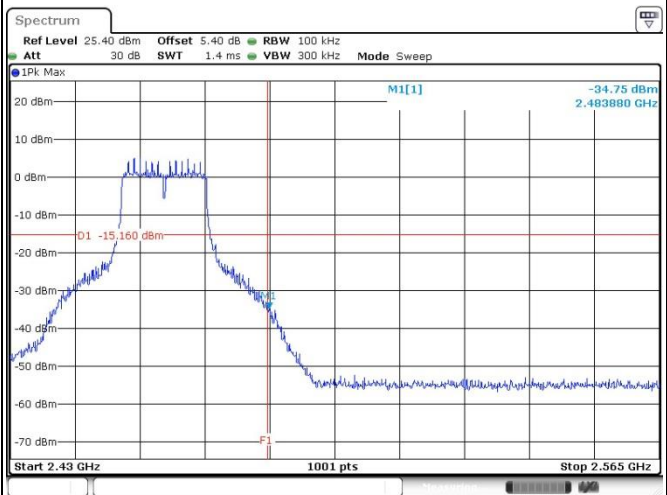


Date: 4.OCT.2018 21:50:56

Spurious Emission 30MHz~3GHz

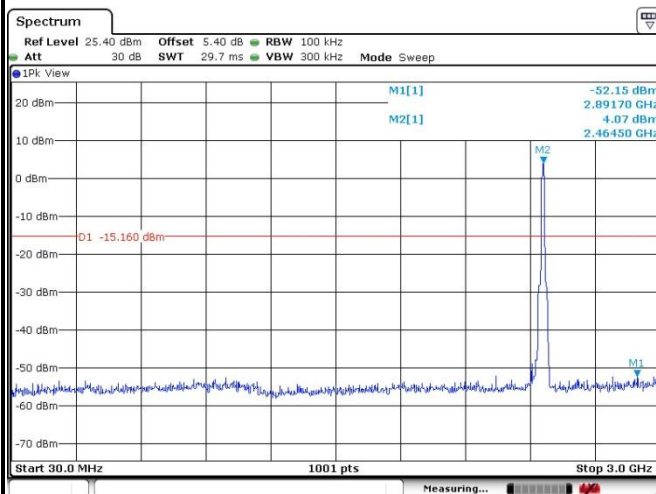

Date: 4.OCT.2018 21:51:56

Spurious Emission 2GHz~25GHz

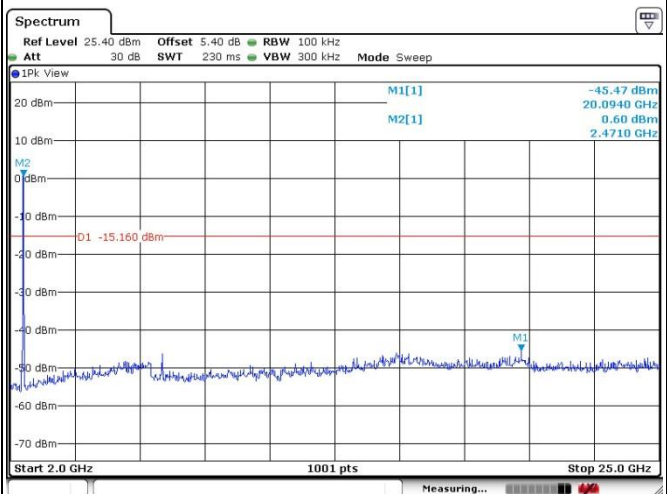

Date: 4.OCT.2018 21:51:24

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

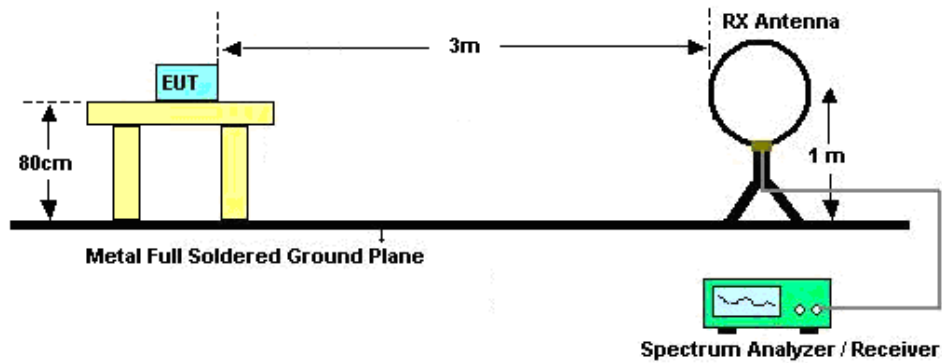

For radiated emissions from 30MHz to 1GHz

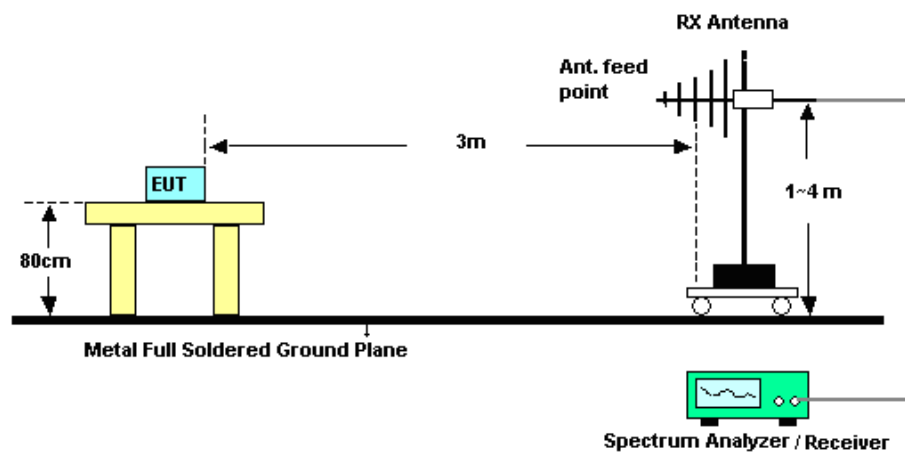

For radiated emissions above 1GHz

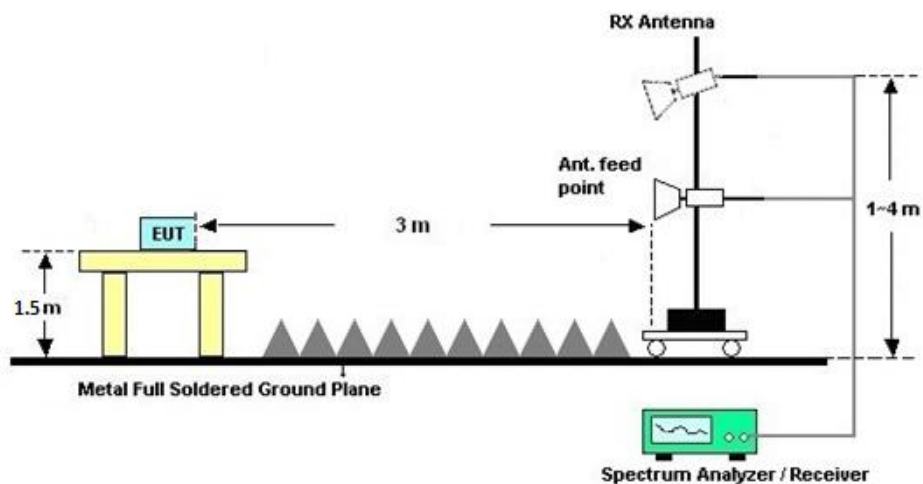



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.5 Test Setup

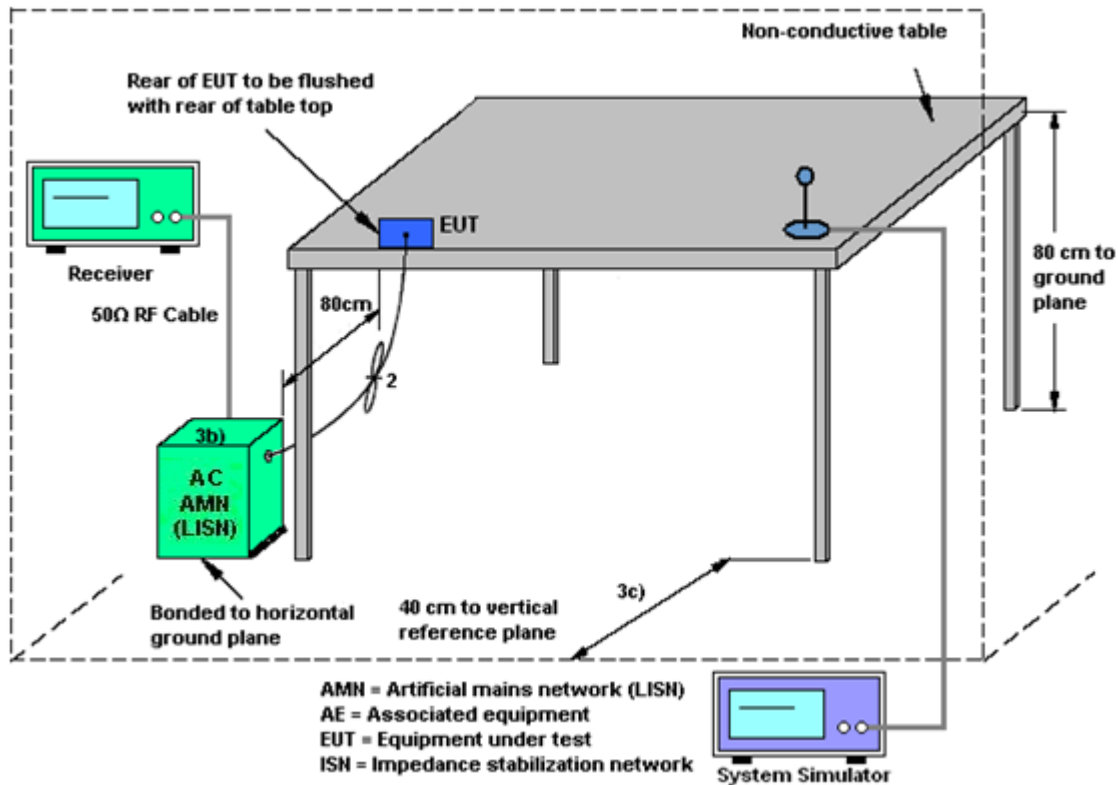

3.6.6 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct.12, 2017	Sep. 30, 2018~ Oct. 05, 2018	Oct. 11, 2018	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Sep. 30, 2018~ Oct. 05, 2018	Apr. 18, 2019	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Sep. 30, 2018~ Oct. 05, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Sep. 30, 2018~ Oct. 05, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Sep. 30, 2018~ Oct. 05, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	1339163	300MHz~40GHz	Jan. 18, 2018	Sep. 30, 2018~ Oct. 05, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1435004	50MHz Bandwidth	Jan. 18, 2018	Sep. 30, 2018~ Oct. 05, 2018	Jan. 17, 2019	Conducted (TH01-KS)
EMI Receiver	R&S	ESCi7	100768	9kHz~7GHz;	Apr. 19, 2018	Oct. 20, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Oct. 20, 2018	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 23, 2017	Oct. 20, 2018	Nov. 22, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Oct. 20, 2018	Oct. 11, 2019	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 24, 2018	Oct. 20, 2018	Aug. 23, 2019	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531040	150kHz~30MHz	Aug. 24, 2018	Oct. 20, 2018	Aug. 23, 2019	Conduction (CO01-KS)
Power bar	SP101EA	CN02	-	150kHz~30MHz	Apr. 16, 2018	Oct. 20, 2018	Apr. 15, 2019	Conduction (CO01-KS)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Ma x 30dBm	Jun. 25, 2018	Oct. 26, 2018	Jun. 24, 2019	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Apr. 17, 2018	Oct. 26, 2018	Apr. 16, 2019	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Oct. 26, 2018	Oct. 18, 2019	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 12, 2018	Oct. 26, 2018	Jun. 11, 2019	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 21, 2018	Oct. 26, 2018	Jan. 20, 2019	Radiation (03CH05-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Oct. 26, 2018	Feb. 06, 2019	Radiation (03CH05-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 17, 2018	Oct. 26, 2018	Apr. 16, 2019	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101 800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Oct. 26, 2018	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5G Hz	Apr. 18, 2018	Oct. 26, 2018	Apr. 17, 2019	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18~40GHz	Feb. 08, 2018	Oct. 26, 2018	Feb. 07, 2019	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 26, 2018	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 26, 2018	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 26, 2018	NCR	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH05KS001	30Mhz-18Ghz	Sep. 12, 2018	Oct. 26, 2018	Sep. 11, 2019	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH05KS002	30Mhz-18Ghz	Sep. 12, 2018	Oct. 26, 2018	Sep. 11, 2019	Radiation (03CH05-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX10-5850-6500-18000-40 ST	1	6.5G High Pass	Jun. 19, 2018	Oct. 26, 2018	Jun. 18, 2019	Radiation (03CH05-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-2805-3000-18000-40 ST	2	3G High Pass	Jun. 19, 2018	Oct. 26, 2018	Jun. 18, 2019	Radiation (03CH05-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Conducted Test Results

Report Number : FR892103C

Test Engineer:	Start Xu	Temperature:	21~25	°C
Test Date:	2018/9/30~2018/10/5	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.94	9.03	0.50	Pass
11b	1Mbps	1	6	2437	13.94	9.03	0.50	Pass
11b	1Mbps	1	11	2462	13.99	9.03	0.50	Pass
11g	6Mbps	1	1	2412	19.53	16.32	0.50	Pass
11g	6Mbps	1	6	2437	19.63	16.34	0.50	Pass
11g	6Mbps	1	11	2462	19.68	16.34	0.50	Pass
HT20	MCS0	1	1	2412	19.48	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.83	17.56	0.50	Pass
HT20	MCS0	1	11	2462	19.58	17.58	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.35	30.00	-1.30	19.05	36.00	Pass
11b	1Mbps	1	6	2437	20.88	30.00	-1.30	19.58	36.00	Pass
11b	1Mbps	1	11	2462	20.99	30.00	-1.30	19.69	36.00	Pass
11g	6Mbps	1	1	2412	22.12	30.00	-1.30	20.82	36.00	Pass
11g	6Mbps	1	6	2437	23.54	30.00	-1.30	22.24	36.00	Pass
11g	6Mbps	1	11	2462	20.63	30.00	-1.30	19.33	36.00	Pass
HT20	MCS0	1	1	2412	22.24	30.00	-1.30	20.94	36.00	Pass
HT20	MCS0	1	6	2437	22.75	30.00	-1.30	21.45	36.00	Pass
HT20	MCS0	1	11	2462	21.06	30.00	-1.30	19.76	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)


2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.11	17.86
11b	1Mbps	1	6	2437	0.11	18.32
11b	1Mbps	1	11	2462	0.11	18.45
11g	6Mbps	1	1	2412	0.58	15.87
11g	6Mbps	1	6	2437	0.58	17.47
11g	6Mbps	1	11	2462	0.58	14.54
HT20	MCS0	1	1	2412	0.62	14.88
HT20	MCS0	1	6	2437	0.62	15.37
HT20	MCS0	1	11	2462	0.62	13.64


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-3.65	-1.30	8.00	Pass
11b	1Mbps	1	6	2437	-3.57	-1.30	8.00	Pass
11b	1Mbps	1	11	2462	-3.73	-1.30	8.00	Pass
11g	6Mbps	1	1	2412	-7.09	-1.30	8.00	Pass
11g	6Mbps	1	6	2437	-7.06	-1.30	8.00	Pass
11g	6Mbps	1	11	2462	-6.86	-1.30	8.00	Pass
HT20	MCS0	1	1	2412	-11.38	-1.30	8.00	Pass
HT20	MCS0	1	6	2437	-8.51	-1.30	8.00	Pass
HT20	MCS0	1	11	2462	-9.95	-1.30	8.00	Pass



Appendix B. AC Conducted Emission Test Results

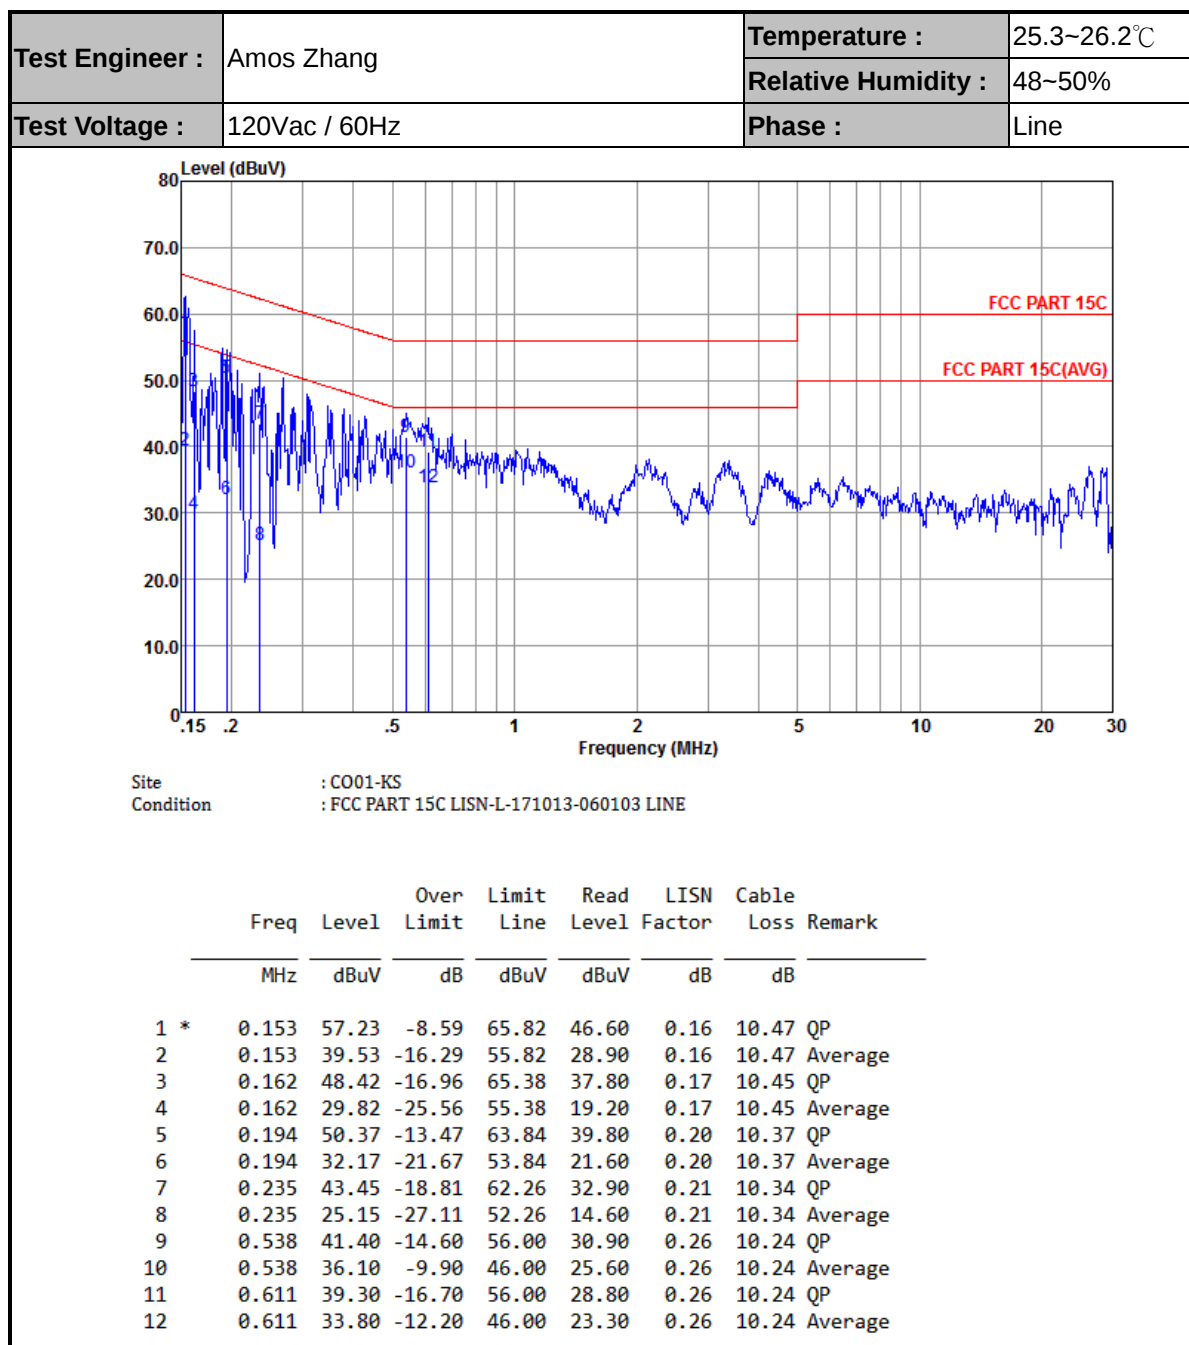

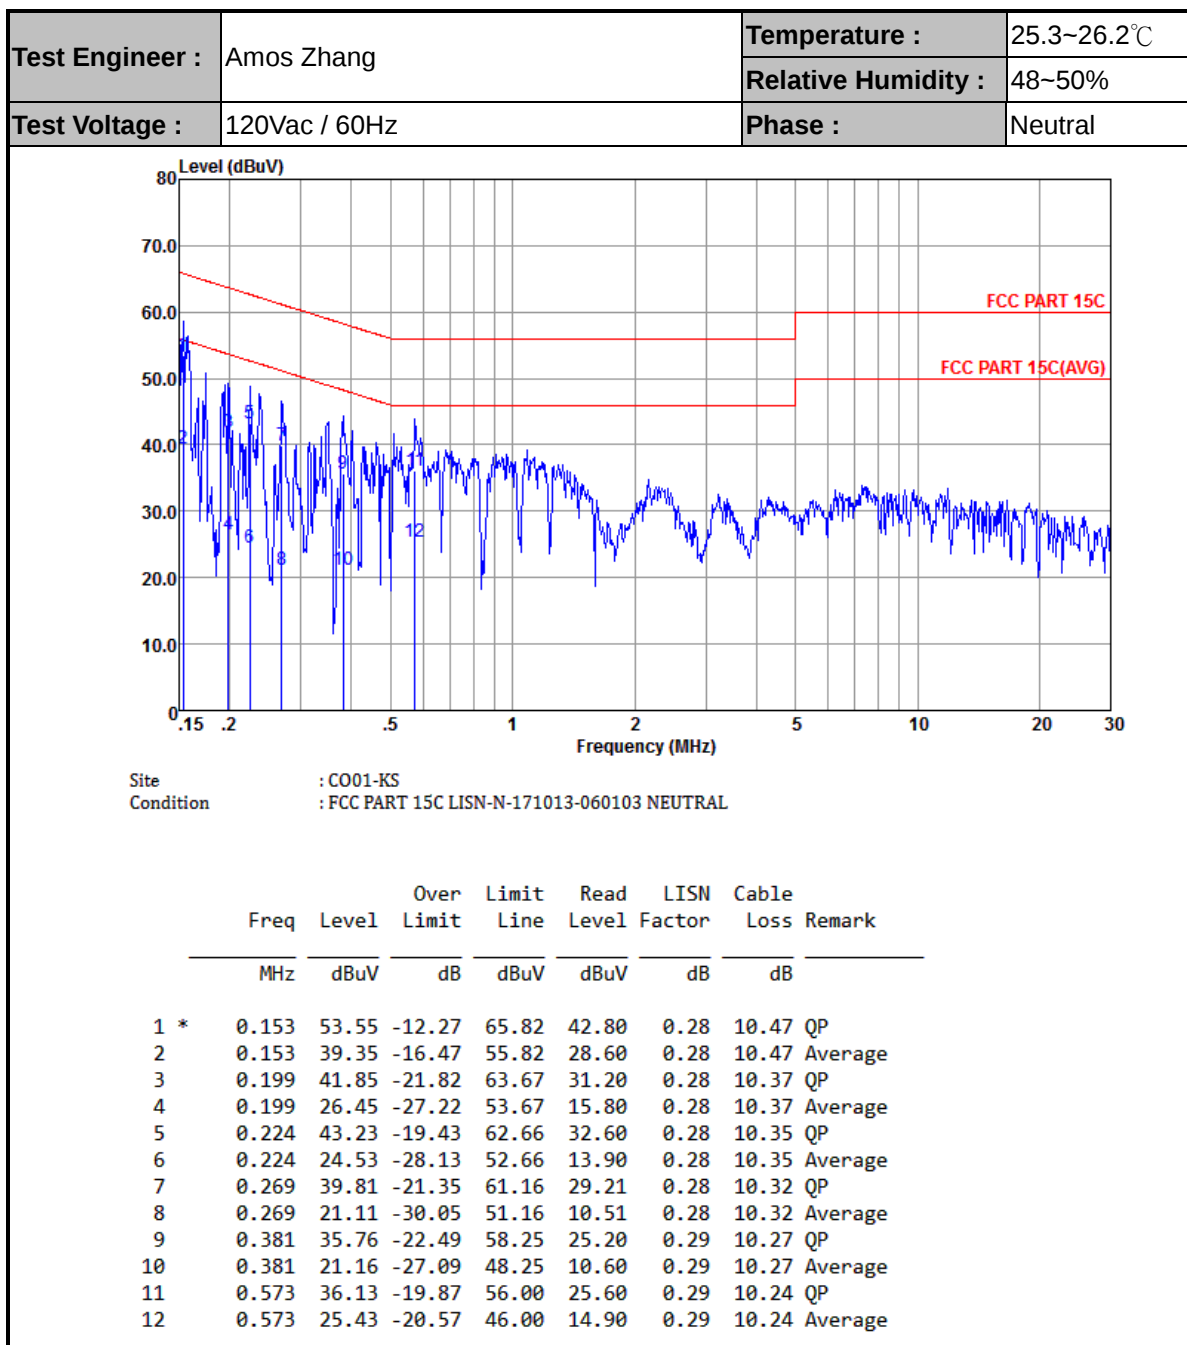



Appendix C. Radiated Spurious Emission

Test Engineer :	Peter Peng	Temperature :	27~30°C
		Relative Humidity :	41~45%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2388.39	48.86	-25.14	74	43.18	32	5.48	31.8	149	92	P	H
		2389.82	39.06	-14.94	54	33.38	32	5.48	31.8	149	92	A	H
	*	2412	103.33	-	-	97.52	32.13	5.48	31.8	149	92	P	H
	*	2414	100.14	-	-	94.33	32.13	5.48	31.8	149	92	A	H
		2389.95	48.55	-25.45	74	42.87	32	5.48	31.8	345	314	P	V
		2389.95	39.22	-14.78	54	33.54	32	5.48	31.8	345	314	A	V
	*	2412	103.68	-	-	97.87	32.13	5.48	31.8	345	314	P	V
	*	2412	99.86	-	-	94.05	32.13	5.48	31.8	345	314	A	V
802.11b CH 11 2462MHz	*	2464	103.96	-	-	97.88	32.33	5.55	31.8	133	90	P	H
	*	2464	100.94	-	-	94.86	32.33	5.55	31.8	133	90	A	H
		2485.36	49.43	-24.57	74	43.41	32.27	5.55	31.8	133	90	P	H
		2486.14	38.88	-15.12	54	32.86	32.27	5.55	31.8	133	90	A	H
	*	2462	102.51	-	-	96.47	32.33	5.51	31.8	325	317	P	V
	*	2464	100.1	-	-	94.02	32.33	5.55	31.8	325	317	A	V
		2490.22	48.93	-25.07	74	42.98	32.2	5.55	31.8	325	317	P	V
		2485.84	38.77	-15.23	54	32.75	32.27	5.55	31.8	325	317	A	V



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	41.96	-32.04	74	63.41	34.2	8.1	63.75	100	360	P	H
		4824	42.56	-31.44	74	64.01	34.2	8.1	63.75	100	360	P	V
802.11b CH 06 2437MHz		4872	42.49	-31.51	74	64	34.13	8.09	63.73	100	360	P	H
		7311	44.49	-29.51	74	62.51	36.6	9.75	64.37	100	360	P	H
		4874	42.64	-31.36	74	64.15	34.13	8.09	63.73	100	59	P	V
		7308	43.2	-30.8	74	61.22	36.6	9.75	64.37	100	59	P	V
802.11b CH 11 2462MHz		4926	43.21	-30.79	74	64.76	34.1	8.06	63.71	100	360	P	H
		7386	43.95	-30.05	74	62.02	36.5	9.81	64.38	100	360	P	H
		4926	42.42	-31.58	74	63.97	34.1	8.06	63.71	100	360	P	V
		7386	43.81	-30.19	74	61.88	36.5	9.81	64.38	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.95	65.21	-8.79	74	59.53	32	5.48	31.8	124	90	P	H
	!	2389.95	49.67	-4.33	54	43.99	32	5.48	31.8	124	90	A	H
	*	2410	102.24	-	-	96.43	32.13	5.48	31.8	124	90	P	H
	*	2408	94.89	-	-	89.08	32.13	5.48	31.8	124	90	A	H
		2389.95	64.64	-9.36	74	58.96	32	5.48	31.8	347	312	P	V
	!	2389.95	49.82	-4.18	54	44.14	32	5.48	31.8	347	312	A	V
	*	2408	102.35	-	-	96.54	32.13	5.48	31.8	347	312	P	V
	*	2408	94.45	-	-	88.64	32.13	5.48	31.8	347	312	A	V
802.11g CH 11 2462MHz	*	2468	102.15	-	-	96.07	32.33	5.55	31.8	134	88	P	H
	*	2466	94.29	-	-	88.21	32.33	5.55	31.8	134	88	A	H
		2483.74	66.27	-7.73	74	60.25	32.27	5.55	31.8	134	88	P	H
	!	2483.5	49.76	-4.24	54	43.74	32.27	5.55	31.8	134	88	A	H
	*	2456	101.71	-	-	95.67	32.33	5.51	31.8	371	316	P	V
	*	2456	94.1	-	-	88.06	32.33	5.51	31.8	371	316	A	V
		2483.62	66.74	-7.26	74	60.72	32.27	5.55	31.8	371	316	P	V
	!	2483.56	49.29	-4.71	54	43.27	32.27	5.55	31.8	371	316	A	V



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	42.02	-31.98	74	63.47	34.2	8.1	63.75	100	360	P	H
		4824	40.33	-33.67	74	61.78	34.2	8.1	63.75	100	360	P	V
802.11g CH 06 2437MHz		4872	40.5	-33.5	74	62.01	34.13	8.09	63.73	100	360	P	H
		7311	42.94	-31.06	74	60.96	36.6	9.75	64.37	100	360	P	H
		4874	40.11	-33.89	74	61.62	34.13	8.09	63.73	100	0	P	V
		7308	43.93	-30.07	74	61.95	36.6	9.75	64.37	100	0	P	V
802.11g CH 11 2462MHz		4926	41.47	-32.53	74	63.02	34.1	8.06	63.71	100	360	P	H
		7386	43.57	-30.43	74	61.64	36.5	9.81	64.38	100	360	P	H
		4926	41.66	-32.34	74	63.21	34.1	8.06	63.71	100	360	P	V
		7386	44.17	-29.83	74	62.24	36.5	9.81	64.38	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.43	64.59	-9.41	74	58.91	32	5.48	31.8	118	91	P	H
	!	2389.95	49.19	-4.81	54	43.51	32	5.48	31.8	118	91	A	H
	*	2406	101.83	-	-	96.02	32.13	5.48	31.8	118	91	P	H
	*	2408	94.07	-	-	88.26	32.13	5.48	31.8	118	91	A	H
		2389.95	64.31	-9.69	74	58.63	32	5.48	31.8	342	313	P	V
	!	2389.95	49.68	-4.32	54	44	32	5.48	31.8	342	313	A	V
	*	2414	101.76	-	-	95.95	32.13	5.48	31.8	342	313	P	V
	*	2408	93.86	-	-	88.05	32.13	5.48	31.8	342	313	A	V
802.11n HT20 CH 11 2462MHz	*	2468	100.69	-	-	94.61	32.33	5.55	31.8	111	90	P	H
	*	2470	92.8	-	-	86.72	32.33	5.55	31.8	111	90	A	H
		2483.62	66.6	-7.4	74	60.58	32.27	5.55	31.8	111	90	P	H
	!	2483.51	50.24	-3.76	54	44.22	32.27	5.55	31.8	111	90	A	H
	*	2466	99.99	-	-	93.91	32.33	5.55	31.8	325	317	P	V
	*	2466	92.45	-	-	86.37	32.33	5.55	31.8	325	317	A	V
		2483.8	68.75	-5.25	74	62.73	32.27	5.55	31.8	325	317	P	V
	!	2483.56	48.31	-5.69	54	42.29	32.27	5.55	31.8	325	317	A	V



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	41.82	-32.18	74	63.27	34.2	8.1	63.75	100	360	P	H
		4824	42.05	-31.95	74	63.5	34.2	8.1	63.75	100	360	P	V
802.11n HT20 CH 06 2437MHz		4874	42.41	-31.59	74	63.92	34.13	8.09	63.73	100	360	P	H
		7308	44.4	-29.6	74	62.42	36.6	9.75	64.37	100	360	P	H
		4872	41.88	-32.12	74	63.39	34.13	8.09	63.73	100	69	P	V
		7311	44.07	-29.93	74	62.09	36.6	9.75	64.37	100	69	P	V
802.11n HT20 CH 11 2462MHz		4926	41.63	-32.37	74	63.18	34.1	8.06	63.71	100	0	P	H
		7386	43.66	-30.34	74	61.73	36.5	9.81	64.38	100	0	P	H
		4924	40.98	-33.02	74	62.53	34.1	8.06	63.71	100	360	P	V
		7386	43.46	-30.54	74	61.53	36.5	9.81	64.38	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30	22.33	-17.67	40	29.2	24.5	0.61	31.98	132	245	P	H
		66.86	18.17	-21.83	40	36.72	12.54	0.84	31.93	-	-	P	H
		275.41	20.12	-25.88	46	31.52	18.84	1.78	32.02	-	-	P	H
		321.97	19.68	-26.32	46	30.29	19.58	1.85	32.04	-	-	P	H
		375.32	21.14	-24.86	46	30.31	20.97	1.96	32.1	-	-	P	H
		523.73	22.07	-23.93	46	28.51	23.46	2.4	32.3	-	-	P	H
		30.97	21.29	-18.71	40	28.73	23.93	0.61	31.98	120	256	P	V
		66.86	17.66	-22.34	40	36.21	12.54	0.84	31.93	-	-	P	V
		174.53	16.56	-26.94	43.5	31.77	15.37	1.34	31.92	-	-	P	V
		224	18.19	-27.81	46	32.99	15.54	1.59	31.93	-	-	P	V
		272.5	20.13	-25.87	46	31.44	18.93	1.77	32.01	-	-	P	V
		318.09	19.46	-26.54	46	30.16	19.48	1.85	32.03	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.59	8.232	0.121	0.13kHz
802.11g	87.44	1.362	0.734	0.75kHz
2.4GHz 802.11n HT20	86.76	1.282	0.780	0.82kHz


802.11b

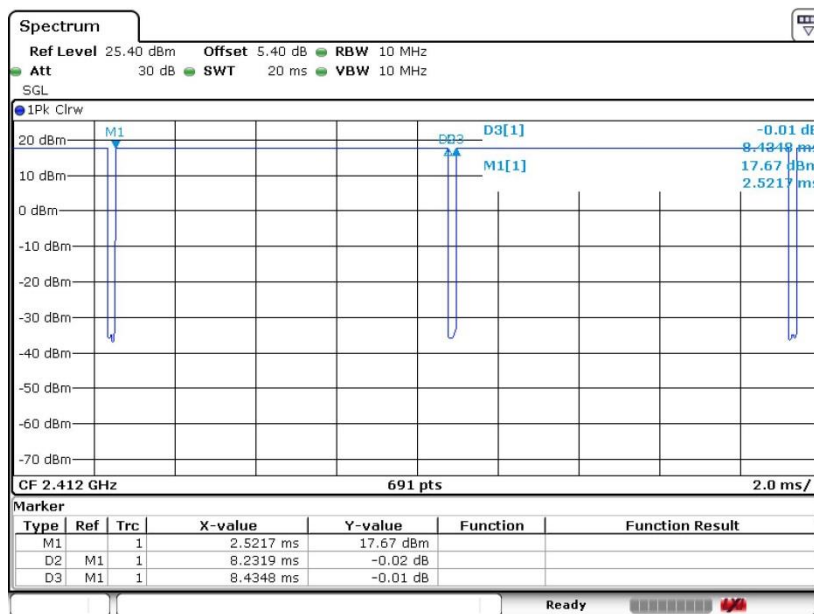

Date: 30.SEP.2018 18:55:12




802.11g

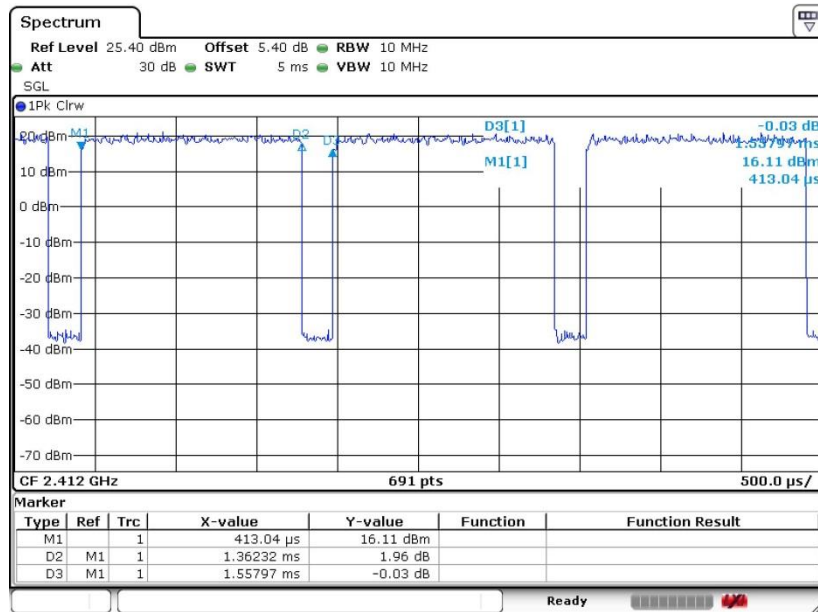

Date: 30.SEP.2018 18:55:52

802.11n HT20

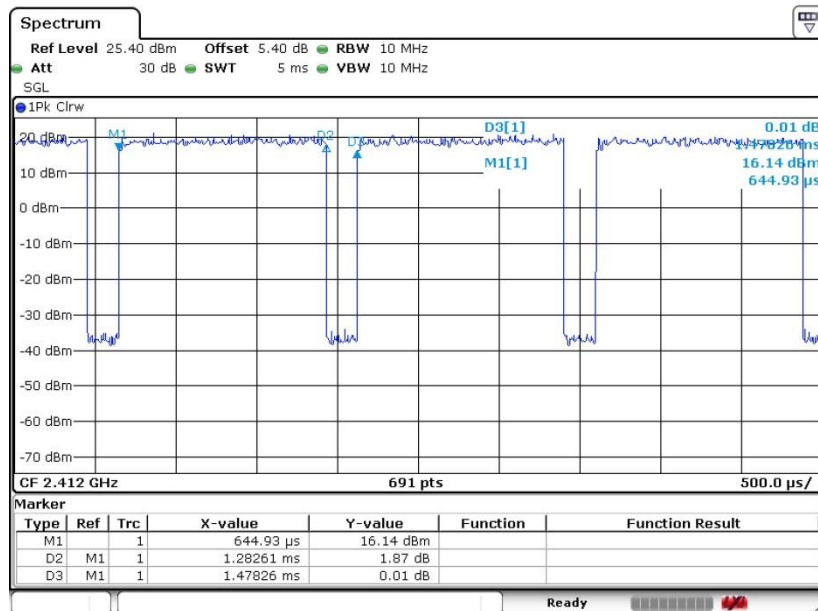

Date: 30.SEP.2018 18:56:32