



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2013-1
FCC ID : IHDT56YD1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Mar. 29, 2019 and testing was completed on May 22, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	6
1.4 Modification of EUT	6
1.5 Specification of Accessory.....	7
1.6 Testing Location	9
1.7 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 TEST RESULT.....	14
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement.....	25
3.6 Automatically Discontinue Transmission	27
3.7 Antenna Requirements.....	28
4 LIST OF MEASURING EQUIPMENT	29
5 UNCERTAINTY OF EVALUATION	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR932901F	Rev. 01	Initial issue of report	Jun. 10, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 11.33 dB at 35.820 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.99 dB at 0.527 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2013-1
FCC ID	IHDT56YD1
EUT supports Radios application	GSM/WCDMA/LTE/ WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS/NFC
IMEI Code	Conducted: 354142100019852/354142100019860 Conduction: 354142100011792/354142100011800 Radiation: 354142100011818/354142100011826
HW Version	DVT2
SW Version	PSB29.21
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 17.78 dBm / 0.0600 W 802.11n HT20 : 17.92 dBm / 0.0619 W 802.11n HT40 : 17.08 dBm / 0.0511 W 802.11ac VHT20: 17.77 dBm / 0.0598 W 802.11ac VHT40: 16.94 dBm / 0.0494 W 802.11ac VHT80: 14.59 dBm / 0.0288 W
99% Occupied Bandwidth	802.11a : 17.43 MHz 802.11n HT20 : 18.83 MHz 802.11n HT40 : 38.96 MHz 802.11ac VHT80 : 77.32 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	Fixed Internal Monopole Antenna with gain -4.50 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11an HT20/HT40 by referring to their maximum conducted power.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1(IN)	Brand Name	Motorola (Salom)	Model Name	SC-44
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(AU)	Brand Name	Motorola (Salom)	Model Name	SC-45
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(BR)	Brand Name	Motorola (Salom)	Model Name	SC-47
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name	SC-41
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(UK)	Brand Name	Motorola (Salom)	Model Name	SC-43
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(EU)	Brand Name	Motorola (Salom)	Model Name	SC-42
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1 (Chile)	Brand Name	Motorola (Salom)	Model Name	SC-42
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 1(AR)	Brand Name	Motorola (Salom)	Model Name	SC-46
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 2(AU)	Brand Name	Motorola (Acbel)	Model Name	SC-45
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	SC-41
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	SC-42
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name	SC-43
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	SC-46
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 3(BR)	Brand Name	Motorola (Cliptech/Tenpao)	Model Name	SC-47
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
AC Adapter 4(BR)	Brand Name	Motorola (Salom/Flex)	Model Name	SC-47
	Power Rating	I/P: 100-240 Vac, 300mA ,50/60HZ O/P: 5Vdc 2000mA		
Battery	Brand Name	Motorola (ATL)	Model Name	KR40
	Power Rating	3.8Vdc,3500mAh	Type	Li-ion, Polymer
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	SH38C37773
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		
Earphone 2	Brand Name	Motorola (jiahe)	Model Name	SH38C44959
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core		



USB Cable 1	Brand Name	Motorola (LiQi)	Model Name	L32B-053000100/L32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (SaiBao)	Model Name	S32B-053000100/S32B-053000100L
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



1.6 Testing Location

<FCC>

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH04-KS TH01-KS	CN1257	314309

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151 [*]	5755	159 [*]	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + Earphone 1 + USB Cable 1(Charging from adapter 1)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Earphone 1, USB Cable 1	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

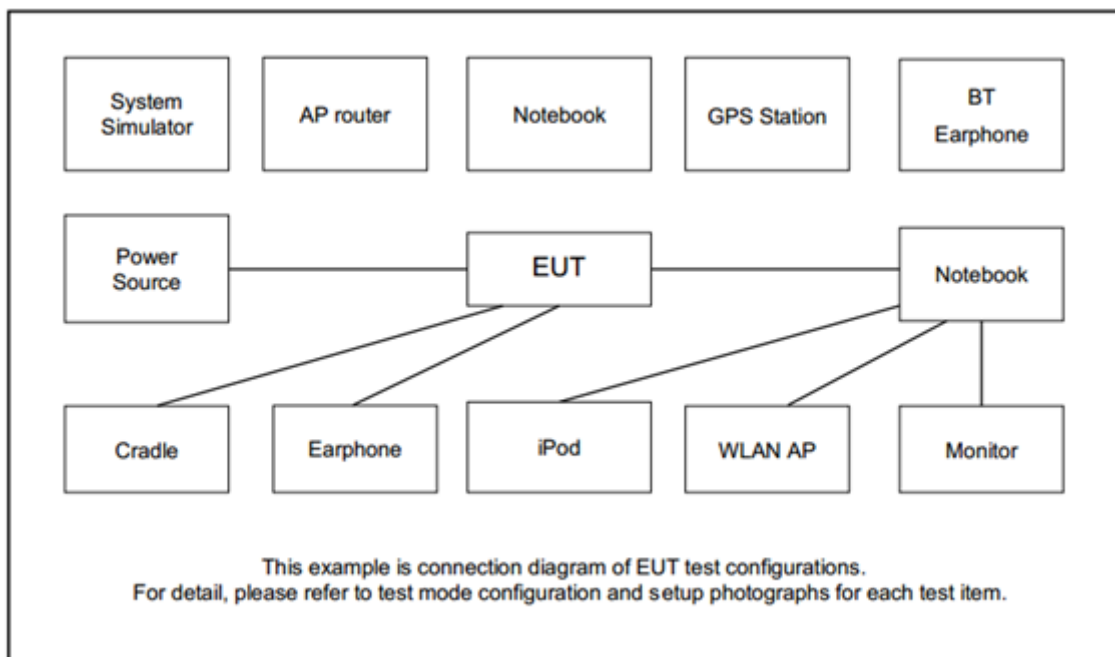

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.8 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

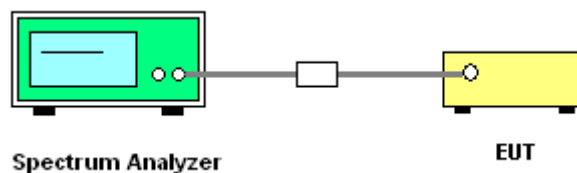

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

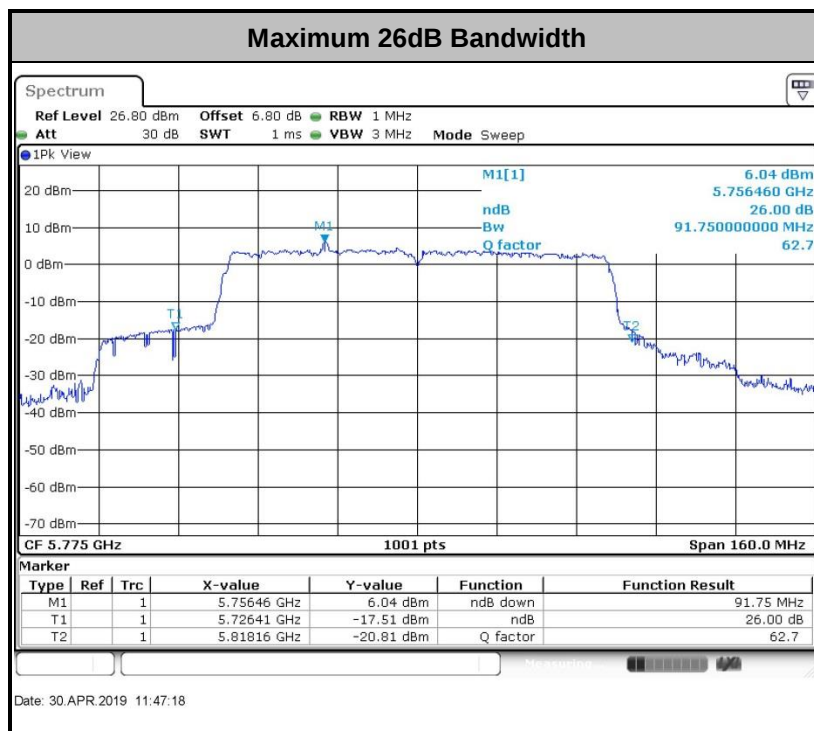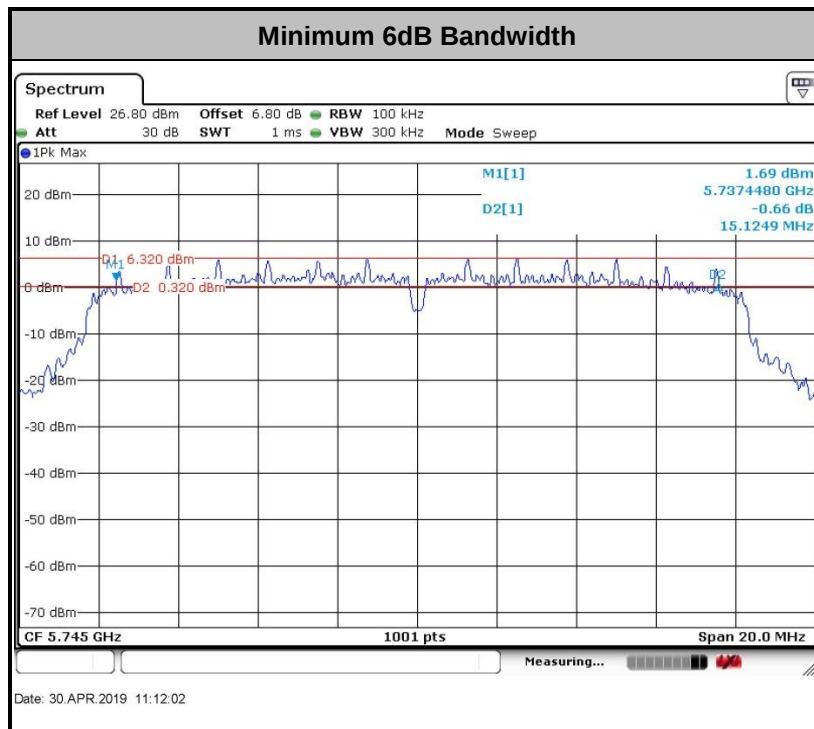

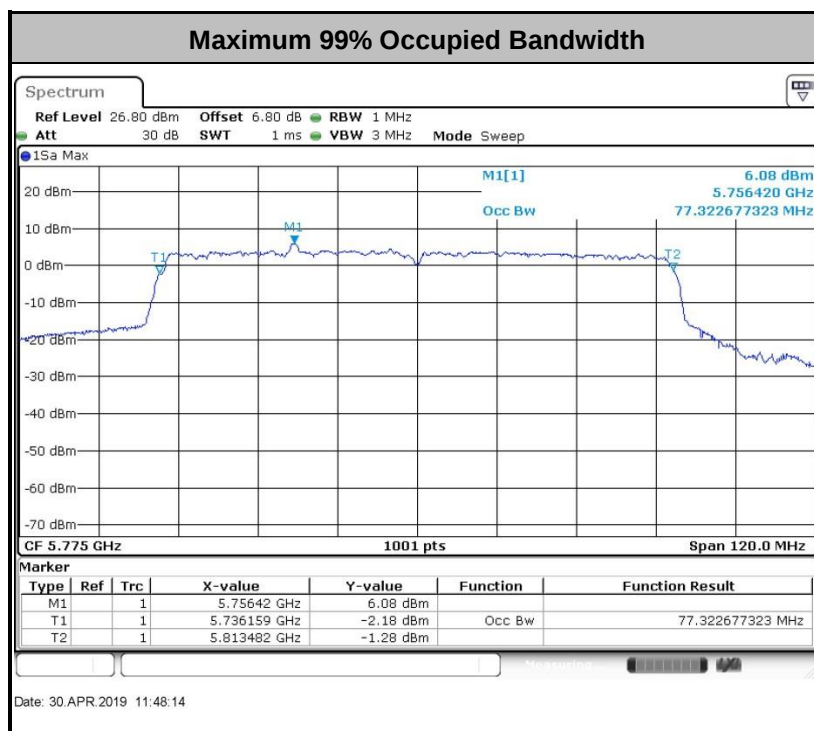

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

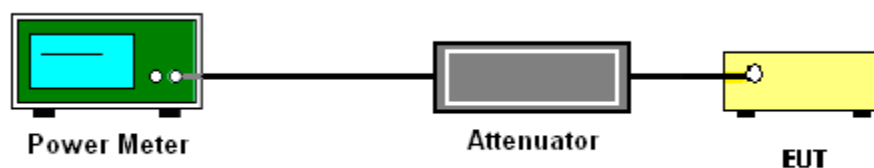

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

3.3.4 Test Setup

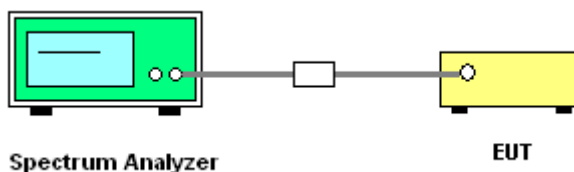

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

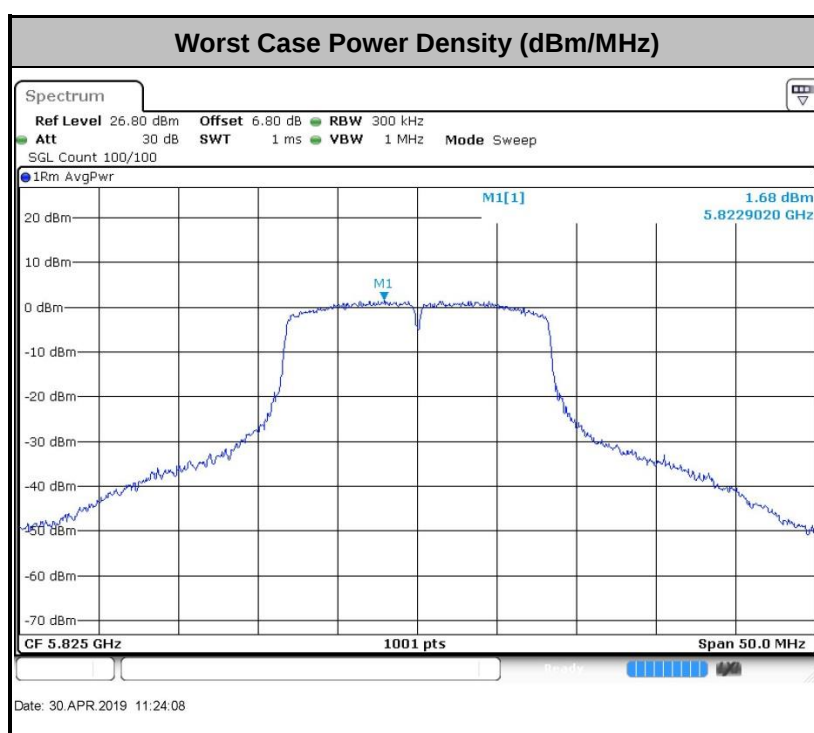

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

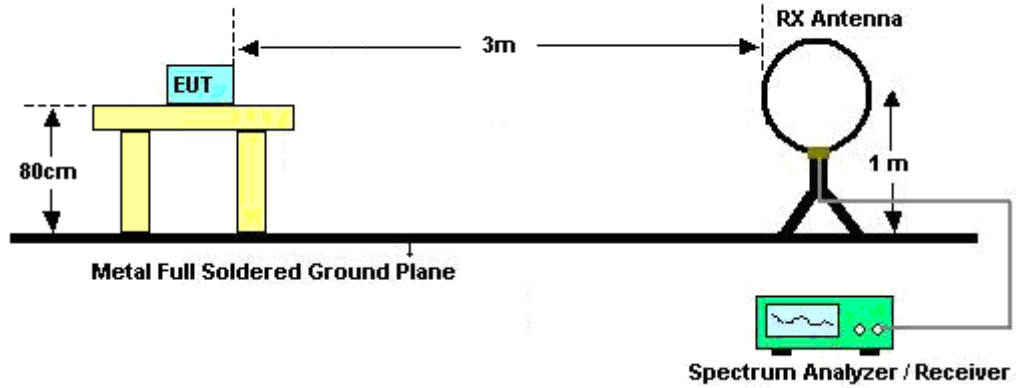

For radiated emissions from 30MHz to 1GHz

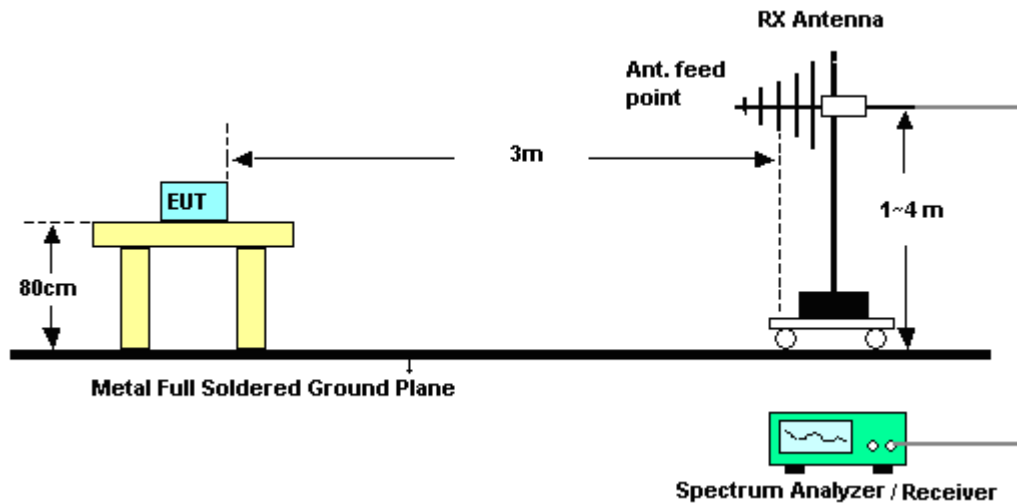

For radiated emissions above 1GHz

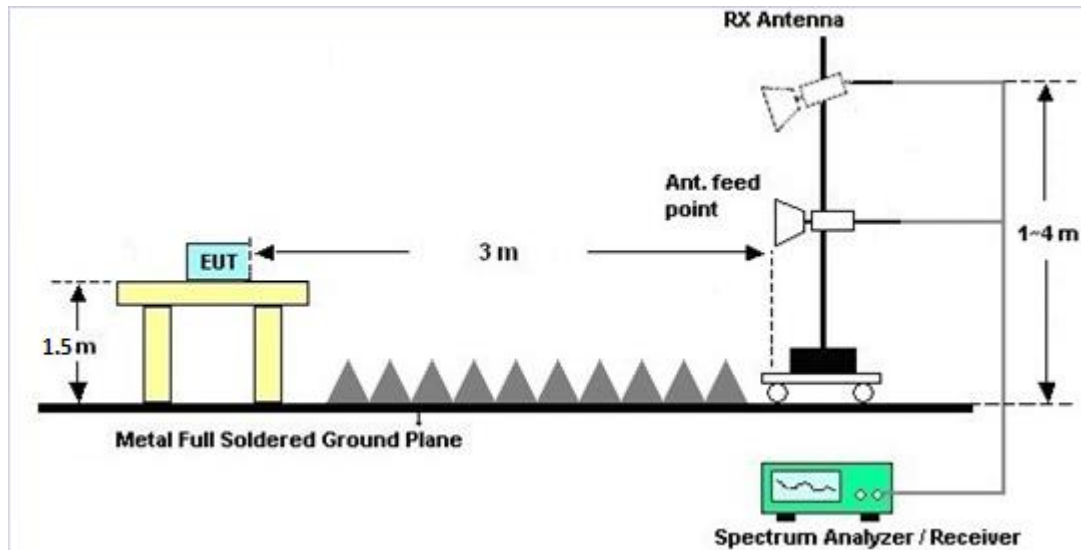

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

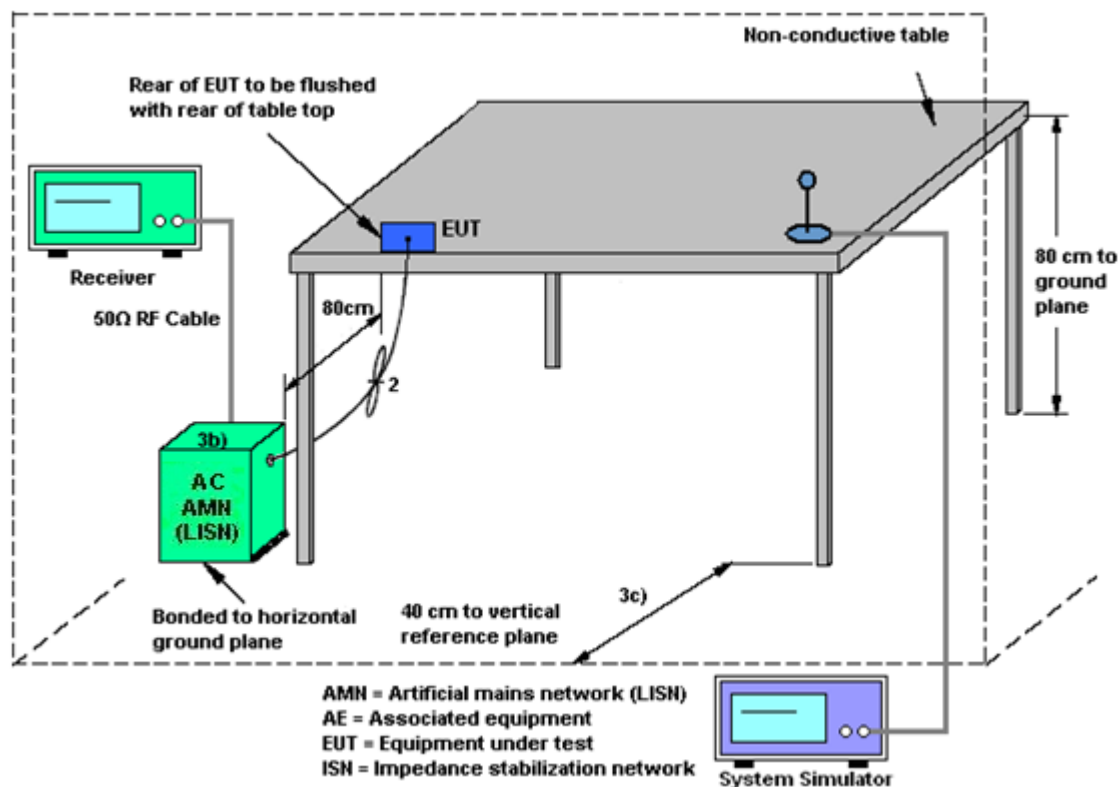

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Apr. 30, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Apr. 30, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Apr. 30, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Nov. 19, 2018	Apr. 30, 2019	Nov. 18, 2019	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 12, 2018	May 22, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz, MAX 30dB	Apr. 16, 2019	May 22, 2019	Apr. 15, 2020	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	May 22, 2019	Oct. 17, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 28, 2018	May 22, 2019	Dec. 27, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Jan. 27, 2019	May 22, 2019	Jan. 26, 2020	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	May 22, 2019	Jan. 04, 2020	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 19, 2018	May 22, 2019	Nov. 18, 2019	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	May 22, 2019	Jan. 13, 2020	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz-18GHz	Apr. 17, 2019	May 22, 2019	Apr. 16, 2020	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2018	May 22, 2019	Oct. 11, 2019	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 22, 2019	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 22, 2019	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 22, 2019	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Apr. 13, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Apr. 13, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Apr. 13, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Apr. 13, 2019	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Report Number : FR932901F

Test Engineer:	Asa Cheng	Temperature:	21~25	°C
Test Date:	2019/4/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.43	22.78	15.12	0.5	Pass
11a	6Mbps	1	157	5785	17.43	22.43	15.14	0.5	Pass
11a	6Mbps	1	165	5825	17.33	22.53	15.12	0.5	Pass
HT20	MCS 0	1	149	5745	18.63	23.98	15.12	0.5	Pass
HT20	MCS 0	1	157	5785	18.53	23.48	15.14	0.5	Pass
HT20	MCS 0	1	165	5825	18.83	24.13	15.12	0.5	Pass
HT40	MCS 0	1	151	5755	38.96	58.44	36.08	0.5	Pass
HT40	MCS 0	1	159	5795	38.96	56.73	36.28	0.5	Pass
VHT80	MCS 0	1	155	5775	77.32	91.75	76.24	0.5	Pass

TEST RESULTS DATA
Average Power Table


Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.19	17.57	30.00	-4.50		Pass
11a	6Mbps	1	157	5785	0.19	17.78	30.00	-4.50		Pass
11a	6Mbps	1	165	5825	0.19	17.60	30.00	-4.50		Pass
HT20	MCS 0	1	149	5745	0.23	17.83	30.00	-4.50		Pass
HT20	MCS 0	1	157	5785	0.23	17.92	30.00	-4.50		Pass
HT20	MCS 0	1	165	5825	0.23	17.65	30.00	-4.50		Pass
HT40	MCS 0	1	151	5755	0.57	16.92	30.00	-4.50		Pass
HT40	MCS 0	1	159	5795	0.57	17.08	30.00	-4.50		Pass
VHT20	MCS 0	1	149	5745	0.20	17.61	30.00	-4.50		Pass
VHT20	MCS 0	1	157	5785	0.20	17.77	30.00	-4.50		Pass
VHT20	MCS 0	1	165	5825	0.20	17.64	30.00	-4.50		Pass
VHT40	MCS 0	1	151	5755	0.51	16.89	30.00	-4.50		Pass
VHT40	MCS 0	1	159	5795	0.51	16.94	30.00	-4.50		Pass
VHT80	MCS 0	1	155	5775	1.16	14.59	30.00	-4.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.19	2.22	3.69	30.00	-4.50	Pass
11a	6Mbps	1	157	5785	0.19	2.22	3.14	30.00	-4.50	Pass
11a	6Mbps	1	165	5825	0.19	2.22	4.09	30.00	-4.50	Pass
HT20	MCS 0	1	149	5745	0.23	2.22	3.97	30.00	-4.50	Pass
HT20	MCS 0	1	157	5785	0.23	2.22	2.96	30.00	-4.50	Pass
HT20	MCS 0	1	165	5825	0.23	2.22	4.02	30.00	-4.50	Pass
HT40	MCS 0	1	151	5755	0.57	2.22	-0.39	30.00	-4.50	Pass
HT40	MCS 0	1	159	5795	0.57	2.22	-0.64	30.00	-4.50	Pass
VHT80	MCS 0	1	155	5775	1.16	2.22	-5.85	30.00	-4.50	Pass




Appendix B. AC Conducted Emission Test Results

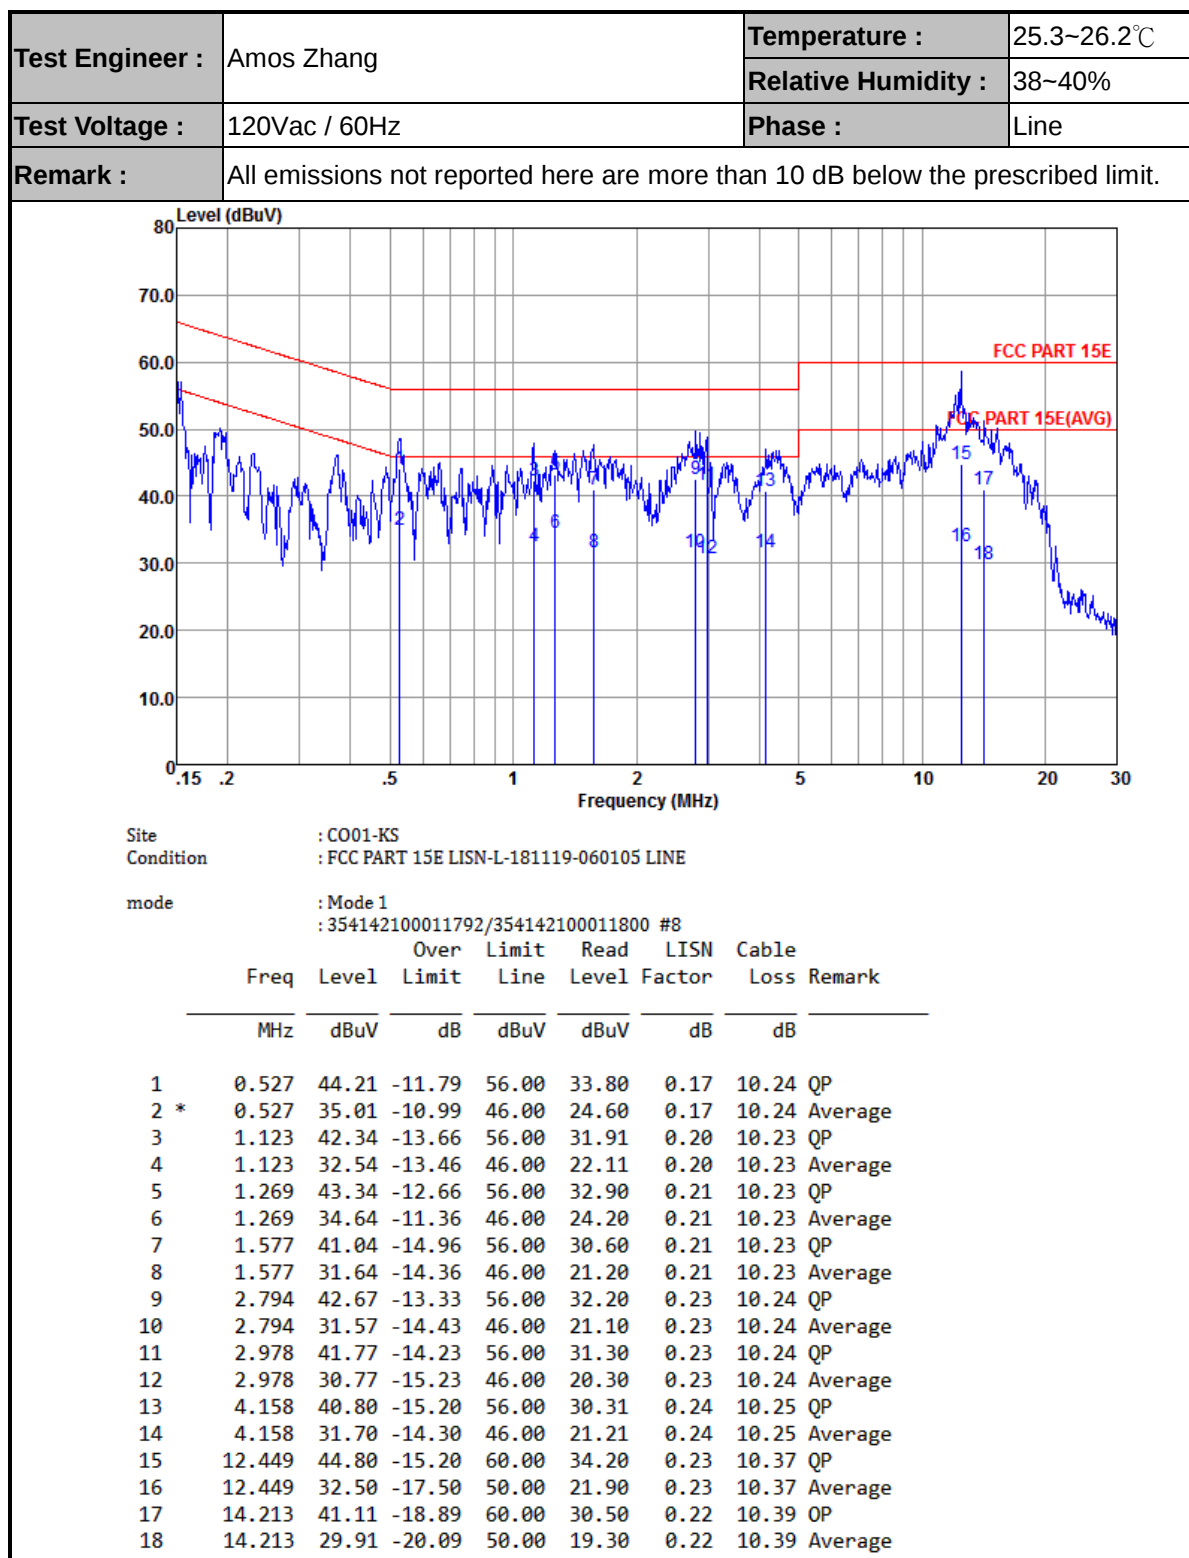



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

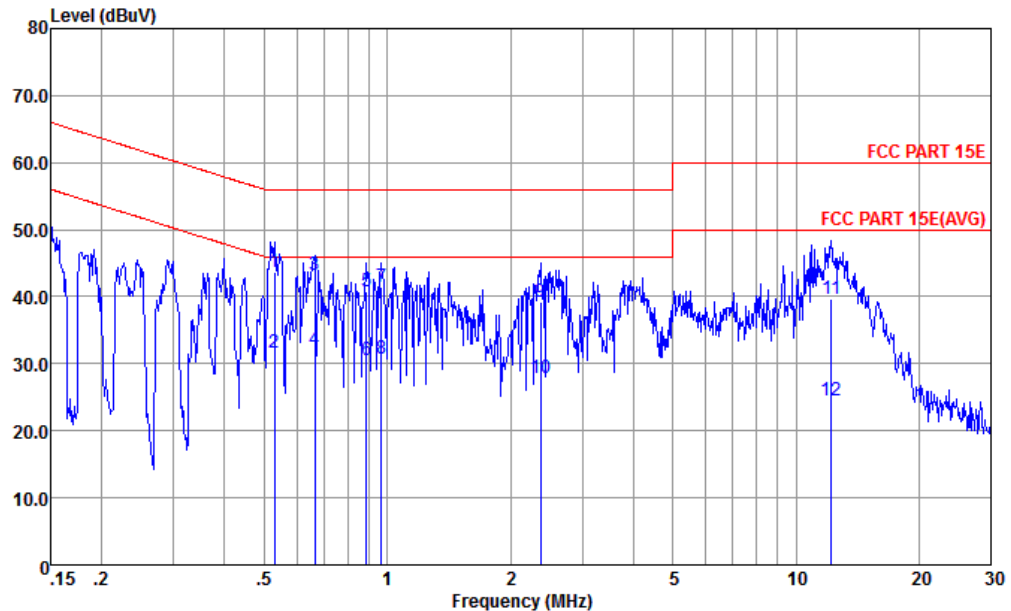

Site : CO01-KS
Condition : FCC PART 15E LISN-N-181119-060105 NEUTRAL

mode : Mode 1
: 354142100011792/354142100011800 #8

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.529	43.58	-12.42	56.00	33.19	0.15	10.24	QP
2	0.529	31.68	-14.32	46.00	21.29	0.15	10.24	Average
3	0.665	43.28	-12.72	56.00	32.90	0.14	10.24	QP
4	0.665	31.98	-14.02	46.00	21.60	0.14	10.24	Average
5	0.890	40.87	-15.13	56.00	30.50	0.13	10.24	QP
6	0.890	30.47	-15.53	46.00	20.10	0.13	10.24	Average
7	0.968	41.47	-14.53	56.00	31.11	0.13	10.23	QP
8	0.968	30.67	-15.33	46.00	20.31	0.13	10.23	Average
9	2.371	39.29	-16.71	56.00	28.90	0.16	10.23	QP
10	2.371	27.89	-18.11	46.00	17.50	0.16	10.23	Average
11	12.188	39.71	-20.29	60.00	29.19	0.15	10.37	QP
12	12.188	24.61	-25.39	50.00	14.09	0.15	10.37	Average



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5643.6	49.73	-18.57	68.3	41.92	30.3	8.93	31.42	152	227	P	H
		5668.4	51.74	-30.21	81.95	43.64	30.58	8.97	31.45	152	227	P	H
		5718.8	57.65	-52.91	110.56	49.17	30.99	9.01	31.52	152	227	P	H
		5724.8	62.06	-59.78	121.84	53.58	30.99	9.01	31.52	152	227	P	H
		5748	102.89	-	-	94.28	31.13	9.03	31.55	152	227	P	H
		5748	96.17	-	-	87.56	31.13	9.03	31.55	152	227	A	H
		5619.6	48.4	-19.9	68.3	40.58	30.33	8.92	31.43	232	89	P	V
		5684.8	49.43	-44.66	94.09	41.22	30.72	8.98	31.49	232	89	P	V
		5720	52.63	-58.27	110.9	44.15	30.99	9.01	31.52	232	89	P	V
		5724.8	58.87	-62.97	121.84	50.39	30.99	9.01	31.52	232	89	P	V
		5744	97.35	-	-	88.74	31.13	9.03	31.55	232	89	P	V
		5744	90.65	-	-	82.04	31.13	9.03	31.55	232	89	A	V
802.11a CH 157 5785MHz		5643.6	49.73	-18.57	68.3	41.92	30.3	8.93	31.42	152	227	P	H
		5668.4	51.74	-30.21	81.95	43.64	30.58	8.97	31.45	152	227	P	H
		5718.8	57.65	-52.91	110.56	49.17	30.99	9.01	31.52	152	227	P	H
		5724.8	62.06	-59.78	121.84	53.58	30.99	9.01	31.52	152	227	P	H
		5748	102.89	-	-	94.28	31.13	9.03	31.55	152	227	P	H
		5748	96.17	-	-	87.56	31.13	9.03	31.55	152	227	A	H
		5619.6	48.4	-19.9	68.3	40.58	30.33	8.92	31.43	232	89	P	V
		5684.8	49.43	-44.66	94.09	41.22	30.72	8.98	31.49	232	89	P	V
		5720	52.63	-58.27	110.9	44.15	30.99	9.01	31.52	232	89	P	V
		5724.8	58.87	-62.97	121.84	50.39	30.99	9.01	31.52	232	89	P	V
		5744	97.35	-	-	88.74	31.13	9.03	31.55	232	89	P	V
		5744	90.65	-	-	82.04	31.13	9.03	31.55	232	89	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5850	55.74	-66.56	122.3	46.4	31.96	9.06	31.68	232	303	P	H
		5856	54.9	-55.72	110.62	45.42	32.1	9.06	31.68	232	303	P	H
		5914	50.84	-25.57	76.41	41.27	32.26	9.04	31.73	232	303	P	H
		5975.6	50.78	-17.52	68.3	41.05	32.47	9.02	31.76	232	303	P	H
		5822	102.75	-	-	93.51	31.82	9.07	31.65	232	303	P	H
		5822	96.22	-	-	86.98	31.82	9.07	31.65	232	303	A	H
		5852.4	52.35	-64.48	116.83	43.01	31.96	9.06	31.68	239	84	P	V
		5861.2	49.81	-59.35	109.16	40.35	32.1	9.06	31.7	239	84	P	V
		5923.6	49.11	-20.22	69.33	39.5	32.31	9.03	31.73	239	84	P	V
		5966.8	50.15	-18.15	68.3	40.47	32.42	9.02	31.76	239	84	P	V
		5824	96.78	-	-	87.54	31.82	9.07	31.65	239	84	P	V
		5824	89.76	-	-	80.52	31.82	9.07	31.65	239	84	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	42.61	-31.39	74	54.98	39.68	13.36	65.41	300	0	P	H
		11490	43.89	-30.11	74	56.26	39.68	13.36	65.41	100	360	P	V
802.11a CH 157 5785MHz		11570	40.05	-33.95	74	52.51	39.49	13.44	65.39	100	360	P	H
		11570	42.81	-31.19	74	55.27	39.49	13.44	65.39	100	360	P	V
802.11a CH 165 5825MHz		11650	40.1	-33.9	74	52.67	39.29	13.5	65.36	100	360	P	H
		11650	43.07	-30.93	74	55.64	39.29	13.5	65.36	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5608.8	49.04	-19.26	68.3	41.21	30.36	8.9	31.43	153	231	P	H
		5694.8	50.1	-51.37	101.47	41.89	30.72	8.98	31.49	153	231	P	H
		5718.4	56.72	-53.73	110.45	48.24	30.99	9.01	31.52	153	231	P	H
		5724.8	67.56	-54.28	121.84	59.08	30.99	9.01	31.52	153	231	P	H
		5744	102.27	-	-	93.66	31.13	9.03	31.55	153	231	P	H
		5744	96.02	-	-	87.41	31.13	9.03	31.55	153	231	A	H
		5608.8	48.25	-20.05	68.3	40.42	30.36	8.9	31.43	238	89	P	V
		5677.2	48.63	-39.84	88.47	40.53	30.58	8.97	31.45	238	89	P	V
		5716.4	52.79	-57.1	109.89	44.46	30.85	9	31.52	238	89	P	V
		5724.8	62.8	-59.04	121.84	54.32	30.99	9.01	31.52	238	89	P	V
		5740	97.06	-	-	88.45	31.13	9.03	31.55	238	89	P	V
		5740	90.48	-	-	81.87	31.13	9.03	31.55	238	89	A	V
802.11n HT20 CH 157 5785MHz		5643.6	49.73	-18.57	68.3	41.92	30.3	8.93	31.42	152	227	P	H
		5668.4	51.74	-30.21	81.95	43.64	30.58	8.97	31.45	152	227	P	H
		5718.8	57.65	-52.91	110.56	49.17	30.99	9.01	31.52	152	227	P	H
		5724.8	62.06	-59.78	121.84	53.58	30.99	9.01	31.52	152	227	P	H
		5748	102.89	-	-	94.28	31.13	9.03	31.55	152	227	P	H
		5748	96.17	-	-	87.56	31.13	9.03	31.55	152	227	A	H
		5619.6	48.4	-19.9	68.3	40.58	30.33	8.92	31.43	232	89	P	V
		5684.8	49.43	-44.66	94.09	41.22	30.72	8.98	31.49	232	89	P	V
		5720	52.63	-58.27	110.9	44.15	30.99	9.01	31.52	232	89	P	V
		5724.8	58.87	-62.97	121.84	50.39	30.99	9.01	31.52	232	89	P	V
		5744	97.35	-	-	88.74	31.13	9.03	31.55	232	89	P	V
		5744	90.65	-	-	82.04	31.13	9.03	31.55	232	89	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5850.8	57.27	-63.21	120.48	47.93	31.96	9.06	31.68	234	302	P	H
		5857.2	57.08	-53.2	110.28	47.6	32.1	9.06	31.68	234	302	P	H
		5904.4	50.01	-33.5	83.51	40.46	32.21	9.05	31.71	234	302	P	H
		5984.8	50.02	-18.28	68.3	40.29	32.47	9.02	31.76	234	302	P	H
		5822	102.55	-	-	93.31	31.82	9.07	31.65	234	302	P	H
		5822	96.09	-	-	86.85	31.82	9.07	31.65	234	302	A	H
		5850	53.86	-68.44	122.3	44.52	31.96	9.06	31.68	231	87	P	V
		5860.8	52.68	-56.59	109.27	43.22	32.1	9.06	31.7	231	87	P	V
		5917.2	50.35	-23.7	74.05	40.78	32.26	9.04	31.73	231	87	P	V
		5995.6	50.58	-17.72	68.3	40.83	32.52	9.01	31.78	231	87	P	V
		5824	97.3	-	-	88.06	31.82	9.07	31.65	231	87	P	V
		5824	90.55	-	-	81.31	31.82	9.07	31.65	231	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11490	45.89	-28.11	74	58.26	39.68	13.36	65.41	150	360	P	H
CH 149 5745MHz		11490	45.67	-28.33	74	58.04	39.68	13.36	65.41	150	360	P	V
802.11n HT20		11570	44.44	-29.56	74	56.9	39.49	13.44	65.39	150	360	P	H
CH 157 5785MHz		11570	44.51	-29.49	74	56.97	39.49	13.44	65.39	150	360	P	V
802.11n HT20		11650	45.07	-28.93	74	57.64	39.29	13.5	65.36	150	360	P	H
CH 165 5825MHz		11650	44.79	-29.21	74	57.36	39.29	13.5	65.36	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5605.2	49.85	-18.45	68.3	42.02	30.36	8.9	31.43	157	233	P	H
		5699.2	57.33	-47.38	104.71	49.12	30.72	8.98	31.49	157	233	P	H
		5717.6	69.93	-40.3	110.23	61.45	30.99	9.01	31.52	157	233	P	H
		5720.8	73.44	-39.28	112.72	64.96	30.99	9.01	31.52	157	233	P	H
		5851.6	48.52	-70.13	118.65	39.18	31.96	9.06	31.68	157	233	P	H
		5866	48.37	-59.45	107.82	38.91	32.1	9.06	31.7	157	233	P	H
		5882.8	49.8	-49.71	99.51	40.3	32.15	9.05	31.7	157	233	P	H
		5964.4	50.06	-18.24	68.3	40.38	32.42	9.02	31.76	157	233	P	H
		5740	99.44	-	-	90.83	31.13	9.03	31.55	157	233	P	H
		5740	92.56	-	-	83.95	31.13	9.03	31.55	157	233	A	H
		5629.2	48.92	-19.38	68.3	41.09	30.33	8.92	31.42	244	87	P	V
		5698.4	52.37	-51.75	104.12	44.16	30.72	8.98	31.49	244	87	P	V
		5715.6	61.21	-48.46	109.67	52.88	30.85	9	31.52	244	87	P	V
		5724.4	63.94	-56.99	120.93	55.46	30.99	9.01	31.52	244	87	P	V
		5851.6	49.06	-69.59	118.65	39.72	31.96	9.06	31.68	244	87	P	V
		5862.8	49.6	-59.11	108.71	40.14	32.1	9.06	31.7	244	87	P	V
		5912.8	49.8	-27.5	77.3	40.23	32.26	9.04	31.73	244	87	P	V
		5986.8	49.41	-18.89	68.3	39.7	32.47	9.02	31.78	244	87	P	V
		5740	94.24	-	-	85.63	31.13	9.03	31.55	244	87	P	V
		5740	87.17	-	-	78.56	31.13	9.03	31.55	244	87	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5647.2	48.76	-19.54	68.3	40.95	30.3	8.93	31.42	151	299	P	H
		5655.6	49.09	-23.37	72.46	41.15	30.44	8.95	31.45	151	299	P	H
		5712.8	49.94	-58.95	108.89	41.61	30.85	9	31.52	151	299	P	H
		5722.8	52.4	-64.88	117.28	43.92	30.99	9.01	31.52	151	299	P	H
		5853.6	58.51	-55.58	114.09	49.03	32.1	9.06	31.68	151	299	P	H
		5855.1	52.78	-58.09	110.87	43.3	32.1	9.06	31.68	151	299	P	H
		5876.4	50.34	-53.92	104.26	40.84	32.15	9.05	31.7	151	299	P	H
		5945.6	49.92	-18.38	68.3	40.26	32.37	9.03	31.74	151	299	P	H
		5782	99.21	-	-	90.35	31.41	9.06	31.61	151	299	P	H
		5782	92.17	-	-	83.31	31.41	9.06	31.61	151	299	A	H
		5642.8	47.9	-20.4	68.3	40.09	30.3	8.93	31.42	233	89	P	V
		5671.6	48.82	-35.5	84.32	40.72	30.58	8.97	31.45	233	89	P	V
		5715.6	48.78	-60.89	109.67	40.45	30.85	9	31.52	233	89	P	V
		5722.4	48.28	-68.09	116.37	39.8	30.99	9.01	31.52	233	89	P	V
		5854.4	51.64	-60.63	112.27	42.16	32.1	9.06	31.68	233	89	P	V
		5855.1	50.34	-60.53	110.87	40.86	32.1	9.06	31.68	233	89	P	V
		5881.2	51.37	-49.32	100.69	41.87	32.15	9.05	31.7	233	89	P	V
		5929.2	50.05	-18.25	68.3	40.44	32.31	9.03	31.73	233	89	P	V
		5790	93.26	-	-	84.24	31.55	9.08	31.61	233	89	P	V
		5790	86.48	-	-	77.46	31.55	9.08	31.61	233	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11510	44.62	-29.38	74	56.97	39.7	13.37	65.42	150	360	P	H
CH 151 5755MHz		11510	44.35	-29.65	74	56.7	39.7	13.37	65.42	150	360	P	V
802.11n HT40		11590	44.71	-29.29	74	57.2	39.44	13.45	65.38	150	360	P	H
CH 159 5795MHz		11590	44.08	-29.92	74	56.57	39.44	13.45	65.38	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5646.8	51.61	-16.69	68.3	43.8	30.3	8.93	31.42	100	248	P	H
		5679.6	57.1	-33.14	90.24	49.04	30.58	8.97	31.49	100	248	P	H
		5716.4	72.26	-37.63	109.89	63.93	30.85	9	31.52	100	248	P	H
		5720.8	68.6	-44.12	112.72	60.12	30.99	9.01	31.52	100	248	P	H
		5851.2	56.55	-63.01	119.56	47.21	31.96	9.06	31.68	100	248	P	H
		5862.8	59.36	-49.35	108.71	49.9	32.1	9.06	31.7	100	248	P	H
		5880	56.97	-44.62	101.59	47.47	32.15	9.05	31.7	100	248	P	H
		5954.8	50.71	-17.59	68.3	41.05	32.37	9.03	31.74	100	248	P	H
		5756	95.84	-	-	87.1	31.27	9.05	31.58	100	248	P	H
		5756	88.23	-	-	79.49	31.27	9.05	31.58	100	248	A	H
		5614	49.09	-19.21	68.3	41.26	30.36	8.9	31.43	305	85	P	V
		5693.6	52.13	-48.45	100.58	43.92	30.72	8.98	31.49	305	85	P	V
		5719.6	66.37	-44.42	110.79	57.89	30.99	9.01	31.52	305	85	P	V
		5724	67.89	-52.13	120.02	59.41	30.99	9.01	31.52	305	85	P	V
		5850.4	51.27	-70.12	121.39	41.93	31.96	9.06	31.68	305	85	P	V
		5865.2	54.53	-53.51	108.04	45.07	32.1	9.06	31.7	305	85	P	V
		5877.6	53.89	-49.48	103.37	44.39	32.15	9.05	31.7	305	85	P	V
		5984.8	50.85	-17.45	68.3	41.12	32.47	9.02	31.76	305	85	P	V
		5744	89.92	-	-	81.31	31.13	9.03	31.55	305	85	P	V
		5744	82.71	-	-	74.1	31.13	9.03	31.55	305	85	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11550	44.66	-29.34	74	57.1	39.54	13.42	65.4	150	360	P	H
CH 155 5775MHz		11550	44.86	-29.14	74	57.3	39.54	13.42	65.4	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11AC VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		30	21.62	-18.38	40	29.94	24.2	0.46	32.98	100	0	P	H
		96.93	20.63	-22.87	43.5	36.5	16.1	0.96	32.93	-	-	P	H
		290.93	21.71	-24.29	46	33.87	19.07	1.78	33.01	-	-	P	H
		508.21	20.94	-25.06	46	28.33	23.49	2.37	33.25	-	-	P	H
		698.33	23.32	-22.68	46	28.84	24.89	2.87	33.28	-	-	P	H
		896.21	25.46	-20.54	46	27.98	26.48	3.34	32.34	-	-	P	H
		35.82	28.67	-11.33	40	40.28	20.84	0.51	32.96	100	30	P	V
		96.93	27.71	-15.79	43.5	43.58	16.1	0.96	32.93	-	-	P	V
		262.8	16.8	-29.2	46	28.19	19.93	1.68	33	-	-	P	V
		494.63	21.43	-24.57	46	29.03	23.3	2.34	33.24	-	-	P	V
		675.05	23.28	-22.72	46	28.95	24.82	2.8	33.29	-	-	P	V
		956.35	25.96	-20.04	46	27.14	27.01	3.46	31.65	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	95.63	1.428	0.701	0.75kHz
5GHz 802.11n HT20	94.90	1.333	0.750	0.82kHz
5GHz 802.11n HT40	87.74	0.664	1.507	1.6kHz
5GHz 802.11n VHT80	76.67	0.330	3.026	3.3kHz

802.11a

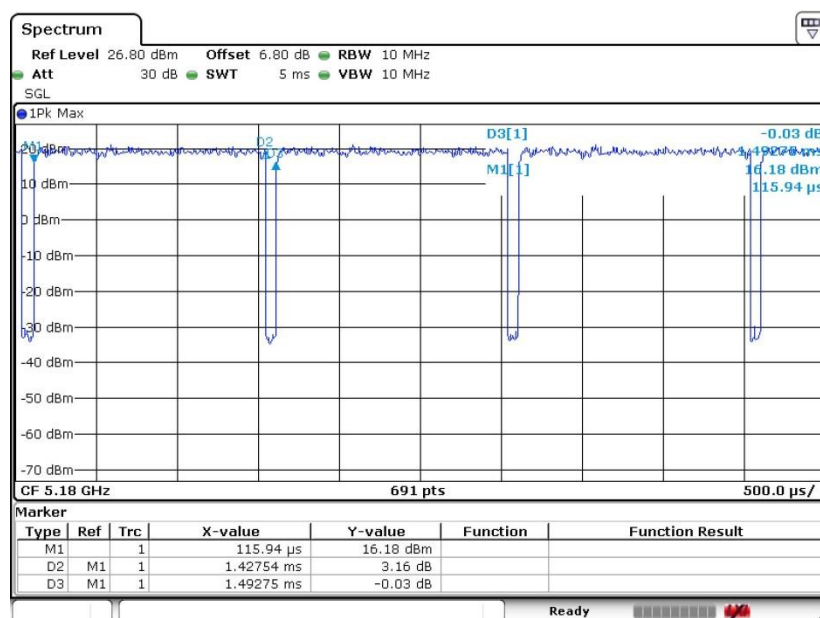




802.11n HT20

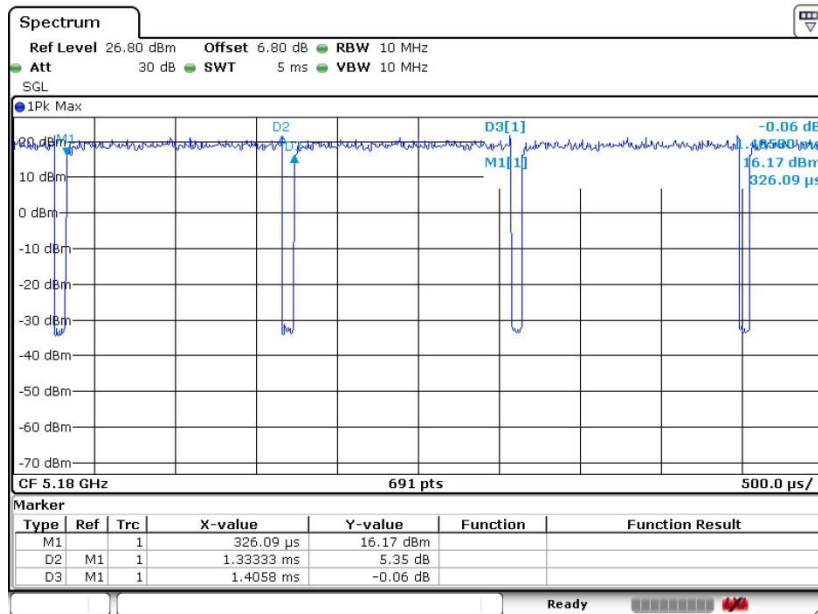

802.11n HT40

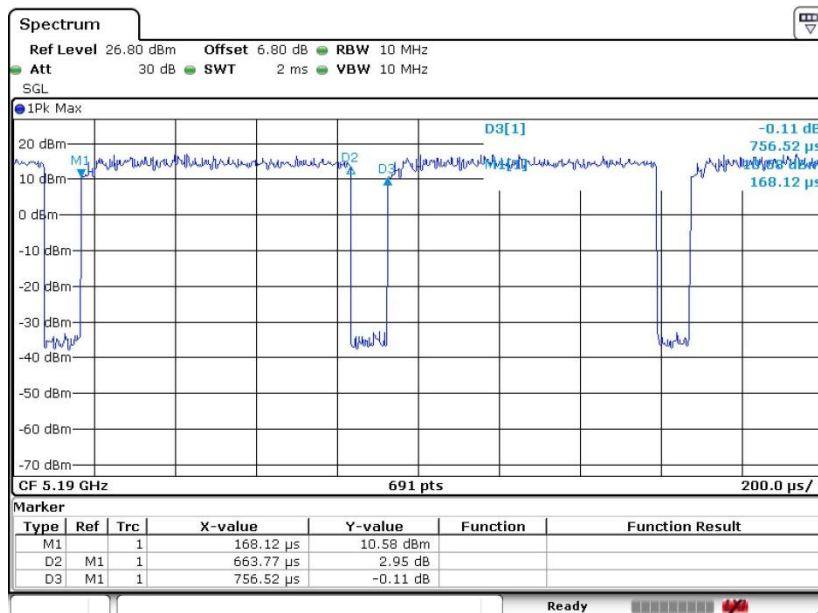

802.11ac VHT80

