


FCC SAR Test Report


APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2013-4
FCC ID : IHDT56YD3
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Jul. 24, 2019 and testing was started from Jul. 25, 2019 and completed on Aug. 19, 2019. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information.....	7
4.2 General LTE SAR Test and Reporting Considerations	9
5. Proximity Sensor Triggering Test.....	12
5.1 Proximity sensor triggering distances(Per KDB616217\$6.2).....	12
6. RF Exposure Limits.....	24
6.1 Uncontrolled Environment	24
6.2 Controlled Environment.....	24
7. Specific Absorption Rate (SAR)	25
7.1 Introduction	25
7.2 SAR Definition	25
8. System Description and Setup.....	26
8.1 E-Field Probe	27
8.2 Data Acquisition Electronics (DAE)	27
8.3 Phantom.....	28
8.4 Device Holder.....	29
9. Measurement Procedures.....	30
9.1 Spatial Peak SAR Evaluation	30
9.2 Power Reference Measurement.....	31
9.3 Area Scan.....	31
9.4 Zoom Scan.....	32
9.5 Volume Scan Procedures.....	32
9.6 Power Drift Monitoring.....	32
10. Test Equipment List	33
11. System Verification	34
11.1 Tissue Simulating Liquids	34
11.2 Tissue Verification.....	35
11.3 System Performance Check Results	36
12. RF Exposure Positions	37
12.1 Ear and handset reference point	37
12.2 Definition of the cheek position	38
12.3 Definition of the tilt position	39
12.4 Body Worn Accessory	40
12.5 Product Specific 10g SAR Exposure	41
12.6 Wireless Router.....	41
13. Conducted RF Output Power (Unit: dBm)	42
14. Antenna Location	203
15. SAR Test Results	204
15.1 Head SAR	207
15.2 Hotspot SAR	212
15.3 Body Worn Accessory SAR	220
15.4 Product specific 10g SAR.....	226
15.5 Repeated SAR Measurement	232
16. Simultaneous Transmission Analysis	233
16.1 Head Exposure Conditions.....	234
16.2 Hotspot Exposure Conditions.....	236
16.3 Body-Worn Accessory Exposure Conditions	238
16.4 Product specific 10g SAR Exposure Conditions.....	239
16.5 SPLSR Evaluation and Analysis.....	240
17. Uncertainty Assessment.....	289
18. References.....	290
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

[illegible]

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2013-4**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	0.51	1.43	1.43	1.58
		GSM1900	0.10	1.36	1.36	
	WCDMA	Band V	0.68	1.28	1.28	
		Band IV	0.28	1.27	1.27	
		Band II	0.22	1.26	1.26	
	CDMA2000	BC10	0.27	1.15	1.34	
		BC0	0.52	1.33	1.31	
		BC1	0.20	1.25	1.38	
	LTE	Band 12/Band 17	0.42	1.09	1.09	
		Band 13	0.24	0.71	0.71	
		Band 26/Band 5	0.66	1.20	1.20	
		Band 66/Band 4	0.15	1.33	1.33	
		Band 25/Band 2	0.18	1.36	1.36	
		Band 7	0.29	1.33	1.33	
		Band 41/Band 38	0.25	1.42	1.42	
DTS	WLAN	2.4GHz WLAN	0.82	0.86	0.86	1.57
NII		5GHz WLAN	1.16	0.58	0.58	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.13	<0.10	<0.10	1.58

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	3.25	3.96
		GSM1900	2.54	
	WCDMA	Band V	3.08	
		Band IV	2.58	
		Band II	2.47	
	CDMA2000	BC10	2.28	
		BC0	2.16	
		BC1	3.25	
	LTE	Band 26/Band 5	2.03	
		Band 66/Band 4	2.60	
		Band 25/Band 2	2.64	
		Band 7	3.43	
		Band 41/Band 38	2.99	
NII	WLAN	5GHz WLAN	1.36	3.96
Date of Testing:			2019/7/25~2019/8/19	

Remark: This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2013-4
FCC ID	IHDT56YD3
IMEI Code	357235100011064
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC
HW Version	DVT2
SW Version	PPI29.80
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz	

- WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.
 5. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz and WLAN5GHz.
 6. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/GSM1900, WCDMA band II/IV/V, CDMA BC0/BC1/BC10, LTE band 2/4/5/7/25/26/38/41/66 and WLAN5GHz reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
 7. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/GSM1900, WCDMA band II/IV/V, CDMA BC0/BC1/BC10, LTE band 2/4/5/7/25/26/38/41/66 and WLAN5.2GHz/5.8GHz.
 8. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900, WCDMA band II/IV, LTE band 2/4/5/7/25/38/41/66, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
 9. P-sensor can detect handheld state, WCDMA band II/IV, CDMA BC1 and LTE band 2/4/7/25/38/41/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.
 10. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, CDMA BC0/BC1/BC10, and LTE Band 2/4/5/12/13/17/25/26/66, WWAN antenna 2 frequency bands include LTE Band 7/38/41.

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	IHDT56YD3																																																																									
Equipment Name	Mobile Cellular Phone																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																																									
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM																																																																									
LTE Voice / Data requirements	Voice and Data																																																																									
LTE Release Version	R12, Cat6																																																																									
CA Support	Supported, Downlink only																																																																									
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>				Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
Power reduction applied to satisfy SAR compliance	Yes 1. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 2/4/5/7/25/26/38/41/66 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) 2. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/5/7/25/26/38/41/66. 3. P-sensor can detect handheld state, for front/back/bottom sides of product specific 10g SAR condition LTE band 2/4/7/25/38/41/66 reduced powers will be active.																																																																									
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																																									
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																									


Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5	
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23790		710	
M	23790		710		23790		710		23800		711	
H	23825		713.5		23800		711					

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	838.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37875	2582.5	37900	2585
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38125	2607.5	38100	2605
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39775	2508.5	39800	2511
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40197	2550.7	40210	2552
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41042	2635.2	41030	2634
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41465	2677.5	41440	2675
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5825MHz) and lowest (850MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM850/GSM1900, WCDMA band II/IV/V, CDMA BC0/BC1/BC10, LTE band 2/4/5/7/25/26/38/41/66 and WLAN5GHz reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front or back side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. P-sensor can detect handheld state, WCDMA band II/IV, CDMA BC1 and LTE band 2/4/7/25/38/41/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.

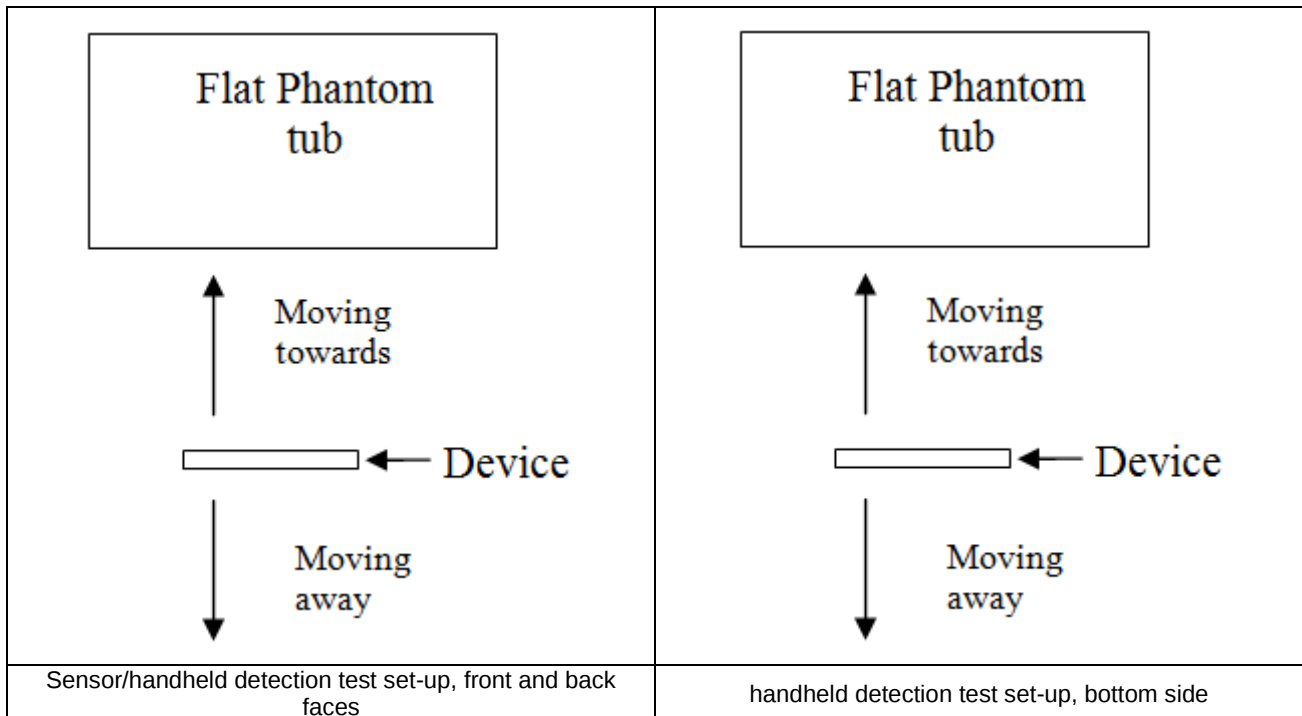

<P-Sensor>


Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	18	18	22

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GSM850 GPRS 3Tx slots	30	27	3
GSM1900 GPRS 3Tx slots	27	26	1
WCDMA Band II	24	19.5	4.5
WCDMA Band IV	24	20	4
WCDMA Band V	24	20.5	3.5
CDMA BC0	25	22	3
CDMA BC10	25	23	2
CDMA BC1	25	20.5	4.5
LTE Band2&25	24	20	4
LTE Band4&66	24	19.5	4.5
LTE Band5&26	24	21.5	2.5
LTE Band7	24	20	4
LTE Band38&41	24	22	2
WLAN5.2GHz	19.5	17.5	2
WLAN5.3GHz	19.5	17.5	2
WLAN5.5GHz	19.5	17.5	2
WLAN5.8GHz	18.5	16.5	2




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)


	Front																							
Distance	50	47	44	41	38	35	32	29	26	23	22	21	20	19	18	17	16	15	14	11	8	5	2	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	27	27	27	27	27	27	27	27
GSM1900 GPRS 3Tx slots	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	26	26	26	26	26	26	26	26
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
CDMA BC0	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22	22	22	22	22	22	22	22
CDMA BC10	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	23	23	23	23	23	23	23	23
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band5&26	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22	22
WLAN5.2GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.3GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.5GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.8GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5

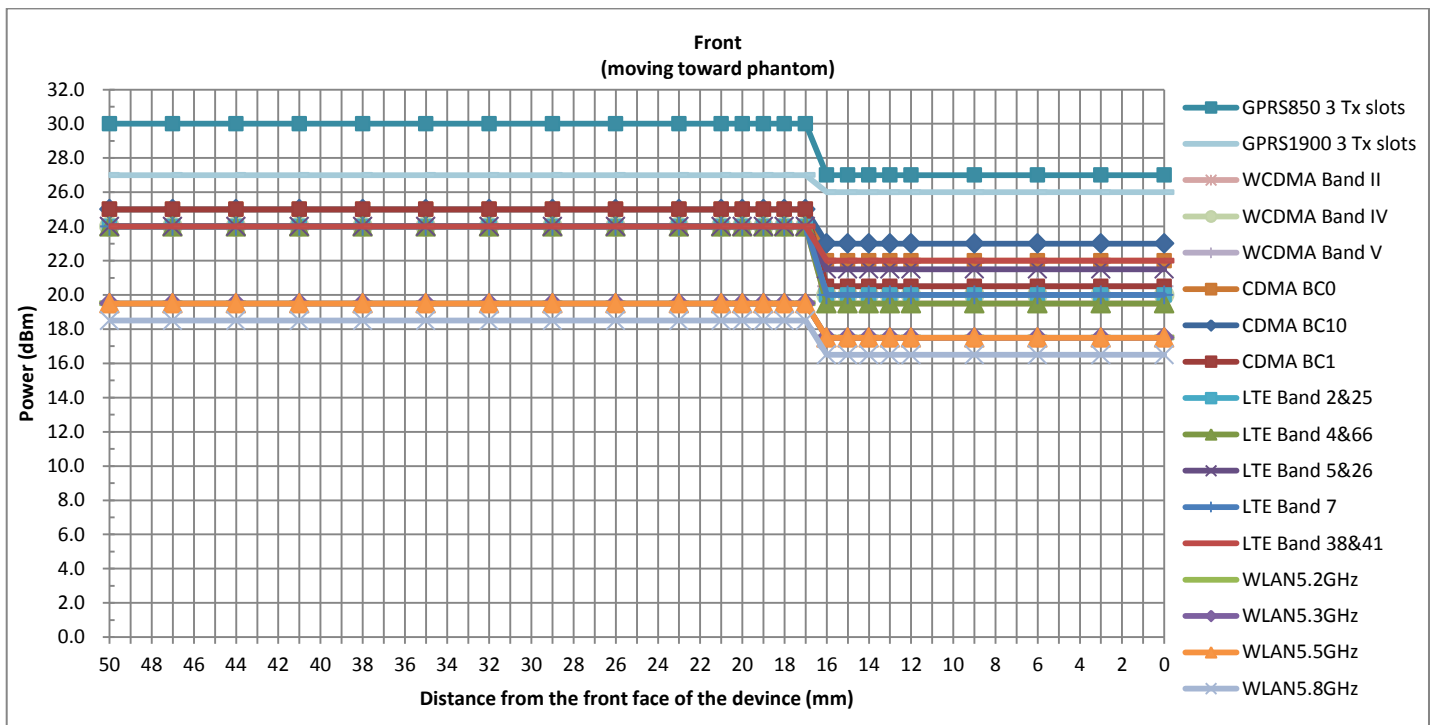

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	25	24	23	22	21	20	19	18	17	15	12	9	6	3	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	27	27	27	27	27	27	27	27
GSM1900 GPRS 3Tx slots	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	26	26	26	26	26	26	26	26
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
CDMA BC0	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22	22	22	22	22	22	22	22
CDMA BC10	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	23	23	23	23	23	23	23	23
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Bands&26	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22	22
WLAN5.2GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.3GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.5GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.8GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5

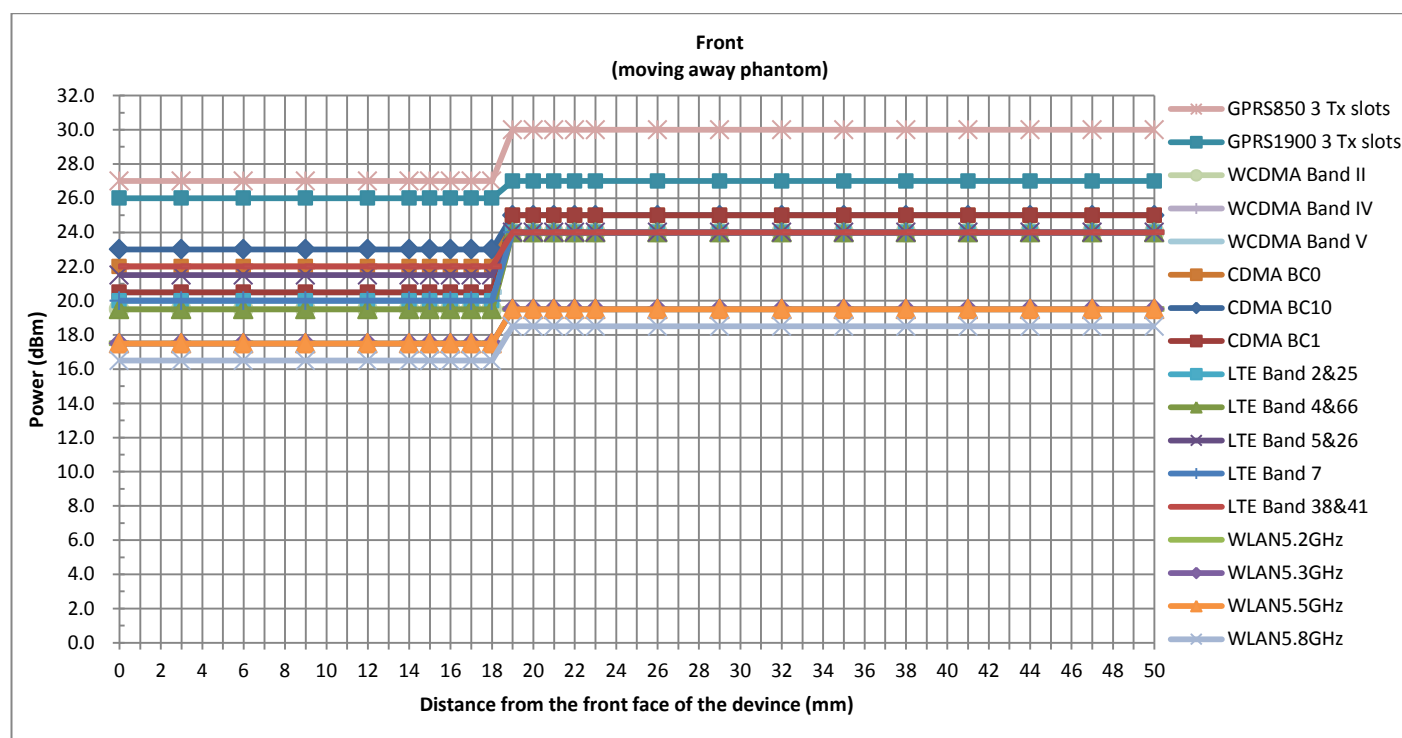


Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Back																								
Distance	50	47	44	41	38	35	32	29	27	26	25	24	23	22	21	20	19	18	15	12	9	6	3	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	27	27	27	27	27	27	27
GSM1900 GPRS 3Tx slots	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	26	26	26	26	26	26	26
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
CDMA BC0	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22	22	22	22	22	22	22
CDMA BC10	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	23	23	23	23	23	23	23
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band5&26	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22
WLAN5.2GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.3GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.5GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.8GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5

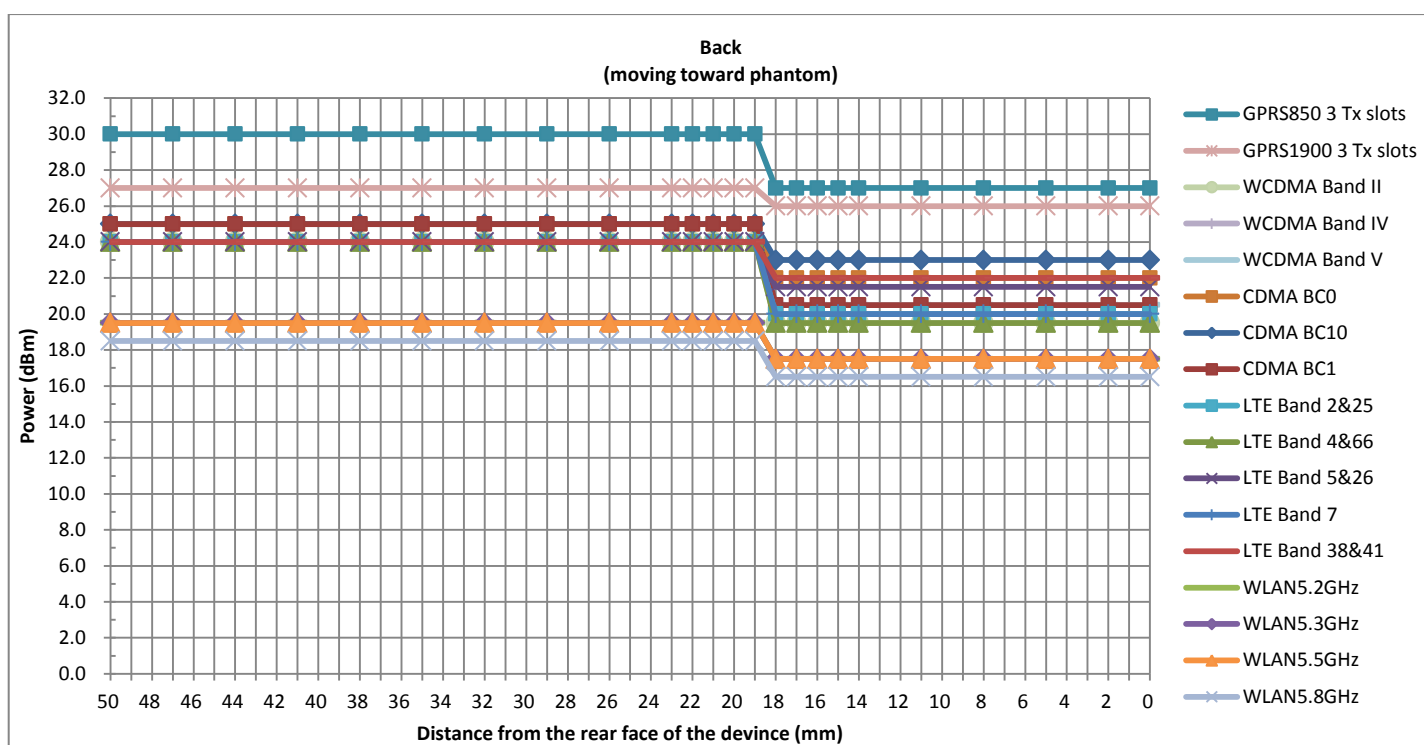

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	49	46	43	40	37	34	31	30	29	28	27	26	25	24	23	22	21	18	15	12	9	6	3	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	27	27	27	27	27	27	27	27	27
GSM1900 GPRS 3Tx slots	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	26	26	26	26	26	26	26	26	26
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20	20
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
CDMA BC0	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22	22	22	22	22	22	22	22	22
CDMA BC10	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	23	23	23	23	23	23	23	23	23
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20	20
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band5&26	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22	22	22
WLAN5.2GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.3GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.5GHz	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
WLAN5.8GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5

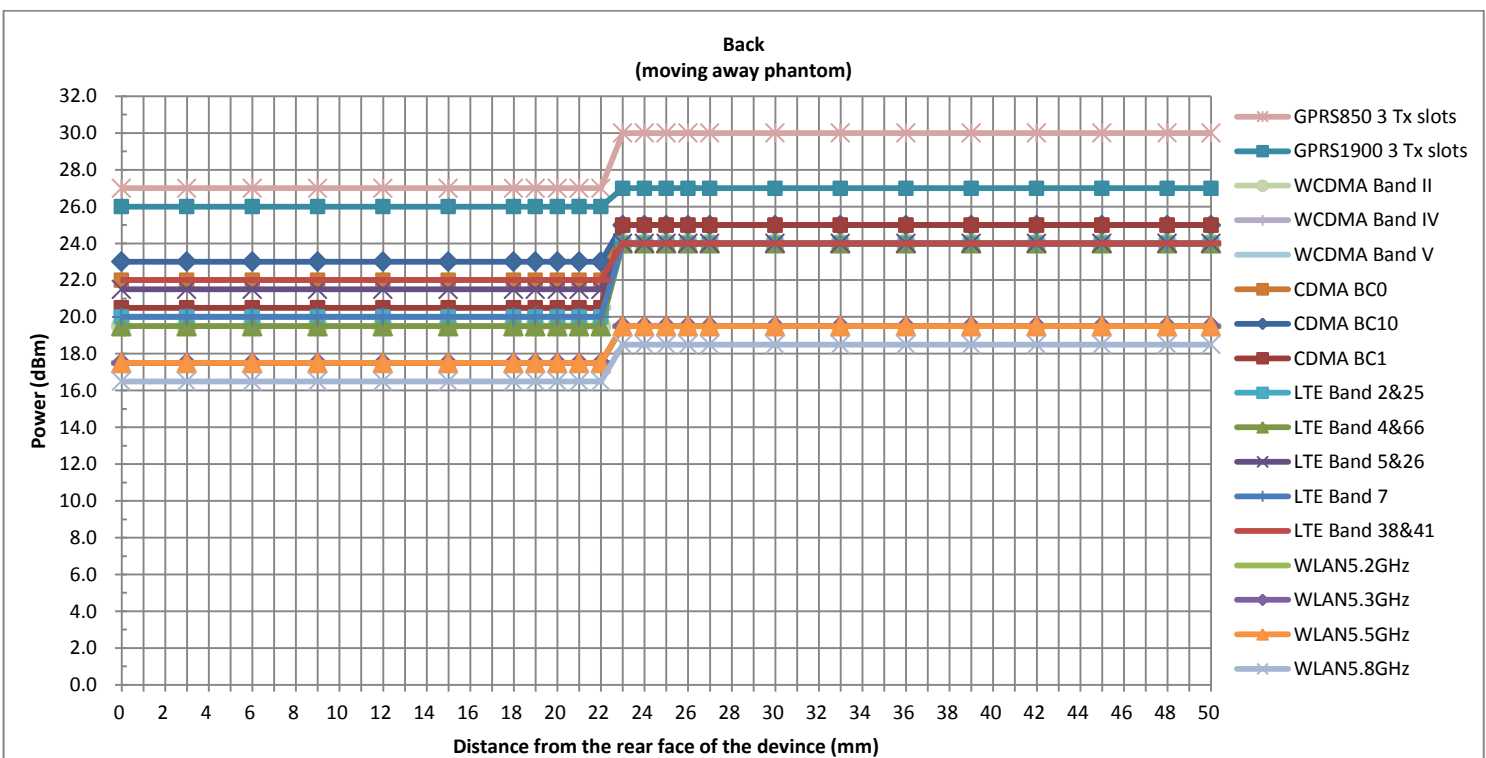


<Handheld>


Handheld Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	12	8	11	12	14

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
WCDMA Band II	24	21	3
WCDMA Band IV	24	21	3
CDMA BC1	25	22.5	2.5
LTE Band2&25	24	21	3
LTE Band4&66	24	21.5	2.5
LTE Band7	24	20	4
LTE Band38&41	24	22.5	1.5


Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Front																									
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	4	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

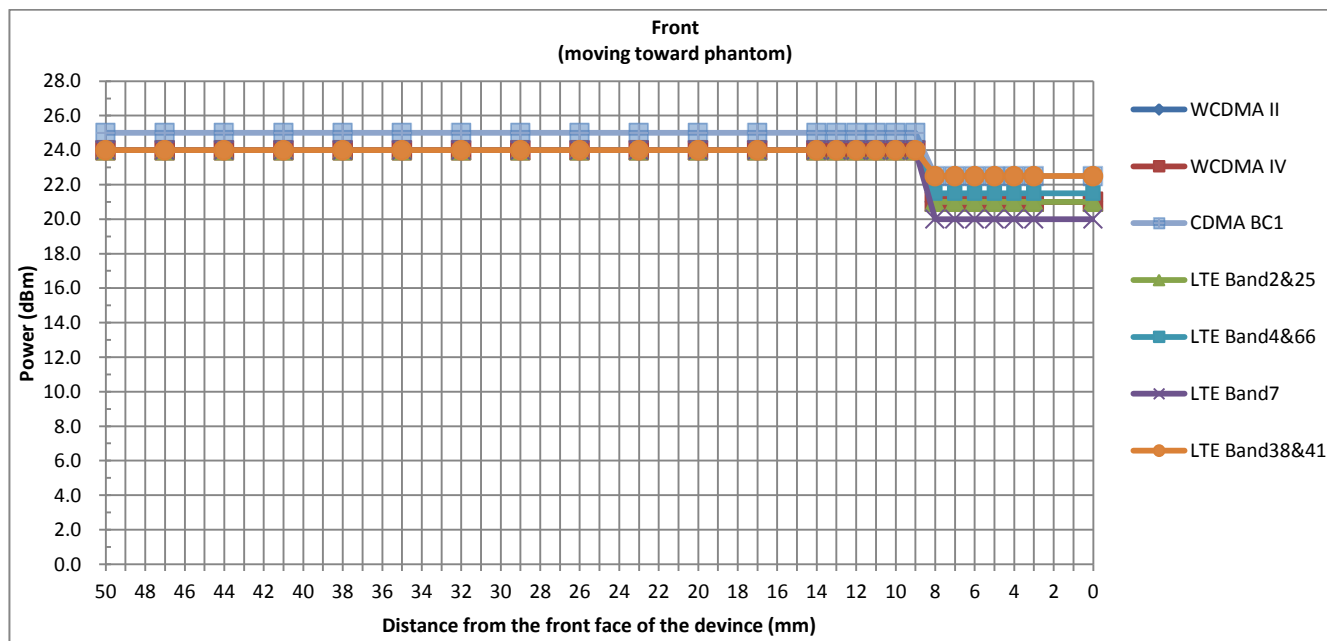


Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	16	15	14	13	12	11	10	9	8	6	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

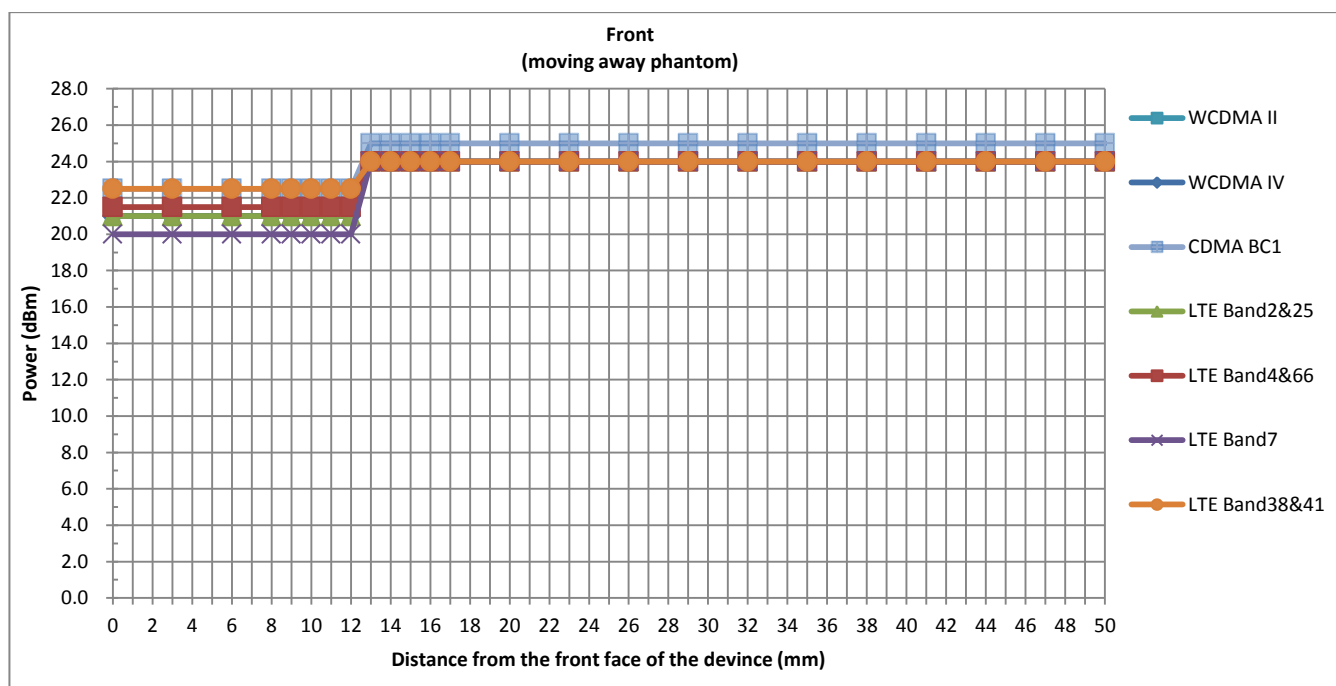


Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Back																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	15	14	13	12	11	10	9	8	7	6	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5

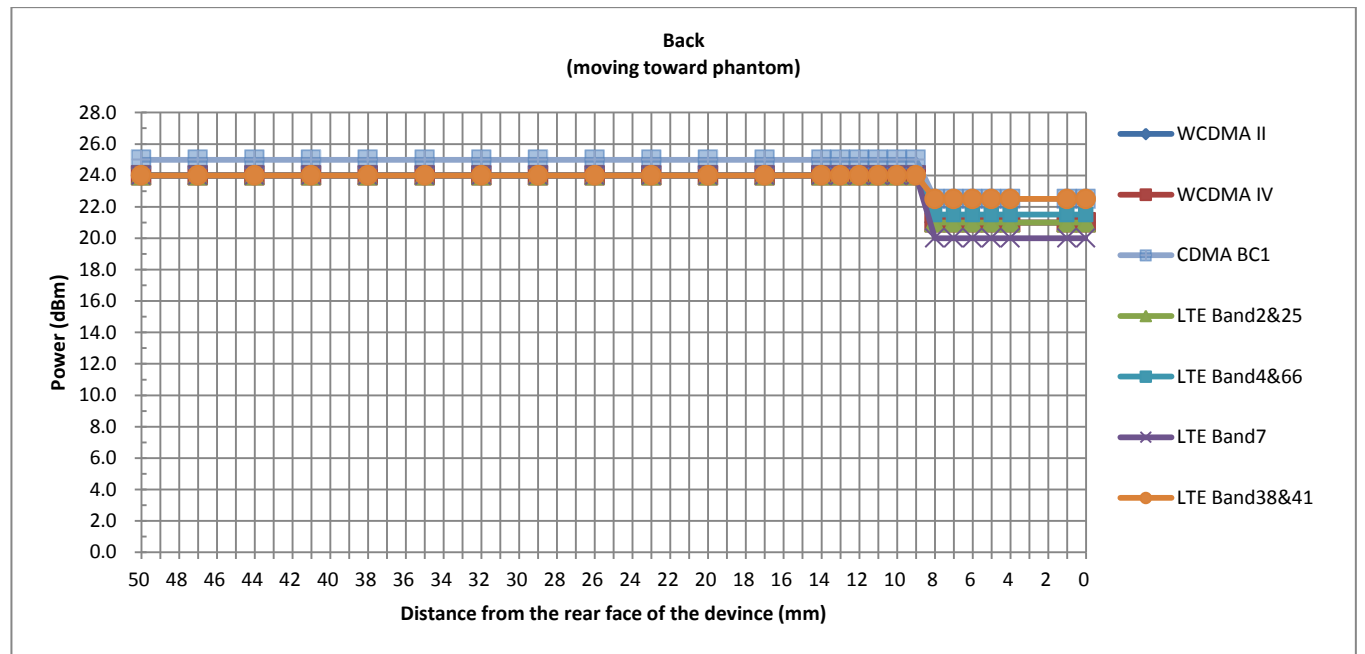


Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Back																								
Distance	50	48	45	42	39	36	33	30	27	24	21	18	17	16	15	14	13	12	11	10	9	6	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5

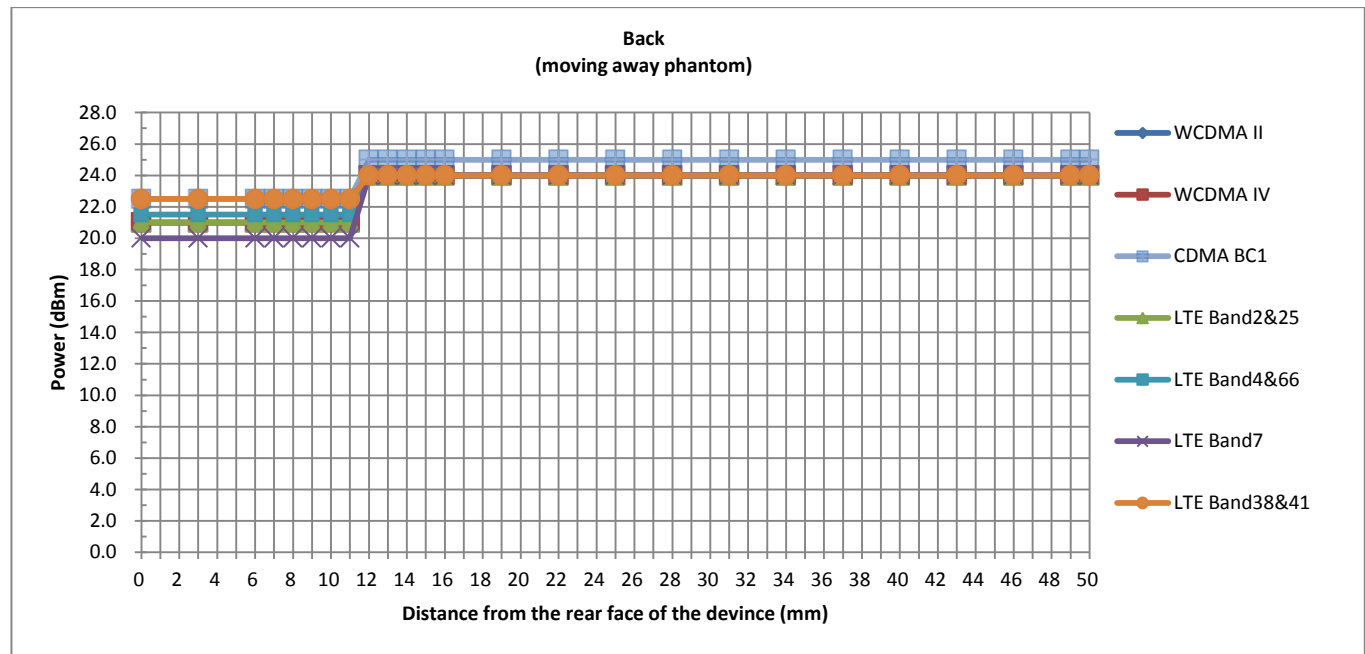

Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	2	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20	20	20
LTE Band38&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

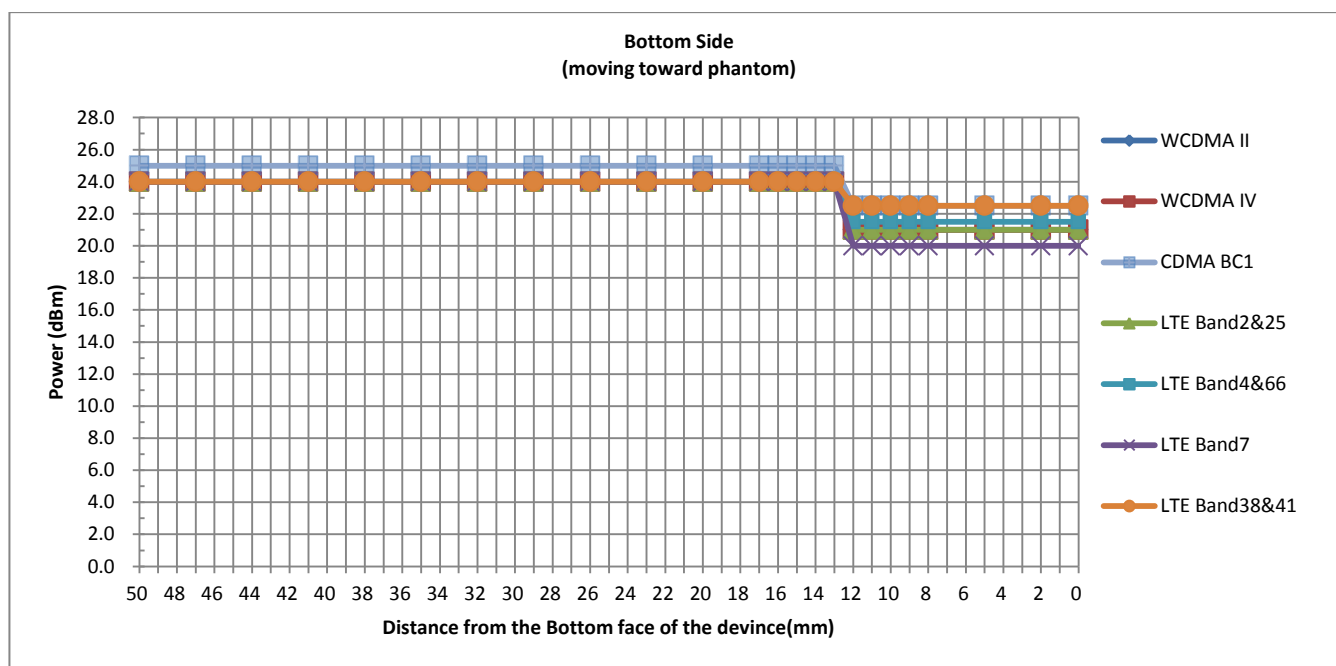

Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Bottom Side																									
Distance	50	49	46	43	40	37	34	31	28	25	22	19	16	15	14	13	12	11	10	9	8	7	6	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21
CDMA BC1	25	25	25	25	25	25	25	25	25	25	25	25	25	25	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band2&25	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21	21	21	21
LTE Band4&66	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20	20	20	20
LTE Band3&8&41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

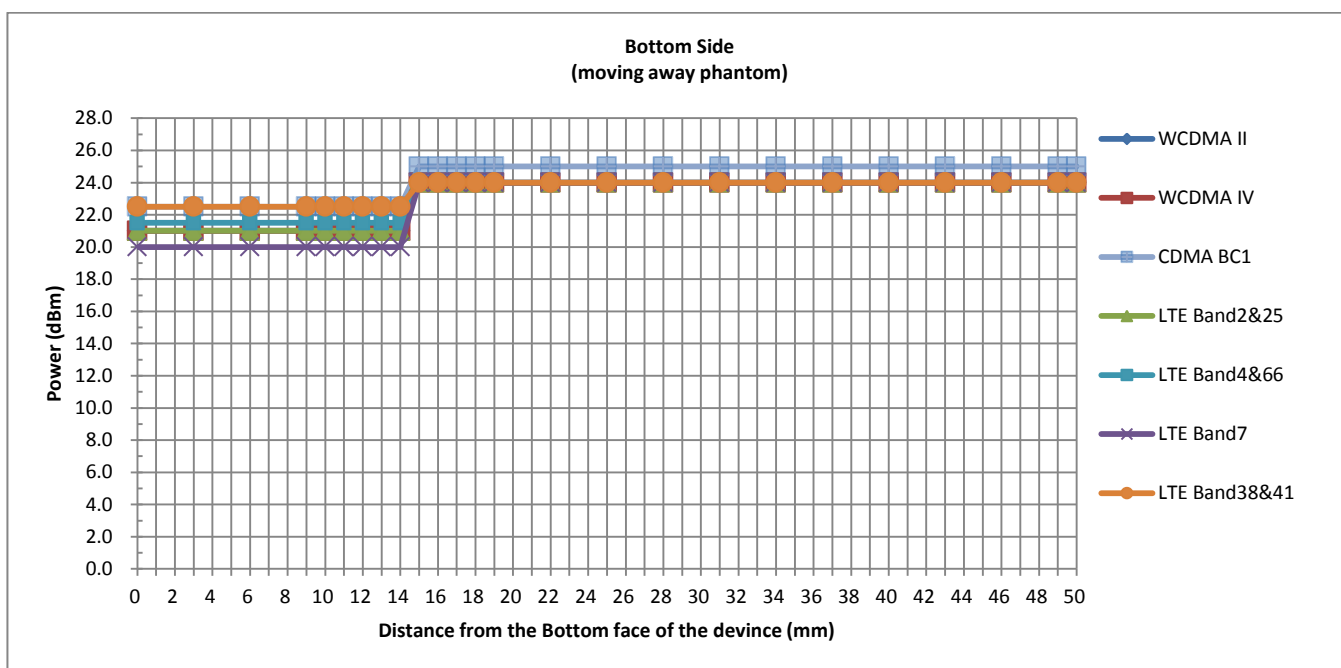

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

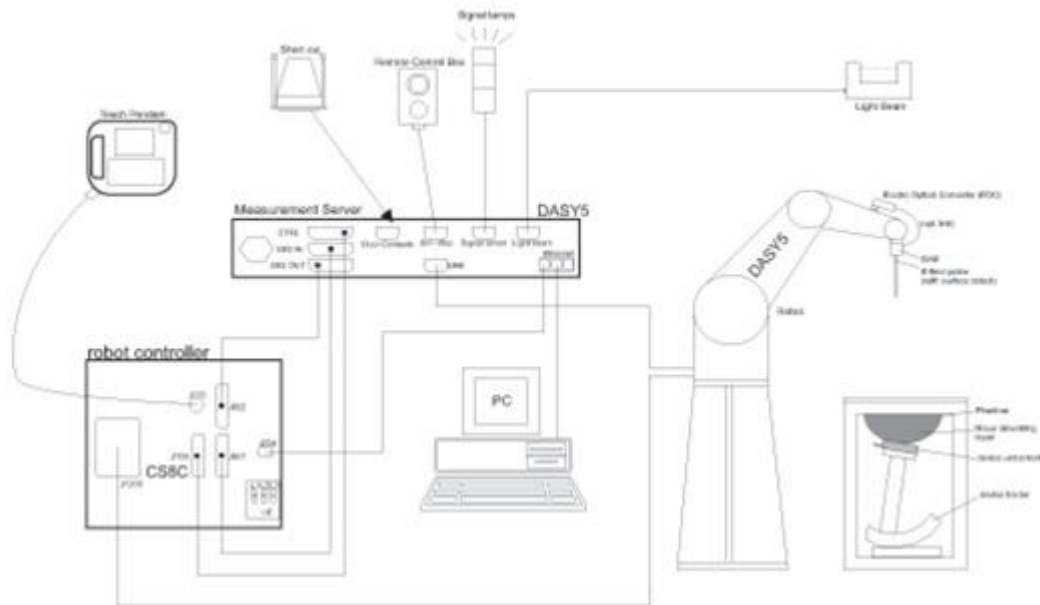

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1358	2019/4/17	2020/4/16
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2019/4/25	2020/4/24
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/7	2020/8/6
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

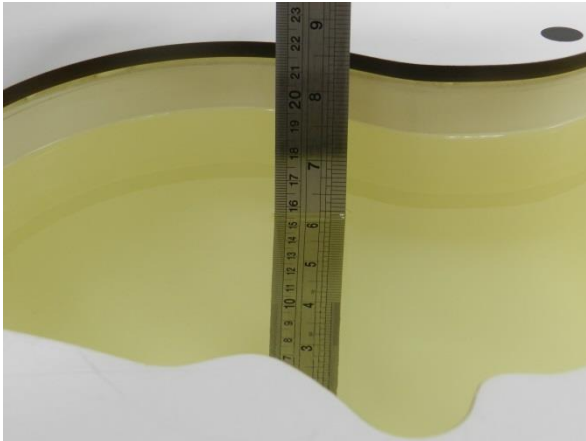


Fig 11.1 Photo of Liquid Height for Head SAR

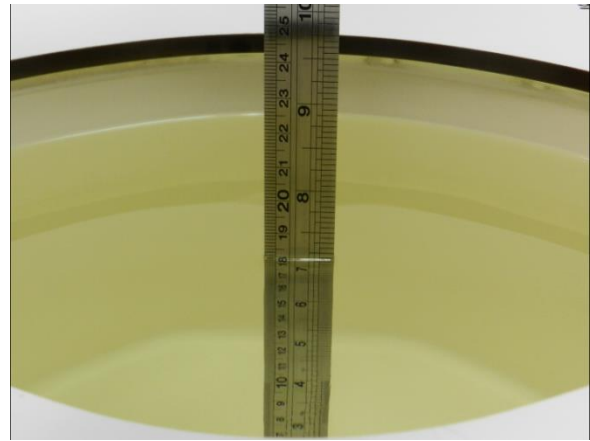


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.901	42.19	0.89	41.90	1.24	0.69	±5	2019/7/26
835	Head	22.9	0.902	41.842	0.90	41.50	0.22	0.82	±5	2019/8/17
1750	Head	22.7	1.413	39.149	1.37	40.10	3.14	-2.37	±5	2019/7/28
1900	Head	22.7	1.38	38.83	1.40	40.00	-1.43	-2.93	±5	2019/7/31
2450	Head	22.8	1.831	39.866	1.80	39.20	1.72	1.70	±5	2019/8/10
2600	Head	22.7	2.039	39.682	1.96	39.00	4.03	1.75	±5	2019/7/25
5250	Head	22.6	4.554	34.762	4.71	35.90	-3.31	-3.17	±5	2019/8/15
5600	Head	22.7	4.895	34.287	5.07	35.50	-3.45	-3.42	±5	2019/8/19
5750	Head	22.7	5.048	34.058	5.22	35.40	-3.30	-3.79	±5	2019/8/19

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/7/26	750	Head	250	1087	3279	1358	2.03	8.36	8.12	-2.87
2019/8/17	835	Head	250	4d151	3279	1358	2.38	9.30	9.52	2.37
2019/7/28	1750	Head	250	1090	3279	1358	9.72	36.40	38.88	6.81
2019/7/31	1900	Head	250	5d170	3279	1358	9.03	39.00	36.12	-7.38
2019/8/10	2450	Head	250	908	3279	1358	14.1	52.80	56.4	6.82
2019/7/25	2600	Head	250	1061	3954	1358	14.2	57.70	56.8	-1.56
2019/8/15	5250	Head	100	1006	3954	1358	8.50	80.70	85	5.33
2019/8/19	5600	Head	100	1006	3954	1358	7.88	83.30	78.8	-5.40
2019/8/19	5750	Head	100	1006	3954	1358	7.68	80.40	76.8	-4.48

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/8/17	835	Head	250	4d151	3279	1358	1.6	6.16	6.4	3.90
2019/7/28	1750	Head	250	1090	3279	1358	5.17	19.20	20.68	7.71
2019/7/31	1900	Head	250	5d170	3279	1358	4.79	20.30	19.16	-5.62
2019/7/25	2600	Head	250	1061	3954	1358	6.18	25.90	24.72	-4.56
2019/8/15	5250	Head	100	1006	3954	1358	2.42	23.20	24.2	4.31
2019/8/19	5600	Head	100	1006	3954	1358	2.27	23.80	22.7	-4.62

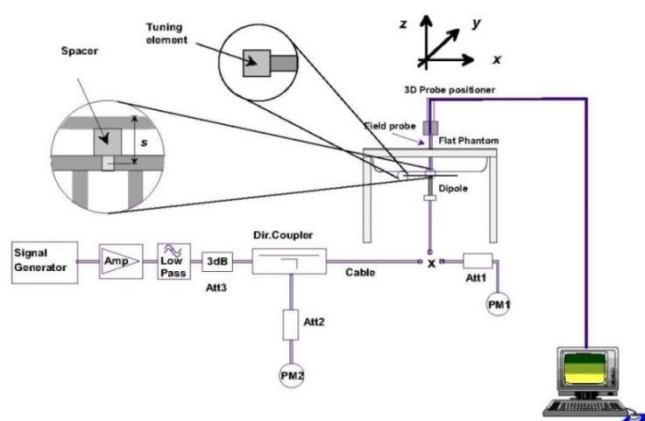


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

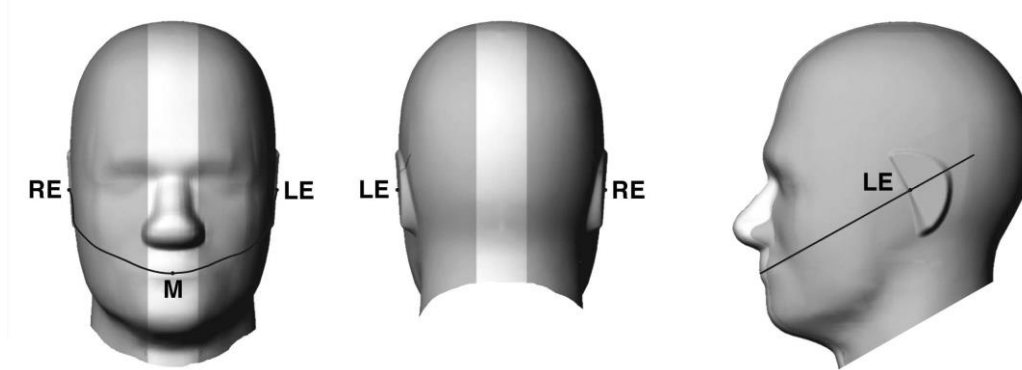


Fig 12.1.1 Front, back, and side views of SAM twin phantom

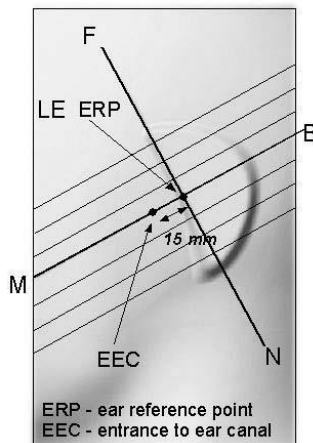


Fig 12.1.2 Close-up side view of phantom showing the ear region.

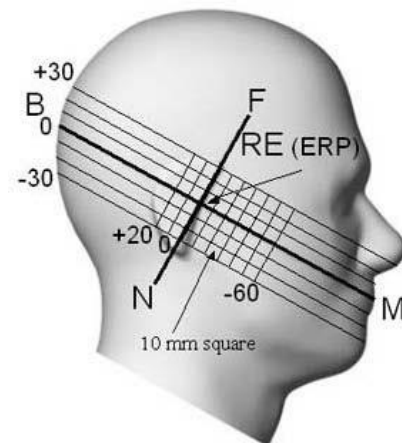


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

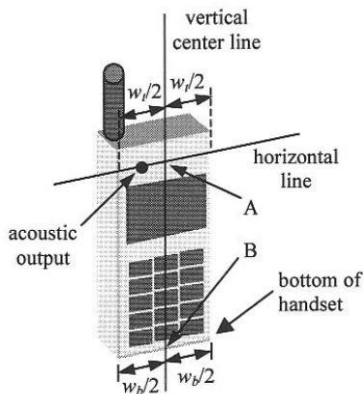


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

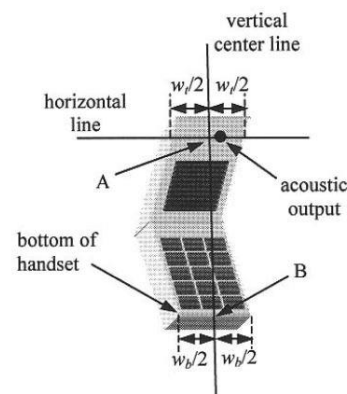


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

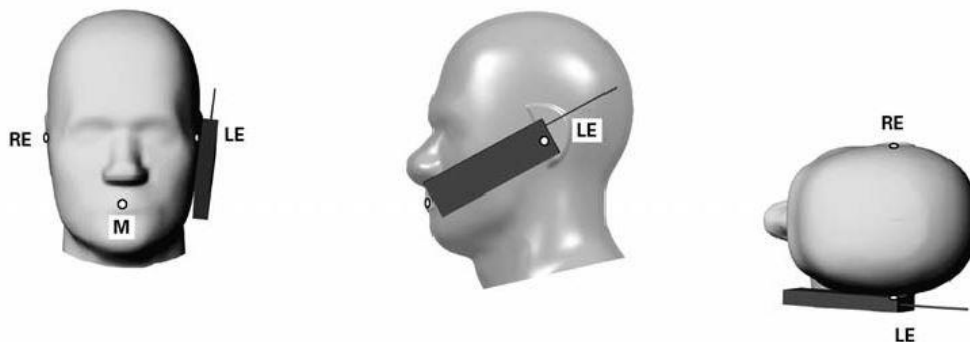


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

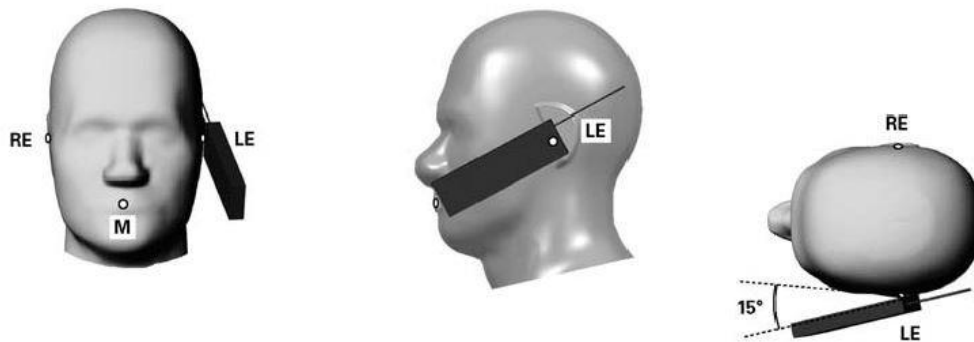


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

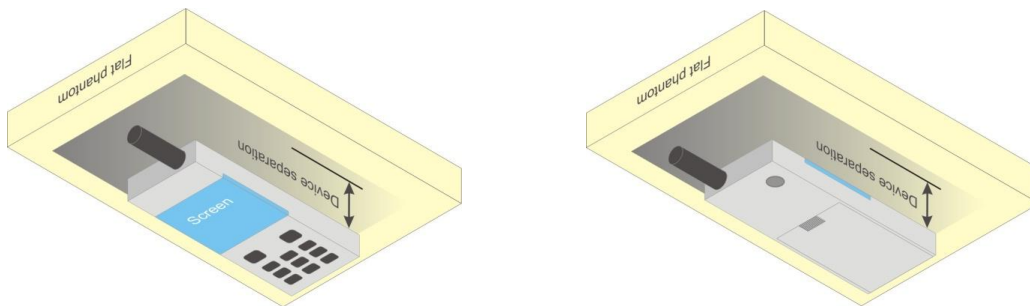


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
4. Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM850/1900 band, for SAR testing EUT was set in reduced power mode and GPRS 3 Tx slots due to its highest frame-average power.

<Full Power Mode>

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		31.83	31.85	31.90	33.50	22.83	22.85	22.90	24.50
GPRS 1 Tx slot		31.81	31.84	31.88	33.50	22.81	22.84	22.88	24.50
GPRS 2 Tx slots		29.86	29.90	30.11	31.00	23.86	23.90	24.11	25.00
GPRS 3 Tx slots		28.63	28.81	29.06	30.00	24.37	24.55	24.80	25.74
GPRS 4 Tx slots		26.65	26.78	27.07	28.00	23.65	23.78	24.07	25.00
EDGE 1 Tx slot		26.21	26.34	26.51	28.00	17.21	17.34	17.51	19.00
EDGE 2 Tx slots		24.55	24.56	24.69	26.50	18.55	18.56	18.69	20.50
EDGE 3 Tx slots		22.16	22.32	22.42	24.00	17.90	18.06	18.16	19.74
EDGE 4 Tx slots		20.18	20.32	20.37	22.00	17.18	17.32	17.37	19.00
GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		29.28	29.34	29.46	30.50	20.28	20.34	20.46	21.50
GPRS 1 Tx slot		29.20	29.23	29.39	30.50	20.20	20.23	20.39	21.50
GPRS 2 Tx slots		26.96	26.78	27.22	28.00	20.96	20.78	21.22	22.00
GPRS 3 Tx slots		26.01	26.07	26.51	27.00	21.75	21.81	22.25	22.74
GPRS 4 Tx slots		24.65	24.22	24.47	25.00	21.65	21.22	21.47	22.00
EDGE 1 Tx slot		25.63	25.67	25.92	27.00	16.63	16.67	16.92	18.00
EDGE 2 Tx slots		24.13	24.20	24.52	26.00	18.13	18.20	18.52	20.00
EDGE 3 Tx slots		23.10	23.14	23.33	24.00	18.84	18.88	19.07	19.74
EDGE 4 Tx slots		21.95	22.02	22.33	23.00	18.95	19.02	19.33	20.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	29.01	29.20	29.31	30.50	20.01	20.20	20.31	21.50
GPRS 1 Tx slot	29.03	29.18	29.28	30.50	20.03	20.18	20.28	21.50
GPRS 2 Tx slots	26.94	27.14	27.17	28.00	20.94	21.14	21.17	22.00
GPRS 3 Tx slots	25.51	25.71	25.77	27.00	21.25	21.45	21.51	22.74
GPRS 4 Tx slots	23.54	23.69	23.82	25.00	20.54	20.69	20.82	22.00
EDGE 1 Tx slot	23.71	23.98	24.03	25.00	14.71	14.98	15.03	16.00
EDGE 2 Tx slots	21.53	21.72	21.95	23.50	15.53	15.72	15.95	17.50
EDGE 3 Tx slots	19.43	19.73	19.66	21.00	15.17	15.47	15.40	16.74
EDGE 4 Tx slots	17.31	17.67	17.58	19.00	14.31	14.67	14.58	16.00
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	27.88	27.65	28.04	29.50	18.88	18.65	19.04	20.50
GPRS 1 Tx slot	27.86	27.63	28.02	29.50	18.86	18.63	19.02	20.50
GPRS 2 Tx slots	25.52	25.53	25.94	27.00	19.52	19.53	19.94	21.00
GPRS 3 Tx slots	24.56	24.52	24.83	26.00	20.30	20.26	20.57	21.74
GPRS 4 Tx slots	22.46	22.66	22.94	24.00	19.46	19.66	19.94	21.00
EDGE 1 Tx slot	24.10	24.21	24.45	26.00	15.10	15.21	15.45	17.00
EDGE 2 Tx slots	23.09	23.12	23.23	25.00	17.09	17.12	17.23	19.00
EDGE 3 Tx slots	21.41	21.73	21.72	23.00	17.15	17.47	17.46	18.74
EDGE 4 Tx slots	20.25	20.30	20.59	22.00	17.25	17.30	17.59	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Hotspot On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	29.01	29.20	29.31	30.50	20.01	20.20	20.31	21.50
GPRS 1 Tx slot	29.03	29.18	29.28	30.50	20.03	20.18	20.28	21.50
GPRS 2 Tx slots	26.94	27.14	27.17	28.00	20.94	21.14	21.17	22.00
GPRS 3 Tx slots	25.51	25.71	25.77	27.00	21.25	21.45	21.51	22.74
GPRS 4 Tx slots	23.54	23.69	23.82	25.00	20.54	20.69	20.82	22.00
EDGE 1 Tx slot	23.71	23.98	24.03	25.00	14.71	14.98	15.03	16.00
EDGE 2 Tx slots	21.53	21.72	21.95	23.50	15.53	15.72	15.95	17.50
EDGE 3 Tx slots	19.43	19.73	19.66	21.00	15.17	15.47	15.40	16.74
EDGE 4 Tx slots	17.31	17.67	17.58	19.00	14.31	14.67	14.58	16.00
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	25.58	25.81	26.01	27.50	16.58	16.81	17.01	18.50
GPRS 1 Tx slot	25.55	25.79	26.00	27.50	16.55	16.79	17.00	18.50
GPRS 2 Tx slots	23.89	24.34	24.09	25.00	17.89	18.34	18.09	19.00
GPRS 3 Tx slots	22.76	22.77	23.21	24.00	18.50	18.51	18.95	19.74
GPRS 4 Tx slots	20.61	20.59	21.06	22.00	17.61	17.59	18.06	19.00
EDGE 1 Tx slot	22.82	22.89	23.24	24.00	13.82	13.89	14.24	15.00
EDGE 2 Tx slots	21.13	21.53	21.26	23.00	15.13	15.53	15.26	17.00
EDGE 3 Tx slots	20.03	20.02	20.43	21.00	15.77	15.76	16.17	16.74
EDGE 4 Tx slots	18.83	18.90	19.23	20.00	15.83	15.90	16.23	17.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

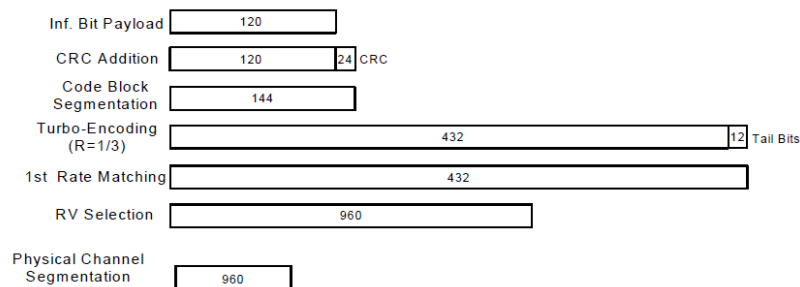


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

<Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.50	22.52	22.55	24.00	22.51	22.43	22.51	24.00	22.30	22.45	22.54	24.00
3GPP Rel 99	RMC 12.2Kbps	22.52	22.53	22.57	24.00	22.53	22.45	22.52	24.00	22.31	22.46	22.56	24.00
3GPP Rel 6	HSDPA Subtest-1	22.53	22.46	22.49	24.00	22.43	22.43	22.48	24.00	22.33	22.53	22.42	24.00
3GPP Rel 6	HSDPA Subtest-2	22.55	22.42	22.48	24.00	22.44	22.36	22.39	24.00	22.09	22.15	22.13	24.00
3GPP Rel 6	HSDPA Subtest-3	21.86	21.82	21.86	23.50	21.78	21.82	21.79	23.50	21.87	22.21	22.18	23.50
3GPP Rel 6	HSDPA Subtest-4	21.86	21.84	21.83	23.50	21.77	21.80	21.81	23.50	21.89	21.69	21.61	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.52	22.53	22.54	24.00	22.50	22.47	22.46	24.00	22.30	22.45	22.52	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.47	22.48	22.48	24.00	22.45	22.43	22.51	24.00	22.09	22.34	22.46	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.83	21.80	21.82	23.50	21.75	21.78	21.75	23.50	21.83	22.18	22.13	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.81	21.79	21.80	23.50	21.74	21.75	21.79	23.50	21.61	21.60	21.62	23.50
3GPP Rel 6	HSUPA Subtest-1	22.21	22.23	22.26	24.00	22.15	22.18	22.17	24.00	22.10	22.14	22.21	24.00
3GPP Rel 6	HSUPA Subtest-2	20.09	20.11	20.04	22.00	20.10	20.07	20.04	22.00	20.10	20.22	20.32	22.00
3GPP Rel 6	HSUPA Subtest-3	21.84	21.79	21.76	23.00	21.66	21.75	21.72	23.00	21.13	21.15	21.23	23.00
3GPP Rel 6	HSUPA Subtest-4	20.13	20.10	20.07	22.00	20.06	20.06	20.02	22.00	20.15	20.25	20.30	22.00
3GPP Rel 6	HSUPA Subtest-5	22.51	22.53	22.46	24.00	22.46	22.37	22.49	24.00	22.25	22.20	22.43	24.00

<Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	18.39	18.38	18.34	19.50	18.42	18.45	18.50	20.00	19.10	19.30	19.33	20.50
3GPP Rel 99	RMC 12.2Kbps	18.40	18.39	18.36	19.50	18.55	18.47	18.52	20.00	19.12	19.32	19.34	20.50
3GPP Rel 6	HSDPA Subtest-1	18.22	18.12	18.25	19.50	18.29	18.39	18.24	20.00	18.72	18.97	18.91	20.50
3GPP Rel 6	HSDPA Subtest-2	18.22	18.13	18.28	19.50	18.21	18.34	18.33	20.00	18.59	18.91	18.92	20.50
3GPP Rel 6	HSDPA Subtest-3	17.76	17.54	17.55	19.00	17.56	17.78	17.61	19.50	18.33	18.81	18.56	20.00
3GPP Rel 6	HSDPA Subtest-4	17.76	17.52	17.62	19.00	17.52	17.88	17.66	19.50	18.31	18.19	18.23	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	18.24	18.21	18.32	19.50	18.39	18.23	18.22	20.00	18.62	18.67	18.92	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	18.11	18.15	18.31	19.50	18.38	18.19	18.21	20.00	18.66	18.91	18.89	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	17.52	17.44	17.69	19.00	17.56	17.77	17.56	19.50	18.31	18.77	18.66	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	17.36	17.43	17.66	19.00	17.79	17.67	17.52	19.50	18.12	18.32	18.23	20.00
3GPP Rel 6	HSUPA Subtest-1	17.95	17.91	18.01	19.50	18.11	18.21	18.12	20.00	18.29	18.61	18.41	20.50
3GPP Rel 6	HSUPA Subtest-2	15.81	15.82	15.77	17.50	16.11	16.29	16.29	18.00	16.52	16.79	16.67	18.50
3GPP Rel 6	HSUPA Subtest-3	17.58	17.42	17.52	18.50	17.29	17.57	17.39	19.00	17.29	17.51	17.49	19.50
3GPP Rel 6	HSUPA Subtest-4	15.72	15.73	15.82	17.50	16.33	16.49	16.21	18.00	16.31	16.77	16.72	18.50
3GPP Rel 6	HSUPA Subtest-5	18.22	18.21	18.29	19.50	18.29	18.22	18.22	20.00	18.39	18.41	18.51	20.50

<Reduced Power Mode for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	17.33	17.01	17.31	18.00	16.10	16.00	16.03	17.50	19.10	19.30	19.40	20.50
3GPP Rel 99	RMC 12.2Kbps	17.34	17.02	17.33	18.00	16.12	16.03	16.06	17.50	19.12	19.32	19.43	20.50
3GPP Rel 6	HSDPA Subtest-1	16.81	16.89	16.80	18.00	16.03	16.07	16.03	17.50	19.02	19.21	19.29	20.50
3GPP Rel 6	HSDPA Subtest-2	16.90	16.94	16.99	18.00	16.01	16.00	16.02	17.50	19.08	19.20	19.30	20.50
3GPP Rel 6	HSDPA Subtest-3	16.86	16.63	16.76	17.50	16.03	16.09	15.99	17.00	18.98	19.05	19.00	20.00
3GPP Rel 6	HSDPA Subtest-4	16.78	16.59	16.90	17.50	16.05	16.01	15.98	17.00	18.89	18.64	18.62	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.79	16.84	16.77	18.00	16.00	16.02	15.97	17.50	18.99	19.16	19.25	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	16.88	16.89	16.96	18.00	15.98	15.95	15.96	17.50	19.05	19.15	19.26	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	16.84	16.88	16.73	17.50	16.00	16.04	15.93	17.00	18.95	19.00	18.96	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.76	16.94	16.87	17.50	16.02	15.96	15.92	17.00	18.86	18.79	18.78	20.00
3GPP Rel 6	HSUPA Subtest-1	16.54	16.60	16.50	18.00	15.80	15.85	15.65	17.50	18.60	18.65	18.60	20.50
3GPP Rel 6	HSUPA Subtest-2	14.90	14.95	14.85	16.00	14.01	14.08	13.89	15.50	16.78	16.87	16.95	18.50
3GPP Rel 6	HSUPA Subtest-3	16.72	16.70	16.60	17.00	15.65	15.86	15.76	16.50	17.89	17.92	17.76	19.50
3GPP Rel 6	HSUPA Subtest-4	14.89	14.99	14.82	16.00	13.99	14.01	13.80	15.50	16.70	16.78	16.58	18.50
3GPP Rel 6	HSUPA Subtest-5	16.68	16.71	16.62	18.00	15.66	15.76	15.62	17.50	18.68	18.75	18.65	20.50

<Reduced Power Mode for Handheld On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	20.01	19.84	20.00	21.00	19.60	19.43	19.52	21.00
3GPP Rel 99	RMC 12.2Kbps	20.04	19.88	20.05	21.00	19.63	19.49	19.56	21.00
3GPP Rel 6	HSDPA Subtest-1	19.79	19.85	19.98	21.00	19.54	19.40	19.52	21.00
3GPP Rel 6	HSDPA Subtest-2	19.82	19.97	19.91	21.00	19.60	19.30	19.49	21.00
3GPP Rel 6	HSDPA Subtest-3	19.35	19.36	19.49	20.50	19.03	19.03	19.04	20.50
3GPP Rel 6	HSDPA Subtest-4	19.33	19.22	19.42	20.50	19.02	19.04	19.03	20.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.75	19.80	19.92	21.00	19.49	19.35	19.50	21.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.76	19.92	19.95	21.00	19.55	19.39	19.42	21.00
3GPP Rel 8	DC-HSDPA Subtest-3	19.32	19.21	19.38	20.50	19.08	19.07	19.08	20.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.38	19.19	19.36	20.50	19.07	19.09	19.01	20.50
3GPP Rel 6	HSUPA Subtest-1	19.59	19.44	19.39	21.00	19.39	19.39	19.36	21.00
3GPP Rel 6	HSUPA Subtest-2	17.43	17.32	17.33	19.00	17.21	17.11	17.11	19.00
3GPP Rel 6	HSUPA Subtest-3	19.10	19.01	18.93	20.00	18.82	18.77	18.77	20.00
3GPP Rel 6	HSUPA Subtest-4	17.32	17.21	17.21	19.00	17.29	17.21	17.02	19.00
3GPP Rel 6	HSUPA Subtest-5	19.77	19.73	19.69	21.00	19.55	19.33	19.52	21.00

<CDMA2000 Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<Full Power Mode>

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
Tx Channel	1013	384	777		25	600	1175	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	23.87	23.76	23.58	25.00	24.12	24.04	23.92	25.00
RC3 SO55	23.88	23.77	23.58	25.00	24.13	24.06	23.94	25.00
RC3 SO32 (F+SCH)	23.88	23.73	23.58	25.00	24.12	24.07	23.89	25.00
RC3 SO32 (+SCH)	23.86	23.70	23.56	25.00	24.11	24.05	23.90	25.00
RTAP 153.6Kbps	23.82	23.75	23.57	25.00	24.13	24.03	23.91	25.00
RETAP 4096Bits	23.83	23.72	23.55	25.00	24.12	24.06	23.90	25.00

Band	CDMA2000 BC10			Tune-up Limit (dBm)
Tx Channel	476	580	684	
Frequency (MHz)	817.9	820.5	823.1	
RC1 SO55	23.78	23.78	23.72	25.00
RC3 SO55	23.80	23.79	23.75	25.00
RC3 SO32 (F+SCH)	23.74	23.71	23.68	25.00
RC3 SO32 (+SCH)	23.73	23.73	23.69	25.00
RTAP 153.6Kbps	23.77	23.76	23.72	25.00
RETAP 4096Bits	23.72	23.72	23.70	25.00

<Reduced Power Mode for P-Sensor On>

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
Tx Channel	1013	384	777		25	600	1175	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	21.02	20.89	20.71	22.00	19.97	19.96	19.85	20.50
RC3 SO55	21.06	20.91	20.74	22.00	20.00	19.98	19.88	20.50
RC3 SO32 (F+SCH)	20.81	20.68	20.61	22.00	19.79	19.76	19.68	20.50
RC3 SO32 (+SCH)	20.79	20.62	20.63	22.00	19.76	19.72	19.70	20.50
RTAP 153.6Kbps	20.83	20.76	20.70	22.00	19.86	19.81	19.73	20.50
RETAP 4096Bits	20.81	20.72	20.69	22.00	19.80	19.74	19.74	20.50

Band	CDMA2000 BC10			Tune-up Limit (dBm)
Tx Channel	476	580	684	
Frequency (MHz)	817.9	820.5	823.1	
RC1 SO55	21.89	21.85	21.80	23.00
RC3 SO55	21.92	21.89	21.84	23.00
RC3 SO32 (F+SCH)	21.86	21.79	21.72	23.00
RC3 SO32 (+SCH)	21.82	21.74	21.73	23.00
RTAP 153.6Kbps	21.91	21.83	21.78	23.00
RETAP 4096Bits	21.88	21.82	21.76	23.00

<Reduced Power Mode for Hotspot On>

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
Tx Channel	1013	384	777		25	600	1175	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	21.02	20.89	20.71	22.00	19.10	19.05	18.92	20.00
RC3 SO55	21.06	20.91	20.74	22.00	19.11	19.07	18.96	20.00
RC3 SO32 (F+SCH)	20.81	20.68	20.61	22.00	18.99	18.98	18.81	20.00
RC3 SO32 (+SCH)	20.79	20.62	20.63	22.00	18.93	18.96	18.76	20.00
RTAP 153.6Kbps	20.83	20.76	20.70	22.00	19.06	19.03	18.93	20.00
RETAP 4096Bits	20.81	20.72	20.69	22.00	19.02	19.00	18.97	20.00

Band	CDMA2000 BC10			Tune-up Limit (dBm)
Tx Channel	476	580	684	
Frequency (MHz)	817.9	820.5	823.1	
RC1 SO55	21.89	21.85	21.80	23.00
RC3 SO55	21.92	21.89	21.84	23.00
RC3 SO32 (F+SCH)	21.86	21.79	21.72	23.00
RC3 SO32 (+SCH)	21.82	21.74	21.73	23.00
RTAP 153.6Kbps	21.91	21.83	21.78	23.00
RETAP 4096Bits	21.88	21.82	21.76	23.00


<Reduced Power Mode for Handheld On>

Band	CDMA2000 BC1			Tune-up Limit (dBm)
Tx Channel	25	600	1175	
Frequency (MHz)	1851.25	1880	1908.75	
RC1 SO55	21.47	21.45	21.30	22.50
RC3 SO55	21.51	21.48	21.34	22.50
RC3 SO32 (F+SCH)	21.37	21.32	21.24	22.50
RC3 SO32 (+SCH)	21.34	21.29	21.25	22.50
RTAP 153.6Kbps	21.49	21.46	21.38	22.50
RETAP 4096Bits	21.46	21.42	21.40	22.50

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B17 / B2 / B5 / B38 / B4 SAR test was covered by B12 / B25 / B26 / B41 / B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

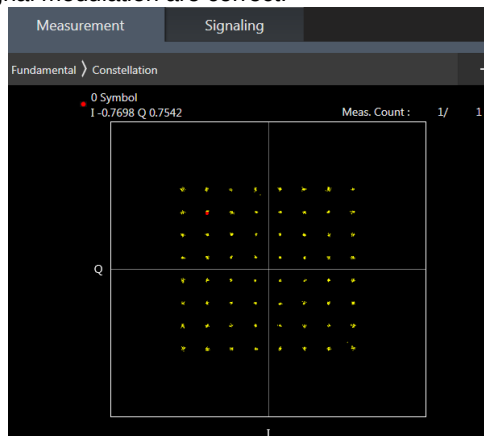

64QAM



16QAM

<Full Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.58	22.58	22.66	24	0
20	QPSK	1	49	22.62	22.57	22.65		
20	QPSK	1	99	22.53	22.67	22.63		
20	QPSK	50	0	21.62	21.65	21.63	23	1
20	QPSK	50	24	21.56	21.53	21.62		
20	QPSK	50	50	21.55	21.58	21.54		
20	QPSK	100	0	21.60	21.55	21.93		
20	16QAM	1	0	21.54	21.32	21.76	23	1
20	16QAM	1	49	21.45	21.30	21.66		
20	16QAM	1	99	21.46	21.38	21.76		
20	16QAM	50	0	20.56	20.52	20.95	22	2
20	16QAM	50	24	20.57	20.52	20.97		
20	16QAM	50	50	20.54	20.60	20.98		
20	16QAM	100	0	20.57	20.51	20.94		
20	64QAM	1	0	20.28	20.27	20.58	22	2
20	64QAM	1	49	20.38	20.26	20.57		
20	64QAM	1	99	20.33	20.30	20.63		
20	64QAM	50	0	19.61	19.54	19.99	21	3
20	64QAM	50	24	19.59	19.54	19.53		
20	64QAM	50	50	19.53	19.62	19.55		
20	64QAM	100	0	19.51	19.51	19.93		

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.55	22.60	22.64	24	0
15	QPSK	1	37	22.56	22.59	22.59		
15	QPSK	1	74	22.58	22.64	22.59		
15	QPSK	36	0	21.59	21.49	21.96	23	1
15	QPSK	36	20	21.55	21.55	21.98		
15	QPSK	36	39	21.51	21.59	21.92		
15	QPSK	75	0	21.55	21.56	21.90		
15	16QAM	1	0	21.42	21.27	21.66	23	1
15	16QAM	1	37	21.31	21.39	21.62		
15	16QAM	1	74	21.17	21.43	21.58		
15	16QAM	36	0	20.49	20.40	20.85	22	2
15	16QAM	36	20	20.46	20.45	20.89		
15	16QAM	36	39	20.50	20.40	20.89		
15	16QAM	75	0	20.50	20.55	20.97		
15	64QAM	1	0	20.38	20.33	20.70	22	2
15	64QAM	1	37	20.21	20.24	20.67		
15	64QAM	1	74	20.28	20.36	20.68		
15	64QAM	36	0	19.53	19.45	19.86	21	3
15	64QAM	36	20	19.42	19.47	19.85		
15	64QAM	36	39	19.47	19.44	19.84		
15	64QAM	75	0	19.57	19.51	20.00		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.61	22.56	22.52	24	0
10	QPSK	1	25	22.58	22.52	22.57		
10	QPSK	1	49	22.54	22.57	22.58		
10	QPSK	25	0	21.58	21.53	21.99	23	1
10	QPSK	25	12	21.60	21.53	21.97		
10	QPSK	25	25	21.49	21.56	21.90		
10	QPSK	50	0	21.48	21.48	21.92		
10	16QAM	1	0	21.40	21.26	21.66	23	1
10	16QAM	1	25	21.25	21.31	21.65		
10	16QAM	1	49	21.19	21.29	21.68		
10	16QAM	25	0	20.49	20.46	20.85	22	2
10	16QAM	25	12	20.49	20.44	20.94		
10	16QAM	25	25	20.44	20.49	20.93		
10	16QAM	50	0	20.47	20.52	20.90		
10	64QAM	1	0	20.28	20.33	20.76	22	2
10	64QAM	1	25	20.30	20.39	20.70		
10	64QAM	1	49	20.35	20.49	20.74		
10	64QAM	25	0	19.48	19.49	19.94	21	3
10	64QAM	25	12	19.55	19.45	19.93		
10	64QAM	25	25	19.47	19.45	19.92		
10	64QAM	50	0	19.51	19.53	19.93		



FCC SAR Test Report

Report No. : FA932901-02

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.56	22.53	22.55	24	0
5	QPSK	1	12	22.55	22.53	22.57		
5	QPSK	1	24	22.57	22.53	22.53		
5	QPSK	12	0	21.54	21.52	21.99	23	1
5	QPSK	12	7	21.57	21.53	22.01		
5	QPSK	12	13	21.56	21.54	21.95		
5	QPSK	25	0	21.53	21.51	22.01	23	1
5	16QAM	1	0	21.57	21.34	21.70		
5	16QAM	1	12	21.56	21.31	21.70		
5	16QAM	1	24	21.46	21.38	21.77	22	2
5	16QAM	12	0	20.46	20.38	20.83		
5	16QAM	12	7	20.44	20.42	20.85		
5	16QAM	12	13	20.41	20.40	20.83	22	2
5	16QAM	25	0	20.49	20.45	20.92		
5	64QAM	1	0	20.32	20.30	20.78		
5	64QAM	1	12	20.30	20.32	20.76	21	3
5	64QAM	1	24	20.32	20.30	20.77		
5	64QAM	12	0	19.49	19.40	19.78		
5	64QAM	12	7	19.44	19.37	19.72	21	3
5	64QAM	12	13	19.43	19.44	19.81		
5	64QAM	25	0	19.45	19.48	19.94		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.54	22.52	22.52	24	0
3	QPSK	1	8	22.52	22.57	22.60		
3	QPSK	1	14	22.60	22.54	22.57		
3	QPSK	8	0	21.53	21.53	21.97	23	1
3	QPSK	8	4	21.56	21.48	21.98		
3	QPSK	8	7	21.51	21.54	21.95		
3	QPSK	15	0	21.51	21.50	21.91	23	1
3	16QAM	1	0	21.45	21.23	21.72		
3	16QAM	1	8	21.26	21.29	21.68		
3	16QAM	1	14	21.35	21.26	21.71	22	2
3	16QAM	8	0	20.43	20.49	20.89		
3	16QAM	8	4	20.46	20.45	20.90		
3	16QAM	8	7	20.42	20.51	20.89	22	2
3	16QAM	15	0	20.46	20.44	20.94		
3	64QAM	1	0	20.33	20.47	20.80		
3	64QAM	1	8	20.38	20.36	20.77	21	3
3	64QAM	1	14	20.42	20.43	20.83		
3	64QAM	8	0	19.47	19.49	19.91		
3	64QAM	8	4	19.47	19.46	19.87	21	3
3	64QAM	8	7	19.43	19.52	19.92		
3	64QAM	15	0	19.44	19.43	19.93		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 56 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509

Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.47	22.47	22.57	24	0
1.4	QPSK	1	3	22.57	22.50	22.49		
1.4	QPSK	1	5	22.49	22.48	22.50		
1.4	QPSK	3	0	22.49	22.49	22.42		
1.4	QPSK	3	1	22.49	22.46	22.49		
1.4	QPSK	3	3	22.46	22.42	22.46		
1.4	QPSK	6	0	21.49	21.52	21.91	23	1
1.4	16QAM	1	0	21.43	21.26	21.75	23	1
1.4	16QAM	1	3	21.30	21.29	21.75		
1.4	16QAM	1	5	21.47	21.29	21.72		
1.4	16QAM	3	0	21.36	21.35	21.82		
1.4	16QAM	3	1	21.34	21.41	21.81		
1.4	16QAM	3	3	21.33	21.32	21.77		
1.4	16QAM	6	0	20.42	20.45	20.90	22	2
1.4	64QAM	1	0	20.17	20.16	20.64	22	2
1.4	64QAM	1	3	20.17	20.22	20.53		
1.4	64QAM	1	5	20.18	20.25	20.62		
1.4	64QAM	3	0	20.38	20.41	20.87		
1.4	64QAM	3	1	20.37	20.43	20.87		
1.4	64QAM	3	3	20.44	20.47	20.85		
1.4	64QAM	6	0	19.48	19.50	19.93	21	3

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.43	22.52	22.42	24	0
20	QPSK	1	49	22.41	22.31	22.38		
20	QPSK	1	99	22.35	22.29	22.36		
20	QPSK	50	0	21.40	21.42	21.37	23	1
20	QPSK	50	24	21.39	21.29	21.36		
20	QPSK	50	50	21.38	21.30	21.36		
20	QPSK	100	0	21.39	21.32	21.38	23	1
20	16QAM	1	0	21.25	21.01	21.11		
20	16QAM	1	49	21.18	21.03	21.14		
20	16QAM	1	99	21.09	21.03	21.02	22	2
20	16QAM	50	0	20.38	20.38	20.36		
20	16QAM	50	24	20.37	20.32	20.37		
20	16QAM	50	50	20.34	20.27	20.33	22	2
20	16QAM	100	0	20.37	20.30	20.34		
20	64QAM	1	0	20.29	20.26	20.31		
20	64QAM	1	49	20.14	20.22	20.27	22	2
20	64QAM	1	99	20.22	20.18	20.28		
20	64QAM	50	0	19.66	19.54	19.58		
20	64QAM	50	24	19.59	19.58	19.65	21	3
20	64QAM	50	50	19.57	19.56	19.56		
20	64QAM	100	0	19.53	19.51	19.55		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.38	22.40	22.37	24	0
15	QPSK	1	37	22.40	22.36	22.37		
15	QPSK	1	74	22.26	22.30	22.36		
15	QPSK	36	0	21.39	21.39	21.34	23	1
15	QPSK	36	20	21.40	21.35	21.40		
15	QPSK	36	39	21.35	21.35	21.44		
15	QPSK	75	0	21.43	21.39	21.41	23	1
15	16QAM	1	0	21.19	21.20	21.23		
15	16QAM	1	37	21.20	21.04	21.18		
15	16QAM	1	74	21.24	21.08	21.25	22	2
15	16QAM	36	0	20.40	20.39	20.33		
15	16QAM	36	20	20.41	20.33	20.40		
15	16QAM	36	39	20.32	20.32	20.39	22	2
15	16QAM	75	0	20.39	20.34	20.45		
15	64QAM	1	0	20.29	20.39	20.51		
15	64QAM	1	37	20.33	20.39	20.48	21	3
15	64QAM	1	74	20.36	20.29	20.36		
15	64QAM	36	0	19.63	19.51	19.61		
15	64QAM	36	20	19.61	19.53	19.64	21	3
15	64QAM	36	39	19.56	19.52	19.60		
15	64QAM	75	0	19.62	19.56	19.66		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.45	22.41	22.45	24	0
10	QPSK	1	25	22.35	22.32	22.48		
10	QPSK	1	49	22.39	22.32	22.46		
10	QPSK	25	0	21.41	21.34	21.40	23	1
10	QPSK	25	12	21.42	21.33	21.37		
10	QPSK	25	25	21.36	21.34	21.44		
10	QPSK	50	0	21.43	21.37	21.42	23	1
10	16QAM	1	0	21.19	21.23	21.21		
10	16QAM	1	25	21.25	21.07	21.20		
10	16QAM	1	49	21.22	21.07	21.26	22	2
10	16QAM	25	0	20.43	20.32	20.42		
10	16QAM	25	12	20.41	20.32	20.40		
10	16QAM	25	25	20.40	20.34	20.49	22	2
10	16QAM	50	0	20.43	20.33	20.44		
10	64QAM	1	0	20.29	20.34	20.36		
10	64QAM	1	25	20.26	20.34	20.33	21	3
10	64QAM	1	49	20.31	20.23	20.35		
10	64QAM	25	0	19.59	19.53	19.59		
10	64QAM	25	12	19.60	19.57	19.61	21	3
10	64QAM	25	25	19.61	19.48	19.60		
10	64QAM	50	0	19.63	19.57	19.69		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 59 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.40	22.34	22.45	24	0
5	QPSK	1	12	22.39	22.26	22.44		
5	QPSK	1	24	22.35	22.28	22.44		
5	QPSK	12	0	21.38	21.34	21.40	23	1
5	QPSK	12	7	21.34	21.26	21.40		
5	QPSK	12	13	21.39	21.26	21.39		
5	QPSK	25	0	21.32	21.31	21.41	23	1
5	16QAM	1	0	21.23	21.04	21.21		
5	16QAM	1	12	21.10	21.02	21.22		
5	16QAM	1	24	21.09	21.07	21.24	22	2
5	16QAM	12	0	20.26	20.25	20.30		
5	16QAM	12	7	20.24	20.26	20.34		
5	16QAM	12	13	20.30	20.17	20.27	22	2
5	16QAM	25	0	20.32	20.39	20.41		
5	64QAM	1	0	20.38	20.24	20.27		
5	64QAM	1	12	20.42	20.25	20.14	22	2
5	64QAM	1	24	20.27	20.23	20.26		
5	64QAM	12	0	19.47	19.45	19.48		
5	64QAM	12	7	19.42	19.48	19.52	21	3
5	64QAM	12	13	19.46	19.45	19.54		
5	64QAM	25	0	19.51	19.51	19.58		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.39	22.30	22.32	24	0
3	QPSK	1	8	22.33	22.32	22.49		
3	QPSK	1	14	22.35	22.34	22.45		
3	QPSK	8	0	21.33	21.29	21.43	23	1
3	QPSK	8	4	21.34	21.32	21.47		
3	QPSK	8	7	21.33	21.24	21.46		
3	QPSK	15	0	21.34	21.23	21.42	23	1
3	16QAM	1	0	21.29	21.03	21.17		
3	16QAM	1	8	21.25	21.07	21.23		
3	16QAM	1	14	21.27	21.05	21.33	22	2
3	16QAM	8	0	20.29	20.19	20.43		
3	16QAM	8	4	20.30	20.22	20.43		
3	16QAM	8	7	20.26	20.30	20.38	22	2
3	16QAM	15	0	20.35	20.25	20.39		
3	64QAM	1	0	20.25	20.20	20.41		
3	64QAM	1	8	20.27	20.27	20.38	22	2
3	64QAM	1	14	20.21	20.09	20.44		
3	64QAM	8	0	19.58	19.58	19.66		
3	64QAM	8	4	19.56	19.54	19.65	21	3
3	64QAM	8	7	19.53	19.45	19.64		
3	64QAM	15	0	19.52	19.51	19.58		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 60 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.30	22.26	22.38	24	0
1.4	QPSK	1	3	22.36	22.25	22.38		
1.4	QPSK	1	5	22.38	22.27	22.37		
1.4	QPSK	3	0	22.32	22.35	22.32		
1.4	QPSK	3	1	22.34	22.27	22.36		
1.4	QPSK	3	3	22.36	22.33	22.41		
1.4	QPSK	6	0	21.33	21.23	21.42	23	1
1.4	16QAM	1	0	21.20	21.02	21.17	23	1
1.4	16QAM	1	3	21.13	21.06	21.21		
1.4	16QAM	1	5	21.17	21.04	21.17		
1.4	16QAM	3	0	21.17	21.01	21.26		
1.4	16QAM	3	1	21.15	21.17	21.23		
1.4	16QAM	3	3	21.26	21.04	21.33		
1.4	16QAM	6	0	20.29	20.23	20.34	22	2
1.4	64QAM	1	0	20.27	20.16	20.18	22	2
1.4	64QAM	1	3	20.28	20.25	20.26		
1.4	64QAM	1	5	20.15	20.22	20.21		
1.4	64QAM	3	0	20.48	20.40	20.54		
1.4	64QAM	3	1	20.50	20.42	20.52		
1.4	64QAM	3	3	20.53	20.48	20.57		
1.4	64QAM	6	0	19.71	19.60	19.70	21	3

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.81	22.85	22.82	24	0
10	QPSK	1	25	22.78	22.75	22.71		
10	QPSK	1	49	22.74	22.81	22.73		
10	QPSK	25	0	21.81	21.93	21.86	23	1
10	QPSK	25	12	21.82	21.89	21.88		
10	QPSK	25	25	21.86	21.85	21.78		
10	QPSK	50	0	21.83	21.85	21.80		
10	16QAM	1	0	21.67	21.65	21.63	23	1
10	16QAM	1	25	21.65	21.60	21.70		
10	16QAM	1	49	21.63	21.74	21.52		
10	16QAM	25	0	20.81	20.89	20.98	22	2
10	16QAM	25	12	20.82	20.90	20.86		
10	16QAM	25	25	20.76	20.85	20.84		
10	16QAM	50	0	20.79	20.92	20.88		
10	64QAM	1	0	20.94	20.93	20.94	22	2
10	64QAM	1	25	21.06	20.80	21.00		
10	64QAM	1	49	20.87	20.83	20.95		
10	64QAM	25	0	19.79	19.86	19.91	21	3
10	64QAM	25	12	19.79	19.97	19.90		
10	64QAM	25	25	19.72	19.86	19.82		
10	64QAM	50	0	19.82	19.94	19.94		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.75	22.79	22.75	24	0
5	QPSK	1	12	22.71	22.75	22.79		
5	QPSK	1	24	22.79	22.75	22.75		
5	QPSK	12	0	21.81	21.84	21.88	23	1
5	QPSK	12	7	21.79	21.84	21.89		
5	QPSK	12	13	21.82	21.84	21.90		
5	QPSK	25	0	21.83	21.85	21.90		
5	16QAM	1	0	21.61	21.52	21.73	23	1
5	16QAM	1	12	21.67	21.49	21.63		
5	16QAM	1	24	21.68	21.72	21.56		
5	16QAM	12	0	20.75	20.85	20.83	22	2
5	16QAM	12	7	20.74	20.78	20.81		
5	16QAM	12	13	20.71	20.69	20.80		
5	16QAM	25	0	20.84	20.91	20.88		
5	64QAM	1	0	20.66	20.67	20.81	22	2
5	64QAM	1	12	20.52	20.61	20.59		
5	64QAM	1	24	20.47	20.65	20.70		
5	64QAM	12	0	19.71	19.82	19.87	21	3
5	64QAM	12	7	19.69	19.84	19.80		
5	64QAM	12	13	19.71	19.76	19.73		
5	64QAM	25	0	19.83	19.86	19.88		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.84	22.78	22.78	24	0
3	QPSK	1	8	22.78	22.74	22.78		
3	QPSK	1	14	22.74	22.78	22.78		
3	QPSK	8	0	21.82	21.89	21.93	23	1
3	QPSK	8	4	21.79	21.86	21.90		
3	QPSK	8	7	21.85	21.89	21.87		
3	QPSK	15	0	21.85	21.85	21.87		
3	16QAM	1	0	21.63	21.75	21.69	23	1
3	16QAM	1	8	21.69	21.61	21.63		
3	16QAM	1	14	21.61	21.65	21.71		
3	16QAM	8	0	20.85	20.91	20.93	22	2
3	16QAM	8	4	20.82	20.83	20.86		
3	16QAM	8	7	20.76	20.83	20.88		
3	16QAM	15	0	20.76	20.83	20.87		
3	64QAM	1	0	20.67	20.60	20.69	22	2
3	64QAM	1	8	20.52	20.67	20.67		
3	64QAM	1	14	20.67	20.60	20.76		
3	64QAM	8	0	19.73	19.91	19.92	21	3
3	64QAM	8	4	19.80	19.87	19.89		
3	64QAM	8	7	19.81	19.93	19.93		
3	64QAM	15	0	19.80	19.86	19.91		

Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.75	22.75	22.75	24	0
1.4	QPSK	1	3	22.78	22.78	22.75		
1.4	QPSK	1	5	22.80	22.75	22.79		
1.4	QPSK	3	0	22.79	22.75	22.79		
1.4	QPSK	3	1	22.77	22.79	22.75		
1.4	QPSK	3	3	22.76	22.78	22.75		
1.4	QPSK	6	0	21.75	21.81	21.89	23	1
1.4	16QAM	1	0	21.66	21.59	21.79	23	1
1.4	16QAM	1	3	21.66	21.63	21.63		
1.4	16QAM	1	5	21.68	21.68	21.55		
1.4	16QAM	3	0	21.64	21.81	21.70		
1.4	16QAM	3	1	21.73	21.71	21.72		
1.4	16QAM	3	3	21.66	21.68	21.74		
1.4	16QAM	6	0	20.74	20.88	20.80	22	2
1.4	64QAM	1	0	20.47	20.49	20.61	22	2
1.4	64QAM	1	3	20.43	20.64	20.52		
1.4	64QAM	1	5	20.41	20.60	20.47		
1.4	64QAM	3	0	20.69	20.78	20.80		
1.4	64QAM	3	1	20.71	20.72	20.85		
1.4	64QAM	3	3	20.68	20.70	20.77		
1.4	64QAM	6	0	19.89	19.99	19.97	21	3

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.15	22.24	22.33	24	0
20	QPSK	1	49	22.18	22.22	22.23		
20	QPSK	1	99	22.06	22.10	22.13		
20	QPSK	50	0	21.22	21.28	21.29	23	1
20	QPSK	50	24	21.22	21.16	21.26		
20	QPSK	50	50	21.21	21.15	21.18		
20	QPSK	100	0	21.20	21.18	21.25		
20	16QAM	1	0	21.14	21.07	21.23	23	1
20	16QAM	1	49	21.18	21.01	21.13		
20	16QAM	1	99	21.05	21.10	21.07		
20	16QAM	50	0	20.20	20.22	20.33	22	2
20	16QAM	50	24	20.22	20.20	20.25		
20	16QAM	50	50	20.22	20.17	20.23		
20	16QAM	100	0	20.23	20.19	20.27		
20	64QAM	1	0	20.25	20.25	20.27	22	2
20	64QAM	1	49	20.13	20.11	20.21		
20	64QAM	1	99	20.22	20.15	20.17		
20	64QAM	50	0	19.49	19.51	19.52	21	3
20	64QAM	50	24	19.41	19.47	19.53		
20	64QAM	50	50	19.41	19.44	19.52		
20	64QAM	100	0	19.41	19.35	19.47		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.23	22.25	22.32	24	0
15	QPSK	1	37	22.18	22.29	22.25		
15	QPSK	1	74	22.14	22.27	22.26		
15	QPSK	36	0	21.18	21.21	21.25	23	1
15	QPSK	36	20	21.21	21.21	21.24		
15	QPSK	36	39	21.17	21.19	21.18		
15	QPSK	75	0	21.19	21.18	21.18	23	1
15	16QAM	1	0	21.05	21.04	21.05		
15	16QAM	1	37	21.05	21.08	21.07		
15	16QAM	1	74	21.06	21.01	21.05	22	2
15	16QAM	36	0	20.16	20.20	20.22		
15	16QAM	36	20	20.19	20.14	20.20		
15	16QAM	36	39	20.14	20.15	20.18	22	2
15	16QAM	75	0	20.17	20.23	20.28		
15	64QAM	1	0	20.27	20.11	20.20		
15	64QAM	1	37	20.16	20.11	20.09	21	3
15	64QAM	1	74	20.21	20.15	20.07		
15	64QAM	36	0	19.43	19.49	19.42		
15	64QAM	36	20	19.36	19.41	19.42	21	3
15	64QAM	36	39	19.44	19.38	19.37		
15	64QAM	75	0	19.42	19.38	19.40		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.23	22.29	22.31	24	0
10	QPSK	1	25	22.22	22.24	22.28		
10	QPSK	1	49	22.19	22.20	22.28		
10	QPSK	25	0	21.18	21.18	21.25	23	1
10	QPSK	25	12	21.19	21.19	21.19		
10	QPSK	25	25	21.10	21.21	21.25		
10	QPSK	50	0	21.18	21.19	21.31	23	1
10	16QAM	1	0	21.07	21.07	21.04		
10	16QAM	1	25	21.12	21.01	21.04		
10	16QAM	1	49	21.08	21.02	21.03	22	2
10	16QAM	25	0	20.14	20.21	20.32		
10	16QAM	25	12	20.24	20.20	20.29		
10	16QAM	25	25	20.18	20.22	20.27	22	2
10	16QAM	50	0	20.17	20.22	20.26		
10	64QAM	1	0	20.10	20.27	20.35		
10	64QAM	1	25	20.12	20.26	20.30	21	3
10	64QAM	1	49	20.20	20.12	20.21		
10	64QAM	25	0	19.41	19.41	19.44		
10	64QAM	25	12	19.36	19.36	19.46	21	3
10	64QAM	25	25	19.35	19.37	19.38		
10	64QAM	50	0	19.40	19.46	19.46		

Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.18	22.26	22.32	24	0
5	QPSK	1	12	22.23	22.25	22.28		
5	QPSK	1	24	22.17	22.23	22.28		
5	QPSK	12	0	21.19	21.19	21.22	23	1
5	QPSK	12	7	21.16	21.21	21.22		
5	QPSK	12	13	21.18	21.15	21.24		
5	QPSK	25	0	21.20	21.23	21.30	23	1
5	16QAM	1	0	21.17	21.03	21.04		
5	16QAM	1	12	21.32	21.00	21.10		
5	16QAM	1	24	21.06	21.12	21.07	22	2
5	16QAM	12	0	20.14	20.13	20.23		
5	16QAM	12	7	20.12	20.14	20.22		
5	16QAM	12	13	20.14	20.11	20.20	22	2
5	16QAM	25	0	20.23	20.18	20.27		
5	64QAM	1	0	20.09	20.20	20.11		
5	64QAM	1	12	20.15	20.22	20.20	21	3
5	64QAM	1	24	20.14	20.14	20.18		
5	64QAM	12	0	19.30	19.34	19.45		
5	64QAM	12	7	19.32	19.35	19.45	21	3
5	64QAM	12	13	19.34	19.36	19.36		
5	64QAM	25	0	19.33	19.42	19.48		

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.54	22.61	22.59	24	0
10	QPSK	1	25	22.51	22.53	22.43		
10	QPSK	1	49	22.49	22.50	22.45		
10	QPSK	25	0	21.46	21.51	21.49	23	1
10	QPSK	25	12	21.50	21.43	21.44		
10	QPSK	25	25	21.44	21.46	21.42		
10	QPSK	50	0	21.49	21.48	21.47	23	1
10	16QAM	1	0	21.27	21.46	21.10		
10	16QAM	1	25	21.19	21.36	21.15		
10	16QAM	1	49	21.12	21.35	21.13	22	2
10	16QAM	25	0	20.44	20.41	20.31		
10	16QAM	25	12	20.42	20.47	20.38		
10	16QAM	25	25	20.37	20.39	20.29	22	2
10	16QAM	50	0	20.41	20.42	20.39		
10	64QAM	1	0	20.45	20.48	20.32		
10	64QAM	1	25	20.44	20.41	20.42	21	3
10	64QAM	1	49	20.47	20.49	20.29		
10	64QAM	25	0	19.63	19.70	19.52		
10	64QAM	25	12	19.67	19.68	19.46	21	3
10	64QAM	25	25	19.64	19.60	19.49		
10	64QAM	50	0	19.59	19.61	19.61		



FCC SAR Test Report

Report No. : FA932901-02

Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.60	22.59	22.58	24	0
5	QPSK	1	12	22.50	22.43	22.46		
5	QPSK	1	24	22.53	22.45	22.41		
5	QPSK	12	0	21.48	21.49	21.46	23	1
5	QPSK	12	7	21.49	21.44	21.42		
5	QPSK	12	13	21.49	21.42	21.40		
5	QPSK	25	0	21.48	21.47	21.43	23	1
5	16QAM	1	0	21.43	21.10	21.10		
5	16QAM	1	12	21.26	21.15	21.17		
5	16QAM	1	24	21.23	21.13	21.18	22	2
5	16QAM	12	0	20.34	20.31	20.30		
5	16QAM	12	7	20.38	20.38	20.30		
5	16QAM	12	13	20.38	20.29	20.34	22	2
5	16QAM	25	0	20.42	20.39	20.39		
5	64QAM	1	0	20.32	20.32	20.43		
5	64QAM	1	12	20.29	20.42	20.39	21	3
5	64QAM	1	24	20.38	20.29	20.31		
5	64QAM	12	0	19.62	19.52	19.54		
5	64QAM	12	7	19.56	19.46	19.51	21	3
5	64QAM	12	13	19.53	19.49	19.56		
5	64QAM	25	0	19.67	19.61	19.60		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.52	22.46	22.54	24	0
3	QPSK	1	8	22.53	22.52	22.51		
3	QPSK	1	14	22.50	22.47	22.49		
3	QPSK	8	0	21.48	21.48	21.46	23	1
3	QPSK	8	4	21.43	21.49	21.50		
3	QPSK	8	7	21.46	21.44	21.44		
3	QPSK	15	0	21.48	21.45	21.49	23	1
3	16QAM	1	0	21.46	21.34	21.27		
3	16QAM	1	8	21.36	21.16	21.19		
3	16QAM	1	14	21.35	21.07	21.12	22	2
3	16QAM	8	0	20.41	20.36	20.44		
3	16QAM	8	4	20.47	20.36	20.42		
3	16QAM	8	7	20.39	20.35	20.37	22	2
3	16QAM	15	0	20.42	20.33	20.41		
3	64QAM	1	0	20.48	20.37	20.45		
3	64QAM	1	8	20.41	20.38	20.44	21	3
3	64QAM	1	14	20.49	20.47	20.47		
3	64QAM	8	0	19.70	19.58	19.63		
3	64QAM	8	4	19.68	19.65	19.67	21	3
3	64QAM	8	7	19.60	19.65	19.64		
3	64QAM	15	0	19.61	19.53	19.59		

Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.43	22.40	22.39	24	0
1.4	QPSK	1	3	22.49	22.45	22.47		
1.4	QPSK	1	5	22.45	22.49	22.43		
1.4	QPSK	3	0	22.53	22.43	22.47		
1.4	QPSK	3	1	22.46	22.42	22.43		
1.4	QPSK	3	3	22.47	22.41	22.39		
1.4	QPSK	6	0	21.48	21.38	21.40	23	1
1.4	16QAM	1	0	21.50	21.16	21.23	23	1
1.4	16QAM	1	3	21.47	21.24	21.29		
1.4	16QAM	1	5	21.43	21.26	21.36		
1.4	16QAM	3	0	21.38	21.32	21.30		
1.4	16QAM	3	1	21.35	21.23	21.37		
1.4	16QAM	3	3	21.32	21.34	21.28		
1.4	16QAM	6	0	20.46	20.41	20.44	22	2
1.4	64QAM	1	0	20.26	20.47	20.48	22	2
1.4	64QAM	1	3	20.39	20.42	20.39		
1.4	64QAM	1	5	20.39	20.28	20.38		
1.4	64QAM	3	0	20.64	20.51	20.53		
1.4	64QAM	3	1	20.61	20.51	20.54		
1.4	64QAM	3	3	20.55	20.47	20.53		
1.4	64QAM	6	0	19.69	19.64	19.63	21	3

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		22.42		24	0
10	QPSK	1	25		22.33			
10	QPSK	1	49		22.20			
10	QPSK	25	0		21.31		23	1
10	QPSK	25	12		21.29			
10	QPSK	25	25		21.20			
10	QPSK	50	0		21.28		23	1
10	16QAM	1	0		21.17			
10	16QAM	1	25		21.16			
10	16QAM	1	49		21.12		22	2
10	16QAM	25	0		20.27			
10	16QAM	25	12		20.18			
10	16QAM	25	25		20.18		22	2
10	16QAM	50	0		20.20			
10	64QAM	1	0		20.32			
10	64QAM	1	25		20.22		22	2
10	64QAM	1	49		20.10			
10	64QAM	25	0		19.42			
10	64QAM	25	12		19.42		21	3
10	64QAM	25	25		19.38			
10	64QAM	50	0		19.48			

Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.41	22.34	22.40	24	0
5	QPSK	1	12	22.39	22.23	22.32		
5	QPSK	1	24	22.34	22.27	22.33		
5	QPSK	12	0	21.36	21.24	21.30	23	1
5	QPSK	12	7	21.28	21.23	21.28		
5	QPSK	12	13	21.31	21.19	21.27		
5	QPSK	25	0	21.28	21.23	21.27	23	1
5	16QAM	1	0	21.16	21.11	21.01		
5	16QAM	1	12	21.11	21.16	21.18		
5	16QAM	1	24	21.03	21.12	21.10	22	2
5	16QAM	12	0	20.20	20.20	20.21		
5	16QAM	12	7	20.25	20.12	20.16		
5	16QAM	12	13	20.16	20.08	20.15	22	2
5	16QAM	25	0	20.25	20.19	20.27		
5	64QAM	1	0	20.33	20.32	20.21		
5	64QAM	1	12	20.23	20.17	20.16	21	3
5	64QAM	1	24	20.18	20.12	20.24		
5	64QAM	12	0	19.40	19.33	19.39		
5	64QAM	12	7	19.37	19.36	19.36	21	3
5	64QAM	12	13	19.36	19.29	19.42		
5	64QAM	25	0	19.47	19.38	19.45		

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.46	22.52	22.45	24	0
10	QPSK	1	25	22.44	22.39	22.31		
10	QPSK	1	49	22.37	22.30	22.29		
10	QPSK	25	0	21.43	21.45	21.41	23	1
10	QPSK	25	12	21.44	21.37	21.39		
10	QPSK	25	25	21.37	21.36	21.34		
10	QPSK	50	0	21.43	21.41	21.38	23	1
10	16QAM	1	0	21.42	21.19	21.18		
10	16QAM	1	25	21.27	21.03	21.13		
10	16QAM	1	49	21.20	21.02	21.00	22	2
10	16QAM	25	0	20.46	20.47	20.40		
10	16QAM	25	12	20.38	20.35	20.39		
10	16QAM	25	25	20.33	20.38	20.26	22	2
10	16QAM	50	0	20.44	20.42	20.33		
10	64QAM	1	0	20.31	20.48	20.34		
10	64QAM	1	25	20.26	20.41	20.34	22	2
10	64QAM	1	49	20.17	20.33	20.35		
10	64QAM	25	0	19.70	19.58	19.56		
10	64QAM	25	12	19.57	19.61	19.55	21	3
10	64QAM	25	25	19.54	19.57	19.48		
10	64QAM	50	0	19.64	19.62	19.58		

Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.51	22.49	22.44	24	0
5	QPSK	1	12	22.37	22.39	22.34		
5	QPSK	1	24	22.38	22.36	22.33		
5	QPSK	12	0	21.39	21.40	21.36	23	1
5	QPSK	12	7	21.39	21.44	21.34		
5	QPSK	12	13	21.31	21.37	21.31		
5	QPSK	25	0	21.39	21.38	21.30	23	1
5	16QAM	1	0	21.23	21.03	21.22		
5	16QAM	1	12	21.12	21.19	21.08		
5	16QAM	1	24	21.18	21.14	21.06	22	2
5	16QAM	12	0	20.35	20.32	20.18		
5	16QAM	12	7	20.25	20.32	20.20		
5	16QAM	12	13	20.23	20.27	20.24	22	2
5	16QAM	25	0	20.38	20.38	20.37		
5	64QAM	1	0	20.21	20.40	20.44		
5	64QAM	1	12	20.26	20.34	20.33	22	2
5	64QAM	1	24	20.31	20.20	20.34		
5	64QAM	12	0	19.54	19.47	19.43		
5	64QAM	12	7	19.50	19.42	19.47	21	3
5	64QAM	12	13	19.48	19.44	19.42		
5	64QAM	25	0	19.52	19.56	19.47		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.40	22.75	22.74	24	0
20	QPSK	1	49	22.31	22.61	22.68		
20	QPSK	1	99	22.26	22.64	22.67		
20	QPSK	50	0	21.36	21.65	21.62	23	1
20	QPSK	50	24	21.32	21.38	21.61		
20	QPSK	50	50	21.30	21.42	21.60		
20	QPSK	100	0	21.37	21.61	21.60	23	1
20	16QAM	1	0	21.53	21.43	21.62		
20	16QAM	1	49	21.38	21.40	21.56		
20	16QAM	1	99	21.34	21.39	21.60	22	2
20	16QAM	50	0	20.49	20.62	20.89		
20	16QAM	50	24	20.53	20.41	20.86		
20	16QAM	50	50	20.62	20.44	20.81	22	2
20	16QAM	100	0	20.34	20.42	20.83		
20	64QAM	1	0	20.62	20.62	20.86		
20	64QAM	1	49	20.60	20.69	20.78	22	2
20	64QAM	1	99	20.59	20.73	20.78		
20	64QAM	50	0	19.61	19.73	19.93		
20	64QAM	50	24	19.62	19.64	19.95	21	3
20	64QAM	50	50	19.54	19.61	20.00		
20	64QAM	100	0	19.65	19.64	20.10		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.50	22.44	22.61	24	0
15	QPSK	1	37	22.45	22.44	22.61		
15	QPSK	1	74	22.40	22.46	22.57		
15	QPSK	36	0	21.42	21.38	21.66	23	1
15	QPSK	36	20	21.37	21.35	21.66		
15	QPSK	36	39	21.37	21.41	21.61		
15	QPSK	75	0	21.40	21.37	21.68	23	1
15	16QAM	1	0	21.34	21.26	21.54		
15	16QAM	1	37	21.28	21.36	21.55		
15	16QAM	1	74	21.16	21.26	21.60	22	2
15	16QAM	36	0	20.36	20.33	20.65		
15	16QAM	36	20	20.31	20.34	20.63		
15	16QAM	36	39	20.36	20.31	20.57	22	2
15	16QAM	75	0	20.39	20.33	20.77		
15	64QAM	1	0	20.29	20.30	20.70		
15	64QAM	1	37	20.27	20.28	20.72	21	3
15	64QAM	1	74	20.39	20.33	20.66		
15	64QAM	36	0	19.64	19.55	19.63		
15	64QAM	36	20	19.59	19.60	19.67	21	3
15	64QAM	36	39	19.56	19.61	19.69		
15	64QAM	75	0	19.56	19.58	19.71		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.51	22.44	22.64	24	0
10	QPSK	1	25	22.45	22.39	22.63		
10	QPSK	1	49	22.33	22.46	22.51		
10	QPSK	25	0	21.39	21.40	21.63	23	1
10	QPSK	25	12	21.38	21.44	21.68		
10	QPSK	25	25	21.38	21.43	21.68		
10	QPSK	50	0	21.34	21.41	21.66	23	1
10	16QAM	1	0	21.30	21.36	21.67		
10	16QAM	1	25	21.32	21.24	21.64		
10	16QAM	1	49	21.23	21.22	21.66	22	2
10	16QAM	25	0	20.37	20.38	20.61		
10	16QAM	25	12	20.34	20.42	20.63		
10	16QAM	25	25	20.39	20.42	20.56	22	2
10	16QAM	50	0	20.34	20.48	20.56		
10	64QAM	1	0	20.28	20.31	20.60		
10	64QAM	1	25	20.24	20.32	20.58	21	3
10	64QAM	1	49	20.30	20.32	20.52		
10	64QAM	25	0	19.62	19.58	19.66		
10	64QAM	25	12	19.59	19.57	19.61	21	3
10	64QAM	25	25	19.44	19.66	19.65		
10	64QAM	50	0	19.62	19.65	20.11		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.49	22.45	22.64	24	0
5	QPSK	1	12	22.48	22.40	22.54		
5	QPSK	1	24	22.46	22.50	22.54		
5	QPSK	12	0	21.44	21.33	21.62	23	1
5	QPSK	12	7	21.45	21.41	21.65		
5	QPSK	12	13	21.48	21.42	21.61		
5	QPSK	25	0	21.48	21.41	21.87	23	1
5	16QAM	1	0	21.25	21.25	21.58		
5	16QAM	1	12	21.19	21.22	21.58		
5	16QAM	1	24	21.16	21.12	21.49	22	2
5	16QAM	12	0	20.37	20.38	20.73		
5	16QAM	12	7	20.40	20.32	20.75		
5	16QAM	12	13	20.32	20.35	20.77	22	2
5	16QAM	25	0	20.41	20.41	20.85		
5	64QAM	1	0	20.35	20.30	20.75		
5	64QAM	1	12	20.38	20.34	20.68	22	2
5	64QAM	1	24	20.47	20.35	20.77		
5	64QAM	12	0	19.53	19.53	19.65		
5	64QAM	12	7	19.52	19.50	19.65	21	3
5	64QAM	12	13	19.45	19.60	19.66		
5	64QAM	25	0	19.62	19.58	20.02		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.51	22.41	22.63	24	0
3	QPSK	1	8	22.47	22.43	22.67		
3	QPSK	1	14	22.44	22.44	22.63		
3	QPSK	8	0	21.52	21.43	21.89	23	1
3	QPSK	8	4	21.44	21.42	21.88		
3	QPSK	8	7	21.46	21.42	21.91		
3	QPSK	15	0	21.44	21.46	21.89	23	1
3	16QAM	1	0	21.19	21.35	21.56		
3	16QAM	1	8	21.24	21.26	21.61		
3	16QAM	1	14	21.18	21.35	21.56	22	2
3	16QAM	8	0	20.38	20.38	20.65		
3	16QAM	8	4	20.31	20.38	20.61		
3	16QAM	8	7	20.35	20.30	20.56	22	2
3	16QAM	15	0	20.35	20.33	20.83		
3	64QAM	1	0	20.43	20.32	20.72		
3	64QAM	1	8	20.34	20.36	20.54	22	2
3	64QAM	1	14	20.44	20.36	20.65		
3	64QAM	8	0	19.63	19.62	20.08		
3	64QAM	8	4	19.63	19.68	20.10	21	3
3	64QAM	8	7	19.65	19.65	20.07		
3	64QAM	15	0	19.63	19.60	20.07		

Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.42	22.38	22.63	24	0
1.4	QPSK	1	3	22.41	22.44	22.61		
1.4	QPSK	1	5	22.38	22.49	22.61		
1.4	QPSK	3	0	22.40	22.39	22.56		
1.4	QPSK	3	1	22.38	22.40	22.45		
1.4	QPSK	3	3	22.37	22.37	22.67		
1.4	QPSK	6	0	21.36	21.37	21.85	23	1
1.4	16QAM	1	0	21.25	21.21	21.56	23	1
1.4	16QAM	1	3	21.20	21.23	21.63		
1.4	16QAM	1	5	21.16	21.26	21.61		
1.4	16QAM	3	0	21.39	21.32	21.56		
1.4	16QAM	3	1	21.26	21.24	21.26		
1.4	16QAM	3	3	21.25	21.38	21.66		
1.4	16QAM	6	0	20.44	20.38	20.87	22	2
1.4	64QAM	1	0	20.18	20.13	20.45	22	2
1.4	64QAM	1	3	20.27	20.14	20.54		
1.4	64QAM	1	5	20.27	20.13	20.34		
1.4	64QAM	3	0	20.50	20.53	20.56		
1.4	64QAM	3	1	20.55	20.53	20.51		
1.4	64QAM	3	3	20.52	20.52	20.66		
1.4	64QAM	6	0	19.69	19.71	20.13	21	3

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.83	22.86	22.77	24	0
15	QPSK	1	37	22.79	22.78	22.58		
15	QPSK	1	74	22.59	22.68	22.69		
15	QPSK	36	0	21.81	21.93	21.91	23	1
15	QPSK	36	20	21.82	21.89	21.89		
15	QPSK	36	39	21.86	21.85	21.86		
15	QPSK	75	0	21.83	21.85	21.81	23	1
15	16QAM	1	0	21.61	21.52	21.73		
15	16QAM	1	37	21.67	21.49	21.63		
15	16QAM	1	74	21.68	21.72	21.56	22	2
15	16QAM	36	0	20.75	20.85	20.83		
15	16QAM	36	20	20.74	20.78	20.81		
15	16QAM	36	39	20.71	20.69	20.80	22	2
15	16QAM	75	0	20.84	20.91	20.88		
15	64QAM	1	0	20.66	20.67	20.81		
15	64QAM	1	37	20.52	20.61	20.59	21	3
15	64QAM	1	74	20.47	20.65	20.70		
15	64QAM	36	0	19.71	19.82	19.87		
15	64QAM	36	20	19.69	19.84	19.80	21	3
15	64QAM	36	39	19.71	19.76	19.73		
15	64QAM	75	0	19.83	19.86	19.88		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.74	22.78	22.78	24	0
10	QPSK	1	25	22.78	22.74	22.78		
10	QPSK	1	49	22.74	22.78	22.78		
10	QPSK	25	0	21.82	21.89	21.93	23	1
10	QPSK	25	12	21.79	21.86	21.90		
10	QPSK	25	25	21.85	21.89	21.87		
10	QPSK	50	0	21.85	21.85	21.87		
10	16QAM	1	0	21.63	21.75	21.69	23	1
10	16QAM	1	25	21.69	21.61	21.63		
10	16QAM	1	49	21.61	21.65	21.71		
10	16QAM	25	0	20.85	20.91	20.93	22	2
10	16QAM	25	12	20.82	20.83	20.86		
10	16QAM	25	25	20.76	20.83	20.88		
10	16QAM	50	0	20.76	20.83	20.87		
10	64QAM	1	0	20.67	20.60	20.69	22	2
10	64QAM	1	25	20.52	20.67	20.67		
10	64QAM	1	49	20.67	20.60	20.76		
10	64QAM	25	0	19.73	19.91	19.92	21	3
10	64QAM	25	12	19.80	19.87	19.89		
10	64QAM	25	25	19.81	19.93	19.93		
10	64QAM	50	0	19.80	19.86	19.91		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.75	22.75	22.75	24	0
5	QPSK	1	12	22.78	22.78	22.75		
5	QPSK	1	24	22.80	22.75	22.79		
5	QPSK	12	0	22.79	22.75	22.79	23	1
5	QPSK	12	7	22.77	22.79	22.75		
5	QPSK	12	13	22.76	22.78	22.75		
5	QPSK	25	0	21.75	21.81	21.89		
5	16QAM	1	0	21.66	21.59	21.79	23	1
5	16QAM	1	12	21.66	21.63	21.63		
5	16QAM	1	24	21.68	21.68	21.55		
5	16QAM	12	0	21.64	21.81	21.70	22	2
5	16QAM	12	7	21.73	21.71	21.72		
5	16QAM	12	13	21.66	21.68	21.74		
5	16QAM	25	0	20.74	20.88	20.80		
5	64QAM	1	0	20.47	20.49	20.61	22	2
5	64QAM	1	12	20.43	20.64	20.52		
5	64QAM	1	24	20.41	20.60	20.47		
5	64QAM	12	0	20.69	20.78	20.80	21	3
5	64QAM	12	7	20.71	20.72	20.85		
5	64QAM	12	13	20.68	20.70	20.77		
5	64QAM	25	0	19.89	19.99	19.97		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.74	22.74	22.74	24	0
3	QPSK	1	8	22.78	22.75	22.71		
3	QPSK	1	14	22.74	22.74	22.73		
3	QPSK	8	0	21.81	21.93	21.86	23	1
3	QPSK	8	4	21.82	21.89	21.88		
3	QPSK	8	7	21.86	21.85	21.78		
3	QPSK	15	0	21.83	21.85	21.80	23	1
3	16QAM	1	0	21.67	21.65	21.63		
3	16QAM	1	8	21.65	21.56	21.70		
3	16QAM	1	14	21.63	21.46	21.52	22	2
3	16QAM	8	0	20.81	20.89	20.98		
3	16QAM	8	4	20.82	20.90	20.86		
3	16QAM	8	7	20.76	20.85	20.84	22	2
3	16QAM	15	0	20.79	20.92	20.88		
3	64QAM	1	0	20.94	20.93	20.94		
3	64QAM	1	8	21.06	20.80	21.00	21	3
3	64QAM	1	14	20.87	20.83	20.95		
3	64QAM	8	0	19.79	19.86	19.91		
3	64QAM	8	4	19.79	19.97	19.90	21	3
3	64QAM	8	7	19.72	19.86	19.82		
3	64QAM	15	0	19.82	19.94	19.94		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.19	22.17	22.67	24	0
1.4	QPSK	1	3	22.21	22.20	22.55		
1.4	QPSK	1	5	22.19	22.19	22.65		
1.4	QPSK	3	0	22.24	22.19	22.56		
1.4	QPSK	3	1	22.21	22.15	22.57		
1.4	QPSK	3	3	22.22	22.13	22.53	23	1
1.4	QPSK	6	0	21.20	21.10	21.56		
1.4	16QAM	1	0	21.10	21.20	21.56	23	1
1.4	16QAM	1	3	21.16	21.18	21.56		
1.4	16QAM	1	5	21.18	21.16	21.46		
1.4	16QAM	3	0	21.08	21.10	21.46		
1.4	16QAM	3	1	21.09	21.02	21.39		
1.4	16QAM	3	3	21.06	21.26	21.33	22	2
1.4	16QAM	6	0	20.16	20.16	20.56		
1.4	64QAM	1	0	20.85	20.77	20.88	22	2
1.4	64QAM	1	3	20.72	20.81	20.81		
1.4	64QAM	1	5	20.89	20.70	20.99		
1.4	64QAM	3	0	21.26	21.27	21.53		
1.4	64QAM	3	1	21.12	21.15	21.51		
1.4	64QAM	3	3	21.14	21.16	21.51	21	3
1.4	64QAM	6	0	20.24	20.23	20.61		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 81 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.22	22.59	22.33	24	0
20	QPSK	1	49	22.51	22.15	22.12		
20	QPSK	1	99	22.52	22.55	22.26		
20	QPSK	50	0	21.47	21.54	21.43	23	1
20	QPSK	50	24	21.50	21.24	21.21		
20	QPSK	50	50	21.51	21.52	21.25		
20	QPSK	100	0	21.40	21.41	21.18		
20	16QAM	1	0	21.34	21.66	21.60	23	1
20	16QAM	1	49	21.64	21.59	21.52		
20	16QAM	1	99	21.82	21.56	21.56		
20	16QAM	50	0	20.35	20.42	20.46	22	2
20	16QAM	50	24	20.44	20.25	20.25		
20	16QAM	50	50	20.45	20.39	20.41		
20	16QAM	100	0	20.40	20.24	20.23		
20	64QAM	1	0	20.76	20.70	20.79	22	2
20	64QAM	1	49	20.75	20.54	20.60		
20	64QAM	1	99	20.84	20.55	20.76		
20	64QAM	50	0	19.51	19.61	19.69	21	3
20	64QAM	50	24	19.60	19.45	19.49		
20	64QAM	50	50	19.62	19.23	19.19		
20	64QAM	100	0	19.58	19.44	19.48		



FCC SAR Test Report

Report No. : FA932901-02

Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.15	22.36	22.25	24	0
15	QPSK	1	37	22.42	22.48	22.27		
15	QPSK	1	74	22.36	22.12	22.00		
15	QPSK	36	0	21.31	21.64	21.58	23	1
15	QPSK	36	20	21.37	21.44	21.33		
15	QPSK	36	39	21.35	21.23	21.14		
15	QPSK	75	0	21.29	21.40	21.34	23	1
15	16QAM	1	0	21.21	21.52	21.56		
15	16QAM	1	37	21.59	21.57	21.46		
15	16QAM	1	74	21.56	21.27	21.22	22	2
15	16QAM	36	0	20.21	20.54	20.55		
15	16QAM	36	20	20.30	20.35	20.31		
15	16QAM	36	39	20.28	20.15	20.12	22	2
15	16QAM	75	0	20.24	20.34	20.34		
15	64QAM	1	0	20.69	20.91	20.97		
15	64QAM	1	37	20.61	20.61	20.53	21	3
15	64QAM	1	74	20.74	20.56	20.76		
15	64QAM	36	0	19.83	19.67	19.75		
15	64QAM	36	20	19.89	19.48	19.50	21	3
15	64QAM	36	39	19.64	19.56	19.56		
15	64QAM	75	0	19.49	19.50	19.53		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.12	22.39	22.41	24	0
10	QPSK	1	25	22.55	22.34	22.39		
10	QPSK	1	49	22.25	22.41	22.34		
10	QPSK	25	0	21.34	21.63	21.46	23	1
10	QPSK	25	12	21.47	21.53	21.39		
10	QPSK	25	25	21.41	21.31	21.24		
10	QPSK	50	0	21.36	21.42	21.35	23	1
10	16QAM	1	0	21.59	21.64	21.59		
10	16QAM	1	25	21.74	21.74	21.72		
10	16QAM	1	49	21.40	21.64	21.31	22	2
10	16QAM	25	0	20.25	20.52	20.43		
10	16QAM	25	12	20.38	20.46	20.38		
10	16QAM	25	25	20.34	20.21	20.24	22	2
10	16QAM	50	0	20.29	20.34	20.35		
10	64QAM	1	0	20.69	20.63	20.62		
10	64QAM	1	25	20.61	20.67	20.57	21	3
10	64QAM	1	49	20.74	20.61	20.27		
10	64QAM	25	0	19.83	19.64	19.61		
10	64QAM	25	12	19.89	19.56	19.57	21	3
10	64QAM	25	25	19.64	19.64	19.42		
10	64QAM	50	0	19.49	19.51	19.53		



FCC SAR Test Report

Report No. : FA932901-02

Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.27	22.27	22.49	24	0
5	QPSK	1	12	22.44	22.22	22.44		
5	QPSK	1	24	22.39	22.27	22.27		
5	QPSK	12	0	21.31	21.31	21.04	23	1
5	QPSK	12	7	21.38	21.24	21.03		
5	QPSK	12	13	21.39	21.13	21.39		
5	QPSK	25	0	21.31	21.21	21.01	23	1
5	16QAM	1	0	21.30	21.46	21.19		
5	16QAM	1	12	21.55	21.47	21.32		
5	16QAM	1	24	21.60	21.23	21.47	22	2
5	16QAM	12	0	20.21	20.29	20.05		
5	16QAM	12	7	20.31	20.26	20.02		
5	16QAM	12	13	20.34	20.18	20.01	22	2
5	16QAM	25	0	20.27	20.23	20.03		
5	64QAM	1	0	20.31	20.58	20.32		
5	64QAM	1	12	20.65	20.44	20.26	22	2
5	64QAM	1	24	20.63	20.27	20.21		
5	64QAM	12	0	19.36	19.45	19.19		
5	64QAM	12	7	19.45	19.44	19.20	21	3
5	64QAM	12	13	19.44	19.34	19.16		
5	64QAM	25	0	19.87	19.41	19.44		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.49	22.05	22.01	24	0
3	QPSK	1	8	22.22	22.22	22.44		
3	QPSK	1	14	22.27	22.27	22.27		
3	QPSK	8	0	21.50	21.40	21.55	23	1
3	QPSK	8	4	21.54	21.40	21.50		
3	QPSK	8	7	21.55	21.38	21.40		
3	QPSK	15	0	21.50	21.07	21.23	23	1
3	16QAM	1	0	21.64	21.39	21.42		
3	16QAM	1	8	21.70	21.42	21.42		
3	16QAM	1	14	21.84	21.42	21.42	22	2
3	16QAM	8	0	20.47	20.16	20.10		
3	16QAM	8	4	20.51	20.12	20.09		
3	16QAM	8	7	20.57	20.11	20.07	22	2
3	16QAM	15	0	20.47	20.12	20.06		
3	64QAM	1	0	20.54	20.45	20.21		
3	64QAM	1	8	20.45	20.31	20.41	22	2
3	64QAM	1	14	20.45	20.23	20.22		
3	64QAM	8	0	19.59	19.40	19.26		
3	64QAM	8	4	19.66	19.33	19.27	21	3
3	64QAM	8	7	19.66	19.31	19.25		
3	64QAM	15	0	19.62	19.33	19.24		

Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.22	22.49	22.27	24	0
1.4	QPSK	1	3	22.50	22.22	22.22		
1.4	QPSK	1	5	22.51	22.27	22.27		
1.4	QPSK	3	0	22.39	22.05	22.01		
1.4	QPSK	3	1	22.39	22.22	22.44		
1.4	QPSK	3	3	22.37	22.27	22.27		
1.4	QPSK	6	0	21.37	21.23	21.10	23	1
1.4	16QAM	1	0	21.67	21.40	21.40	23	1
1.4	16QAM	1	3	21.67	21.23	21.40		
1.4	16QAM	1	5	21.65	21.40	21.23		
1.4	16QAM	3	0	21.41	21.04	21.23		
1.4	16QAM	3	1	21.40	21.02	21.14		
1.4	16QAM	3	3	21.43	21.14	21.10		
1.4	16QAM	6	0	20.35	20.56	20.26	22	2
1.4	64QAM	1	0	20.59	20.28	20.21	22	2
1.4	64QAM	1	3	20.65	20.18	20.28		
1.4	64QAM	1	5	20.56	20.26	20.56		
1.4	64QAM	3	0	20.46	20.19	20.12		
1.4	64QAM	3	1	20.55	20.18	20.10		
1.4	64QAM	3	3	20.52	20.14	20.08		
1.4	64QAM	6	0	19.46	19.19	19.08	21	3

<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.07	18.12	18.53	20	0
20	QPSK	1	49	18.34	18.07	18.48		
20	QPSK	1	99	18.06	18.54	18.34		
20	QPSK	50	0	18.11	18.45	18.44	20	0
20	QPSK	50	24	18.03	18.43	18.44		
20	QPSK	50	50	18.05	18.07	18.39		
20	QPSK	100	0	18.09	18.04	18.45	20	0
20	16QAM	1	0	18.12	18.11	18.30		
20	16QAM	1	49	18.10	18.07	18.27		
20	16QAM	1	99	18.13	18.04	18.27	20	0
20	16QAM	50	0	18.11	18.11	18.49		
20	16QAM	50	24	18.11	18.10	18.50		
20	16QAM	50	50	18.06	18.12	18.47	20	0
20	16QAM	100	0	18.08	18.04	18.45		
20	64QAM	1	0	18.08	18.10	18.40		
20	64QAM	1	49	18.03	18.12	18.40	20	0
20	64QAM	1	99	18.18	18.36	18.45		
20	64QAM	50	0	18.08	18.13	18.45		
20	64QAM	50	24	18.11	18.13	18.51	20	0
20	64QAM	50	50	18.08	18.14	18.48		
20	64QAM	100	0	18.11	18.17	18.50		



FCC SAR Test Report

Report No. : FA932901-02

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.10	18.02	18.50	20	0
15	QPSK	1	37	18.00	18.06	18.46		
15	QPSK	1	74	18.06	18.05	18.33		
15	QPSK	36	0	18.05	18.03	18.46	20	0
15	QPSK	36	20	18.00	18.06	18.44		
15	QPSK	36	39	18.02	18.04	18.39		
15	QPSK	75	0	18.04	18.07	18.43	20	0
15	16QAM	1	0	18.11	18.02	18.41		
15	16QAM	1	37	18.15	18.09	18.37		
15	16QAM	1	74	18.03	18.11	18.06	20	0
15	16QAM	36	0	18.07	18.03	18.50		
15	16QAM	36	20	18.02	18.09	18.45		
15	16QAM	36	39	18.02	18.02	18.40	20	0
15	16QAM	75	0	18.07	18.10	18.46		
15	64QAM	1	0	18.02	18.01	18.48		
15	64QAM	1	37	18.07	18.02	18.37	20	0
15	64QAM	1	74	18.02	18.06	18.26		
15	64QAM	36	0	18.02	18.06	18.42		
15	64QAM	36	20	18.07	18.09	18.45	20	0
15	64QAM	36	39	18.05	18.05	18.40		
15	64QAM	75	0	18.07	18.08	18.48		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.06	18.07	18.55	20	0
10	QPSK	1	25	18.09	18.06	18.49		
10	QPSK	1	49	18.06	18.06	18.42		
10	QPSK	25	0	18.08	18.07	18.45	20	0
10	QPSK	25	12	18.11	18.07	18.42		
10	QPSK	25	25	18.01	18.09	18.43		
10	QPSK	50	0	18.17	18.03	18.42	20	0
10	16QAM	1	0	18.02	18.07	18.42		
10	16QAM	1	25	18.06	18.09	18.28		
10	16QAM	1	49	18.14	18.00	18.23	20	0
10	16QAM	25	0	18.06	18.07	18.45		
10	16QAM	25	12	18.03	18.09	18.47		
10	16QAM	25	25	18.07	18.11	18.46	20	0
10	16QAM	50	0	18.03	18.12	18.43		
10	64QAM	1	0	18.15	18.11	18.41		
10	64QAM	1	25	18.14	18.07	18.45	20	0
10	64QAM	1	49	18.06	18.03	18.25		
10	64QAM	25	0	18.10	18.08	18.50		
10	64QAM	25	12	18.04	18.06	18.47	20	0
10	64QAM	25	25	18.04	18.09	18.42		
10	64QAM	50	0	18.10	18.11	18.52		

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.00	18.04	18.49	20	0
5	QPSK	1	12	18.03	18.02	18.35		
5	QPSK	1	24	18.12	18.07	18.40		
5	QPSK	12	0	18.09	18.02	18.44	20	0
5	QPSK	12	7	18.04	18.01	18.39		
5	QPSK	12	13	18.12	18.05	18.36		
5	QPSK	25	0	18.19	18.01	18.39	20	0
5	16QAM	1	0	18.05	18.05	18.28		
5	16QAM	1	12	18.05	18.05	18.25		
5	16QAM	1	24	18.04	18.07	18.35	20	0
5	16QAM	12	0	18.10	18.16	18.45		
5	16QAM	12	7	18.01	18.04	18.37		
5	16QAM	12	13	18.00	18.05	18.29	20	0
5	16QAM	25	0	18.19	18.09	18.45		
5	64QAM	1	0	18.10	18.16	18.39		
5	64QAM	1	12	18.01	18.04	18.36	20	0
5	64QAM	1	24	18.10	18.16	18.39		
5	64QAM	12	0	18.00	18.05	18.45		
5	64QAM	12	7	18.00	18.03	18.42	20	0
5	64QAM	12	13	18.17	18.03	18.41		
5	64QAM	25	0	18.12	18.09	18.44		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.05	18.10	18.45	20	0
3	QPSK	1	8	18.08	18.08	18.42		
3	QPSK	1	14	18.02	18.11	18.40		
3	QPSK	8	0	18.13	18.09	18.42	20	0
3	QPSK	8	4	18.14	18.08	18.39		
3	QPSK	8	7	18.15	18.04	18.39		
3	QPSK	15	0	18.04	18.01	18.44	20	0
3	16QAM	1	0	18.06	18.11	18.32		
3	16QAM	1	8	18.13	18.08	18.23		
3	16QAM	1	14	18.09	18.04	18.14	20	0
3	16QAM	8	0	18.12	18.10	18.42		
3	16QAM	8	4	18.00	18.02	18.43		
3	16QAM	8	7	18.08	18.03	18.40	20	0
3	16QAM	15	0	18.04	18.05	18.45		
3	64QAM	1	0	18.01	18.11	18.48		
3	64QAM	1	8	18.09	18.08	18.40	20	0
3	64QAM	1	14	18.14	18.14	18.48		
3	64QAM	8	0	18.01	18.03	18.40		
3	64QAM	8	4	18.11	18.09	18.44	20	0
3	64QAM	8	7	18.00	18.03	18.45		
3	64QAM	15	0	18.01	18.07	18.44		

Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.11	18.06	18.29	20	0
1.4	QPSK	1	3	18.09	18.04	18.30		
1.4	QPSK	1	5	18.12	18.01	18.30		
1.4	QPSK	3	0	18.03	18.06	18.37		
1.4	QPSK	3	1	18.09	18.05	18.37		
1.4	QPSK	3	3	18.12	18.03	18.38		
1.4	QPSK	6	0	18.09	18.04	18.36	20	0
1.4	16QAM	1	0	18.15	18.12	18.34	20	0
1.4	16QAM	1	3	18.10	18.02	18.22		
1.4	16QAM	1	5	18.09	18.05	18.09		
1.4	16QAM	3	0	18.02	18.00	18.37		
1.4	16QAM	3	1	18.02	18.02	18.25		
1.4	16QAM	3	3	18.02	18.02	18.23		
1.4	16QAM	6	0	18.14	18.06	18.28	20	0
1.4	64QAM	1	0	18.17	18.06	18.42	20	0
1.4	64QAM	1	3	18.16	18.04	18.46		
1.4	64QAM	1	5	18.04	18.05	18.39		
1.4	64QAM	3	0	18.09	18.11	18.32		
1.4	64QAM	3	1	18.04	18.09	18.34		
1.4	64QAM	3	3	18.02	18.08	18.32		
1.4	64QAM	6	0	18.02	18.03	18.36	20	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	17.76	17.98	17.82	19.5	0
20	QPSK	1	49	17.72	17.73	17.79		
20	QPSK	1	99	17.69	17.68	17.82		
20	QPSK	50	0	17.75	17.84	17.81	19.5	0
20	QPSK	50	24	17.69	17.77	17.77		
20	QPSK	50	50	17.68	17.79	17.81		
20	QPSK	100	0	17.67	17.77	17.84		
20	16QAM	1	0	17.52	17.55	17.52	19.5	0
20	16QAM	1	49	17.51	17.51	17.51		
20	16QAM	1	99	17.58	17.62	17.67		
20	16QAM	50	0	17.74	17.77	17.92	19.5	0
20	16QAM	50	24	17.75	17.83	17.96		
20	16QAM	50	50	17.74	17.78	17.95		
20	16QAM	100	0	17.72	17.76	17.90		
20	64QAM	1	0	17.75	17.92	17.75	19.5	0
20	64QAM	1	49	17.68	17.92	17.73		
20	64QAM	1	99	17.83	17.72	17.84		
20	64QAM	50	0	17.77	17.75	17.92	19.5	0
20	64QAM	50	24	17.70	17.83	17.94		
20	64QAM	50	50	17.73	17.69	17.87		
20	64QAM	100	0	17.79	17.78	17.66		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	17.84	17.83	17.92	19.5	0
15	QPSK	1	37	17.78	17.75	17.92		
15	QPSK	1	74	17.75	17.76	17.88		
15	QPSK	36	0	17.73	17.78	17.86	19.5	0
15	QPSK	36	20	17.73	17.76	17.84		
15	QPSK	36	39	17.72	17.74	17.83		
15	QPSK	75	0	17.69	17.76	17.88	19.5	0
15	16QAM	1	0	17.50	17.54	17.57		
15	16QAM	1	37	17.56	17.55	17.58		
15	16QAM	1	74	17.57	17.67	17.55	19.5	0
15	16QAM	36	0	17.74	17.80	17.83		
15	16QAM	36	20	17.67	17.70	17.88		
15	16QAM	36	39	17.77	17.79	17.89	19.5	0
15	16QAM	75	0	17.74	17.88	17.93		
15	64QAM	1	0	17.85	17.88	17.88		
15	64QAM	1	37	17.88	17.55	17.96	19.5	0
15	64QAM	1	74	17.85	17.84	17.87		
15	64QAM	36	0	17.81	17.87	17.93		
15	64QAM	36	20	17.76	17.87	17.94	19.5	0
15	64QAM	36	39	17.74	17.87	17.93		
15	64QAM	75	0	17.81	17.75	17.89		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	17.77	17.74	17.90	19.5	0
10	QPSK	1	25	17.80	17.70	17.88		
10	QPSK	1	49	17.80	17.76	17.84		
10	QPSK	25	0	17.76	17.74	17.94	19.5	0
10	QPSK	25	12	17.73	17.69	17.88		
10	QPSK	25	25	17.75	17.67	17.88		
10	QPSK	50	0	17.77	17.74	17.86	19.5	0
10	16QAM	1	0	17.61	17.54	17.69		
10	16QAM	1	25	17.67	17.65	17.53		
10	16QAM	1	49	17.51	17.68	17.73	19.5	0
10	16QAM	25	0	17.77	17.70	17.95		
10	16QAM	25	12	17.79	17.74	17.90		
10	16QAM	25	25	17.76	17.81	17.92	19.5	0
10	16QAM	50	0	17.79	17.80	17.94		
10	64QAM	1	0	17.79	17.66	17.90		
10	64QAM	1	25	17.73	17.78	17.87	19.5	0
10	64QAM	1	49	17.80	17.67	17.93		
10	64QAM	25	0	17.78	17.82	17.87		
10	64QAM	25	12	17.76	17.80	17.90	19.5	0
10	64QAM	25	25	17.70	17.69	17.93		
10	64QAM	50	0	17.74	17.77	17.94		

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	17.77	17.80	17.83	19.5	0
5	QPSK	1	12	17.71	17.83	17.83		
5	QPSK	1	24	17.71	17.78	17.91		
5	QPSK	12	0	17.74	17.75	17.90	19.5	0
5	QPSK	12	7	17.73	17.73	17.86		
5	QPSK	12	13	17.71	17.66	17.95		
5	QPSK	25	0	17.73	17.70	17.88	19.5	0
5	16QAM	1	0	17.52	17.64	17.57		
5	16QAM	1	12	17.68	17.70	17.57		
5	16QAM	1	24	17.64	17.69	17.71	19.5	0
5	16QAM	12	0	17.75	17.75	17.93		
5	16QAM	12	7	17.74	17.68	17.80		
5	16QAM	12	13	17.64	17.73	17.86	19.5	0
5	16QAM	25	0	17.80	17.75	17.97		
5	64QAM	1	0	17.88	17.78	17.73		
5	64QAM	1	12	17.73	17.76	17.70	19.5	0
5	64QAM	1	24	17.76	17.78	17.79		
5	64QAM	12	0	17.80	17.78	17.89		
5	64QAM	12	7	17.77	17.83	17.87	19.5	0
5	64QAM	12	13	17.70	17.78	17.85		
5	64QAM	25	0	17.71	17.82	17.97		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	17.78	17.75	17.91	19.5	0
3	QPSK	1	8	17.80	17.72	17.92		
3	QPSK	1	14	17.84	17.70	17.89		
3	QPSK	8	0	17.73	17.74	17.92	19.5	0
3	QPSK	8	4	17.70	17.75	17.86		
3	QPSK	8	7	17.71	17.77	17.89		
3	QPSK	15	0	17.75	17.73	17.92	19.5	0
3	16QAM	1	0	17.72	17.71	17.81		
3	16QAM	1	8	17.64	17.62	17.84		
3	16QAM	1	14	17.56	17.73	17.89	19.5	0
3	16QAM	8	0	17.72	17.77	17.93		
3	16QAM	8	4	17.66	17.78	17.95		
3	16QAM	8	7	17.76	17.82	17.94	19.5	0
3	16QAM	15	0	17.62	17.76	17.91		
3	64QAM	1	0	17.70	17.85	17.93		
3	64QAM	1	8	17.63	17.77	17.95	19.5	0
3	64QAM	1	14	17.82	17.80	17.94		
3	64QAM	8	0	17.79	17.83	17.96		
3	64QAM	8	4	17.78	17.80	17.90	19.5	0
3	64QAM	8	7	17.79	17.69	17.94		
3	64QAM	15	0	17.72	17.77	17.91		

Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	17.78	17.67	17.91	19.5	0
1.4	QPSK	1	3	17.74	17.75	17.86		
1.4	QPSK	1	5	17.72	17.75	17.84		
1.4	QPSK	3	0	17.72	17.68	17.86		
1.4	QPSK	3	1	17.74	17.69	17.93		
1.4	QPSK	3	3	17.77	17.77	17.96		
1.4	QPSK	6	0	17.74	17.79	17.84	19.5	0
1.4	16QAM	1	0	17.70	17.50	17.82	19.5	0
1.4	16QAM	1	3	17.59	17.61	17.88		
1.4	16QAM	1	5	17.61	17.52	17.67		
1.4	16QAM	3	0	17.59	17.71	17.92		
1.4	16QAM	3	1	17.67	17.78	17.91		
1.4	16QAM	3	3	17.53	17.79	17.90		
1.4	16QAM	6	0	17.67	17.73	17.85	19.5	0
1.4	64QAM	1	0	17.79	17.75	17.92	19.5	0
1.4	64QAM	1	3	17.64	17.68	17.87		
1.4	64QAM	1	5	17.71	17.78	17.90		
1.4	64QAM	3	0	17.55	17.70	17.89		
1.4	64QAM	3	1	17.58	17.74	17.85		
1.4	64QAM	3	3	17.61	17.61	17.83		
1.4	64QAM	6	0	17.71	17.64	17.89	19.5	0

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.39	20.24	20.38	21.5	0
10	QPSK	1	25	20.33	20.26	20.28		
10	QPSK	1	49	20.28	20.20	20.24		
10	QPSK	25	0	20.29	20.28	20.32	21.5	0
10	QPSK	25	12	20.29	20.26	20.30		
10	QPSK	25	25	20.29	20.23	20.22		
10	QPSK	50	0	20.32	20.22	20.26	21.5	0
10	16QAM	1	0	20.19	20.11	20.03		
10	16QAM	1	25	20.03	20.01	19.99		
10	16QAM	1	49	19.99	19.85	20.06	21.5	0
10	16QAM	25	0	20.28	20.32	20.37		
10	16QAM	25	12	20.30	20.28	20.27		
10	16QAM	25	25	20.22	20.25	20.32	21.5	0
10	16QAM	50	0	20.33	20.27	20.27		
10	64QAM	1	0	20.12	20.15	20.03		
10	64QAM	1	25	20.11	19.97	20.03	21.5	0
10	64QAM	1	49	20.11	20.01	20.08		
10	64QAM	25	0	19.82	19.75	19.88		
10	64QAM	25	12	19.76	19.78	19.86	21	0.5
10	64QAM	25	25	19.74	19.68	19.76		
10	64QAM	50	0	19.85	19.74	19.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.20	20.38	20.38	21.5	0
5	QPSK	1	12	20.30	20.22	20.30		
5	QPSK	1	24	20.25	20.19	20.25		
5	QPSK	12	0	20.38	20.25	20.25	21.5	0
5	QPSK	12	7	20.34	20.22	20.31		
5	QPSK	12	13	20.35	20.26	20.24		
5	QPSK	25	0	20.33	20.20	20.29	21.5	0
5	16QAM	1	0	20.37	20.35	20.27		
5	16QAM	1	12	20.21	20.21	20.07		
5	16QAM	1	24	20.33	20.20	20.15	21.5	0
5	16QAM	12	0	20.31	20.15	20.30		
5	16QAM	12	7	20.27	20.20	20.23		
5	16QAM	12	13	20.31	20.16	20.21	21.5	0
5	16QAM	25	0	20.36	20.27	20.30		
5	64QAM	1	0	20.22	20.31	20.16		
5	64QAM	1	12	20.15	20.23	20.27	21.5	0
5	64QAM	1	24	20.18	20.06	20.14		
5	64QAM	12	0	19.88	19.74	19.71		
5	64QAM	12	7	19.87	19.60	19.69	21	0.5
5	64QAM	12	13	19.83	19.68	19.74		
5	64QAM	25	0	19.86	19.75	19.69		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.37	20.25	20.28	21.5	0
3	QPSK	1	8	20.33	20.25	20.29		
3	QPSK	1	14	20.34	20.27	20.27		
3	QPSK	8	0	20.37	20.25	20.31	21.5	0
3	QPSK	8	4	20.23	20.21	20.30		
3	QPSK	8	7	20.31	20.22	20.28		
3	QPSK	15	0	20.27	20.25	20.31	21.5	0
3	16QAM	1	0	20.10	19.93	20.20		
3	16QAM	1	8	20.30	19.93	20.06		
3	16QAM	1	14	20.23	20.25	20.20	21.5	0
3	16QAM	8	0	20.36	20.23	20.30		
3	16QAM	8	4	20.37	20.16	20.24		
3	16QAM	8	7	20.29	20.24	20.24	21.5	0
3	16QAM	15	0	20.27	19.87	20.28		
3	64QAM	1	0	20.11	20.17	20.02		
3	64QAM	1	8	20.17	20.04	20.17	21.5	0
3	64QAM	1	14	20.13	20.30	20.04		
3	64QAM	8	0	19.71	19.78	19.76		
3	64QAM	8	4	19.75	19.71	19.81	21	0.5
3	64QAM	8	7	19.74	19.67	19.79		
3	64QAM	15	0	19.85	19.36	19.75		

Channel				20.2	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.28	20.14	20.27	21.5	0
1.4	QPSK	1	3	20.32	20.23	20.28		
1.4	QPSK	1	5	20.32	20.17	20.32		
1.4	QPSK	3	0	20.37	20.31	20.29		
1.4	QPSK	3	1	20.35	20.33	20.28		
1.4	QPSK	3	3	20.30	20.26	20.22		
1.4	QPSK	6	0	20.31	20.21	20.25	21.5	0
1.4	16QAM	1	0	20.21	20.29	19.93	21.5	0
1.4	16QAM	1	3	20.06	20.11	19.84		
1.4	16QAM	1	5	20.22	20.14	20.01		
1.4	16QAM	3	0	20.20	20.17	20.24		
1.4	16QAM	3	1	20.23	20.21	20.10		
1.4	16QAM	3	3	20.23	20.18	20.10		
1.4	16QAM	6	0	20.21	20.17	20.27	21.5	0
1.4	64QAM	1	0	19.88	19.97	19.97	21.5	0
1.4	64QAM	1	3	19.89	19.96	19.73		
1.4	64QAM	1	5	19.89	19.82	19.91		
1.4	64QAM	3	0	20.17	20.15	20.18		
1.4	64QAM	3	1	20.18	20.18	20.19		
1.4	64QAM	3	3	20.29	20.15	20.16		
1.4	64QAM	6	0	19.63	19.78	19.77	21	0.5

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.80	18.76	18.91	20	0
20	QPSK	1	49	18.73	18.71	18.85		
20	QPSK	1	99	18.80	18.88	18.81		
20	QPSK	50	0	18.74	18.76	18.76	20	0
20	QPSK	50	24	18.68	18.60	18.75		
20	QPSK	50	50	18.73	18.74	18.76		
20	QPSK	100	0	18.68	18.62	18.70	20	0
20	16QAM	1	0	18.85	18.78	18.66		
20	16QAM	1	49	18.73	18.70	18.69		
20	16QAM	1	99	18.65	18.55	18.64	20	0
20	16QAM	50	0	18.70	18.70	18.76		
20	16QAM	50	24	18.89	18.62	18.74		
20	16QAM	50	50	18.85	18.90	18.76	20	0
20	16QAM	100	0	18.89	18.90	18.63		
20	64QAM	1	0	18.75	18.74	18.83		
20	64QAM	1	49	18.74	18.81	18.83	20	0
20	64QAM	1	99	18.80	18.79	18.80		
20	64QAM	50	0	18.62	18.74	18.71	20	0
20	64QAM	50	24	18.86	18.80	18.76		
20	64QAM	50	50	18.70	18.76	18.90		
20	64QAM	100	0	18.80	18.84	18.84		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.73	18.74	18.81	20	0
15	QPSK	1	37	18.88	18.62	18.87		
15	QPSK	1	74	18.85	18.88	18.85		
15	QPSK	36	0	18.62	18.89	18.90	20	0
15	QPSK	36	20	18.77	18.89	18.87		
15	QPSK	36	39	18.88	18.87	18.84		
15	QPSK	75	0	18.63	18.61	18.90	20	0
15	16QAM	1	0	18.81	18.88	18.71		
15	16QAM	1	37	18.73	18.68	18.69		
15	16QAM	1	74	18.81	18.59	18.63	20	0
15	16QAM	36	0	18.76	18.84	18.87		
15	16QAM	36	20	18.84	18.88	18.89		
15	16QAM	36	39	18.85	18.85	18.81	20	0
15	16QAM	75	0	18.63	18.61	18.90		
15	64QAM	1	0	18.64	18.76	18.86		
15	64QAM	1	37	18.70	18.71	18.81	20	0
15	64QAM	1	74	18.61	18.56	18.75		
15	64QAM	36	0	18.74	18.70	18.86		
15	64QAM	36	20	18.89	18.90	18.63	20	0
15	64QAM	36	39	18.62	18.74	18.88		
15	64QAM	75	0	18.62	18.73	18.69		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.75	18.62	18.62	20	0
10	QPSK	1	25	18.73	18.62	18.73		
10	QPSK	1	49	18.86	18.62	18.76		
10	QPSK	25	0	18.71	18.88	18.63	20	0
10	QPSK	25	12	18.65	18.73	18.73		
10	QPSK	25	25	18.42	18.88	18.90		
10	QPSK	50	0	18.72	18.88	18.88	20	0
10	16QAM	1	0	18.81	18.67	18.69		
10	16QAM	1	25	18.82	18.66	18.79		
10	16QAM	1	49	18.78	18.73	18.66	20	0
10	16QAM	25	0	18.71	18.71	18.77		
10	16QAM	25	12	18.71	18.73	18.74		
10	16QAM	25	25	18.72	18.73	18.75	20	0
10	16QAM	50	0	18.75	18.75	18.88		
10	64QAM	1	0	18.69	18.73	18.84		
10	64QAM	1	25	18.69	18.73	18.65	20	0
10	64QAM	1	49	18.65	18.68	18.57		
10	64QAM	25	0	18.71	18.76	18.77		
10	64QAM	25	12	18.73	18.72	18.89	20	0
10	64QAM	25	25	18.90	18.90	18.90		
10	64QAM	50	0	18.76	18.72	18.76		

Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.89	18.73	18.83	20	0
5	QPSK	1	12	18.89	18.75	18.90		
5	QPSK	1	24	18.76	18.89	18.72		
5	QPSK	12	0	18.88	18.87	18.75	20	0
5	QPSK	12	7	18.62	18.74	18.73		
5	QPSK	12	13	18.75	18.75	18.73		
5	QPSK	25	0	18.74	18.61	18.72	20	0
5	16QAM	1	0	18.90	18.75	18.82		
5	16QAM	1	12	18.86	18.72	18.84		
5	16QAM	1	24	18.71	18.79	18.81	20	0
5	16QAM	12	0	18.71	18.80	18.63		
5	16QAM	12	7	18.73	18.76	18.89		
5	16QAM	12	13	18.72	18.87	18.61	20	0
5	16QAM	25	0	18.78	18.61	18.76		
5	64QAM	1	0	18.66	18.53	18.76		
5	64QAM	1	12	18.62	18.76	18.61	20	0
5	64QAM	1	24	18.41	18.57	18.75		
5	64QAM	12	0	18.90	18.82	18.88		
5	64QAM	12	7	18.85	18.81	18.87	20	0
5	64QAM	12	13	18.87	18.84	18.85		
5	64QAM	25	0	18.72	18.70	18.70		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	18.20	18.19	18.51	20	0
20	QPSK	1	49	18.19	18.21	18.50		
20	QPSK	1	99	18.09	18.29	18.37		
20	QPSK	50	0	18.19	18.27	18.35	20	0
20	QPSK	50	24	18.15	18.22	18.44		
20	QPSK	50	50	18.12	18.20	18.46		
20	QPSK	100	0	18.22	18.19	18.33	20	0
20	16QAM	1	0	18.19	18.16	18.36		
20	16QAM	1	49	18.15	18.10	18.30		
20	16QAM	1	99	18.12	18.12	18.10	20	0
20	16QAM	50	0	18.19	18.26	18.36		
20	16QAM	50	24	18.23	18.29	18.30		
20	16QAM	50	50	18.20	18.29	18.33	20	0
20	16QAM	100	0	18.17	18.27	18.48		
20	64QAM	1	0	18.24	18.27	18.36		
20	64QAM	1	49	18.05	18.17	18.30	20	0
20	64QAM	1	99	18.01	18.10	18.44		
20	64QAM	50	0	18.25	18.28	18.46		
20	64QAM	50	24	18.20	18.21	18.33	20	0
20	64QAM	50	50	18.20	18.30	18.42		
20	64QAM	100	0	18.21	18.30	18.35		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	18.15	18.33	18.43	20	0
15	QPSK	1	37	18.21	18.31	18.35		
15	QPSK	1	74	18.11	18.24	18.24		
15	QPSK	36	0	18.21	18.23	18.35	20	0
15	QPSK	36	20	18.08	18.23	18.34		
15	QPSK	36	39	18.06	18.19	18.28		
15	QPSK	75	0	18.15	18.25	18.25	20	0
15	16QAM	1	0	18.27	18.06	18.40		
15	16QAM	1	37	18.04	18.16	18.27		
15	16QAM	1	74	18.10	18.14	18.14	20	0
15	16QAM	36	0	18.18	18.30	18.32		
15	16QAM	36	20	18.15	18.21	18.31		
15	16QAM	36	39	18.16	18.27	18.28	20	0
15	16QAM	75	0	18.19	18.33	18.34		
15	64QAM	1	0	18.20	18.28	18.45		
15	64QAM	1	37	18.10	18.29	18.36	20	0
15	64QAM	1	74	18.13	18.49	18.30		
15	64QAM	36	0	18.22	18.33	18.45		
15	64QAM	36	20	18.24	18.43	18.43	20	0
15	64QAM	36	39	18.24	18.39	18.39		
15	64QAM	75	0	18.22	18.27	18.35		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	18.26	18.22	18.43	20	0
10	QPSK	1	25	18.24	18.22	18.34		
10	QPSK	1	49	18.13	18.28	18.39		
10	QPSK	25	0	18.11	18.20	18.39	20	0
10	QPSK	25	12	18.13	18.23	18.36		
10	QPSK	25	25	18.13	18.28	18.29		
10	QPSK	50	0	18.13	18.29	18.37	20	0
10	16QAM	1	0	18.11	18.10	18.24		
10	16QAM	1	25	18.10	18.09	18.21		
10	16QAM	1	49	18.07	18.26	18.25	20	0
10	16QAM	25	0	18.25	18.28	18.36		
10	16QAM	25	12	18.22	18.33	18.42		
10	16QAM	25	25	18.16	18.28	18.33	20	0
10	16QAM	50	0	18.22	18.29	18.43		
10	64QAM	1	0	18.10	18.37	18.31		
10	64QAM	1	25	18.30	18.33	18.47	20	0
10	64QAM	1	49	18.30	18.31	18.37		
10	64QAM	25	0	18.19	18.27	18.43		
10	64QAM	25	12	18.23	18.32	18.42	20	0
10	64QAM	25	25	18.22	18.29	18.32		
10	64QAM	50	0	18.22	18.31	18.37		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	18.18	18.15	18.36	20	0
5	QPSK	1	12	18.16	18.16	18.33		
5	QPSK	1	24	18.12	18.19	18.30		
5	QPSK	12	0	18.15	18.16	18.34	20	0
5	QPSK	12	7	18.10	18.17	18.26		
5	QPSK	12	13	18.12	18.12	18.32		
5	QPSK	25	0	18.09	18.18	18.30	20	0
5	16QAM	1	0	18.09	18.07	18.37		
5	16QAM	1	12	18.08	18.07	18.01		
5	16QAM	1	24	18.11	18.20	18.09	20	0
5	16QAM	12	0	18.12	18.13	18.36		
5	16QAM	12	7	18.09	18.11	18.28		
5	16QAM	12	13	18.09	18.11	18.33	20	0
5	16QAM	25	0	18.18	18.25	18.29		
5	64QAM	1	0	18.26	18.11	18.48		
5	64QAM	1	12	18.11	18.23	18.35	20	0
5	64QAM	1	24	18.17	18.14	18.41		
5	64QAM	12	0	18.20	18.06	18.32		
5	64QAM	12	7	18.11	18.21	18.28	20	0
5	64QAM	12	13	18.12	18.14	18.33		
5	64QAM	25	0	18.09	18.30	18.37		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	18.17	18.12	18.34	20	0
3	QPSK	1	8	18.18	18.17	18.34		
3	QPSK	1	14	18.15	18.18	18.36		
3	QPSK	8	0	18.14	18.11	18.34	20	0
3	QPSK	8	4	18.12	18.17	18.31		
3	QPSK	8	7	18.11	18.24	18.33		
3	QPSK	15	0	18.10	18.18	18.35	20	0
3	16QAM	1	0	18.01	18.14	18.21		
3	16QAM	1	8	18.14	18.09	18.15		
3	16QAM	1	14	18.11	18.10	18.24	20	0
3	16QAM	8	0	18.11	18.22	18.25		
3	16QAM	8	4	18.20	18.27	18.37		
3	16QAM	8	7	18.08	18.23	18.35	20	0
3	16QAM	15	0	18.08	18.23	18.26		
3	64QAM	1	0	18.29	18.25	18.39		
3	64QAM	1	8	18.25	18.22	18.45	20	0
3	64QAM	1	14	18.19	18.49	18.49		
3	64QAM	8	0	18.14	18.27	18.29		
3	64QAM	8	4	18.20	18.17	18.42	20	0
3	64QAM	8	7	18.21	18.27	18.36		
3	64QAM	15	0	18.11	18.20	18.35		

Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	18.15	18.15	18.35	20	0
1.4	QPSK	1	3	18.11	18.23	18.33		
1.4	QPSK	1	5	18.18	18.20	18.29		
1.4	QPSK	3	0	18.16	18.22	18.34		
1.4	QPSK	3	1	18.17	18.23	18.31		
1.4	QPSK	3	3	18.12	18.19	18.33		
1.4	QPSK	6	0	18.14	18.12	18.32	20	0
1.4	16QAM	1	0	18.19	18.11	18.16	20	0
1.4	16QAM	1	3	18.19	18.05	18.27		
1.4	16QAM	1	5	18.09	18.11	18.39		
1.4	16QAM	3	0	18.18	18.18	18.30		
1.4	16QAM	3	1	18.17	18.02	18.29		
1.4	16QAM	3	3	18.10	18.11	18.26		
1.4	16QAM	6	0	18.15	18.32	18.34	20	0
1.4	64QAM	1	0	18.02	18.40	18.42	20	0
1.4	64QAM	1	3	18.22	18.30	18.43		
1.4	64QAM	1	5	18.26	18.42	18.38		
1.4	64QAM	3	0	18.13	18.17	18.23		
1.4	64QAM	3	1	18.25	18.15	18.28		
1.4	64QAM	3	3	18.18	18.20	18.24		
1.4	64QAM	6	0	18.19	18.17	18.36	20	0

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	20.08	20.15	19.96	21.5	0
15	QPSK	1	37	19.93	19.94	19.90		
15	QPSK	1	74	19.84	19.82	19.81		
15	QPSK	36	0	20.00	19.93	19.89	21.5	0
15	QPSK	36	20	19.98	19.90	19.96		
15	QPSK	36	39	19.93	19.83	19.85		
15	QPSK	75	0	19.99	19.92	19.85	21.5	0
15	16QAM	1	0	20.04	19.82	19.91		
15	16QAM	1	37	19.98	19.84	19.71		
15	16QAM	1	74	19.78	19.66	19.63	21.5	0
15	16QAM	36	0	19.99	19.87	19.85		
15	16QAM	36	20	19.89	19.86	19.82		
15	16QAM	36	39	19.86	19.82	19.81	21.5	0
15	16QAM	75	0	19.98	19.93	19.89		
15	64QAM	1	0	20.10	20.00	19.95		
15	64QAM	1	37	19.95	19.80	19.81	21.5	0
15	64QAM	1	74	19.96	19.87	19.72		
15	64QAM	36	0	19.57	19.55	19.53	21	0.5
15	64QAM	36	20	19.52	19.51	19.53		
15	64QAM	36	39	19.51	19.60	19.61		
15	64QAM	75	0	19.59	19.69	19.63		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	20.10	19.99	19.96	21.5	0
10	QPSK	1	25	20.00	19.96	19.84		
10	QPSK	1	49	19.97	19.87	19.83		
10	QPSK	25	0	20.09	19.96	19.85	21.5	0
10	QPSK	25	12	20.03	19.87	19.86		
10	QPSK	25	25	20.01	19.93	19.83		
10	QPSK	50	0	20.06	19.92	19.78	21.5	0
10	16QAM	1	0	19.92	19.85	19.71		
10	16QAM	1	25	19.82	19.85	19.62		
10	16QAM	1	49	19.72	19.88	19.78	21.5	0
10	16QAM	25	0	20.01	19.95	19.92		
10	16QAM	25	12	19.99	19.98	19.83		
10	16QAM	25	25	19.91	19.89	19.82	21.5	0
10	16QAM	50	0	19.98	19.93	19.84		
10	64QAM	1	0	19.76	19.77	19.77		
10	64QAM	1	25	19.78	19.80	19.88	21.5	0
10	64QAM	1	49	19.74	19.71	19.78		
10	64QAM	25	0	20.04	19.97	19.83		
10	64QAM	25	12	20.02	19.92	19.84	21	0.5
10	64QAM	25	25	19.95	19.91	19.83		
10	64QAM	50	0	20.07	19.99	19.89		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	19.98	19.88	19.82	21.5	0
5	QPSK	1	12	19.91	19.88	19.89		
5	QPSK	1	24	20.03	19.86	19.87		
5	QPSK	12	0	19.99	19.99	19.83	21.5	0
5	QPSK	12	7	20.00	19.91	19.81		
5	QPSK	12	13	19.99	19.87	19.83		
5	QPSK	25	0	20.02	19.89	19.78	21.5	0
5	16QAM	1	0	19.80	19.72	19.76		
5	16QAM	1	12	19.81	19.83	19.54		
5	16QAM	1	24	19.76	19.83	19.52	21.5	0
5	16QAM	12	0	20.02	19.89	19.84		
5	16QAM	12	7	19.96	19.86	19.73		
5	16QAM	12	13	20.02	19.83	19.71	21.5	0
5	16QAM	25	0	19.99	19.83	19.86		
5	64QAM	1	0	19.75	19.87	19.76		
5	64QAM	1	12	19.82	19.93	19.67	21.5	0
5	64QAM	1	24	19.95	19.95	19.63		
5	64QAM	12	0	20.00	19.84	19.73		
5	64QAM	12	7	20.01	19.80	19.76	21	0.5
5	64QAM	12	13	19.87	19.75	19.71		
5	64QAM	25	0	20.03	19.88	19.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	20.02	19.89	19.86	21.5	0
3	QPSK	1	8	20.04	19.93	19.77		
3	QPSK	1	14	20.03	19.80	19.77		
3	QPSK	8	0	20.12	19.89	19.84	21.5	0
3	QPSK	8	4	20.05	19.86	19.86		
3	QPSK	8	7	20.08	19.89	19.84		
3	QPSK	15	0	20.02	19.91	19.80	21.5	0
3	16QAM	1	0	20.01	19.92	19.71		
3	16QAM	1	8	20.00	19.93	19.74		
3	16QAM	1	14	20.07	20.01	19.75	21.5	0
3	16QAM	8	0	20.04	19.92	19.84		
3	16QAM	8	4	19.95	20.00	19.90		
3	16QAM	8	7	20.03	19.96	19.79	21.5	0
3	16QAM	15	0	20.03	19.86	19.75		
3	64QAM	1	0	19.75	19.87	19.76		
3	64QAM	1	8	19.78	19.83	19.83	21.5	0
3	64QAM	1	14	19.97	19.86	19.75		
3	64QAM	8	0	20.05	19.96	19.83		
3	64QAM	8	4	20.11	19.92	19.85	21	0.5
3	64QAM	8	7	20.05	20.01	19.87		
3	64QAM	15	0	20.02	19.89	19.80		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	20.01	19.87	19.87	21.5	0
1.4	QPSK	1	3	20.01	19.91	19.87		
1.4	QPSK	1	5	20.03	19.87	19.84		
1.4	QPSK	3	0	20.10	19.86	19.82		
1.4	QPSK	3	1	20.11	19.94	19.81		
1.4	QPSK	3	3	20.11	19.90	19.84		
1.4	QPSK	6	0	20.07	19.90	19.81	21.5	0
1.4	16QAM	1	0	19.95	19.85	19.75	21.5	0
1.4	16QAM	1	3	20.05	19.68	19.65		
1.4	16QAM	1	5	19.94	19.82	19.87		
1.4	16QAM	3	0	20.05	19.86	19.79		
1.4	16QAM	3	1	19.98	19.91	19.87		
1.4	16QAM	3	3	20.11	19.94	19.80		
1.4	16QAM	6	0	20.10	19.82	19.90	21.5	0
1.4	64QAM	1	0	19.89	19.66	19.87	21.5	0
1.4	64QAM	1	3	19.72	19.80	19.87		
1.4	64QAM	1	5	19.75	19.78	19.79		
1.4	64QAM	3	0	20.04	19.73	19.75		
1.4	64QAM	3	1	19.99	19.79	19.70		
1.4	64QAM	3	3	19.91	19.76	19.83		
1.4	64QAM	6	0	20.01	20.02	19.87	21	0.5

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	17.97	18.09	18.16	19.5	0
20	QPSK	1	49	18.07	18.07	18.12		
20	QPSK	1	99	18.27	18.13	18.10		
20	QPSK	50	0	17.99	18.13	18.12	19.5	0
20	QPSK	50	24	18.13	18.00	18.11		
20	QPSK	50	50	17.90	18.06	18.10		
20	QPSK	100	0	18.12	18.06	18.11	19.5	0
20	16QAM	1	0	17.86	17.92	18.00		
20	16QAM	1	49	17.65	17.98	18.04		
20	16QAM	1	99	17.64	17.83	17.80	19.5	0
20	16QAM	50	0	18.02	18.12	18.17		
20	16QAM	50	24	17.97	18.08	18.12		
20	16QAM	50	50	17.94	18.15	18.10	19.5	0
20	16QAM	100	0	18.01	18.04	18.16		
20	64QAM	1	0	18.13	18.02	18.10		
20	64QAM	1	49	17.97	18.10	18.12	19.5	0
20	64QAM	1	99	18.16	18.18	17.99		
20	64QAM	50	0	18.08	18.14	18.18		
20	64QAM	50	24	17.92	18.18	18.20	19.5	0
20	64QAM	50	50	18.01	18.18	18.18		
20	64QAM	100	0	18.09	18.17	18.22		



FCC SAR Test Report

Report No. : FA932901-02

Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	17.97	18.16	18.21	19.5	0
15	QPSK	1	37	17.98	18.11	18.16		
15	QPSK	1	74	17.99	18.09	18.12		
15	QPSK	36	0	17.99	18.10	18.11	19.5	0
15	QPSK	36	20	17.94	18.04	18.14		
15	QPSK	36	39	17.88	18.04	18.14		
15	QPSK	75	0	17.95	18.12	18.08	19.5	0
15	16QAM	1	0	17.82	17.95	17.93		
15	16QAM	1	37	17.88	17.75	17.89		
15	16QAM	1	74	17.71	17.95	17.74	19.5	0
15	16QAM	36	0	17.92	17.99	18.10		
15	16QAM	36	20	17.88	18.05	18.04		
15	16QAM	36	39	17.84	18.03	18.13	19.5	0
15	16QAM	75	0	17.90	18.11	18.16		
15	64QAM	1	0	18.06	18.08	18.12		
15	64QAM	1	37	17.82	18.10	18.06	19.5	0
15	64QAM	1	74	18.19	18.12	18.09		
15	64QAM	36	0	18.00	18.14	18.10		
15	64QAM	36	20	18.01	18.14	18.17	19.5	0
15	64QAM	36	39	18.01	18.16	18.16		
15	64QAM	75	0	17.98	18.12	18.18		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	17.99	18.17	18.13	19.5	0
10	QPSK	1	25	17.94	18.09	18.12		
10	QPSK	1	49	17.92	18.10	18.19		
10	QPSK	25	0	17.90	18.10	18.09	19.5	0
10	QPSK	25	12	17.87	18.12	18.15		
10	QPSK	25	25	17.89	18.04	18.14		
10	QPSK	50	0	17.82	18.06	18.15	19.5	0
10	16QAM	1	0	17.75	17.82	18.12		
10	16QAM	1	25	17.65	17.78	17.94		
10	16QAM	1	49	17.86	17.86	18.00	19.5	0
10	16QAM	25	0	17.95	18.08	18.14		
10	16QAM	25	12	17.96	18.03	18.20		
10	16QAM	25	25	17.90	18.05	18.11	19.5	0
10	16QAM	50	0	17.94	18.16	18.15		
10	64QAM	1	0	17.95	18.04	18.15		
10	64QAM	1	25	18.17	18.12	18.12	19.5	0
10	64QAM	1	49	18.02	18.15	18.17		
10	64QAM	25	0	18.00	18.07	18.12		
10	64QAM	25	12	17.93	18.14	18.10	19.5	0
10	64QAM	25	25	17.87	18.04	18.17		
10	64QAM	50	0	17.94	18.12	18.16		

Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	17.93	18.09	18.14	19.5	0
5	QPSK	1	12	17.99	18.02	18.03		
5	QPSK	1	24	17.91	18.09	18.02		
5	QPSK	12	0	17.96	18.04	18.16	19.5	0
5	QPSK	12	7	17.92	18.05	18.14		
5	QPSK	12	13	17.94	18.05	18.08		
5	QPSK	25	0	18.01	18.06	18.02	19.5	0
5	16QAM	1	0	17.71	17.85	17.96		
5	16QAM	1	12	17.73	17.88	17.84		
5	16QAM	1	24	17.67	17.91	17.91	19.5	0
5	16QAM	12	0	17.93	18.12	18.16		
5	16QAM	12	7	17.93	18.04	18.14		
5	16QAM	12	13	17.95	18.09	18.12	19.5	0
5	16QAM	25	0	17.95	18.12	18.09		
5	64QAM	1	0	17.96	18.19	18.13		
5	64QAM	1	12	18.19	18.13	17.98	19.5	0
5	64QAM	1	24	18.08	18.12	18.12		
5	64QAM	12	0	17.93	18.04	18.09		
5	64QAM	12	7	17.90	18.08	18.20	19.5	0
5	64QAM	12	13	17.98	18.12	18.02		
5	64QAM	25	0	17.98	18.13	18.14		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	17.98	18.04	18.10	19.5	0
3	QPSK	1	8	17.94	18.07	18.13		
3	QPSK	1	14	17.97	18.09	18.15		
3	QPSK	8	0	18.03	18.15	18.13	19.5	0
3	QPSK	8	4	17.94	18.07	18.12		
3	QPSK	8	7	17.93	18.07	18.11		
3	QPSK	15	0	17.95	18.12	18.13	19.5	0
3	16QAM	1	0	17.97	18.02	18.08		
3	16QAM	1	8	17.79	17.98	17.91		
3	16QAM	1	14	17.91	18.14	17.97	19.5	0
3	16QAM	8	0	18.01	18.11	18.10		
3	16QAM	8	4	17.90	18.02	18.05		
3	16QAM	8	7	17.94	18.10	18.12	19.5	0
3	16QAM	15	0	17.92	18.07	18.15		
3	64QAM	1	0	17.90	18.10	18.12		
3	64QAM	1	8	17.97	18.18	18.11	19.5	0
3	64QAM	1	14	17.90	17.95	18.20		
3	64QAM	8	0	17.98	18.19	18.16		
3	64QAM	8	4	17.93	18.18	18.15	19.5	0
3	64QAM	8	7	18.01	18.22	18.14		
3	64QAM	15	0	17.98	18.12	18.12		

Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	17.89	18.05	18.09	19.5	0
1.4	QPSK	1	3	18.02	18.10	18.09		
1.4	QPSK	1	5	17.95	18.07	18.11		
1.4	QPSK	3	0	17.93	18.08	18.10		
1.4	QPSK	3	1	17.86	18.02	18.03		
1.4	QPSK	3	3	17.89	18.08	18.06		
1.4	QPSK	6	0	17.89	18.11	18.04	19.5	0
1.4	16QAM	1	0	17.88	17.93	18.10	19.5	0
1.4	16QAM	1	3	17.78	18.00	18.03		
1.4	16QAM	1	5	17.80	18.05	18.20		
1.4	16QAM	3	0	17.79	17.95	18.03		
1.4	16QAM	3	1	17.77	17.93	18.03		
1.4	16QAM	3	3	17.95	17.90	17.97		
1.4	16QAM	6	0	17.87	18.08	18.17	19.5	0
1.4	64QAM	1	0	17.86	18.04	18.05	19.5	0
1.4	64QAM	1	3	18.00	18.06	18.18		
1.4	64QAM	1	5	18.03	18.13	18.16		
1.4	64QAM	3	0	17.95	17.95	18.08		
1.4	64QAM	3	1	17.91	18.03	18.06		
1.4	64QAM	3	3	17.89	17.99	18.08		
1.4	64QAM	6	0	17.92	18.11	18.02	19.5	0

<Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	16.56	16.62	17.01	18	0
20	QPSK	1	49	16.60	16.66	16.98		
20	QPSK	1	99	16.66	17.06	16.99		
20	QPSK	50	0	16.61	17.02	17.01	18	0
20	QPSK	50	24	16.57	16.64	16.98		
20	QPSK	50	50	16.58	16.61	17.01		
20	QPSK	100	0	16.54	16.60	16.99	18	0
20	16QAM	1	0	16.45	16.53	16.90		
20	16QAM	1	49	16.40	16.48	16.86		
20	16QAM	1	99	16.48	16.54	16.88	18	0
20	16QAM	50	0	16.55	16.63	16.98		
20	16QAM	50	24	16.57	16.57	17.01		
20	16QAM	50	50	16.55	16.62	17.01	18	0
20	16QAM	100	0	16.55	16.62	17.01		
20	64QAM	1	0	16.30	16.40	16.79		
20	64QAM	1	49	16.40	16.37	16.77	18	0
20	64QAM	1	99	16.40	16.47	16.78		
20	64QAM	50	0	16.59	16.68	17.03		
20	64QAM	50	24	16.56	16.61	16.93	18	0
20	64QAM	50	50	16.61	16.64	17.03		
20	64QAM	100	0	16.58	16.61	17.00		

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.60	16.61	17.01	18	0
15	QPSK	1	37	16.59	16.61	16.96		
15	QPSK	1	74	16.53	16.60	16.97		
15	QPSK	36	0	16.56	16.57	16.97	18	0
15	QPSK	36	20	16.56	16.55	17.01		
15	QPSK	36	39	16.51	16.59	16.98		
15	QPSK	75	0	16.52	16.57	17.01	18	0
15	16QAM	1	0	16.43	16.46	16.77		
15	16QAM	1	37	16.43	16.42	16.78		
15	16QAM	1	74	16.48	16.51	16.81	18	0
15	16QAM	36	0	16.49	16.55	16.96		
15	16QAM	36	20	16.46	16.52	16.94		
15	16QAM	36	39	16.47	16.54	16.94	18	0
15	16QAM	75	0	16.52	16.60	17.01		
15	64QAM	1	0	16.40	16.46	16.81		
15	64QAM	1	37	16.45	16.52	16.88	18	0
15	64QAM	1	74	16.54	16.41	16.90		
15	64QAM	36	0	16.53	16.54	17.01		
15	64QAM	36	20	16.53	16.53	17.01	18	0
15	64QAM	36	39	16.53	16.53	17.00		
15	64QAM	75	0	16.56	16.58	16.99		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.64	16.64	17.05	18	0
10	QPSK	1	25	16.58	16.65	17.01		
10	QPSK	1	49	16.58	16.65	16.94		
10	QPSK	25	0	16.54	16.62	17.01	18	0
10	QPSK	25	12	16.56	16.57	16.97		
10	QPSK	25	25	16.56	16.58	16.91		
10	QPSK	50	0	16.58	16.56	16.99	18	0
10	16QAM	1	0	16.44	16.44	16.77		
10	16QAM	1	25	16.48	16.30	16.71		
10	16QAM	1	49	16.44	16.51	16.77	18	0
10	16QAM	25	0	16.57	16.66	17.03		
10	16QAM	25	12	16.66	16.59	17.01		
10	16QAM	25	25	16.57	16.61	17.00	18	0
10	16QAM	50	0	16.56	16.62	17.02		
10	64QAM	1	0	16.62	16.58	17.03		
10	64QAM	1	25	16.58	16.59	16.99	18	0
10	64QAM	1	49	16.58	16.62	16.90		
10	64QAM	25	0	16.56	16.62	17.00		
10	64QAM	25	12	16.62	16.61	17.00	18	0
10	64QAM	25	25	16.58	16.61	17.01		
10	64QAM	50	0	16.59	16.61	17.01		



FCC SAR Test Report

Report No. : FA932901-02

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	16.65	16.65	16.96	18	0
5	QPSK	1	12	16.64	16.64	16.90		
5	QPSK	1	24	16.58	16.66	16.93		
5	QPSK	12	0	16.58	16.57	16.96	18	0
5	QPSK	12	7	16.52	16.61	16.90		
5	QPSK	12	13	16.51	16.65	16.95		
5	QPSK	25	0	16.58	16.59	17.00	18	0
5	16QAM	1	0	16.57	16.57	16.96		
5	16QAM	1	12	16.53	16.58	16.90		
5	16QAM	1	24	16.53	16.57	16.77	18	0
5	16QAM	12	0	16.54	16.57	17.00		
5	16QAM	12	7	16.52	16.59	17.01		
5	16QAM	12	13	16.55	16.63	16.95	18	0
5	16QAM	25	0	16.55	16.62	17.00		
5	64QAM	1	0	16.58	16.59	16.97		
5	64QAM	1	12	16.57	16.57	16.91	18	0
5	64QAM	1	24	16.59	16.59	16.82		
5	64QAM	12	0	16.63	16.63	17.05		
5	64QAM	12	7	16.58	16.59	16.99	18	0
5	64QAM	12	13	16.58	16.59	16.94		
5	64QAM	25	0	16.57	16.61	16.99		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.65	16.60	17.05	18	0
3	QPSK	1	8	16.66	16.64	17.02		
3	QPSK	1	14	16.60	16.67	16.93		
3	QPSK	8	0	16.64	16.58	17.00	18	0
3	QPSK	8	4	16.58	16.61	16.99		
3	QPSK	8	7	16.57	16.63	16.94		
3	QPSK	15	0	16.54	16.61	17.00	18	0
3	16QAM	1	0	16.41	16.53	16.82		
3	16QAM	1	8	16.42	16.47	16.81		
3	16QAM	1	14	16.37	16.56	16.73	18	0
3	16QAM	8	0	16.60	16.61	17.03		
3	16QAM	8	4	16.62	16.63	17.02		
3	16QAM	8	7	16.57	16.62	16.97	18	0
3	16QAM	15	0	16.53	16.57	17.01		
3	64QAM	1	0	16.57	16.59	16.94		
3	64QAM	1	8	16.48	16.59	16.90	18	0
3	64QAM	1	14	16.59	16.54	16.80		
3	64QAM	8	0	16.67	16.63	17.03		
3	64QAM	8	4	16.58	16.64	17.05	18	0
3	64QAM	8	7	16.59	16.67	16.97		
3	64QAM	15	0	16.60	16.61	16.96		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 113 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	16.47	16.55	16.66	18	0
1.4	QPSK	1	3	16.45	16.63	16.73		
1.4	QPSK	1	5	16.47	16.63	16.57		
1.4	QPSK	3	0	16.48	16.58	16.64		
1.4	QPSK	3	1	16.49	16.58	16.63		
1.4	QPSK	3	3	16.45	16.59	16.64		
1.4	QPSK	6	0	16.46	16.61	16.62	18	0
1.4	16QAM	1	0	16.30	16.36	16.43	18	0
1.4	16QAM	1	3	16.37	16.47	16.42		
1.4	16QAM	1	5	16.35	16.42	16.36		
1.4	16QAM	3	0	16.50	16.60	16.68		
1.4	16QAM	3	1	16.46	16.61	16.66		
1.4	16QAM	3	3	16.48	16.58	16.60		
1.4	16QAM	6	0	16.47	16.62	16.71	18	0
1.4	64QAM	1	0	16.49	16.44	16.54	18	0
1.4	64QAM	1	3	16.37	16.57	16.57		
1.4	64QAM	1	5	16.52	16.57	16.57		
1.4	64QAM	3	0	16.53	16.60	16.67		
1.4	64QAM	3	1	16.52	16.64	16.66		
1.4	64QAM	3	3	16.52	16.63	16.62		
1.4	64QAM	6	0	16.47	16.58	16.65	18	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.23	16.49	16.40	18	0
20	QPSK	1	49	16.22	16.26	16.39		
20	QPSK	1	99	16.27	16.25	16.37		
20	QPSK	50	0	16.28	16.43	16.39	18	0
20	QPSK	50	24	16.26	16.25	16.42		
20	QPSK	50	50	16.27	16.29	16.41		
20	QPSK	100	0	16.29	16.26	16.38	18	0
20	16QAM	1	0	16.17	16.17	16.19		
20	16QAM	1	49	16.22	16.01	16.26		
20	16QAM	1	99	16.08	16.07	16.24	18	0
20	16QAM	50	0	16.27	16.24	16.35		
20	16QAM	50	24	16.28	16.27	16.37		
20	16QAM	50	50	16.32	16.26	16.38	18	0
20	16QAM	100	0	16.21	16.24	16.37		
20	64QAM	1	0	16.29	16.25	16.12		
20	64QAM	1	49	16.25	16.23	16.16	18	0
20	64QAM	1	99	16.33	16.29	16.19		
20	64QAM	50	0	16.25	16.35	16.42		
20	64QAM	50	24	16.25	16.28	16.38	18	0
20	64QAM	50	50	16.25	16.32	16.41		
20	64QAM	100	0	16.25	16.31	16.39		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.32	16.27	16.35	18	0
15	QPSK	1	37	16.33	16.23	16.41		
15	QPSK	1	74	16.27	16.26	16.32		
15	QPSK	36	0	16.28	16.23	16.37	18	0
15	QPSK	36	20	16.27	16.24	16.39		
15	QPSK	36	39	16.29	16.24	16.41		
15	QPSK	75	0	16.15	16.11	16.19	18	0
15	16QAM	1	0	16.23	16.29	16.40		
15	16QAM	1	37	16.26	16.24	16.34		
15	16QAM	1	74	16.03	16.30	16.11	18	0
15	16QAM	36	0	16.06	16.24	16.16		
15	16QAM	36	20	16.05	16.22	16.27		
15	16QAM	36	39	16.28	16.23	16.46	18	0
15	16QAM	75	0	16.27	16.23	16.35		
15	64QAM	1	0	16.27	16.21	16.33		
15	64QAM	1	37	16.24	16.23	16.35	18	0
15	64QAM	1	74	16.03	16.29	16.08		
15	64QAM	36	0	16.04	16.25	16.11		
15	64QAM	36	20	16.29	16.24	16.41	18	0
15	64QAM	36	39	16.15	16.11	16.19		
15	64QAM	75	0	16.20	16.10	16.21		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.31	16.29	16.37	18	0
10	QPSK	1	25	16.32	16.27	16.35		
10	QPSK	1	49	16.33	16.23	16.41		
10	QPSK	25	0	16.27	16.26	16.32	18	0
10	QPSK	25	12	16.28	16.23	16.37		
10	QPSK	25	25	16.27	16.24	16.39		
10	QPSK	50	0	16.29	16.24	16.41	18	0
10	16QAM	1	0	16.15	16.11	16.19		
10	16QAM	1	25	16.20	16.10	16.21		
10	16QAM	1	49	16.05	16.16	16.13	18	0
10	16QAM	25	0	16.32	16.25	16.37		
10	16QAM	25	12	16.27	16.23	16.35		
10	16QAM	25	25	16.27	16.21	16.33	18	0
10	16QAM	50	0	16.24	16.23	16.35		
10	64QAM	1	0	16.03	16.29	16.08		
10	64QAM	1	25	16.04	16.25	16.11	18	0
10	64QAM	1	49	16.09	16.27	16.20		
10	64QAM	25	0	16.24	16.24	16.41		
10	64QAM	25	12	16.22	16.27	16.35	18	0
10	64QAM	25	25	16.26	16.27	16.38		
10	64QAM	50	0	16.27	16.25	16.33		

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.25	16.28	16.43	18	0
5	QPSK	1	12	16.25	16.25	16.45		
5	QPSK	1	24	16.27	16.28	16.48		
5	QPSK	12	0	16.23	16.23	16.40	18	0
5	QPSK	12	7	16.20	16.27	16.45		
5	QPSK	12	13	16.21	16.21	16.42		
5	QPSK	25	0	16.25	16.25	16.42	18	0
5	16QAM	1	0	16.21	16.08	16.26		
5	16QAM	1	12	16.19	16.07	16.31		
5	16QAM	1	24	16.11	16.16	16.21	18	0
5	16QAM	12	0	16.24	16.22	16.41		
5	16QAM	12	7	16.27	16.25	16.38		
5	16QAM	12	13	16.23	16.29	16.40	18	0
5	16QAM	25	0	16.26	16.24	16.34		
5	64QAM	1	0	16.05	16.30	16.11		
5	64QAM	1	12	16.06	16.24	16.16	18	0
5	64QAM	1	24	16.03	16.22	16.27		
5	64QAM	12	0	16.28	16.23	16.46		
5	64QAM	12	7	16.24	16.25	16.38	18	0
5	64QAM	12	13	16.24	16.28	16.37		
5	64QAM	25	0	16.28	16.25	16.42		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.18	16.33	16.44	18	0
3	QPSK	1	8	16.19	16.35	16.42		
3	QPSK	1	14	16.17	16.32	16.48		
3	QPSK	8	0	16.06	16.06	16.43	18	0
3	QPSK	8	4	16.26	16.28	16.42		
3	QPSK	8	7	16.24	16.28	16.45		
3	QPSK	15	0	16.24	16.27	16.44	18	0
3	16QAM	1	0	16.12	16.13	16.32		
3	16QAM	1	8	16.00	16.29	16.41		
3	16QAM	1	14	16.06	16.12	16.38	18	0
3	16QAM	8	0	16.18	16.32	16.46		
3	16QAM	8	4	16.26	16.00	16.45		
3	16QAM	8	7	16.21	16.21	16.40	18	0
3	16QAM	15	0	16.23	16.24	16.45		
3	64QAM	1	0	16.05	16.25	16.27		
3	64QAM	1	8	16.29	16.29	16.23	18	0
3	64QAM	1	14	16.06	16.28	16.22		
3	64QAM	8	0	16.26	16.35	16.45		
3	64QAM	8	4	16.20	16.32	16.43	18	0
3	64QAM	8	7	16.27	16.24	16.46		
3	64QAM	15	0	16.25	16.24	16.48		



FCC SAR Test Report

Report No. : FA932901-02

Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.26	16.28	16.39	18	0
1.4	QPSK	1	3	16.25	16.12	16.36		
1.4	QPSK	1	5	16.21	16.27	16.40		
1.4	QPSK	3	0	16.22	16.02	16.37		
1.4	QPSK	3	1	16.20	16.26	16.40		
1.4	QPSK	3	3	16.23	16.27	16.37		
1.4	QPSK	6	0	16.26	16.31	16.38	18	0
1.4	16QAM	1	0	16.11	16.11	16.41	18	0
1.4	16QAM	1	3	16.00	16.26	16.28		
1.4	16QAM	1	5	16.05	16.27	16.30		
1.4	16QAM	3	0	16.17	16.31	16.39		
1.4	16QAM	3	1	16.21	16.34	16.38		
1.4	16QAM	3	3	16.25	16.27	16.38		
1.4	16QAM	6	0	16.24	16.32	16.38	18	0
1.4	64QAM	1	0	16.05	16.32	16.22	18	0
1.4	64QAM	1	3	16.05	16.28	16.11		
1.4	64QAM	1	5	16.06	16.07	16.12		
1.4	64QAM	3	0	16.18	16.27	16.37		
1.4	64QAM	3	1	16.22	16.34	16.35		
1.4	64QAM	3	3	16.14	16.28	16.38		
1.4	64QAM	6	0	16.23	16.28	16.43	18	0

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.39	20.24	20.38	21.5	0
10	QPSK	1	25	20.33	20.26	20.28		
10	QPSK	1	49	20.28	20.20	20.24		
10	QPSK	25	0	20.29	20.28	20.32	21.5	0
10	QPSK	25	12	20.29	20.26	20.30		
10	QPSK	25	25	20.29	20.23	20.22		
10	QPSK	50	0	20.32	20.22	20.26	21.5	0
10	16QAM	1	0	20.19	20.11	20.03		
10	16QAM	1	25	20.03	20.01	19.99		
10	16QAM	1	49	19.99	19.85	20.06	21.5	0
10	16QAM	25	0	20.28	20.32	20.37		
10	16QAM	25	12	20.30	20.28	20.27		
10	16QAM	25	25	20.22	20.25	20.32	21.5	0
10	16QAM	50	0	20.33	20.27	20.27		
10	64QAM	1	0	20.12	20.15	20.03		
10	64QAM	1	25	20.11	19.97	20.03	21.5	0
10	64QAM	1	49	20.11	20.01	20.08		
10	64QAM	25	0	19.82	19.75	19.88		
10	64QAM	25	12	19.76	19.78	19.86	21	0.5
10	64QAM	25	25	19.74	19.68	19.76		
10	64QAM	50	0	19.85	19.74	19.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.40	20.38	20.38	21.5	0
5	QPSK	1	12	20.39	20.22	20.30		
5	QPSK	1	24	20.25	20.19	20.25		
5	QPSK	12	0	20.38	20.25	20.25	21.5	0
5	QPSK	12	7	20.34	20.22	20.31		
5	QPSK	12	13	20.35	20.26	20.24		
5	QPSK	25	0	20.33	20.20	20.29	21.5	0
5	16QAM	1	0	20.37	20.35	20.27		
5	16QAM	1	12	20.42	20.21	20.07		
5	16QAM	1	24	20.33	20.20	20.15	21.5	0
5	16QAM	12	0	20.31	20.15	20.30		
5	16QAM	12	7	20.27	20.20	20.23		
5	16QAM	12	13	20.31	20.16	20.21	21.5	0
5	16QAM	25	0	20.36	20.27	20.30		
5	64QAM	1	0	20.22	20.31	20.16		
5	64QAM	1	12	20.15	20.23	20.27	21.5	0
5	64QAM	1	24	20.18	20.06	20.14		
5	64QAM	12	0	19.88	19.74	19.71		
5	64QAM	12	7	19.87	19.60	19.69	21	0.5
5	64QAM	12	13	19.83	19.68	19.74		
5	64QAM	25	0	19.86	19.75	19.69		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.37	20.25	20.28	21.5	0
3	QPSK	1	8	20.33	20.25	20.29		
3	QPSK	1	14	20.34	20.27	20.27		
3	QPSK	8	0	20.37	20.25	20.31	21.5	0
3	QPSK	8	4	20.41	20.21	20.30		
3	QPSK	8	7	20.31	20.22	20.28		
3	QPSK	15	0	20.27	20.25	20.31	21.5	0
3	16QAM	1	0	20.10	19.93	20.20		
3	16QAM	1	8	20.30	19.93	20.06		
3	16QAM	1	14	20.23	20.25	20.20	21.5	0
3	16QAM	8	0	20.36	20.23	20.30		
3	16QAM	8	4	20.37	20.16	20.24		
3	16QAM	8	7	20.29	20.24	20.24	21.5	0
3	16QAM	15	0	20.27	19.87	20.28		
3	64QAM	1	0	20.11	20.17	20.02		
3	64QAM	1	8	20.17	20.04	20.17	21.5	0
3	64QAM	1	14	20.13	20.30	20.04		
3	64QAM	8	0	19.71	19.78	19.76		
3	64QAM	8	4	19.75	19.71	19.81	21	0.5
3	64QAM	8	7	19.74	19.67	19.79		
3	64QAM	15	0	19.85	19.36	19.75		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 120 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509

Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.28	20.14	20.27	21.5	0
1.4	QPSK	1	3	20.32	20.23	20.28		
1.4	QPSK	1	5	20.32	20.17	20.32		
1.4	QPSK	3	0	20.37	20.31	20.29		
1.4	QPSK	3	1	20.35	20.33	20.28		
1.4	QPSK	3	3	20.30	20.26	20.22		
1.4	QPSK	6	0	20.31	20.21	20.25	21.5	0
1.4	16QAM	1	0	20.21	20.29	19.93	21.5	0
1.4	16QAM	1	3	20.06	20.11	19.84		
1.4	16QAM	1	5	20.22	20.14	20.01		
1.4	16QAM	3	0	20.20	20.17	20.24		
1.4	16QAM	3	1	20.23	20.21	20.10		
1.4	16QAM	3	3	20.23	20.18	20.10		
1.4	16QAM	6	0	20.39	20.17	20.27	21.5	0
1.4	64QAM	1	0	19.88	19.97	19.97	21.5	0
1.4	64QAM	1	3	19.89	19.96	19.73		
1.4	64QAM	1	5	19.89	19.82	19.91		
1.4	64QAM	3	0	20.17	20.15	20.18		
1.4	64QAM	3	1	20.18	20.18	20.19		
1.4	64QAM	3	3	20.29	20.15	20.16		
1.4	64QAM	6	0	19.63	19.78	19.77	21	0.5

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	13.73	13.67	13.78	15	0
20	QPSK	1	49	13.68	13.75	13.68		
20	QPSK	1	99	13.70	13.64	13.64		
20	QPSK	50	0	13.70	13.70	13.76	15	0
20	QPSK	50	24	13.66	13.72	13.75		
20	QPSK	50	50	13.71	13.64	13.70		
20	QPSK	100	0	13.70	13.69	13.72	15	0
20	16QAM	1	0	13.58	13.60	13.54		
20	16QAM	1	49	13.61	13.63	13.46		
20	16QAM	1	99	13.56	13.47	13.56	15	0
20	16QAM	50	0	13.67	13.66	13.73		
20	16QAM	50	24	13.70	13.65	13.74		
20	16QAM	50	50	13.63	13.64	13.75	15	0
20	16QAM	100	0	13.67	13.70	13.76		
20	64QAM	1	0	13.52	13.50	13.64		
20	64QAM	1	49	13.54	13.52	13.70	15	0
20	64QAM	1	99	13.55	13.60	13.62		
20	64QAM	50	0	13.62	13.65	13.73		
20	64QAM	50	24	13.66	13.66	13.70	15	0
20	64QAM	50	50	13.64	13.64	13.69		
20	64QAM	100	0	13.70	13.74	13.75		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	13.57	13.71	13.74	15	0
15	QPSK	1	37	13.69	13.71	13.71		
15	QPSK	1	74	13.67	13.65	13.71		
15	QPSK	36	0	13.69	13.66	13.69	15	0
15	QPSK	36	20	13.68	13.66	13.73		
15	QPSK	36	39	13.66	13.70	13.69		
15	QPSK	75	0	13.66	13.66	13.72	15	0
15	16QAM	1	0	13.44	13.59	13.65		
15	16QAM	1	37	13.62	13.45	13.48		
15	16QAM	1	74	13.56	13.52	13.52	15	0
15	16QAM	36	0	13.70	13.70	13.74		
15	16QAM	36	20	13.69	13.66	13.70		
15	16QAM	36	39	13.70	13.67	13.72	15	0
15	16QAM	75	0	13.67	13.68	13.71		
15	64QAM	1	0	13.61	13.69	13.48		
15	64QAM	1	37	13.48	13.52	13.51	15	0
15	64QAM	1	74	13.43	13.44	13.56		
15	64QAM	36	0	13.70	13.73	13.76		
15	64QAM	36	20	13.71	13.70	13.68	15	0
15	64QAM	36	39	13.69	13.72	13.73		
15	64QAM	75	0	13.72	13.69	13.75		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	13.74	13.73	13.64	15	0
10	QPSK	1	25	13.75	13.71	13.77		
10	QPSK	1	49	13.67	13.68	13.68		
10	QPSK	25	0	13.68	13.73	13.75	15	0
10	QPSK	25	12	13.68	13.68	13.73		
10	QPSK	25	25	13.58	13.66	13.68		
10	QPSK	50	0	13.69	13.73	13.72	15	0
10	16QAM	1	0	13.66	13.65	13.63		
10	16QAM	1	25	13.60	13.53	13.50		
10	16QAM	1	49	13.64	13.46	13.58	15	0
10	16QAM	25	0	13.66	13.66	13.72		
10	16QAM	25	12	13.64	13.66	13.69		
10	16QAM	25	25	13.64	13.68	13.69	15	0
10	16QAM	50	0	13.67	13.74	13.74		
10	64QAM	1	0	13.59	13.59	13.52		
10	64QAM	1	25	13.52	13.61	13.59	15	0
10	64QAM	1	49	13.44	13.49	13.49		
10	64QAM	25	0	13.71	13.71	13.76		
10	64QAM	25	12	13.73	13.68	13.68	15	0
10	64QAM	25	25	13.66	13.68	13.71		
10	64QAM	50	0	13.72	13.73	13.75		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 123 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509

Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	13.61	13.76	13.60	15	0
5	QPSK	1	12	13.60	13.71	13.74		
5	QPSK	1	24	13.66	13.65	13.62		
5	QPSK	12	0	13.75	13.68	13.75	15	0
5	QPSK	12	7	13.70	13.67	13.69		
5	QPSK	12	13	13.69	13.64	13.69		
5	QPSK	25	0	13.71	13.66	13.69	15	0
5	16QAM	1	0	13.67	13.64	13.66		
5	16QAM	1	12	13.51	13.72	13.56		
5	16QAM	1	24	13.48	13.48	13.53	15	0
5	16QAM	12	0	13.76	13.71	13.72		
5	16QAM	12	7	13.76	13.69	13.72		
5	16QAM	12	13	13.69	13.67	13.72	15	0
5	16QAM	25	0	13.73	13.65	13.73		
5	64QAM	1	0	13.55	13.58	13.47		
5	64QAM	1	12	13.59	13.39	13.50	15	0
5	64QAM	1	24	13.49	13.37	13.45		
5	64QAM	12	0	13.60	13.72	13.68		
5	64QAM	12	7	13.75	13.72	13.77	15	0
5	64QAM	12	13	13.71	13.74	13.76		
5	64QAM	25	0	13.72	13.68	13.70		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	16.63	16.71	16.98	18	0
20	QPSK	1	49	16.63	16.74	16.93		
20	QPSK	1	99	16.58	16.70	16.84		
20	QPSK	50	0	16.65	16.70	16.90	18	0
20	QPSK	50	24	16.49	16.46	16.65		
20	QPSK	50	50	16.56	16.66	16.95		
20	QPSK	100	0	16.60	16.68	16.83	18	0
20	16QAM	1	0	16.53	16.71	16.83		
20	16QAM	1	49	16.59	16.71	16.92		
20	16QAM	1	99	16.65	16.66	16.96	18	0
20	16QAM	50	0	16.47	16.44	16.78		
20	16QAM	50	24	16.64	16.52	16.78		
20	16QAM	50	50	16.49	16.46	16.65	18	0
20	16QAM	100	0	16.56	16.66	16.95		
20	64QAM	1	0	16.60	16.68	16.83		
20	64QAM	1	49	16.53	16.71	16.83	18	0
20	64QAM	1	99	16.59	16.71	16.92		
20	64QAM	50	0	16.61	16.69	16.81		
20	64QAM	50	24	16.60	16.68	16.83	18	0
20	64QAM	50	50	16.53	16.71	16.83		
20	64QAM	100	0	16.64	16.52	16.78		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	16.67	16.74	16.85	18	0
15	QPSK	1	37	16.61	16.71	16.92		
15	QPSK	1	74	16.62	16.78	16.84		
15	QPSK	36	0	16.57	16.67	16.93	18	0
15	QPSK	36	20	16.61	16.69	16.84		
15	QPSK	36	39	16.61	16.69	16.81		
15	QPSK	75	0	16.59	16.71	16.90	18	0
15	16QAM	1	0	16.47	16.44	16.78		
15	16QAM	1	37	16.64	16.52	16.78		
15	16QAM	1	74	16.49	16.46	16.65	18	0
15	16QAM	36	0	16.56	16.66	16.95		
15	16QAM	36	20	16.60	16.68	16.83		
15	16QAM	36	39	16.53	16.71	16.83	18	0
15	16QAM	75	0	16.59	16.71	16.92		
15	64QAM	1	0	16.65	16.66	16.96		
15	64QAM	1	37	16.53	16.54	16.84	18	0
15	64QAM	1	74	16.54	16.73	16.75		
15	64QAM	36	0	16.63	16.71	16.84		
15	64QAM	36	20	16.63	16.74	16.93	18	0
15	64QAM	36	39	16.58	16.70	16.84		
15	64QAM	75	0	16.65	16.70	16.90		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	16.69	16.71	16.85	18	0
10	QPSK	1	25	16.64	16.67	16.91		
10	QPSK	1	49	16.64	16.74	16.92		
10	QPSK	25	0	16.64	16.67	16.97	18	0
10	QPSK	25	12	16.61	16.70	16.93		
10	QPSK	25	25	16.60	16.68	16.89		
10	QPSK	50	0	16.55	16.66	16.96	18	0
10	16QAM	1	0	16.49	16.47	16.78		
10	16QAM	1	25	16.42	16.64	16.89		
10	16QAM	1	49	16.47	16.64	16.83	18	0
10	16QAM	25	0	16.60	16.70	16.96		
10	16QAM	25	12	16.60	16.66	16.93		
10	16QAM	25	25	16.63	16.69	16.91	18	0
10	16QAM	50	0	16.60	16.71	16.93		
10	64QAM	1	0	16.54	16.56	16.89		
10	64QAM	1	25	16.43	16.56	16.88	18	0
10	64QAM	1	49	16.55	16.65	16.79		
10	64QAM	25	0	16.64	16.69	16.92		
10	64QAM	25	12	16.63	16.71	16.95	18	0
10	64QAM	25	25	16.61	16.65	16.90		
10	64QAM	50	0	16.65	16.71	16.92		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	16.65	16.68	16.93	18	0
5	QPSK	1	12	16.69	16.70	16.94		
5	QPSK	1	24	16.62	16.74	16.97		
5	QPSK	12	0	16.65	16.70	16.94	18	0
5	QPSK	12	7	16.63	16.67	16.94		
5	QPSK	12	13	16.65	16.70	16.93		
5	QPSK	25	0	16.65	16.67	16.91	18	0
5	16QAM	1	0	16.54	16.55	16.91		
5	16QAM	1	12	16.59	16.53	16.82		
5	16QAM	1	24	16.45	16.60	16.80	18	0
5	16QAM	12	0	16.55	16.66	16.88		
5	16QAM	12	7	16.65	16.66	16.88		
5	16QAM	12	13	16.54	16.64	16.86	18	0
5	16QAM	25	0	16.65	16.66	16.94		
5	64QAM	1	0	16.63	16.58	16.86		
5	64QAM	1	12	16.52	16.66	16.88	18	0
5	64QAM	1	24	16.47	16.60	16.84		
5	64QAM	12	0	16.65	16.66	16.95		
5	64QAM	12	7	16.59	16.67	16.92	18	0
5	64QAM	12	13	16.54	16.69	16.89		
5	64QAM	25	0	16.62	16.68	16.95		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	16.61	16.69	16.96	18	0
3	QPSK	1	8	16.71	16.74	16.85		
3	QPSK	1	14	16.61	16.73	16.83		
3	QPSK	8	0	16.63	16.67	16.86	18	0
3	QPSK	8	4	16.62	16.67	16.82		
3	QPSK	8	7	16.61	16.69	16.83		
3	QPSK	15	0	16.60	16.67	16.82	18	0
3	16QAM	1	0	16.50	16.39	16.84		
3	16QAM	1	8	16.48	16.54	16.76		
3	16QAM	1	14	16.63	16.40	16.70	18	0
3	16QAM	8	0	16.62	16.69	16.89		
3	16QAM	8	4	16.64	16.66	16.88		
3	16QAM	8	7	16.63	16.72	16.84	18	0
3	16QAM	15	0	16.56	16.68	16.87		
3	64QAM	1	0	16.33	16.43	16.60		
3	64QAM	1	8	16.43	16.58	16.75	18	0
3	64QAM	1	14	16.46	16.49	16.60		
3	64QAM	8	0	16.61	16.69	16.93		
3	64QAM	8	4	16.68	16.72	16.92	18	0
3	64QAM	8	7	16.62	16.66	16.89		
3	64QAM	15	0	16.68	16.69	16.87		

Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	16.65	16.70	16.91	18	0
1.4	QPSK	1	3	16.63	16.72	16.87		
1.4	QPSK	1	5	16.69	16.71	16.85		
1.4	QPSK	3	0	16.69	16.70	16.92		
1.4	QPSK	3	1	16.68	16.75	16.93		
1.4	QPSK	3	3	16.72	16.70	16.95		
1.4	QPSK	6	0	16.67	16.70	16.96	18	0
1.4	16QAM	1	0	16.60	16.61	16.81	18	0
1.4	16QAM	1	3	16.52	16.55	16.86		
1.4	16QAM	1	5	16.60	16.57	16.70		
1.4	16QAM	3	0	16.60	16.64	16.76		
1.4	16QAM	3	1	16.67	16.54	16.81		
1.4	16QAM	3	3	16.61	16.62	16.89		
1.4	16QAM	6	0	16.60	16.71	16.92	18	0
1.4	64QAM	1	0	16.68	16.57	16.78	18	0
1.4	64QAM	1	3	16.50	16.56	16.85		
1.4	64QAM	1	5	16.63	16.62	16.75		
1.4	64QAM	3	0	16.60	16.65	16.90		
1.4	64QAM	3	1	16.60	16.65	16.85		
1.4	64QAM	3	3	16.64	16.67	16.87		
1.4	64QAM	6	0	16.75	16.76	16.95	18	0

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	20.08	20.15	19.96	21.5	0
15	QPSK	1	37	19.93	19.94	19.90		
15	QPSK	1	74	19.84	19.82	19.81		
15	QPSK	36	0	20.00	19.93	19.89	21.5	0
15	QPSK	36	20	19.98	19.90	19.96		
15	QPSK	36	39	19.93	19.83	19.85		
15	QPSK	75	0	19.99	19.92	19.85	21.5	0
15	16QAM	1	0	20.04	19.82	19.91		
15	16QAM	1	37	19.98	19.84	19.71		
15	16QAM	1	74	19.78	19.66	19.63	21.5	0
15	16QAM	36	0	19.99	19.87	19.85		
15	16QAM	36	20	19.89	19.86	19.82		
15	16QAM	36	39	19.86	19.82	19.81	21.5	0
15	16QAM	75	0	19.98	19.93	19.89		
15	64QAM	1	0	20.10	20.00	19.95		
15	64QAM	1	37	19.95	19.80	19.81	21.5	0
15	64QAM	1	74	19.96	19.87	19.72		
15	64QAM	36	0	19.57	19.55	19.53	21	0.5
15	64QAM	36	20	19.52	19.51	19.53		
15	64QAM	36	39	19.51	19.60	19.61		
15	64QAM	75	0	19.59	19.69	19.63		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	20.10	19.99	19.96	21.5	0
10	QPSK	1	25	20.00	19.96	19.84		
10	QPSK	1	49	19.97	19.87	19.83		
10	QPSK	25	0	20.09	19.96	19.85	21.5	0
10	QPSK	25	12	20.03	19.87	19.86		
10	QPSK	25	25	20.01	19.93	19.83		
10	QPSK	50	0	20.06	19.92	19.78	21.5	0
10	16QAM	1	0	19.92	19.85	19.71		
10	16QAM	1	25	19.82	19.85	19.62		
10	16QAM	1	49	19.72	19.88	19.78	21.5	0
10	16QAM	25	0	20.01	19.95	19.92		
10	16QAM	25	12	19.99	19.98	19.83		
10	16QAM	25	25	19.91	19.89	19.82	21.5	0
10	16QAM	50	0	19.98	19.93	19.84		
10	64QAM	1	0	19.76	19.77	19.77		
10	64QAM	1	25	19.78	19.80	19.88	21.5	0
10	64QAM	1	49	19.74	19.71	19.78		
10	64QAM	25	0	20.04	19.97	19.83		
10	64QAM	25	12	20.02	19.92	19.84	21	0.5
10	64QAM	25	25	19.95	19.91	19.83		
10	64QAM	50	0	20.07	19.99	19.89		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	19.98	19.88	19.82	21.5	0
5	QPSK	1	12	19.91	19.88	19.89		
5	QPSK	1	24	20.03	19.86	19.87		
5	QPSK	12	0	19.99	19.99	19.83	21.5	0
5	QPSK	12	7	20.00	19.91	19.81		
5	QPSK	12	13	19.99	19.87	19.83		
5	QPSK	25	0	20.02	19.89	19.78	21.5	0
5	16QAM	1	0	19.80	19.72	19.76		
5	16QAM	1	12	19.81	19.83	19.54		
5	16QAM	1	24	19.76	19.83	19.52	21.5	0
5	16QAM	12	0	20.02	19.89	19.84		
5	16QAM	12	7	19.96	19.86	19.73		
5	16QAM	12	13	20.02	19.83	19.71	21.5	0
5	16QAM	25	0	19.99	19.83	19.86		
5	64QAM	1	0	19.75	19.87	19.76		
5	64QAM	1	12	19.82	19.93	19.67	21.5	0
5	64QAM	1	24	19.95	19.95	19.63		
5	64QAM	12	0	20.00	19.84	19.73		
5	64QAM	12	7	20.01	19.80	19.76	21	0.5
5	64QAM	12	13	19.87	19.75	19.71		
5	64QAM	25	0	20.03	19.88	19.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	20.02	19.89	19.86	21.5	0
3	QPSK	1	8	20.04	19.93	19.77		
3	QPSK	1	14	20.03	19.80	19.77		
3	QPSK	8	0	20.12	19.89	19.84	21.5	0
3	QPSK	8	4	20.05	19.86	19.86		
3	QPSK	8	7	20.08	19.89	19.84		
3	QPSK	15	0	20.02	19.91	19.80	21.5	0
3	16QAM	1	0	20.01	19.92	19.71		
3	16QAM	1	8	20.00	19.93	19.74		
3	16QAM	1	14	20.07	20.01	19.75	21.5	0
3	16QAM	8	0	20.04	19.92	19.84		
3	16QAM	8	4	19.95	20.00	19.90		
3	16QAM	8	7	20.03	19.96	19.79	21.5	0
3	16QAM	15	0	20.03	19.86	19.75		
3	64QAM	1	0	19.75	19.87	19.76		
3	64QAM	1	8	19.78	19.83	19.83	21.5	0
3	64QAM	1	14	19.97	19.86	19.75		
3	64QAM	8	0	20.05	19.96	19.83		
3	64QAM	8	4	20.11	19.92	19.85	21	0.5
3	64QAM	8	7	20.05	20.01	19.87		
3	64QAM	15	0	20.02	19.89	19.80		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	20.01	19.87	19.87	21.5	0
1.4	QPSK	1	3	20.01	19.91	19.87		
1.4	QPSK	1	5	20.03	19.87	19.84		
1.4	QPSK	3	0	20.10	19.86	19.82		
1.4	QPSK	3	1	20.11	19.94	19.81		
1.4	QPSK	3	3	20.11	19.90	19.84		
1.4	QPSK	6	0	20.07	19.90	19.81	21.5	0
1.4	16QAM	1	0	19.95	19.85	19.75	21.5	0
1.4	16QAM	1	3	20.05	19.68	19.65		
1.4	16QAM	1	5	19.94	19.82	19.87		
1.4	16QAM	3	0	20.05	19.86	19.79		
1.4	16QAM	3	1	19.98	19.91	19.87		
1.4	16QAM	3	3	20.11	19.94	19.80		
1.4	16QAM	6	0	20.10	19.82	19.90	21.5	0
1.4	64QAM	1	0	19.89	19.66	19.87	21.5	0
1.4	64QAM	1	3	19.72	19.80	19.87		
1.4	64QAM	1	5	19.75	19.78	19.79		
1.4	64QAM	3	0	20.04	19.73	19.75		
1.4	64QAM	3	1	19.99	19.79	19.70		
1.4	64QAM	3	3	19.91	19.76	19.83		
1.4	64QAM	6	0	20.01	20.02	19.87	21	0.5

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	16.51	16.62	16.62	18	0
20	QPSK	1	49	16.55	16.65	16.66		
20	QPSK	1	99	16.68	16.60	16.64		
20	QPSK	50	0	16.45	16.58	16.64	18	0
20	QPSK	50	24	16.65	16.58	16.62		
20	QPSK	50	50	16.46	16.59	16.63		
20	QPSK	100	0	16.66	16.58	16.61		
20	16QAM	1	0	16.36	16.48	16.58	18	0
20	16QAM	1	49	16.40	16.49	16.48		
20	16QAM	1	99	16.28	16.46	16.35		
20	16QAM	50	0	16.46	16.61	16.65	18	0
20	16QAM	50	24	16.42	16.56	16.63		
20	16QAM	50	50	16.44	16.57	16.65		
20	16QAM	100	0	16.47	16.62	16.66		
20	64QAM	1	0	16.33	16.52	16.51	18	0
20	64QAM	1	49	16.33	16.35	16.55		
20	64QAM	1	99	16.30	16.52	16.65		
20	64QAM	50	0	16.49	16.56	16.64	18	0
20	64QAM	50	24	16.47	16.57	16.63		
20	64QAM	50	50	16.45	16.60	16.62		
20	64QAM	100	0	16.52	16.59	16.61		



FCC SAR Test Report

Report No. : FA932901-02

Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	16.60	16.59	16.48	18	0
15	QPSK	1	37	16.58	16.58	16.35		
15	QPSK	1	74	16.58	16.48	16.65		
15	QPSK	36	0	16.59	16.49	16.63	18	0
15	QPSK	36	20	16.58	16.46	16.65		
15	QPSK	36	39	16.48	16.61	16.66		
15	QPSK	75	0	16.49	16.56	16.51	18	0
15	16QAM	1	0	16.36	16.57	16.55		
15	16QAM	1	37	16.40	16.62	16.65		
15	16QAM	1	74	16.28	16.52	16.64	18	0
15	16QAM	36	0	16.46	16.35	16.62		
15	16QAM	36	20	16.42	16.52	16.63		
15	16QAM	36	39	16.44	16.56	16.67	18	0
15	16QAM	75	0	16.47	16.57	16.58		
15	64QAM	1	0	16.33	16.60	16.48		
15	64QAM	1	37	16.33	16.58	16.35	18	0
15	64QAM	1	74	16.61	16.58	16.66		
15	64QAM	36	0	16.56	16.59	16.51		
15	64QAM	36	20	16.57	16.58	16.55	18	0
15	64QAM	36	39	16.62	16.57	16.65		
15	64QAM	75	0	16.63	16.62	16.63		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.53	16.66	16.65	18	0
10	QPSK	1	25	16.53	16.63	16.64		
10	QPSK	1	49	16.47	16.60	16.62		
10	QPSK	25	0	16.47	16.59	16.60	18	0
10	QPSK	25	12	16.46	16.60	16.58		
10	QPSK	25	25	16.47	16.60	16.59		
10	QPSK	50	0	16.49	16.59	16.63	18	0
10	16QAM	1	0	16.36	16.40	16.39		
10	16QAM	1	25	16.30	16.49	16.52		
10	16QAM	1	49	16.24	16.45	16.49	18	0
10	16QAM	25	0	16.45	16.60	16.59		
10	16QAM	25	12	16.48	16.60	16.63		
10	16QAM	25	25	16.48	16.64	16.63	18	0
10	16QAM	50	0	16.51	16.62	16.66		
10	64QAM	1	0	16.24	16.42	16.41		
10	64QAM	1	25	16.25	16.44	16.48	18	0
10	64QAM	1	49	16.30	16.44	16.38		
10	64QAM	25	0	16.45	16.58	16.62		
10	64QAM	25	12	16.47	16.59	16.62	18	0
10	64QAM	25	25	16.45	16.62	16.61		
10	64QAM	50	0	16.50	16.62	16.65		

Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.50	16.62	16.64	18	0
5	QPSK	1	12	16.49	16.61	16.66		
5	QPSK	1	24	16.50	16.60	16.64		
5	QPSK	12	0	16.48	16.58	16.61	18	0
5	QPSK	12	7	16.51	16.56	16.60		
5	QPSK	12	13	16.43	16.60	16.59		
5	QPSK	25	0	16.50	16.58	16.60	18	0
5	16QAM	1	0	16.49	16.45	16.47		
5	16QAM	1	12	16.33	16.40	16.53		
5	16QAM	1	24	16.32	16.35	16.45	18	0
5	16QAM	12	0	16.40	16.52	16.54		
5	16QAM	12	7	16.45	16.52	16.56		
5	16QAM	12	13	16.44	16.58	16.56	18	0
5	16QAM	25	0	16.45	16.57	16.60		
5	64QAM	1	0	16.17	16.34	16.43		
5	64QAM	1	12	16.22	16.33	16.42	18	0
5	64QAM	1	24	16.30	16.36	16.32		
5	64QAM	12	0	16.38	16.55	16.59		
5	64QAM	12	7	16.37	16.54	16.54	18	0
5	64QAM	12	13	16.41	16.54	16.57		
5	64QAM	25	0	16.43	16.59	16.58		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.48	16.60	16.61	18	0
3	QPSK	1	8	16.52	16.59	16.62		
3	QPSK	1	14	16.53	16.62	16.64		
3	QPSK	8	0	16.43	16.58	16.58	18	0
3	QPSK	8	4	16.43	16.59	16.59		
3	QPSK	8	7	16.48	16.56	16.60		
3	QPSK	15	0	16.49	16.60	16.61	18	0
3	16QAM	1	0	16.48	16.36	16.50		
3	16QAM	1	8	16.51	16.43	16.40		
3	16QAM	1	14	16.41	16.42	16.37	18	0
3	16QAM	8	0	16.48	16.59	16.61		
3	16QAM	8	4	16.42	16.54	16.57		
3	16QAM	8	7	16.47	16.60	16.60	18	0
3	16QAM	15	0	16.49	16.54	16.59		
3	64QAM	1	0	16.28	16.32	16.47		
3	64QAM	1	8	16.20	16.29	16.40	18	0
3	64QAM	1	14	16.26	16.36	16.32		
3	64QAM	8	0	16.47	16.58	16.61		
3	64QAM	8	4	16.49	16.57	16.60	18	0
3	64QAM	8	7	16.51	16.64	16.64		
3	64QAM	15	0	16.44	16.58	16.63		



FCC SAR Test Report

Report No. : FA932901-02

Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.42	16.56	16.60	18	0
1.4	QPSK	1	3	16.47	16.60	16.62		
1.4	QPSK	1	5	16.49	16.57	16.59		
1.4	QPSK	3	0	16.51	16.55	16.60		
1.4	QPSK	3	1	16.49	16.60	16.61		
1.4	QPSK	3	3	16.53	16.53	16.63		
1.4	QPSK	6	0	16.43	16.55	16.55	18	0
1.4	16QAM	1	0	16.40	16.45	16.52	18	0
1.4	16QAM	1	3	16.35	16.42	16.40		
1.4	16QAM	1	5	16.36	16.54	16.38		
1.4	16QAM	3	0	16.28	16.51	16.46		
1.4	16QAM	3	1	16.34	16.46	16.42		
1.4	16QAM	3	3	16.46	16.44	16.50		
1.4	16QAM	6	0	16.49	16.59	16.54	18	0
1.4	64QAM	1	0	16.22	16.33	16.43	18	0
1.4	64QAM	1	3	16.39	16.43	16.40		
1.4	64QAM	1	5	16.29	16.34	16.32		
1.4	64QAM	3	0	16.34	16.44	16.51		
1.4	64QAM	3	1	16.35	16.50	16.43		
1.4	64QAM	3	3	16.38	16.49	16.54		
1.4	64QAM	6	0	16.52	16.60	16.61	18	0

<Reduced Power Mode for Handheld On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.68	19.68	20.10	21	0
20	QPSK	1	49	19.67	19.71	20.02		
20	QPSK	1	99	19.66	20.13	19.92		
20	QPSK	50	0	19.61	20.00	19.80	21	0
20	QPSK	50	24	19.61	19.58	19.89		
20	QPSK	50	50	19.59	19.66	19.97		
20	QPSK	100	0	19.70	19.58	19.89	21	0
20	16QAM	1	0	19.60	19.42	19.80		
20	16QAM	1	49	19.48	19.46	19.71		
20	16QAM	1	99	19.54	19.31	19.75	21	0
20	16QAM	50	0	19.71	19.66	20.03		
20	16QAM	50	24	19.59	19.71	20.03		
20	16QAM	50	50	19.69	19.69	19.96	21	0
20	16QAM	100	0	19.62	19.58	20.04		
20	64QAM	1	0	19.64	19.65	20.01		
20	64QAM	1	49	19.72	19.67	20.10	21	0
20	64QAM	1	99	19.60	19.74	19.98		
20	64QAM	50	0	19.66	19.62	19.97		
20	64QAM	50	24	19.58	19.71	20.03	21	0
20	64QAM	50	50	19.65	19.71	20.00		
20	64QAM	100	0	19.67	19.70	20.01		



FCC SAR Test Report

Report No. : FA932901-02

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.72	19.74	19.97	21	0
15	QPSK	1	37	19.72	19.72	19.94		
15	QPSK	1	74	19.69	19.73	19.92		
15	QPSK	36	0	19.60	19.74	19.94	21	0
15	QPSK	36	20	19.67	19.62	19.97		
15	QPSK	36	39	19.67	19.68	19.94		
15	QPSK	75	0	19.64	19.62	19.92	21	0
15	16QAM	1	0	19.56	19.68	19.78		
15	16QAM	1	37	19.48	19.51	19.83		
15	16QAM	1	74	19.68	19.45	19.73	21	0
15	16QAM	36	0	19.63	19.57	19.96		
15	16QAM	36	20	19.58	19.62	19.96		
15	16QAM	36	39	19.59	19.62	19.99	21	0
15	16QAM	75	0	19.68	19.66	20.03		
15	64QAM	1	0	19.65	19.65	19.95		
15	64QAM	1	37	19.68	19.68	19.98	21	0
15	64QAM	1	74	19.55	19.55	19.73		
15	64QAM	36	0	19.67	19.69	19.87		
15	64QAM	36	20	19.65	19.72	19.84	21	0
15	64QAM	36	39	19.56	19.68	19.94		
15	64QAM	75	0	19.66	19.73	20.03		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.65	19.68	19.87	21	0
10	QPSK	1	25	19.68	19.75	19.84		
10	QPSK	1	49	19.55	19.68	19.94		
10	QPSK	25	0	19.63	19.66	20.04	21	0
10	QPSK	25	12	19.65	19.68	20.04		
10	QPSK	25	25	19.57	19.73	19.97		
10	QPSK	50	0	19.62	19.61	20.06	21	0
10	16QAM	1	0	19.66	19.75	19.96		
10	16QAM	1	25	19.63	19.67	19.87		
10	16QAM	1	49	19.63	19.57	19.84	21	0
10	16QAM	25	0	19.57	19.71	20.06		
10	16QAM	25	12	19.63	19.66	20.01		
10	16QAM	25	25	19.61	19.75	19.98	21	0
10	16QAM	50	0	19.59	19.67	20.05		
10	64QAM	1	0	19.70	19.70	19.94		
10	64QAM	1	25	19.70	19.70	19.97	21	0
10	64QAM	1	49	19.53	19.56	20.00		
10	64QAM	25	0	19.68	19.62	19.94		
10	64QAM	25	12	19.66	19.68	20.00	21	0
10	64QAM	25	25	19.62	19.72	20.00		
10	64QAM	50	0	19.62	19.76	19.70		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 137 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.61	19.65	19.97	21	0
5	QPSK	1	12	19.63	19.64	19.94		
5	QPSK	1	24	19.53	19.69	19.97		
5	QPSK	12	0	19.52	19.65	20.00	21	0
5	QPSK	12	7	19.60	19.60	19.94		
5	QPSK	12	13	19.52	19.61	20.00		
5	QPSK	25	0	19.60	19.63	20.00	21	0
5	16QAM	1	0	19.52	19.59	19.70		
5	16QAM	1	12	19.44	19.49	19.78		
5	16QAM	1	24	19.60	19.65	19.70	21	0
5	16QAM	12	0	19.55	19.57	19.97		
5	16QAM	12	7	19.53	19.63	19.94		
5	16QAM	12	13	19.57	19.66	20.00	21	0
5	16QAM	25	0	19.54	19.67	19.94		
5	64QAM	1	0	19.70	19.67	20.08		
5	64QAM	1	12	19.64	19.71	19.94	21	0
5	64QAM	1	24	19.69	19.71	20.12		
5	64QAM	12	0	19.57	19.50	19.97		
5	64QAM	12	7	19.59	19.53	19.73	21	0
5	64QAM	12	13	19.57	19.58	19.74		
5	64QAM	25	0	19.61	19.51	19.91		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.64	19.70	20.09	21	0
3	QPSK	1	8	19.70	19.61	19.94		
3	QPSK	1	14	19.64	19.67	19.98		
3	QPSK	8	0	19.61	19.71	20.04	21	0
3	QPSK	8	4	19.61	19.74	20.07		
3	QPSK	8	7	19.60	19.69	20.01		
3	QPSK	15	0	19.59	19.71	19.97	21	0
3	16QAM	1	0	19.51	19.53	19.73		
3	16QAM	1	8	19.60	19.62	19.74		
3	16QAM	1	14	19.49	19.55	19.91	21	0
3	16QAM	8	0	19.64	19.52	19.97		
3	16QAM	8	4	19.61	19.62	20.01		
3	16QAM	8	7	19.61	19.65	19.97	21	0
3	16QAM	15	0	19.49	19.53	19.96		
3	64QAM	1	0	19.61	19.61	19.91		
3	64QAM	1	8	19.46	19.45	19.92	21	0
3	64QAM	1	14	19.63	19.57	19.95		
3	64QAM	8	0	19.56	19.58	19.99		
3	64QAM	8	4	19.60	19.62	19.91	21	0
3	64QAM	8	7	19.57	19.50	19.96		
3	64QAM	15	0	19.64	19.62	20.09		

Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.68	19.65	19.97	21	0
1.4	QPSK	1	3	19.71	19.71	20.08		
1.4	QPSK	1	5	19.72	19.65	20.10		
1.4	QPSK	3	0	19.58	19.68	20.02		
1.4	QPSK	3	1	19.68	19.69	20.07		
1.4	QPSK	3	3	19.63	19.65	20.03		
1.4	QPSK	6	0	19.62	19.68	20.08	21	0
1.4	16QAM	1	0	19.60	19.63	19.85	21	0
1.4	16QAM	1	3	19.63	19.51	19.92		
1.4	16QAM	1	5	19.62	19.48	19.92		
1.4	16QAM	3	0	19.60	19.50	19.99		
1.4	16QAM	3	1	19.60	19.63	19.97		
1.4	16QAM	3	3	19.63	19.59	19.90		
1.4	16QAM	6	0	19.48	19.65	19.92	21	0
1.4	64QAM	1	0	19.67	19.53	19.92	21	0
1.4	64QAM	1	3	19.69	19.60	19.99		
1.4	64QAM	1	5	19.52	19.60	19.97		
1.4	64QAM	3	0	19.64	19.64	19.90		
1.4	64QAM	3	1	19.55	19.63	19.92		
1.4	64QAM	3	3	19.54	19.52	20.02		
1.4	64QAM	6	0	19.62	19.61	20.09	21	0

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.88	20.15	19.99	21.5	0
20	QPSK	1	49	19.87	20.10	20.05		
20	QPSK	1	99	20.03	20.10	20.06		
20	QPSK	50	0	19.85	20.06	20.03	21.5	0
20	QPSK	50	24	19.90	19.89	20.00		
20	QPSK	50	50	19.77	19.85	20.05		
20	QPSK	100	0	19.85	19.91	20.04	21.5	0
20	16QAM	1	0	19.71	19.65	19.70		
20	16QAM	1	49	19.56	19.57	19.68		
20	16QAM	1	99	19.51	19.53	19.71	21.5	0
20	16QAM	50	0	19.90	19.87	20.02		
20	16QAM	50	24	19.85	19.87	20.07		
20	16QAM	50	50	19.84	19.92	19.94	21.5	0
20	16QAM	100	0	19.79	19.91	20.01		
20	64QAM	1	0	20.03	20.09	20.10		
20	64QAM	1	49	20.01	19.92	20.02	21.5	0
20	64QAM	1	99	20.01	19.88	19.94		
20	64QAM	50	0	19.44	19.38	19.56		
20	64QAM	50	24	19.40	19.39	19.53	21	0.5
20	64QAM	50	50	19.41	19.44	19.45		
20	64QAM	100	0	19.48	19.40	19.58		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.01	19.91	19.91	21.5	0
15	QPSK	1	37	19.90	19.90	20.07		
15	QPSK	1	74	19.90	19.94	19.97		
15	QPSK	36	0	19.90	19.89	20.01	21.5	0
15	QPSK	36	20	19.93	19.91	19.98		
15	QPSK	36	39	19.86	19.85	19.96		
15	QPSK	75	0	19.86	19.94	19.97	21.5	0
15	16QAM	1	0	19.78	19.53	19.72		
15	16QAM	1	37	19.54	19.66	19.67		
15	16QAM	1	74	19.54	19.71	19.76	21.5	0
15	16QAM	36	0	19.88	19.90	19.98		
15	16QAM	36	20	19.91	19.89	19.94		
15	16QAM	36	39	19.91	19.87	20.03	21.5	0
15	16QAM	75	0	19.90	19.96	20.01		
15	64QAM	1	0	20.05	19.82	20.04		
15	64QAM	1	37	19.81	19.82	20.13	21.5	0
15	64QAM	1	74	20.12	19.81	19.88		
15	64QAM	36	0	19.45	19.43	19.48		
15	64QAM	36	20	19.38	19.32	19.48	21	0.5
15	64QAM	36	39	19.43	19.44	19.38		
15	64QAM	75	0	19.33	19.36	19.44		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.94	19.97	20.05	21.5	0
10	QPSK	1	25	19.91	19.97	20.13		
10	QPSK	1	49	19.98	19.87	19.93		
10	QPSK	25	0	19.86	19.88	20.03	21.5	0
10	QPSK	25	12	19.88	19.89	20.06		
10	QPSK	25	25	19.84	19.81	20.07		
10	QPSK	50	0	19.88	19.87	20.05	21.5	0
10	16QAM	1	0	19.72	19.81	19.70		
10	16QAM	1	25	19.73	19.72	19.76		
10	16QAM	1	49	19.72	19.76	19.85	21.5	0
10	16QAM	25	0	19.88	19.90	20.02		
10	16QAM	25	12	19.82	19.88	20.03		
10	16QAM	25	25	19.90	19.87	20.11	21.5	0
10	16QAM	50	0	19.89	19.85	20.01		
10	64QAM	1	0	19.89	19.78	19.96		
10	64QAM	1	25	19.99	19.75	20.04	21.5	0
10	64QAM	1	49	19.99	19.88	20.04		
10	64QAM	25	0	19.33	19.37	19.52		
10	64QAM	25	12	19.41	19.41	19.54	21	0.5
10	64QAM	25	25	19.43	19.41	19.50		
10	64QAM	50	0	19.44	19.38	19.56		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 141 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.94	19.94	20.08	21.5	0
5	QPSK	1	12	19.92	19.94	20.02		
5	QPSK	1	24	19.86	19.95	20.10		
5	QPSK	12	0	19.88	19.87	20.07	21.5	0
5	QPSK	12	7	19.90	19.91	20.13		
5	QPSK	12	13	19.88	19.95	20.09		
5	QPSK	25	0	19.92	19.96	20.04	21.5	0
5	16QAM	1	0	19.83	19.63	19.91		
5	16QAM	1	12	19.76	19.68	19.82		
5	16QAM	1	24	19.81	19.72	19.63	21.5	0
5	16QAM	12	0	19.84	19.69	19.99		
5	16QAM	12	7	19.76	19.76	19.95		
5	16QAM	12	13	19.78	19.82	20.04	21.5	0
5	16QAM	25	0	19.97	19.96	20.04		
5	64QAM	1	0	19.88	19.88	20.13		
5	64QAM	1	12	20.06	19.94	19.96	21.5	0
5	64QAM	1	24	19.90	19.80	20.02		
5	64QAM	12	0	19.28	19.33	19.47		
5	64QAM	12	7	19.26	19.31	19.58	21	0.5
5	64QAM	12	13	19.33	19.44	19.54		
5	64QAM	25	0	19.34	19.41	19.54		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.97	19.90	20.09	21.5	0
3	QPSK	1	8	19.95	19.87	20.14		
3	QPSK	1	14	19.95	19.91	19.91		
3	QPSK	8	0	19.93	19.92	20.12	21.5	0
3	QPSK	8	4	19.88	19.86	20.11		
3	QPSK	8	7	19.90	19.89	20.10		
3	QPSK	15	0	19.93	19.88	20.11	21.5	0
3	16QAM	1	0	19.73	19.63	19.98		
3	16QAM	1	8	19.86	19.65	19.91		
3	16QAM	1	14	19.88	19.88	20.01	21.5	0
3	16QAM	8	0	19.90	20.00	19.95		
3	16QAM	8	4	19.79	19.96	20.12		
3	16QAM	8	7	19.85	20.05	20.04	21.5	0
3	16QAM	15	0	19.83	19.86	19.99		
3	64QAM	1	0	19.68	19.88	20.04		
3	64QAM	1	8	19.94	19.97	19.71	21.5	0
3	64QAM	1	14	19.85	19.95	19.92		
3	64QAM	8	0	19.37	19.34	19.70		
3	64QAM	8	4	19.41	19.34	19.65	21	0.5
3	64QAM	8	7	19.42	19.31	19.58		
3	64QAM	15	0	19.33	19.38	19.58		

Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.81	19.88	20.05	21.5	0
1.4	QPSK	1	3	19.98	19.92	19.96		
1.4	QPSK	1	5	19.90	19.91	20.13		
1.4	QPSK	3	0	19.89	19.97	20.14		
1.4	QPSK	3	1	19.92	19.93	20.05		
1.4	QPSK	3	3	19.91	20.00	20.11		
1.4	QPSK	6	0	19.89	19.88	20.09	21.5	0
1.4	16QAM	1	0	19.77	19.78	19.95	21.5	0
1.4	16QAM	1	3	19.55	19.92	19.97		
1.4	16QAM	1	5	19.97	19.80	19.94		
1.4	16QAM	3	0	19.79	19.80	20.05		
1.4	16QAM	3	1	19.70	19.88	19.98		
1.4	16QAM	3	3	19.81	19.86	20.04		
1.4	16QAM	6	0	19.79	19.82	20.13	21.5	0
1.4	64QAM	1	0	19.73	19.95	20.10	21.5	0
1.4	64QAM	1	3	19.75	19.72	20.08		
1.4	64QAM	1	5	19.70	19.77	20.10		
1.4	64QAM	3	0	19.79	19.82	19.90		
1.4	64QAM	3	1	19.91	19.81	20.06		
1.4	64QAM	3	3	19.84	19.96	19.98		
1.4	64QAM	6	0	19.45	19.42	19.66	21	0.5

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.68	18.64	18.79	20	0
20	QPSK	1	49	18.61	18.66	18.73		
20	QPSK	1	99	18.48	18.56	18.60		
20	QPSK	50	0	18.63	18.64	18.64	20	0
20	QPSK	50	24	18.56	18.60	18.63		
20	QPSK	50	50	18.61	18.52	18.64		
20	QPSK	100	0	18.56	18.59	18.66		
20	16QAM	1	0	18.53	18.46	18.34	20	0
20	16QAM	1	49	18.41	18.38	18.37		
20	16QAM	1	99	18.33	18.23	18.32		
20	16QAM	50	0	18.65	18.65	18.64	20	0
20	16QAM	50	24	18.57	18.60	18.62		
20	16QAM	50	50	18.53	18.58	18.63		
20	16QAM	100	0	18.57	18.58	18.60		
20	64QAM	1	0	18.62	18.62	18.51	20	0
20	64QAM	1	49	18.42	18.49	18.51		
20	64QAM	1	99	18.48	18.47	18.48		
20	64QAM	50	0	18.60	18.65	18.65	20	0
20	64QAM	50	24	18.54	18.66	18.64		
20	64QAM	50	50	18.66	18.63	18.58		
20	64QAM	100	0	18.67	18.66	18.67		



FCC SAR Test Report

Report No. : FA932901-02

Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.61	18.62	18.70	20	0
15	QPSK	1	37	18.56	18.60	18.55		
15	QPSK	1	74	18.53	18.56	18.53		
15	QPSK	36	0	18.59	18.57	18.58	20	0
15	QPSK	36	20	18.63	18.57	18.55		
15	QPSK	36	39	18.56	18.55	18.52		
15	QPSK	75	0	18.60	18.60	18.58	20	0
15	16QAM	1	0	18.71	18.56	18.39		
15	16QAM	1	37	18.41	18.36	18.37		
15	16QAM	1	74	18.49	18.27	18.31	20	0
15	16QAM	36	0	18.62	18.52	18.55		
15	16QAM	36	20	18.52	18.56	18.57		
15	16QAM	36	39	18.53	18.53	18.49	20	0
15	16QAM	75	0	18.59	18.59	18.58		
15	64QAM	1	0	18.32	18.44	18.54		
15	64QAM	1	37	18.38	18.39	18.49	20	0
15	64QAM	1	74	18.29	18.24	18.43		
15	64QAM	36	0	18.65	18.64	18.54		
15	64QAM	36	20	18.57	18.58	18.59	20	0
15	64QAM	36	39	18.59	18.62	18.56		
15	64QAM	75	0	18.60	18.61	18.59		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.63	18.59	18.60	20	0
10	QPSK	1	25	18.61	18.60	18.61		
10	QPSK	1	49	18.54	18.60	18.62		
10	QPSK	25	0	18.66	18.56	18.59	20	0
10	QPSK	25	12	18.59	18.61	18.61		
10	QPSK	25	25	18.59	18.56	18.58		
10	QPSK	50	0	18.60	18.56	18.56	20	0
10	16QAM	1	0	18.49	18.35	18.37		
10	16QAM	1	25	18.50	18.34	18.47		
10	16QAM	1	49	18.46	18.41	18.34	20	0
10	16QAM	25	0	18.65	18.64	18.65		
10	16QAM	25	12	18.64	18.60	18.65		
10	16QAM	25	25	18.60	18.61	18.62	20	0
10	16QAM	50	0	18.62	18.63	18.56		
10	64QAM	1	0	18.37	18.41	18.52		
10	64QAM	1	25	18.37	18.41	18.33	20	0
10	64QAM	1	49	18.33	18.36	18.25		
10	64QAM	25	0	18.66	18.64	18.64		
10	64QAM	25	12	18.60	18.60	18.57	20	0
10	64QAM	25	25	18.58	18.58	18.58		
10	64QAM	50	0	18.64	18.66	18.64		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 145 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.57	18.61	18.71	20	0
5	QPSK	1	12	18.57	18.63	18.58		
5	QPSK	1	24	18.64	18.57	18.60		
5	QPSK	12	0	18.56	18.55	18.63	20	0
5	QPSK	12	7	18.59	18.62	18.61		
5	QPSK	12	13	18.63	18.63	18.60		
5	QPSK	25	0	18.62	18.59	18.61	20	0
5	16QAM	1	0	18.58	18.43	18.50		
5	16QAM	1	12	18.54	18.40	18.52		
5	16QAM	1	24	18.39	18.47	18.49	20	0
5	16QAM	12	0	18.66	18.48	18.59		
5	16QAM	12	7	18.60	18.64	18.57		
5	16QAM	12	13	18.60	18.55	18.59	20	0
5	16QAM	25	0	18.65	18.59	18.64		
5	64QAM	1	0	18.34	18.21	18.44		
5	64QAM	1	12	18.30	18.44	18.29	20	0
5	64QAM	1	24	18.09	18.25	18.43		
5	64QAM	12	0	18.58	18.50	18.56		
5	64QAM	12	7	18.53	18.49	18.55	20	0
5	64QAM	12	13	18.55	18.52	18.53		
5	64QAM	25	0	18.60	18.59	18.66		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	19.73	20.03	20.12	21	0
20	QPSK	1	49	19.67	20.02	20.05		
20	QPSK	1	99	19.71	20.06	19.90		
20	QPSK	50	0	19.73	19.92	20.10	21	0
20	QPSK	50	24	19.62	20.00	20.10		
20	QPSK	50	50	19.71	19.64	20.11		
20	QPSK	100	0	19.60	19.69	20.00	21	0
20	16QAM	1	0	19.33	19.36	19.64		
20	16QAM	1	49	19.41	19.63	19.67		
20	16QAM	1	99	19.59	19.66	19.60	21	0
20	16QAM	50	0	19.64	19.67	20.10		
20	16QAM	50	24	19.62	19.64	20.00		
20	16QAM	50	50	19.71	19.61	19.91	21	0
20	16QAM	100	0	19.68	19.82	20.00		
20	64QAM	1	0	19.83	19.79	20.00		
20	64QAM	1	49	19.70	19.72	20.03	21	0
20	64QAM	1	99	19.79	19.76	20.03		
20	64QAM	50	0	19.66	19.66	20.11		
20	64QAM	50	24	19.68	19.65	20.01	21	0
20	64QAM	50	50	19.65	19.61	19.91		
20	64QAM	100	0	19.66	19.64	20.03		



FCC SAR Test Report

Report No. : FA932901-02

Channel				19.67	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				19.82	1880	1907.5		
15	QPSK	1	0	19.78	19.74	20.02	21	0
15	QPSK	1	37	19.72	19.89	20.04		
15	QPSK	1	74	19.76	19.79	19.89		
15	QPSK	36	0	19.78	19.72	20.09	21	0
15	QPSK	36	20	19.67	19.76	20.09		
15	QPSK	36	39	19.76	19.75	19.91		
15	QPSK	75	0	19.65	19.82	19.99	21	0
15	16QAM	1	0	19.75	19.34	19.63		
15	16QAM	1	37	19.46	19.55	19.66		
15	16QAM	1	74	19.64	19.43	19.59	21	0
15	16QAM	36	0	19.69	19.70	20.09		
15	16QAM	36	20	19.67	19.73	19.99		
15	16QAM	36	39	19.76	19.74	19.90	21	0
15	16QAM	75	0	19.73	19.71	19.99		
15	64QAM	1	0	19.88	19.68	20.02		
15	64QAM	1	37	19.75	19.89	20.02	21	0
15	64QAM	1	74	19.84	19.86	20.02		
15	64QAM	36	0	19.71	19.79	20.10		
15	64QAM	36	20	19.73	19.83	20.00	21	0
15	64QAM	36	39	19.70	19.73	19.90		
15	64QAM	75	0	19.71	19.72	20.02		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	19.90	19.79	20.01	21	0
10	QPSK	1	25	19.80	19.73	20.03		
10	QPSK	1	49	19.73	19.77	19.88		
10	QPSK	25	0	19.77	19.79	20.08	21	0
10	QPSK	25	12	19.76	19.68	20.08		
10	QPSK	25	25	19.83	19.77	19.90		
10	QPSK	50	0	19.68	19.66	19.98	21	0
10	16QAM	1	0	19.56	19.39	19.62		
10	16QAM	1	25	19.44	19.47	19.65		
10	16QAM	1	49	19.71	19.65	19.58	21	0
10	16QAM	25	0	19.74	19.70	20.08		
10	16QAM	25	12	19.75	19.68	19.98		
10	16QAM	25	25	19.72	19.77	19.89	21	0
10	16QAM	50	0	19.69	19.74	19.98		
10	64QAM	1	0	19.90	19.89	19.99		
10	64QAM	1	25	19.87	19.76	20.01	21	0
10	64QAM	1	49	19.80	19.85	20.01		
10	64QAM	25	0	19.84	19.72	20.09		
10	64QAM	25	12	19.74	19.74	19.99	21	0
10	64QAM	25	25	19.73	19.71	19.89		
10	64QAM	50	0	19.62	19.72	20.01		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 148 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				26065	19.75	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	19.80	19.71	20.01	21	0
5	QPSK	1	12	19.74	19.86	20.03		
5	QPSK	1	24	19.78	19.76	19.88		
5	QPSK	12	0	19.80	19.69	20.08	21	0
5	QPSK	12	7	19.69	19.73	20.08		
5	QPSK	12	13	19.78	19.72	19.90		
5	QPSK	25	0	19.67	19.79	19.98	21	0
5	16QAM	1	0	19.40	19.31	19.62		
5	16QAM	1	12	19.48	19.52	19.65		
5	16QAM	1	24	19.66	19.40	19.58	21	0
5	16QAM	12	0	19.71	19.67	20.08		
5	16QAM	12	7	19.69	19.70	19.98		
5	16QAM	12	13	19.78	19.71	19.89	21	0
5	16QAM	25	0	19.75	19.68	19.98		
5	64QAM	1	0	19.90	19.65	19.99		
5	64QAM	1	12	19.77	19.86	20.01	21	0
5	64QAM	1	24	19.86	19.83	20.01		
5	64QAM	12	0	19.73	19.76	20.09		
5	64QAM	12	7	19.75	19.80	19.99	21	0
5	64QAM	12	13	19.72	19.70	19.89		
5	64QAM	25	0	19.73	19.69	20.01		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	19.73	19.81	20.00	21	0
3	QPSK	1	8	19.88	19.75	20.02		
3	QPSK	1	14	19.78	19.79	19.87		
3	QPSK	8	0	19.71	19.81	20.07	21	0
3	QPSK	8	4	19.75	19.70	20.07		
3	QPSK	8	7	19.74	19.79	19.89		
3	QPSK	15	0	19.81	19.68	19.97	21	0
3	16QAM	1	0	19.33	19.41	19.61		
3	16QAM	1	8	19.54	19.49	19.64		
3	16QAM	1	14	19.42	19.67	19.57	21	0
3	16QAM	8	0	19.69	19.72	20.07		
3	16QAM	8	4	19.72	19.70	19.97		
3	16QAM	8	7	19.73	19.79	19.88	21	0
3	16QAM	15	0	19.70	19.76	19.97		
3	64QAM	1	0	19.67	19.91	19.97		
3	64QAM	1	8	19.88	19.78	20.00	21	0
3	64QAM	1	14	19.85	19.87	20.00		
3	64QAM	8	0	19.78	19.74	20.08		
3	64QAM	8	4	19.82	19.76	19.98	21	0
3	64QAM	8	7	19.72	19.73	19.88		
3	64QAM	15	0	19.71	19.74	20.00		

Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	19.86	19.70	19.70	21	0
1.4	QPSK	1	3	19.97	19.97	20.07		
1.4	QPSK	1	5	19.97	19.97	19.97		
1.4	QPSK	3	0	19.72	19.70	19.88		
1.4	QPSK	3	1	19.73	19.79	19.97		
1.4	QPSK	3	3	19.71	19.76	19.88		
1.4	QPSK	6	0	19.86	19.91	20.00	21	0
1.4	16QAM	1	0	19.76	19.78	20.00	21	0
1.4	16QAM	1	3	19.69	19.87	20.08		
1.4	16QAM	1	5	19.73	19.74	19.98		
1.4	16QAM	3	0	19.72	19.76	19.88		
1.4	16QAM	3	1	19.79	19.73	20.00		
1.4	16QAM	3	3	19.79	19.74	20.02		
1.4	16QAM	6	0	19.52	19.73	19.87	21	0
1.4	64QAM	1	0	19.79	19.88	20.07	21	0
1.4	64QAM	1	3	19.67	19.78	20.07		
1.4	64QAM	1	5	19.70	19.71	19.89		
1.4	64QAM	3	0	19.71	19.75	19.97		
1.4	64QAM	3	1	19.68	19.74	19.61		
1.4	64QAM	3	3	19.65	19.54	19.64		
1.4	64QAM	6	0	19.86	19.42	19.61	21	0

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	20.19	20.12	20.15	21.5	0
20	QPSK	1	49	20.19	20.11	20.22		
20	QPSK	1	99	20.28	20.16	20.17		
20	QPSK	50	0	20.16	20.15	20.19	21.5	0
20	QPSK	50	24	20.25	20.12	20.23		
20	QPSK	50	50	20.19	20.08	20.22		
20	QPSK	100	0	20.26	20.18	20.25	21.5	0
20	16QAM	1	0	19.91	19.98	19.94		
20	16QAM	1	49	20.09	19.69	20.12		
20	16QAM	1	99	19.88	19.79	19.91	21.5	0
20	16QAM	50	0	20.15	20.17	20.18		
20	16QAM	50	24	20.14	20.13	20.17		
20	16QAM	50	50	20.08	20.18	20.11	21.5	0
20	16QAM	100	0	20.21	20.17	20.24		
20	64QAM	1	0	20.14	19.99	20.17		
20	64QAM	1	49	19.95	19.89	19.98	21.5	0
20	64QAM	1	99	20.11	19.99	20.14		
20	64QAM	50	0	19.50	19.45	19.69		
20	64QAM	50	24	19.56	19.41	19.75	21	0.5
20	64QAM	50	50	19.54	19.48	19.73		
20	64QAM	100	0	19.50	19.40	19.69		



FCC SAR Test Report

Report No. : FA932901-02

Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	20.23	20.18	19.99	21.5	0
15	QPSK	1	37	20.05	20.14	20.05		
15	QPSK	1	74	19.95	20.24	20.10		
15	QPSK	36	0	20.05	20.04	19.82	21.5	0
15	QPSK	36	20	20.23	19.75	19.93		
15	QPSK	36	39	20.19	19.85	20.12		
15	QPSK	75	0	20.26	20.23	20.18	21.5	0
15	16QAM	1	0	20.18	20.19	20.08		
15	16QAM	1	37	20.15	20.24	20.15		
15	16QAM	1	74	20.19	20.23	20.18	21.5	0
15	16QAM	36	0	20.14	20.05	20.17		
15	16QAM	36	20	20.16	19.95	20.22		
15	16QAM	36	39	20.22	20.05	20.21	21.5	0
15	16QAM	75	0	20.19	20.23	20.18		
15	64QAM	1	0	20.22	20.19	20.14		
15	64QAM	1	37	19.91	20.26	20.24	21.5	0
15	64QAM	1	74	20.09	20.18	20.04		
15	64QAM	36	0	19.53	19.40	19.50		
15	64QAM	36	20	19.50	19.47	19.56	21	0.5
15	64QAM	36	39	19.53	19.42	19.74		
15	64QAM	75	0	19.48	19.44	19.70		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	19.85	20.12	20.05	21.5	0
10	QPSK	1	25	20.23	20.18	20.23		
10	QPSK	1	49	20.19	20.08	20.19		
10	QPSK	25	0	20.24	20.15	20.26	21.5	0
10	QPSK	25	12	20.23	20.18	20.18		
10	QPSK	25	25	20.05	20.17	20.15		
10	QPSK	50	0	19.95	20.22	20.19	21.5	0
10	16QAM	1	0	20.05	20.21	20.14		
10	16QAM	1	25	20.23	20.19	20.16		
10	16QAM	1	49	20.19	20.26	20.23	21.5	0
10	16QAM	25	0	20.26	20.18	20.19		
10	16QAM	25	12	20.18	20.16	20.24		
10	16QAM	25	25	20.20	20.19	20.23	21.5	0
10	16QAM	50	0	20.16	20.15	20.05		
10	64QAM	1	0	20.22	20.12	19.95		
10	64QAM	1	25	20.19	20.08	20.05	21.5	0
10	64QAM	1	49	20.22	20.18	20.23		
10	64QAM	25	0	19.68	19.66	19.70		
10	64QAM	25	12	19.84	19.73	19.77	21	0.5
10	64QAM	25	25	19.73	19.77	19.69		
10	64QAM	50	0	19.50	19.85	19.71		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56YD3

Page 152 of 290

Issued Date : Sep. 05, 2019

Form version. : 170509



FCC SAR Test Report

Report No. : FA932901-02

Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	20.19	19.93	20.18	21.5	0
5	QPSK	1	12	20.16	20.12	20.08		
5	QPSK	1	24	20.12	20.18	20.15		
5	QPSK	12	0	20.22	20.08	20.18	21.5	0
5	QPSK	12	7	20.02	20.15	20.17		
5	QPSK	12	13	19.73	20.18	20.22		
5	QPSK	25	0	19.83	20.17	20.21	21.5	0
5	16QAM	1	0	20.21	20.22	19.92		
5	16QAM	1	12	20.17	20.21	20.10		
5	16QAM	1	24	20.22	20.23	20.19	21.5	0
5	16QAM	12	0	20.21	20.20	20.16		
5	16QAM	12	7	20.03	20.23	20.12		
5	16QAM	12	13	19.93	19.92	20.22	21.5	0
5	16QAM	25	0	20.03	20.10	20.02		
5	64QAM	1	0	20.21	19.89	20.17		
5	64QAM	1	12	20.17	20.16	19.83	21.5	0
5	64QAM	1	24	20.24	20.15	20.21		
5	64QAM	12	0	19.70	19.79	19.80		
5	64QAM	12	7	19.64	19.75	19.79	21	0.5
5	64QAM	12	13	19.77	19.80	19.76		
5	64QAM	25	0	19.70	19.79	19.72		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	20.25	20.14	19.99	21.5	0
3	QPSK	1	8	20.20	20.16	20.05		
3	QPSK	1	14	20.15	20.15	20.10		
3	QPSK	8	0	20.17	20.20	19.82	21.5	0
3	QPSK	8	4	20.23	20.19	19.93		
3	QPSK	8	7	20.20	20.16	20.12		
3	QPSK	15	0	20.23	20.12	20.18	21.5	0
3	16QAM	1	0	19.92	20.22	20.08		
3	16QAM	1	8	20.10	20.02	20.15		
3	16QAM	1	14	19.89	19.73	20.18	21.5	0
3	16QAM	8	0	20.16	19.83	20.17		
3	16QAM	8	4	20.15	20.21	20.22		
3	16QAM	8	7	20.09	20.17	20.21	21.5	0
3	16QAM	15	0	20.22	20.22	20.18		
3	64QAM	1	0	20.15	20.21	20.14		
3	64QAM	1	8	19.96	20.03	20.24	21.5	0
3	64QAM	1	14	20.12	19.93	20.04		
3	64QAM	8	0	19.71	19.61	19.73		
3	64QAM	8	4	19.76	19.79	19.67	21	0.5
3	64QAM	8	7	19.58	19.75	19.80		
3	64QAM	15	0	19.62	19.82	19.76		

Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	20.23	20.23	20.12	21.5	0
1.4	QPSK	1	3	19.92	20.05	20.22		
1.4	QPSK	1	5	20.10	19.95	20.02		
1.4	QPSK	3	0	19.89	20.05	19.73		
1.4	QPSK	3	1	20.16	20.23	19.83		
1.4	QPSK	3	3	20.15	20.19	20.22		
1.4	QPSK	6	0	20.18	20.26	20.21	21.5	0
1.4	16QAM	1	0	20.17	20.18	20.03	21.5	0
1.4	16QAM	1	3	20.12	20.13	19.93		
1.4	16QAM	1	5	20.18	20.19	20.03		
1.4	16QAM	3	0	20.08	20.14	20.19		
1.4	16QAM	3	1	20.15	20.16	20.16		
1.4	16QAM	3	3	20.18	20.22	20.12		
1.4	16QAM	6	0	20.17	20.19	20.22	21.5	0
1.4	64QAM	1	0	19.89	20.05	20.02	21.5	0
1.4	64QAM	1	3	20.14	19.91	19.73		
1.4	64QAM	1	5	20.18	20.09	20.14		
1.4	64QAM	3	0	20.14	20.19	20.04		
1.4	64QAM	3	1	20.18	20.18	20.15		
1.4	64QAM	3	3	20.17	20.14	20.09		
1.4	64QAM	6	0	19.80	19.76	19.69	21	0.5

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

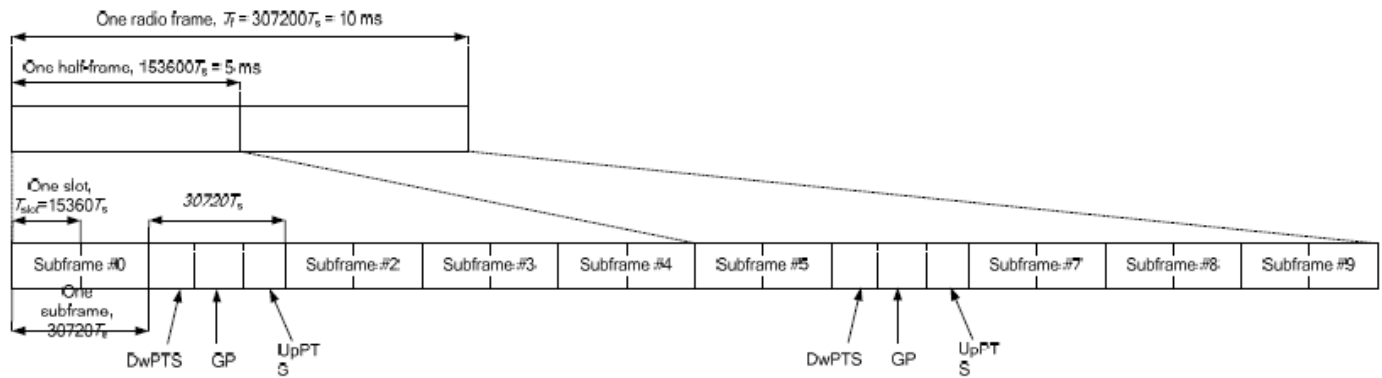


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<Full Power Mode>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.76	22.61	22.61	24	0
20	QPSK	1	49	22.66	22.54	22.57		
20	QPSK	1	99	22.61	22.51	22.48		
20	QPSK	50	0	21.69	21.51	21.53	23	1
20	QPSK	50	24	21.65	21.47	21.50		
20	QPSK	50	50	21.61	21.47	21.45		
20	QPSK	100	0	21.65	21.48	21.49	23	1
20	16QAM	1	0	21.67	21.51	21.54		
20	16QAM	1	49	21.56	21.45	21.46		
20	16QAM	1	99	21.50	21.41	21.37	22	2
20	16QAM	50	0	20.69	20.55	20.55		
20	16QAM	50	24	20.68	20.51	20.52		
20	16QAM	50	50	20.63	20.47	20.46	22	2
20	16QAM	100	0	20.71	20.54	20.56		
20	64QAM	1	0	20.53	20.43	20.32	22	2
20	64QAM	1	49	20.41	20.34	20.27		
20	64QAM	1	99	20.43	20.26	20.16		
20	64QAM	50	0	20.00	19.79	19.85	21	3
20	64QAM	50	24	19.96	19.77	19.81		
20	64QAM	50	50	19.93	19.74	19.78		
20	64QAM	100	0	19.96	19.77	19.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.71	22.60	22.61	24	0
15	QPSK	1	37	22.62	22.53	22.57		
15	QPSK	1	74	22.62	22.50	22.50		
15	QPSK	36	0	21.65	21.50	21.51	23	1
15	QPSK	36	20	21.59	21.49	21.49		
15	QPSK	36	39	21.58	21.47	21.45		
15	QPSK	75	0	21.62	21.49	21.48		
15	16QAM	1	0	21.46	21.56	21.55	23	1
15	16QAM	1	37	21.40	21.49	21.49		
15	16QAM	1	74	21.38	21.48	21.45		
15	16QAM	36	0	20.63	20.49	20.51	22	2
15	16QAM	36	20	20.58	20.46	20.48		
15	16QAM	36	39	20.56	20.44	20.44		
15	16QAM	75	0	20.66	20.52	20.53		
15	64QAM	1	0	20.56	20.40	20.39	22	2
15	64QAM	1	37	20.52	20.40	20.31		
15	64QAM	1	74	20.47	20.32	20.26		
15	64QAM	36	0	19.91	19.80	19.78	21	3
15	64QAM	36	20	19.86	19.77	19.76		
15	64QAM	36	39	19.83	19.75	19.72		
15	64QAM	75	0	19.87	19.78	19.75		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.68	22.57	22.61	24	0
10	QPSK	1	25	22.63	22.53	22.59		
10	QPSK	1	49	22.60	22.53	22.54		
10	QPSK	25	0	21.61	21.51	21.53	23	1
10	QPSK	25	12	21.60	21.50	21.50		
10	QPSK	25	25	21.56	21.47	21.47		
10	QPSK	50	0	21.58	21.49	21.48		
10	16QAM	1	0	21.68	21.58	21.53	23	1
10	16QAM	1	25	21.61	21.53	21.47		
10	16QAM	1	49	21.52	21.52	21.42		
10	16QAM	25	0	20.70	20.56	20.63	22	2
10	16QAM	25	12	20.66	20.53	20.61		
10	16QAM	25	25	20.63	20.53	20.58		
10	16QAM	50	0	20.61	20.50	20.52		
10	64QAM	1	0	20.60	20.35	20.32	22	2
10	64QAM	1	25	20.47	20.36	20.30		
10	64QAM	1	49	20.44	20.33	20.19		
10	64QAM	25	0	19.86	19.72	19.75	21	3
10	64QAM	25	12	19.82	19.72	19.73		
10	64QAM	25	25	19.81	19.70	19.71		
10	64QAM	50	0	19.91	19.79	19.80		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.69	22.58	22.65	24	0
5	QPSK	1	12	22.66	22.58	22.61		
5	QPSK	1	24	22.62	22.55	22.57		
5	QPSK	12	0	21.62	21.49	21.53	23	1
5	QPSK	12	7	21.61	21.50	21.52		
5	QPSK	12	13	21.59	21.48	21.50		
5	QPSK	25	0	21.62	21.50	21.52		
5	16QAM	1	0	21.54	21.54	21.61	23	1
5	16QAM	1	12	21.53	21.53	21.62		
5	16QAM	1	24	21.49	21.55	21.47		
5	16QAM	12	0	20.63	20.46	20.57	22	2
5	16QAM	12	7	20.59	20.45	20.55		
5	16QAM	12	13	20.57	20.48	20.54		
5	16QAM	25	0	20.69	20.56	20.61		
5	64QAM	1	0	20.56	20.33	20.52	22	2
5	64QAM	1	12	20.59	20.38	20.37		
5	64QAM	1	24	20.44	20.33	20.43		
5	64QAM	12	0	19.80	19.65	19.70	21	3
5	64QAM	12	7	19.76	19.66	19.71		
5	64QAM	12	13	19.76	19.67	19.70		
5	64QAM	25	0	19.83	19.74	19.75		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.37	22.71	22.76	22.69	22.69	24	0
20	QPSK	1	49	22.34	22.59	22.72	22.62	22.66		
20	QPSK	1	99	22.34	22.54	22.68	22.55	22.60		
20	QPSK	50	0	21.34	21.58	21.69	21.61	21.59	23	1
20	QPSK	50	24	21.33	21.55	21.66	21.58	21.57		
20	QPSK	50	50	21.33	21.50	21.62	21.53	21.54		
20	QPSK	100	0	21.33	21.56	21.67	21.59	21.56		
20	16QAM	1	0	21.30	21.64	21.77	21.72	21.56	23	1
20	16QAM	1	49	21.28	21.55	21.67	21.63	21.51		
20	16QAM	1	99	21.29	21.47	21.65	21.55	21.44		
20	16QAM	50	0	20.34	20.63	20.73	20.65	20.62	22	2
20	16QAM	50	24	20.35	20.57	20.69	20.62	20.58		
20	16QAM	50	50	20.34	20.52	20.66	20.57	20.55		
20	16QAM	100	0	20.38	20.62	20.73	20.64	20.61		
20	64QAM	1	0	20.59	20.70	20.92	20.79	20.77	22	2
20	64QAM	1	49	20.54	20.59	20.87	20.74	20.72		
20	64QAM	1	99	20.50	20.46	20.90	20.70	20.64		
20	64QAM	50	0	19.86	20.13	20.22	20.15	20.12	21	3
20	64QAM	50	24	19.83	20.05	20.16	20.10	20.08		
20	64QAM	50	50	19.84	20.03	20.15	20.07	20.08		
20	64QAM	100	0	19.85	20.07	20.19	20.10	20.10		



FCC SAR Test Report

Report No. : FA932901-02

Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.35	22.65	22.74	22.67	22.65	24	0
15	QPSK	1	37	22.32	22.56	22.69	22.63	22.62		
15	QPSK	1	74	22.31	22.49	22.64	22.59	22.57		
15	QPSK	36	0	21.32	21.60	21.69	21.64	21.59	23	1
15	QPSK	36	20	21.31	21.55	21.66	21.62	21.56		
15	QPSK	36	39	21.29	21.50	21.63	21.58	21.56		
15	QPSK	75	0	21.31	21.54	21.66	21.60	21.55		
15	16QAM	1	0	21.23	21.57	21.71	21.69	21.64	23	1
15	16QAM	1	37	21.22	21.47	21.67	21.60	21.57		
15	16QAM	1	74	21.25	21.41	21.63	21.54	21.58		
15	16QAM	36	0	20.31	20.60	20.69	20.61	20.58	22	2
15	16QAM	36	20	20.28	20.55	20.66	20.57	20.57		
15	16QAM	36	39	20.29	20.52	20.64	20.55	20.54		
15	16QAM	75	0	20.35	20.60	20.71	20.66	20.61		
15	64QAM	1	0	20.45	20.80	20.87	20.81	20.72	22	2
15	64QAM	1	37	20.44	20.64	20.82	20.77	20.70		
15	64QAM	1	74	20.43	20.58	20.83	20.67	20.62		
15	64QAM	36	0	19.81	20.10	20.20	20.14	20.07	21	3
15	64QAM	36	20	19.80	20.05	20.17	20.10	20.06		
15	64QAM	36	39	19.79	20.04	20.15	20.06	20.04		
15	64QAM	75	0	19.80	20.05	20.18	20.10	20.07		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.38	22.65	22.73	22.70	22.68	24	0
10	QPSK	1	25	22.38	22.59	22.73	22.67	22.67		
10	QPSK	1	49	22.35	22.56	22.73	22.64	22.66		
10	QPSK	25	0	21.32	21.56	21.66	21.62	21.59	23	1
10	QPSK	25	12	21.32	21.54	21.66	21.59	21.56		
10	QPSK	25	25	21.29	21.50	21.64	21.56	21.53		
10	QPSK	50	0	21.33	21.55	21.67	21.61	21.57		
10	16QAM	1	0	21.39	21.64	21.72	21.63	21.57	23	1
10	16QAM	1	25	21.40	21.55	21.69	21.57	21.54		
10	16QAM	1	49	21.33	21.50	21.60	21.51	21.52		
10	16QAM	25	0	20.41	20.64	20.76	20.71	20.66	22	2
10	16QAM	25	12	20.40	20.63	20.74	20.68	20.64		
10	16QAM	25	25	20.40	20.60	20.72	20.65	20.62		
10	16QAM	50	0	20.36	20.58	20.70	20.62	20.59		
10	64QAM	1	0	20.54	20.66	20.80	20.82	20.81	22	2
10	64QAM	1	25	20.56	20.66	20.78	20.81	20.75		
10	64QAM	1	49	20.50	20.64	20.74	20.66	20.71		
10	64QAM	25	0	19.78	20.03	20.13	20.08	20.03	21	3
10	64QAM	25	12	19.78	19.98	20.10	20.05	20.01		
10	64QAM	25	25	19.77	19.96	20.12	20.02	20.02		
10	64QAM	50	0	19.85	20.06	20.20	20.13	20.11		

Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.33	22.59	22.68	22.68	22.66	24	0
5	QPSK	1	12	22.31	22.55	22.66	22.68	22.64		
5	QPSK	1	24	22.28	22.48	22.63	22.58	22.61		
5	QPSK	12	0	21.31	21.51	21.66	21.62	21.57	23	1
5	QPSK	12	7	21.32	21.50	21.66	21.60	21.56		
5	QPSK	12	13	21.30	21.49	21.64	21.58	21.54		
5	QPSK	25	0	21.29	21.49	21.65	21.59	21.56		
5	16QAM	1	0	21.29	21.47	21.64	21.63	21.62	23	1
5	16QAM	1	12	21.31	21.45	21.63	21.57	21.61		
5	16QAM	1	24	21.27	21.40	21.59	21.58	21.58		
5	16QAM	12	0	20.34	20.53	20.66	20.60	20.62	22	2
5	16QAM	12	7	20.34	20.51	20.66	20.58	20.62		
5	16QAM	12	13	20.35	20.51	20.64	20.58	20.60		
5	16QAM	25	0	20.39	20.57	20.77	20.67	20.65		
5	64QAM	1	0	20.60	20.72	20.73	20.76	20.71	22	2
5	64QAM	1	12	20.46	20.63	20.71	20.73	20.69		
5	64QAM	1	24	20.50	20.61	20.68	20.64	20.68		
5	64QAM	12	0	19.72	19.93	20.06	20.02	19.99	21	3
5	64QAM	12	7	19.70	19.91	20.05	20.02	19.99		
5	64QAM	12	13	19.70	19.87	20.03	20.00	19.99		
5	64QAM	25	0	19.77	19.95	20.14	20.05	20.02		

<Reduced Power Mode for P-Sensor On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.14	20.97	20.92	22	0
20	QPSK	1	49	20.93	20.93	20.91		
20	QPSK	1	99	21.05	20.89	20.85		
20	QPSK	50	0	21.03	20.93	20.88	22	0
20	QPSK	50	24	21.03	20.90	20.85		
20	QPSK	50	50	21.02	20.90	20.84		
20	QPSK	100	0	21.04	20.90	20.87	22	0
20	16QAM	1	0	20.95	20.97	20.93		
20	16QAM	1	49	21.04	20.97	20.85		
20	16QAM	1	99	20.96	20.95	20.88	22	0
20	16QAM	50	0	21.09	20.96	20.90		
20	16QAM	50	24	21.09	20.94	20.87		
20	16QAM	50	50	21.07	20.93	20.88	22	0
20	16QAM	100	0	21.07	21.03	20.96		
20	64QAM	1	0	20.80	20.74	20.77		
20	64QAM	1	49	20.92	20.61	20.68	22	0
20	64QAM	1	99	20.87	20.63	20.65		
20	64QAM	50	0	19.79	19.87	19.84		
20	64QAM	50	24	19.89	19.85	19.83	21	1
20	64QAM	50	50	19.77	19.85	19.81		
20	64QAM	100	0	19.85	19.95	19.91		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	21.04	20.97	20.94	22	0
15	QPSK	1	37	21.09	20.96	20.90		
15	QPSK	1	74	21.01	20.93	20.85		
15	QPSK	36	0	21.05	20.95	20.89	22	0
15	QPSK	36	20	21.04	20.91	20.85		
15	QPSK	36	39	21.02	20.89	20.81		
15	QPSK	75	0	21.03	20.91	20.85		
15	16QAM	1	0	21.01	20.89	21.04	22	0
15	16QAM	1	37	20.96	20.86	20.95		
15	16QAM	1	74	20.89	20.80	20.88		
15	16QAM	36	0	21.02	21.04	21.01	22	0
15	16QAM	36	20	21.03	21.02	20.96		
15	16QAM	36	39	21.05	21.00	20.93		
15	16QAM	75	0	21.09	20.96	20.91		
15	64QAM	1	0	20.94	20.78	20.60	22	0
15	64QAM	1	37	20.86	20.68	20.57		
15	64QAM	1	74	20.82	20.64	20.54		
15	64QAM	36	0	20.11	19.98	19.95	21	1
15	64QAM	36	20	20.10	19.96	19.89		
15	64QAM	36	39	20.05	19.94	19.87		
15	64QAM	75	0	20.13	20.01	19.94		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	21.13	21.03	20.94	22	0
10	QPSK	1	25	21.10	21.01	20.87		
10	QPSK	1	49	21.05	20.95	20.79		
10	QPSK	25	0	21.09	20.97	20.90	22	0
10	QPSK	25	12	21.08	20.95	20.88		
10	QPSK	25	25	21.05	20.94	20.85		
10	QPSK	50	0	21.08	20.95	20.86		
10	16QAM	1	0	21.03	21.05	20.98	22	0
10	16QAM	1	25	21.06	21.01	20.95		
10	16QAM	1	49	21.01	20.95	20.87		
10	16QAM	25	0	21.02	21.07	21.01	22	0
10	16QAM	25	12	21.07	21.07	20.99		
10	16QAM	25	25	21.05	21.04	20.96		
10	16QAM	50	0	21.12	21.00	20.92		
10	64QAM	1	0	20.84	20.77	20.55	22	0
10	64QAM	1	25	20.88	20.74	20.58		
10	64QAM	1	49	20.80	20.68	20.53		
10	64QAM	25	0	20.06	20.01	19.97	21	1
10	64QAM	25	12	20.06	19.98	19.94		
10	64QAM	25	25	20.12	19.95	19.89		
10	64QAM	50	0	20.01	20.03	19.94		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.01	21.06	21.00	22	0
5	QPSK	1	12	21.12	20.97	20.92		
5	QPSK	1	24	21.08	20.94	20.79		
5	QPSK	12	0	21.05	20.99	20.96	22	0
5	QPSK	12	7	21.11	20.94	20.89		
5	QPSK	12	13	21.10	20.91	20.83		
5	QPSK	25	0	21.11	20.94	20.87		
5	16QAM	1	0	21.02	20.84	20.88	22	0
5	16QAM	1	12	21.11	20.75	20.80		
5	16QAM	1	24	21.05	20.68	20.66		
5	16QAM	12	0	21.01	21.02	20.98	22	0
5	16QAM	12	7	21.03	20.99	20.92		
5	16QAM	12	13	21.04	20.96	20.88		
5	16QAM	25	0	21.01	21.02	20.94		
5	64QAM	1	0	20.85	20.73	20.66	22	0
5	64QAM	1	12	20.77	20.64	20.60		
5	64QAM	1	24	20.73	20.51	20.51		
5	64QAM	12	0	20.03	20.05	20.01	21	1
5	64QAM	12	7	20.02	20.02	19.98		
5	64QAM	12	13	20.02	19.98	19.91		
5	64QAM	25	0	20.03	20.03	19.97		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	20.71	20.82	21.06	20.79	20.81	22	0
20	QPSK	1	49	20.63	20.76	21.00	20.75	20.85		
20	QPSK	1	99	20.57	20.71	20.91	20.68	20.78		
20	QPSK	50	0	20.62	20.77	20.95	20.76	20.84	22	0
20	QPSK	50	24	20.57	20.72	20.91	20.73	20.82		
20	QPSK	50	50	20.55	20.68	20.88	20.69	20.79		
20	QPSK	100	0	20.59	20.72	20.93	20.71	20.81		
20	16QAM	1	0	20.68	20.72	20.77	20.69	20.81	22	0
20	16QAM	1	49	20.68	20.68	20.99	20.68	20.91		
20	16QAM	1	99	20.68	20.68	20.89	20.68	20.79		
20	16QAM	50	0	20.63	20.79	21.00	20.83	20.90	22	0
20	16QAM	50	24	20.60	20.75	20.94	20.78	20.86		
20	16QAM	50	50	20.57	20.73	20.90	20.76	20.86		
20	16QAM	100	0	20.63	20.79	20.98	20.79	20.91		
20	64QAM	1	0	20.48	20.57	20.75	20.53	20.58	22	0
20	64QAM	1	49	20.40	20.43	20.69	20.44	20.56		
20	64QAM	1	99	20.31	20.39	20.55	20.42	20.54		
20	64QAM	50	0	19.69	19.82	20.05	19.88	19.95	21	1
20	64QAM	50	24	19.65	19.79	20.01	19.82	19.94		
20	64QAM	50	50	19.60	19.78	19.98	19.80	19.90		
20	64QAM	100	0	19.65	19.80	20.01	19.81	19.90		



FCC SAR Test Report

Report No. : FA932901-02

Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	20.66	20.78	20.96	20.82	20.85	22	0
15	QPSK	1	37	20.62	20.73	20.93	20.76	20.81		
15	QPSK	1	74	20.54	20.68	20.83	20.71	20.77		
15	QPSK	36	0	20.62	20.75	20.96	20.78	20.84	22	0
15	QPSK	36	20	20.57	20.72	20.91	20.75	20.80		
15	QPSK	36	39	20.54	20.69	20.88	20.73	20.79		
15	QPSK	75	0	20.57	20.73	20.93	20.76	20.81		
15	16QAM	1	0	20.58	20.76	21.02	20.84	20.82	22	0
15	16QAM	1	37	20.66	20.69	20.96	20.81	20.77		
15	16QAM	1	74	20.66	20.66	20.92	20.72	20.71		
15	16QAM	36	0	20.59	20.75	20.98	20.82	20.86	22	0
15	16QAM	36	20	20.55	20.71	20.94	20.78	20.84		
15	16QAM	36	39	20.53	20.69	20.91	20.73	20.83		
15	16QAM	75	0	20.61	20.78	20.97	20.83	20.90		
15	64QAM	1	0	20.48	20.65	20.78	20.58	20.56	22	0
15	64QAM	1	37	20.48	20.48	20.64	20.52	20.54		
15	64QAM	1	74	20.48	20.52	20.61	20.47	20.50		
15	64QAM	36	0	19.67	19.80	20.00	19.86	19.92	21	1
15	64QAM	36	20	19.62	19.77	19.97	19.84	19.88		
15	64QAM	36	39	19.60	19.73	19.96	19.81	19.89		
15	64QAM	75	0	19.62	19.78	19.98	19.81	19.84		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	20.70	20.80	20.92	20.82	20.85	22	0
10	QPSK	1	25	20.64	20.76	20.92	20.79	20.83		
10	QPSK	1	49	20.62	20.73	20.87	20.74	20.80		
10	QPSK	25	0	20.62	20.72	20.93	20.76	20.83	22	0
10	QPSK	25	12	20.59	20.71	20.91	20.74	20.81		
10	QPSK	25	25	20.63	20.67	20.88	20.71	20.80		
10	QPSK	50	0	20.76	20.72	20.91	20.76	20.82		
10	16QAM	1	0	20.70	20.91	20.87	20.74	20.77	22	0
10	16QAM	1	25	20.67	20.86	20.84	20.78	20.71		
10	16QAM	1	49	20.74	20.80	20.79	20.74	20.65		
10	16QAM	25	0	20.71	20.83	20.76	20.89	20.96	22	0
10	16QAM	25	12	20.69	20.82	21.03	20.86	20.95		
10	16QAM	25	25	20.65	20.79	21.03	20.86	20.93		
10	16QAM	50	0	20.65	20.75	20.96	20.82	20.89		
10	64QAM	1	0	20.41	20.39	20.61	20.62	20.47	22	0
10	64QAM	1	25	20.25	20.36	20.57	20.63	20.56		
10	64QAM	1	49	20.65	20.26	20.54	20.45	20.50		
10	64QAM	25	0	19.64	19.77	19.99	19.82	19.89	21	1
10	64QAM	25	12	19.62	19.75	19.97	19.79	19.88		
10	64QAM	25	25	19.68	19.72	19.95	19.80	19.87		
10	64QAM	50	0	19.62	19.78	20.01	19.84	19.94		

Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	20.72	20.78	20.95	20.81	20.88	22	0
5	QPSK	1	12	20.70	20.76	20.94	20.81	20.86		
5	QPSK	1	24	20.65	20.73	20.89	20.78	20.82		
5	QPSK	12	0	20.63	20.71	20.91	20.80	20.83	22	0
5	QPSK	12	7	20.63	20.70	20.90	20.78	20.82		
5	QPSK	12	13	20.63	20.69	20.90	20.77	20.80		
5	QPSK	25	0	20.62	20.69	20.91	20.79	20.83		
5	16QAM	1	0	20.49	20.65	20.91	20.86	20.95	22	0
5	16QAM	1	12	20.52	20.67	20.91	20.89	20.97		
5	16QAM	1	24	20.48	20.63	20.87	20.87	20.93		
5	16QAM	12	0	20.67	20.77	20.96	20.85	20.89	22	0
5	16QAM	12	7	20.64	20.76	20.95	20.82	20.82		
5	16QAM	12	13	20.64	20.75	20.91	20.82	20.82		
5	16QAM	25	0	20.71	20.80	21.04	20.93	20.97		
5	64QAM	1	0	20.43	20.60	20.87	20.70	20.68	22	0
5	64QAM	1	12	20.46	20.52	20.86	20.53	20.64		
5	64QAM	1	24	20.46	20.49	20.84	20.68	20.58		
5	64QAM	12	0	19.59	19.69	19.91	19.77	19.85	21	1
5	64QAM	12	7	19.59	19.65	19.91	19.78	19.83		
5	64QAM	12	13	19.57	19.67	19.91	19.74	19.78		
5	64QAM	25	0	19.69	19.65	19.96	19.84	19.86		

<Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	17.13	16.91	16.85	18	0
20	QPSK	1	49	16.98	16.79	16.74		
20	QPSK	1	99	16.76	16.72	16.63		
20	QPSK	50	0	16.94	16.76	16.75	18	0
20	QPSK	50	24	16.90	16.72	16.70		
20	QPSK	50	50	16.88	16.68	16.64		
20	QPSK	100	0	16.91	16.73	16.70	18	0
20	16QAM	1	0	17.12	17.01	16.98		
20	16QAM	1	49	17.11	16.90	16.85		
20	16QAM	1	99	17.00	16.81	16.71	18	0
20	16QAM	50	0	17.05	16.87	16.86		
20	16QAM	50	24	17.01	16.83	16.80		
20	16QAM	50	50	16.99	16.79	16.76	18	0
20	16QAM	100	0	17.03	16.84	16.80		
20	64QAM	1	0	16.84	16.77	16.75		
20	64QAM	1	49	16.98	16.67	16.65	18	0
20	64QAM	1	99	16.95	16.59	16.52		
20	64QAM	50	0	17.09	16.90	16.88		
20	64QAM	50	24	17.06	16.87	16.82	18	0
20	64QAM	50	50	17.01	16.83	16.78		
20	64QAM	100	0	17.06	16.86	16.83		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	16.99	16.84	16.80	18	0
15	QPSK	1	37	16.90	16.77	16.74		
15	QPSK	1	74	16.87	16.71	16.61		
15	QPSK	36	0	16.89	16.74	16.68	18	0
15	QPSK	36	20	16.84	16.72	16.65		
15	QPSK	36	39	16.81	16.67	16.60		
15	QPSK	75	0	16.85	16.72	16.65		
15	16QAM	1	0	16.98	17.12	16.89	18	0
15	16QAM	1	37	16.90	17.05	16.84		
15	16QAM	1	74	16.86	17.00	16.72		
15	16QAM	36	0	16.94	16.79	16.74	18	0
15	16QAM	36	20	16.90	16.76	16.70		
15	16QAM	36	39	16.87	16.73	16.64		
15	16QAM	75	0	16.97	16.83	16.75		
15	64QAM	1	0	16.83	16.76	16.55	18	0
15	64QAM	1	37	16.78	16.60	16.46		
15	64QAM	1	74	16.68	16.56	16.39		
15	64QAM	36	0	16.98	16.85	16.77	18	0
15	64QAM	36	20	16.94	16.82	16.74		
15	64QAM	36	39	16.93	16.79	16.68		
15	64QAM	75	0	16.97	16.82	16.77		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	16.93	16.83	16.81	18	0
10	QPSK	1	25	16.92	16.79	16.73		
10	QPSK	1	49	16.84	16.78	16.67		
10	QPSK	25	0	16.86	16.73	16.67	18	0
10	QPSK	25	12	16.84	16.71	16.64		
10	QPSK	25	25	16.82	16.68	16.63		
10	QPSK	50	0	16.85	16.71	16.66		
10	16QAM	1	0	16.94	16.81	17.00	18	0
10	16QAM	1	25	16.91	16.77	16.96		
10	16QAM	1	49	16.83	16.73	16.86		
10	16QAM	25	0	16.97	16.88	16.85	18	0
10	16QAM	25	12	16.96	16.84	16.81		
10	16QAM	25	25	16.94	16.84	16.79		
10	16QAM	50	0	16.96	16.80	16.77		
10	64QAM	1	0	16.85	16.66	16.64	18	0
10	64QAM	1	25	16.84	16.62	16.53		
10	64QAM	1	49	16.65	16.59	16.42		
10	64QAM	25	0	16.97	16.82	16.77	18	0
10	64QAM	25	12	16.93	16.80	16.73		
10	64QAM	25	25	16.89	16.78	16.70		
10	64QAM	50	0	16.99	16.86	16.79		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	16.97	16.80	16.77	18	0
5	QPSK	1	12	16.94	16.76	16.72		
5	QPSK	1	24	16.91	16.73	16.68		
5	QPSK	12	0	16.88	16.73	16.70	18	0
5	QPSK	12	7	16.86	16.73	16.68		
5	QPSK	12	13	16.86	16.71	16.65		
5	QPSK	25	0	16.85	16.70	16.68		
5	16QAM	1	0	16.90	16.78	16.87	18	0
5	16QAM	1	12	16.89	16.79	16.83		
5	16QAM	1	24	16.86	16.76	16.80		
5	16QAM	12	0	16.90	16.80	16.77	18	0
5	16QAM	12	7	16.89	16.80	16.73		
5	16QAM	12	13	16.87	16.79	16.73		
5	16QAM	25	0	16.98	16.83	16.78		
5	64QAM	1	0	16.77	16.59	16.46	18	0
5	64QAM	1	12	16.73	16.67	16.48		
5	64QAM	1	24	16.73	16.66	16.49		
5	64QAM	12	0	16.86	16.75	16.73	18	0
5	64QAM	12	7	16.83	16.71	16.70		
5	64QAM	12	13	16.82	16.73	16.68		
5	64QAM	25	0	16.93	16.80	16.74		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	17.12	17.09	17.34	17.22	17.27	18	0
20	QPSK	1	49	17.11	17.11	17.29	17.21	17.26		
20	QPSK	1	99	17.09	17.05	17.26	17.22	17.23		
20	QPSK	50	0	16.94	17.04	17.28	17.18	17.26	18	0
20	QPSK	50	24	16.91	17.04	17.27	17.17	17.25		
20	QPSK	50	50	16.86	16.94	17.20	17.09	17.15		
20	QPSK	100	0	16.86	16.94	17.20	17.08	17.16		
20	16QAM	1	0	16.69	16.78	17.02	16.95	16.94	18	0
20	16QAM	1	49	16.71	16.77	16.95	16.85	16.99		
20	16QAM	1	99	16.72	16.82	17.02	16.85	16.93		
20	16QAM	50	0	16.86	16.93	17.20	17.10	17.16	18	0
20	16QAM	50	24	16.86	16.94	17.20	17.09	17.15		
20	16QAM	50	50	16.86	16.94	17.20	17.08	17.16		
20	16QAM	100	0	17.02	17.09	17.24	17.26	17.23		
20	64QAM	1	0	16.89	17.02	17.25	17.16	17.23	18	0
20	64QAM	1	49	16.91	17.01	17.23	17.15	17.21		
20	64QAM	1	99	16.86	16.97	17.22	17.12	17.22		
20	64QAM	50	0	16.89	17.02	17.25	17.16	17.23	18	0
20	64QAM	50	24	16.91	17.01	17.23	17.15	17.21		
20	64QAM	50	50	16.86	16.97	17.22	17.12	17.22		
20	64QAM	100	0	16.95	17.06	17.30	17.20	17.31		



FCC SAR Test Report

Report No. : FA932901-02

Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	17.04	17.09	17.22	17.22	17.27	18	0
15	QPSK	1	37	17.11	16.93	17.26	17.21	17.26		
15	QPSK	1	74	17.09	17.05	17.26	17.22	17.23		
15	QPSK	36	0	16.94	17.04	17.18	17.15	17.26	18	0
15	QPSK	36	20	16.91	17.04	17.08	17.17	17.09		
15	QPSK	36	39	16.89	16.94	17.20	17.09	17.15		
15	QPSK	75	0	16.86	16.89	17.08	17.08	17.16		
15	16QAM	1	0	16.69	16.78	16.89	16.95	16.94	18	0
15	16QAM	1	37	16.71	16.77	17.09	16.85	16.99		
15	16QAM	1	74	16.72	16.82	17.02	16.85	16.93		
15	16QAM	36	0	16.86	16.93	17.20	17.10	17.16	18	0
15	16QAM	36	20	16.89	16.94	16.91	17.09	17.15		
15	16QAM	36	39	16.82	16.94	17.20	17.08	17.16		
15	16QAM	75	0	17.02	17.09	17.02	17.26	17.31		
15	64QAM	1	0	16.89	17.02	17.25	17.16	17.23	18	0
15	64QAM	1	37	16.91	17.01	17.15	17.15	17.26		
15	64QAM	1	74	16.86	16.97	17.22	17.12	17.22		
15	64QAM	36	0	16.89	17.02	17.25	17.16	17.23	18	0
15	64QAM	36	20	16.91	17.01	17.15	17.15	17.21		
15	64QAM	36	39	16.86	16.97	17.22	17.12	17.22		
15	64QAM	75	0	16.95	17.06	17.32	17.20	17.31		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	16.91	17.04	17.27	17.17	17.25	18	0
10	QPSK	1	25	16.92	17.02	17.26	17.15	17.24		
10	QPSK	1	49	17.02	17.09	17.30	17.26	17.26		
10	QPSK	25	0	16.92	17.02	17.20	17.15	17.24	18	0
10	QPSK	25	12	16.72	16.82	17.02	16.85	16.93		
10	QPSK	25	25	16.89	17.02	17.25	17.16	17.23		
10	QPSK	50	0	17.11	17.11	17.29	17.21	17.26		
10	16QAM	1	0	17.09	17.05	17.26	17.22	17.23	18	0
10	16QAM	1	25	16.94	17.04	17.28	17.18	17.26		
10	16QAM	1	49	16.87	16.96	17.22	17.11	17.18		
10	16QAM	25	0	16.86	16.93	17.20	17.10	17.16	18	0
10	16QAM	25	12	16.86	16.93	17.20	17.10	17.16		
10	16QAM	25	25	16.86	16.94	17.20	17.09	17.15		
10	16QAM	50	0	16.91	17.04	17.27	17.17	17.25		
10	64QAM	1	0	16.92	17.02	17.26	17.15	17.24	18	0
10	64QAM	1	25	16.87	16.94	17.14	17.11	17.15		
10	64QAM	1	49	16.87	16.96	17.22	17.11	17.18		
10	64QAM	25	0	16.71	16.77	16.95	16.85	16.99	18	0
10	64QAM	25	12	16.69	16.78	17.02	16.95	16.94		
10	64QAM	25	25	16.71	16.77	16.95	16.85	16.99		
10	64QAM	50	0	16.72	16.82	17.02	16.85	16.93		

Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	16.90	17.02	17.23	17.15	17.20	18	0
5	QPSK	1	12	16.90	16.99	17.22	17.15	17.19		
5	QPSK	1	24	16.87	16.94	17.14	17.11	17.15		
5	QPSK	12	0	16.87	16.96	17.22	17.11	17.18	18	0
5	QPSK	12	7	16.86	16.93	17.20	17.10	17.16		
5	QPSK	12	13	16.86	16.94	17.20	17.09	17.15		
5	QPSK	25	0	16.86	16.94	17.20	17.08	17.16		
5	16QAM	1	0	17.12	17.09	17.33	17.22	17.27	18	0
5	16QAM	1	12	17.11	17.11	17.29	17.21	17.26		
5	16QAM	1	24	17.09	17.05	17.26	17.22	17.23		
5	16QAM	12	0	16.94	17.04	17.28	17.18	17.26	18	0
5	16QAM	12	7	16.91	17.04	17.27	17.17	17.25		
5	16QAM	12	13	16.92	17.02	17.26	17.15	17.24		
5	16QAM	25	0	17.02	17.09	17.04	17.26	17.03		
5	64QAM	1	0	16.69	16.78	17.02	16.95	16.94	18	0
5	64QAM	1	12	16.71	16.77	16.95	16.85	16.99		
5	64QAM	1	24	16.72	16.82	17.02	16.85	16.93		
5	64QAM	12	0	16.89	17.02	17.25	17.16	17.23	18	0
5	64QAM	12	7	16.91	17.01	17.23	17.15	17.21		
5	64QAM	12	13	16.86	16.97	17.22	17.12	17.22		
5	64QAM	25	0	16.95	17.06	17.02	17.20	17.31		

<Reduced Power Mode for Handheld On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.44	21.23	21.25	22.5	0
20	QPSK	1	49	21.34	21.14	21.09		
20	QPSK	1	99	21.26	21.09	20.96		
20	QPSK	50	0	21.41	21.18	21.17	22.5	0
20	QPSK	50	24	21.36	21.16	21.08		
20	QPSK	50	50	21.34	21.14	21.04		
20	QPSK	100	0	21.37	21.19	21.10	22.5	0
20	16QAM	1	0	21.43	21.20	20.95		
20	16QAM	1	49	21.31	21.20	21.15		
20	16QAM	1	99	21.07	21.03	21.03	22	0.5
20	16QAM	50	0	20.91	20.70	20.66		
20	16QAM	50	24	20.83	20.66	20.61		
20	16QAM	50	50	20.81	20.59	20.54	22	0.5
20	16QAM	100	0	20.88	20.66	20.62		
20	64QAM	1	0	21.07	21.03	20.82		
20	64QAM	1	49	21.18	20.93	20.83	22	0.5
20	64QAM	1	99	21.11	20.85	20.70		
20	64QAM	50	0	20.15	19.99	20.04		
20	64QAM	50	24	20.09	19.93	20.00	21	1.5
20	64QAM	50	50	20.08	19.90	19.95		
20	64QAM	100	0	20.04	19.92	19.92		

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	21.41	21.23	21.21	22.5	0
15	QPSK	1	37	21.35	21.07	21.12		
15	QPSK	1	74	21.27	20.94	21.07		
15	QPSK	36	0	21.42	21.15	21.16	22.5	0
15	QPSK	36	20	21.37	21.06	21.14		
15	QPSK	36	39	21.35	21.02	21.12		
15	QPSK	75	0	21.38	21.08	21.17		
15	16QAM	1	0	21.34	21.01	21.18	22.5	0
15	16QAM	1	37	21.32	21.13	21.18		
15	16QAM	1	74	21.08	21.01	21.01		
15	16QAM	36	0	20.92	20.64	20.68	22	0.5
15	16QAM	36	20	20.84	20.59	20.64		
15	16QAM	36	39	20.82	20.52	20.57		
15	16QAM	75	0	20.89	20.60	20.64		
15	64QAM	1	0	21.08	20.80	21.01	22	0.5
15	64QAM	1	37	21.19	20.81	20.91		
15	64QAM	1	74	21.12	20.91	20.83		
15	64QAM	36	0	20.16	20.22	20.07	21	1.5
15	64QAM	36	20	20.10	20.12	20.01		
15	64QAM	36	39	20.09	20.04	19.98		
15	64QAM	75	0	20.05	19.80	20.00		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	21.36	21.21	21.09	22.5	0
10	QPSK	1	25	21.28	21.12	21.18		
10	QPSK	1	49	21.43	21.07	21.16		
10	QPSK	25	0	21.38	21.16	21.14	22.5	0
10	QPSK	25	12	21.36	21.14	21.19		
10	QPSK	25	25	21.39	21.12	21.20		
10	QPSK	50	0	21.35	21.17	21.20		
10	16QAM	1	0	21.33	21.18	21.14	22.5	0
10	16QAM	1	25	21.09	21.18	21.12		
10	16QAM	1	49	20.93	21.01	21.17		
10	16QAM	25	0	20.85	20.68	20.59	22	0.5
10	16QAM	25	12	20.83	20.64	20.66		
10	16QAM	25	25	20.90	20.57	21.03		
10	16QAM	50	0	21.35	21.01	20.93		
10	64QAM	1	0	21.20	21.01	20.85	22	0.5
10	64QAM	1	25	21.13	20.91	20.78		
10	64QAM	1	49	21.00	20.83	20.72		
10	64QAM	25	0	20.11	19.97	20.32	21	1.5
10	64QAM	25	12	20.10	19.91	20.22		
10	64QAM	25	25	20.06	19.88	20.14		
10	64QAM	50	0	20.40	20.14	20.37		



FCC SAR Test Report

Report No. : FA932901-02

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.42	21.23	21.19	22.5	0
5	QPSK	1	12	21.37	21.14	21.20		
5	QPSK	1	24	21.35	21.09	21.20		
5	QPSK	12	0	21.38	21.18	21.14	22.5	0
5	QPSK	12	7	21.24	21.16	21.19		
5	QPSK	12	13	21.32	21.14	21.20		
5	QPSK	25	0	21.08	21.19	20.69		
5	16QAM	1	0	20.92	21.20	21.23	22.5	0
5	16QAM	1	12	20.84	21.20	21.07		
5	16QAM	1	24	20.82	21.03	20.94		
5	16QAM	12	0	20.89	21.19	21.15	22	0.5
5	16QAM	12	7	21.34	21.20	21.06		
5	16QAM	12	13	21.19	21.20	21.02		
5	16QAM	25	0	21.12	20.66	21.08		
5	64QAM	1	0	20.99	21.03	20.93	22	0.5
5	64QAM	1	12	20.93	20.93	21.13		
5	64QAM	1	24	20.92	20.85	21.01		
5	64QAM	12	0	20.05	20.13	20.50	21	1.5
5	64QAM	12	7	20.38	20.05	20.51		
5	64QAM	12	13	20.29	20.03	20.51		
5	64QAM	25	0	20.24	20.01	20.44		

<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	21.21	21.39	21.51	21.30	21.29	22.5	0
20	QPSK	1	49	21.10	21.32	21.43	21.26	21.25		
20	QPSK	1	99	21.07	21.29	21.36	21.18	21.20		
20	QPSK	50	0	21.15	21.30	21.50	21.27	21.33	22.5	0
20	QPSK	50	24	21.09	21.30	21.44	21.25	21.32		
20	QPSK	50	50	21.05	21.27	21.42	21.21	21.29		
20	QPSK	100	0	21.10	21.28	21.46	21.24	21.33		
20	16QAM	1	0	21.14	21.32	21.42	21.42	21.17	22.5	0
20	16QAM	1	49	21.08	21.42	21.46	21.44	21.19		
20	16QAM	1	99	21.17	21.46	21.42	21.42	21.18		
20	16QAM	50	0	20.65	20.86	21.02	20.79	20.86	22	0.5
20	16QAM	50	24	20.60	20.79	20.96	20.72	20.83		
20	16QAM	50	50	20.55	20.77	20.96	20.78	20.78		
20	16QAM	100	0	20.65	20.83	21.00	20.82	20.87		
20	64QAM	1	0	20.95	21.20	21.17	20.97	21.16	22	0.5
20	64QAM	1	49	20.89	21.11	21.18	20.94	21.04		
20	64QAM	1	99	20.93	20.93	21.07	20.97	20.91		
20	64QAM	50	0	19.81	20.13	20.20	19.95	20.11	21	1.5
20	64QAM	50	24	19.81	20.09	20.25	19.92	20.08		
20	64QAM	50	50	19.76	20.08	20.24	19.90	20.07		
20	64QAM	100	0	19.76	20.06	20.22	19.89	20.04		



FCC SAR Test Report

Report No. : FA932901-02

Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	21.15	21.30	21.50	21.27	21.33	22.5	0
15	QPSK	1	37	21.09	21.30	21.44	21.25	21.32		
15	QPSK	1	74	21.05	21.27	21.42	21.21	21.29		
15	QPSK	36	0	21.10	21.28	21.46	21.24	21.33	22.5	0
15	QPSK	36	20	21.14	21.32	21.42	21.42	21.17		
15	QPSK	36	39	21.08	21.42	21.46	21.44	21.19		
15	QPSK	75	0	21.06	21.29	21.41	21.35	21.30		
15	16QAM	1	0	20.98	21.32	21.46	21.44	21.39	22.5	0
15	16QAM	1	37	20.97	21.22	21.42	21.35	21.32		
15	16QAM	1	74	21.00	21.16	21.38	21.29	21.33		
15	16QAM	36	0	20.76	20.86	21.02	20.79	20.86	22	0.5
15	16QAM	36	20	20.75	20.95	21.13	21.08	21.01		
15	16QAM	36	39	20.74	20.77	20.96	20.78	20.78		
15	16QAM	75	0	20.65	20.83	21.00	20.82	20.87		
15	64QAM	1	0	20.76	21.11	21.18	21.12	21.03	22	0.5
15	64QAM	1	37	20.75	20.95	21.13	21.08	21.01		
15	64QAM	1	74	20.74	20.89	21.14	20.98	20.93		
15	64QAM	36	0	20.04	20.17	20.29	20.08	20.07	21	1.5
15	64QAM	36	20	19.81	20.13	20.30	19.95	20.11		
15	64QAM	36	39	19.81	20.09	20.25	19.92	20.08		
15	64QAM	75	0	19.76	20.08	20.24	19.90	20.07		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	21.04	21.25	21.39	21.31	21.28	22.5	0
10	QPSK	1	25	21.08	21.30	21.42	21.36	21.32		
10	QPSK	1	49	21.14	21.39	21.47	21.38	21.32		
10	QPSK	25	0	21.15	21.30	21.44	21.32	21.29	22.5	0
10	QPSK	25	12	21.07	21.29	21.41	21.34	21.31		
10	QPSK	25	25	21.04	21.25	21.39	21.31	21.28		
10	QPSK	50	0	21.08	21.30	21.42	21.36	21.32		
10	16QAM	1	0	21.14	21.39	21.47	21.38	21.32	22.5	0
10	16QAM	1	25	21.15	21.30	21.44	21.32	21.29		
10	16QAM	1	49	21.08	21.25	21.35	21.26	21.27		
10	16QAM	25	0	20.87	20.86	21.02	20.79	20.86	22	0.5
10	16QAM	25	12	20.81	20.97	21.09	21.12	21.06		
10	16QAM	25	25	20.65	20.77	20.96	20.78	20.78		
10	16QAM	50	0	20.65	20.83	21.00	20.82	20.87		
10	64QAM	1	0	20.85	20.97	21.11	21.13	21.12	22	0.5
10	64QAM	1	25	20.87	20.97	21.09	21.12	21.06		
10	64QAM	1	49	20.81	20.95	21.05	20.97	21.02		
10	64QAM	25	0	19.76	20.10	20.14	19.90	20.02	21	1.5
10	64QAM	25	12	19.71	20.03	20.18	19.83	19.99		
10	64QAM	25	25	19.86	20.01	20.18	19.89	19.94		
10	64QAM	50	0	19.76	20.07	20.22	19.93	20.03		

Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	21.15	21.30	21.44	21.32	21.29	22.5	0
5	QPSK	1	12	21.07	21.29	21.41	21.34	21.31		
5	QPSK	1	24	21.04	21.25	21.39	21.31	21.28		
5	QPSK	12	0	21.08	21.30	21.42	21.36	21.32	22.5	0
5	QPSK	12	7	21.07	21.25	21.41	21.35	21.31		
5	QPSK	12	13	21.05	21.24	21.39	21.33	21.29		
5	QPSK	25	0	21.04	21.24	21.40	21.34	21.31		
5	16QAM	1	0	21.04	21.22	21.39	21.38	21.37	22.5	0
5	16QAM	1	12	21.06	21.20	21.38	21.32	21.36		
5	16QAM	1	24	21.02	21.15	21.34	21.33	21.33		
5	16QAM	12	0	20.65	20.86	21.02	20.79	20.86	22	0.5
5	16QAM	12	7	20.60	20.79	20.96	20.72	20.83		
5	16QAM	12	13	20.55	20.77	20.96	20.78	20.78		
5	16QAM	25	0	20.65	20.83	21.00	20.82	20.87		
5	64QAM	1	0	20.91	21.03	21.04	21.07	21.02	22	0.5
5	64QAM	1	12	20.77	20.94	21.02	21.04	21.00		
5	64QAM	1	24	20.81	20.92	20.99	20.95	20.99		
5	64QAM	12	0	19.14	19.48	19.59	19.44	19.46	21	1.5
5	64QAM	12	7	19.12	19.46	19.58	19.44	19.46		
5	64QAM	12	13	19.12	19.42	19.56	19.42	19.46		
5	64QAM	25	0	19.19	19.50	19.67	19.47	19.49		

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.

Index	2CC
2CC #1	CA_2C
2CC #2	CA_2A-2A
2CC #4	CA_2A-4A
2CC #4	CA_2A-5A
2CC #5	CA_2A-12A
2CC #6	CA_2A-13A
2CC #7	CA_2A-66A
2CC #8	CA_4A-4A
2CC #9	CA_4A-5A
2CC #10	CA_4A-7A
2CC #11	CA_4A-12A
2CC #12	CA_4A-13A
2CC #13	CA_5B
2CC #14	CA_5A-66A
2CC #15	CA_7A-7A
2CC #16	CA_12A-66A
2CC #17	CA_13A-66A
2CC #18	CA_25-25A
2CC #19	CA_25-26A
2CC #20	CA_41C
2CC #21	CA_41A-41A
2CC #22	CA_66B
2CC #23	CA_66C
2CC #24	CA_66A-66A

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Full Power Mode>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL		UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq.	Channel	Mod.	RB	Offset	Band	(MHz)	Freq.	Channel	Tx. Power (dBm)	Tx. Power (dBm)
					(MHz)							(MHz)			
Inter-Band		CA_2A-4A	Band 2	20M	1880	18900	QPSK	1	99	Band 4	20M	2132.5	2175	22.27	22.67
			Band 4	20M	1732.5	20175	QPSK	1	0	Band 2	20M	1960	900	22.23	22.52
		CA_2A-5A	Band 2	20M	1880	18900	QPSK	1	99	Band 5	10M	881.5	2525	22.13	22.67
			Band 5	10M	836.5	20525	QPSK	1	0	Band 2	20M	1960	900	22.58	22.85
		CA_2A-12A	Band 2	20M	1880	18900	QPSK	1	99	Band 12	10M	737.5	5095	22.15	22.67
			Band 12	10M	707.5	23095	QPSK	1	0	Band 2	20M	1960	900	22.34	22.61
		CA_2A-13A	Band 2	20M	1880	18900	QPSK	1	99	Band 13	10M	751	5230	22.14	22.67
			Band 13	10M	782	23230	QPSK	1	0	Band 2	20M	1960	900	22.05	22.42
		CA_2A-66A	Band 2	20M	1880	18900	QPSK	1	99	Band 66	20M	2155	66886	22.14	22.67
			Band 66	20M	1745	132322	QPSK	1	0	Band 2	20M	1960	900	22.00	22.59
		CA_4A-5A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 5	10M	881.5	2525	22.24	22.52
			Band 5	10M	836.5	20525	QPSK	1	0	Band 4	20M	2132.5	2175	22.63	22.85
		CA_4A-7A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 7	20M	2655	3100	22.39	22.52
			Band 7	20M	2560	21350	QPSK	1	0	Band 4	20M	2132.5	2175	22.21	22.33
		CA_4A-12A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 12	10M	737.5	5095	22.23	22.52
			Band 12	10M	707.5	23095	QPSK	1	0	Band 4	20M	2132.5	2175	22.40	22.61
		CA_4A-13A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 13	10M	751	5230	22.19	22.52
			Band 13	10M	782	23230	QPSK	1	0	Band 4	20M	2132.5	2175	22.06	22.42
		CA_5A-66A	Band 5	10M	836.5	20525	QPSK	1	0	Band 66	20M	2155	66886	22.76	22.85
			Band 66	20M	1745	132322	QPSK	1	0	Band 5	10M	881.5	2525	22.26	22.59
		CA_12A-66A	Band 12	10M	707.5	23095	QPSK	1	0	Band 66	20M	2155	66886	22.53	22.61
			Band 66	20M	1745	132322	QPSK	1	0	Band 12	10M	737.5	5095	22.20	22.59
		CA_13A-66A	Band 13	10M	782	23230	QPSK	1	0	Band 66	20M	2155	66886	22.22	22.42
			Band 66	20M	1745	132322	QPSK	1	0	Band 13	10M	751	5230	22.23	22.59
		CA_25A-26A	Band 25	20M	1880	26340	QPSK	1	0	Band 26	15M	876.5	8865	22.47	22.75
			Band 26	15M	831.5	26865	QPSK	1	0	Band 25	20M	1960	8340	22.71	22.86
Intra-Band	Contiguous	CA_2C	Band 2	20M	1880	18900	QPSK	1	99	Band 2	20M	1979.8	1098	22.19	22.67
		CA_5B	Band 5	10M	836.5	20525	QPSK	1	0	Band 5	10M	891.4	2624	22.57	22.85
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	22.23	22.76
		CA_66B	Band 66	15M	1745	132322	QPSK	1	37	Band 66	5M	2164.3	66979	22.09	22.48
		CA_66C	Band 66	20M	1745	132322	QPSK	1	0	Band 66	20M	2174.8	67084	22.19	22.59
	Non-Contiguous	CA_2A-2A	Band 2	20M	1880	18900	QPSK	1	99	Band 2	5M	1987.5	1175	22.23	22.67
		CA_4A-4A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 4	5M	2152.5	2375	22.23	22.52
		CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2630	2850	22.21	22.33
		CA_25A-25A	Band 25	20M	1880	26340	QPSK	1	0	Band 25	5M	1932.5	8065	22.38	22.75
		CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	22.32	22.76
		CA_66A-66A	Band 66	20M	1745	132322	QPSK	1	0	Band 66	5M	2197.5	67311	22.22	22.59

<Reduced Power Mode for P-Sensor On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq.	Channel		RB	Offset	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
					(MHz)							(MHz)			
Inter-Band		CA_2A-4A	Band 2	20M	1880	18900	QPSK	1	99	Band 4	20M	2132.5	2175	18.12	18.54
			Band 4	20M	1732.5	20175	QPSK	1	0	Band 2	20M	1960	900	17.82	17.98
		CA_2A-5A	Band 2	20M	1880	18900	QPSK	1	99	Band 5	10M	881.5	2525	18.07	18.54
			Band 5	10M	829	20450	QPSK	1	0	Band 2	20M	1960	900	20.20	20.39
		CA_2A-12A	Band 2	20M	1880	18900	QPSK	1	99	Band 12	10M	737.5	5095	18.15	18.54
			Band 12	10M	707.5	23095	QPSK	1	0	Band 2	20M	1960	900	22.32	22.61
		CA_2A-13A	Band 2	20M	1880	18900	QPSK	1	99	Band 13	10M	751	5230	18.17	18.54
			Band 13	10M	782	23230	QPSK	1	0	Band 2	20M	1960	900	22.35	22.42
		CA_2A-66A	Band 2	20M	1880	18900	QPSK	1	99	Band 66	20M	2155	66886	18.14	18.54
			Band 66	20M	1720	132072	QPSK	1	99	Band 2	20M	1960	900	18.10	18.27
		CA_4A-5A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 5	10M	881.5	2525	17.88	17.98
			Band 5	10M	829	20450	QPSK	1	0	Band 4	20M	2132.5	2175	20.18	20.39
		CA_4A-7A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 7	20M	2655	3100	17.89	17.98
			Band 7	20M	2560	21350	QPSK	1	0	Band 4	20M	2132.5	2175	18.76	18.91
		CA_4A-12A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 12	10M	737.5	5095	17.87	17.98
			Band 12	10M	707.5	23095	QPSK	1	0	Band 4	20M	2132.5	2175	22.32	22.61
		CA_4A-13A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 13	10M	751	5230	17.89	17.98
			Band 13	10M	782	23230	QPSK	1	0	Band 4	20M	2132.5	2175	22.21	22.42
		CA_5A-66A	Band 5	10M	829	20450	QPSK	1	0	Band 66	20M	2155	66886	20.17	20.39
			Band 66	20M	1720	132072	QPSK	1	99	Band 5	10M	881.5	2525	18.09	18.27
		CA_12A-66A	Band 12	10M	707.5	23095	QPSK	1	0	Band 66	20M	2155	66886	22.43	22.61
			Band 66	20M	1720	132072	QPSK	1	99	Band 12	10M	737.5	5095	18.22	18.27
		CA_13A-66A	Band 13	10M	782	23230	QPSK	1	0	Band 66	20M	2155	66886	22.12	22.42
			Band 66	20M	1720	132072	QPSK	1	99	Band 13	10M	751	5230	18.10	18.27
		CA_25A-26A	Band 25	20M	1905	26590	QPSK	1	0	Band 26	15M	876.5	8865	18.16	18.51
			Band 26	15M	831.5	26865	QPSK	1	0	Band 25	20M	1960	8340	19.99	20.15
Intra-Band	Contiguous	CA_2C	Band 2	20M	1880	18900	QPSK	1	99	Band 2	20M	1979.8	1098	18.21	18.54
		CA_5B	Band 5	10M	829	20450	QPSK	1	0	Band 5	10M	883.9	2549	20.03	20.39
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	20.98	21.06
		CA_66B	Band 66	15M	1772.5	132597	QPSK	1	0	Band 66	5M	2181.8	67154	18.11	18.21
		CA_66C	Band 66	20M	1720	132072	QPSK	1	99	Band 66	20M	2139.8	66734	18.03	18.27
	Non-Contiguous	CA_2A-2A	Band 2	20M	1880	18900	QPSK	1	99	Band 2	5M	1987.5	1175	18.34	18.54
		CA_4A-4A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 4	5M	2152.5	2375	17.88	17.98
		CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2630	2850	18.78	18.91
		CA_25A-25A	Band 25	20M	1905	26590	QPSK	1	0	Band 25	5M	1932.5	8065	18.23	18.51
		CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	20.98	21.06
		CA_66A-66A	Band 66	20M	1720	132072	QPSK	1	99	Band 66	5M	2197.5	67311	18.13	18.27

<Reduced Power Mode for Hotspot On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL		UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq.	Channel	Mod.	RB	Offset	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
					(MHz)							(MHz)		(dBm)	(dBm)
Inter-Band	CA_2A-4A	Band 2	20M	1880	18900	QPSK	1	99		Band 4	20M	2132.5	2175	16.76	17.06
		Band 4	20M	1732.5	20175	QPSK	1	0		Band 2	20M	1960	900	16.37	16.49
	CA_2A-5A	Band 2	20M	1880	18900	QPSK	1	99		Band 5	10M	881.5	2525	16.81	17.06
		Band 5	10M	836.5	20525	QPSK	25	0		Band 2	20M	1960	900	20.01	20.28
	CA_2A-12A	Band 2	20M	1880	18900	QPSK	1	99		Band 12	10M	737.5	5095	16.75	17.06
		Band 12	10M	707.5	23095	QPSK	1	0		Band 2	20M	1960	900	22.45	22.61
	CA_2A-13A	Band 2	20M	1880	18900	QPSK	1	99		Band 13	10M	751	5230	16.78	17.06
		Band 13	10M	782	23230	QPSK	1	0		Band 2	20M	1960	900	22.31	22.42
	CA_2A-66A	Band 2	20M	1880	18900	QPSK	1	99		Band 66	20M	2155	66886	16.87	17.06
		Band 66	20M	1720	132072	QPSK	1	99		Band 2	20M	1960	900	16.45	16.68
	CA_4A-5A	Band 4	20M	1732.5	20175	QPSK	1	0		Band 5	10M	881.5	2525	16.32	16.49
		Band 5	10M	836.5	20525	QPSK	25	0		Band 4	20M	2132.5	2175	19.99	20.28
	CA_4A-7A	Band 4	20M	1732.5	20175	QPSK	1	0		Band 7	20M	2655	3100	16.34	16.49
		Band 7	20M	2560	21350	QPSK	1	0		Band 4	20M	2132.5	2175	13.70	13.78
	CA_4A-12A	Band 4	20M	1732.5	20175	QPSK	1	0		Band 12	10M	737.5	5095	16.34	16.49
		Band 12	10M	707.5	23095	QPSK	1	0		Band 4	20M	2132.5	2175	22.12	22.61
	CA_4A-13A	Band 4	20M	1732.5	20175	QPSK	1	0		Band 13	10M	751	5230	16.32	16.49
		Band 13	10M	782	23230	QPSK	1	0		Band 4	20M	2132.5	2175	22.12	22.42
	CA_5A-66A	Band 5	10M	836.5	20525	QPSK	25	0		Band 66	20M	2155	66886	20.01	20.28
		Band 66	20M	1720	132072	QPSK	1	99		Band 5	10M	881.5	2525	16.32	16.68
	CA_12A-66A	Band 12	10M	707.5	23095	QPSK	1	0		Band 66	20M	2155	66886	22.32	22.61
		Band 66	20M	1720	132072	QPSK	1	99		Band 12	10M	737.5	5095	16.59	16.68
	CA_13A-66A	Band 13	10M	782	23230	QPSK	1	0		Band 66	20M	2155	66886	22.30	22.42
		Band 66	20M	1720	132072	QPSK	1	99		Band 13	10M	751	5230	16.32	16.68
	CA_25A-26A	Band 25	20M	1905	26590	QPSK	1	0		Band 26	15M	876.5	8865	16.45	16.98
		Band 26	15M	831.5	26865	QPSK	1	0		Band 25	20M	1960	8340	19.98	20.15
Intra-Band	Contiguous	CA_2C	Band 2	20M	1880	18900	QPSK	1	99	Band 2	20M	1979.8	1098	17.05	17.06
		CA_5B	Band 5	10M	836.5	20525	QPSK	25	0	Band 5	10M	891.4	2624	19.98	20.28
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	17.21	17.34
		CA_66B	Band 66	15M	1745	132322	QPSK	1	37	Band 66	5M	2164.3	66979	16.43	16.48
		CA_66C	Band 66	20M	1720	132072	QPSK	1	99	Band 66	20M	2139.8	66734	16.45	16.68
	Non-Contiguous	CA_2A-2A	Band 2	20M	1880	18900	QPSK	1	99	Band 2	5M	1987.5	1175	16.89	17.06
		CA_4A-4A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 4	5M	2152.5	2375	16.34	16.49
		CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2630	2850	13.76	13.78
		CA_25A-25A	Band 25	20M	1905	26590	QPSK	1	0	Band 25	5M	1932.5	8065	16.76	16.98
		CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	17.21	17.34
		CA_66A-66A	Band 66	20M	1720	132072	QPSK	1	99	Band 66	5M	2197.5	67311	16.70	16.68

<Reduced Power Mode for Handheld On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
					(MHz)				Offset			(MHz)		(dBm)	(dBm)
Inter-Band		CA_2A-4A	Band 2	20M	1880	18900	QPSK	1	99	Band 4	20M	2132.5	2175	19.69	20.13
			Band 4	20M	1732.5	20175	QPSK	1	0	Band 2	20M	1960	900	19.78	20.15
		CA_2A-5A	Band 2	20M	1880	18900	QPSK	1	99	Band 5	10M	881.5	2525	19.71	20.13
			Band 5	10M	836.5	20525	QPSK	1	0	Band 2	20M	1960	900	22.80	22.85
		CA_2A-12A	Band 2	20M	1880	18900	QPSK	1	99	Band 12	10M	737.5	5095	19.67	20.13
			Band 12	10M	707.5	23095	QPSK	1	0	Band 2	20M	1960	900	22.45	22.61
		CA_2A-13A	Band 2	20M	1880	18900	QPSK	1	99	Band 13	10M	751	5230	19.78	20.13
			Band 13	10M	782	23230	QPSK	1	0	Band 2	20M	1960	900	22.23	22.42
		CA_2A-66A	Band 2	20M	1880	18900	QPSK	1	99	Band 66	20M	2155	66886	19.76	20.13
			Band 66	20M	1720	132072	QPSK	1	99	Band 2	20M	1960	900	19.87	20.28
		CA_4A-5A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 5	10M	881.5	2525	19.78	20.15
			Band 5	10M	836.5	20525	QPSK	1	0	Band 4	20M	2132.5	2175	22.81	22.85
		CA_4A-7A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 7	20M	2655	3100	20.00	20.15
			Band 7	20M	2560	21350	QPSK	1	0	Band 4	20M	2132.5	2175	18.65	18.79
		CA_4A-12A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 12	10M	737.5	5095	19.87	20.15
			Band 12	10M	707.5	23095	QPSK	1	0	Band 4	20M	2132.5	2175	22.54	22.61
		CA_4A-13A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 13	10M	751	5230	19.98	20.15
			Band 13	10M	782	23230	QPSK	1	0	Band 4	20M	2132.5	2175	22.31	22.42
		CA_5A-66A	Band 5	10M	836.5	20525	QPSK	1	0	Band 66	20M	2155	66886	22.76	22.85
			Band 66	20M	1720	132072	QPSK	1	99	Band 5	10M	881.5	2525	20.12	20.28
		CA_12A-66A	Band 12	10M	707.5	23095	QPSK	1	0	Band 66	20M	2155	66886	22.45	22.61
			Band 66	20M	1720	132072	QPSK	1	99	Band 12	10M	737.5	5095	20.00	20.28
		CA_13A-66A	Band 13	10M	782	23230	QPSK	1	0	Band 66	20M	2155	66886	22.21	22.42
			Band 66	20M	1720	132072	QPSK	1	99	Band 13	10M	751	5230	19.99	20.28
		CA_25A-26A	Band 25	20M	1905	26590	QPSK	1	0	Band 26	15M	876.5	8865	19.78	20.12
			Band 26	15M	831.5	26865	QPSK	1	0	Band 25	20M	1960	8340	22.65	22.86
Intra-Band	Contiguous	CA_2C	Band 2	20M	1880	18900	QPSK	1	99	Band 2	20M	1979.8	1098	19.88	20.13
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	21.30	21.51
		CA_66B	Band 66	15M	1717.5	132047	QPSK	75	0	Band 66	5M	2126.8	66604	20.10	20.26
		CA_66C	Band 66	20M	1720	132072	QPSK	1	99	Band 66	20M	2139.8	66734	20.12	20.28
	Non-Contiguous	CA_2A-2A	Band 2	20M	1880	18900	QPSK	1	99	Band 2	5M	1987.5	1175	19.98	20.13
		CA_4A-4A	Band 4	20M	1732.5	20175	QPSK	1	0	Band 4	5M	2152.5	2375	19.96	20.15
		CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2630	2850	18.67	18.79
		CA_25A-25A	Band 25	20M	1905	26590	QPSK	1	0	Band 25	5M	1932.5	8065	19.98	20.12
	CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	21.34	21.51	
	CA_66A-66A	Band 66	20M	1720	132072	QPSK	1	99	Band 66	5M	2197.5	67311	20.12	20.28	

<WLAN Conducted Power>
General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Full Power Mode>
<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	19.21	19.50	100.00
		6	2437	19.32	19.50	
		11	2462	18.91	19.50	
	802.11g 6Mbps	1	2412	17.69	18.50	95.63
		6	2437	17.85	18.50	
		11	2462	18.06	18.50	
	802.11n-HT20 MCS0	1	2412	17.76	18.50	94.35
		6	2437	17.94	18.50	
		11	2462	18.13	18.50	

<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	17.64	19.50	95.63
		40	5200	18.26	19.50	
		44	5220	18.21	19.50	
		48	5240	18.97	19.50	
	802.11n-HT20 MCS0	36	5180	17.87	19.50	94.84
		40	5200	18.54	19.50	
		44	5220	18.62	19.50	
		48	5240	19.11	19.50	
	802.11n-HT40 MCS0	38	5190	17.56	18.50	87.74
		46	5230	18.14	18.50	
	802.11ac-VHT20 MCS0	36	5180	17.64	19.50	95.47
		40	5200	18.45	19.50	
		44	5220	18.53	19.50	
		48	5240	19.01	19.50	
	802.11ac-VHT40 MCS0	38	5190	17.25	18.50	88.85
		46	5230	18.07	18.50	
	802.11ac-VHT80 MCS0	42	5210	15.54	17.00	76.51

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	18.20	19.50	95.63
		56	5280	18.53	19.50	
		60	5300	18.42	19.50	
		64	5320	18.57	19.50	
	802.11n-HT20 MCS0	52	5260	18.61	19.50	94.84
		56	5280	18.95	19.50	
		60	5300	18.78	19.50	
		64	5320	18.94	19.50	
	802.11n-HT40 MCS0	54	5270	18.15	18.50	87.74
		62	5310	18.44	18.50	
	802.11ac-VHT20 MCS0	52	5260	18.54	19.50	95.47
		56	5280	18.93	19.50	
		60	5300	18.75	19.50	
		64	5320	18.93	19.50	
	802.11ac-VHT40 MCS0	54	5270	18.09	18.50	88.85
		62	5310	18.44	18.50	
	802.11ac-VHT80 MCS0	58	5290	16.62	17.00	76.51

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	18.40	19.50	95.63
		116	5580	18.55	19.50	
		124	5620	18.46	19.50	
		132	5660	17.68	19.00	
		140	5700	17.96	19.00	
		144	5720	17.44	19.00	
	802.11n-HT20 MCS0	100	5500	18.88	19.50	94.84
		116	5580	18.91	19.50	
		124	5620	18.82	19.50	
		132	5660	17.98	19.00	
		140	5700	18.03	19.00	
		144	5720	17.41	19.00	
	802.11n-HT40 MCS0	102	5510	18.66	19.00	87.74
		110	5550	18.58	19.00	
		126	5630	18.31	19.00	
		134	5670	17.30	18.00	
		142	5710	17.16	18.00	
	802.11ac-VHT20 MCS0	100	5500	18.85	19.50	95.47
		116	5580	18.89	19.50	
		124	5620	18.81	19.50	
		132	5660	17.92	19.00	
		140	5700	17.96	19.00	
		144	5720	17.40	19.00	
	802.11ac-VHT40 MCS0	102	5510	18.54	19.00	88.85
		110	5550	18.53	19.00	
		126	5630	18.20	19.00	
		134	5670	17.29	18.00	
		142	5710	16.98	18.00	
	802.11ac-VHT80 MCS0	106	5530	16.50	17.00	76.51
		122	5610	16.32	17.00	
		138	5690	14.98	16.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	17.57	18.50	95.63
		157	5785	17.78	18.50	
		165	5825	17.60	18.50	
	802.11n-HT20 MCS0	149	5745	17.83	18.50	94.84
		157	5785	17.92	18.50	
		165	5825	17.65	18.50	
	802.11n-HT40 MCS0	151	5755	16.92	18.00	87.74
		159	5795	17.08	18.00	
	802.11ac-VHT20 MCS0	149	5745	17.61	18.50	95.47
		157	5785	17.77	18.50	
		165	5825	17.64	18.50	
	802.11ac-VHT40 MCS0	151	5755	16.89	18.00	88.85
		159	5795	16.94	18.00	
	802.11ac-VHT80 MCS0	155	5775	14.59	16.00	76.51

<Reduced Power Mode for Receiver On>
<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	17.04	17.50	100.00
		6	2437	17.12	17.50	
		11	2462	17.01	17.50	
	802.11g 6Mbps	1	2412	15.70	16.50	95.63
		6	2437	15.87	16.50	
		11	2462	16.12	16.50	
	802.11n-HT20 MCS0	1	2412	15.88	16.50	94.35
		6	2437	15.96	16.50	
		11	2462	16.17	16.50	

<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	16.44	18.00	95.63
		40	5200	17.18	18.50	
		44	5220	16.81	18.50	
		48	5240	17.12	18.50	
	802.11n-HT20 MCS0	36	5180	16.38	18.00	94.84
		40	5200	17.06	18.50	
		44	5220	16.64	18.50	
		48	5240	17.14	18.50	
	802.11n-HT40 MCS0	38	5190	16.25	17.50	87.74
		46	5230	16.63	17.50	
	802.11ac-VHT20 MCS0	36	5180	16.41	18.00	95.47
		40	5200	17.17	18.50	
		44	5220	16.78	18.50	
		48	5240	17.29	18.50	
	802.11ac-VHT40 MCS0	38	5190	16.18	17.50	88.85
		46	5230	16.52	17.50	
	802.11ac-VHT80 MCS0	42	5210	14.32	16.00	76.51

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	16.57	18.50	95.63
		56	5280	16.64	18.50	
		60	5300	16.62	18.50	
		64	5320	17.30	18.50	
	802.11n-HT20 MCS0	52	5260	16.39	18.00	94.84
		56	5280	16.61	18.50	
		60	5300	16.55	18.50	
		64	5320	17.31	18.50	
	802.11n-HT40 MCS0	54	5270	16.73	17.50	87.74
		62	5310	16.35	17.50	
	802.11ac-VHT20 MCS0	52	5260	16.52	18.50	95.47
		56	5280	16.24	18.00	
		60	5300	16.12	18.00	
		64	5320	16.23	18.00	
	802.11ac-VHT40 MCS0	54	5270	16.73	17.50	88.85
		62	5310	16.65	17.50	
	802.11ac-VHT80 MCS0	58	5290	15.44	16.00	76.51

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	16.86	18.50	95.63
		116	5580	17.00	18.50	
		124	5620	16.77	18.50	
		132	5660	16.28	18.00	
		140	5700	16.57	18.00	
		144	5720	16.62	18.00	
	802.11n-HT20 MCS0	100	5500	16.71	18.50	94.84
		116	5580	17.02	18.50	
		124	5620	16.80	18.50	
		132	5660	16.15	18.00	
		140	5700	16.45	18.00	
		144	5720	16.15	18.00	
	802.11n-HT40 MCS0	102	5510	16.44	18.00	87.74
		110	5550	16.68	18.00	
		126	5630	16.46	18.00	
		134	5670	15.91	17.00	
		142	5710	16.04	17.00	
	802.11ac-VHT20 MCS0	100	5500	16.08	18.00	95.47
		116	5580	16.98	18.50	
		124	5620	16.78	18.50	
		132	5660	16.19	18.00	
		140	5700	16.46	18.00	
		144	5720	16.44	18.00	
	802.11ac-VHT40 MCS0	102	5510	17.13	18.00	88.85
		110	5550	16.31	18.00	
		126	5630	16.77	18.00	
		134	5670	16.32	17.00	
		142	5710	15.88	17.00	
	802.11ac-VHT80 MCS0	106	5530	15.42	16.00	76.51
		122	5610	15.27	16.00	
		138	5690	13.96	15.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	16.15	17.50	95.63
		157	5785	16.22	17.50	
		165	5825	16.10	17.50	
	802.11n-HT20 MCS0	149	5745	15.87	17.50	94.84
		157	5785	15.92	17.50	
		165	5825	16.08	17.50	
	802.11n-HT40 MCS0	151	5755	15.38	17.00	87.74
		159	5795	15.82	17.00	
	802.11ac-VHT20 MCS0	149	5745	15.70	17.50	95.47
		157	5785	15.97	17.50	
		165	5825	16.01	17.50	
	802.11ac-VHT40 MCS0	151	5755	16.10	17.00	88.85
		159	5795	15.92	17.00	
	802.11ac-VHT80 MCS0	155	5775	13.17	15.00	76.51

<Reduced Power Mode for P-Sensor On>
<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	15.23	17.00	95.63
		40	5200	16.11	17.50	
		44	5220	15.76	17.50	
		48	5240	16.31	17.50	
	802.11n-HT20 MCS0	36	5180	15.16	17.00	94.84
		40	5200	16.01	17.50	
		44	5220	15.81	17.50	
		48	5240	16.29	17.50	
	802.11n-HT40 MCS0	38	5190	15.46	16.50	87.74
		46	5230	15.49	16.50	
	802.11ac-VHT20 MCS0	36	5180	15.12	17.00	95.47
		40	5200	15.64	17.50	
		44	5220	15.73	17.50	
		48	5240	16.28	17.50	
	802.11ac-VHT40 MCS0	38	5190	15.22	16.50	88.85
		46	5230	15.93	16.50	
	802.11ac-VHT80 MCS0	42	5210	13.24	15.00	76.51

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	15.98	17.50	95.63
		56	5280	16.45	17.50	
		60	5300	16.40	17.50	
		64	5320	16.47	17.50	
	802.11n-HT20 MCS0	52	5260	15.92	17.00	94.84
		56	5280	16.10	17.50	
		60	5300	16.38	17.50	
		64	5320	16.22	17.50	
	802.11n-HT40 MCS0	54	5270	15.58	16.50	87.74
		62	5310	16.21	16.50	
	802.11ac-VHT20 MCS0	52	5260	15.97	17.50	95.47
		56	5280	16.26	17.00	
		60	5300	16.23	17.00	
		64	5320	16.13	17.00	
	802.11ac-VHT40 MCS0	54	5270	15.53	16.50	88.85
		62	5310	16.18	16.50	
	802.11ac-VHT80 MCS0	58	5290	14.20	15.00	76.51

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	16.10	17.50	95.63
		116	5580	16.18	17.50	
		124	5620	16.13	17.50	
		132	5660	15.56	17.00	
		140	5700	15.78	17.00	
		144	5720	15.36	17.00	
	802.11n-HT20 MCS0	100	5500	15.79	17.50	94.84
		116	5580	16.06	17.50	
		124	5620	15.79	17.50	
		132	5660	15.42	17.00	
		140	5700	16.00	17.00	
		144	5720	15.40	17.00	
	802.11n-HT40 MCS0	102	5510	16.62	17.00	87.74
		110	5550	16.50	17.00	
		126	5630	16.30	17.00	
		134	5670	15.29	16.00	
		142	5710	15.13	16.00	
	802.11ac-VHT20 MCS0	100	5500	16.12	17.00	95.47
		116	5580	16.21	17.50	
		124	5620	16.21	17.50	
		132	5660	15.57	17.00	
		140	5700	15.78	17.00	
		144	5720	15.35	17.00	
	802.11ac-VHT40 MCS0	102	5510	16.06	17.00	88.85
		110	5550	16.03	17.00	
		126	5630	16.17	17.00	
		134	5670	15.16	16.00	
		142	5710	14.95	16.00	
	802.11ac-VHT80 MCS0	106	5530	14.32	15.00	76.51
		122	5610	14.28	15.00	
		138	5690	12.90	14.00	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	15.47	16.50	95.63
		157	5785	15.52	16.50	
		165	5825	15.48	16.50	
	802.11n-HT20 MCS0	149	5745	15.37	16.50	94.84
		157	5785	15.48	16.50	
		165	5825	15.54	16.50	
	802.11n-HT40 MCS0	151	5755	14.83	16.00	87.74
		159	5795	14.89	16.00	
	802.11ac-VHT20 MCS0	149	5745	15.46	16.50	95.47
		157	5785	15.42	16.50	
		165	5825	15.54	16.50	
	802.11ac-VHT40 MCS0	151	5755	15.02	16.00	88.85
		159	5795	14.89	16.00	
	802.11ac-VHT80 MCS0	155	5775	12.48	14.00	76.51

<Reduced Power Mode for Hotspot On>
<5GHz WLAN>


5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	15.23	17.00	95.63
		40	5200	16.11	17.50	
		44	5220	15.76	17.50	
		48	5240	16.31	17.50	
	802.11n-HT20 MCS0	36	5180	15.16	17.00	94.84
		40	5200	16.01	17.50	
		44	5220	15.81	17.50	
		48	5240	16.29	17.50	
	802.11n-HT40 MCS0	38	5190	15.46	16.50	87.74
		46	5230	15.49	16.50	
	802.11ac-VHT20 MCS0	36	5180	15.12	17.00	95.47
		40	5200	15.64	17.50	
		44	5220	15.73	17.50	
		48	5240	16.28	17.50	
	802.11ac-VHT40 MCS0	38	5190	15.22	16.50	88.85
		46	5230	15.93	16.50	
	802.11ac-VHT80 MCS0	42	5210	13.24	15.00	76.51

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	15.47	16.50	95.63
		157	5785	15.52	16.50	
		165	5825	15.48	16.50	
	802.11n-HT20 MCS0	149	5745	15.37	16.50	94.84
		157	5785	15.48	16.50	
		165	5825	15.54	16.50	
	802.11n-HT40 MCS0	151	5755	14.83	16.00	87.74
		159	5795	14.89	16.00	
	802.11ac-VHT20 MCS0	149	5745	15.46	16.50	95.47
		157	5785	15.42	16.50	
		165	5825	15.54	16.50	
	802.11ac-VHT40 MCS0	151	5755	15.02	16.00	88.85
		159	5795	14.89	16.00	
	802.11ac-VHT80 MCS0	155	5775	12.48	14.00	76.51

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.01 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

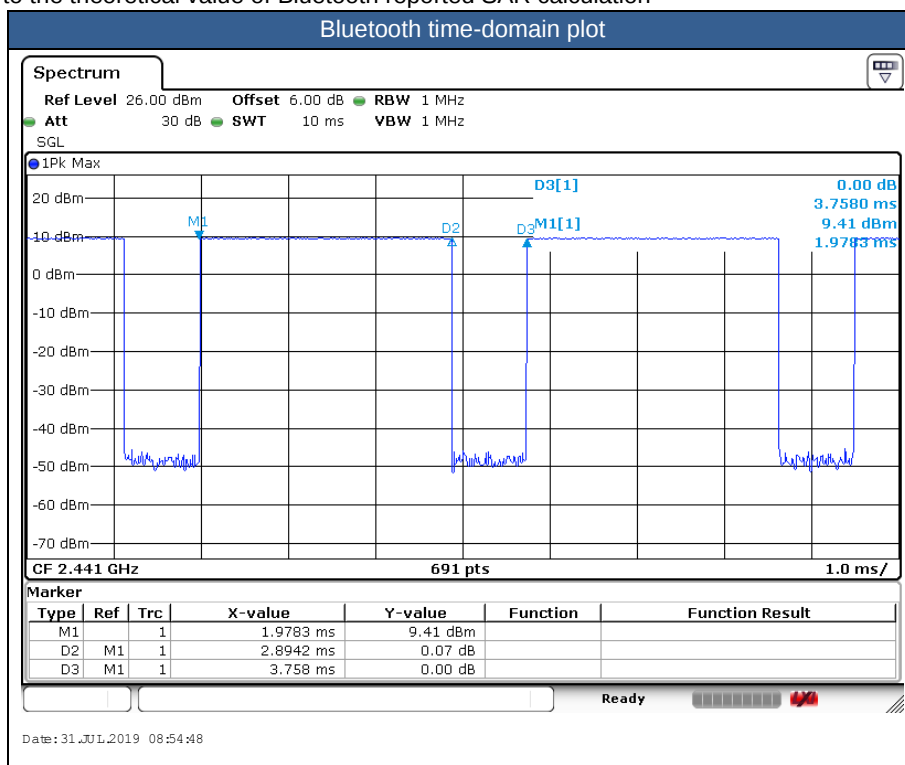


Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-up limit (dBm)
			1Mbps	
BR/EDR	CH 00	2402	8.61	10.00
	CH 39	2441	9.58	10.00
	CH 78	2480	7.34	9.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			GFSK	
v4.0 LE	CH 00	2402	9.49	
	CH 19	2440	9.42	
	CH 39	2480	8.58	
Tune-up Limit			10.00	

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			GFSK	
v5.0 LE	CH 00	2402	9.52	
	CH 19	2440	9.41	
	CH 39	2480	8.67	
Tune-up Limit			10.00	

14. Antenna Location

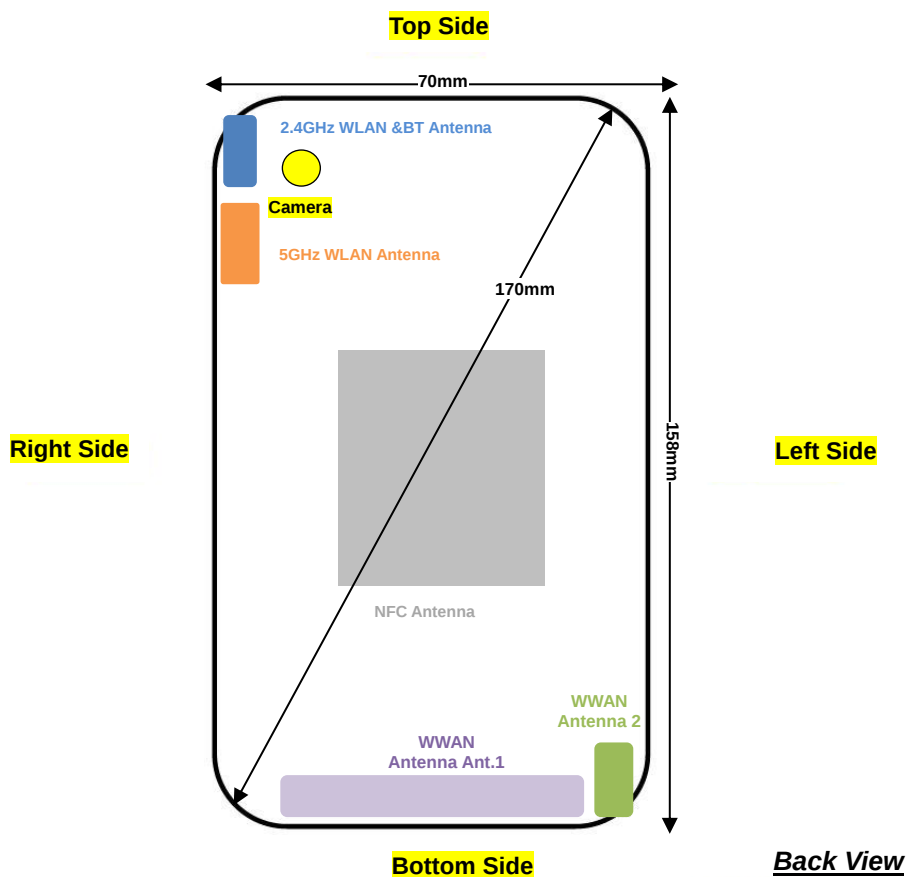

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	No	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	Yes	No
5GHz WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, CDMA BC0/BC1/BC10, and LTE Band 2/4/5/12/13/17/25/26/66, WWAN antenna 2 frequency band only include LTE Band 7/38/41.
- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from

that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz and WLAN5GHz.
6. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850/GSM1900, WCDMA band II/IV/V, CDMA BC0/BC1/BC10, LTE band 2/4/5/7/25/26/38/41/66 and WLAN5GHz reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
7. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/GSM1900, WCDMA band II/IV/V, CDMA BC0/BC1/BC10, LTE band 2/4/5/7/25/26/38/41/66 and WLAN5.2GHz/5.8GHz.
8. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900, WCDMA band II/IV, LTE band 2/4/5/7/25/38/41/66, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
9. P-sensor can detect handheld state, WCDMA band II/IV, CDMA BC1 and LTE band 2/4/7/25/38/41/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.
10. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, CDMA BC0/BC1/BC10, and LTE Band 2/4/5/12/13/17/25/26/66, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
11. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, CDMA BC0/BC1/BC10, LTE Band 2/4/5/7/25/26/38/41/66, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM850/1900 band, for SAR testing EUT was set in reduced power mode and GPRS 3 Tx slots due to its highest frame-average power.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

CDMA Note:

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B17 / B2 / B5 / B38 / B4 SAR test was covered by B12 / B25 / B26 / B41 / B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 3 Tx slots	Right Cheek	Full	251	848.8	29.06	30.00	1.242	0.18	0.414	0.514
	GSM850	GPRS 3 Tx slots	Right Tilted	Full	251	848.8	29.06	30.00	1.242	0.01	0.168	0.209
	GSM850	GPRS 3 Tx slots	Left Cheek	Full	251	848.8	29.06	30.00	1.242	0.02	0.302	0.375
	GSM850	GPRS 3 Tx slots	Left Tilted	Full	251	848.8	29.06	30.00	1.242	-0.02	0.160	0.199
	GSM850	GPRS 3 Tx slots	Right Cheek	Full	128	824.2	28.63	30.00	1.371	0.02	0.265	0.363
	GSM850	GPRS 3 Tx slots	Right Cheek	Full	189	836.4	28.81	30.00	1.315	-0.08	0.354	0.466
	GSM1900	GPRS 3 Tx slots	Right Cheek	Full	810	1909.8	26.51	27.00	1.119	0.03	0.046	0.052
	GSM1900	GPRS 3 Tx slots	Right Tilted	Full	810	1909.8	26.51	27.00	1.119	0.19	0.048	0.054
	GSM1900	GPRS 3 Tx slots	Left Cheek	Full	810	1909.8	26.51	27.00	1.119	0.13	0.081	0.090
	GSM1900	GPRS 3 Tx slots	Left Tilted	Full	810	1909.8	26.51	27.00	1.119	-0.03	0.031	0.035
	GSM1900	GPRS 3 Tx slots	Left Cheek	Full	512	1850.2	26.01	27.00	1.256	0.04	0.069	0.086
02	GSM1900	GPRS 3 Tx slots	Left Cheek	Full	661	1880	26.07	27.00	1.239	0.02	0.082	0.102

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC 12.2Kbps	Right Cheek	Full	4233	846.6	22.56	24.00	1.393	0.16	0.487	0.678
	WCDMA V	RMC 12.2Kbps	Right Tilted	Full	4233	846.6	22.56	24.00	1.393	0.03	0.200	0.279
	WCDMA V	RMC 12.2Kbps	Left Cheek	Full	4233	846.6	22.56	24.00	1.393	0.02	0.350	0.488
	WCDMA V	RMC 12.2Kbps	Left Tilted	Full	4233	846.6	22.56	24.00	1.393	0.01	0.179	0.249
	WCDMA V	RMC 12.2Kbps	Right Cheek	Full	4132	826.4	22.31	24.00	1.476	0.09	0.360	0.531
	WCDMA V	RMC 12.2Kbps	Right Cheek	Full	4182	836.4	22.46	24.00	1.426	0.09	0.395	0.563
	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full	1312	1712.4	22.53	24.00	1.403	0.01	0.073	0.103
	WCDMA IV	RMC 12.2Kbps	Right Tilted	Full	1312	1712.4	22.53	24.00	1.403	0.03	0.065	0.092
	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full	1312	1712.4	22.53	24.00	1.403	-0.02	0.142	0.199
	WCDMA IV	RMC 12.2Kbps	Left Tilted	Full	1312	1712.4	22.53	24.00	1.403	0.03	0.062	0.087
	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full	1413	1732.6	22.45	24.00	1.429	0.1	0.179	0.256
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full	1513	1752.6	22.52	24.00	1.406	0.06	0.202	0.284
	WCDMA II	RMC 12.2Kbps	Right Cheek	Full	9538	1907.6	22.57	24.00	1.390	0.19	0.091	0.126
	WCDMA II	RMC 12.2Kbps	Right Tilted	Full	9538	1907.6	22.57	24.00	1.390	0.07	0.074	0.103
	WCDMA II	RMC 12.2Kbps	Left Cheek	Full	9538	1907.6	22.57	24.00	1.390	0.07	0.143	0.199
	WCDMA II	RMC 12.2Kbps	Left Tilted	Full	9538	1907.6	22.57	24.00	1.390	-0.03	0.066	0.091
	WCDMA II	RMC 12.2Kbps	Left Cheek	Full	9262	1852.4	22.52	24.00	1.406	0.05	0.151	0.212
05	WCDMA II	RMC 12.2Kbps	Left Cheek	Full	9400	1880	22.53	24.00	1.403	0.03	0.157	0.220

<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RC3 SO55	Right Cheek	Full	476	817.9	23.80	25.00	1.318	0.02	0.201	0.265
	CDMA2000 BC10	RC3 SO55	Right Tilted	Full	476	817.9	23.80	25.00	1.318	0.02	0.079	0.104
	CDMA2000 BC10	RC3 SO55	Left Cheek	Full	476	817.9	23.80	25.00	1.318	-0.05	0.137	0.181
	CDMA2000 BC10	RC3 SO55	Left Tilted	Full	476	817.9	23.80	25.00	1.318	0.02	0.051	0.067
06	CDMA2000 BC10	RC3 SO55	Right Cheek	Full	580	820.5	23.79	25.00	1.321	0.07	0.201	0.266
	CDMA2000 BC10	RC3 SO55	Right Cheek	Full	684	823.1	23.75	25.00	1.334	0.04	0.175	0.233
	CDMA2000 BC0	RC3 SO55	Right Cheek	Full	1013	824.7	23.88	25.00	1.294	0.16	0.330	0.427
	CDMA2000 BC0	RC3 SO55	Right Tilted	Full	1013	824.7	23.88	25.00	1.294	0.01	0.155	0.201
	CDMA2000 BC0	RC3 SO55	Left Cheek	Full	1013	824.7	23.88	25.00	1.294	0.05	0.262	0.339
	CDMA2000 BC0	RC3 SO55	Left Tilted	Full	1013	824.7	23.88	25.00	1.294	0.03	0.141	0.182
	CDMA2000 BC0	RC3 SO55	Right Cheek	Full	384	836.52	23.77	25.00	1.327	-0.04	0.388	0.515
07	CDMA2000 BC0	RC3 SO55	Right Cheek	Full	777	848.31	23.58	25.00	1.387	0.04	0.377	0.523
	CDMA2000 BC1	RC3 SO55	Right Cheek	Full	25	1851.25	24.13	25.00	1.222	-0.09	0.107	0.131
	CDMA2000 BC1	RC3 SO55	Right Tilted	Full	25	1851.25	24.13	25.00	1.222	-0.04	0.108	0.132
	CDMA2000 BC1	RC3 SO55	Left Cheek	Full	25	1851.25	24.13	25.00	1.222	-0.05	0.156	0.191
	CDMA2000 BC1	RC3 SO55	Left Tilted	Full	25	1851.25	24.13	25.00	1.222	-0.02	0.070	0.085
08	CDMA2000 BC1	RC3 SO55	Left Cheek	Full	600	1880	24.06	25.00	1.242	-0.09	0.158	0.196
	CDMA2000 BC1	RC3 SO55	Left Cheek	Full	1175	1908.75	23.94	25.00	1.276	0.19	0.148	0.189



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 12	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.61	24.00	1.377	0.02	0.305	0.420
	LTE Band 12	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	21.51	23.00	1.409	0.02	0.252	0.355
	LTE Band 12	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.61	24.00	1.377	0.01	0.135	0.186
	LTE Band 12	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	21.51	23.00	1.409	0.03	0.111	0.156
	LTE Band 12	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.61	24.00	1.377	0.15	0.234	0.322
	LTE Band 12	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	21.51	23.00	1.409	0.06	0.195	0.275
	LTE Band 12	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.61	24.00	1.377	0.12	0.130	0.179
	LTE Band 12	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	21.51	23.00	1.409	0.03	0.107	0.151
10	LTE Band 13	10M	QPSK	1	0	Right Cheek	Full	23230	782	22.42	24.00	1.439	0.08	0.123	0.177
	LTE Band 13	10M	QPSK	25	0	Right Cheek	Full	23230	782	21.31	23.00	1.476	0.09	0.161	0.238
	LTE Band 13	10M	QPSK	1	0	Right Tilted	Full	23230	782	22.42	24.00	1.439	0.09	0.046	0.066
	LTE Band 13	10M	QPSK	25	0	Right Tilted	Full	23230	782	21.31	23.00	1.476	0.01	0.058	0.086
	LTE Band 13	10M	QPSK	1	0	Left Cheek	Full	23230	782	22.42	24.00	1.439	0.01	0.085	0.123
	LTE Band 13	10M	QPSK	25	0	Left Cheek	Full	23230	782	21.31	23.00	1.476	0.01	0.107	0.158
	LTE Band 13	10M	QPSK	1	0	Left Tilted	Full	23230	782	22.42	24.00	1.439	0.02	0.046	0.065
	LTE Band 13	10M	QPSK	25	0	Left Tilted	Full	23230	782	21.31	23.00	1.476	0.03	0.057	0.084
11	LTE Band 26	15M	QPSK	1	0	Right Cheek	Full	26865	831.5	22.86	24.00	1.300	-0.09	0.510	0.663
	LTE Band 26	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	21.93	23.00	1.279	0.04	0.306	0.391
	LTE Band 26	15M	QPSK	1	0	Right Tilted	Full	26865	831.5	22.86	24.00	1.300	0.03	0.160	0.208
	LTE Band 26	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	21.93	23.00	1.279	0.02	0.136	0.174
	LTE Band 26	15M	QPSK	1	0	Left Cheek	Full	26865	831.5	22.86	24.00	1.300	0.02	0.274	0.356
	LTE Band 26	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	21.93	23.00	1.279	0.03	0.229	0.293
	LTE Band 26	15M	QPSK	1	0	Left Tilted	Full	26865	831.5	22.86	24.00	1.300	0.03	0.159	0.207
	LTE Band 26	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	21.93	23.00	1.279	0.01	0.134	0.171
12	LTE Band 66	20M	QPSK	1	0	Right Cheek	Full	132322	1745	22.59	24.00	1.384	-0.07	0.062	0.085
	LTE Band 66	20M	QPSK	50	0	Right Cheek	Full	132322	1745	21.54	23.00	1.400	0.16	0.046	0.064
	LTE Band 66	20M	QPSK	1	0	Right Tilted	Full	132322	1745	22.59	24.00	1.384	-0.07	0.052	0.072
	LTE Band 66	20M	QPSK	50	0	Right Tilted	Full	132322	1745	21.54	23.00	1.400	-0.01	0.043	0.060
	LTE Band 66	20M	QPSK	1	0	Left Cheek	Full	132322	1745	22.59	24.00	1.384	0.08	0.109	0.151
	LTE Band 66	20M	QPSK	50	0	Left Cheek	Full	132322	1745	21.54	23.00	1.400	0.02	0.085	0.119
	LTE Band 66	20M	QPSK	1	0	Left Tilted	Full	132322	1745	22.59	24.00	1.384	-0.04	0.080	0.110
	LTE Band 66	20M	QPSK	50	0	Left Tilted	Full	132322	1745	21.54	23.00	1.400	-0.05	0.057	0.080
13	LTE Band 66	20M	QPSK	1	0	Left Cheek	Full	132072	1720	22.22	24.00	1.507	0.06	0.066	0.099
	LTE Band 66	20M	QPSK	1	0	Left Cheek	Full	132572	1770	22.33	24.00	1.469	-0.03	0.064	0.094
	LTE Band 25	20M	QPSK	1	0	Right Cheek	Full	26340	1880	22.75	24.00	1.334	0.02	0.063	0.084
	LTE Band 25	20M	QPSK	50	0	Right Cheek	Full	26340	1880	21.65	23.00	1.365	-0.03	0.050	0.069
	LTE Band 25	20M	QPSK	1	0	Right Tilted	Full	26340	1880	22.75	24.00	1.334	-0.05	0.065	0.086
	LTE Band 25	20M	QPSK	50	0	Right Tilted	Full	26340	1880	21.65	23.00	1.365	-0.02	0.050	0.068
	LTE Band 25	20M	QPSK	1	0	Left Cheek	Full	26340	1880	22.75	24.00	1.334	0.09	0.138	0.184
	LTE Band 25	20M	QPSK	50	0	Left Cheek	Full	26340	1880	21.65	23.00	1.365	-0.13	0.109	0.149
	LTE Band 25	20M	QPSK	1	0	Left Tilted	Full	26340	1880	22.75	24.00	1.334	-0.05	0.063	0.084
	LTE Band 25	20M	QPSK	50	0	Left Tilted	Full	26340	1880	21.65	23.00	1.365	-0.09	0.050	0.068
	LTE Band 25	20M	QPSK	1	0	Left Cheek	Full	26140	1860	22.40	24.00	1.445	0.08	0.099	0.143
	LTE Band 25	20M	QPSK	1	0	Left Cheek	Full	26590	1905	22.74	24.00	1.337	0.09	0.095	0.127



FCC SAR Test Report

Report No. : FA932901-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	21350	2560	22.33	24.00	1.469	0.07	0.189	0.278
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Full	21350	2560	21.29	23.00	1.483	0.03	0.148	0.219
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Full	21350	2560	22.33	24.00	1.469	-0.03	0.148	0.217
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Full	21350	2560	21.29	23.00	1.483	0.12	0.117	0.173
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Full	21350	2560	22.33	24.00	1.469	0.03	0.183	0.269
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Full	21350	2560	21.29	23.00	1.483	0.08	0.124	0.184
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Full	21350	2560	22.33	24.00	1.469	-0.09	0.080	0.117
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Full	21350	2560	21.29	23.00	1.483	-0.08	0.063	0.093
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	20850	2510	22.15	24.00	1.531	0.05	0.188	0.288
14	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	21100	2535	22.24	24.00	1.500	0.02	0.195	0.292

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Full	40620	2593	22.76	24.00	1.330	62.9	1.006	0.06	0.081	0.109
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Full	40620	2593	21.69	23.00	1.352	62.9	1.006	0.03	0.064	0.087
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Full	40620	2593	22.76	24.00	1.330	62.9	1.006	-0.06	0.060	0.080
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Full	40620	2593	21.69	23.00	1.352	62.9	1.006	-0.01	0.045	0.061
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	40620	2593	22.76	24.00	1.330	62.9	1.006	0.09	0.100	0.134
	LTE Band 41	20M	QPSK	50	0	Left Cheek	Full	40620	2593	21.69	23.00	1.352	62.9	1.006	-0.06	0.082	0.111
	LTE Band 41	20M	QPSK	1	0	Left Tilted	Full	40620	2593	22.76	24.00	1.330	62.9	1.006	0.08	0.032	0.043
	LTE Band 41	20M	QPSK	50	0	Left Tilted	Full	40620	2593	21.69	23.00	1.352	62.9	1.006	0.01	0.027	0.036
15	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	39750	2506	22.37	24.00	1.455	62.9	1.006	0.08	0.167	0.245
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	40185	2549.5	22.71	24.00	1.346	62.9	1.006	-0.06	0.134	0.181
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	41055	2636.5	22.69	24.00	1.352	62.9	1.006	0.06	0.121	0.165
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	41490	2680	22.69	24.00	1.352	62.9	1.006	0.04	0.116	0.158

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	6	2437	17.12	17.50	1.091	100	1.000	-0.18	0.329	0.239	0.261
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	6	2437	17.12	17.50	1.091	100	1.000	0.01	0.472	0.277	0.302
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	6	2437	17.12	17.50	1.091	100	1.000	-0.02	1.124	0.681	0.743
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	1	2412	17.04	17.50	1.112	100	1.000	0.03		0.617	0.686
16	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	11	2462	17.01	17.50	1.119	100	1.000	0.08		0.729	0.816
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	6	2437	17.12	17.50	1.091	100	1.000	-0.07	1.031	0.516	0.563

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Full	39	2441	9.58	10.00	1.100	77.01	1.082	-0.07	0.037	0.044
	Bluetooth	1Mbps	Right Tilted	Full	39	2441	9.58	10.00	1.100	77.01	1.082	0.06	0.046	0.055
	Bluetooth	1Mbps	Left Cheek	Full	39	2441	9.58	10.00	1.100	77.01	1.082	-0.02	0.083	0.099
	Bluetooth	1Mbps	Left Cheek	Full	0	2402	8.61	10.00	1.376	77.01	1.082	0.05	0.062	0.092
17	Bluetooth	1Mbps	Left Cheek	Full	78	2480	7.34	9.00	1.464	77.01	1.082	-0.15	0.082	0.130
	Bluetooth	1Mbps	Left Tilted	Full	39	2441	9.58	10.00	1.100	77.01	1.082	-0.09	0.053	0.063

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Reduced	64	5320	17.30	18.50	1.317	95.63	1.046	0.01	0.406	0.184	0.253
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Reduced	64	5320	17.30	18.50	1.317	95.63	1.046	0.06	0.410	0.164	0.226
18	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced	64	5320	17.30	18.50	1.317	95.63	1.046	-0.01	2.059	0.844	1.163
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced	56	5280	16.64	18.50	1.535	95.63	1.046	-0.03		0.683	1.096
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced	52	5260	16.57	18.50	1.558	95.63	1.046	0.03		0.693	1.129
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Reduced	64	5320	17.30	18.50	1.317	95.63	1.046	-0.08	1.269	0.487	0.671
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Reduced	116	5580	17.00	18.50	1.411	95.63	1.046	0.01	0.355	0.142	0.210
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Reduced	116	5580	17.00	18.50	1.411	95.63	1.046	0.04	0.357	0.125	0.185
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced	116	5580	17.00	18.50	1.411	95.63	1.046	-0.06	1.040	0.588	0.868
19	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced	100	5500	16.86	18.50	1.457	95.63	1.046	0.03		0.620	0.945
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Reduced	144	5720	16.62	18.50	1.540	95.63	1.046	0.02		0.522	0.841
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Reduced	116	5580	17.00	18.50	1.411	95.63	1.046	-0.04	0.532	0.304	0.449
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Reduced	157	5785	16.22	17.50	1.343	95.63	1.046	-0.01	0.251	0.137	0.192
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Reduced	157	5785	16.22	17.50	1.343	95.63	1.046	0.03	0.206	0.083	0.116
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced	157	5785	16.22	17.50	1.343	95.63	1.046	-0.01	1.042	0.493	0.692
20	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced	149	5745	16.15	17.50	1.365	95.63	1.046	-0.01		0.701	1.001
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced	165	5825	16.10	17.50	1.380	95.63	1.046	-0.01		0.498	0.719
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Reduced	157	5785	16.22	17.50	1.343	95.63	1.046	-0.08	0.502	0.252	0.354

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 3 Tx slots	Front	5	Reduced	251	848.8	25.77	27.00	1.327	0.08	0.760	1.009
	GSM850	GPRS 3 Tx slots	Front	5	Reduced	128	824.2	25.51	27.00	1.409	0.02	0.657	0.926
	GSM850	GPRS 3 Tx slots	Front	5	Reduced	189	836.4	25.71	27.00	1.346	0.01	0.873	1.175
	GSM850	GPRS 3 Tx slots	Back	5	Reduced	251	848.8	25.77	27.00	1.327	-0.04	1.000	1.327
	GSM850	GPRS 3 Tx slots	Back	5	Reduced	128	824.2	25.51	27.00	1.409	0.03	0.905	1.275
21	GSM850	GPRS 3 Tx slots	Back	5	Reduced	189	836.4	25.71	27.00	1.346	0.07	1.060	1.427
	GSM850	GPRS 3 Tx slots	Left Side	5	Reduced	251	848.8	25.77	27.00	1.327	0.01	0.116	0.154
	GSM850	GPRS 3 Tx slots	Right Side	5	Reduced	251	848.8	25.77	27.00	1.327	0.02	0.345	0.458
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Reduced	251	848.8	25.77	27.00	1.327	-0.08	0.742	0.985
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Reduced	128	824.2	25.51	27.00	1.409	-0.08	0.686	0.967
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Reduced	189	836.4	25.71	27.00	1.346	-0.06	0.823	1.108
	GSM1900	GPRS 3 Tx slots	Front	5	Reduced	810	1909.8	24.83	26.00	1.309	-0.03	0.716	0.937
	GSM1900	GPRS 3 Tx slots	Front	5	Reduced	512	1850.2	24.56	26.00	1.393	-0.03	0.623	0.868
	GSM1900	GPRS 3 Tx slots	Front	5	Reduced	661	1880	24.52	26.00	1.406	-0.09	0.635	0.893
	GSM1900	GPRS 3 Tx slots	Back	5	Reduced	810	1909.8	24.83	26.00	1.309	-0.02	0.881	1.153
22	GSM1900	GPRS 3 Tx slots	Back	5	Reduced	512	1850.2	24.56	26.00	1.393	0.06	0.974	1.357
	GSM1900	GPRS 3 Tx slots	Back	5	Reduced	661	1880	24.52	26.00	1.406	-0.01	0.792	1.114
	GSM1900	GPRS 3 Tx slots	Left Side	5	Reduced	810	1909.8	23.21	24.00	1.199	0.09	0.033	0.040
	GSM1900	GPRS 3 Tx slots	Right Side	5	Reduced	810	1909.8	23.21	24.00	1.199	0.15	0.365	0.438
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Reduced	810	1909.8	23.21	24.00	1.199	0.09	0.868	1.041
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Reduced	512	1850.2	22.76	24.00	1.330	0.04	0.791	1.052
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Reduced	661	1880	22.77	24.00	1.327	0.02	0.783	1.039

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	5	Reduced	4233	846.6	19.34	20.50	1.306	0.06	0.658	0.859
	WCDMA V	RMC 12.2Kbps	Front	5	Reduced	4132	826.4	19.12	20.50	1.374	0.09	0.531	0.730
	WCDMA V	RMC 12.2Kbps	Front	5	Reduced	4182	836.4	19.32	20.50	1.312	0.09	0.513	0.673
23	WCDMA V	RMC 12.2Kbps	Back	5	Reduced	4233	846.6	19.34	20.50	1.306	0.04	0.981	1.281
	WCDMA V	RMC 12.2Kbps	Back	5	Reduced	4132	826.4	19.12	20.50	1.374	-0.02	0.792	1.088
	WCDMA V	RMC 12.2Kbps	Back	5	Reduced	4182	836.4	19.32	20.50	1.312	0.03	0.825	1.083
	WCDMA V	RMC 12.2Kbps	Left Side	5	Reduced	4233	846.6	19.43	20.50	1.279	0.02	0.345	0.441
	WCDMA V	RMC 12.2Kbps	Right Side	5	Reduced	4233	846.6	19.43	20.50	1.279	0.02	0.120	0.154
	WCDMA V	RMC 12.2Kbps	Bottom Side	5	Reduced	4233	846.6	19.43	20.50	1.279	0.08	0.471	0.603
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1312	1712.4	18.55	20.00	1.396	-0.03	0.813	1.135
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1413	1732.6	18.47	20.00	1.422	-0.09	0.806	1.146
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1513	1752.6	18.52	20.00	1.406	0.02	0.766	1.077
24	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1312	1712.4	18.55	20.00	1.396	-0.01	0.907	1.267
	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1413	1732.6	18.47	20.00	1.422	0.06	0.840	1.195
	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1513	1752.6	18.52	20.00	1.406	-0.07	0.850	1.195
	WCDMA IV	RMC 12.2Kbps	Left Side	5	Reduced	1312	1712.4	16.12	17.50	1.374	0.03	0.036	0.049
	WCDMA IV	RMC 12.2Kbps	Right Side	5	Reduced	1312	1712.4	16.12	17.50	1.374	0.03	0.288	0.396
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1312	1712.4	16.12	17.50	1.374	0.07	0.908	1.248
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1413	1732.6	16.03	17.50	1.403	0.03	0.868	1.218
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1513	1752.6	16.06	17.50	1.393	0.06	0.882	1.229
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9262	1852.4	18.40	19.50	1.288	-0.05	0.661	0.852
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9400	1880	18.39	19.50	1.291	0.07	0.510	0.659
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9538	1907.6	18.36	19.50	1.300	0.06	0.521	0.677
	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9262	1852.4	18.40	19.50	1.288	-0.06	0.823	1.060
25	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9400	1880	18.39	19.50	1.291	-0.14	0.978	1.263
	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9538	1907.6	18.36	19.50	1.300	0.04	0.827	1.075
	WCDMA II	RMC 12.2Kbps	Left Side	5	Reduced	9262	1852.4	17.34	18.00	1.164	0.09	0.027	0.031
	WCDMA II	RMC 12.2Kbps	Right Side	5	Reduced	9262	1852.4	17.34	18.00	1.164	0.01	0.265	0.308
	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9262	1852.4	17.34	18.00	1.164	0.07	0.790	0.920
	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9400	1880	17.02	18.00	1.253	0.19	0.915	1.147
	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9538	1907.6	17.33	18.00	1.167	0.09	0.942	1.099



<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5	Reduced	476	817.9	21.91	23.00	1.285	0.07	0.804	1.033
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5	Reduced	580	820.5	21.83	23.00	1.309	0.05	0.698	0.914
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5	Reduced	684	823.1	21.78	23.00	1.324	-0.01	0.658	0.871
26	CDMA2000 BC10	RTAP 153.6Kbps	Back	5	Reduced	476	817.9	21.91	23.00	1.285	-0.07	0.898	1.154
	CDMA2000 BC10	RTAP 153.6Kbps	Back	5	Reduced	580	820.5	21.83	23.00	1.309	0.02	0.849	1.111
	CDMA2000 BC10	RTAP 153.6Kbps	Back	5	Reduced	684	823.1	21.78	23.00	1.324	0.06	0.737	0.976
	CDMA2000 BC10	RTAP 153.6Kbps	Left Side	5	Reduced	476	817.9	21.91	23.00	1.285	0.05	0.132	0.170
	CDMA2000 BC10	RTAP 153.6Kbps	Right Side	5	Reduced	476	817.9	21.91	23.00	1.285	0.01	0.445	0.572
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	5	Reduced	476	817.9	21.91	23.00	1.285	0.02	0.606	0.779
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5	Reduced	1013	824.7	20.83	22.00	1.309	0.01	0.690	0.903
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5	Reduced	384	836.52	20.76	22.00	1.330	-0.04	0.889	1.183
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5	Reduced	777	848.31	20.70	22.00	1.349	0.01	0.883	1.191
	CDMA2000 BC0	RTAP 153.6Kbps	Back	5	Reduced	1013	824.7	20.83	22.00	1.309	0.05	0.767	1.004
27	CDMA2000 BC0	RTAP 153.6Kbps	Back	5	Reduced	384	836.52	20.76	22.00	1.330	0.05	0.997	1.326
	CDMA2000 BC0	RTAP 153.6Kbps	Back	5	Reduced	777	848.31	20.70	22.00	1.349	0.01	0.871	1.175
	CDMA2000 BC0	RTAP 153.6Kbps	Left Side	5	Reduced	1013	824.7	20.83	22.00	1.309	0.01	0.121	0.158
	CDMA2000 BC0	RTAP 153.6Kbps	Right Side	5	Reduced	1013	824.7	20.83	22.00	1.309	0.02	0.443	0.580
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5	Reduced	1013	824.7	20.83	22.00	1.309	0.02	0.625	0.818
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5	Reduced	384	836.52	20.76	22.00	1.330	-0.13	0.694	0.923
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5	Reduced	777	848.31	20.70	22.00	1.349	-0.04	0.663	0.894
	CDMA2000 BC1	RTAP 153.6Kbps	Front	5	Reduced	25	1851.25	19.06	20.00	1.242	-0.12	0.576	0.715
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5	Reduced	25	1851.25	19.06	20.00	1.242	-0.14	0.843	1.047
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5	Reduced	600	1880	19.03	20.00	1.250	0.07	0.874	1.093
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5	Reduced	1175	1908.75	18.93	20.00	1.279	0.04	0.865	1.107
	CDMA2000 BC1	RTAP 153.6Kbps	Left Side	5	Reduced	25	1851.25	19.06	20.00	1.242	0.01	0.061	0.075
	CDMA2000 BC1	RTAP 153.6Kbps	Right Side	5	Reduced	25	1851.25	19.06	20.00	1.242	0.03	0.458	0.569
28	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5	Reduced	25	1851.25	19.06	20.00	1.242	0.02	1.010	1.254
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5	Reduced	600	1880	19.03	20.00	1.250	0.06	0.972	1.215
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5	Reduced	1175	1908.75	18.93	20.00	1.279	0.07	0.949	1.214

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	5	Full	23095	707.5	22.61	24.00	1.377	-0.09	0.627	0.864
	LTE Band 12	10M	QPSK	25	0	Front	5	Full	23095	707.5	21.51	23.00	1.409	-0.05	0.407	0.574
	LTE Band 12	10M	QPSK	50	0	Front	5	Full	23095	707.5	21.48	23.00	1.419	0.05	0.543	0.771
29	LTE Band 12	10M	QPSK	1	0	Back	5	Full	23095	707.5	22.61	24.00	1.377	0.05	0.789	1.087
	LTE Band 12	10M	QPSK	25	0	Back	5	Full	23095	707.5	21.51	23.00	1.409	0.05	0.500	0.705
	LTE Band 12	10M	QPSK	50	0	Back	5	Full	23095	707.5	21.48	23.00	1.419	-0.05	0.583	0.827
	LTE Band 12	10M	QPSK	1	0	Left Side	5	Full	23095	707.5	22.61	24.00	1.377	0.03	0.265	0.365
	LTE Band 12	10M	QPSK	25	0	Left Side	5	Full	23095	707.5	21.51	23.00	1.409	0.03	0.229	0.323
	LTE Band 12	10M	QPSK	1	0	Right Side	5	Full	23095	707.5	22.61	24.00	1.377	0.03	0.415	0.572
	LTE Band 12	10M	QPSK	25	0	Right Side	5	Full	23095	707.5	21.51	23.00	1.409	0.03	0.345	0.486
	LTE Band 12	10M	QPSK	1	0	Bottom Side	5	Full	23095	707.5	22.61	24.00	1.377	0.03	0.560	0.771
	LTE Band 12	10M	QPSK	25	0	Bottom Side	5	Full	23095	707.5	21.51	23.00	1.409	0.09	0.473	0.667
	LTE Band 13	10M	QPSK	1	0	Front	5	Full	23230	782	22.42	24.00	1.439	-0.12	0.315	0.453
	LTE Band 13	10M	QPSK	25	0	Front	5	Full	23230	782	21.31	23.00	1.476	0.04	0.407	0.601
	LTE Band 13	10M	QPSK	1	0	Back	5	Full	23230	782	22.42	24.00	1.439	-0.05	0.411	0.591
30	LTE Band 13	10M	QPSK	25	0	Back	5	Full	23230	782	21.31	23.00	1.476	0.08	0.478	0.705
	LTE Band 13	10M	QPSK	1	0	Left Side	5	Full	23230	782	22.42	24.00	1.439	-0.06	0.129	0.186
	LTE Band 13	10M	QPSK	25	0	Left Side	5	Full	23230	782	21.31	23.00	1.476	0.03	0.138	0.204
	LTE Band 13	10M	QPSK	1	0	Right Side	5	Full	23230	782	22.42	24.00	1.439	0.04	0.289	0.416
	LTE Band 13	10M	QPSK	25	0	Right Side	5	Full	23230	782	21.31	23.00	1.476	0.01	0.365	0.539
	LTE Band 13	10M	QPSK	1	0	Bottom Side	5	Full	23230	782	22.42	24.00	1.439	0.05	0.329	0.473
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5	Full	23230	782	21.31	23.00	1.476	0.05	0.402	0.593
	LTE Band 26	15M	QPSK	1	0	Front	5	Reduced	26865	831.5	20.15	21.50	1.365	0.04	0.710	0.969
	LTE Band 26	15M	QPSK	36	0	Front	5	Reduced	26865	831.5	19.93	21.50	1.435	0.04	0.699	1.003
	LTE Band 26	15M	QPSK	75	0	Front	5	Reduced	26865	831.5	19.92	21.50	1.439	0.06	0.553	0.796
	LTE Band 26	15M	QPSK	1	0	Back	5	Reduced	26865	831.5	20.15	21.50	1.365	0.02	0.849	1.159
	LTE Band 26	15M	QPSK	36	0	Back	5	Reduced	26865	831.5	19.93	21.50	1.435	-0.03	0.833	1.196
31	LTE Band 26	15M	QPSK	75	0	Back	5	Reduced	26865	831.5	19.92	21.50	1.439	-0.06	0.832	1.197
	LTE Band 26	15M	QPSK	1	0	Left Side	5	Reduced	26865	831.5	20.15	21.50	1.365	0.03	0.137	0.187
	LTE Band 26	15M	QPSK	36	0	Left Side	5	Reduced	26865	831.5	19.93	21.50	1.435	0.03	0.129	0.185
	LTE Band 26	15M	QPSK	1	0	Right Side	5	Reduced	26865	831.5	20.15	21.50	1.365	0.02	0.369	0.504
	LTE Band 26	15M	QPSK	36	0	Right Side	5	Reduced	26865	831.5	19.93	21.50	1.435	0.06	0.356	0.511
	LTE Band 26	15M	QPSK	1	0	Bottom Side	5	Reduced	26865	831.5	20.15	21.50	1.365	0.08	0.594	0.811
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5	Reduced	26865	831.5	19.93	21.50	1.435	0.02	0.582	0.835
	LTE Band 26	15M	QPSK	75	0	Bottom Side	5	Reduced	26865	831.5	19.92	21.50	1.439	0.01	0.517	0.744



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	99	Front	5	Reduced	132072	1720	18.27	19.50	1.327	0.05	0.648	0.860
	LTE Band 66	20M	QPSK	1	99	Front	5	Reduced	132322	1745	18.13	19.50	1.371	0.03	0.540	0.740
	LTE Band 66	20M	QPSK	1	99	Front	5	Reduced	132572	1770	18.10	19.50	1.380	0.09	0.504	0.696
	LTE Band 66	20M	QPSK	50	24	Front	5	Reduced	132072	1720	18.13	19.50	1.371	0.05	0.677	0.928
	LTE Band 66	20M	QPSK	50	24	Front	5	Reduced	132322	1745	18.00	19.50	1.413	-0.01	0.574	0.811
	LTE Band 66	20M	QPSK	50	24	Front	5	Reduced	132572	1770	18.11	19.50	1.377	-0.09	0.526	0.724
	LTE Band 66	20M	QPSK	100	0	Front	5	Reduced	132072	1720	18.12	19.50	1.374	0.04	0.617	0.848
	LTE Band 66	20M	QPSK	1	99	Back	5	Reduced	132072	1720	18.27	19.50	1.327	0.08	0.937	1.244
	LTE Band 66	20M	QPSK	1	99	Back	5	Reduced	132322	1745	18.13	19.50	1.371	0.02	0.863	1.183
	LTE Band 66	20M	QPSK	1	99	Back	5	Reduced	132572	1770	18.10	19.50	1.380	0.11	0.755	1.042
32	LTE Band 66	20M	QPSK	50	24	Back	5	Reduced	132072	1720	18.13	19.50	1.371	0.05	0.967	1.326
	LTE Band 66	20M	QPSK	50	24	Back	5	Reduced	132322	1745	18.00	19.50	1.413	-0.06	0.909	1.284
	LTE Band 66	20M	QPSK	50	24	Back	5	Reduced	132572	1770	18.11	19.50	1.377	0.02	0.884	1.217
	LTE Band 66	20M	QPSK	100	0	Back	5	Reduced	132072	1720	18.12	19.50	1.374	-0.01	0.961	1.320
	LTE Band 66	20M	QPSK	1	99	Left Side	5	Reduced	132072	1720	16.68	18.00	1.355	-0.06	0.024	0.032
	LTE Band 66	20M	QPSK	50	24	Left Side	5	Reduced	132072	1720	16.65	18.00	1.365	-0.04	0.025	0.033
	LTE Band 66	20M	QPSK	1	99	Right Side	5	Reduced	132072	1720	16.68	18.00	1.355	-0.03	0.277	0.375
	LTE Band 66	20M	QPSK	50	24	Right Side	5	Reduced	132072	1720	16.65	18.00	1.365	-0.02	0.281	0.383
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5	Reduced	132072	1720	16.68	18.00	1.355	0.01	0.765	1.037
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5	Reduced	132322	1745	16.60	18.00	1.380	0.04	0.742	1.024
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5	Reduced	132572	1770	16.64	18.00	1.368	0.09	0.693	0.948
	LTE Band 66	20M	QPSK	50	24	Bottom Side	5	Reduced	132072	1720	16.65	18.00	1.365	0.05	0.794	1.083
	LTE Band 66	20M	QPSK	50	24	Bottom Side	5	Reduced	132322	1745	16.58	18.00	1.387	0.05	0.800	1.109
	LTE Band 66	20M	QPSK	50	24	Bottom Side	5	Reduced	132572	1770	16.62	18.00	1.374	0.09	0.725	0.996
	LTE Band 66	20M	QPSK	100	0	Bottom Side	5	Reduced	132072	1745	16.66	18.00	1.361	0.03	0.786	1.070
	LTE Band 25	20M	QPSK	1	0	Front	5	Reduced	26590	1905	18.51	20.00	1.409	0.13	0.529	0.746
	LTE Band 25	20M	QPSK	50	50	Front	5	Reduced	26590	1905	18.46	20.00	1.426	-0.01	0.481	0.686
	LTE Band 25	20M	QPSK	1	0	Back	5	Reduced	26590	1905	18.51	20.00	1.409	-0.13	0.937	1.321
	LTE Band 25	20M	QPSK	1	0	Back	5	Reduced	26140	1860	18.20	20.00	1.514	0.05	0.861	1.303
	LTE Band 25	20M	QPSK	1	0	Back	5	Reduced	26340	1880	18.19	20.00	1.517	0.17	0.836	1.268
	LTE Band 25	20M	QPSK	50	50	Back	5	Reduced	26590	1905	18.46	20.00	1.426	0.03	0.811	1.156
	LTE Band 25	20M	QPSK	50	50	Back	5	Reduced	26140	1860	18.12	20.00	1.542	0.07	0.799	1.232
33	LTE Band 25	20M	QPSK	50	50	Back	5	Reduced	26340	1880	18.20	20.00	1.514	0.01	0.901	1.364
	LTE Band 25	20M	QPSK	100	0	Back	5	Reduced	26590	1905	18.33	20.00	1.469	-0.09	0.928	1.363
	LTE Band 25	20M	QPSK	1	0	Left Side	5	Reduced	26590	1905	16.98	18.00	1.265	-0.03	0.031	0.040
	LTE Band 25	20M	QPSK	50	50	Left Side	5	Reduced	26590	1905	16.95	18.00	1.274	-0.06	0.031	0.039
	LTE Band 25	20M	QPSK	1	0	Right Side	5	Reduced	26590	1905	16.98	18.00	1.265	-0.03	0.337	0.426
	LTE Band 25	20M	QPSK	50	50	Right Side	5	Reduced	26590	1905	16.95	18.00	1.274	-0.04	0.344	0.438
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5	Reduced	26590	1905	16.98	18.00	1.265	0.04	0.844	1.067
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5	Reduced	26140	1860	16.63	18.00	1.371	0.05	0.787	1.079
	LTE Band 25	20M	QPSK	1	0	Bottom Side	5	Reduced	26340	1880	16.71	18.00	1.346	0.06	0.810	1.090
	LTE Band 25	20M	QPSK	50	50	Bottom Side	5	Reduced	26590	1905	16.95	18.00	1.274	0.06	0.854	1.088
	LTE Band 25	20M	QPSK	50	50	Bottom Side	5	Reduced	26140	1860	16.56	18.00	1.393	0.06	0.788	1.098
	LTE Band 25	20M	QPSK	50	50	Bottom Side	5	Reduced	26340	1880	16.66	18.00	1.361	0.02	0.818	1.114
	LTE Band 25	20M	QPSK	100	0	Bottom Side	5	Reduced	26590	1905	16.83	18.00	1.309	0.01	0.810	1.060



FCC SAR Test Report

Report No. : FA932901-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	21350	2560	18.91	20.00	1.285	0.05	0.851	1.094
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	20850	2510	18.80	20.00	1.318	0.04	0.643	0.848
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	21100	2535	18.76	20.00	1.330	0.07	0.745	0.991
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21350	2560	18.76	20.00	1.330	0.05	0.878	1.168
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	20850	2510	18.74	20.00	1.337	0.06	0.652	0.871
	LTE Band 7	20M	QPSK	50	0	Front	5	Reduced	21100	2535	18.76	20.00	1.330	0.03	0.758	1.008
	LTE Band 7	20M	QPSK	100	0	Front	5	Reduced	21350	2560	18.70	20.00	1.349	0.02	0.892	1.203
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	21350	2560	18.91	20.00	1.285	-0.04	0.953	1.225
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	20850	2510	18.80	20.00	1.318	0.03	0.886	1.168
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	21100	2535	18.76	20.00	1.330	-0.14	0.981	1.305
34	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21350	2560	18.76	20.00	1.330	0.08	0.999	1.329
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	20850	2510	18.74	20.00	1.337	0.03	0.906	1.211
	LTE Band 7	20M	QPSK	50	0	Back	5	Reduced	21100	2535	18.76	20.00	1.330	0.01	0.912	1.213
	LTE Band 7	20M	QPSK	100	0	Back	5	Reduced	21350	2560	18.70	20.00	1.349	0.05	0.892	1.203
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Reduced	21350	2560	13.78	15.00	1.324	0.03	0.132	0.175
	LTE Band 7	20M	QPSK	50	0	Left Side	5	Reduced	21350	2560	13.76	15.00	1.330	0.02	0.129	0.172
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	21350	2560	13.78	15.00	1.324	0.11	0.785	1.040
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	20850	2510	13.73	15.00	1.340	0.07	0.581	0.778
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	21100	2535	13.67	15.00	1.358	0.08	0.684	0.929
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	21350	2560	13.76	15.00	1.330	0.08	0.753	1.002
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	20850	2510	13.70	15.00	1.349	0.07	0.599	0.808
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5	Reduced	21100	2535	13.70	15.00	1.349	0.03	0.694	0.936
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5	Reduced	21350	2560	13.72	15.00	1.343	0.03	0.758	1.018



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	40620	2593	21.06	22.00	1.242	62.9	1.006	0.02	0.776	0.969
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	39750	2506	20.71	22.00	1.346	62.9	1.006	0.05	0.516	0.699
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	40185	2549.5	20.82	22.00	1.312	62.9	1.006	0.04	0.664	0.877
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	41055	2636.5	20.79	22.00	1.321	62.9	1.006	0.07	0.902	1.199
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	41490	2680	20.81	22.00	1.315	62.9	1.006	0.04	0.614	0.812
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	40620	2593	20.95	22.00	1.274	62.9	1.006	0.08	0.931	1.193
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	39750	2506	20.62	22.00	1.374	62.9	1.006	0.05	0.534	0.738
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	40185	2549.5	20.77	22.00	1.327	62.9	1.006	0.06	0.709	0.947
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	41055	2636.5	20.76	22.00	1.330	62.9	1.006	0.04	0.828	1.108
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	41490	2680	20.84	22.00	1.306	62.9	1.006	0.01	0.528	0.694
	LTE Band 41	20M	QPSK	100	0	Front	5	Reduced	40620	2593	20.93	22.00	1.279	62.9	1.006	0.09	0.908	1.169
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	40620	2593	21.06	22.00	1.242	62.9	1.006	0.06	1.040	1.299
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	39750	2506	20.71	22.00	1.346	62.9	1.006	-0.08	0.717	0.971
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	40185	2549.5	20.82	22.00	1.312	62.9	1.006	-0.03	0.856	1.130
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	41055	2636.5	20.79	22.00	1.321	62.9	1.006	0.07	0.928	1.234
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	41490	2680	20.81	22.00	1.315	62.9	1.006	-0.09	0.706	0.934
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	40620	2593	20.95	22.00	1.274	62.9	1.006	-0.09	0.983	1.259
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	39750	2506	20.62	22.00	1.374	62.9	1.006	0.03	0.649	0.897
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	40185	2549.5	20.77	22.00	1.327	62.9	1.006	0.02	0.952	1.271
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	41055	2636.5	20.76	22.00	1.330	62.9	1.006	0.09	0.964	1.290
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	41490	2680	20.84	22.00	1.306	62.9	1.006	-0.14	0.700	0.920
35	LTE Band 41	20M	QPSK	100	0	Back	5	Reduced	40620	2593	20.93	22.00	1.279	62.9	1.006	0.04	1.100	1.416
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Reduced	40620	2593	17.34	18.00	1.164	62.9	1.006	0.02	0.147	0.172
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Reduced	40620	2593	17.28	18.00	1.180	62.9	1.006	0.03	0.153	0.182
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	40620	2593	17.34	18.00	1.164	62.9	1.006	-0.07	0.896	1.049
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	39750	2506	17.12	18.00	1.225	62.9	1.006	0.01	0.544	0.670
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	40185	2549.5	17.09	18.00	1.233	62.9	1.006	0.07	0.862	1.069
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	41055	2636.5	17.22	18.00	1.197	62.9	1.006	0.08	0.703	0.846
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	41490	2680	17.27	18.00	1.183	62.9	1.006	0.08	0.431	0.513
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Reduced	40620	2593	17.28	18.00	1.180	62.9	1.006	0.09	0.884	1.050
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Reduced	39750	2506	16.94	18.00	1.276	62.9	1.006	0.02	0.607	0.779
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Reduced	40185	2549.5	17.04	18.00	1.247	62.9	1.006	0.08	0.791	0.993
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Reduced	41055	2636.5	17.18	18.00	1.208	62.9	1.006	0.05	0.593	0.721
	LTE Band 41	20M	QPSK	50	50	Bottom Side	5	Reduced	41490	2680	17.26	18.00	1.186	62.9	1.006	0.05	0.384	0.458
	LTE Band 41	20M	QPSK	100	0	Bottom Side	5	Reduced	40620	2593	17.20	18.00	1.202	62.9	1.006	0.06	0.903	1.092

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	6	2437	19.32	19.50	1.042	100	1.000	0.01	0.693	0.444	0.463
36	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	6	2437	19.32	19.50	1.042	100	1.000	0.08	1.007	0.829	0.864
	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	1	2412	19.21	19.50	1.069	100	1.000	0.03		0.437	0.467
	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	11	2462	18.91	19.50	1.146	100	1.000	0.09		0.619	0.709
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5	Full	6	2437	19.32	19.50	1.042	100	1.000	0.01	1.070	0.581	0.606
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	Full	6	2437	19.32	19.50	1.042	100	1.000	0.02	0.619	0.391	0.408

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	Full	39	2441	9.58	10.00	1.100	76.64	1.087	-0.01	0.038	0.046
	Bluetooth	1Mbps	Back	5	Full	39	2441	9.58	10.00	1.100	76.64	1.087	-0.07	0.053	0.064
	Bluetooth	1Mbps	Back	5	Full	0	2402	8.61	10.00	1.376	76.64	1.087	0.06	0.047	0.070
37	Bluetooth	1Mbps	Back	5	Full	78	2480	7.34	9.00	1.464	76.64	1.087	-0.08	0.053	0.084
	Bluetooth	1Mbps	Right Side	5	Full	39	2441	9.58	10.00	1.100	76.64	1.087	0.02	0.014	0.017
	Bluetooth	1Mbps	Top Side	5	Full	39	2441	9.58	10.00	1.100	76.64	1.087	0.01	0.039	0.046

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38	WLAN5.2GHz	802.11a 6Mbps	Front	5	Reduced	48	5240	16.31	17.50	1.314	95.63	1.046	-0.04	0.244	0.125	0.172
	WLAN5.2GHz	802.11a 6Mbps	Front	5	Reduced	36	5180	15.23	17.00	1.503	95.63	1.046	0.03		0.069	0.109
	WLAN5.2GHz	802.11a 6Mbps	Front	5	Reduced	40	5200	16.11	17.50	1.377	95.63	1.046	-0.08		0.077	0.111
	WLAN5.2GHz	802.11a 6Mbps	Back	5	Reduced	48	5240	16.31	17.50	1.314	95.63	1.046	-0.03	0.203	0.099	0.136
	WLAN5.2GHz	802.11a 6Mbps	Right Side	5	Reduced	48	5240	16.31	17.50	1.314	95.63	1.046		0.153		
	WLAN5.2GHz	802.11a 6Mbps	Top Side	5	Reduced	48	5240	16.31	17.50	1.314	95.63	1.046		0.082		
	WLAN 5.8GHz	802.11a 6Mbps	Front	5	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046	0.06	0.371	0.146	0.191
	WLAN 5.8GHz	802.11a 6Mbps	Back	5	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046	0.01	0.687	0.330	0.432
	WLAN 5.8GHz	802.11a 6Mbps	Back	5	Reduced	149	5745	15.47	16.50	1.266	95.63	1.046	-0.05		0.389	0.515
39	WLAN 5.8GHz	802.11a 6Mbps	Back	5	Reduced	165	5825	15.48	16.50	1.264	95.63	1.046	-0.05		0.435	0.575
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	5	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046	0.06	0.557	0.272	0.356
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	5	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046		0.198		

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 3 Tx slots	Front	5	-	Reduced	251	848.8	25.77	27.00	1.327	0.08	0.760	1.009
	GSM850	GPRS 3 Tx slots	Front	5	-	Reduced	128	824.2	25.51	27.00	1.409	0.02	0.657	0.926
	GSM850	GPRS 3 Tx slots	Front	5	-	Reduced	189	836.4	25.71	27.00	1.346	0.01	0.873	1.175
	GSM850	GPRS 3 Tx slots	Back	5	-	Reduced	251	848.8	25.77	27.00	1.327	-0.04	1.000	1.327
	GSM850	GPRS 3 Tx slots	Back	5	-	Reduced	128	824.2	25.51	27.00	1.409	0.03	0.905	1.275
40	GSM850	GPRS 3 Tx slots	Back	5	-	Reduced	189	836.4	25.71	27.00	1.346	0.07	1.060	1.427
	GSM850	GPRS 3 Tx slots	Back	5	Headset	Reduced	189	836.4	25.71	27.00	1.346	0.09	0.970	1.305
	GSM1900	GPRS 3 Tx slots	Front	5	-	Reduced	810	1909.8	24.83	26.00	1.309	-0.03	0.716	0.937
	GSM1900	GPRS 3 Tx slots	Front	5	-	Reduced	512	1850.2	24.56	26.00	1.393	-0.03	0.623	0.868
	GSM1900	GPRS 3 Tx slots	Front	5	-	Reduced	661	1880	24.52	26.00	1.406	-0.09	0.635	0.893
	GSM1900	GPRS 3 Tx slots	Back	5	-	Reduced	810	1909.8	24.83	26.00	1.309	-0.02	0.881	1.153
41	GSM1900	GPRS 3 Tx slots	Back	5	-	Reduced	512	1850.2	24.56	26.00	1.393	0.06	0.974	1.357
	GSM1900	GPRS 3 Tx slots	Back	5	-	Reduced	661	1880	24.52	26.00	1.406	-0.01	0.792	1.114
	GSM1900	GPRS 3 Tx slots	Back	5	Headset	Reduced	512	1850.2	24.56	26.00	1.393	0.01	0.811	1.130

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	5	-	Reduced	4233	846.6	19.34	20.50	1.306	0.06	0.658	0.859
	WCDMA V	RMC 12.2Kbps	Front	5	-	Reduced	4132	826.4	19.12	20.50	1.374	0.09	0.531	0.730
	WCDMA V	RMC 12.2Kbps	Front	5	-	Reduced	4182	836.4	19.32	20.50	1.312	0.09	0.513	0.673
42	WCDMA V	RMC 12.2Kbps	Back	5	-	Reduced	4233	846.6	19.34	20.50	1.306	0.04	0.981	1.281
	WCDMA V	RMC 12.2Kbps	Back	5	-	Reduced	4132	826.4	19.12	20.50	1.374	-0.02	0.792	1.088
	WCDMA V	RMC 12.2Kbps	Back	5	-	Reduced	4182	836.4	19.32	20.50	1.312	0.03	0.825	1.083
	WCDMA V	RMC 12.2Kbps	Back	5	Headset	Reduced	4233	846.6	19.34	20.50	1.306	0.07	0.770	1.006
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1312	1712.4	18.55	20.00	1.396	-0.03	0.813	1.135
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1413	1732.6	18.47	20.00	1.422	-0.09	0.806	1.146
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1513	1752.6	18.52	20.00	1.406	0.02	0.766	1.077
43	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1312	1712.4	18.55	20.00	1.396	-0.01	0.907	1.267
	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1413	1732.6	18.47	20.00	1.422	0.06	0.840	1.195
	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1513	1752.6	18.52	20.00	1.406	-0.07	0.850	1.195
	WCDMA IV	RMC 12.2Kbps	Back	5	Headset	Reduced	1312	1712.4	18.55	20.00	1.396	-0.09	0.900	1.257
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9262	1852.4	18.40	19.50	1.288	-0.05	0.661	0.852
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9400	1880	18.39	19.50	1.291	0.07	0.510	0.659
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9538	1907.6	18.36	19.50	1.300	0.06	0.521	0.677
	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9262	1852.4	18.40	19.50	1.288	-0.06	0.823	1.060
44	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9400	1880	18.39	19.50	1.291	-0.14	0.978	1.263
	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9538	1907.6	18.36	19.50	1.300	0.04	0.827	1.075
	WCDMA II	RMC 12.2Kbps	Back	5	Headset	Reduced	9400	1880	18.39	19.50	1.291	-0.09	0.822	1.061



<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RC3 SO32	Front	5	-	Reduced	476	817.9	21.86	23.00	1.300	-0.02	0.867	1.127
	CDMA2000 BC10	RC3 SO32	Front	5	-	Reduced	580	820.5	21.79	23.00	1.321	0.01	0.886	1.171
	CDMA2000 BC10	RC3 SO32	Front	5	-	Reduced	684	823.1	21.72	23.00	1.343	-0.02	0.846	1.136
	CDMA2000 BC10	RC3 SO32	Back	5	-	Reduced	476	817.9	21.86	23.00	1.300	0.02	0.992	1.290
	CDMA2000 BC10	RC3 SO32	Back	5	-	Reduced	580	820.5	21.79	23.00	1.321	0.03	0.914	1.208
45	CDMA2000 BC10	RC3 SO32	Back	5	-	Reduced	684	823.1	21.72	23.00	1.343	0.04	1.000	1.343
	CDMA2000 BC10	RC3 SO32	Back	5	Headset	Reduced	684	823.1	21.72	23.00	1.343	-0.03	0.715	0.960
	CDMA2000 BC0	RC3 SO32	Front	5	-	Reduced	1013	824.7	20.81	22.00	1.315	-0.04	0.759	0.998
	CDMA2000 BC0	RC3 SO32	Front	5	-	Reduced	384	836.52	20.68	22.00	1.355	-0.01	0.799	1.083
	CDMA2000 BC0	RC3 SO32	Front	5	-	Reduced	777	848.31	20.61	22.00	1.377	-0.06	0.806	1.110
	CDMA2000 BC0	RC3 SO32	Back	5	-	Reduced	1013	824.7	20.81	22.00	1.315	0.05	0.850	1.118
46	CDMA2000 BC0	RC3 SO32	Back	5	-	Reduced	384	836.52	20.68	22.00	1.355	0.14	0.964	1.306
	CDMA2000 BC0	RC3 SO32	Back	5	-	Reduced	777	848.31	20.61	22.00	1.377	0.01	0.916	1.262
	CDMA2000 BC0	RC3 SO32	Back	5	Headset	Reduced	384	836.52	20.68	22.00	1.355	0.06	0.901	1.221
	CDMA2000 BC1	RC3 SO32	Front	5	-	Reduced	25	1851.25	19.79	20.50	1.178	-0.18	0.750	0.883
	CDMA2000 BC1	RC3 SO32	Front	5	-	Reduced	600	1880	19.76	20.50	1.186	0.03	0.722	0.856
	CDMA2000 BC1	RC3 SO32	Front	5	-	Reduced	1175	1908.75	19.68	20.50	1.208	0.03	0.764	0.923
	CDMA2000 BC1	RC3 SO32	Back	5	-	Reduced	25	1851.25	19.79	20.50	1.178	-0.03	1.070	1.260
	CDMA2000 BC1	RC3 SO32	Back	5	-	Reduced	600	1880	19.76	20.50	1.186	-0.01	0.950	1.126
47	CDMA2000 BC1	RC3 SO32	Back	5	-	Reduced	1175	1908.75	19.68	20.50	1.208	0.12	1.140	1.377
	CDMA2000 BC1	RC3 SO32	Back	5	Headset	Reduced	1175	1908.75	19.68	20.50	1.208	0.03	1.080	1.304



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	5	-	Full	23095	707.5	22.61	24.00	1.377	-0.09	0.627	0.864
	LTE Band 12	10M	QPSK	25	0	Front	5	-	Full	23095	707.5	21.51	23.00	1.409	-0.05	0.407	0.574
	LTE Band 12	10M	QPSK	50	0	Front	5	-	Full	23095	707.5	21.48	23.00	1.419	0.05	0.543	0.771
48	LTE Band 12	10M	QPSK	1	0	Back	5	-	Full	23095	707.5	22.61	24.00	1.377	0.05	0.789	1.087
	LTE Band 12	10M	QPSK	25	0	Back	5	-	Full	23095	707.5	21.51	23.00	1.409	0.05	0.500	0.705
	LTE Band 12	10M	QPSK	50	0	Back	5	-	Full	23095	707.5	21.48	23.00	1.419	-0.05	0.583	0.827
	LTE Band 13	10M	QPSK	1	0	Front	5	-	Full	23230	782	22.42	24.00	1.439	-0.12	0.315	0.453
	LTE Band 13	10M	QPSK	25	0	Front	5	-	Full	23230	782	21.31	23.00	1.476	0.04	0.407	0.601
	LTE Band 13	10M	QPSK	1	0	Back	5	-	Full	23230	782	22.42	24.00	1.439	-0.05	0.411	0.591
49	LTE Band 13	10M	QPSK	25	0	Back	5	-	Full	23230	782	21.31	23.00	1.476	0.08	0.478	0.705
	LTE Band 26	15M	QPSK	1	0	Front	5	-	Reduced	26865	831.5	20.15	21.50	1.365	0.04	0.710	0.969
	LTE Band 26	15M	QPSK	36	0	Front	5	-	Reduced	26865	831.5	19.93	21.50	1.435	0.04	0.699	1.003
	LTE Band 26	15M	QPSK	75	0	Front	5	-	Reduced	26865	831.5	19.92	21.50	1.439	0.06	0.553	0.796
	LTE Band 26	15M	QPSK	1	0	Back	5	-	Reduced	26865	831.5	20.15	21.50	1.365	0.02	0.849	1.159
	LTE Band 26	15M	QPSK	36	0	Back	5	-	Reduced	26865	831.5	19.93	21.50	1.435	-0.03	0.833	1.196
50	LTE Band 26	15M	QPSK	75	0	Back	5	-	Reduced	26865	831.5	19.92	21.50	1.439	-0.06	0.832	1.197



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	99	Front	5	-	Reduced	132072	1720	18.27	19.50	1.327	0.05	0.648	0.860
	LTE Band 66	20M	QPSK	1	99	Front	5	-	Reduced	132322	1745	18.13	19.50	1.371	0.03	0.540	0.740
	LTE Band 66	20M	QPSK	1	99	Front	5	-	Reduced	132572	1770	18.10	19.50	1.380	0.09	0.504	0.696
	LTE Band 66	20M	QPSK	50	24	Front	5	-	Reduced	132072	1720	18.13	19.50	1.371	0.05	0.677	0.928
	LTE Band 66	20M	QPSK	50	24	Front	5	-	Reduced	132322	1745	18.00	19.50	1.413	-0.01	0.574	0.811
	LTE Band 66	20M	QPSK	50	24	Front	5	-	Reduced	132572	1770	18.11	19.50	1.377	-0.09	0.526	0.724
	LTE Band 66	20M	QPSK	100	0	Front	5	-	Reduced	132072	1720	18.12	19.50	1.374	0.04	0.617	0.848
	LTE Band 66	20M	QPSK	1	99	Back	5	-	Reduced	132072	1720	18.27	19.50	1.327	0.08	0.937	1.244
	LTE Band 66	20M	QPSK	1	99	Back	5	-	Reduced	132322	1745	18.13	19.50	1.371	0.02	0.863	1.183
	LTE Band 66	20M	QPSK	1	99	Back	5	-	Reduced	132572	1770	18.10	19.50	1.380	0.11	0.755	1.042
51	LTE Band 66	20M	QPSK	50	24	Back	5	-	Reduced	132072	1720	18.13	19.50	1.371	0.05	0.967	1.326
	LTE Band 66	20M	QPSK	50	24	Back	5	-	Reduced	132322	1745	18.00	19.50	1.413	-0.06	0.909	1.284
	LTE Band 66	20M	QPSK	50	24	Back	5	-	Reduced	132572	1770	18.11	19.50	1.377	0.02	0.884	1.217
	LTE Band 66	20M	QPSK	50	24	Back	5	Headset	Reduced	132072	1720	18.13	19.50	1.371	-0.05	0.873	1.197
	LTE Band 66	20M	QPSK	100	0	Back	5	-	Reduced	132072	1720	18.12	19.50	1.374	-0.01	0.961	1.320
	LTE Band 25	20M	QPSK	1	0	Front	5	-	Reduced	26590	1905	18.51	20.00	1.409	0.13	0.529	0.746
	LTE Band 25	20M	QPSK	50	50	Front	5	-	Reduced	26590	1905	18.46	20.00	1.426	-0.01	0.481	0.686
	LTE Band 25	20M	QPSK	1	0	Back	5	-	Reduced	26590	1905	18.51	20.00	1.409	-0.13	0.937	1.321
	LTE Band 25	20M	QPSK	1	0	Back	5	-	Reduced	26140	1860	18.20	20.00	1.514	0.05	0.861	1.303
	LTE Band 25	20M	QPSK	1	0	Back	5	-	Reduced	26340	1880	18.19	20.00	1.517	0.17	0.836	1.268
	LTE Band 25	20M	QPSK	50	50	Back	5	-	Reduced	26590	1905	18.46	20.00	1.426	0.03	0.811	1.156
	LTE Band 25	20M	QPSK	50	50	Back	5	-	Reduced	26140	1860	18.12	20.00	1.542	0.07	0.799	1.232
52	LTE Band 25	20M	QPSK	50	50	Back	5	-	Reduced	26340	1880	18.20	20.00	1.514	0.01	0.901	1.364
	LTE Band 25	20M	QPSK	50	50	Back	5	Headset	Reduced	26340	1880	18.20	20.00	1.514	-0.12	0.796	1.205
	LTE Band 25	20M	QPSK	100	0	Back	5	-	Reduced	26590	1905	18.33	20.00	1.469	-0.09	0.928	1.363
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	21350	2560	18.91	20.00	1.285	0.05	0.851	1.094
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	20850	2510	18.80	20.00	1.318	0.04	0.643	0.848
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	21100	2535	18.76	20.00	1.330	0.07	0.745	0.991
	LTE Band 7	20M	QPSK	50	0	Front	5	-	Reduced	21350	2560	18.76	20.00	1.330	0.05	0.878	1.168
	LTE Band 7	20M	QPSK	50	0	Front	5	-	Reduced	20850	2510	18.74	20.00	1.337	0.06	0.652	0.871
	LTE Band 7	20M	QPSK	50	0	Front	5	-	Reduced	21100	2535	18.76	20.00	1.330	0.03	0.758	1.008
	LTE Band 7	20M	QPSK	100	0	Front	5	-	Reduced	21350	2560	18.70	20.00	1.349	0.02	0.892	1.203
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	21350	2560	18.91	20.00	1.285	-0.04	0.953	1.225
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	20850	2510	18.80	20.00	1.318	0.03	0.886	1.168
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	21100	2535	18.76	20.00	1.330	-0.14	0.981	1.305
53	LTE Band 7	20M	QPSK	50	0	Back	5	-	Reduced	21350	2560	18.76	20.00	1.330	0.08	0.999	1.329
	LTE Band 7	20M	QPSK	50	0	Back	5	-	Reduced	20850	2510	18.74	20.00	1.337	0.03	0.906	1.211
	LTE Band 7	20M	QPSK	50	0	Back	5	-	Reduced	21100	2535	18.76	20.00	1.330	0.01	0.912	1.213
	LTE Band 7	20M	QPSK	100	0	Back	5	-	Reduced	21350	2560	18.70	20.00	1.349	0.05	0.892	1.203
	LTE Band 7	20M	QPSK	50	0	Back	5	Headset	Reduced	21350	2560	18.76	20.00	1.330	-0.04	0.972	1.293



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	40620	2593	21.06	22.00	1.242	62.9	1.006	0.02	0.776	0.969
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	39750	2506	20.71	22.00	1.346	62.9	1.006	0.05	0.516	0.699
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	40185	2549.5	20.82	22.00	1.312	62.9	1.006	0.04	0.664	0.877
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	41055	2636.5	20.79	22.00	1.321	62.9	1.006	0.07	0.902	1.199
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	41490	2680	20.81	22.00	1.315	62.9	1.006	0.04	0.614	0.812
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	40620	2593	20.95	22.00	1.274	62.9	1.006	0.08	0.931	1.193
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	39750	2506	20.62	22.00	1.374	62.9	1.006	0.05	0.534	0.738
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	40185	2549.5	20.77	22.00	1.327	62.9	1.006	0.06	0.709	0.947
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	41055	2636.5	20.76	22.00	1.330	62.9	1.006	0.04	0.828	1.108
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	41490	2680	20.84	22.00	1.306	62.9	1.006	0.01	0.528	0.694
	LTE Band 41	20M	QPSK	100	0	Front	5	-	Reduced	40620	2593	20.93	22.00	1.279	62.9	1.006	0.09	0.908	1.169
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	40620	2593	21.06	22.00	1.242	62.9	1.006	0.06	1.040	1.299
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	39750	2506	20.71	22.00	1.346	62.9	1.006	-0.08	0.717	0.971
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	40185	2549.5	20.82	22.00	1.312	62.9	1.006	-0.03	0.856	1.130
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	41055	2636.5	20.79	22.00	1.321	62.9	1.006	0.07	0.928	1.234
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	41490	2680	20.81	22.00	1.315	62.9	1.006	-0.09	0.706	0.934
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	40620	2593	20.95	22.00	1.274	62.9	1.006	-0.09	0.983	1.259
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	39750	2506	20.62	22.00	1.374	62.9	1.006	0.03	0.649	0.897
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	40185	2549.5	20.77	22.00	1.327	62.9	1.006	0.02	0.952	1.271
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	41055	2636.5	20.76	22.00	1.330	62.9	1.006	0.09	0.964	1.290
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	41490	2680	20.84	22.00	1.306	62.9	1.006	-0.14	0.700	0.920
54	LTE Band 41	20M	QPSK	100	0	Back	5	-	Reduced	40620	2593	20.93	22.00	1.279	62.9	1.006	0.04	1.100	1.416
	LTE Band 41	20M	QPSK	100	0	Back	5	Headset	Reduced	40620	2593	20.93	22.00	1.279	62.9	1.006	0.03	1.020	1.313

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	-	Full	6	2437	19.32	19.50	1.042	100	1.000	0.01	0.693	0.444	0.463
55	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	6	2437	19.32	19.50	1.042	100	1.000	0.08	1.007	0.829	0.864
	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	11	2412	19.21	19.50	1.069	100	1.000	0.03		0.437	0.467
	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	11	2462	18.91	19.50	1.146	100	1.000	0.09		0.619	0.709

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	-	Full	39	2441	9.58	10.00	1.100	76.64	1.087	-0.01	0.038	0.046
	Bluetooth	1Mbps	Back	5	-	Full	39	2441	9.58	10.00	1.100	76.64	1.087	-0.07	0.053	0.064
	Bluetooth	1Mbps	Back	5	-	Full	0	2402	8.61	10.00	1.376	76.64	1.087	0.06	0.047	0.070
56	Bluetooth	1Mbps	Back	5	-	Full	78	2480	7.34	9.00	1.464	76.64	1.087	-0.08	0.053	0.084

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	5	-	Reduced	64	5320	16.47	17.50	1.268	95.63	1.046	0.03	0.485	0.193	0.256
57	WLAN5.3GHz	802.11a 6Mbps	Back	5	-	Reduced	64	5320	16.47	17.50	1.268	95.63	1.046	0.07	0.527	0.265	0.351
	WLAN5.3GHz	802.11a 6Mbps	Back	5	-	Reduced	52	5260	15.98	17.50	1.419	95.63	1.046	-0.07	0.239	0.120	0.178
	WLAN5.3GHz	802.11a 6Mbps	Back	5	-	Reduced	56	5280	16.45	17.50	1.274	95.63	1.046	-0.08		0.154	0.205
	WLAN 5.5GHz	802.11a 6Mbps	Front	5	-	Reduced	116	5580	16.18	17.50	1.354	95.63	1.046	0.01	0.248	0.102	0.144
	WLAN 5.5GHz	802.11a 6Mbps	Back	5	-	Reduced	116	5580	16.18	17.50	1.354	95.63	1.046	-0.09	0.289	0.157	0.222
	WLAN 5.5GHz	802.11a 6Mbps	Back	5	-	Reduced	100	5500	16.10	17.50	1.380	95.63	1.046	0.02		0.152	0.219
58	WLAN 5.5GHz	802.11a 6Mbps	Back	5	-	Reduced	144	5720	15.36	17.00	1.457	95.63	1.046	-0.05		0.273	0.416
	WLAN 5.8GHz	802.11a 6Mbps	Front	5	-	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046	0.06	0.371	0.146	0.191
	WLAN 5.8GHz	802.11a 6Mbps	Back	5	-	Reduced	157	5785	15.52	16.50	1.252	95.63	1.046	0.01	0.687	0.330	0.432
	WLAN 5.8GHz	802.11a 6Mbps	Back	5	-	Reduced	149	5745	15.47	16.50	1.266	95.63	1.046	-0.05		0.389	0.515
59	WLAN 5.8GHz	802.11a 6Mbps	Back	5	-	Reduced	165	5825	15.48	16.50	1.264	95.63	1.046	-0.05		0.435	0.575



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS 3 Tx slots	Front	0	Full	251	848.8	29.06	30.00	1.242	-0.01	1.600	1.987
60	GSM850	GPRS 3 Tx slots	Front	0	Full	128	824.2	28.63	30.00	1.371	0.01	2.370	3.249
	GSM850	GPRS 3 Tx slots	Front	0	Full	189	836.4	28.81	30.00	1.315	0.08	2.130	2.801
	GSM850	GPRS 3 Tx slots	Back	0	Full	251	848.8	29.06	30.00	1.242	0.06	1.350	1.676
	GSM850	GPRS 3 Tx slots	Bottom Side	0	Full	251	848.8	29.06	30.00	1.242	0.09	0.734	0.911
	GSM1900	GPRS 3 Tx slots	Back	0	Full	661	1880	26.07	27.00	1.239	0.01	2.020	2.502
61	GSM1900	GPRS 3 Tx slots	Back	0	Full	512	1850.2	26.01	27.00	1.256	0.04	2.020	2.537
	GSM1900	GPRS 3 Tx slots	Back	0	Full	810	1909.8	26.51	27.00	1.119	0.03	1.860	2.082
	GSM1900	GPRS 3 Tx slots	Bottom Side	0	Full	661	1880	26.07	27.00	1.239	-0.03	1.920	2.378
	GSM1900	GPRS 3 Tx slots	Bottom Side	0	Full	512	1850.2	26.01	27.00	1.256	-0.01	1.770	2.223
	GSM1900	GPRS 3 Tx slots	Bottom Side	0	Full	810	1909.8	26.51	27.00	1.119	-0.01	1.800	2.015

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	0	Full	4233	846.6	22.56	24.00	1.393	0.03	1.380	1.923
	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4233	846.6	22.56	24.00	1.393	0.03	1.940	2.703
	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4132	826.4	22.31	24.00	1.476	0.07	1.780	2.627
62	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4182	836.4	22.46	24.00	1.426	0.04	2.160	3.079
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	0	Full	4233	846.6	22.56	24.00	1.393	-0.15	0.729	1.016
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Reduced	1312	1712.4	19.63	21.00	1.371	-0.09	1.520	2.084
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Reduced	1413	1732.6	19.49	21.00	1.416	0.03	1.530	2.166
	WCDMA Band IV	RMC 12.2Kbps	Front	0	Reduced	1513	1752.6	19.56	21.00	1.393	0.02	1.580	2.201
	WCDMA Band IV	RMC 12.2Kbps	Back	0	Reduced	1312	1712.4	19.63	21.00	1.371	0.01	1.750	2.399
	WCDMA Band IV	RMC 12.2Kbps	Back	0	Reduced	1413	1732.6	19.49	21.00	1.416	0.02	1.800	2.548
63	WCDMA Band IV	RMC 12.2Kbps	Back	0	Reduced	1513	1752.6	19.56	21.00	1.393	0.07	1.850	2.577
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1312	1712.4	19.63	21.00	1.371	0.02	1.830	2.509
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1413	1732.6	19.49	21.00	1.416	-0.05	1.770	2.506
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	19.56	21.00	1.393	-0.01	1.770	2.466
	WCDMA Band II	RMC 12.2Kbps	Front	0	Reduced	9538	1907.6	20.05	21.00	1.245	0.01	1.450	1.805
	WCDMA Band II	RMC 12.2Kbps	Back	0	Reduced	9538	1907.6	20.05	21.00	1.245	0.07	1.810	2.253
	WCDMA Band II	RMC 12.2Kbps	Back	0	Reduced	9262	1852.4	20.04	21.00	1.247	0.09	1.790	2.233
64	WCDMA Band II	RMC 12.2Kbps	Back	0	Reduced	9400	1880	19.88	21.00	1.294	0.06	1.910	2.472
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Reduced	9538	1907.6	20.05	21.00	1.245	0.01	1.440	1.792

<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	CDMA2000 BC10	RTAP 153.6Kbps	Front	0	Full	476	817.9	23.77	25.00	1.327	0.06	1.610	2.137
	CDMA2000 BC10	RTAP 153.6Kbps	Front	0	Full	580	820.5	23.76	25.00	1.330	0.12	1.710	2.275
	CDMA2000 BC10	RTAP 153.6Kbps	Front	0	Full	684	823.1	23.72	25.00	1.343	0.01	1.370	1.840
	CDMA2000 BC10	RTAP 153.6Kbps	Back	0	Full	476	817.9	23.77	25.00	1.327	0.06	1.680	2.230
65	CDMA2000 BC10	RTAP 153.6Kbps	Back	0	Full	580	820.5	23.76	25.00	1.330	0.05	1.710	2.275
	CDMA2000 BC10	RTAP 153.6Kbps	Back	0	Full	684	823.1	23.72	25.00	1.343	0.11	1.500	2.014
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	0	Full	476	817.9	23.77	25.00	1.327	0.06	1.080	1.434
	CDMA2000 BC0	RTAP 153.6Kbps	Front	0	Full	1013	824.7	23.82	25.00	1.312	0.08	1.440	1.890
66	CDMA2000 BC0	RTAP 153.6Kbps	Front	0	Full	384	836.52	23.75	25.00	1.334	0.09	1.620	2.160
	CDMA2000 BC0	RTAP 153.6Kbps	Front	0	Full	777	848.31	23.57	25.00	1.390	-0.03	1.520	2.113
	CDMA2000 BC0	RTAP 153.6Kbps	Back	0	Full	1013	824.7	23.82	25.00	1.312	0.05	1.350	1.771
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	0	Full	1013	824.7	23.82	25.00	1.312	0.04	0.800	1.050
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0	Reduced	25	1851.25	21.49	22.50	1.262	0.12	2.430	3.066
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0	Reduced	600	1880	21.46	22.50	1.271	0.06	2.370	3.011
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0	Reduced	1175	1908.75	21.38	22.50	1.294	0.03	2.230	2.886
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0	Reduced	25	1851.25	21.49	22.50	1.262	0.17	2.450	3.091
67	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0	Reduced	600	1880	21.46	22.50	1.271	0.04	2.560	3.253
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0	Reduced	1175	1908.75	21.38	22.50	1.294	0.12	2.480	3.210



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
68	LTE Band 26	15M	QPSK	1	0	Front	0	Full	26865	831.5	22.86	24.00	1.300	0.05	1.560	2.028
	LTE Band 26	15M	QPSK	36	0	Front	0	Full	26865	831.5	21.93	23.00	1.279	-0.04	1.340	1.714
	LTE Band 26	15M	QPSK	75	0	Front	0	Full	26865	831.5	21.85	23.00	1.303	0.08	1.250	1.629
	LTE Band 26	15M	QPSK	1	0	Back	0	Full	26865	831.5	22.86	24.00	1.300	0.01	1.410	1.833
	LTE Band 26	15M	QPSK	36	0	Back	0	Full	26865	831.5	21.93	23.00	1.279	-0.06	1.190	1.522
	LTE Band 26	15M	QPSK	1	0	Bottom Side	0	Full	26865	831.5	22.86	24.00	1.300	0.05	0.872	1.134
	LTE Band 26	15M	QPSK	36	0	Bottom Side	0	Full	26865	831.5	21.93	23.00	1.279	0.01	0.784	1.003
	LTE Band 66	20M	QPSK	1	99	Front	0	Reduced	132072	1720	20.28	21.50	1.324	0.01	1.540	2.039
	LTE Band 66	20M	QPSK	1	99	Front	0	Reduced	132322	1745	20.16	21.50	1.361	-0.07	1.540	2.097
	LTE Band 66	20M	QPSK	1	99	Front	0	Reduced	132572	1770	20.17	21.50	1.358	-0.05	1.530	2.078
	LTE Band 66	20M	QPSK	50	24	Front	0	Reduced	132072	1720	20.25	21.50	1.334	0.02	1.470	1.960
	LTE Band 66	20M	QPSK	50	24	Front	0	Reduced	132322	1745	20.12	21.50	1.374	0.08	1.540	2.116
	LTE Band 66	20M	QPSK	50	24	Front	0	Reduced	132572	1770	20.23	21.50	1.340	0.02	1.530	2.050
	LTE Band 66	20M	QPSK	100	0	Front	0	Reduced	132072	1720	20.26	21.50	1.330	0.03	1.480	1.969
69	LTE Band 66	20M	QPSK	1	99	Back	0	Reduced	132072	1720	20.28	21.50	1.324	0.05	1.960	2.596
	LTE Band 66	20M	QPSK	1	99	Back	0	Reduced	132322	1745	20.16	21.50	1.361	0.08	1.820	2.478
	LTE Band 66	20M	QPSK	1	99	Back	0	Reduced	132572	1770	20.17	21.50	1.358	-0.02	1.840	2.499
	LTE Band 66	20M	QPSK	50	24	Back	0	Reduced	132072	1720	20.25	21.50	1.334	0.09	1.580	2.107
	LTE Band 66	20M	QPSK	50	24	Back	0	Reduced	132322	1745	20.12	21.50	1.374	0.07	1.650	2.267
	LTE Band 66	20M	QPSK	50	24	Back	0	Reduced	132572	1770	20.23	21.50	1.340	0.01	1.680	2.251
	LTE Band 66	20M	QPSK	100	0	Back	0	Reduced	132072	1720	20.26	21.50	1.330	0.01	1.620	2.155
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0	Reduced	132072	1720	20.28	21.50	1.324	0.03	1.790	2.371
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0	Reduced	132322	1745	20.16	21.50	1.361	0.08	1.760	2.396
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0	Reduced	132572	1770	20.17	21.50	1.358	0.04	1.630	2.214
	LTE Band 66	20M	QPSK	50	24	Bottom Side	0	Reduced	132072	1720	20.25	21.50	1.334	0.08	1.880	2.507
	LTE Band 66	20M	QPSK	50	24	Bottom Side	0	Reduced	132322	1745	20.12	21.50	1.374	0.08	1.760	2.418
	LTE Band 66	20M	QPSK	50	24	Bottom Side	0	Reduced	132572	1770	20.23	21.50	1.340	-0.02	1.680	2.251
	LTE Band 66	20M	QPSK	100	0	Bottom Side	0	Reduced	132072	1720	20.26	21.50	1.330	0.01	1.880	2.501
	LTE Band 25	20M	QPSK	1	0	Back	0	Reduced	26590	1905	20.12	21.00	1.225	0.02	1.880	2.302
	LTE Band 25	20M	QPSK	1	0	Back	0	Reduced	26140	1860	19.73	21.00	1.340	0.16	1.770	2.371
	LTE Band 25	20M	QPSK	1	0	Back	0	Reduced	26340	1880	20.03	21.00	1.250	0.03	1.790	2.238
	LTE Band 25	20M	QPSK	50	50	Back	0	Reduced	26590	1905	20.11	21.00	1.227	0.05	1.810	2.222
	LTE Band 25	20M	QPSK	50	50	Back	0	Reduced	26140	1860	19.71	21.00	1.346	0.02	1.790	2.409
	LTE Band 25	20M	QPSK	50	50	Back	0	Reduced	26340	1880	19.64	21.00	1.368	0.05	1.790	2.448
	LTE Band 25	20M	QPSK	100	0	Back	0	Reduced	26590	1905	20.00	21.00	1.259	-0.02	1.840	2.316
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0	Reduced	26590	1905	20.12	21.00	1.225	0.01	1.990	2.437
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0	Reduced	26140	1860	19.73	21.00	1.340	0.02	1.700	2.277
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0	Reduced	26340	1880	20.03	21.00	1.250	0.09	1.810	2.263
	LTE Band 25	20M	QPSK	50	50	Bottom Side	0	Reduced	26590	1905	20.11	21.00	1.227	0.01	1.880	2.308
	LTE Band 25	20M	QPSK	50	50	Bottom Side	0	Reduced	26140	1860	19.71	21.00	1.346	0.04	1.790	2.409
70	LTE Band 25	20M	QPSK	50	50	Bottom Side	0	Reduced	26340	1880	19.64	21.00	1.368	0.02	1.930	2.640
	LTE Band 25	20M	QPSK	100	0	Bottom Side	0	Reduced	26590	1905	20.00	21.00	1.259	0.03	1.950	2.455



FCC SAR Test Report

Report No. : FA932901-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	21350	2560	18.79	20.00	1.321	0.05	1.820	2.405
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	20850	2510	18.68	20.00	1.355	0.06	1.750	2.372
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	21100	2535	18.64	20.00	1.368	0.01	1.810	2.476
	LTE Band 7	20M	QPSK	50	0	Front	0	Reduced	21350	2560	18.64	20.00	1.368	0.03	1.880	2.571
	LTE Band 7	20M	QPSK	50	0	Front	0	Reduced	20850	2510	18.63	20.00	1.371	0.08	1.830	2.509
	LTE Band 7	20M	QPSK	50	0	Front	0	Reduced	21100	2535	18.64	20.00	1.368	0.06	1.880	2.571
	LTE Band 7	20M	QPSK	100	0	Front	0	Reduced	21350	2560	18.66	20.00	1.361	-0.16	1.860	2.532
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	21350	2560	18.79	20.00	1.321	-0.06	1.980	2.616
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	20850	2510	18.68	20.00	1.355	0.09	1.840	2.494
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	21100	2535	18.64	20.00	1.368	0.07	1.960	2.681
	LTE Band 7	20M	QPSK	50	0	Back	0	Reduced	21350	2560	18.64	20.00	1.368	0.05	2.070	2.831
	LTE Band 7	20M	QPSK	50	0	Back	0	Reduced	20850	2510	18.63	20.00	1.371	0.01	1.920	2.632
	LTE Band 7	20M	QPSK	50	0	Back	0	Reduced	21100	2535	18.64	20.00	1.368	0.03	2.030	2.776
	LTE Band 7	20M	QPSK	100	0	Back	0	Reduced	21350	2560	18.66	20.00	1.361	0.01	2.060	2.805
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	21350	2560	18.79	20.00	1.321	-0.05	2.140	2.828
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	20850	2510	18.68	20.00	1.355	0.07	2.430	3.293
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	21100	2535	18.64	20.00	1.368	0.04	2.340	3.200
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Reduced	21350	2560	18.64	20.00	1.368	0.03	2.160	2.954
71	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Reduced	20850	2510	18.63	20.00	1.371	-0.06	2.500	3.427
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0	Reduced	21100	2535	18.64	20.00	1.368	-0.07	2.340	3.200
	LTE Band 7	20M	QPSK	100	0	Bottom Side	0	Reduced	21350	2560	18.66	20.00	1.361	-0.04	2.120	2.886