


FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2041-3
FCC ID : IHDT56YL3
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Oct. 09, 2019 and testing was started from Nov. 05, 2019 and completed on Nov. 18, 2019. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test 10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2) 10
6. RF Exposure Limits 25
6.1 Uncontrolled Environment 25
6.2 Controlled Environment 25
7. Specific Absorption Rate (SAR) 26
7.1 Introduction 26
7.2 SAR Definition 26
8. System Description and Setup 27
8.1 E-Field Probe 28
8.2 Data Acquisition Electronics (DAE) 28
8.3 Phantom 29
8.4 Device Holder 30
9. Measurement Procedures 31
9.1 Spatial Peak SAR Evaluation 31
9.2 Power Reference Measurement 32
9.3 Area Scan 32
9.4 Zoom Scan 33
9.5 Volume Scan Procedures 33
9.6 Power Drift Monitoring 33
10. Test Equipment List 34
11. System Verification 35
11.1 Tissue Simulating Liquids 35
11.2 Tissue Verification 36
11.3 System Performance Check Results 37
12. RF Exposure Positions 38
12.1 Ear and handset reference point 38
12.2 Definition of the cheek position 39
12.3 Definition of the tilt position 40
12.4 Body Worn Accessory 41
12.5 Product Specific 10g SAR Exposure 42
12.6 Wireless Router 42
13. Conducted RF Output Power (Unit: dBm) 43
14. Antenna Location 109
15. SAR Test Results 110
15.1 Head SAR 113
15.2 Hotspot SAR 116
15.3 Body Worn Accessory SAR 122
15.4 Product specific 10g SAR 126
15.5 Repeated SAR Measurement 130
16. Simultaneous Transmission Analysis 131
16.1 Head Exposure Conditions 132
16.2 Hotspot Exposure Conditions 133
16.3 Body-Worn Accessory Exposure Conditions 135
16.4 SPLSR Evaluation and Analysis 136
17. Supplemental Tuner Tests Results 156
17.1 Supplemental Tuner Head & Body SAR Results 156
18. Uncertainty Assessment 157
19. References 158
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. Supplemental Tuner SAR Results
Appendix D. DASy Calibration Certificate
Appendix E. Test Setup Photos

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2041-3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.23	1.31	1.32	1.58
		GSM1900	<0.10	1.36	1.34	
	WCDMA	Band II	0.15	1.30	1.17	
		Band IV	0.12	1.34	1.27	
		Band V	0.39	1.32	1.37	
	LTE	Band 26	0.21	0.88	0.88	
		Band 5	0.33	1.10	1.10	
		Band 2	0.15	1.40	1.42	
		Band 4	0.14	1.42	1.42	
		Band 7	0.56	1.32	1.32	
	Band 41/ Band 38	0.38	1.28	1.28		
DTS	WLAN	2.4GHz WLAN	1.05	0.99	0.99	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.23	0.12	0.12	1.53
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			
Licensed	GSM	GSM850	1.89			
		GSM1900	3.12			
	WCDMA	Band II	3.06			
		Band IV	3.27			
		Band V	2.44			
	LTE	Band 2	3.54			
		Band 4	3.32			
		Band 7	3.36			
		Band 41/Band 38	3.15			
	Date of Testing:			2019/11/5~2019/11/18		
Remark: This device supports LTE B38 and B41. Since the supported frequency span for LTE B38 falls completely within the supports frequency span for LTE B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B41.						

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2041-3
FCC ID	IHDT56YL3
IMEI Code	SIM1: 359095100021259 SIM2: 359095100021267
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	DVT2
SW Version	QPE30.61
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> 802.11n-HT40 is not supported in 2.4GHz WLAN. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) P-sensor can detect handheld state, GSM1900, WCDMA band II/IV, and LTE band 2/4/7 for front/back/left/bottom sides of product specific 10g SAR condition reduced powers will be active. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV and LTE band 2/4/7/38/41. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900, WCDMA band II/IV, LTE band 2/4, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna 	



location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, and LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.

11. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the WCDMA and LTE modes of WWAN antenna 1. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information on section17.
12. There are two types of EUT, the different between them is one is dual SIM card, and another is single SIM card, since the difference does not affect SAR evaluated, we choose dual SIM card to perform full test.
13. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56YL3																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat13																																																														
CA Support	Supported, Downlink Only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	<p>Yes</p> <ol style="list-style-type: none"> The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) P-sensor can detect handheld state, LTE band 2/4/7 for front/back/left/bottom sides of product specific 10g SAR condition reduced powers will be active. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/7/38/41. 																																																														
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports maximum of 2 carriers in the downlink and uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26990	844	26965	841.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545	40140	2545	40140	2545
LM	40385	2569.5	40390	2570	40395	2570.5	40400	2571	40400	2571	40400	2571
HM	40705	2601.5	40690	2600	40685	2599.5	40670	2598	40670	2598	40670	2598
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645	41140	2645	41140	2645

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or bottom or left side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the proximity sensor is active, GSM1900, WCDMA band II/IV and LTE band 2/4/7/38/41 reduced power will be active for front/ back body worn SAR.
4. P-sensor can detect handheld state, GSM1900, WCDMA band II/IV, and LTE band 2/4/7 for front/back/left/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld SAR.
5. The proximity sensors used to detect the proximity of the user's body at the front, back, left or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

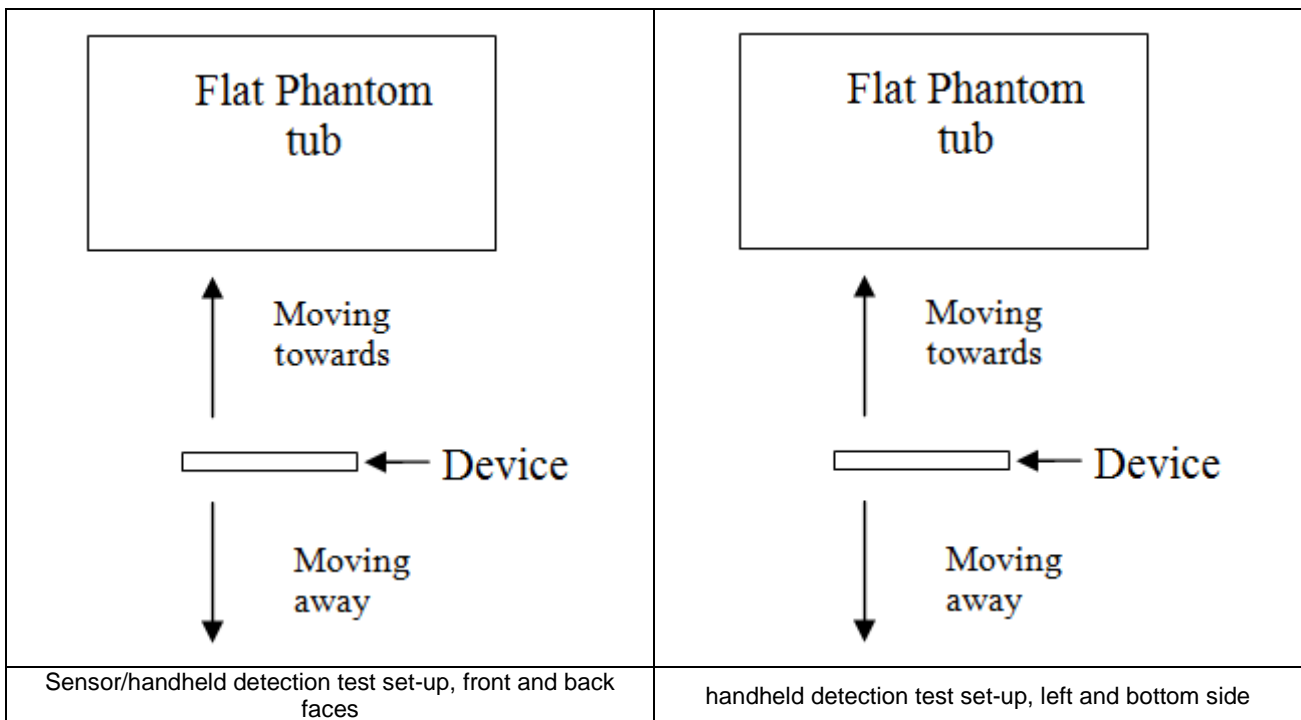




<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	18	18	20

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GPRS1900 2 Tx slots	28.5	23.5	5
WCDMA Band II	24	16	8
WCDMA Band IV	24	16.5	7.5
LTE Band2	24	16.5	7.5
LTE Band4	24	17.5	6.5
LTE Band7	24	20.5	3.5
LTE Band 38	24	21.5	2.5
LTE Band 41	24	21.5	2.5




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	23	21	20	19	18	17	16	15	14	13	12	9	6	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16	16	16	16	16	16	16	16	16
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band 38	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band 41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5

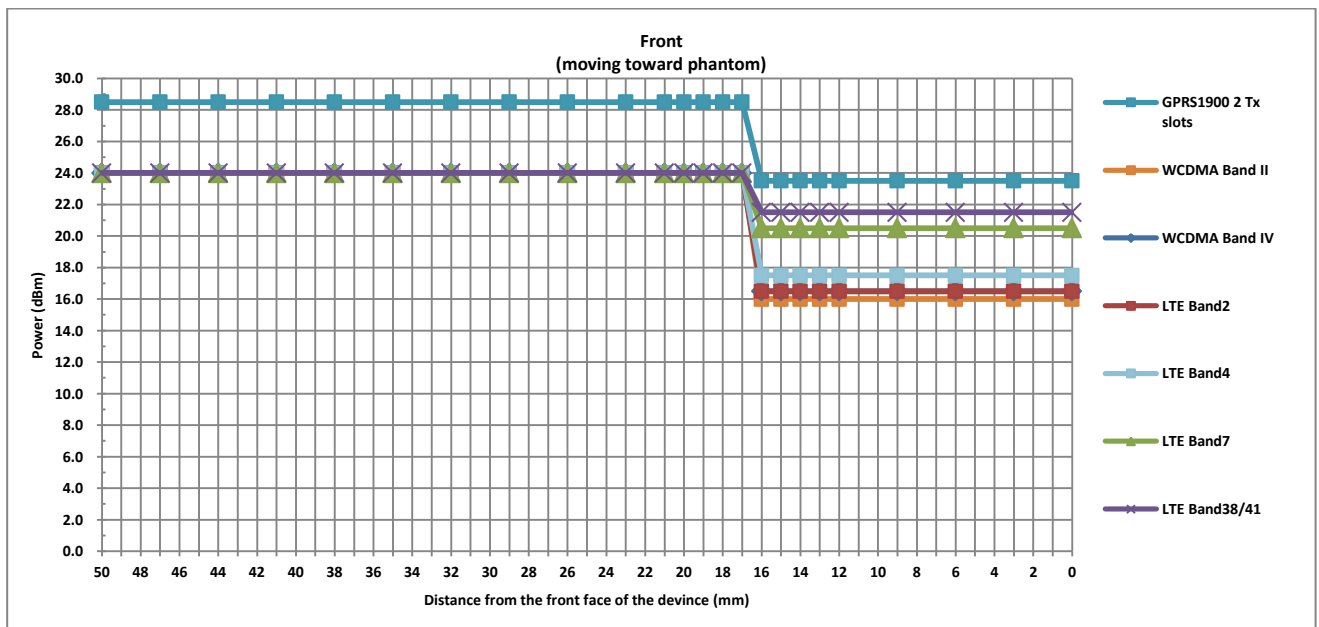




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	23	22	21	20	19	18	17	16	15	14	12	9	6	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16	16	16	16	16	16	16	16	16	16
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band 38	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band 41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5

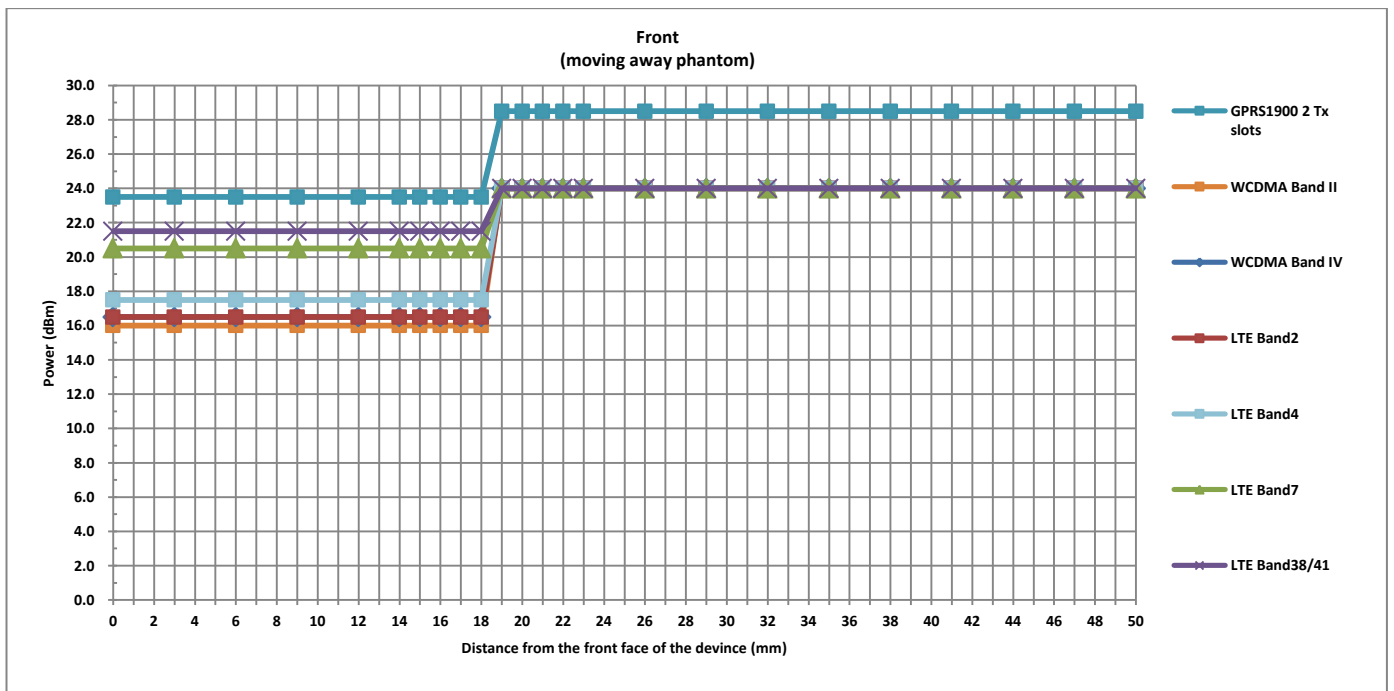

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)


Back																								
Distance	50	47	44	41	38	35	32	29	26	23	22	21	20	19	18	17	16	15	14	11	8	5	2	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16	16	16	16	16	16	16	16	16	16
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band 38	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band 41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5

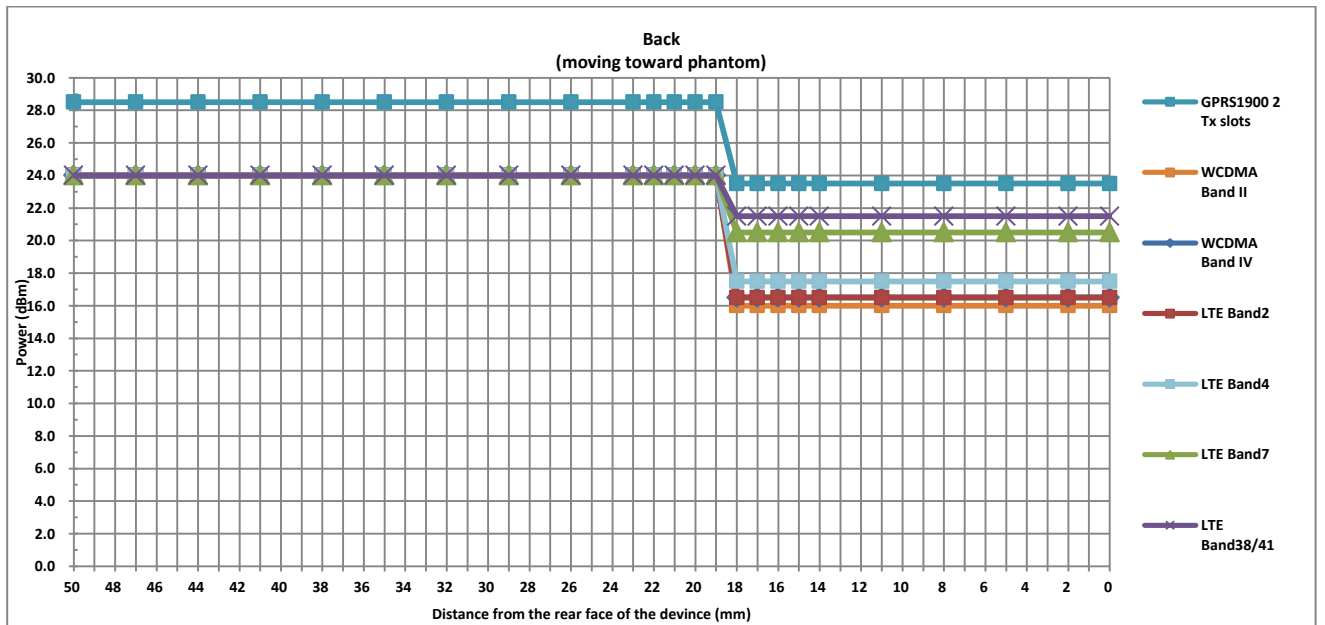



Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Back																									
Distance	50	49	46	43	40	37	34	31	28	25	24	23	22	21	20	19	18	17	16	15	12	9	6	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16	16	16	16	16	16	16	16	16	16	16
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
LTE Band 38	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band 41	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5

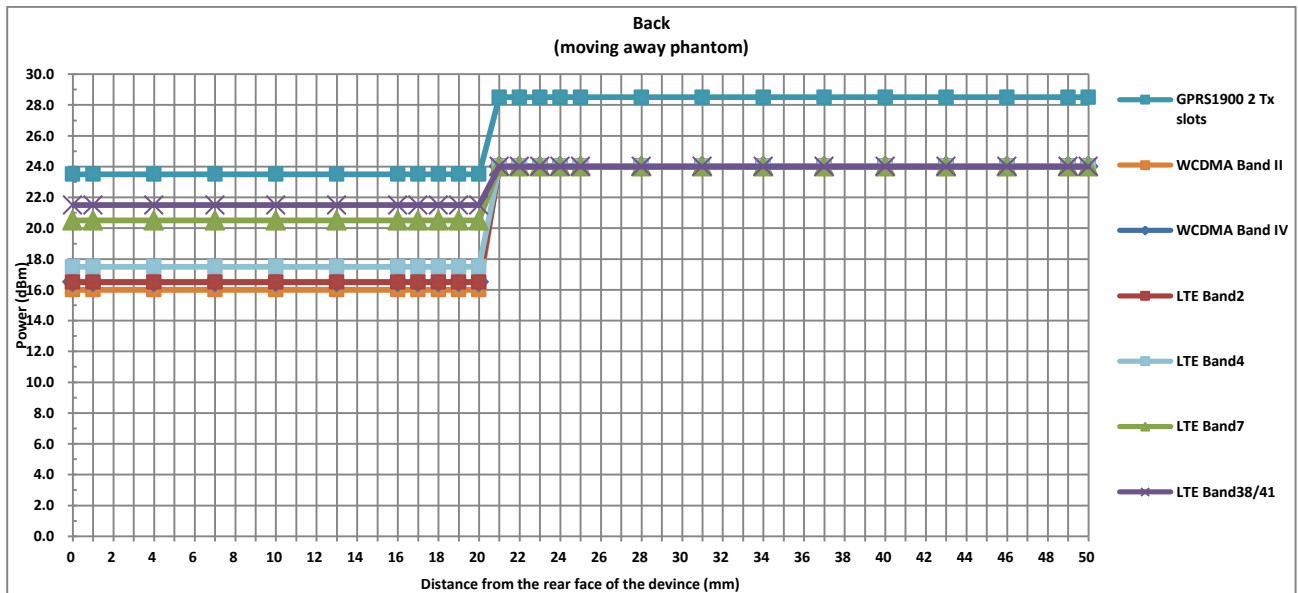


<Handheld>

Handheld Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	8	8	10	8	11	7	9

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	power reduction (dB)
	max. tune up limit (dBm)	max. tune up limit(dBm)	
GPRS1900 2 Tx slots	28.5	27	1.5
WCDMA Band II	24	20.5	3.5
WCDMA Band IV	24	20	4
LTE Band2	24	21.5	2.5
LTE Band4	24	21	3
LTE Band7	24	22.5	1.5




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	11	10	9	8	7	6	5	4	3	2	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5

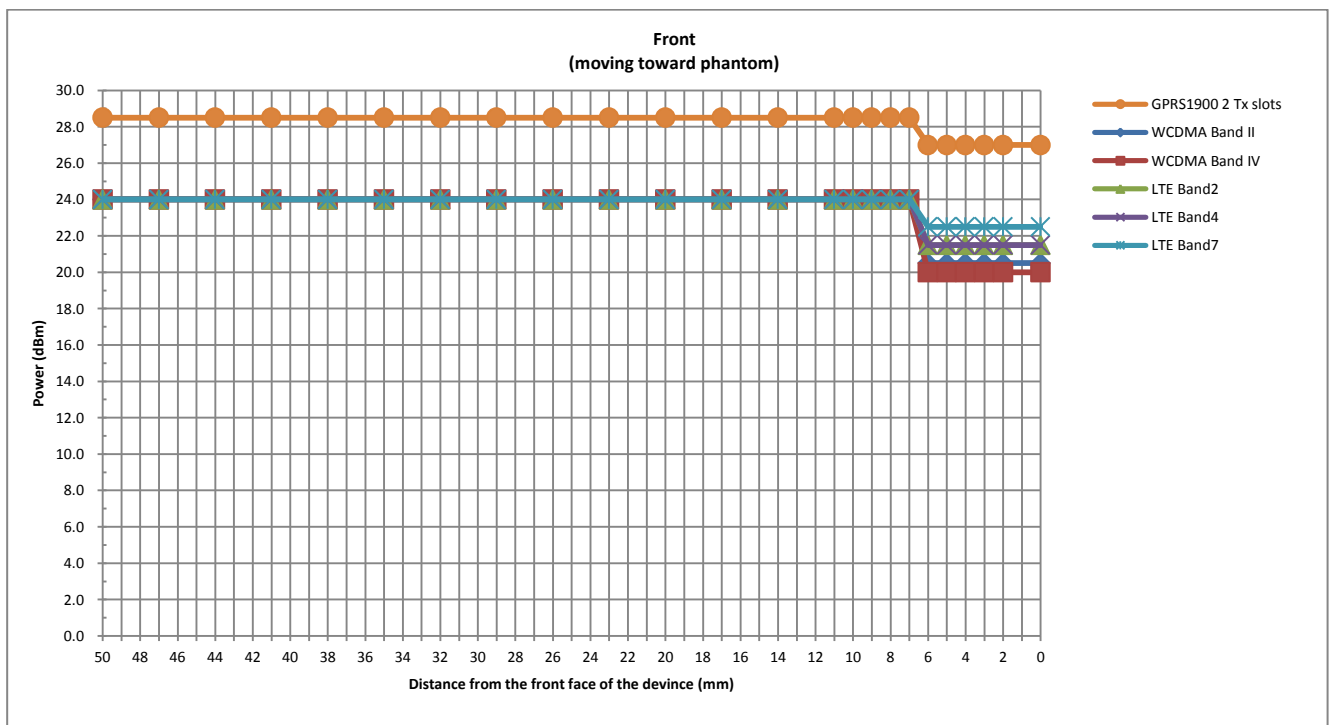




Handheld Triggering Distance (mm) and Triggering Power (dBm)

Front																									
Distance	50	49	46	43	40	37	34	31	28	25	22	19	16	13	12	11	10	9	8	7	6	5	4	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

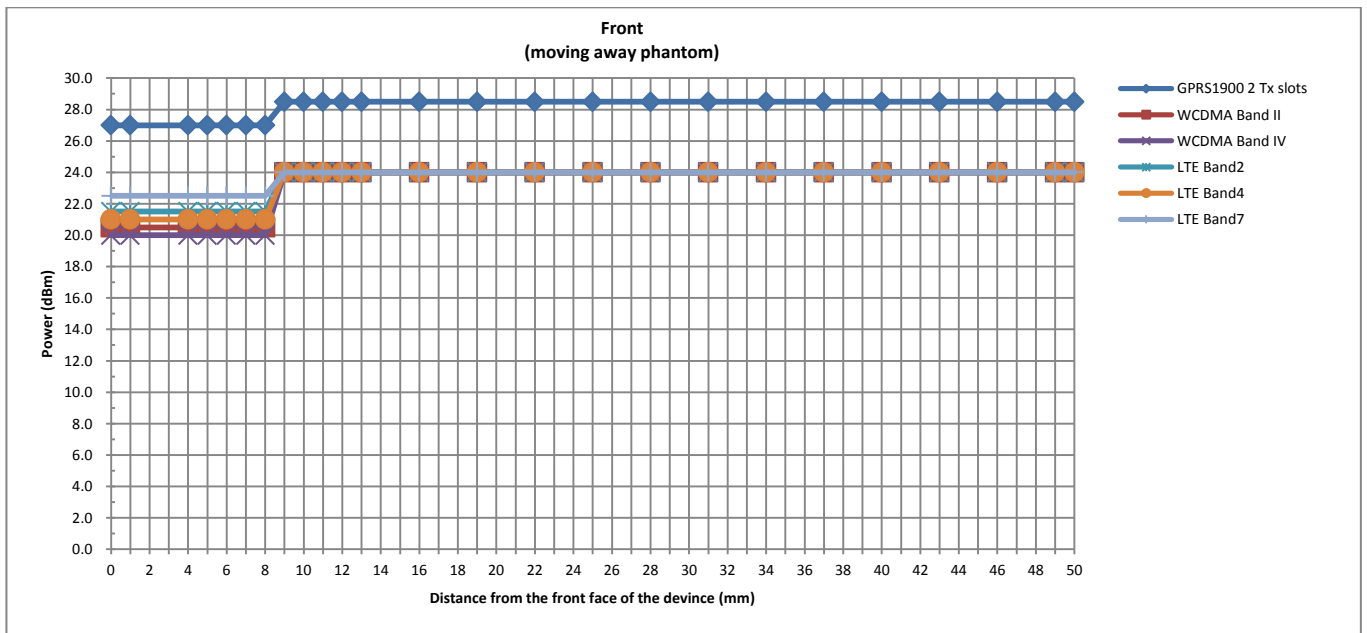




Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Back																									
Distance	50	49	46	43	40	37	34	31	28	25	22	19	16	13	12	11	10	9	8	7	6	5	4	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

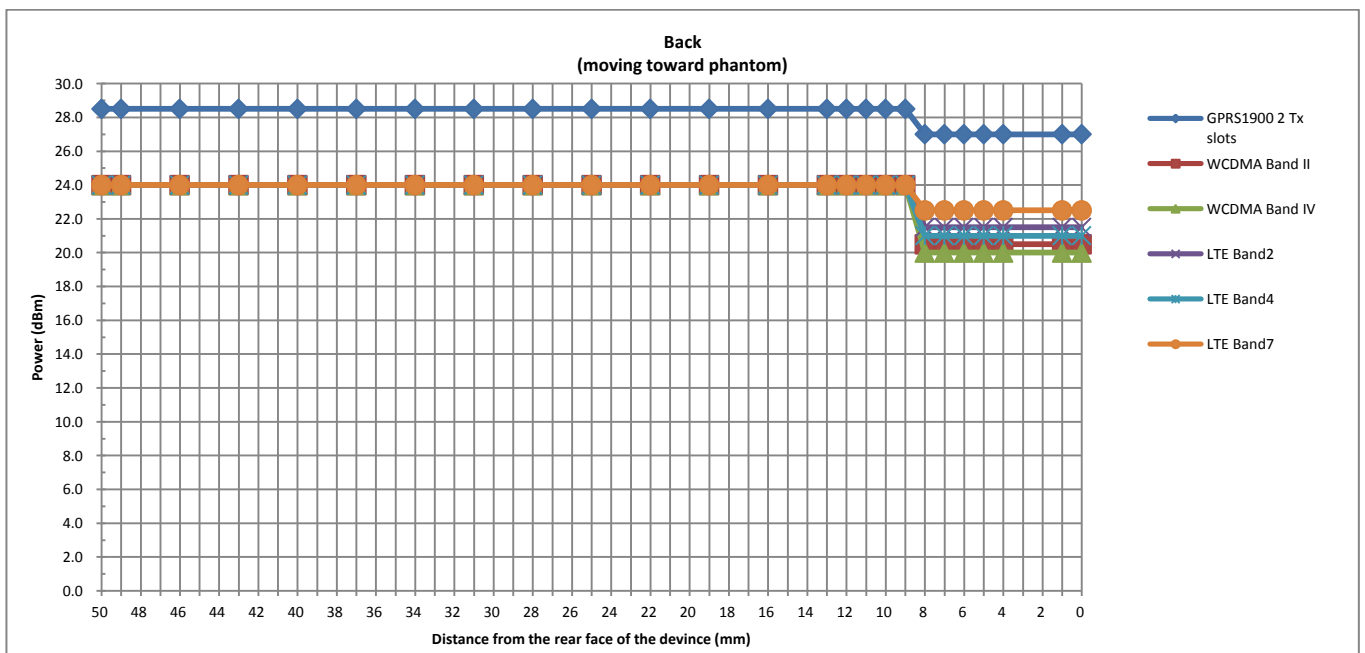

Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Back																								
Distance	50	48	45	42	39	36	33	30	27	24	21	18	15	14	13	12	11	10	9	8	7	6	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

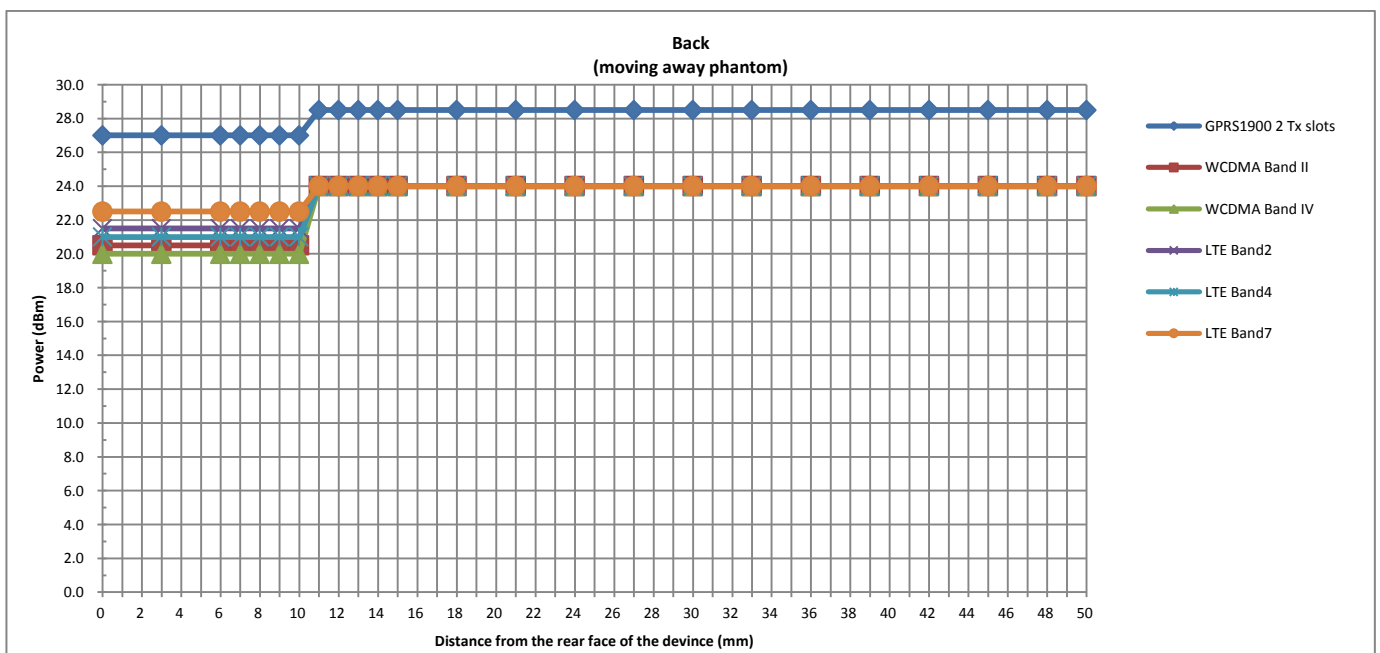




Handheld Triggering Distance (mm) and Triggering Power (dBm)


Left Side

Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	4	1	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

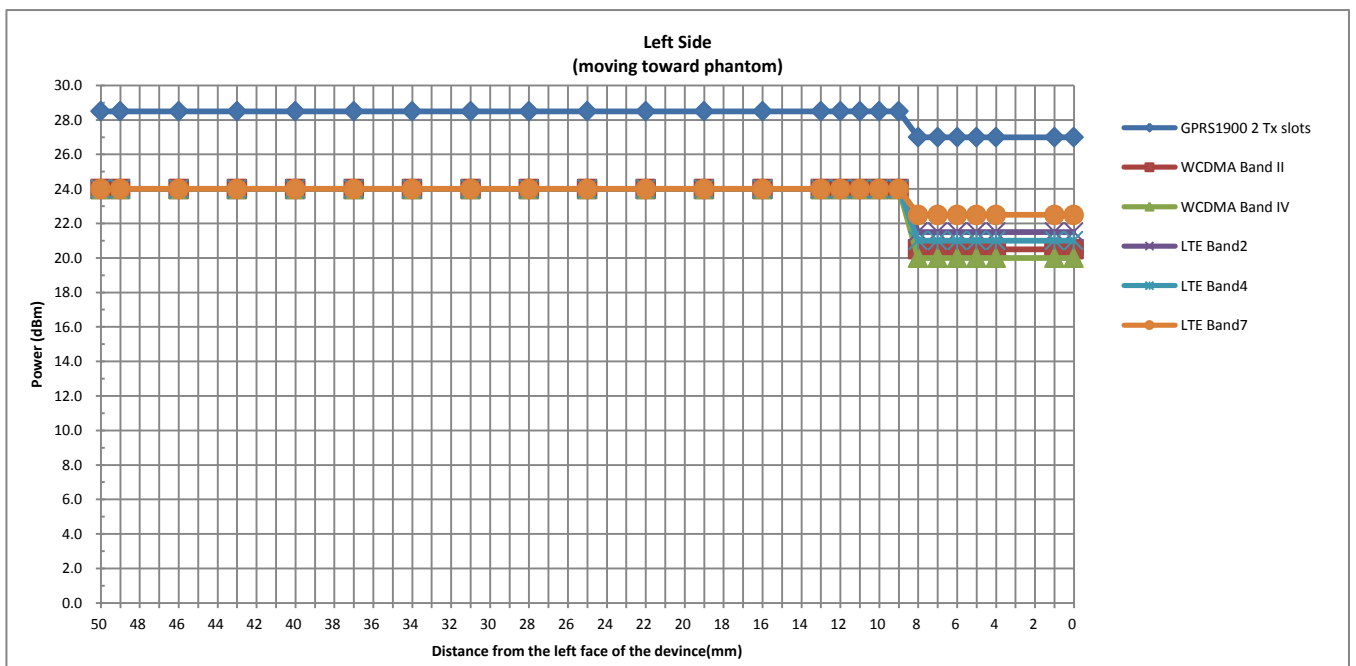




Handheld Triggering Distance (mm) and Triggering Power (dBm)																											
Left Side																											
Distance	50	49	46	43	40	37	34	31	28	25	22	19	16	15	14	13	12	11	10	9	8	7	6	3	0		
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27	27		
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5		
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20	20		
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5		
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21	21		
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5		

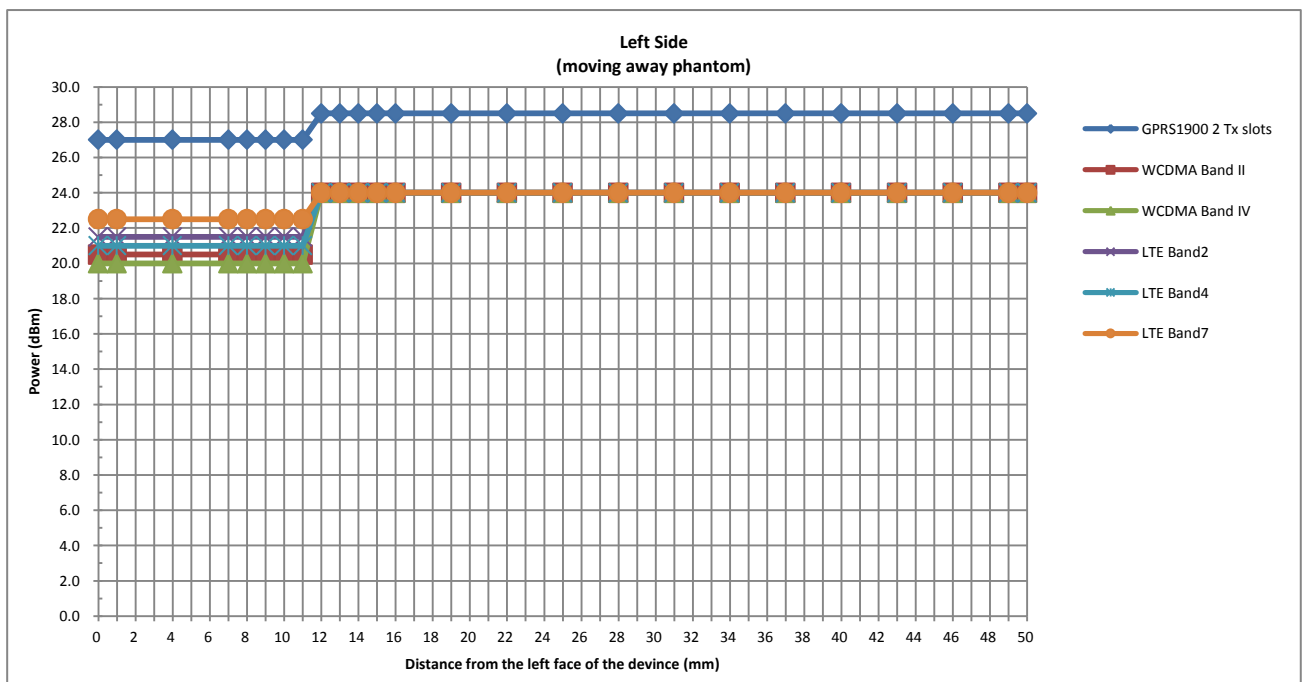


Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	12	11	10	9	8	7	6	5	4	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5

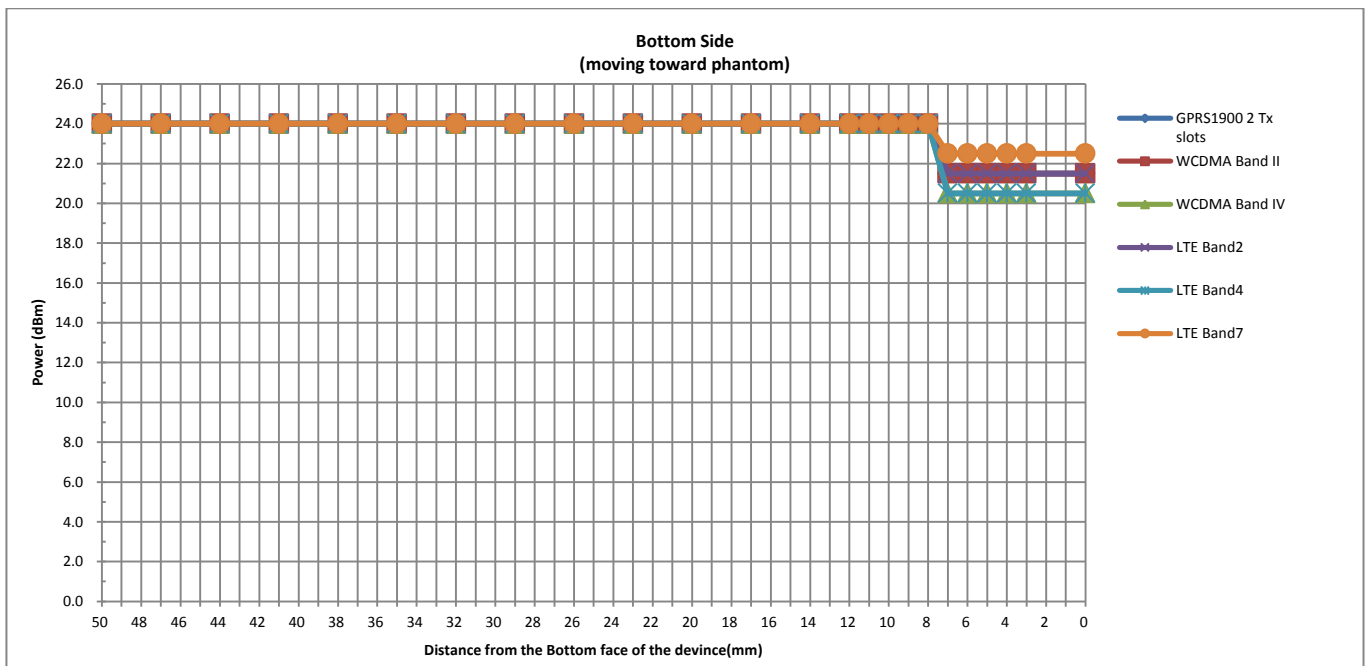



Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	3	0
GPRS1900 2 Tx slots	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	28.5	27	27	27	27	27	27	27
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20.5	20.5	20.5	20.5	20.5	20.5	20.5
WCDMA Band IV	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	20	20	20	20	20	20	20
LTE Band2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5
LTE Band4	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21	21	21	21	21	21	21
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5

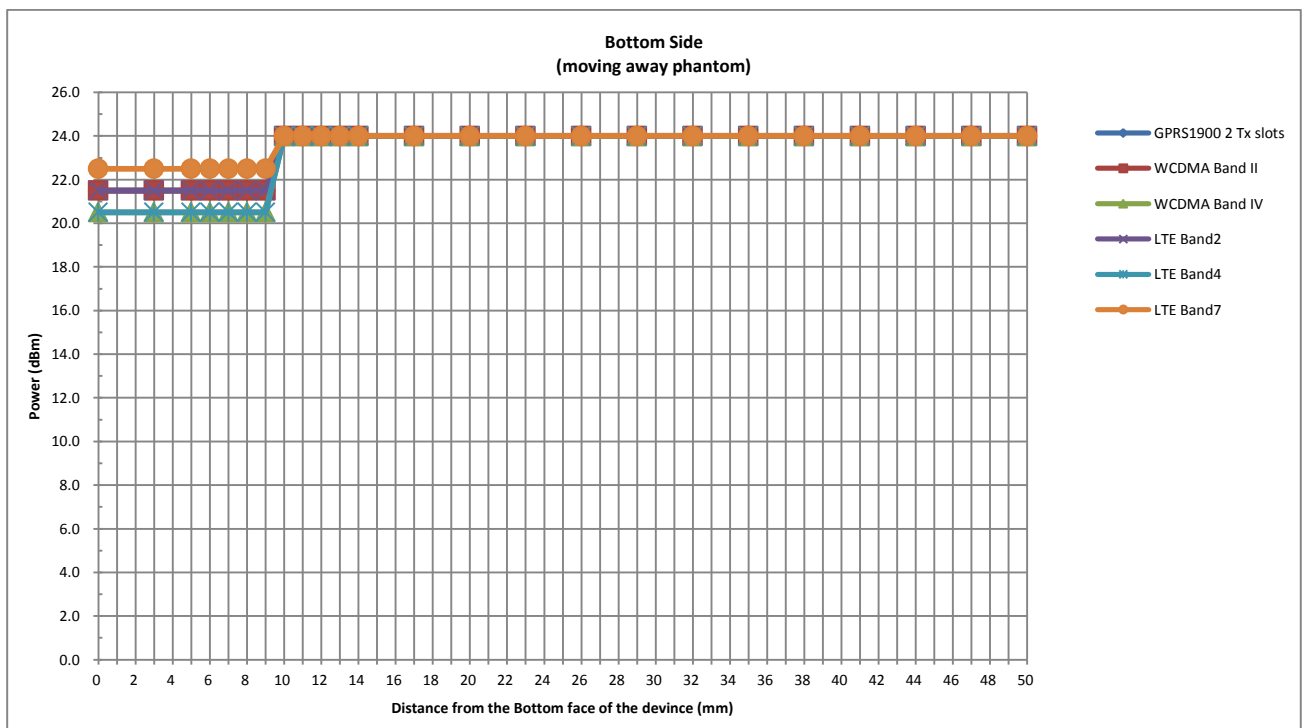

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

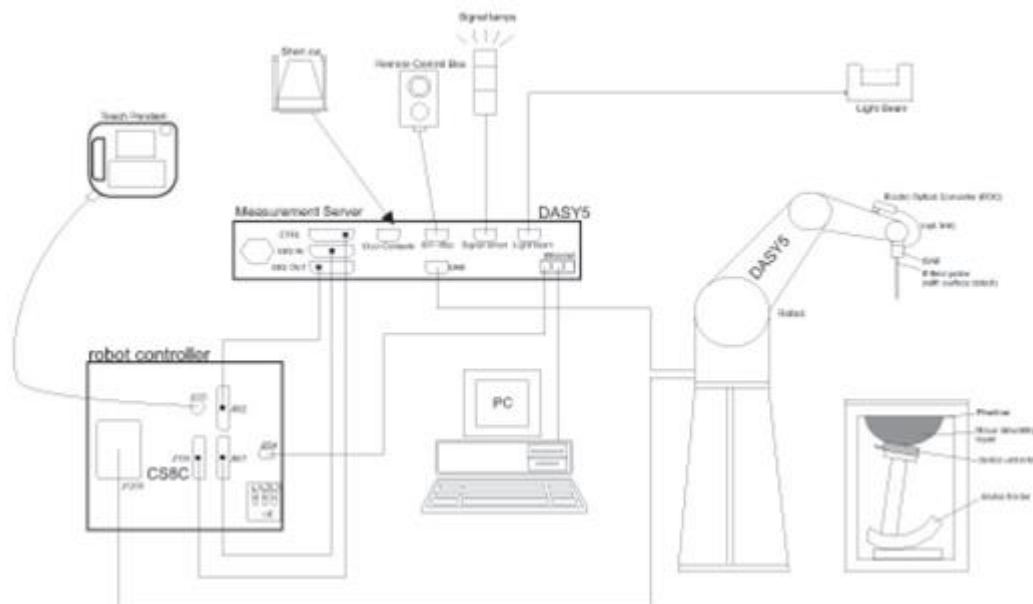


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

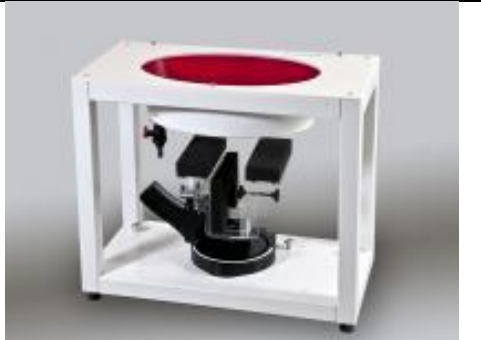Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	Data Acquisition Electronics	DAE4	1358	2019/4/17	2020/4/16
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2019/8/15	2020/8/14
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2019/8/14	2020/8/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2019/8/14	2020/8/13
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332088	2019/1/11	2020/1/10
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/15	2020/8/14
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

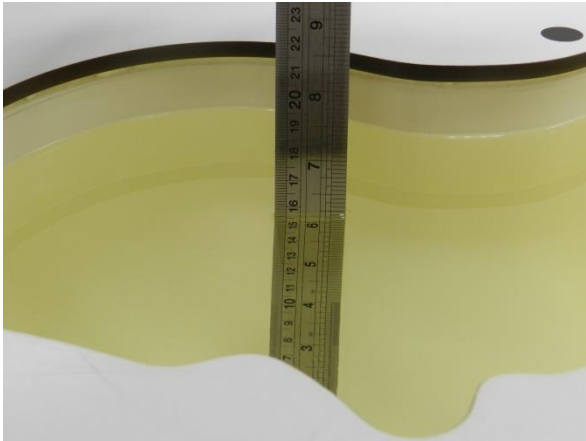


Fig 11.1 Photo of Liquid Height for Head SAR

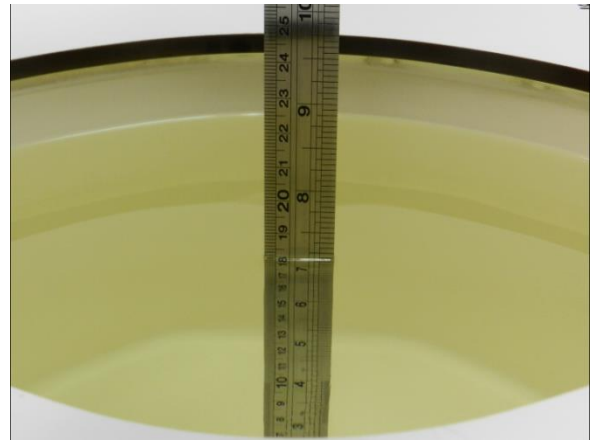


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
835	Head	22.6	0.912	42.072	0.90	41.50	1.33	1.38	±5	2019/11/5
1750	Head	22.7	1.368	41.380	1.37	40.10	-0.15	3.19	±5	2019/11/13
1900	Head	22.8	1.409	39.620	1.40	40.00	0.64	-0.95	±5	2019/11/11
2450	Head	22.8	1.883	38.382	1.80	39.20	4.61	-2.09	±5	2019/11/17
2600	Head	22.7	2.051	37.758	1.96	39.00	4.64	-3.18	±5	2019/11/18

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/11/5	835	Head	250	4d151	3279	1358	2.43	9.30	9.72	4.52
2019/11/13	1750	Head	250	1090	3279	1358	9.87	36.40	39.48	8.46
2019/11/11	1900	Head	250	5d170	3279	1358	9.77	39.00	39.08	0.21
2019/11/17	2450	Head	250	908	3279	1358	13.50	52.80	54	2.27
2019/11/18	2600	Head	250	1061	3279	1358	14.10	57.70	56.4	-2.25

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/11/5	835	Head	250	4d151	3279	1358	1.60	6.16	6.4	3.90
2019/11/13	1750	Head	250	1090	3279	1358	5.23	19.20	20.92	8.96
2019/11/11	1900	Head	250	5d170	3279	1358	5.04	20.30	20.16	-0.69
2019/11/18	2600	Head	250	1061	3279	1358	6.22	25.90	24.88	-3.94

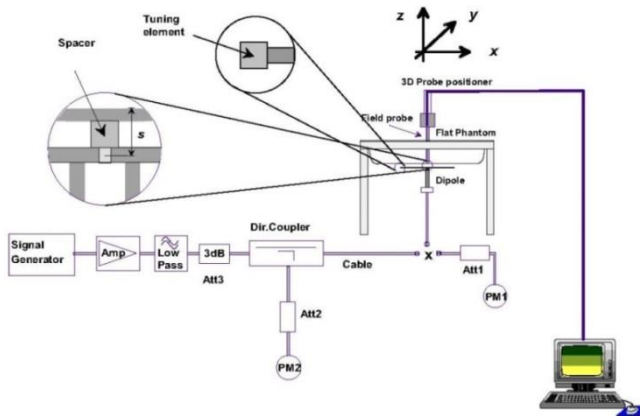


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

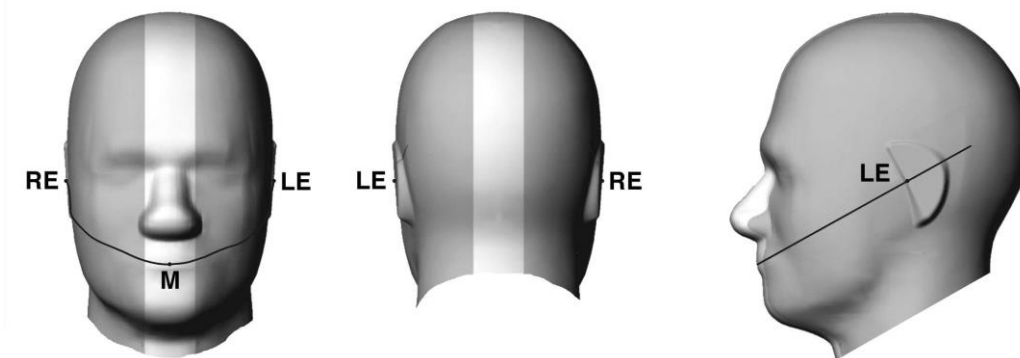


Fig 12.1.1 Front, back, and side views of SAM twin phantom

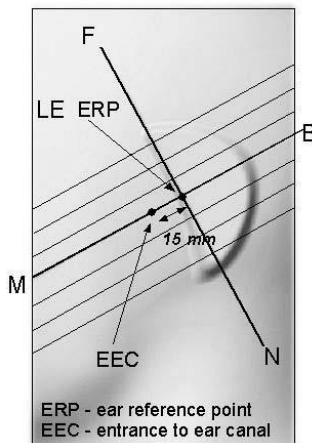


Fig 12.1.2 Close-up side view of phantom showing the ear region.

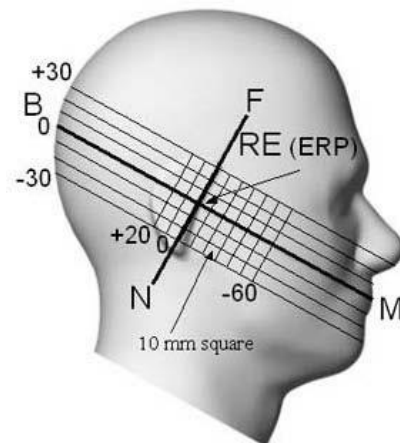


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

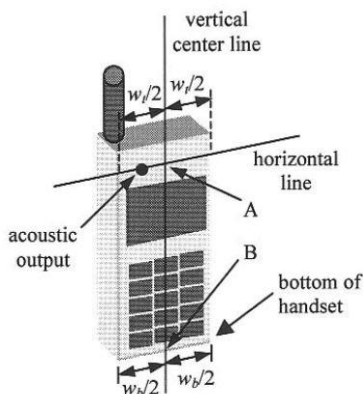


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

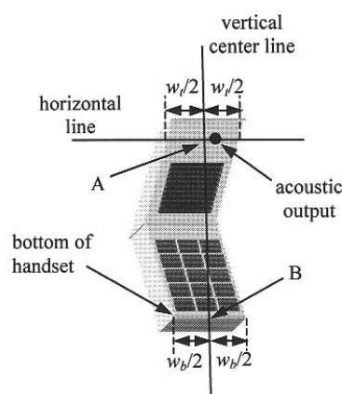


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

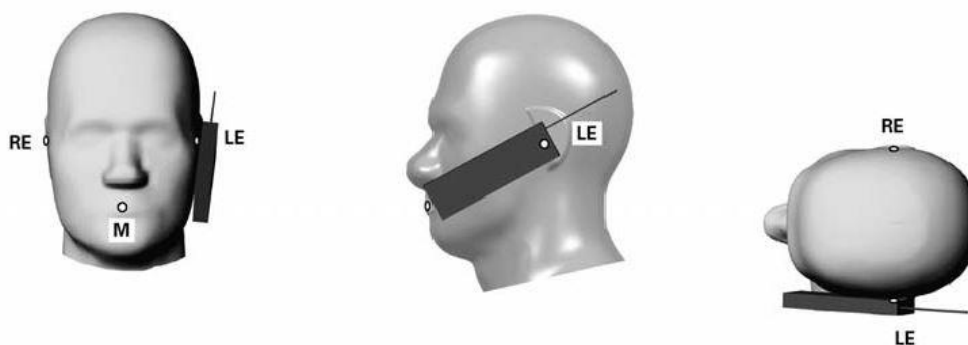


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

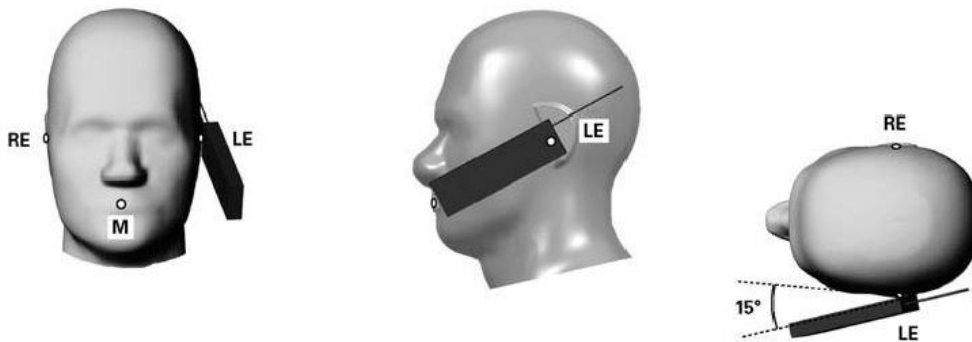


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

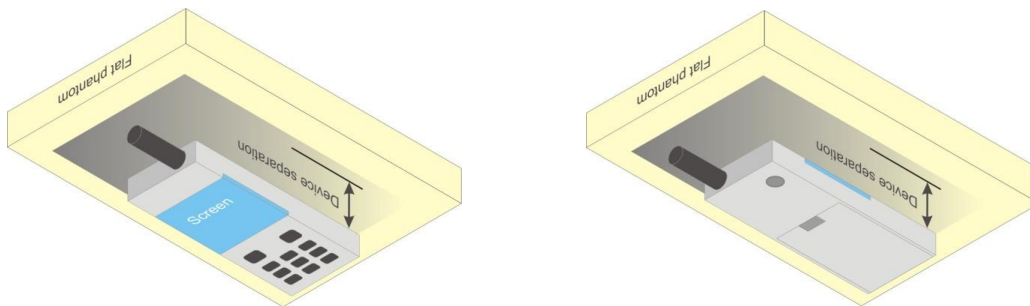


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.89	32.93	32.97	33.50	23.89	23.93	23.97	24.50
GPRS 1 Tx slot	32.88	32.92	32.96	33.50	23.88	23.92	23.96	24.50
GPRS 2 Tx slots	30.71	30.82	30.89	31.50	24.71	24.82	24.89	25.50
GPRS 3 Tx slots	28.56	28.61	28.72	29.50	24.30	24.35	24.46	25.24
GPRS 4 Tx slots	26.30	26.17	26.36	27.50	23.30	23.17	23.36	24.50
EDGE 1 Tx slot	26.27	26.13	26.30	27.00	17.27	17.13	17.30	18.00
EDGE 2 Tx slots	24.28	23.88	24.31	25.50	18.28	17.88	18.31	19.50
EDGE 3 Tx slots	21.90	21.67	21.70	22.50	17.64	17.41	17.44	18.24
EDGE 4 Tx slots	19.90	19.63	19.66	20.50	16.90	16.63	16.66	17.50
GSM1900								
Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.28	29.34	29.22	30.50	20.28	20.34	20.22	21.50
GPRS 1 Tx slot	29.27	29.33	29.21	30.50	20.27	20.33	20.21	21.50
GPRS 2 Tx slots	27.46	27.33	27.33	28.50	21.46	21.33	21.33	22.50
GPRS 3 Tx slots	25.19	25.47	25.43	26.50	20.93	21.21	21.17	22.24
GPRS 4 Tx slots	23.01	23.21	22.89	24.00	20.01	20.21	19.89	21.00
EDGE 1 Tx slot	25.01	24.97	24.60	25.50	16.01	15.97	15.60	16.50
EDGE 2 Tx slots	22.83	22.76	22.70	23.50	16.83	16.76	16.70	17.50
EDGE 3 Tx slots	20.72	20.59	20.68	21.50	16.46	16.33	16.42	17.24
EDGE 4 Tx slots	18.44	18.63	18.51	19.50	15.44	15.63	15.51	16.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor On >

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	24.83	24.82	24.80	25.50	15.83	15.82	15.80	16.50
GPRS 1 Tx slot	24.82	24.81	24.74	25.50	15.82	15.81	15.74	16.50
GPRS 2 Tx slots	22.70	22.61	22.65	23.50	16.70	16.61	16.65	17.50
GPRS 3 Tx slots	20.54	20.43	20.41	21.50	16.28	16.17	16.15	17.24
GPRS 4 Tx slots	18.23	18.19	18.24	19.00	15.23	15.19	15.24	16.00
EDGE 1 Tx slot	20.27	20.15	20.12	20.50	11.27	11.15	11.12	11.50
EDGE 2 Tx slots	18.16	18.05	17.99	18.50	12.16	12.05	11.99	12.50
EDGE 3 Tx slots	16.15	16.10	15.97	16.50	11.89	11.84	11.71	12.24
EDGE 4 Tx slots	14.01	14.04	14.02	14.50	11.01	11.04	11.02	11.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Hotspot On>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	22.21	22.17	22.13	23.50	13.21	13.17	13.13	14.50
GPRS 1 Tx slot	22.22	22.18	22.15	23.50	13.22	13.18	13.15	14.50
GPRS 2 Tx slots	20.17	20.07	20.08	21.50	14.17	14.07	14.08	15.50
GPRS 3 Tx slots	17.87	17.88	18.03	19.50	13.61	13.62	13.77	15.24
GPRS 4 Tx slots	16.00	15.87	15.95	17.00	13.00	12.87	12.95	14.00
EDGE 1 Tx slot	17.82	17.67	17.55	18.50	8.82	8.67	8.55	9.50
EDGE 2 Tx slots	15.67	15.96	15.78	16.50	9.67	9.96	9.78	10.50
EDGE 3 Tx slots	13.87	13.89	13.68	14.50	9.61	9.63	9.42	10.24
EDGE 4 Tx slots	11.71	11.72	11.89	12.50	8.71	8.72	8.89	9.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Handheld On>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.22	28.28	28.20	29.00	19.22	19.28	19.20	20.00
GPRS 1 Tx slot	28.23	28.29	28.21	29.00	19.23	19.29	19.21	20.00
GPRS 2 Tx slots	26.25	26.07	25.96	27.00	20.25	20.07	19.96	21.00
GPRS 3 Tx slots	24.05	24.10	23.83	25.00	19.79	19.84	19.57	20.74
GPRS 4 Tx slots	21.73	21.87	21.59	22.50	18.73	18.87	18.59	19.50
EDGE 1 Tx slot	23.91	23.72	23.59	24.00	14.91	14.72	14.59	15.00
EDGE 2 Tx slots	21.62	21.55	21.44	22.00	15.62	15.55	15.44	16.00
EDGE 3 Tx slots	19.56	19.30	19.40	20.00	15.30	15.04	15.14	15.74
EDGE 4 Tx slots	17.28	17.11	17.09	18.00	14.28	14.11	14.09	15.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

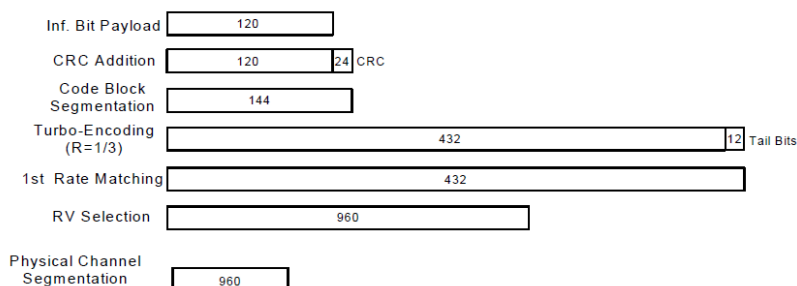


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

<Full Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.62	22.57	22.45	24.00	22.02	22.22	22.27	24.00	22.60	22.63	22.68	24.00
3GPP Rel 99	RMC 12.2Kbps	22.63	22.58	22.46	24.00	22.03	22.24	22.28	24.00	22.62	22.65	22.69	24.00
3GPP Rel 6	HSDPA Subtest-1	21.27	21.16	21.21	23.00	21.25	21.35	21.41	23.00	21.14	21.19	21.23	23.00
3GPP Rel 6	HSDPA Subtest-2	21.25	21.13	21.13	23.00	21.27	21.35	21.42	23.00	21.15	21.16	21.26	23.00
3GPP Rel 6	HSDPA Subtest-3	21.04	20.95	20.76	22.50	20.77	20.86	20.84	22.50	20.62	20.66	20.78	22.50
3GPP Rel 6	HSDPA Subtest-4	21.06	20.96	20.77	22.50	20.74	20.84	20.91	22.50	20.63	20.71	20.44	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.24	21.14	21.17	23.00	21.23	21.31	21.38	23.00	21.10	21.16	21.21	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.20	21.13	21.09	23.00	21.25	21.31	21.37	23.00	21.11	21.14	21.24	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.01	20.93	20.72	22.50	20.75	20.82	20.81	22.50	20.58	20.63	20.76	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.03	20.94	20.71	22.50	20.70	20.80	20.88	22.50	20.59	20.68	20.42	22.50
3GPP Rel 6	HSUPA Subtest-1	21.57	21.51	21.42	23.00	21.14	21.17	21.25	23.00	21.01	21.03	21.07	23.00
3GPP Rel 6	HSUPA Subtest-2	19.53	19.48	19.41	21.00	19.10	19.15	19.24	21.00	18.97	19.02	19.10	21.00
3GPP Rel 6	HSUPA Subtest-3	20.59	20.46	20.45	22.00	20.11	20.12	20.18	22.00	20.01	20.07	20.12	22.00
3GPP Rel 6	HSUPA Subtest-4	19.58	19.49	19.42	21.00	19.16	19.19	19.26	21.00	19.00	19.04	19.10	21.00
3GPP Rel 6	HSUPA Subtest-5	21.59	21.59	21.39	23.00	21.17	21.22	21.29	23.00	21.00	21.05	21.10	23.00

<Reduced Power Mode for P-Sensor On>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	14.92	14.92	14.92	16.00	15.41	15.53	15.62	16.50
3GPP Rel 99	RMC 12.2Kbps	14.94	14.90	14.93	16.00	15.45	15.56	15.65	16.50
3GPP Rel 6	HSDPA Subtest-1	14.04	13.83	13.69	15.00	14.55	14.70	14.72	15.50
3GPP Rel 6	HSDPA Subtest-2	14.03	13.87	13.71	15.00	14.57	14.67	14.75	15.50
3GPP Rel 6	HSDPA Subtest-3	13.58	13.41	13.21	14.50	14.09	14.15	14.23	15.00
3GPP Rel 6	HSDPA Subtest-4	13.56	13.36	13.21	14.50	14.08	14.16	13.88	15.00
3GPP Rel 8	DC-HSDPA Subtest-1	14.02	13.82	13.67	15.00	14.54	14.68	14.70	15.50
3GPP Rel 8	DC-HSDPA Subtest-2	14.01	13.85	13.69	15.00	14.53	14.66	14.73	15.50
3GPP Rel 8	DC-HSDPA Subtest-3	13.57	13.38	13.17	14.50	14.06	14.12	14.21	15.00
3GPP Rel 8	DC-HSDPA Subtest-4	13.54	13.34	13.20	14.50	14.05	14.10	13.86	15.00
3GPP Rel 6	HSUPA Subtest-1	14.04	13.88	13.65	15.00	14.56	14.68	14.76	15.50
3GPP Rel 6	HSUPA Subtest-2	12.04	11.83	11.63	13.00	12.55	12.67	12.73	13.50
3GPP Rel 6	HSUPA Subtest-3	13.06	12.80	12.69	14.00	13.53	13.63	13.72	14.50
3GPP Rel 6	HSUPA Subtest-4	12.06	11.87	11.69	13.00	12.58	12.71	12.75	13.50
3GPP Rel 6	HSUPA Subtest-5	14.00	13.90	13.70	15.00	14.50	14.70	14.70	15.50



<Reduced Power Mode for Hotspot On>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	11.85	11.74	11.60	13.00	12.64	12.74	12.78	14.00
3GPP Rel 99	RMC 12.2Kbps	11.87	11.76	11.61	13.00	12.66	12.76	12.80	14.00
3GPP Rel 6	HSDPA Subtest-1	11.04	10.81	10.63	12.00	11.59	11.70	11.78	13.00
3GPP Rel 6	HSDPA Subtest-2	11.06	10.87	10.69	12.00	11.57	11.69	11.78	13.00
3GPP Rel 6	HSDPA Subtest-3	10.57	10.39	10.19	11.50	11.11	11.18	10.93	12.50
3GPP Rel 6	HSDPA Subtest-4	10.54	10.41	10.20	11.50	11.06	11.20	11.29	12.50
3GPP Rel 8	DC-HSDPA Subtest-1	11.03	10.80	10.62	12.00	11.57	11.67	11.76	13.00
3GPP Rel 8	DC-HSDPA Subtest-2	11.03	10.84	10.67	12.00	11.54	11.66	11.76	13.00
3GPP Rel 8	DC-HSDPA Subtest-3	10.56	10.38	10.16	11.50	11.08	11.16	10.90	12.50
3GPP Rel 8	DC-HSDPA Subtest-4	10.52	10.39	10.18	11.50	11.04	11.17	11.27	12.50
3GPP Rel 6	HSUPA Subtest-1	11.04	10.84	10.68	12.00	11.60	11.72	11.76	13.00
3GPP Rel 6	HSUPA Subtest-2	9.03	8.89	8.68	10.00	9.61	9.75	9.76	11.00
3GPP Rel 6	HSUPA Subtest-3	10.04	9.84	9.65	11.00	10.52	10.68	10.70	12.00
3GPP Rel 6	HSUPA Subtest-4	9.03	8.86	8.65	10.00	9.51	9.66	9.74	11.00
3GPP Rel 6	HSUPA Subtest-5	11.00	10.80	10.70	12.00	11.60	11.70	11.80	13.00


<Reduced Power Mode for Handheld On>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	19.98	19.87	19.75	20.50	18.17	18.36	18.38	20.00
3GPP Rel 99	RMC 12.2Kbps	20.00	19.88	19.78	20.50	18.20	18.38	18.40	20.00
3GPP Rel 6	HSDPA Subtest-1	19.04	18.87	18.63	19.50	17.32	17.49	17.55	19.00
3GPP Rel 6	HSDPA Subtest-2	19.08	18.88	18.69	19.50	17.34	17.49	17.55	19.00
3GPP Rel 6	HSDPA Subtest-3	18.54	18.38	18.15	19.00	16.86	16.98	17.11	18.50
3GPP Rel 6	HSDPA Subtest-4	18.58	18.40	18.21	19.00	16.82	16.98	17.07	18.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.03	18.86	18.61	19.50	17.30	17.47	17.53	19.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.06	18.85	18.68	19.50	17.31	17.46	17.51	19.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.51	18.36	18.13	19.00	16.82	16.95	17.06	18.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.56	18.38	18.14	19.00	16.80	16.94	17.05	18.50
3GPP Rel 6	HSUPA Subtest-1	19.00	18.85	19.00	19.50	17.34	17.50	17.55	19.00
3GPP Rel 6	HSUPA Subtest-2	17.06	16.89	16.66	17.50	15.35	15.47	15.57	17.00
3GPP Rel 6	HSUPA Subtest-3	18.06	17.86	17.69	18.50	16.32	16.48	16.60	18.00
3GPP Rel 6	HSUPA Subtest-4	17.02	16.88	16.66	17.50	15.33	15.45	15.55	17.00
3GPP Rel 6	HSUPA Subtest-5	19.10	18.90	18.70	19.50	17.40	17.50	17.60	19.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8821C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

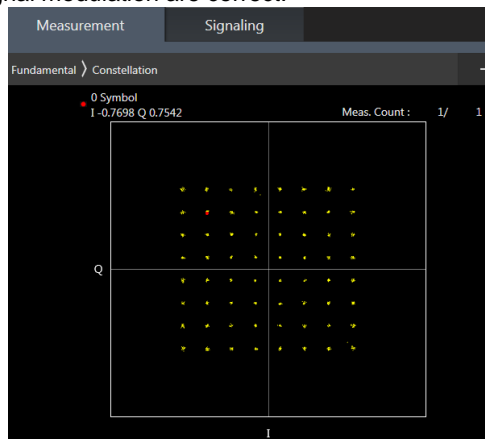

64QAM

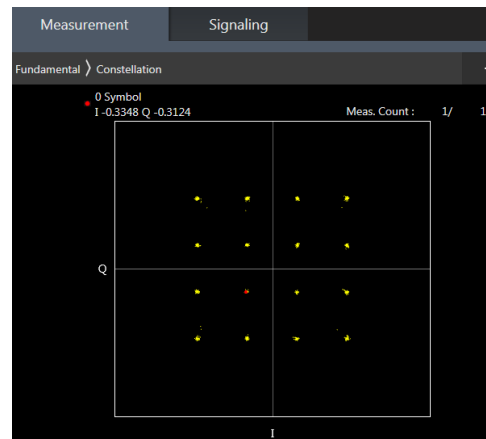

16QAM



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.77	23.03	22.92	24	0
20	QPSK	1	49	22.71	22.73	22.90		
20	QPSK	1	99	22.65	22.65	22.84		
20	QPSK	50	0	21.85	21.83	21.90	23	1
20	QPSK	50	24	21.75	21.96	21.95		
20	QPSK	50	50	21.69	21.86	21.85		
20	QPSK	100	0	21.76	21.75	21.91	23	1
20	16QAM	1	0	22.19	22.14	22.31		
20	16QAM	1	49	22.12	22.11	22.29		
20	16QAM	1	99	21.91	22.05	22.20	22	2
20	16QAM	50	0	20.92	20.98	21.04		
20	16QAM	50	24	20.92	20.93	21.03		
20	16QAM	50	50	20.83	20.84	21.01	22	2
20	16QAM	100	0	20.84	20.87	21.02		
20	64QAM	1	0	21.27	21.26	21.41		
20	64QAM	1	49	21.19	21.22	21.35	22	2
20	64QAM	1	99	20.99	21.14	21.29		
20	64QAM	50	0	20.16	20.14	20.24		
20	64QAM	50	24	20.11	20.12	20.22	21	3
20	64QAM	50	50	20.00	20.02	20.21		
20	64QAM	100	0	20.08	20.10	20.24		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.82	22.78	22.92	24	0
15	QPSK	1	37	22.70	22.70	22.97		
15	QPSK	1	74	22.56	22.61	22.91		
15	QPSK	36	0	21.80	21.80	21.95	23	1
15	QPSK	36	20	21.76	21.80	21.91		
15	QPSK	36	39	21.72	21.70	22.00		
15	QPSK	75	0	21.75	21.74	21.93	23	1
15	16QAM	1	0	22.20	22.18	22.30		
15	16QAM	1	37	22.09	22.10	22.35		
15	16QAM	1	74	21.95	21.99	22.22	22	2
15	16QAM	36	0	20.97	20.97	21.04		
15	16QAM	36	20	20.94	20.92	21.07		
15	16QAM	36	39	20.80	20.86	21.07	22	2
15	16QAM	75	0	20.90	20.90	21.00		
15	64QAM	1	0	21.31	21.26	21.35		
15	64QAM	1	37	21.18	21.19	21.47	22	2
15	64QAM	1	74	21.05	21.09	21.37		
15	64QAM	36	0	20.15	20.16	20.24		
15	64QAM	36	20	20.14	20.13	20.27	21	3
15	64QAM	36	39	20.01	20.06	20.31		
15	64QAM	75	0	20.09	20.11	20.21		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.78	22.75	23.01	24	0
10	QPSK	1	25	22.70	22.70	22.84		
10	QPSK	1	49	22.61	22.62	22.99		
10	QPSK	25	0	21.77	21.75	22.03	23	1
10	QPSK	25	12	21.78	21.78	22.10		
10	QPSK	25	25	21.70	21.70	22.05		
10	QPSK	50	0	21.78	21.75	22.03		
10	16QAM	1	0	22.13	22.10	22.35	23	1
10	16QAM	1	25	22.08	22.13	22.45		
10	16QAM	1	49	21.99	22.05	22.35		
10	16QAM	25	0	20.92	20.90	21.11	22	2
10	16QAM	25	12	20.91	20.89	21.24		
10	16QAM	25	25	20.86	20.85	21.20		
10	16QAM	50	0	20.86	20.87	21.10		
10	64QAM	1	0	21.26	21.26	21.48	22	2
10	64QAM	1	25	21.18	21.23	21.55		
10	64QAM	1	49	21.09	21.10	21.45		
10	64QAM	25	0	20.09	20.09	20.32	21	3
10	64QAM	25	12	20.11	20.11	20.42		
10	64QAM	25	25	20.08	20.07	20.39		
10	64QAM	50	0	20.06	20.08	20.30		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.76	22.74	22.87	24	0
5	QPSK	1	12	22.73	22.71	22.83		
5	QPSK	1	24	22.68	22.69	23.00		
5	QPSK	12	0	21.81	21.80	22.08	23	1
5	QPSK	12	7	21.78	21.79	22.12		
5	QPSK	12	13	21.75	21.73	22.08		
5	QPSK	25	0	21.77	21.74	22.08		
5	16QAM	1	0	22.16	22.11	22.39	23	1
5	16QAM	1	12	22.11	22.08	22.41		
5	16QAM	1	24	22.08	22.06	22.27		
5	16QAM	12	0	20.92	20.90	21.21	22	2
5	16QAM	12	7	20.94	20.90	21.22		
5	16QAM	12	13	20.89	20.89	21.16		
5	16QAM	25	0	20.87	20.85	21.19		
5	64QAM	1	0	21.29	21.19	21.51	22	2
5	64QAM	1	12	21.20	21.24	21.51		
5	64QAM	1	24	21.20	21.16	21.40		
5	64QAM	12	0	20.11	20.09	20.41	21	3
5	64QAM	12	7	20.14	20.08	20.39		
5	64QAM	12	13	20.10	20.08	20.35		
5	64QAM	25	0	20.08	20.04	20.40		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.50	22.50	22.84	24	0
3	QPSK	1	8	22.50	22.49	22.82		
3	QPSK	1	14	22.52	22.48	22.80		
3	QPSK	8	0	21.58	21.55	21.86	23	1
3	QPSK	8	4	21.58	21.58	21.95		
3	QPSK	8	7	21.57	21.54	21.85		
3	QPSK	15	0	21.55	21.56	21.87		
3	16QAM	1	0	21.90	21.86	22.12	23	1
3	16QAM	1	8	21.89	21.88	22.15		
3	16QAM	1	14	21.89	21.86	22.10		
3	16QAM	8	0	20.76	20.73	21.03	22	2
3	16QAM	8	4	20.77	20.77	21.06		
3	16QAM	8	7	20.77	20.73	21.04		
3	16QAM	15	0	20.69	20.70	21.03		
3	64QAM	1	0	20.98	20.96	21.28	22	2
3	64QAM	1	8	21.01	21.03	21.30		
3	64QAM	1	14	21.01	20.99	21.24		
3	64QAM	8	0	19.94	19.91	20.19	21	3
3	64QAM	8	4	19.95	19.97	20.22		
3	64QAM	8	7	19.91	19.90	20.20		
3	64QAM	15	0	19.87	19.89	20.20		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.47	22.44	22.74	24	0
1.4	QPSK	1	3	22.51	22.49	22.83		
1.4	QPSK	1	5	22.44	22.44	22.75		
1.4	QPSK	3	0	22.49	22.45	22.79		
1.4	QPSK	3	1	22.55	22.49	22.82		
1.4	QPSK	3	3	22.48	22.47	22.78		
1.4	QPSK	6	0	21.50	21.47	21.81	23	1
1.4	16QAM	1	0	21.83	21.84	22.07	23	1
1.4	16QAM	1	3	21.94	21.92	22.10		
1.4	16QAM	1	5	21.85	21.81	22.08		
1.4	16QAM	3	0	21.64	21.60	21.86		
1.4	16QAM	3	1	21.67	21.66	21.92		
1.4	16QAM	3	3	21.60	21.59	21.86	22	2
1.4	16QAM	6	0	20.71	20.69	20.97		
1.4	64QAM	1	0	20.93	20.94	21.17	22	2
1.4	64QAM	1	3	20.96	21.02	21.26		
1.4	64QAM	1	5	20.92	20.93	21.20		
1.4	64QAM	3	0	20.87	20.86	21.13		
1.4	64QAM	3	1	20.93	20.93	21.15		
1.4	64QAM	3	3	20.88	20.85	21.08		
1.4	64QAM	6	0	19.85	19.81	20.09	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.09	22.34	22.22	24	0
20	QPSK	1	49	22.02	22.12	22.28		
20	QPSK	1	99	22.10	22.07	22.06		
20	QPSK	50	0	21.03	21.20	21.20	23	1
20	QPSK	50	24	21.00	21.27	21.19		
20	QPSK	50	50	21.02	21.17	21.14		
20	QPSK	100	0	21.00	21.23	21.20	23	1
20	16QAM	1	0	21.50	21.54	21.67		
20	16QAM	1	49	21.41	21.59	21.65		
20	16QAM	1	99	21.38	21.44	21.53	22	2
20	16QAM	50	0	20.17	20.30	20.37		
20	16QAM	50	24	20.17	20.39	20.35		
20	16QAM	50	50	20.17	20.28	20.29	22	2
20	16QAM	100	0	20.13	20.34	20.30		
20	64QAM	1	0	20.56	20.63	20.78		
20	64QAM	1	49	20.50	20.70	20.75	22	2
20	64QAM	1	99	20.44	20.56	20.63		
20	64QAM	50	0	19.37	19.49	19.55		
20	64QAM	50	24	19.36	19.57	19.53	21	3
20	64QAM	50	50	19.37	19.47	19.48		
20	64QAM	100	0	19.33	19.59	19.51		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.11	22.11	22.23	24	0
15	QPSK	1	37	22.00	22.24	22.29		
15	QPSK	1	74	22.13	22.13	22.07		
15	QPSK	36	0	21.08	21.19	21.23	23	1
15	QPSK	36	20	21.05	21.29	21.22		
15	QPSK	36	39	21.10	21.23	21.17		
15	QPSK	75	0	21.06	21.25	21.21	23	1
15	16QAM	1	0	21.47	21.57	21.60		
15	16QAM	1	37	21.41	21.66	21.64		
15	16QAM	1	74	21.34	21.55	21.52	22	2
15	16QAM	36	0	20.20	20.30	20.34		
15	16QAM	36	20	20.20	20.41	20.36		
15	16QAM	36	39	20.13	20.32	20.28	22	2
15	16QAM	75	0	20.16	20.38	20.33		
15	64QAM	1	0	20.66	20.66	20.75		
15	64QAM	1	37	20.54	20.76	20.75	22	2
15	64QAM	1	74	20.42	20.64	20.62		
15	64QAM	36	0	19.41	19.51	19.55		
15	64QAM	36	20	19.40	19.61	19.57	21	3
15	64QAM	36	39	19.32	19.52	19.49		
15	64QAM	75	0	19.35	19.58	19.53		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.00	22.21	22.33	24	0
10	QPSK	1	25	22.13	22.26	22.30		
10	QPSK	1	49	22.12	22.15	22.12		
10	QPSK	25	0	21.32	21.15	21.32	23	1
10	QPSK	25	12	21.01	21.29	21.34		
10	QPSK	25	25	21.34	21.21	21.15		
10	QPSK	50	0	21.13	21.25	21.18		
10	16QAM	1	0	21.42	21.60	21.73	23	1
10	16QAM	1	25	21.38	21.67	21.67		
10	16QAM	1	49	21.24	21.55	21.56		
10	16QAM	25	0	20.08	20.32	20.44	22	2
10	16QAM	25	12	20.10	20.39	20.43		
10	16QAM	25	25	20.03	20.34	20.30		
10	16QAM	50	0	20.04	20.39	20.33		
10	64QAM	1	0	20.52	20.69	20.78	22	2
10	64QAM	1	25	20.43	20.80	20.78		
10	64QAM	1	49	20.34	20.66	20.65		
10	64QAM	25	0	19.29	19.51	19.64	21	3
10	64QAM	25	12	19.32	19.58	19.64		
10	64QAM	25	25	19.24	19.53	19.51		
10	64QAM	50	0	19.22	19.57	19.54		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.13	22.16	22.26	24	0
5	QPSK	1	12	22.13	22.25	22.24		
5	QPSK	1	24	22.32	22.21	22.12		
5	QPSK	12	0	21.00	21.15	21.30	23	1
5	QPSK	12	7	21.13	21.29	21.24		
5	QPSK	12	13	21.12	21.26	21.19		
5	QPSK	25	0	21.32	21.25	21.19		
5	16QAM	1	0	21.37	21.59	21.67	23	1
5	16QAM	1	12	21.30	21.67	21.72		
5	16QAM	1	24	21.26	21.59	21.56		
5	16QAM	12	0	20.10	20.32	20.45	22	2
5	16QAM	12	7	20.32	20.44	20.38		
5	16QAM	12	13	20.06	20.36	20.36		
5	16QAM	25	0	20.07	20.38	20.30		
5	64QAM	1	0	20.50	20.66	20.74	22	2
5	64QAM	1	12	20.32	20.76	20.78		
5	64QAM	1	24	20.38	20.70	20.62		
5	64QAM	12	0	19.29	19.50	19.65	21	3
5	64QAM	12	7	19.19	19.63	19.54		
5	64QAM	12	13	19.27	19.54	19.53		
5	64QAM	25	0	19.28	19.58	19.51		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.03	22.00	22.02	24	0
3	QPSK	1	8	22.27	22.23	22.33		
3	QPSK	1	14	22.20	22.32	22.12		
3	QPSK	8	0	21.04	21.24	21.29	23	1
3	QPSK	8	4	21.42	21.33	21.26		
3	QPSK	8	7	21.29	21.48	21.53		
3	QPSK	15	0	21.38	21.50	21.71		
3	16QAM	1	0	21.14	21.14	21.12	23	1
3	16QAM	1	8	21.09	21.20	21.16		
3	16QAM	1	14	21.59	21.24	21.12		
3	16QAM	8	0	20.55	20.75	20.93	22	2
3	16QAM	8	4	20.55	20.73	20.95		
3	16QAM	8	7	20.45	20.47	20.86		
3	16QAM	15	0	20.11	20.04	20.34		
3	64QAM	1	0	20.52	20.36	20.46	22	2
3	64QAM	1	8	20.66	20.73	20.68		
3	64QAM	1	14	20.46	20.29	20.38		
3	64QAM	8	0	19.52	19.42	19.38	21	3
3	64QAM	8	4	19.43	19.45	19.21		
3	64QAM	8	7	19.39	19.06	19.16		
3	64QAM	15	0	19.40	19.07	19.14		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.01	22.19	22.27	24	0
1.4	QPSK	1	3	22.08	22.23	22.32		
1.4	QPSK	1	5	22.00	22.26	22.21		
1.4	QPSK	3	0	22.05	22.25	22.28		
1.4	QPSK	3	1	22.08	22.21	22.29		
1.4	QPSK	3	3	22.06	22.23	22.30		
1.4	QPSK	6	0	21.00	21.32	21.26	23	1
1.4	16QAM	1	0	21.02	21.24	21.32	23	1
1.4	16QAM	1	3	21.16	21.48	21.41		
1.4	16QAM	1	5	21.11	21.43	21.32		
1.4	16QAM	3	0	21.21	21.08	21.10		
1.4	16QAM	3	1	21.20	21.21	21.11		
1.4	16QAM	3	3	21.18	21.16	21.09		
1.4	16QAM	6	0	20.20	20.15	20.12	22	2
1.4	64QAM	1	0	20.12	20.36	20.45	22	2
1.4	64QAM	1	3	20.25	20.58	20.47		
1.4	64QAM	1	5	20.19	20.47	20.40		
1.4	64QAM	3	0	20.12	20.32	20.34		
1.4	64QAM	3	1	20.14	20.45	20.35		
1.4	64QAM	3	3	20.08	20.36	20.31		
1.4	64QAM	6	0	19.01	19.31	19.25	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.53	22.85	22.69	24	0
10	QPSK	1	25	22.46	22.49	22.78		
10	QPSK	1	49	22.48	22.45	22.67		
10	QPSK	25	0	21.47	21.50	21.60	23	1
10	QPSK	25	12	21.51	21.71	21.70		
10	QPSK	25	25	21.47	21.43	21.68		
10	QPSK	50	0	21.51	21.45	21.58	23	1
10	16QAM	1	0	21.76	21.80	21.97		
10	16QAM	1	25	21.70	21.75	22.00		
10	16QAM	1	49	21.77	21.72	21.91	22	2
10	16QAM	25	0	20.55	20.61	20.73		
10	16QAM	25	12	20.63	20.58	20.80		
10	16QAM	25	25	20.56	20.51	20.76	22	2
10	16QAM	50	0	20.60	20.56	20.70		
10	64QAM	1	0	20.85	20.93	21.03		
10	64QAM	1	25	20.81	20.83	21.08	22	2
10	64QAM	1	49	20.89	20.80	20.97		
10	64QAM	25	0	19.74	19.82	19.94		
10	64QAM	25	12	19.85	19.79	20.01	21	3
10	64QAM	25	25	19.77	19.71	20.00		
10	64QAM	50	0	19.79	19.76	19.89		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.51	22.50	22.84	24	0
5	QPSK	1	12	22.47	22.49	22.79		
5	QPSK	1	24	22.45	22.44	22.77		
5	QPSK	12	0	21.43	21.44	21.76	23	1
5	QPSK	12	7	21.46	21.47	21.76		
5	QPSK	12	13	21.39	21.42	21.69		
5	QPSK	25	0	21.42	21.40	21.73	23	1
5	16QAM	1	0	21.73	21.74	22.08		
5	16QAM	1	12	21.74	21.76	22.09		
5	16QAM	1	24	21.71	21.69	21.93	22	2
5	16QAM	12	0	20.56	20.56	20.86		
5	16QAM	12	7	20.56	20.58	20.88		
5	16QAM	12	13	20.53	20.54	20.81	22	2
5	16QAM	25	0	20.50	20.52	20.81		
5	64QAM	1	0	20.83	20.85	21.22		
5	64QAM	1	12	20.84	20.88	21.18	22	2
5	64QAM	1	24	20.79	20.77	21.08		
5	64QAM	12	0	19.76	19.76	20.05		
5	64QAM	12	7	19.77	19.77	20.07	21	3
5	64QAM	12	13	19.70	19.74	20.01		
5	64QAM	25	0	19.71	19.73	20.02		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.49	22.48	22.80	24	0
3	QPSK	1	8	22.45	22.46	22.80		
3	QPSK	1	14	22.45	22.42	22.74		
3	QPSK	8	0	21.41	21.43	21.73	23	1
3	QPSK	8	4	21.44	21.44	21.72		
3	QPSK	8	7	21.39	21.42	21.69		
3	QPSK	15	0	21.42	21.39	21.71		
3	16QAM	1	0	21.72	21.71	21.99	23	1
3	16QAM	1	8	21.69	21.70	22.04		
3	16QAM	1	14	21.69	21.68	21.96		
3	16QAM	8	0	20.56	20.59	20.84	22	2
3	16QAM	8	4	20.59	20.58	20.90		
3	16QAM	8	7	20.52	20.57	20.87		
3	16QAM	15	0	20.51	20.51	20.81		
3	64QAM	1	0	20.81	20.83	21.12	22	2
3	64QAM	1	8	20.78	20.79	21.14		
3	64QAM	1	14	20.77	20.78	21.09		
3	64QAM	8	0	19.70	19.75	20.01	21	3
3	64QAM	8	4	19.74	19.74	20.07		
3	64QAM	8	7	19.71	19.74	20.04		
3	64QAM	15	0	19.71	19.69	20.02		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.46	22.45	22.74	24	0
1.4	QPSK	1	3	22.52	22.52	22.84		
1.4	QPSK	1	5	22.45	22.42	22.75		
1.4	QPSK	3	0	22.49	22.48	22.81		
1.4	QPSK	3	1	22.54	22.53	22.82		
1.4	QPSK	3	3	22.48	22.48	22.79	23	1
1.4	QPSK	6	0	21.40	21.39	21.70		
1.4	16QAM	1	0	21.68	21.70	21.97	23	1
1.4	16QAM	1	3	21.77	21.75	22.05		
1.4	16QAM	1	5	21.69	21.67	21.95		
1.4	16QAM	3	0	21.47	21.48	21.77		
1.4	16QAM	3	1	21.51	21.50	21.79		
1.4	16QAM	3	3	21.46	21.46	21.75	22	2
1.4	16QAM	6	0	20.57	20.57	20.85		
1.4	64QAM	1	0	20.80	20.81	21.05	22	2
1.4	64QAM	1	3	20.86	20.82	21.13		
1.4	64QAM	1	5	20.78	20.83	21.07		
1.4	64QAM	3	0	20.75	20.75	21.04		
1.4	64QAM	3	1	20.75	20.81	21.06		
1.4	64QAM	3	3	20.75	20.70	21.00		
1.4	64QAM	6	0	19.71	19.69	19.97	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.87	23.25	23.03		
20	QPSK	1	49	23.07	23.13	23.15	24	0
20	QPSK	1	99	23.02	22.99	23.13	23	1
20	QPSK	50	0	22.37	22.47	22.66		
20	QPSK	50	24	22.47	22.71	22.70		
20	QPSK	50	50	22.52	22.61	22.64	23	1
20	QPSK	100	0	22.45	22.67	22.65		
20	16QAM	1	0	22.65	22.62	22.78		
20	16QAM	1	49	22.92	23.00	22.73	23	1
20	16QAM	1	99	22.67	22.64	22.63	22	2
20	16QAM	50	0	21.53	21.51	21.71		
20	16QAM	50	24	21.62	21.62	21.84		
20	16QAM	50	50	21.57	21.60	21.77	22	2
20	16QAM	100	0	21.52	21.57	21.67		
20	64QAM	1	0	21.86	21.72	21.82		
20	64QAM	1	49	21.75	21.78	21.80	22	2
20	64QAM	1	99	21.73	21.74	21.92	21	3
20	64QAM	50	0	20.69	20.81	20.97		
20	64QAM	50	24	20.78	20.85	20.64		
20	64QAM	50	50	20.82	20.91	20.94	21	3
20	64QAM	100	0	20.70	20.76	20.87		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.85	22.99	23.12		
15	QPSK	1	37	22.83	22.95	23.09	24	0
15	QPSK	1	74	22.91	23.09	23.24	23	1
15	QPSK	36	0	22.46	22.54	22.70		
15	QPSK	36	20	22.49	22.58	22.67		
15	QPSK	36	39	22.46	22.59	22.63	23	1
15	QPSK	75	0	22.38	22.56	22.65		
15	16QAM	1	0	22.26	22.65	22.72		
15	16QAM	1	37	22.64	22.66	22.74	23	1
15	16QAM	1	74	22.40	22.52	22.62	22	2
15	16QAM	36	0	21.52	21.63	21.75		
15	16QAM	36	20	21.56	21.72	21.76		
15	16QAM	36	39	21.52	21.66	21.72	22	2
15	16QAM	75	0	21.48	21.65	21.66		
15	64QAM	1	0	21.66	21.80	21.95		
15	64QAM	1	37	21.69	21.81	21.83	22	2
15	64QAM	1	74	21.75	21.82	21.81	21	3
15	64QAM	36	0	20.58	20.75	20.88		
15	64QAM	36	20	20.71	20.76	20.81		
15	64QAM	36	39	20.65	20.72	20.87	21	3
15	64QAM	75	0	20.63	20.77	20.77		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.09	23.01	23.18	24	0
10	QPSK	1	25	23.07	23.06	22.91		
10	QPSK	1	49	22.96	23.21	23.03		
10	QPSK	25	0	22.45	22.47	22.55	23	1
10	QPSK	25	12	22.47	22.53	22.60		
10	QPSK	25	25	22.51	22.53	22.54		
10	QPSK	50	0	22.46	22.46	22.54	23	1
10	16QAM	1	0	22.23	22.65	22.64		
10	16QAM	1	25	22.68	22.65	22.73		
10	16QAM	1	49	22.30	22.42	22.38	22	2
10	16QAM	25	0	21.58	21.51	21.70		
10	16QAM	25	12	21.62	21.59	21.76		
10	16QAM	25	25	21.53	21.59	21.60	22	2
10	16QAM	50	0	21.50	21.57	21.69		
10	64QAM	1	0	21.61	21.65	21.78		
10	64QAM	1	25	21.62	21.93	21.72	22	2
10	64QAM	1	49	21.62	21.57	21.75		
10	64QAM	25	0	20.58	20.65	20.78		
10	64QAM	25	12	20.66	20.78	20.82	21	3
10	64QAM	25	25	20.58	20.76	20.77		
10	64QAM	50	0	20.67	20.67	20.72		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.95	23.03	23.01	24	0
5	QPSK	1	12	22.96	23.01	23.06		
5	QPSK	1	24	22.97	23.20	23.14		
5	QPSK	12	0	22.40	22.48	22.43	23	1
5	QPSK	12	7	22.43	22.60	22.53		
5	QPSK	12	13	22.45	22.50	22.58		
5	QPSK	25	0	22.33	22.52	22.50	23	1
5	16QAM	1	0	22.54	22.60	22.55		
5	16QAM	1	12	22.58	22.98	22.82		
5	16QAM	1	24	22.84	22.68	22.72	22	2
5	16QAM	12	0	21.46	21.53	21.53		
5	16QAM	12	7	21.55	21.57	21.69		
5	16QAM	12	13	21.62	21.55	21.60	22	2
5	16QAM	25	0	21.47	21.68	21.67		
5	64QAM	1	0	21.50	21.68	21.71		
5	64QAM	1	12	21.48	21.68	21.78	22	2
5	64QAM	1	24	21.66	21.50	21.74		
5	64QAM	12	0	20.63	20.68	20.65		
5	64QAM	12	7	20.62	20.57	20.66	21	3
5	64QAM	12	13	20.67	20.76	20.71		
5	64QAM	25	0	20.51	20.62	20.70		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.58	21.70	21.89	23	0
15	QPSK	1	37	21.60	21.70	21.91		
15	QPSK	1	74	21.62	21.71	21.90		
15	QPSK	36	0	21.16	21.28	21.34	22	1
15	QPSK	36	20	21.13	21.19	21.41		
15	QPSK	36	39	21.15	21.13	21.37		
15	QPSK	75	0	21.08	21.21	21.40	22	1
15	16QAM	1	0	21.48	21.58	21.74		
15	16QAM	1	37	21.48	21.56	21.78		
15	16QAM	1	74	21.49	21.57	21.73	21	2
15	16QAM	36	0	20.24	20.35	20.45		
15	16QAM	36	20	20.22	20.37	20.58		
15	16QAM	36	39	20.27	20.32	20.48	21	2
15	16QAM	75	0	20.22	20.34	20.54		
15	64QAM	1	0	20.58	20.66	20.86		
15	64QAM	1	37	20.57	20.63	20.88	21	2
15	64QAM	1	74	20.56	20.66	20.87		
15	64QAM	36	0	19.45	19.57	19.66		
15	64QAM	36	20	19.42	19.57	19.79	20	3
15	64QAM	36	39	19.44	19.51	19.67		
15	64QAM	75	0	19.41	19.53	19.72		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	21.48	21.62	21.85	23	0
10	QPSK	1	25	21.43	21.69	21.88		
10	QPSK	1	49	21.42	21.72	21.79		
10	QPSK	25	0	21.23	21.26	21.37	22	1
10	QPSK	25	12	21.10	21.24	21.35		
10	QPSK	25	25	21.01	21.21	21.36		
10	QPSK	50	0	21.09	21.19	21.34	22	1
10	16QAM	1	0	21.37	21.48	21.72		
10	16QAM	1	25	21.28	21.56	21.75		
10	16QAM	1	49	21.30	21.55	21.65	21	2
10	16QAM	25	0	20.09	20.36	20.44		
10	16QAM	25	12	20.21	20.34	20.47		
10	16QAM	25	25	20.11	20.31	20.51	21	2
10	16QAM	50	0	20.18	20.29	20.43		
10	64QAM	1	0	20.45	20.59	20.80		
10	64QAM	1	25	20.41	20.60	20.45	21	2
10	64QAM	1	49	20.42	20.66	20.65		
10	64QAM	25	0	19.28	19.56	19.65		
10	64QAM	25	12	19.42	19.55	19.65	20	3
10	64QAM	25	25	19.31	19.52	19.69		
10	64QAM	50	0	19.38	19.49	19.63		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	21.47	21.69	21.87	23	0
5	QPSK	1	12	21.44	21.69	21.85		
5	QPSK	1	24	21.40	21.61	21.79		
5	QPSK	12	0	21.01	21.23	21.39	22	1
5	QPSK	12	7	21.01	21.24	21.42		
5	QPSK	12	13	21.01	21.20	21.36		
5	QPSK	25	0	21.00	21.19	21.37	22	1
5	16QAM	1	0	21.36	21.53	21.72		
5	16QAM	1	12	21.34	21.55	21.71		
5	16QAM	1	24	21.29	21.50	21.63	21	2
5	16QAM	12	0	20.11	20.32	20.52		
5	16QAM	12	7	20.15	20.36	20.51		
5	16QAM	12	13	20.08	20.30	20.50	21	2
5	16QAM	25	0	20.09	20.29	20.46		
5	64QAM	1	0	20.45	20.63	20.80		
5	64QAM	1	12	20.41	20.63	20.78	21	2
5	64QAM	1	24	20.36	20.58	20.70		
5	64QAM	12	0	19.31	19.52	19.74		
5	64QAM	12	7	19.33	19.55	19.73	20	3
5	64QAM	12	13	19.29	19.51	19.70		
5	64QAM	25	0	19.28	19.51	19.68		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.44	21.68	21.86	23	0
3	QPSK	1	8	21.45	21.64	21.81		
3	QPSK	1	14	21.43	21.65	21.81		
3	QPSK	8	0	21.00	21.18	21.40	22	1
3	QPSK	8	4	21.03	21.23	21.40		
3	QPSK	8	7	21.03	21.20	21.36		
3	QPSK	15	0	21.01	21.20	21.39	22	1
3	16QAM	1	0	21.33	21.50	21.72		
3	16QAM	1	8	21.39	21.52	21.70		
3	16QAM	1	14	21.30	21.49	21.62	21	2
3	16QAM	8	0	20.16	20.38	20.55		
3	16QAM	8	4	20.17	20.40	20.56		
3	16QAM	8	7	20.13	20.38	20.52	21	2
3	16QAM	15	0	20.09	20.35	20.50		
3	64QAM	1	0	20.43	20.68	20.80		
3	64QAM	1	8	20.40	20.63	20.80	21	2
3	64QAM	1	14	20.41	20.59	20.74		
3	64QAM	8	0	19.33	19.54	19.73		
3	64QAM	8	4	19.37	19.56	19.71	20	3
3	64QAM	8	7	19.31	19.55	19.66		
3	64QAM	15	0	19.29	19.53	19.68		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	21.40	21.61	21.75	23	0
1.4	QPSK	1	3	21.45	21.65	21.83		
1.4	QPSK	1	5	21.40	21.59	21.73		
1.4	QPSK	3	0	21.43	21.64	21.80		
1.4	QPSK	3	1	21.48	21.67	21.83		
1.4	QPSK	3	3	21.45	21.64	21.77		
1.4	QPSK	6	0	21.06	21.12	21.29	22	1
1.4	16QAM	1	0	21.26	21.48	21.64	22	1
1.4	16QAM	1	3	21.40	21.59	21.70		
1.4	16QAM	1	5	21.29	21.51	21.59		
1.4	16QAM	3	0	21.07	21.24	21.40		
1.4	16QAM	3	1	21.09	21.28	21.40		
1.4	16QAM	3	3	21.08	21.20	21.34		
1.4	16QAM	6	0	20.13	20.30	20.50	21	2
1.4	64QAM	1	0	20.46	20.55	20.77	21	2
1.4	64QAM	1	3	20.48	20.68	20.82		
1.4	64QAM	1	5	20.40	20.59	20.71		
1.4	64QAM	3	0	20.36	20.48	20.64		
1.4	64QAM	3	1	20.37	20.54	20.69		
1.4	64QAM	3	3	20.35	20.47	20.65		
1.4	64QAM	6	0	19.26	19.44	19.61	20	3



<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.61	15.98	15.67	16.5	0
20	QPSK	1	49	15.55	15.61	15.64		
20	QPSK	1	99	15.66	15.63	15.54		
20	QPSK	50	0	15.66	15.68	15.39	16.5	0
20	QPSK	50	24	15.70	15.71	15.42		
20	QPSK	50	50	15.48	15.59	15.38		
20	QPSK	100	0	15.53	15.62	15.40	16.5	0
20	16QAM	1	0	15.95	15.80	15.60		
20	16QAM	1	49	15.85	15.83	15.60		
20	16QAM	1	99	15.65	15.85	15.70	16.5	0
20	16QAM	50	0	15.73	15.71	15.45		
20	16QAM	50	24	15.75	15.71	15.48		
20	16QAM	50	50	15.58	15.71	15.41	16.5	0
20	16QAM	100	0	15.59	15.67	15.45		
20	64QAM	1	0	15.82	15.74	15.62		
20	64QAM	1	49	15.75	15.79	15.55	16.5	0
20	64QAM	1	99	15.62	15.87	15.67		
20	64QAM	50	0	15.75	15.70	15.49		
20	64QAM	50	24	15.73	15.76	15.53	16.5	0
20	64QAM	50	50	15.59	15.71	15.43		
20	64QAM	100	0	15.58	15.68	15.46		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.65	15.61	15.34	16.5	0
15	QPSK	1	37	15.65	15.61	15.46		
15	QPSK	1	74	15.58	15.57	15.37		
15	QPSK	36	0	15.67	15.64	15.40	16.5	0
15	QPSK	36	20	15.69	15.69	15.44		
15	QPSK	36	39	15.66	15.66	15.46		
15	QPSK	75	0	15.67	15.66	15.38	16.5	0
15	16QAM	1	0	15.86	15.90	15.66		
15	16QAM	1	37	15.89	15.97	15.70		
15	16QAM	1	74	15.77	15.82	15.61	16.5	0
15	16QAM	36	0	15.71	15.73	15.41		
15	16QAM	36	20	15.75	15.73	15.49		
15	16QAM	36	39	15.69	15.67	15.52	16.5	0
15	16QAM	75	0	15.73	15.70	15.45		
15	64QAM	1	0	15.85	15.85	15.56		
15	64QAM	1	37	15.90	15.82	15.74	16.5	0
15	64QAM	1	74	15.81	15.79	15.52		
15	64QAM	36	0	15.86	15.76	15.59		
15	64QAM	36	20	15.87	15.76	15.55	16.5	0
15	64QAM	36	39	15.73	15.70	15.58		
15	64QAM	75	0	15.82	15.73	15.48		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	15.64	15.65	15.60	16.5	0
10	QPSK	1	25	15.68	15.67	15.53		
10	QPSK	1	49	15.60	15.62	15.50		
10	QPSK	25	0	15.69	15.68	15.48	16.5	0
10	QPSK	25	12	15.73	15.73	15.60		
10	QPSK	25	25	15.67	15.65	15.55		
10	QPSK	50	0	15.68	15.65	15.49		
10	16QAM	1	0	15.90	15.90	15.81	16.5	0
10	16QAM	1	25	15.76	15.89	15.84		
10	16QAM	1	49	15.86	15.91	15.83		
10	16QAM	25	0	15.76	15.70	15.57	16.5	0
10	16QAM	25	12	15.81	15.73	15.68		
10	16QAM	25	25	15.74	15.73	15.61		
10	16QAM	50	0	15.75	15.73	15.55		
10	64QAM	1	0	15.85	15.90	15.73	16.5	0
10	64QAM	1	25	15.89	15.87	15.86		
10	64QAM	1	49	15.67	15.82	15.45		
10	64QAM	25	0	15.87	15.73	15.69	16.5	0
10	64QAM	25	12	15.89	15.79	15.67		
10	64QAM	25	25	15.87	15.69	15.45		
10	64QAM	50	0	15.86	15.72	15.69		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.64	15.62	15.62	16.5	0
5	QPSK	1	12	15.69	15.65	15.57		
5	QPSK	1	24	15.68	15.66	15.56		
5	QPSK	12	0	15.74	15.66	15.51	16.5	0
5	QPSK	12	7	15.69	15.68	15.61		
5	QPSK	12	13	15.73	15.63	15.50		
5	QPSK	25	0	15.66	15.62	15.53		
5	16QAM	1	0	15.78	15.78	15.89	16.5	0
5	16QAM	1	12	15.93	15.78	15.78		
5	16QAM	1	24	15.94	15.79	15.72		
5	16QAM	12	0	15.82	15.72	15.63	16.5	0
5	16QAM	12	7	15.77	15.72	15.67		
5	16QAM	12	13	15.80	15.68	15.56		
5	16QAM	25	0	15.79	15.69	15.62		
5	64QAM	1	0	15.90	15.84	15.65	16.5	0
5	64QAM	1	12	15.45	15.81	15.65		
5	64QAM	1	24	15.67	15.86	15.76		
5	64QAM	12	0	15.91	15.76	15.45	16.5	0
5	64QAM	12	7	15.87	15.75	15.54		
5	64QAM	12	13	15.91	15.78	15.45		
5	64QAM	25	0	15.87	15.72	15.74		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.65	15.64	15.58	16.5	0
3	QPSK	1	8	15.67	15.58	15.60		
3	QPSK	1	14	15.62	15.62	15.47		
3	QPSK	8	0	15.64	15.62	15.48	16.5	0
3	QPSK	8	4	15.73	15.63	15.57		
3	QPSK	8	7	15.64	15.58	15.51		
3	QPSK	15	0	15.62	15.62	15.49		
3	16QAM	1	0	15.65	15.89	15.82	16.5	0
3	16QAM	1	8	15.65	15.96	15.75		
3	16QAM	1	14	15.92	15.94	15.79		
3	16QAM	8	0	15.79	15.76	15.66	16.5	0
3	16QAM	8	4	15.79	15.77	15.69		
3	16QAM	8	7	15.75	15.71	15.62		
3	16QAM	15	0	15.72	15.68	15.58		
3	64QAM	1	0	15.92	15.79	15.76	16.5	0
3	64QAM	1	8	15.95	15.83	15.54		
3	64QAM	1	14	15.93	15.73	15.45		
3	64QAM	8	0	15.89	15.70	15.69	16.5	0
3	64QAM	8	4	15.92	15.73	15.63		
3	64QAM	8	7	15.80	15.70	15.67		
3	64QAM	15	0	15.80	15.67	15.72		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.57	15.47	15.45	16.5	0
1.4	QPSK	1	3	15.63	15.57	15.50		
1.4	QPSK	1	5	15.59	15.52	15.40		
1.4	QPSK	3	0	15.59	15.57	15.47		
1.4	QPSK	3	1	15.59	15.62	15.49		
1.4	QPSK	3	3	15.59	15.52	15.46		
1.4	QPSK	6	0	15.58	15.53	15.47	16.5	0
1.4	16QAM	1	0	15.82	15.76	15.73	16.5	0
1.4	16QAM	1	3	15.78	15.88	15.80		
1.4	16QAM	1	5	15.93	15.86	15.69		
1.4	16QAM	3	0	15.67	15.61	15.53		
1.4	16QAM	3	1	15.70	15.67	15.55		
1.4	16QAM	3	3	15.60	15.63	15.52		
1.4	16QAM	6	0	15.72	15.70	15.62	16.5	0
1.4	64QAM	1	0	15.80	15.76	15.69	16.5	0
1.4	64QAM	1	3	15.88	15.79	15.46		
1.4	64QAM	1	5	15.86	15.76	15.76		
1.4	64QAM	3	0	15.84	15.75	15.71		
1.4	64QAM	3	1	15.90	15.87	15.79		
1.4	64QAM	3	3	15.80	15.74	15.74		
1.4	64QAM	6	0	15.77	15.79	15.62	16.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.90	16.25	15.91	17.5	0
20	QPSK	1	49	15.78	15.95	16.08		
20	QPSK	1	99	15.84	15.89	16.07		
20	QPSK	50	0	15.89	16.02	15.99	17.5	0
20	QPSK	50	24	15.97	16.07	16.02		
20	QPSK	50	50	15.89	15.99	16.06		
20	QPSK	100	0	15.98	16.01	15.99	17.5	0
20	16QAM	1	0	16.14	15.90	15.90		
20	16QAM	1	49	16.21	15.91	15.92		
20	16QAM	1	99	16.19	15.89	15.89	17.5	0
20	16QAM	50	0	15.96	16.10	16.05		
20	16QAM	50	24	16.07	16.09	16.07		
20	16QAM	50	50	16.00	16.05	16.12	17.5	0
20	16QAM	100	0	15.99	16.03	16.04		
20	64QAM	1	0	15.96	16.20	16.21		
20	64QAM	1	49	16.07	15.91	15.89	17.5	0
20	64QAM	1	99	16.15	16.16	15.89		
20	64QAM	50	0	15.96	16.10	16.08		
20	64QAM	50	24	16.12	16.12	16.05	17.5	0
20	64QAM	50	50	16.05	16.06	16.16		
20	64QAM	100	0	16.04	16.04	16.03		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.73	15.95	15.95	17.5	0
15	QPSK	1	37	15.84	15.94	16.06		
15	QPSK	1	74	15.81	15.89	16.08		
15	QPSK	36	0	15.85	15.99	15.95	17.5	0
15	QPSK	36	20	15.88	16.05	16.01		
15	QPSK	36	39	15.93	15.94	16.03		
15	QPSK	75	0	15.90	16.01	15.95	17.5	0
15	16QAM	1	0	16.03	15.90	15.89		
15	16QAM	1	37	16.13	15.90	16.00		
15	16QAM	1	74	16.17	16.17	16.12	17.5	0
15	16QAM	36	0	15.94	16.09	15.72		
15	16QAM	36	20	15.99	16.11	15.70		
15	16QAM	36	39	16.04	16.02	15.76	17.5	0
15	16QAM	75	0	15.90	16.05	15.67		
15	64QAM	1	0	15.99	15.92	15.83		
15	64QAM	1	37	16.07	16.24	15.92	17.5	0
15	64QAM	1	74	16.12	16.09	16.03		
15	64QAM	36	0	16.03	16.11	15.72		
15	64QAM	36	20	16.00	16.10	15.74	17.5	0
15	64QAM	36	39	16.07	16.07	15.82		
15	64QAM	75	0	15.95	16.08	15.71		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.73	15.95	15.95	17.5	0
10	QPSK	1	25	15.84	15.94	16.06		
10	QPSK	1	49	15.81	15.89	16.08		
10	QPSK	25	0	15.85	15.99	15.95	17.5	0
10	QPSK	25	12	15.88	16.05	16.01		
10	QPSK	25	25	15.93	15.94	16.03		
10	QPSK	50	0	15.90	16.01	15.95	17.5	0
10	16QAM	1	0	16.03	15.90	15.89		
10	16QAM	1	25	16.13	15.90	16.00		
10	16QAM	1	49	16.17	16.17	16.12	17.5	0
10	16QAM	25	0	15.94	16.09	15.72		
10	16QAM	25	12	15.99	16.11	15.70		
10	16QAM	25	25	16.04	16.02	15.76	17.5	0
10	16QAM	50	0	15.90	16.05	15.67		
10	64QAM	1	0	15.99	15.92	15.83		
10	64QAM	1	25	16.07	16.24	15.92	17.5	0
10	64QAM	1	49	16.12	16.09	16.03		
10	64QAM	25	0	16.03	16.11	15.72		
10	64QAM	25	12	16.00	16.10	15.74	17.5	0
10	64QAM	25	25	16.07	16.07	15.82		
10	64QAM	50	0	15.95	16.08	15.71		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.69	16.03	16.05	17.5	0
5	QPSK	1	12	15.72	16.01	16.12		
5	QPSK	1	24	15.77	15.95	16.14		
5	QPSK	12	0	15.71	16.00	16.09	17.5	0
5	QPSK	12	7	15.78	16.08	16.15		
5	QPSK	12	13	15.81	16.01	16.08		
5	QPSK	25	0	15.84	16.01	16.11	17.5	0
5	16QAM	1	0	16.09	15.89	16.10		
5	16QAM	1	12	15.99	15.90	16.04		
5	16QAM	1	24	16.07	15.90	16.12	17.5	0
5	16QAM	12	0	15.77	16.09	15.82		
5	16QAM	12	7	15.88	16.10	15.85		
5	16QAM	12	13	15.88	16.08	15.84	17.5	0
5	16QAM	25	0	15.92	16.11	15.84		
5	64QAM	1	0	16.00	16.22	15.99		
5	64QAM	1	12	16.08	15.90	15.96	17.5	0
5	64QAM	1	24	16.01	16.19	16.11		
5	64QAM	12	0	16.01	16.13	15.90		
5	64QAM	12	7	16.02	16.19	15.94	17.5	0
5	64QAM	12	13	16.03	16.09	15.90		
5	64QAM	25	0	16.02	16.10	15.82		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.69	16.03	16.05	17.5	0
3	QPSK	1	8	15.72	16.01	16.12		
3	QPSK	1	14	15.77	15.95	16.14		
3	QPSK	8	0	15.71	16.00	16.09	17.5	0
3	QPSK	8	4	15.78	16.08	16.15		
3	QPSK	8	7	15.81	16.01	16.08		
3	QPSK	15	0	15.84	16.01	16.11	17.5	0
3	16QAM	1	0	16.09	15.89	16.10		
3	16QAM	1	8	15.99	15.90	16.04		
3	16QAM	1	14	16.07	15.90	16.12	17.5	0
3	16QAM	8	0	15.77	16.09	15.82		
3	16QAM	8	4	15.88	16.10	15.85		
3	16QAM	8	7	15.88	16.08	15.84	17.5	0
3	16QAM	15	0	15.92	16.11	15.84		
3	64QAM	1	0	16.00	16.22	15.99		
3	64QAM	1	8	16.08	15.90	15.96	17.5	0
3	64QAM	1	14	16.01	16.19	16.11		
3	64QAM	8	0	16.01	16.13	15.90		
3	64QAM	8	4	16.02	16.19	15.94	17.5	0
3	64QAM	8	7	16.03	16.09	15.90		
3	64QAM	15	0	16.02	16.10	15.82		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	15.63	15.89	16.09	17.5	0
1.4	QPSK	1	3	15.69	16.00	16.01		
1.4	QPSK	1	5	15.60	15.89	16.04		
1.4	QPSK	3	0	15.68	15.93	16.14		
1.4	QPSK	3	1	15.72	15.97	16.11		
1.4	QPSK	3	3	15.67	15.90	16.15		
1.4	QPSK	6	0	15.66	15.88	16.15	17.5	0
1.4	16QAM	1	0	16.02	16.24	16.08	17.5	0
1.4	16QAM	1	3	16.04	15.90	15.88		
1.4	16QAM	1	5	15.92	16.19	16.03		
1.4	16QAM	3	0	15.74	16.07	15.83		
1.4	16QAM	3	1	15.77	16.00	15.57		
1.4	16QAM	3	3	15.74	15.99	15.87		
1.4	16QAM	6	0	15.80	16.09	15.91	17.5	0
1.4	64QAM	1	0	15.94	16.16	16.01	17.5	0
1.4	64QAM	1	3	15.97	16.21	15.88		
1.4	64QAM	1	5	15.93	16.16	15.98		
1.4	64QAM	3	0	16.00	16.13	15.97		
1.4	64QAM	3	1	16.05	16.23	15.98		
1.4	64QAM	3	3	16.01	16.09	16.01		
1.4	64QAM	6	0	15.76	15.98	15.86	17.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.01	20.05	19.88	20.5	0
20	QPSK	1	49	20.01	20.02	20.01		
20	QPSK	1	99	19.91	20.00	20.01		
20	QPSK	50	0	19.97	20.01	19.97	20.5	0
20	QPSK	50	24	19.95	20.02	19.95		
20	QPSK	50	50	19.88	19.91	19.86		
20	QPSK	100	0	19.98	20.01	19.95	20.5	0
20	16QAM	1	0	20.01	19.66	20.02		
20	16QAM	1	49	20.02	20.01	19.89		
20	16QAM	1	99	20.00	19.94	19.92	20.5	0
20	16QAM	50	0	19.85	19.89	19.89		
20	16QAM	50	24	19.90	19.88	19.87		
20	16QAM	50	50	19.87	19.83	19.76	20.5	0
20	16QAM	100	0	19.83	19.82	19.84		
20	64QAM	1	0	19.99	19.85	20.02		
20	64QAM	1	49	19.97	20.01	19.93	20.5	0
20	64QAM	1	99	20.03	19.86	19.92		
20	64QAM	50	0	19.88	19.88	19.86		
20	64QAM	50	24	19.85	19.89	19.88	20.5	0
20	64QAM	50	50	19.88	19.80	19.75		
20	64QAM	100	0	19.81	19.82	19.83		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.96	20.00	19.97	20.5	0
15	QPSK	1	37	19.90	19.98	19.83		
15	QPSK	1	74	19.99	19.93	19.84		
15	QPSK	36	0	20.00	19.98	19.97	20.5	0
15	QPSK	36	20	20.00	19.96	19.90		
15	QPSK	36	39	19.97	19.89	19.88		
15	QPSK	75	0	19.80	19.78	19.74	20.5	0
15	16QAM	1	0	19.98	19.76	19.77		
15	16QAM	1	37	19.93	19.99	20.01		
15	16QAM	1	74	20.03	20.03	20.02	20.5	0
15	16QAM	36	0	19.84	19.91	19.83		
15	16QAM	36	20	19.90	19.90	19.83		
15	16QAM	36	39	19.86	19.81	19.81	20.5	0
15	16QAM	75	0	19.86	19.91	19.88		
15	64QAM	1	0	19.96	19.77	20.01		
15	64QAM	1	37	19.85	20.01	19.92	20.5	0
15	64QAM	1	74	19.92	19.96	19.94		
15	64QAM	36	0	19.92	19.95	19.90		
15	64QAM	36	20	19.93	19.97	19.80	20.5	0
15	64QAM	36	39	19.92	19.84	19.79		
15	64QAM	75	0	19.84	19.89	19.87		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.93	19.99	19.83	20.5	0
10	QPSK	1	25	19.92	19.96	19.83		
10	QPSK	1	49	19.97	19.85	19.81		
10	QPSK	25	0	20.00	20.01	19.88	20.5	0
10	QPSK	25	12	19.98	19.96	19.82		
10	QPSK	25	25	19.98	19.93	19.84		
10	QPSK	50	0	19.99	19.95	19.85		
10	16QAM	1	0	19.89	19.82	19.76	20.5	0
10	16QAM	1	25	19.84	19.89	19.98		
10	16QAM	1	49	19.86	19.78	19.87		
10	16QAM	25	0	19.85	19.93	19.77	20.5	0
10	16QAM	25	12	19.86	19.89	19.76		
10	16QAM	25	25	19.84	19.84	19.78		
10	16QAM	50	0	19.88	19.86	19.78		
10	64QAM	1	0	19.86	20.01	19.89	20.5	0
10	64QAM	1	25	19.95	20.02	19.94		
10	64QAM	1	49	20.03	19.90	19.93		
10	64QAM	25	0	19.89	19.93	19.77	20.5	0
10	64QAM	25	12	19.90	19.89	19.80		
10	64QAM	25	25	19.89	19.84	19.73		
10	64QAM	50	0	19.86	19.89	19.73		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.89	19.91	19.82	20.5	0
5	QPSK	1	12	19.86	19.89	19.76		
5	QPSK	1	24	19.92	19.88	19.81		
5	QPSK	12	0	19.95	19.92	19.78	20.5	0
5	QPSK	12	7	19.97	19.97	19.87		
5	QPSK	12	13	19.97	19.95	19.85		
5	QPSK	25	0	19.92	19.94	19.81		
5	16QAM	1	0	19.97	19.95	20.00	20.5	0
5	16QAM	1	12	20.04	19.66	19.94		
5	16QAM	1	24	20.03	20.01	19.93		
5	16QAM	12	0	19.79	19.90	19.74	20.5	0
5	16QAM	12	7	19.87	19.88	19.80		
5	16QAM	12	13	19.85	19.85	19.78		
5	16QAM	25	0	19.84	19.84	19.72		
5	64QAM	1	0	19.84	19.98	19.95	20.5	0
5	64QAM	1	12	19.99	19.99	19.86		
5	64QAM	1	24	19.97	19.94	19.77		
5	64QAM	12	0	19.85	19.93	19.79	20.5	0
5	64QAM	12	7	19.86	19.89	19.81		
5	64QAM	12	13	19.83	19.90	19.82		
5	64QAM	25	0	19.81	19.85	19.73		



<Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	13.05	13.30	12.92	13.5	0
20	QPSK	1	49	12.96	12.90	12.90		
20	QPSK	1	99	13.01	12.93	12.92		
20	QPSK	50	0	12.77	12.76	12.93	13.5	0
20	QPSK	50	24	12.76	12.94	12.92		
20	QPSK	50	50	12.60	12.69	12.91		
20	QPSK	100	0	12.64	12.93	12.92	13.5	0
20	16QAM	1	0	13.06	12.94	13.17		
20	16QAM	1	49	12.99	13.04	13.15		
20	16QAM	1	99	12.91	12.91	13.19	13.5	0
20	16QAM	50	0	12.84	12.80	13.00		
20	16QAM	50	24	12.82	12.86	13.02		
20	16QAM	50	50	12.68	12.79	12.95	13.5	0
20	16QAM	100	0	12.68	12.77	12.96		
20	64QAM	1	0	12.94	13.02	13.13		
20	64QAM	1	49	12.98	12.96	13.01	13.5	0
20	64QAM	1	99	12.70	12.91	13.02		
20	64QAM	50	0	12.90	12.87	13.01		
20	64QAM	50	24	12.87	12.84	13.04	13.5	0
20	64QAM	50	50	12.66	12.80	12.98		
20	64QAM	100	0	12.70	12.83	13.02		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	12.69	12.66	12.89	13.5	0
15	QPSK	1	37	12.71	12.68	12.95		
15	QPSK	1	74	12.69	12.60	12.84		
15	QPSK	36	0	12.73	12.71	12.87	13.5	0
15	QPSK	36	20	12.76	12.78	12.93		
15	QPSK	36	39	12.74	12.74	12.98		
15	QPSK	75	0	12.73	12.69	12.87	13.5	0
15	16QAM	1	0	13.05	12.92	13.10		
15	16QAM	1	37	13.01	12.90	13.24		
15	16QAM	1	74	12.88	12.93	13.16	13.5	0
15	16QAM	36	0	12.81	12.76	12.98		
15	16QAM	36	20	12.80	12.80	12.97		
15	16QAM	36	39	12.80	12.79	13.02	13.5	0
15	16QAM	75	0	12.79	12.78	12.93		
15	64QAM	1	0	12.96	12.94	13.12		
15	64QAM	1	37	12.94	12.87	13.23	13.5	0
15	64QAM	1	74	12.93	12.80	13.11		
15	64QAM	36	0	12.89	12.84	13.01		
15	64QAM	36	20	12.89	12.81	13.01	13.5	0
15	64QAM	36	39	12.80	12.79	13.10		
15	64QAM	75	0	12.80	12.79	12.93		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	12.73	12.64	13.01	13.5	0
10	QPSK	1	25	12.69	12.69	13.05		
10	QPSK	1	49	12.69	12.62	12.99		
10	QPSK	25	0	12.71	12.69	13.01	13.5	0
10	QPSK	25	12	12.73	12.74	13.09		
10	QPSK	25	25	12.68	12.67	13.07		
10	QPSK	50	0	12.70	12.71	12.98		
10	16QAM	1	0	13.00	13.01	13.27	13.5	0
10	16QAM	1	25	12.98	12.92	13.09		
10	16QAM	1	49	12.93	12.86	13.02		
10	16QAM	25	0	12.83	12.74	13.07	13.5	0
10	16QAM	25	12	12.79	12.80	13.16		
10	16QAM	25	25	12.77	12.75	13.10		
10	16QAM	50	0	12.75	12.78	13.06		
10	64QAM	1	0	12.89	12.98	13.26	13.5	0
10	64QAM	1	25	12.95	12.93	13.12		
10	64QAM	1	49	12.98	12.89	13.23		
10	64QAM	25	0	12.85	12.81	13.09	13.5	0
10	64QAM	25	12	12.89	12.85	13.21		
10	64QAM	25	25	12.81	12.80	13.12		
10	64QAM	50	0	12.85	12.80	13.07		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	12.73	12.69	13.03	13.5	0
5	QPSK	1	12	12.67	12.66	13.05		
5	QPSK	1	24	12.72	12.65	12.99		
5	QPSK	12	0	12.71	12.69	13.06	13.5	0
5	QPSK	12	7	12.75	12.70	13.05		
5	QPSK	12	13	12.69	12.65	13.03		
5	QPSK	25	0	12.69	12.66	13.07		
5	16QAM	1	0	13.11	12.97	12.91	13.5	0
5	16QAM	1	12	13.06	12.96	12.89		
5	16QAM	1	24	13.02	12.94	13.21		
5	16QAM	12	0	12.80	12.78	13.09	13.5	0
5	16QAM	12	7	12.82	12.78	13.16		
5	16QAM	12	13	12.76	12.73	13.08		
5	16QAM	25	0	12.76	12.77	13.13		
5	64QAM	1	0	13.03	12.89	13.01	13.5	0
5	64QAM	1	12	12.88	12.94	13.01		
5	64QAM	1	24	12.88	12.89	13.24		
5	64QAM	12	0	12.89	12.83	13.20	13.5	0
5	64QAM	12	7	12.83	12.87	13.21		
5	64QAM	12	13	12.88	12.83	13.18		
5	64QAM	25	0	12.85	12.78	13.14		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	12.71	12.71	13.04	13.5	0
3	QPSK	1	8	12.69	12.67	13.07		
3	QPSK	1	14	12.71	12.71	13.02		
3	QPSK	8	0	12.77	12.67	13.10	13.5	0
3	QPSK	8	4	12.76	12.73	13.13		
3	QPSK	8	7	12.77	12.68	13.09		
3	QPSK	15	0	12.75	12.72	13.06		
3	16QAM	1	0	13.03	12.99	13.02	13.5	0
3	16QAM	1	8	13.01	13.01	13.02		
3	16QAM	1	14	12.94	13.01	13.02		
3	16QAM	8	0	12.87	12.83	13.20	13.5	0
3	16QAM	8	4	12.85	12.82	13.21		
3	16QAM	8	7	12.87	12.80	13.17		
3	16QAM	15	0	12.83	12.77	13.17		
3	64QAM	1	0	13.02	12.89	13.04	13.5	0
3	64QAM	1	8	12.95	12.97	12.93		
3	64QAM	1	14	12.98	12.95	13.12		
3	64QAM	8	0	12.84	12.85	13.22	13.5	0
3	64QAM	8	4	12.90	12.90	13.23		
3	64QAM	8	7	12.85	12.84	13.17		
3	64QAM	15	0	12.82	12.79	13.20		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	12.70	12.63	12.98	13.5	0
1.4	QPSK	1	3	12.73	12.70	13.07		
1.4	QPSK	1	5	12.69	12.61	12.96		
1.4	QPSK	3	0	12.71	12.63	13.06		
1.4	QPSK	3	1	12.74	12.69	13.07		
1.4	QPSK	3	3	12.72	12.70	13.05		
1.4	QPSK	6	0	12.70	12.64	13.04	13.5	0
1.4	16QAM	1	0	13.02	12.84	12.98	13.5	0
1.4	16QAM	1	3	12.96	12.99	12.99		
1.4	16QAM	1	5	12.98	12.92	12.89		
1.4	16QAM	3	0	12.75	12.66	13.13		
1.4	16QAM	3	1	12.81	12.82	13.11		
1.4	16QAM	3	3	12.76	12.76	13.05		
1.4	16QAM	6	0	12.85	12.79	13.16	13.5	0
1.4	64QAM	1	0	12.89	12.88	13.29	13.5	0
1.4	64QAM	1	3	13.02	13.00	13.27		
1.4	64QAM	1	5	12.87	12.85	13.24		
1.4	64QAM	3	0	12.90	12.89	13.27		
1.4	64QAM	3	1	12.99	12.94	13.29		
1.4	64QAM	3	3	12.87	12.82	13.19		
1.4	64QAM	6	0	12.76	12.77	13.13	13.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	12.38	12.57	12.52	14	0
20	QPSK	1	49	12.40	12.55	12.43		
20	QPSK	1	99	12.43	12.49	12.47		
20	QPSK	50	0	12.48	12.59	12.57	14	0
20	QPSK	50	24	12.60	12.65	12.58		
20	QPSK	50	50	12.52	12.56	12.64		
20	QPSK	100	0	12.58	12.61	12.57	14	0
20	16QAM	1	0	12.78	12.88	12.87		
20	16QAM	1	49	12.72	12.91	13.00		
20	16QAM	1	99	12.72	12.73	13.05	14	0
20	16QAM	50	0	12.54	12.70	12.67		
20	16QAM	50	24	12.66	12.70	12.68		
20	16QAM	50	50	12.62	12.62	12.72	14	0
20	16QAM	100	0	12.61	12.64	12.65		
20	64QAM	1	0	12.65	12.88	12.73		
20	64QAM	1	49	12.66	12.84	12.88	14	0
20	64QAM	1	99	12.65	12.80	12.87		
20	64QAM	50	0	12.57	12.73	12.67		
20	64QAM	50	24	12.72	12.70	12.69	14	0
20	64QAM	50	50	12.65	12.70	12.74		
20	64QAM	100	0	12.65	12.66	12.67		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	12.38	12.61	12.53	14	0
15	QPSK	1	37	12.49	12.56	12.62		
15	QPSK	1	74	12.46	12.48	12.65		
15	QPSK	36	0	12.50	12.61	12.59	14	0
15	QPSK	36	20	12.52	12.66	12.56		
15	QPSK	36	39	12.56	12.54	12.67		
15	QPSK	75	0	12.54	12.62	12.58	14	0
15	16QAM	1	0	12.63	12.92	12.80		
15	16QAM	1	37	12.76	12.92	12.87		
15	16QAM	1	74	12.79	12.88	13.00	14	0
15	16QAM	36	0	12.53	12.66	12.64		
15	16QAM	36	20	12.58	12.69	12.69		
15	16QAM	36	39	12.63	12.68	12.72	14	0
15	16QAM	75	0	12.58	12.66	12.63		
15	64QAM	1	0	12.67	12.87	12.82		
15	64QAM	1	37	12.76	12.80	12.93	14	0
15	64QAM	1	74	12.72	12.73	12.87		
15	64QAM	36	0	12.59	12.76	12.66		
15	64QAM	36	20	12.61	12.76	12.73	14	0
15	64QAM	36	39	12.66	12.70	12.75		
15	64QAM	75	0	12.60	12.69	12.67		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	12.37	12.65	12.65	14	0
10	QPSK	1	25	12.42	12.65	12.68		
10	QPSK	1	49	12.36	12.51	12.72		
10	QPSK	25	0	12.43	12.64	12.66	14	0
10	QPSK	25	12	12.48	12.66	12.68		
10	QPSK	25	25	12.44	12.59	12.69		
10	QPSK	50	0	12.47	12.61	12.67	14	0
10	16QAM	1	0	12.62	12.98	12.99		
10	16QAM	1	25	12.75	12.87	13.03		
10	16QAM	1	49	12.58	12.84	13.05	14	0
10	16QAM	25	0	12.51	12.71	12.81		
10	16QAM	25	12	12.54	12.72	12.79		
10	16QAM	25	25	12.50	12.65	12.75	14	0
10	16QAM	50	0	12.55	12.71	12.73		
10	64QAM	1	0	12.61	12.91	12.94		
10	64QAM	1	25	12.66	12.91	13.01	14	0
10	64QAM	1	49	12.64	12.75	13.03		
10	64QAM	25	0	12.54	12.77	12.80		
10	64QAM	25	12	12.55	12.78	12.84	14	0
10	64QAM	25	25	12.53	12.71	12.76		
10	64QAM	50	0	12.55	12.73	12.82		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	12.30	12.64	12.67	14	0
5	QPSK	1	12	12.35	12.64	12.61		
5	QPSK	1	24	12.38	12.57	12.72		
5	QPSK	12	0	12.35	12.62	12.73	14	0
5	QPSK	12	7	12.40	12.68	12.71		
5	QPSK	12	13	12.41	12.60	12.73		
5	QPSK	25	0	12.46	12.64	12.65	14	0
5	16QAM	1	0	12.59	12.89	13.04		
5	16QAM	1	12	12.62	12.85	13.05		
5	16QAM	1	24	12.77	12.93	12.84	14	0
5	16QAM	12	0	12.43	12.76	12.78		
5	16QAM	12	7	12.47	12.75	12.79		
5	16QAM	12	13	12.51	12.66	12.80	14	0
5	16QAM	25	0	12.53	12.69	12.74		
5	64QAM	1	0	12.60	12.87	13.00		
5	64QAM	1	12	12.59	12.83	12.93	14	0
5	64QAM	1	24	12.63	12.81	13.05		
5	64QAM	12	0	12.53	12.79	12.79		
5	64QAM	12	7	12.56	12.78	12.89	14	0
5	64QAM	12	13	12.54	12.78	12.83		
5	64QAM	25	0	12.55	12.71	12.83		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	12.37	12.61	12.67	14	0
3	QPSK	1	8	12.36	12.64	12.79		
3	QPSK	1	14	12.32	12.61	12.72		
3	QPSK	8	0	12.34	12.70	12.69	14	0
3	QPSK	8	4	12.38	12.71	12.77		
3	QPSK	8	7	12.39	12.63	12.79		
3	QPSK	15	0	12.36	12.60	12.71		
3	16QAM	1	0	12.59	12.93	13.00	14	0
3	16QAM	1	8	12.70	13.00	13.12		
3	16QAM	1	14	12.68	12.83	13.10		
3	16QAM	8	0	12.51	12.79	12.80	14	0
3	16QAM	8	4	12.54	12.81	12.91		
3	16QAM	8	7	12.49	12.74	12.93		
3	16QAM	15	0	12.43	12.77	12.78		
3	64QAM	1	0	12.56	12.88	13.03	14	0
3	64QAM	1	8	12.65	12.91	13.06		
3	64QAM	1	14	12.61	12.88	13.04		
3	64QAM	8	0	12.54	12.76	12.83	14	0
3	64QAM	8	4	12.57	12.77	12.86		
3	64QAM	8	7	12.50	12.71	12.96		
3	64QAM	15	0	12.43	12.76	12.78		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	12.30	12.59	12.70	14	0
1.4	QPSK	1	3	12.33	12.62	12.83		
1.4	QPSK	1	5	12.27	12.52	12.73		
1.4	QPSK	3	0	12.32	12.60	12.79		
1.4	QPSK	3	1	12.36	12.64	12.82		
1.4	QPSK	3	3	12.33	12.62	12.77		
1.4	QPSK	6	0	12.34	12.59	12.76	14	0
1.4	16QAM	1	0	12.54	12.91	13.01	14	0
1.4	16QAM	1	3	12.63	12.95	13.16		
1.4	16QAM	1	5	12.66	12.87	13.10		
1.4	16QAM	3	0	12.43	12.65	12.86		
1.4	16QAM	3	1	12.42	12.73	12.89		
1.4	16QAM	3	3	12.39	12.69	12.82		
1.4	16QAM	6	0	12.43	12.73	12.92	14	0
1.4	64QAM	1	0	12.49	12.81	13.01	14	0
1.4	64QAM	1	3	12.69	12.90	13.11		
1.4	64QAM	1	5	12.53	12.83	13.00		
1.4	64QAM	3	0	12.54	12.80	12.94		
1.4	64QAM	3	1	12.57	12.81	12.97		
1.4	64QAM	3	3	12.46	12.74	12.97		
1.4	64QAM	6	0	12.39	12.68	12.84	14	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.01	20.05	19.88	20.5	0
20	QPSK	1	49	20.01	20.02	20.01		
20	QPSK	1	99	19.91	20.00	20.01		
20	QPSK	50	0	19.97	20.01	19.97	20.5	0
20	QPSK	50	24	19.95	20.02	19.95		
20	QPSK	50	50	19.88	19.91	19.86		
20	QPSK	100	0	19.98	20.01	19.95		
20	16QAM	1	0	20.01	19.66	20.02	20.5	0
20	16QAM	1	49	20.02	20.01	19.89		
20	16QAM	1	99	20.00	19.94	19.92		
20	16QAM	50	0	19.85	19.89	19.89	20.5	0
20	16QAM	50	24	19.90	19.88	19.87		
20	16QAM	50	50	19.87	19.83	19.76		
20	16QAM	100	0	19.83	19.82	19.84		
20	64QAM	1	0	19.99	19.85	20.02	20.5	0
20	64QAM	1	49	19.97	20.01	19.93		
20	64QAM	1	99	20.03	19.86	19.92		
20	64QAM	50	0	19.88	19.88	19.86	20.5	0
20	64QAM	50	24	19.85	19.89	19.88		
20	64QAM	50	50	19.88	19.80	19.75		
20	64QAM	100	0	19.81	19.82	19.83		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.96	20.00	19.97	20.5	0
15	QPSK	1	37	19.90	19.98	19.83		
15	QPSK	1	74	19.99	19.93	19.84		
15	QPSK	36	0	20.00	19.98	19.97	20.5	0
15	QPSK	36	20	20.00	19.96	19.90		
15	QPSK	36	39	19.97	19.89	19.88		
15	QPSK	75	0	19.80	19.78	19.74		
15	16QAM	1	0	19.98	19.76	19.77	20.5	0
15	16QAM	1	37	19.93	19.99	20.01		
15	16QAM	1	74	20.03	20.03	20.02		
15	16QAM	36	0	19.84	19.91	19.83	20.5	0
15	16QAM	36	20	19.90	19.90	19.83		
15	16QAM	36	39	19.86	19.81	19.81		
15	16QAM	75	0	19.86	19.91	19.88		
15	64QAM	1	0	19.96	19.77	20.01	20.5	0
15	64QAM	1	37	19.85	20.01	19.92		
15	64QAM	1	74	19.92	19.96	19.94		
15	64QAM	36	0	19.92	19.95	19.90	20.5	0
15	64QAM	36	20	19.93	19.97	19.80		
15	64QAM	36	39	19.92	19.84	19.79		
15	64QAM	75	0	19.84	19.89	19.87		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.93	19.99	19.83	20.5	0
10	QPSK	1	25	19.92	19.96	19.83		
10	QPSK	1	49	19.97	19.85	19.81		
10	QPSK	25	0	20.00	20.01	19.88	20.5	0
10	QPSK	25	12	19.98	19.96	19.82		
10	QPSK	25	25	19.98	19.93	19.84		
10	QPSK	50	0	19.99	19.95	19.85		
10	16QAM	1	0	19.89	19.82	19.76	20.5	0
10	16QAM	1	25	19.84	19.89	19.98		
10	16QAM	1	49	19.86	19.78	19.87		
10	16QAM	25	0	19.85	19.93	19.77	20.5	0
10	16QAM	25	12	19.86	19.89	19.76		
10	16QAM	25	25	19.84	19.84	19.78		
10	16QAM	50	0	19.88	19.86	19.78		
10	64QAM	1	0	19.86	20.01	19.89	20.5	0
10	64QAM	1	25	19.95	20.02	19.94		
10	64QAM	1	49	20.03	19.90	19.93		
10	64QAM	25	0	19.89	19.93	19.77	20.5	0
10	64QAM	25	12	19.90	19.89	19.80		
10	64QAM	25	25	19.89	19.84	19.73		
10	64QAM	50	0	19.86	19.89	19.73		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.89	19.91	19.82	20.5	0
5	QPSK	1	12	19.86	19.89	19.76		
5	QPSK	1	24	19.92	19.88	19.81		
5	QPSK	12	0	19.95	19.92	19.78	20.5	0
5	QPSK	12	7	19.97	19.97	19.87		
5	QPSK	12	13	19.97	19.95	19.85		
5	QPSK	25	0	19.92	19.94	19.81		
5	16QAM	1	0	19.97	19.95	20.00	20.5	0
5	16QAM	1	12	20.04	19.66	19.94		
5	16QAM	1	24	20.03	20.01	19.93		
5	16QAM	12	0	19.79	19.90	19.74	20.5	0
5	16QAM	12	7	19.87	19.88	19.80		
5	16QAM	12	13	19.85	19.85	19.78		
5	16QAM	25	0	19.84	19.84	19.72		
5	64QAM	1	0	19.84	19.98	19.95	20.5	0
5	64QAM	1	12	19.99	19.99	19.86		
5	64QAM	1	24	19.97	19.94	19.77		
5	64QAM	12	0	19.85	19.93	19.79	20.5	0
5	64QAM	12	7	19.86	19.89	19.81		
5	64QAM	12	13	19.83	19.90	19.82		
5	64QAM	25	0	19.81	19.85	19.73		



<Reduced Power Mode for Handheld On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.10	21.17	21.15	21.5	0
20	QPSK	1	49	21.02	20.67	20.90		
20	QPSK	1	99	20.88	20.73	20.89		
20	QPSK	50	0	20.71	20.65	20.88	21.5	0
20	QPSK	50	24	20.68	20.92	20.91		
20	QPSK	50	50	20.57	20.67	20.84		
20	QPSK	100	0	20.57	20.90	20.87	21.5	0
20	16QAM	1	0	21.10	20.98	21.02		
20	16QAM	1	49	21.09	21.00	21.04		
20	16QAM	1	99	20.90	21.12	21.15	21.5	0
20	16QAM	50	0	20.85	20.83	20.97		
20	16QAM	50	24	20.84	20.81	21.01		
20	16QAM	50	50	20.70	20.75	20.97	21.5	0
20	16QAM	100	0	20.69	20.79	20.93		
20	64QAM	1	0	21.02	20.91	20.93		
20	64QAM	1	49	20.95	20.91	21.01	21.5	0
20	64QAM	1	99	20.82	21.03	21.08		
20	64QAM	50	0	20.01	19.84	19.98		
20	64QAM	50	24	20.04	19.84	20.02	21	0.5
20	64QAM	50	50	20.04	19.98	19.97		
20	64QAM	100	0	20.10	19.98	20.00		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.65	20.66	20.80	21.5	0
15	QPSK	1	37	20.67	20.67	20.89		
15	QPSK	1	74	20.60	20.64	20.88		
15	QPSK	36	0	20.69	20.69	20.83	21.5	0
15	QPSK	36	20	20.73	20.72	20.92		
15	QPSK	36	39	20.66	20.66	20.95		
15	QPSK	75	0	20.70	20.68	20.88	21.5	0
15	16QAM	1	0	21.15	21.07	21.08		
15	16QAM	1	37	20.99	21.11	20.84		
15	16QAM	1	74	20.98	20.92	21.13	21.5	0
15	16QAM	36	0	20.83	20.82	21.01		
15	16QAM	36	20	20.87	20.88	21.01		
15	16QAM	36	39	20.80	20.78	21.06	21.5	0
15	16QAM	75	0	20.82	20.78	20.97		
15	64QAM	1	0	21.09	20.96	21.15		
15	64QAM	1	37	21.14	21.01	21.01	21.5	0
15	64QAM	1	74	20.95	20.87	21.15		
15	64QAM	36	0	20.01	20.04	20.03		
15	64QAM	36	20	19.90	20.01	20.06	21	0.5
15	64QAM	36	39	19.87	20.04	20.11		
15	64QAM	75	0	19.84	20.04	19.97		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.64	20.64	20.93	21.5	0
10	QPSK	1	25	20.66	20.62	21.04		
10	QPSK	1	49	20.68	20.63	20.95		
10	QPSK	25	0	20.68	20.65	20.96	21.5	0
10	QPSK	25	12	20.70	20.69	21.03		
10	QPSK	25	25	20.70	20.68	20.99		
10	QPSK	50	0	20.68	20.65	20.94	21.5	0
10	16QAM	1	0	21.14	21.06	20.84		
10	16QAM	1	25	21.00	21.04	20.86		
10	16QAM	1	49	21.06	21.05	20.88	21.5	0
10	16QAM	25	0	20.83	20.77	21.07		
10	16QAM	25	12	20.80	20.81	21.14		
10	16QAM	25	25	20.84	20.78	21.11	21.5	0
10	16QAM	50	0	20.81	20.77	21.07		
10	64QAM	1	0	21.01	21.03	21.01		
10	64QAM	1	25	20.96	20.98	21.01	21.5	0
10	64QAM	1	49	20.90	20.94	20.99		
10	64QAM	25	0	20.04	19.78	20.09		
10	64QAM	25	12	20.13	19.85	20.19	21	0.5
10	64QAM	25	25	19.82	19.78	20.13		
10	64QAM	50	0	19.81	19.77	20.07		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.66	20.60	21.00	21.5	0
5	QPSK	1	12	20.73	20.62	21.03		
5	QPSK	1	24	20.64	20.62	20.99		
5	QPSK	12	0	20.71	20.66	21.01	21.5	0
5	QPSK	12	7	20.73	20.70	21.09		
5	QPSK	12	13	20.71	20.68	21.03		
5	QPSK	25	0	20.69	20.62	21.03	21.5	0
5	16QAM	1	0	21.06	21.02	20.94		
5	16QAM	1	12	21.10	21.11	20.90		
5	16QAM	1	24	21.09	21.00	20.90	21.5	0
5	16QAM	12	0	20.87	20.79	21.15		
5	16QAM	12	7	20.87	20.86	21.16		
5	16QAM	12	13	20.84	20.84	21.13	21.5	0
5	16QAM	25	0	20.83	20.77	21.10		
5	64QAM	1	0	21.03	20.93	21.01		
5	64QAM	1	12	20.92	20.96	21.01	21.5	0
5	64QAM	1	24	21.03	20.88	21.01		
5	64QAM	12	0	20.04	19.89	20.23		
5	64QAM	12	7	20.13	19.87	20.23	21	0.5
5	64QAM	12	13	19.90	19.82	20.17		
5	64QAM	25	0	19.81	19.79	20.15		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.71	20.61	20.92	21.5	0
3	QPSK	1	8	20.72	20.66	21.02		
3	QPSK	1	14	20.66	20.59	20.94		
3	QPSK	8	0	20.68	20.68	21.06	21.5	0
3	QPSK	8	4	20.73	20.70	21.07		
3	QPSK	8	7	20.65	20.66	21.04		
3	QPSK	15	0	20.63	20.61	21.04		
3	16QAM	1	0	21.06	21.05	20.90	21.5	0
3	16QAM	1	8	21.08	21.14	20.84		
3	16QAM	1	14	20.96	20.89	21.04		
3	16QAM	8	0	20.91	20.85	20.98	21.5	0
3	16QAM	8	4	20.92	20.91	21.01		
3	16QAM	8	7	20.87	20.87	20.94		
3	16QAM	15	0	20.83	20.78	21.12		
3	64QAM	1	0	20.98	21.00	21.01	21.5	0
3	64QAM	1	8	21.02	20.94	21.02		
3	64QAM	1	14	21.05	21.00	21.01		
3	64QAM	8	0	20.01	19.87	20.16	21	0.5
3	64QAM	8	4	19.99	19.86	20.22		
3	64QAM	8	7	20.04	19.82	20.23		
3	64QAM	15	0	20.02	19.76	20.16		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	20.57	20.55	20.89	21.5	0
1.4	QPSK	1	3	20.65	20.63	21.02		
1.4	QPSK	1	5	20.57	20.85	20.90		
1.4	QPSK	3	0	20.64	20.60	21.00		
1.4	QPSK	3	1	20.64	20.63	20.98		
1.4	QPSK	3	3	20.61	20.60	20.99		
1.4	QPSK	6	0	20.60	20.55	21.01	21.5	0
1.4	16QAM	1	0	20.96	20.97	21.08	21.5	0
1.4	16QAM	1	3	21.15	21.10	21.04		
1.4	16QAM	1	5	20.95	20.96	21.05		
1.4	16QAM	3	0	20.74	20.67	21.10		
1.4	16QAM	3	1	20.79	20.78	21.13		
1.4	16QAM	3	3	20.67	20.67	20.99	21.5	0
1.4	16QAM	6	0	20.79	20.74	21.16		
1.4	64QAM	1	0	20.97	20.85	21.01	21.5	0
1.4	64QAM	1	3	20.97	20.89	21.01		
1.4	64QAM	1	5	20.93	20.91	21.01		
1.4	64QAM	3	0	20.90	20.87	21.03		
1.4	64QAM	3	1	20.92	20.86	21.01		
1.4	64QAM	3	3	20.87	20.82	20.98		
1.4	64QAM	6	0	20.01	20.01	20.08	21	0.5



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.76	19.98	19.52	21	0
20	QPSK	1	49	19.86	19.65	19.60		
20	QPSK	1	99	19.89	19.76	19.66		
20	QPSK	50	0	19.46	19.55	19.57	21	0
20	QPSK	50	24	19.54	19.67	19.53		
20	QPSK	50	50	19.47	19.57	19.64		
20	QPSK	100	0	19.51	19.54	19.52		
20	16QAM	1	0	19.83	19.76	19.93	21	0
20	16QAM	1	49	19.77	19.67	19.78		
20	16QAM	1	99	19.88	19.92	19.86		
20	16QAM	50	0	19.57	19.73	19.67	21	0
20	16QAM	50	24	19.66	19.74	19.71		
20	16QAM	50	50	19.62	19.68	19.79		
20	16QAM	100	0	19.66	19.71	19.64		
20	64QAM	1	0	19.70	19.91	19.96	21	0
20	64QAM	1	49	19.82	19.89	19.95		
20	64QAM	1	99	19.80	19.86	19.57		
20	64QAM	50	0	19.65	19.74	19.71	21	0
20	64QAM	50	24	19.73	19.78	19.72		
20	64QAM	50	50	19.66	19.70	19.81		
20	64QAM	100	0	19.66	19.74	19.66		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.36	19.56	19.52	21	0
15	QPSK	1	37	19.43	19.57	19.60		
15	QPSK	1	74	19.40	19.51	19.68		
15	QPSK	36	0	19.47	19.60	19.54	21	0
15	QPSK	36	20	19.44	19.65	19.57		
15	QPSK	36	39	19.51	19.57	19.60		
15	QPSK	75	0	19.46	19.57	19.54		
15	16QAM	1	0	19.90	19.57	19.94	21	0
15	16QAM	1	37	19.80	19.90	19.68		
15	16QAM	1	74	19.67	19.84	19.73		
15	16QAM	36	0	19.62	19.73	19.61	21	0
15	16QAM	36	20	19.62	19.75	19.69		
15	16QAM	36	39	19.68	19.64	19.80		
15	16QAM	75	0	19.59	19.69	19.63		
15	64QAM	1	0	19.71	19.96	19.67	21	0
15	64QAM	1	37	19.78	19.97	19.94		
15	64QAM	1	74	19.85	19.78	19.67		
15	64QAM	36	0	19.67	19.77	19.73	21	0
15	64QAM	36	20	19.67	19.81	19.78		
15	64QAM	36	39	19.71	19.74	19.83		
15	64QAM	75	0	19.64	19.73	19.69		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.27	19.56	19.64	21	0
10	QPSK	1	25	19.36	19.55	19.62		
10	QPSK	1	49	19.32	19.52	19.68		
10	QPSK	25	0	19.36	19.59	19.62	21	0
10	QPSK	25	12	19.42	19.61	19.64		
10	QPSK	25	25	19.29	19.56	19.59		
10	QPSK	50	0	19.40	19.57	19.63		
10	16QAM	1	0	19.66	19.97	19.87	21	0
10	16QAM	1	25	19.81	19.67	19.57		
10	16QAM	1	49	19.69	19.91	19.68		
10	16QAM	25	0	19.51	19.68	19.80	21	0
10	16QAM	25	12	19.54	19.70	19.82		
10	16QAM	25	25	19.49	19.69	19.78		
10	16QAM	50	0	19.49	19.72	19.74		
10	64QAM	1	0	19.70	19.94	19.96	21	0
10	64QAM	1	25	19.75	19.76	19.78		
10	64QAM	1	49	19.66	19.87	19.68		
10	64QAM	25	0	19.59	19.78	19.84	21	0
10	64QAM	25	12	19.52	19.73	19.79		
10	64QAM	25	25	19.49	19.69	19.80		
10	64QAM	50	0	19.52	19.74	19.82		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.28	19.56	19.65	21	0
5	QPSK	1	12	19.29	19.59	19.60		
5	QPSK	1	24	19.34	19.57	19.68		
5	QPSK	12	0	19.27	19.58	19.62	21	0
5	QPSK	12	7	19.31	19.59	19.66		
5	QPSK	12	13	19.41	19.55	19.59		
5	QPSK	25	0	19.35	19.58	19.60		
5	16QAM	1	0	19.74	19.94	19.56	21	0
5	16QAM	1	12	19.75	19.67	19.65		
5	16QAM	1	24	19.72	19.86	19.98		
5	16QAM	12	0	19.45	19.78	19.74	21	0
5	16QAM	12	7	19.45	19.70	19.82		
5	16QAM	12	13	19.53	19.68	19.79		
5	16QAM	25	0	19.50	19.67	19.79		
5	64QAM	1	0	19.63	19.94	19.95	21	0
5	64QAM	1	12	19.67	19.97	19.97		
5	64QAM	1	24	19.69	19.97	19.73		
5	64QAM	12	0	19.53	19.80	19.81	21	0
5	64QAM	12	7	19.58	19.88	19.93		
5	64QAM	12	13	19.58	19.79	19.86		
5	64QAM	25	0	19.53	19.71	19.78		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.25	19.52	19.64	21	0
3	QPSK	1	8	19.30	19.56	19.71		
3	QPSK	1	14	19.27	19.52	19.67		
3	QPSK	8	0	19.33	19.56	19.65	21	0
3	QPSK	8	4	19.36	19.62	19.69		
3	QPSK	8	7	19.28	19.58	19.74		
3	QPSK	15	0	19.28	19.59	19.64		
3	16QAM	1	0	19.68	19.94	19.53	21	0
3	16QAM	1	8	19.72	19.91	19.97		
3	16QAM	1	14	19.55	19.83	19.69		
3	16QAM	8	0	19.49	19.78	19.81	21	0
3	16QAM	8	4	19.51	19.78	19.90		
3	16QAM	8	7	19.54	19.75	19.67		
3	16QAM	15	0	19.42	19.69	19.75		
3	64QAM	1	0	19.61	19.94	19.67	21	0
3	64QAM	1	8	19.67	19.86	19.72		
3	64QAM	1	14	19.63	19.86	19.57		
3	64QAM	8	0	19.53	19.82	19.85	21	0
3	64QAM	8	4	19.61	19.86	19.86		
3	64QAM	8	7	19.52	19.77	19.74		
3	64QAM	15	0	19.48	19.72	19.80		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.21	19.48	19.67	21	0
1.4	QPSK	1	3	19.27	19.54	19.70		
1.4	QPSK	1	5	19.21	19.46	19.62		
1.4	QPSK	3	0	19.47	19.54	19.69		
1.4	QPSK	3	1	19.41	19.57	19.78		
1.4	QPSK	3	3	19.28	19.55	19.71	21	0
1.4	QPSK	6	0	19.25	19.52	19.72	21	0
1.4	16QAM	1	0	19.65	19.80	19.58		
1.4	16QAM	1	3	19.70	19.93	19.93		
1.4	16QAM	1	5	19.68	19.78	19.86		
1.4	16QAM	3	0	19.47	19.66	19.85		
1.4	16QAM	3	1	19.49	19.60	19.83		
1.4	16QAM	3	3	19.42	19.64	19.89	21	0
1.4	16QAM	6	0	19.56	19.70	19.92	21	0
1.4	64QAM	1	0	19.65	19.84	19.76		
1.4	64QAM	1	3	19.66	19.87	19.90		
1.4	64QAM	1	5	19.66	19.83	19.56		
1.4	64QAM	3	0	19.55	19.85	19.58		
1.4	64QAM	3	1	19.67	19.84	19.75		
1.4	64QAM	3	3	19.67	19.80	19.95		
1.4	64QAM	6	0	19.41	19.67	19.84	21	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.27	21.54	21.43	22.5	0
20	QPSK	1	49	21.25	21.23	21.29		
20	QPSK	1	99	21.25	21.17	21.35		
20	QPSK	50	0	21.33	21.29	21.42	22.5	0
20	QPSK	50	24	21.34	21.51	21.50		
20	QPSK	50	50	21.28	21.25	21.37		
20	QPSK	100	0	21.31	21.45	21.44	22.5	0
20	16QAM	1	0	21.49	21.53	21.25		
20	16QAM	1	49	21.23	21.45	21.25		
20	16QAM	1	99	21.50	21.14	21.10	22	0.5
20	16QAM	50	0	21.38	21.41	21.21		
20	16QAM	50	24	21.42	21.38	21.24		
20	16QAM	50	50	21.38	21.35	21.23	22	0.5
20	16QAM	100	0	21.35	21.34	21.50		
20	64QAM	1	0	21.51	21.48	21.13		
20	64QAM	1	49	21.25	21.47	21.14	22	0.5
20	64QAM	1	99	21.20	21.37	21.52		
20	64QAM	50	0	20.80	20.78	20.96		
20	64QAM	50	24	20.76	20.79	20.97	21	1.5
20	64QAM	50	50	20.77	20.68	20.83		
20	64QAM	100	0	20.74	20.70	20.92		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.30	21.26	21.41	22.5	0
15	QPSK	1	37	21.25	21.15	21.27		
15	QPSK	1	74	21.29	21.22	21.36		
15	QPSK	36	0	21.31	21.30	21.42	22.5	0
15	QPSK	36	20	21.31	21.27	21.37		
15	QPSK	36	39	21.33	21.24	21.33		
15	QPSK	75	0	21.29	21.28	21.46	22.5	0
15	16QAM	1	0	21.23	21.50	21.34		
15	16QAM	1	37	21.23	21.23	21.26		
15	16QAM	1	74	21.24	21.20	21.23	22	0.5
15	16QAM	36	0	21.37	21.32	21.53		
15	16QAM	36	20	21.37	21.36	21.44		
15	16QAM	36	39	21.35	21.32	21.40	22	0.5
15	16QAM	75	0	21.35	21.31	21.43		
15	64QAM	1	0	21.50	21.13	21.23		
15	64QAM	1	37	21.47	21.50	21.51	22	0.5
15	64QAM	1	74	21.52	21.51	21.10		
15	64QAM	36	0	20.79	20.76	20.96		
15	64QAM	36	20	20.78	20.72	20.87	21	1.5
15	64QAM	36	39	20.77	20.71	20.82		
15	64QAM	75	0	20.77	20.72	20.95		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.30	21.21	21.30	22.5	0
10	QPSK	1	25	21.27	21.19	21.30		
10	QPSK	1	49	21.25	21.27	21.37		
10	QPSK	25	0	21.31	21.20	21.34	22.5	0
10	QPSK	25	12	21.29	21.23	21.37		
10	QPSK	25	25	21.31	21.22	21.34		
10	QPSK	50	0	21.31	21.24	21.32	22.5	0
10	16QAM	1	0	21.14	21.49	21.23		
10	16QAM	1	25	21.20	21.15	21.14		
10	16QAM	1	49	21.52	21.48	21.21	22	0.5
10	16QAM	25	0	21.36	21.34	21.42		
10	16QAM	25	12	21.38	21.34	21.42		
10	16QAM	25	25	21.41	21.29	21.43	22	0.5
10	16QAM	50	0	21.39	21.28	21.43		
10	64QAM	1	0	21.15	21.14	21.12		
10	64QAM	1	25	21.14	21.15	21.20	22	0.5
10	64QAM	1	49	21.12	21.50	21.25		
10	64QAM	25	0	20.77	20.72	20.81		
10	64QAM	25	12	20.78	20.69	20.84	21	1.5
10	64QAM	25	25	20.79	20.69	20.83		
10	64QAM	50	0	20.79	20.74	20.83		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.24	21.21	21.33	22.5	0
5	QPSK	1	12	21.24	21.19	21.31		
5	QPSK	1	24	21.23	21.18	21.30		
5	QPSK	12	0	21.29	21.22	21.36	22.5	0
5	QPSK	12	7	21.30	21.27	21.39		
5	QPSK	12	13	21.32	21.25	21.35		
5	QPSK	25	0	21.31	21.20	21.38	22.5	0
5	16QAM	1	0	21.51	21.53	21.14		
5	16QAM	1	12	21.53	21.45	21.12		
5	16QAM	1	24	21.45	21.53	21.24	22	0.5
5	16QAM	12	0	21.32	21.29	21.42		
5	16QAM	12	7	21.36	21.32	21.50		
5	16QAM	12	13	21.37	21.30	21.40	22	0.5
5	16QAM	25	0	21.33	21.33	21.43		
5	64QAM	1	0	21.47	21.10	21.15		
5	64QAM	1	12	21.43	21.38	21.12	22	0.5
5	64QAM	1	24	21.47	21.46	21.10		
5	64QAM	12	0	20.76	20.75	20.89		
5	64QAM	12	7	20.79	20.73	20.90	21	1.5
5	64QAM	12	13	20.78	20.75	20.88		
5	64QAM	25	0	20.73	20.67	20.84		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

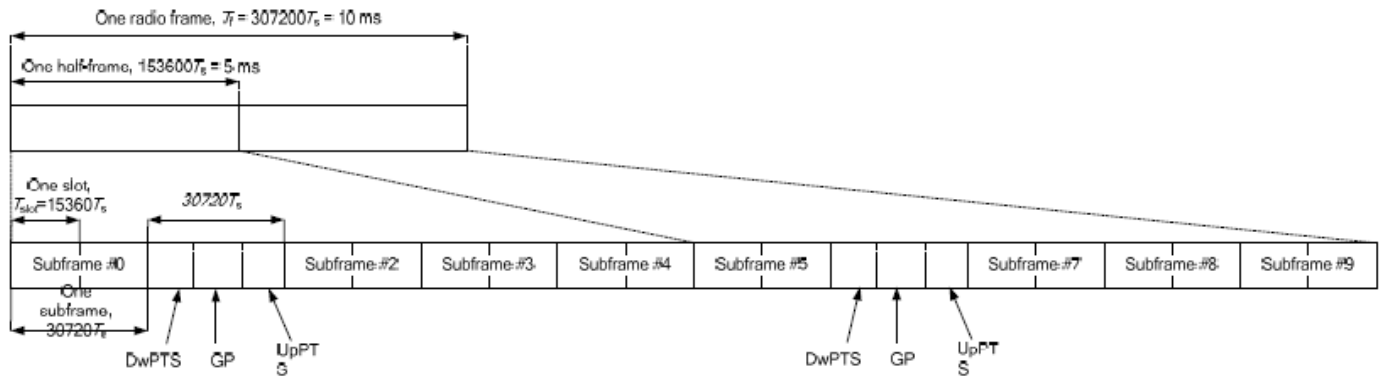


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts	4384 · Ts	5120 · Ts	7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts			20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-		
9	13168 · Ts	-	-	-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE Band 41 Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.64	22.79	22.60	24	0
20	QPSK	1	49	22.55	22.61	22.68		
20	QPSK	1	99	22.78	22.63	22.77		
20	QPSK	50	0	21.78	22.11	22.09	23	1
20	QPSK	50	24	21.82	21.83	21.88		
20	QPSK	50	50	21.79	21.83	21.97		
20	QPSK	100	0	21.85	21.93	21.92	23	1
20	16QAM	1	0	21.64	21.64	21.77		
20	16QAM	1	49	21.57	21.68	21.83		
20	16QAM	1	99	21.75	21.69	21.90	22	2
20	16QAM	50	0	20.89	20.92	21.08		
20	16QAM	50	24	20.95	20.93	21.08		
20	16QAM	50	50	20.95	20.75	20.96	22	2
20	16QAM	100	0	20.82	20.80	20.94		
20	64QAM	1	0	21.48	21.44	21.59		
20	64QAM	1	49	21.41	21.39	21.55	22	2
20	64QAM	1	99	21.49	21.50	21.70		
20	64QAM	50	0	19.92	20.07	20.24		
20	64QAM	50	24	20.08	19.99	20.15	21	3
20	64QAM	50	50	20.08	19.90	20.12		
20	64QAM	100	0	20.35	20.34	20.40		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.60	22.61	22.71	24	0
15	QPSK	1	37	22.63	22.67	22.64		
15	QPSK	1	74	22.64	22.79	22.76		
15	QPSK	36	0	21.79	21.77	21.86	23	1
15	QPSK	36	20	21.85	21.77	21.92		
15	QPSK	36	39	21.85	21.69	21.81		
15	QPSK	75	0	21.82	21.83	21.89	23	1
15	16QAM	1	0	21.70	21.65	21.83		
15	16QAM	1	37	21.66	21.72	21.68		
15	16QAM	1	74	21.77	21.76	21.90	22	2
15	16QAM	36	0	20.84	20.73	20.83		
15	16QAM	36	20	20.81	20.74	20.98		
15	16QAM	36	39	20.80	20.76	20.89	22	2
15	16QAM	75	0	20.93	20.85	21.00		
15	64QAM	1	0	20.80	20.59	20.87		
15	64QAM	1	37	20.84	20.74	20.70	22	2
15	64QAM	1	74	20.67	20.78	20.90		
15	64QAM	36	0	20.19	20.18	20.37		
15	64QAM	36	20	20.25	20.27	20.33	21	3
15	64QAM	36	39	20.24	20.30	20.33		
15	64QAM	75	0	20.34	20.26	20.42		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.68	22.64	22.72	24	0
10	QPSK	1	25	22.67	22.77	22.79		
10	QPSK	1	49	22.69	22.69	22.78		
10	QPSK	25	0	21.73	21.73	21.78	23	1
10	QPSK	25	12	21.71	21.74	21.89		
10	QPSK	25	25	21.80	21.85	21.91		
10	QPSK	50	0	21.78	21.71	21.96		
10	16QAM	1	0	21.81	21.71	21.89	23	1
10	16QAM	1	25	21.80	21.68	21.83		
10	16QAM	1	49	21.70	21.66	21.86		
10	16QAM	25	0	20.84	20.76	21.00	22	2
10	16QAM	25	12	20.83	20.77	20.91		
10	16QAM	25	25	20.92	20.88	21.02		
10	16QAM	50	0	20.88	20.92	20.88		
10	64QAM	1	0	20.80	20.64	20.82	22	2
10	64QAM	1	25	20.69	20.61	20.84		
10	64QAM	1	49	20.62	20.69	20.88		
10	64QAM	25	0	20.20	20.12	20.27	21	3
10	64QAM	25	12	20.19	20.23	20.28		
10	64QAM	25	25	20.28	20.15	20.30		
10	64QAM	50	0	20.14	20.28	20.33		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.63	22.68	22.72	24	0
5	QPSK	1	12	22.63	22.66	22.72		
5	QPSK	1	24	22.59	22.65	22.75		
5	QPSK	12	0	21.71	21.72	21.96	23	1
5	QPSK	12	7	21.80	21.74	21.98		
5	QPSK	12	13	21.73	21.77	21.99		
5	QPSK	25	0	21.73	21.67	21.90		
5	16QAM	1	0	21.72	21.64	21.87	23	1
5	16QAM	1	12	21.67	21.74	21.90		
5	16QAM	1	24	21.78	21.77	21.97		
5	16QAM	12	0	20.76	20.78	21.01	22	2
5	16QAM	12	7	20.87	20.80	21.04		
5	16QAM	12	13	20.79	20.75	21.06		
5	16QAM	25	0	20.77	20.81	21.13		
5	64QAM	1	0	20.64	20.69	20.93	22	2
5	64QAM	1	12	20.75	20.76	20.92		
5	64QAM	1	24	20.77	20.70	20.99		
5	64QAM	12	0	20.17	20.19	20.43	21	3
5	64QAM	12	7	20.18	20.22	20.46		
5	64QAM	12	13	20.19	20.16	20.37		
5	64QAM	25	0	20.22	20.16	20.39		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	22.71	22.91	22.64	22.56	24	0
20	QPSK	1	49	22.76	22.77	22.58	22.50		
20	QPSK	1	99	22.81	22.73	22.71	22.58		
20	QPSK	50	0	21.68	21.93	21.88	21.58	23	1
20	QPSK	50	24	21.85	21.92	21.90	21.60		
20	QPSK	50	50	21.85	21.84	21.79	21.75		
20	QPSK	100	0	21.82	21.92	21.69	21.66	23	1
20	16QAM	1	0	21.94	22.00	21.71	21.68		
20	16QAM	1	49	21.88	21.90	21.73	21.74		
20	16QAM	1	99	21.95	21.87	21.77	21.65	22	2
20	16QAM	50	0	20.87	21.00	20.85	20.78		
20	16QAM	50	24	20.95	21.02	20.90	20.72		
20	16QAM	50	50	20.85	20.85	20.89	20.77	22	2
20	16QAM	100	0	20.92	21.04	20.89	20.79		
20	64QAM	1	0	20.94	21.01	20.74	20.69		
20	64QAM	1	49	20.87	20.91	20.77	20.75	22	2
20	64QAM	1	99	20.93	20.88	20.80	20.65		
20	64QAM	50	0	20.16	20.06	19.95	19.86		
20	64QAM	50	24	20.12	20.20	20.08	19.90	21	3
20	64QAM	50	50	20.13	20.12	19.98	20.05		
20	64QAM	100	0	20.20	20.13	20.17	20.07		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	22.68	22.87	22.79	22.65	24	0
15	QPSK	1	37	22.70	22.80	22.68	22.66		
15	QPSK	1	74	22.77	22.86	22.77	22.72		
15	QPSK	36	0	21.71	21.86	21.79	21.70	23	1
15	QPSK	36	20	21.76	21.88	21.75	21.72		
15	QPSK	36	39	21.73	21.92	21.77	21.72		
15	QPSK	75	0	21.71	21.90	21.79	21.69	23	1
15	16QAM	1	0	21.82	22.01	21.83	21.76		
15	16QAM	1	37	21.82	21.92	21.75	21.78		
15	16QAM	1	74	21.90	22.00	21.82	21.88	22	2
15	16QAM	36	0	20.80	20.94	20.76	20.76		
15	16QAM	36	20	20.82	20.97	20.82	20.79		
15	16QAM	36	39	20.82	20.94	20.82	20.78	22	2
15	16QAM	75	0	20.84	20.99	20.89	20.81		
15	64QAM	1	0	20.82	21.02	20.88	20.79		
15	64QAM	1	37	20.81	20.92	20.80	20.76	22	2
15	64QAM	1	74	20.88	21.00	20.86	20.84		
15	64QAM	36	0	20.08	20.17	20.04	20.04		
15	64QAM	36	20	20.10	20.22	20.10	20.05	21	3
15	64QAM	36	39	20.07	20.20	20.07	20.04		
15	64QAM	75	0	20.09	20.24	20.11	20.06		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	22.64	22.73	22.73	22.59	24	0
10	QPSK	1	25	22.68	22.77	22.67	22.62		
10	QPSK	1	49	22.72	22.85	22.75	22.67		
10	QPSK	25	0	21.69	21.82	21.76	21.66	23	1
10	QPSK	25	12	21.70	21.86	21.76	21.71		
10	QPSK	25	25	21.73	21.84	21.77	21.69		
10	QPSK	50	0	21.73	21.85	21.78	21.71	23	1
10	16QAM	1	0	21.79	21.87	21.78	21.71		
10	16QAM	1	25	21.82	21.89	21.72	21.73		
10	16QAM	1	49	21.77	21.89	21.73	21.75	22	2
10	16QAM	25	0	20.79	20.94	20.78	20.75		
10	16QAM	25	12	20.86	20.92	20.83	20.80		
10	16QAM	25	25	20.80	20.96	20.83	20.81	22	2
10	16QAM	50	0	20.83	20.96	20.86	20.78		
10	64QAM	1	0	20.79	20.88	20.85	20.73		
10	64QAM	1	25	20.74	20.91	20.78	20.75	22	2
10	64QAM	1	49	20.78	20.93	20.79	20.78		
10	64QAM	25	0	19.99	20.14	19.97	19.96		
10	64QAM	25	12	20.07	20.13	20.03	19.98	21	3
10	64QAM	25	25	20.00	20.14	20.00	19.98		
10	64QAM	50	0	20.00	20.13	20.05	19.96		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	22.60	22.72	22.66	22.59	24	0
5	QPSK	1	12	22.64	22.74	22.66	22.64		
5	QPSK	1	24	22.61	22.75	22.65	22.60		
5	QPSK	12	0	21.68	21.81	21.71	21.68	23	1
5	QPSK	12	7	21.71	21.86	21.79	21.71		
5	QPSK	12	13	21.69	21.85	21.76	21.69		
5	QPSK	25	0	21.66	21.83	21.74	21.67	23	1
5	16QAM	1	0	21.70	21.83	21.71	21.72		
5	16QAM	1	12	21.80	21.92	21.72	21.72		
5	16QAM	1	24	21.77	21.87	21.74	21.73	22	2
5	16QAM	12	0	20.76	20.88	20.77	20.72		
5	16QAM	12	7	20.77	20.90	20.78	20.78		
5	16QAM	12	13	20.76	20.91	20.76	20.75	22	2
5	16QAM	25	0	20.82	20.94	20.80	20.78		
5	64QAM	1	0	20.72	20.87	20.73	20.73		
5	64QAM	1	12	20.79	20.91	20.78	20.74	22	2
5	64QAM	1	24	20.75	20.88	20.79	20.77		
5	64QAM	12	0	20.00	20.12	19.99	19.96		
5	64QAM	12	7	19.99	20.15	20.03	19.99	21	3
5	64QAM	12	13	19.99	20.14	20.01	19.98		
5	64QAM	25	0	20.00	20.12	19.98	19.96		



<Reduced Power Mode for P-Sensor On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.01	21.37	21.17		
20	QPSK	1	49	20.95	21.02	21.20	21.5	0
20	QPSK	1	99	21.07	21.05	21.25		
20	QPSK	50	0	21.10	21.34	21.30		
20	QPSK	50	24	21.11	21.13	21.29	21.5	0
20	QPSK	50	50	21.13	21.16	21.33		
20	QPSK	100	0	21.06	21.32	21.31		
20	16QAM	1	0	21.13	20.99	21.19	21.5	0
20	16QAM	1	49	21.05	21.09	21.24		
20	16QAM	1	99	21.09	21.08	21.27		
20	16QAM	50	0	20.68	20.71	20.91	21.5	0
20	16QAM	50	24	20.68	20.71	20.85		
20	16QAM	50	50	20.72	20.72	20.89		
20	16QAM	100	0	20.67	20.66	20.82	21.5	0
20	64QAM	1	0	20.88	20.76	20.97		
20	64QAM	1	49	20.81	20.86	21.02		
20	64QAM	1	99	20.88	20.87	21.05	21.5	0
20	64QAM	50	0	20.31	20.31	20.17		
20	64QAM	50	24	20.30	20.30	20.11		
20	64QAM	50	50	20.30	20.32	20.11	21	0.5
20	64QAM	100	0	20.35	20.35	20.18		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	21.02	20.90	21.21	21.5	0
15	QPSK	1	37	21.05	21.05	21.14		
15	QPSK	1	74	21.04	21.11	21.33		
15	QPSK	36	0	21.07	21.05	21.26	21.5	0
15	QPSK	36	20	21.11	21.13	21.28		
15	QPSK	36	39	21.11	21.08	21.25		
15	QPSK	75	0	21.05	21.09	21.26	21.5	0
15	16QAM	1	0	21.15	21.00	21.24		
15	16QAM	1	37	21.18	21.05	21.18		
15	16QAM	1	74	21.08	21.16	21.32	21.5	0
15	16QAM	36	0	20.60	20.60	20.76		
15	16QAM	36	20	20.66	20.61	20.81		
15	16QAM	36	39	20.65	20.58	20.78	21.5	0
15	16QAM	75	0	20.67	20.66	20.83		
15	64QAM	1	0	20.93	20.78	21.00		
15	64QAM	1	37	20.93	20.85	20.95	21.5	0
15	64QAM	1	74	20.81	20.92	21.10		
15	64QAM	36	0	20.30	20.29	20.25		
15	64QAM	36	20	20.35	20.31	20.27	21	0.5
15	64QAM	36	39	20.32	20.26	20.25		
15	64QAM	75	0	20.34	20.34	20.27		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.99	21.01	21.18	21.5	0
10	QPSK	1	25	21.00	21.03	21.24		
10	QPSK	1	49	20.97	20.95	21.27		
10	QPSK	25	0	21.05	21.06	21.24	21.5	0
10	QPSK	25	12	21.09	21.10	21.26		
10	QPSK	25	25	21.08	21.08	21.26		
10	QPSK	50	0	21.13	21.11	21.28	21.5	0
10	16QAM	1	0	21.10	21.08	21.24		
10	16QAM	1	25	21.10	21.10	21.24		
10	16QAM	1	49	21.03	20.99	21.27	21.5	0
10	16QAM	25	0	20.64	20.64	20.79		
10	16QAM	25	12	20.69	20.66	20.83		
10	16QAM	25	25	20.65	20.65	20.83	21.5	0
10	16QAM	50	0	20.68	20.64	20.85		
10	64QAM	1	0	20.86	20.86	21.03		
10	64QAM	1	25	20.86	20.88	21.02	21.5	0
10	64QAM	1	49	20.80	20.77	21.05		
10	64QAM	25	0	20.25	20.25	20.25		
10	64QAM	25	12	20.30	20.28	20.03	21	0.5
10	64QAM	25	25	20.27	20.27	20.12		
10	64QAM	50	0	20.28	20.26	19.92		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.05	21.03	21.05	21.5	0
5	QPSK	1	12	21.08	21.01	21.24		
5	QPSK	1	24	21.06	20.97	21.04		
5	QPSK	12	0	21.03	21.03	21.01	21.5	0
5	QPSK	12	7	21.09	21.07	21.29		
5	QPSK	12	13	21.09	21.05	21.35		
5	QPSK	25	0	21.09	21.05	21.30	21.5	0
5	16QAM	1	0	21.12	21.06	21.28		
5	16QAM	1	12	21.17	21.09	21.33		
5	16QAM	1	24	21.16	21.11	21.35	21.5	0
5	16QAM	12	0	20.61	20.57	20.83		
5	16QAM	12	7	20.63	20.61	20.88		
5	16QAM	12	13	20.64	20.57	20.86	21.5	0
5	16QAM	25	0	20.68	20.63	20.90		
5	64QAM	1	0	20.90	20.85	21.10		
5	64QAM	1	12	20.92	20.87	21.13	21.5	0
5	64QAM	1	24	20.94	20.88	21.12		
5	64QAM	12	0	20.28	20.24	20.12		
5	64QAM	12	7	20.30	20.27	20.03	21	0.5
5	64QAM	12	13	20.30	20.24	20.11		
5	64QAM	25	0	20.25	20.24	20.03		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	21.13	21.39	21.05	20.92	21.5	0
20	QPSK	1	49	21.07	21.18	21.05	20.94		
20	QPSK	1	99	21.04	21.11	21.08	20.94		
20	QPSK	50	0	21.10	21.29	21.16	20.98	21.5	0
20	QPSK	50	24	21.16	21.28	21.16	21.01		
20	QPSK	50	50	21.14	21.16	21.18	21.01		
20	QPSK	100	0	21.13	21.26	21.14	21.02	21.5	0
20	16QAM	1	0	21.14	21.38	21.10	21.08		
20	16QAM	1	49	21.19	21.34	21.14	21.11		
20	16QAM	1	99	21.24	21.17	21.14	21.05	21.5	0
20	16QAM	50	0	20.72	20.83	20.71	20.62		
20	16QAM	50	24	20.73	20.84	20.72	20.65		
20	16QAM	50	50	20.76	20.73	20.73	20.61	21.5	0
20	16QAM	100	0	20.72	20.82	20.72	20.61		
20	64QAM	1	0	20.87	21.13	20.85	20.82		
20	64QAM	1	49	20.92	21.06	20.90	20.83	21.5	0
20	64QAM	1	99	20.94	20.94	20.89	20.86		
20	64QAM	50	0	20.41	20.52	20.41	20.34		
20	64QAM	50	24	20.43	20.56	20.42	20.34	21	0.5
20	64QAM	50	50	20.44	20.43	20.42	20.37		
20	64QAM	100	0	20.51	20.62	20.54	20.43		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	20.94	21.25	21.17	20.94	21.5	0
15	QPSK	1	37	20.96	21.19	21.04	20.92		
15	QPSK	1	74	21.05	21.20	21.12	20.96		
15	QPSK	36	0	20.98	21.17	21.08	20.98	21.5	0
15	QPSK	36	20	21.01	21.21	21.12	21.00		
15	QPSK	36	39	20.98	21.19	21.09	20.97		
15	QPSK	75	0	21.03	21.21	21.10	21.00	21.5	0
15	16QAM	1	0	21.07	21.35	21.22	21.10		
15	16QAM	1	37	21.11	21.25	21.10	21.12		
15	16QAM	1	74	21.14	21.31	21.17	21.12	21.5	0
15	16QAM	36	0	20.52	20.72	20.59	20.58		
15	16QAM	36	20	20.58	20.77	20.65	20.59		
15	16QAM	36	39	20.55	20.74	20.62	20.57	21.5	0
15	16QAM	75	0	20.60	20.78	20.65	20.62		
15	64QAM	1	0	20.85	21.08	20.96	20.84		
15	64QAM	1	37	20.79	20.97	20.91	20.81	21.5	0
15	64QAM	1	74	20.91	21.05	20.94	20.86		
15	64QAM	36	0	20.34	20.52	20.39	20.35		
15	64QAM	36	20	20.37	20.55	20.42	20.36	21	0.5
15	64QAM	36	39	20.35	20.53	20.43	20.35		
15	64QAM	75	0	20.35	20.55	20.41	20.40		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.86	21.09	21.10	20.77	21.5	0
10	QPSK	1	25	20.87	21.14	20.98	20.97		
10	QPSK	1	49	20.89	21.19	21.06	21.01		
10	QPSK	25	0	20.88	21.16	21.02	20.98	21.5	0
10	QPSK	25	12	20.95	21.16	21.07	21.00		
10	QPSK	25	25	20.92	21.18	21.10	21.00		
10	QPSK	50	0	20.93	21.18	21.09	21.01	21.5	0
10	16QAM	1	0	21.02	21.23	21.18	21.10		
10	16QAM	1	25	21.00	21.28	21.10	21.16		
10	16QAM	1	49	21.03	21.21	21.07	21.12	21.5	0
10	16QAM	25	0	20.50	20.77	20.63	20.61		
10	16QAM	25	12	20.55	20.75	20.67	20.66		
10	16QAM	25	25	20.51	20.78	20.62	20.65	21.5	0
10	16QAM	50	0	20.55	20.77	20.66	20.63		
10	64QAM	1	0	20.73	20.97	20.92	20.85		
10	64QAM	1	25	20.76	20.99	20.82	20.84	21.5	0
10	64QAM	1	49	20.75	21.00	20.85	20.89		
10	64QAM	25	0	20.20	20.47	20.32	20.34		
10	64QAM	25	12	20.25	20.48	20.37	20.34	21	0.5
10	64QAM	25	25	20.26	20.48	20.36	20.33		
10	64QAM	50	0	20.24	20.48	20.36	20.32		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.89	21.04	20.99	21.09	21.5	0
5	QPSK	1	12	20.99	20.91	21.03	21.03		
5	QPSK	1	24	20.95	20.89	20.98	20.96		
5	QPSK	12	0	20.94	21.02	21.04	21.02	21.5	0
5	QPSK	12	7	21.01	21.01	20.91	21.03		
5	QPSK	12	13	21.00	21.00	21.08	21.02		
5	QPSK	25	0	20.94	20.89	21.05	21.02	21.5	0
5	16QAM	1	0	21.03	20.94	21.03	21.07		
5	16QAM	1	12	20.91	21.05	21.09	20.91		
5	16QAM	1	24	21.04	21.04	21.09	20.98	21.5	0
5	16QAM	12	0	20.50	20.70	20.57	20.58		
5	16QAM	12	7	20.56	20.75	20.62	20.61		
5	16QAM	12	13	20.52	20.71	20.60	20.61	21.5	0
5	16QAM	25	0	20.56	20.77	20.63	20.64		
5	64QAM	1	0	20.78	20.95	20.83	20.86		
5	64QAM	1	12	20.86	21.02	20.85	20.90	21.5	0
5	64QAM	1	24	20.80	20.98	20.88	20.81		
5	64QAM	12	0	20.23	20.45	20.32	20.33		
5	64QAM	12	7	20.31	20.52	20.39	20.38	21	0.5
5	64QAM	12	13	20.30	20.48	20.36	20.35		
5	64QAM	25	0	20.27	20.46	20.33	20.36		



<Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	21.01	21.37	21.17		
20	QPSK	1	49	20.95	21.02	21.20	21.5	0
20	QPSK	1	99	21.07	21.05	21.25		
20	QPSK	50	0	21.10	21.34	21.30		
20	QPSK	50	24	21.11	21.13	21.29	21.5	0
20	QPSK	50	50	21.13	21.16	21.33		
20	QPSK	100	0	21.06	21.32	21.31		
20	16QAM	1	0	21.13	20.99	21.19	21.5	0
20	16QAM	1	49	21.05	21.09	21.24		
20	16QAM	1	99	21.09	21.08	21.27		
20	16QAM	50	0	20.68	20.71	20.91	21.5	0
20	16QAM	50	24	20.68	20.71	20.85		
20	16QAM	50	50	20.72	20.72	20.89		
20	16QAM	100	0	20.67	20.66	20.82	21.5	0
20	64QAM	1	0	20.88	20.76	20.97		
20	64QAM	1	49	20.81	20.86	21.02		
20	64QAM	1	99	20.88	20.87	21.05	21.5	0
20	64QAM	50	0	20.31	20.31	20.17		
20	64QAM	50	24	20.30	20.30	20.11		
20	64QAM	50	50	20.30	20.32	20.11	21	0.5
20	64QAM	100	0	20.35	20.35	20.18		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	21.02	20.90	21.21	21.5	0
15	QPSK	1	37	21.05	21.05	21.14		
15	QPSK	1	74	21.04	21.11	21.33		
15	QPSK	36	0	21.07	21.05	21.26	21.5	0
15	QPSK	36	20	21.11	21.13	21.28		
15	QPSK	36	39	21.11	21.08	21.25		
15	QPSK	75	0	21.05	21.09	21.26	21.5	0
15	16QAM	1	0	21.15	21.00	21.24		
15	16QAM	1	37	21.18	21.05	21.18		
15	16QAM	1	74	21.08	21.16	21.32	21.5	0
15	16QAM	36	0	20.60	20.60	20.76		
15	16QAM	36	20	20.66	20.61	20.81		
15	16QAM	36	39	20.65	20.58	20.78	21.5	0
15	16QAM	75	0	20.67	20.66	20.83		
15	64QAM	1	0	20.93	20.78	21.00		
15	64QAM	1	37	20.93	20.85	20.95	21.5	0
15	64QAM	1	74	20.81	20.92	21.10		
15	64QAM	36	0	20.30	20.29	20.25		
15	64QAM	36	20	20.35	20.31	20.27	21	0.5
15	64QAM	36	39	20.32	20.26	20.25		
15	64QAM	75	0	20.34	20.34	20.27		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.99	21.01	21.18	21.5	0
10	QPSK	1	25	21.00	21.03	21.24		
10	QPSK	1	49	20.97	20.95	21.27		
10	QPSK	25	0	21.05	21.06	21.24	21.5	0
10	QPSK	25	12	21.09	21.10	21.26		
10	QPSK	25	25	21.08	21.08	21.26		
10	QPSK	50	0	21.13	21.11	21.28		
10	16QAM	1	0	21.10	21.08	21.24	21.5	0
10	16QAM	1	25	21.10	21.10	21.24		
10	16QAM	1	49	21.03	20.99	21.27		
10	16QAM	25	0	20.64	20.64	20.79	21.5	0
10	16QAM	25	12	20.69	20.66	20.83		
10	16QAM	25	25	20.65	20.65	20.83		
10	16QAM	50	0	20.68	20.64	20.85		
10	64QAM	1	0	20.86	20.86	21.03	21.5	0
10	64QAM	1	25	20.86	20.88	21.02		
10	64QAM	1	49	20.80	20.77	21.05		
10	64QAM	25	0	20.25	20.25	20.25	21	0.5
10	64QAM	25	12	20.30	20.28	20.03		
10	64QAM	25	25	20.27	20.27	20.12		
10	64QAM	50	0	20.28	20.26	19.92		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	21.05	21.03	21.05	21.5	0
5	QPSK	1	12	21.08	21.01	21.24		
5	QPSK	1	24	21.06	20.97	21.04		
5	QPSK	12	0	21.03	21.03	21.01	21.5	0
5	QPSK	12	7	21.09	21.07	21.29		
5	QPSK	12	13	21.09	21.05	21.35		
5	QPSK	25	0	21.09	21.05	21.30		
5	16QAM	1	0	21.12	21.06	21.28	21.5	0
5	16QAM	1	12	21.17	21.09	21.33		
5	16QAM	1	24	21.16	21.11	21.35		
5	16QAM	12	0	20.61	20.57	20.83	21.5	0
5	16QAM	12	7	20.63	20.61	20.88		
5	16QAM	12	13	20.64	20.57	20.86		
5	16QAM	25	0	20.68	20.63	20.90		
5	64QAM	1	0	20.90	20.85	21.10	21.5	0
5	64QAM	1	12	20.92	20.87	21.13		
5	64QAM	1	24	20.94	20.88	21.12		
5	64QAM	12	0	20.28	20.24	20.12	21	0.5
5	64QAM	12	7	20.30	20.27	20.03		
5	64QAM	12	13	20.30	20.24	20.11		
5	64QAM	25	0	20.25	20.24	20.03		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	21.13	21.39	21.05	20.92	21.5	0
20	QPSK	1	49	21.07	21.18	21.05	20.94		
20	QPSK	1	99	21.04	21.11	21.08	20.94		
20	QPSK	50	0	21.10	21.29	21.16	20.98	21.5	0
20	QPSK	50	24	21.16	21.28	21.16	21.01		
20	QPSK	50	50	21.14	21.16	21.18	21.01		
20	QPSK	100	0	21.13	21.26	21.14	21.02	21.5	0
20	16QAM	1	0	21.14	21.38	21.10	21.08		
20	16QAM	1	49	21.19	21.34	21.14	21.11		
20	16QAM	1	99	21.24	21.17	21.14	21.05	21.5	0
20	16QAM	50	0	20.72	20.83	20.71	20.62		
20	16QAM	50	24	20.73	20.84	20.72	20.65		
20	16QAM	50	50	20.76	20.73	20.73	20.61	21.5	0
20	16QAM	100	0	20.72	20.82	20.72	20.61		
20	64QAM	1	0	20.87	21.13	20.85	20.82		
20	64QAM	1	49	20.92	21.06	20.90	20.83	21.5	0
20	64QAM	1	99	20.94	20.94	20.89	20.86		
20	64QAM	50	0	20.41	20.52	20.41	20.34		
20	64QAM	50	24	20.43	20.56	20.42	20.34	21	0.5
20	64QAM	50	50	20.44	20.43	20.42	20.37		
20	64QAM	100	0	20.51	20.62	20.54	20.43		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	20.94	21.25	21.17	20.94	21.5	0
15	QPSK	1	37	20.96	21.19	21.04	20.92		
15	QPSK	1	74	21.05	21.20	21.12	20.96		
15	QPSK	36	0	20.98	21.17	21.08	20.98	21.5	0
15	QPSK	36	20	21.01	21.21	21.12	21.00		
15	QPSK	36	39	20.98	21.19	21.09	20.97		
15	QPSK	75	0	21.03	21.21	21.10	21.00	21.5	0
15	16QAM	1	0	21.07	21.35	21.22	21.10		
15	16QAM	1	37	21.11	21.25	21.10	21.12		
15	16QAM	1	74	21.14	21.31	21.17	21.12	21.5	0
15	16QAM	36	0	20.52	20.72	20.59	20.58		
15	16QAM	36	20	20.58	20.77	20.65	20.59		
15	16QAM	36	39	20.55	20.74	20.62	20.57	21.5	0
15	16QAM	75	0	20.60	20.78	20.65	20.62		
15	64QAM	1	0	20.85	21.08	20.96	20.84		
15	64QAM	1	37	20.79	20.97	20.91	20.81	21.5	0
15	64QAM	1	74	20.91	21.05	20.94	20.86		
15	64QAM	36	0	20.34	20.52	20.39	20.35		
15	64QAM	36	20	20.37	20.55	20.42	20.36	21	0.5
15	64QAM	36	39	20.35	20.53	20.43	20.35		
15	64QAM	75	0	20.35	20.55	20.41	20.40		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.86	21.09	21.10	20.77	21.5	0
10	QPSK	1	25	20.87	21.14	20.98	20.97		
10	QPSK	1	49	20.89	21.19	21.06	21.01		
10	QPSK	25	0	20.88	21.16	21.02	20.98	21.5	0
10	QPSK	25	12	20.95	21.16	21.07	21.00		
10	QPSK	25	25	20.92	21.18	21.10	21.00		
10	QPSK	50	0	20.93	21.18	21.09	21.01	21.5	0
10	16QAM	1	0	21.02	21.23	21.18	21.10		
10	16QAM	1	25	21.00	21.28	21.10	21.16		
10	16QAM	1	49	21.03	21.21	21.07	21.12	21.5	0
10	16QAM	25	0	20.50	20.77	20.63	20.61		
10	16QAM	25	12	20.55	20.75	20.67	20.66		
10	16QAM	25	25	20.51	20.78	20.62	20.65	21.5	0
10	16QAM	50	0	20.55	20.77	20.66	20.63		
10	64QAM	1	0	20.73	20.97	20.92	20.85		
10	64QAM	1	25	20.76	20.99	20.82	20.84	21.5	0
10	64QAM	1	49	20.75	21.00	20.85	20.89		
10	64QAM	25	0	20.20	20.47	20.32	20.34		
10	64QAM	25	12	20.25	20.48	20.37	20.34	21	0.5
10	64QAM	25	25	20.26	20.48	20.36	20.33		
10	64QAM	50	0	20.24	20.48	20.36	20.32		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.89	21.04	20.99	21.09	21.5	0
5	QPSK	1	12	20.99	20.91	21.03	21.03		
5	QPSK	1	24	20.95	20.89	20.98	20.96		
5	QPSK	12	0	20.94	21.02	21.04	21.02	21.5	0
5	QPSK	12	7	21.01	21.01	20.91	21.03		
5	QPSK	12	13	21.00	21.00	21.08	21.02		
5	QPSK	25	0	20.94	20.89	21.05	21.02	21.5	0
5	16QAM	1	0	21.03	20.94	21.03	21.07		
5	16QAM	1	12	20.91	21.05	21.09	20.91		
5	16QAM	1	24	21.04	21.04	21.09	20.98	21.5	0
5	16QAM	12	0	20.50	20.70	20.57	20.58		
5	16QAM	12	7	20.56	20.75	20.62	20.61		
5	16QAM	12	13	20.52	20.71	20.60	20.61	21.5	0
5	16QAM	25	0	20.56	20.77	20.63	20.64		
5	64QAM	1	0	20.78	20.95	20.83	20.86		
5	64QAM	1	12	20.86	21.02	20.85	20.90	21.5	0
5	64QAM	1	24	20.80	20.98	20.88	20.81		
5	64QAM	12	0	20.23	20.45	20.32	20.33		
5	64QAM	12	7	20.31	20.52	20.39	20.38	21	0.5
5	64QAM	12	13	20.30	20.48	20.36	20.35		
5	64QAM	25	0	20.27	20.46	20.33	20.36		



<LTE Carrier Aggregation>

General Note:

- 1. This device supports Carrier Aggregation on downlink for intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
- 2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.

Index	2CC
2CC #1	CA_7C
2CC #2	CA_7B
2CC #3	CA_41C
2CC #4	CA_7A-7A
2CC #5	CA_41A-41A

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Full Power Mode>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	Tx. Power (dBm)	Tx. Power (dBm)
			Band	(MHz)	Freq.	Channel		RB	Offset	Band	(MHz)	Freq.	Channel		
					(MHz)							(MHz)			
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	23.17	23.25
		CA_7B	Band 7	15M	2562.5	21375	QPSK	1	74	Band 7	5M	2678.2	3332	23.20	23.24
		CA_41C	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2590.8	40598	22.88	22.91
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	23.12	23.25
		CA_41A-41A	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2652.5	41215	22.90	22.91

<Reduced Power Mode for P-Sensor On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq. (MHz)	Channel		RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	20.00	20.05
		CA_7B	Band 7	15M	2535	21100	16QAM	1	74	Band 7	5M	2664.3	3193	19.99	20.03
		CA_41C	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2590.8	40598	21.15	21.39
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	20.00	20.05
		CA_41A-41A	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2652.5	41215	21.23	21.39

<Reduced Power Mode for Hotspot On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq. (MHz)	Channel		RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	20.00	20.05
		CA_7B	Band 7	15M	2535	21100	16QAM	1	74	Band 7	5M	2664.3	3193	19.99	20.03
		CA_41C	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2590.8	40598	21.15	21.39
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	20.00	20.05
		CA_41A-41A	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2652.5	41215	21.23	21.39

<Reduced Power Mode for Handheld On>

Configure		CA List	PCC							SCC				Power	
			LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
			Band	(MHz)	Freq. (MHz)	Channel		RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	21.44	21.54
		CA_7B	Band 7	15M	2562.5	21375	16QAM	36	0	Band 7	5M	2678.2	3332	21.38	21.53
		CA_41C	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2590.8	40598	22.88	22.91
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	21.41	21.54
		CA_41A-41A	Band 41	20M	2571	40400	QPSK	1	0	Band 41	5M	2652.5	41215	22.90	22.91

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Full Power Mode>

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	18.18	19.00	98.61
		6	2437	18.15	19.00	
		11	2462	18.01	19.00	
	802.11g 6Mbps	1	2412	15.56	16.50	98.26
		6	2437	17.29	18.00	
		11	2462	17.15	18.00	
	802.11n-HT20 MCS0	1	2412	14.29	15.00	98.14
		6	2437	17.11	18.00	
		11	2462	15.71	16.50	

<Reduced Power Mode for Receiver On>


<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	15.72	16.50	98.61
		6	2437	15.67	16.50	
		11	2462	15.64	16.50	
	802.11g 6Mbps	1	2412	15.56	16.50	98.26
		6	2437	14.94	16.50	
		11	2462	14.79	16.50	
	802.11n-HT20 MCS0	1	2412	14.29	15.00	98.14
		6	2437	14.72	16.00	
		11	2462	14.65	16.00	

<2.4GHz Bluetooth>

General Note:


1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.36 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

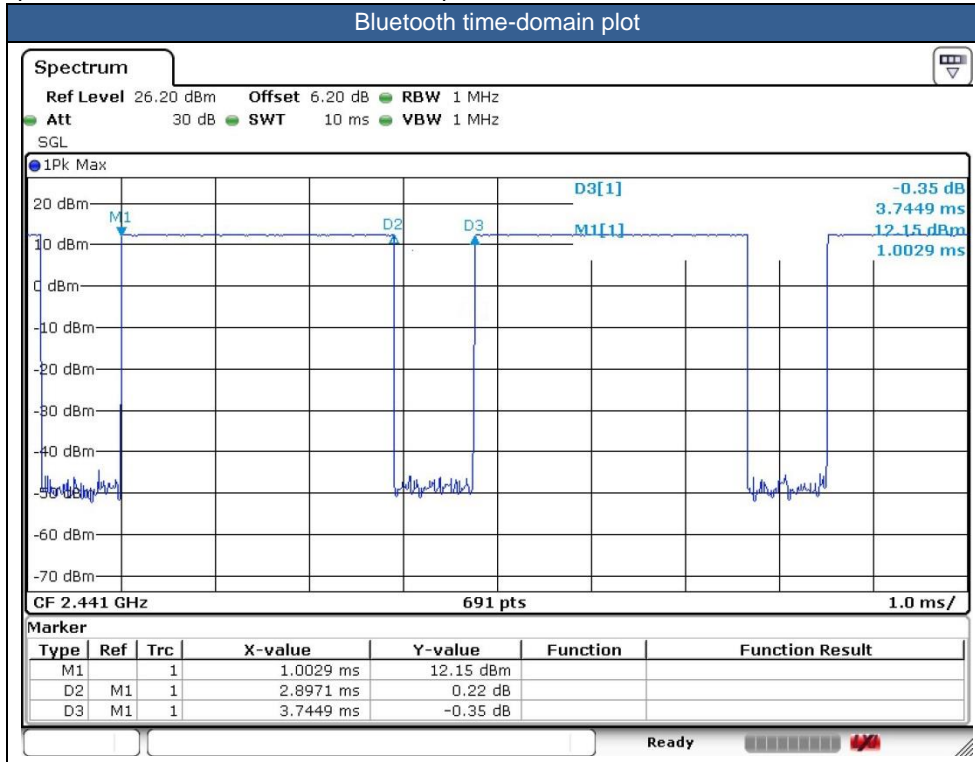

Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	11.09
	CH 39	2441	12.35
	CH 78	2480	10.88
Tune-up limit (dBm)			12.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0 LE	CH 00	2402	2.53
	CH 19	2440	2.66
	CH 39	2480	2.10
Tune-up Limit			3.00

14. Antenna Location

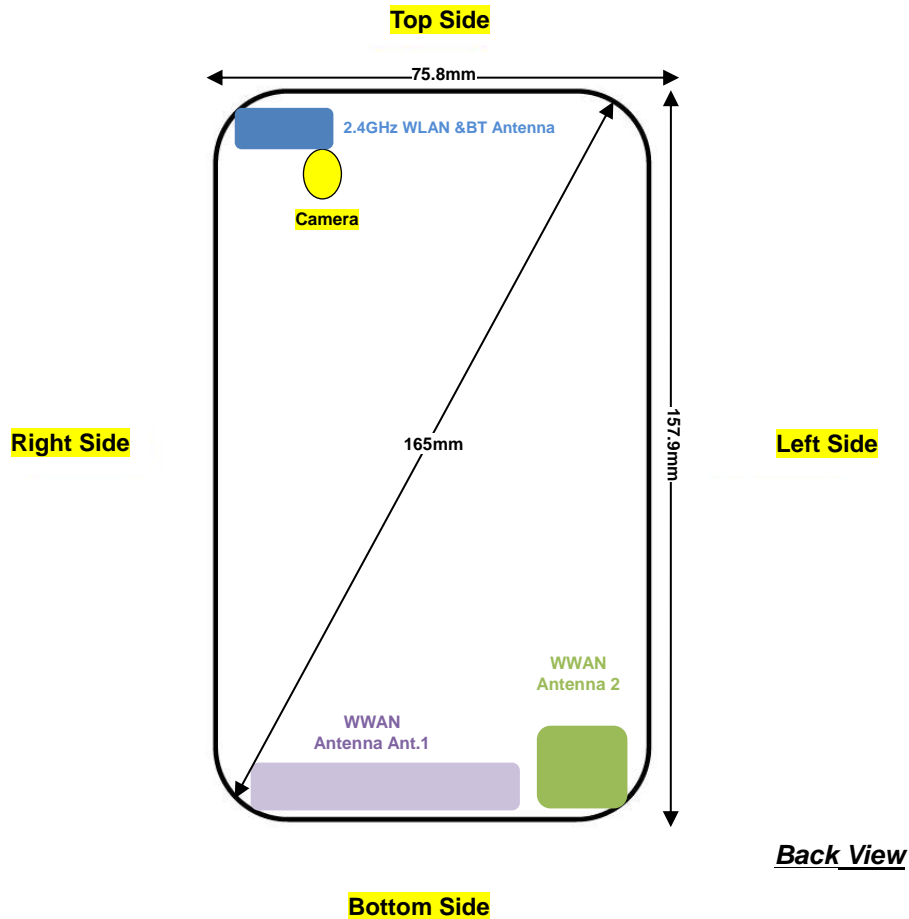

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	No	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	Yes	No

General Note:

1. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, and LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. When headset SAR is less than or equal than without headset SAR, no need to verify the remaining channels for headset SAR.
5. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz.
6. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV and LTE band 2/4/7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
7. P-sensor can detect handheld state, GSM1900, WCDMA band II/IV, and LTE band 2/4/7 for front/back/left/bottom sides of product specific 10g SAR condition reduced powers will be active.
8. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV and LTE band 2/4/7/38/41.
9. For P-sensor reduced power level is higher than hotspot reduced power for GSM1900 · WCDMA band II/IV, LTE band 2/4, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
10. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, and LTE Band 2/4/5/26, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
11. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/7/38/41, therefore product specific 10g SAR is necessary.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is \leq $\frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is \leq $\frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is \leq 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are \leq 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $>$ 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is \leq 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is \leq 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 2 Tx slots	Right Cheek	Full	251	848.8	30.89	31.50	1.151	0.07	0.203	0.234
	GSM850	GPRS 2 Tx slots	Right Tilted	Full	251	848.8	30.89	31.50	1.151	0.09	0.077	0.088
	GSM850	GPRS 2 Tx slots	Left Cheek	Full	251	848.8	30.89	31.50	1.151	0.04	0.161	0.185
	GSM850	GPRS 2 Tx slots	Left Tilted	Full	251	848.8	30.89	31.50	1.151	0.02	0.085	0.098
	GSM1900	GPRS 2 Tx slots	Right Cheek	Full	512	1850.2	27.46	28.50	1.271	0.04	0.024	0.031
	GSM1900	GPRS 2 Tx slots	Right Tilted	Full	512	1850.2	27.46	28.50	1.271	0.08	0.021	0.026
02	GSM1900	GPRS 2 Tx slots	Left Cheek	Full	512	1850.2	27.46	28.50	1.271	0.04	0.044	0.056
	GSM1900	GPRS 2 Tx slots	Left Tilted	Full	512	1850.2	27.46	28.50	1.271	-0.01	0.022	0.028

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	Full	9262	1852.4	22.63	24.00	1.371	0.17	0.058	0.079
	WCDMA II	RMC 12.2Kbps	Right Tilted	Full	9262	1852.4	22.63	24.00	1.371	0.07	0.045	0.061
03	WCDMA II	RMC 12.2Kbps	Left Cheek	Full	9262	1852.4	22.63	24.00	1.371	0.07	0.110	0.151
	WCDMA II	RMC 12.2Kbps	Left Tilted	Full	9262	1852.4	22.63	24.00	1.371	0.11	0.042	0.058
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full	1513	1752.6	22.28	24.00	1.486	0.01	0.078	0.116
	WCDMA IV	RMC 12.2Kbps	Right Tilted	Full	1513	1752.6	22.28	24.00	1.486	0.05	0.037	0.056
	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full	1513	1752.6	22.28	24.00	1.486	0.07	0.051	0.076
	WCDMA IV	RMC 12.2Kbps	Left Tilted	Full	1513	1752.6	22.28	24.00	1.486	0.06	0.037	0.055
05	WCDMA V	RMC 12.2Kbps	Right Cheek	Full	4233	846.6	22.69	24.00	1.352	0.08	0.290	0.392
	WCDMA V	RMC 12.2Kbps	Right Tilted	Full	4233	846.6	22.69	24.00	1.352	0.04	0.115	0.155
	WCDMA V	RMC 12.2Kbps	Left Cheek	Full	4233	846.6	22.69	24.00	1.352	0.01	0.213	0.288
	WCDMA V	RMC 12.2Kbps	Left Tilted	Full	4233	846.6	22.69	24.00	1.352	-0.05	0.126	0.170



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full	26865	831.5	21.70	23.00	1.349	0.07	0.153	0.206
	LTE Band 26	15M	QPSK	36	20	Right Cheek	Full	26865	831.5	21.19	22.00	1.205	0.02	0.102	0.123
	LTE Band 26	15M	QPSK	1	37	Right Tilted	Full	26865	831.5	21.70	23.00	1.349	0.01	0.071	0.095
	LTE Band 26	15M	QPSK	36	20	Right Tilted	Full	26865	831.5	21.19	22.00	1.205	0.02	0.048	0.058
	LTE Band 26	15M	QPSK	1	37	Left Cheek	Full	26865	831.5	21.70	23.00	1.349	0.02	0.135	0.182
	LTE Band 26	15M	QPSK	36	20	Left Cheek	Full	26865	831.5	21.19	22.00	1.205	0.03	0.091	0.110
	LTE Band 26	15M	QPSK	1	37	Left Tilted	Full	26865	831.5	21.70	23.00	1.349	0.01	0.063	0.086
	LTE Band 26	15M	QPSK	36	20	Left Tilted	Full	26865	831.5	21.19	22.00	1.205	0.03	0.045	0.055
07	LTE Band 5	10M	QPSK	1	0	Right Cheek	Full	20525	836.5	22.85	24.00	1.303	0.01	0.255	0.332
	LTE Band 5	10M	QPSK	25	12	Right Cheek	Full	20525	836.5	21.71	23.00	1.346	0.04	0.111	0.149
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Full	20525	836.5	22.85	24.00	1.303	-0.11	0.119	0.155
	LTE Band 5	10M	QPSK	25	12	Right Tilted	Full	20525	836.5	21.71	23.00	1.346	0.1	0.066	0.089
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Full	20525	836.5	22.85	24.00	1.303	0.06	0.202	0.263
	LTE Band 5	10M	QPSK	25	12	Left Cheek	Full	20525	836.5	21.71	23.00	1.346	0.09	0.119	0.160
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Full	20525	836.5	22.85	24.00	1.303	0.04	0.104	0.136
	LTE Band 5	10M	QPSK	25	12	Left Tilted	Full	20525	836.5	21.71	23.00	1.346	0.01	0.059	0.080
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Full	18900	1880	23.03	24.00	1.250	0.03	0.060	0.075
	LTE Band 2	20M	QPSK	50	24	Right Cheek	Full	18900	1880	21.96	23.00	1.271	0.03	0.043	0.054
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Full	18900	1880	23.03	24.00	1.250	0.04	0.010	0.012
	LTE Band 2	20M	QPSK	50	24	Right Tilted	Full	18900	1880	21.96	23.00	1.271	0.07	0.011	0.014
08	LTE Band 2	20M	QPSK	1	0	Left Cheek	Full	18900	1880	23.03	24.00	1.250	0.13	0.121	0.151
	LTE Band 2	20M	QPSK	50	24	Left Cheek	Full	18900	1880	21.96	23.00	1.271	-0.09	0.020	0.026
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Full	18900	1880	23.03	24.00	1.250	-0.04	0.009	0.011
	LTE Band 2	20M	QPSK	50	24	Left Tilted	Full	18900	1880	21.96	23.00	1.271	0.03	0.010	0.012
09	LTE Band 4	20M	QPSK	1	0	Right Cheek	Full	20175	1732.5	22.34	24.00	1.466	0.03	0.097	0.142
	LTE Band 4	20M	QPSK	50	24	Right Cheek	Full	20175	1732.5	21.27	23.00	1.489	0.04	0.036	0.053
	LTE Band 4	20M	QPSK	1	0	Right Tilted	Full	20175	1732.5	22.34	24.00	1.466	0.06	0.029	0.043
	LTE Band 4	20M	QPSK	50	24	Right Tilted	Full	20175	1732.5	21.27	23.00	1.489	-0.07	0.010	0.015
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Full	20175	1732.5	22.34	24.00	1.466	-0.07	0.015	0.021
	LTE Band 4	20M	QPSK	50	24	Left Cheek	Full	20175	1732.5	21.27	23.00	1.489	0.03	0.015	0.023
	LTE Band 4	20M	QPSK	1	0	Left Tilted	Full	20175	1732.5	22.34	24.00	1.466	0.07	0.009	0.014
	LTE Band 4	20M	QPSK	50	24	Left Tilted	Full	20175	1732.5	21.27	23.00	1.489	-0.09	0.010	0.015
10	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	21100	2535	23.25	24.00	1.189	0.01	0.335	0.398
	LTE Band 7	20M	QPSK	50	24	Right Cheek	Full	21100	2535	22.71	23.00	1.069	0.02	0.229	0.245
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Full	21100	2535	23.25	24.00	1.189	0.01	0.289	0.343
	LTE Band 7	20M	QPSK	50	24	Right Tilted	Full	21100	2535	22.71	23.00	1.069	0.02	0.204	0.218
10	LTE Band 7	20M	QPSK	1	0	Left Cheek	Full	21100	2535	23.25	24.00	1.189	0.02	0.474	0.563
	LTE Band 7	20M	QPSK	50	24	Left Cheek	Full	21100	2535	22.71	23.00	1.069	-0.01	0.331	0.354
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Full	21100	2535	23.25	24.00	1.189	0.03	0.170	0.202
	LTE Band 7	20M	QPSK	50	24	Left Tilted	Full	21100	2535	22.71	23.00	1.069	0.02	0.124	0.133



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	0.02	0.212	0.274
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.03	0.141	0.181
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	0.02	0.182	0.235
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.06	0.123	0.158
11	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	0.01	0.296	0.383
	LTE Band 41	20M	QPSK	50	0	Left Cheek	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.01	0.196	0.252
	LTE Band 41	20M	QPSK	1	0	Left Tilted	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	0.02	0.101	0.131
	LTE Band 41	20M	QPSK	50	0	Left Tilted	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.02	0.069	0.088

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	0.07	0.438	0.532
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	-0.1	0.395	0.479
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	0.06	0.868	1.053
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	6	2437	15.67	16.50	1.211	98.61	1.014	0.07	0.802	0.984
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	0.01	0.818	0.993
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	6	2437	15.67	16.50	1.211	98.61	1.014	0.05	0.849	1.042

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Full	39	2441	12.35	12.50	1.035	77.36	1.077	0.09	0.087	0.097
	Bluetooth	1Mbps	Right Tilted	Full	39	2441	12.35	12.50	1.035	77.36	1.077	0.04	0.094	0.104
13	Bluetooth	1Mbps	Left Cheek	Full	39	2441	12.35	12.50	1.035	77.36	1.077	-0.02	0.203	0.226
	Bluetooth	1Mbps	Left Tilted	Full	39	2441	12.35	12.50	1.035	77.36	1.077	0.09	0.164	0.183



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5	Full	251	848.8	30.89	31.50	1.151	0.06	0.454	0.522
	GSM850	GPRS 2 Tx slots	Back	5	Full	251	848.8	30.89	31.50	1.151	-0.09	1.110	1.277
	GSM850	GPRS 2 Tx slots	Back	5	Full	128	824.2	30.71	31.50	1.199	0.06	1.010	1.211
14	GSM850	GPRS 2 Tx slots	Back	5	Full	189	836.4	30.82	31.50	1.169	-0.19	1.120	1.310
	GSM850	GPRS 2 Tx slots	Left Side	5	Full	251	848.8	30.89	31.50	1.151	0.04	0.235	0.270
	GSM850	GPRS 2 Tx slots	Right Side	5	Full	251	848.8	30.89	31.50	1.151	0.03	0.473	0.544
	GSM850	GPRS 2 Tx slots	Bottom Side	5	Full	251	848.8	30.89	31.50	1.151	0.01	0.779	0.896
	GSM850	GPRS 2 Tx slots	Bottom Side	5	Full	128	824.2	30.71	31.50	1.199	0.06	0.438	0.525
	GSM850	GPRS 2 Tx slots	Bottom Side	5	Full	189	836.4	30.82	31.50	1.169	0.06	0.619	0.724
	GSM1900	GPRS 2 Tx slots	Front	5	Reduced	512	1850.2	22.70	23.50	1.202	0.01	0.621	0.747
	GSM1900	GPRS 2 Tx slots	Back	5	Reduced	512	1850.2	22.70	23.50	1.202	-0.13	0.874	1.051
	GSM1900	GPRS 2 Tx slots	Back	5	Reduced	661	1880	22.61	23.50	1.227	0.01	1.010	1.240
	GSM1900	GPRS 2 Tx slots	Back	5	Reduced	810	1909.8	22.65	23.50	1.216	0.02	0.990	1.204
	GSM1900	GPRS 2 Tx slots	Left Side	5	Reduced	512	1850.2	20.17	21.50	1.358	0.06	0.020	0.027
	GSM1900	GPRS 2 Tx slots	Right Side	5	Reduced	512	1850.2	20.17	21.50	1.358	0.08	0.024	0.033
	GSM1900	GPRS 2 Tx slots	Bottom Side	5	Reduced	512	1850.2	20.17	21.50	1.358	0.03	0.930	1.263
	GSM1900	GPRS 2 Tx slots	Bottom Side	5	Reduced	661	1880	20.07	21.50	1.390	0.04	0.852	1.184
15	GSM1900	GPRS 2 Tx slots	Bottom Side	5	Reduced	810	1909.8	20.08	21.50	1.387	0.04	0.982	1.362



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9262	1852.4	14.94	16.00	1.276	-0.06	0.633	0.808
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9400	1880	14.90	16.00	1.288	0.03	0.720	0.928
	WCDMA II	RMC 12.2Kbps	Front	5	Reduced	9538	1907.6	14.93	16.00	1.279	0.01	0.855	1.094
	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9262	1852.4	14.94	16.00	1.276	0.02	0.843	1.076
	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9400	1880	14.90	16.00	1.288	0.02	0.808	1.041
	WCDMA II	RMC 12.2Kbps	Back	5	Reduced	9538	1907.6	14.93	16.00	1.279	0.06	0.918	1.174
	WCDMA II	RMC 12.2Kbps	Left Side	5	Reduced	9262	1852.4	11.87	13.00	1.297	0.11	0.017	0.022
	WCDMA II	RMC 12.2Kbps	Right Side	5	Reduced	9262	1852.4	11.87	13.00	1.297	0.04	0.021	0.027
	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9262	1852.4	11.87	13.00	1.297	0.01	0.853	1.106
	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9400	1880	11.76	13.00	1.330	0.13	0.890	1.184
16	WCDMA II	RMC 12.2Kbps	Bottom Side	5	Reduced	9538	1907.6	11.61	13.00	1.377	0.06	0.940	1.295
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1513	1752.6	15.65	16.50	1.216	0.13	0.727	0.884
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1312	1712.4	15.45	16.50	1.274	0.06	0.716	0.912
	WCDMA IV	RMC 12.2Kbps	Front	5	Reduced	1413	1732.6	15.56	16.50	1.242	0.07	0.770	0.956
	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1513	1752.6	15.65	16.50	1.216	0.08	1.010	1.228
	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1312	1712.4	15.45	16.50	1.274	0.17	0.923	1.175
	WCDMA IV	RMC 12.2Kbps	Back	5	Reduced	1413	1732.6	15.56	16.50	1.242	0.05	1.020	1.266
	WCDMA IV	RMC 12.2Kbps	Left Side	5	Reduced	1513	1752.6	12.80	14.00	1.318	0.08	0.015	0.020
	WCDMA IV	RMC 12.2Kbps	Right Side	5	Reduced	1513	1752.6	12.80	14.00	1.318	0.01	0.023	0.031
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1513	1752.6	12.80	14.00	1.318	-0.07	0.889	1.172
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1312	1712.4	12.66	14.00	1.361	0.05	0.946	1.288
17	WCDMA IV	RMC 12.2Kbps	Bottom Side	5	Reduced	1413	1732.6	12.76	14.00	1.330	0.08	1.010	1.344
	WCDMA V	RMC 12.2Kbps	Front	5	Full	4233	846.6	22.69	24.00	1.352	0.03	0.699	0.945
	WCDMA V	RMC 12.2Kbps	Front	5	Full	4132	826.4	22.62	24.00	1.374	0.09	0.555	0.763
	WCDMA V	RMC 12.2Kbps	Front	5	Full	4182	836.4	22.65	24.00	1.365	0.04	0.665	0.907
	WCDMA V	RMC 12.2Kbps	Back	5	Full	4233	846.6	22.69	24.00	1.352	-0.04	0.784	1.060
	WCDMA V	RMC 12.2Kbps	Back	5	Full	4132	826.4	22.62	24.00	1.374	0.06	0.792	1.088
	WCDMA V	RMC 12.2Kbps	Back	5	Full	4182	836.4	22.65	24.00	1.365	0.07	0.898	1.225
	WCDMA V	RMC 12.2Kbps	Left Side	5	Full	4233	846.6	22.69	24.00	1.352	0.03	0.238	0.322
	WCDMA V	RMC 12.2Kbps	Right Side	5	Full	4233	846.6	22.69	24.00	1.352	0.03	0.460	0.622
	WCDMA V	RMC 12.2Kbps	Bottom Side	5	Full	4233	846.6	22.69	24.00	1.352	0.09	0.820	1.109
	WCDMA V	RMC 12.2Kbps	Bottom Side	5	Full	4132	826.4	22.62	24.00	1.374	0.04	0.864	1.187
18	WCDMA V	RMC 12.2Kbps	Bottom Side	5	Full	4182	836.4	22.65	24.00	1.365	0.02	0.967	1.320



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Front	5	Full	26865	831.5	21.70	23.00	1.349	-0.07	0.478	0.645
	LTE Band 26	15M	QPSK	36	20	Front	5	Full	26865	831.5	21.19	22.00	1.205	0.01	0.295	0.355
19	LTE Band 26	15M	QPSK	1	37	Back	5	Full	26865	831.5	21.70	23.00	1.349	-0.08	0.653	0.881
	LTE Band 26	15M	QPSK	36	20	Back	5	Full	26865	831.5	21.19	22.00	1.205	0.03	0.502	0.605
	LTE Band 26	15M	QPSK	75	0	Back	5	Full	26865	831.5	21.21	22.00	1.199	0.05	0.378	0.453
	LTE Band 26	15M	QPSK	1	37	Left Side	5	Full	26865	831.5	21.70	23.00	1.349	0.09	0.214	0.289
	LTE Band 26	15M	QPSK	36	20	Left Side	5	Full	26865	831.5	21.19	22.00	1.205	-0.07	0.114	0.137
	LTE Band 26	15M	QPSK	1	37	Right Side	5	Full	26865	831.5	21.70	23.00	1.349	-0.12	0.405	0.546
	LTE Band 26	15M	QPSK	36	20	Right Side	5	Full	26865	831.5	21.19	22.00	1.205	0.05	0.218	0.263
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5	Full	26865	831.5	21.70	23.00	1.349	-0.01	0.652	0.880
	LTE Band 26	15M	QPSK	36	20	Bottom Side	5	Full	26865	831.5	21.19	22.00	1.205	0.04	0.367	0.442
	LTE Band 26	15M	QPSK	75	0	Bottom Side	5	Full	26865	831.5	21.21	22.00	1.199	-0.07	0.377	0.452
	LTE Band 5	10M	QPSK	1	0	Front	5	Full	20525	836.5	22.85	24.00	1.303	0.06	0.648	0.844
	LTE Band 5	10M	QPSK	25	12	Front	5	Full	20525	836.5	21.71	23.00	1.346	0.06	0.393	0.529
	LTE Band 5	10M	QPSK	50	0	Front	5	Full	20525	836.5	21.45	23.00	1.429	-0.04	0.388	0.554
20	LTE Band 5	10M	QPSK	1	0	Back	5	Full	20525	836.5	22.85	24.00	1.303	-0.01	0.843	1.099
	LTE Band 5	10M	QPSK	25	12	Back	5	Full	20525	836.5	21.71	23.00	1.346	-0.09	0.504	0.678
	LTE Band 5	10M	QPSK	50	0	Back	5	Full	20525	836.5	21.45	23.00	1.429	0.06	0.530	0.757
	LTE Band 5	10M	QPSK	1	0	Left Side	5	Full	20525	836.5	22.85	24.00	1.303	-0.07	0.168	0.219
	LTE Band 5	10M	QPSK	25	12	Left Side	5	Full	20525	836.5	21.71	23.00	1.346	-0.07	0.091	0.122
	LTE Band 5	10M	QPSK	1	0	Right Side	5	Full	20525	836.5	22.85	24.00	1.303	0.06	0.320	0.417
	LTE Band 5	10M	QPSK	25	12	Right Side	5	Full	20525	836.5	21.71	23.00	1.346	0.07	0.176	0.237
	LTE Band 5	10M	QPSK	1	0	Bottom Side	5	Full	20525	836.5	22.85	24.00	1.303	0.19	0.609	0.794
	LTE Band 5	10M	QPSK	25	12	Bottom Side	5	Full	20525	836.5	21.71	23.00	1.346	0.09	0.398	0.536
	LTE Band 2	20M	QPSK	1	0	Front	5	Reduced	18900	1880	15.98	16.50	1.127	0.09	0.857	0.966
	LTE Band 2	20M	QPSK	1	0	Front	5	Reduced	18700	1860	15.61	16.50	1.227	0.07	0.634	0.779
	LTE Band 2	20M	QPSK	1	0	Front	5	Reduced	19100	1900	15.67	16.50	1.211	0.02	0.815	0.987
	LTE Band 2	20M	QPSK	50	24	Front	5	Reduced	18900	1880	15.71	16.50	1.199	0.08	0.754	0.904
	LTE Band 2	20M	QPSK	50	24	Front	5	Reduced	18700	1860	15.70	16.50	1.202	0.05	0.911	1.095
	LTE Band 2	20M	QPSK	50	24	Front	5	Reduced	19100	1900	15.42	16.50	1.282	0.07	0.879	1.127
	LTE Band 2	20M	QPSK	100	0	Front	5	Reduced	18900	1880	15.62	16.50	1.225	0.01	0.772	0.945
	LTE Band 2	20M	QPSK	1	0	Back	5	Reduced	18900	1880	15.98	16.50	1.127	-0.07	0.959	1.081
	LTE Band 2	20M	QPSK	1	0	Back	5	Reduced	18700	1860	15.61	16.50	1.227	0.05	0.823	1.010
	LTE Band 2	20M	QPSK	1	0	Back	5	Reduced	19100	1900	15.67	16.50	1.211	0.08	0.991	1.200
	LTE Band 2	20M	QPSK	50	24	Back	5	Reduced	18900	1880	15.71	16.50	1.199	-0.04	0.929	1.114
	LTE Band 2	20M	QPSK	50	24	Back	5	Reduced	18700	1860	15.70	16.50	1.202	0.06	0.914	1.099
21	LTE Band 2	20M	QPSK	50	24	Back	5	Reduced	19100	1900	15.42	16.50	1.282	0.07	1.090	1.398
	LTE Band 2	20M	QPSK	100	0	Back	5	Reduced	18900	1880	15.62	16.50	1.225	-0.11	1.040	1.274
	LTE Band 2	20M	QPSK	1	0	Left Side	5	Reduced	18900	1880	13.30	13.50	1.047	0.09	0.023	0.024
	LTE Band 2	20M	QPSK	50	24	Left Side	5	Reduced	18900	1880	12.94	13.50	1.138	-0.07	0.024	0.027
	LTE Band 2	20M	QPSK	1	0	Right Side	5	Reduced	18900	1880	13.30	13.50	1.047	-0.12	0.026	0.027
	LTE Band 2	20M	QPSK	50	24	Right Side	5	Reduced	18900	1880	12.94	13.50	1.138	0.05	0.026	0.029
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Reduced	18900	1880	13.30	13.50	1.047	-0.01	1.050	1.099
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Reduced	18700	1860	13.05	13.50	1.109	0.08	1.040	1.154
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5	Reduced	19100	1900	12.92	13.50	1.143	0.07	1.100	1.257
	LTE Band 2	20M	QPSK	50	24	Bottom Side	5	Reduced	18900	1880	12.94	13.50	1.138	0.09	1.100	1.251
	LTE Band 2	20M	QPSK	50	24	Bottom Side	5	Reduced	18700	1860	12.76	13.50	1.186	0.07	1.030	1.221
	LTE Band 2	20M	QPSK	50	24	Bottom Side	5	Reduced	19100	1900	12.92	13.50	1.143	0.02	1.200	1.371
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5	Reduced	18900	1880	12.93	13.50	1.140	0.05	1.110	1.266



FCC SAR Test Report

Report No. : FA900901-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	5	Reduced	20175	1732.5	16.25	17.50	1.334	0.04	0.781	1.041
	LTE Band 4	20M	QPSK	50	24	Front	5	Reduced	20175	1732.5	16.07	17.50	1.390	0.08	0.891	1.238
	LTE Band 4	20M	QPSK	100	0	Front	5	Reduced	20175	1732.5	16.01	17.50	1.409	0.04	0.893	1.258
	LTE Band 4	20M	QPSK	1	0	Back	5	Reduced	20175	1732.5	16.25	17.50	1.334	0.02	1.000	1.334
22	LTE Band 4	20M	QPSK	50	24	Back	5	Reduced	20175	1732.5	16.07	17.50	1.390	0.03	1.020	1.418
	LTE Band 4	20M	QPSK	100	0	Back	5	Reduced	20175	1732.5	16.01	17.50	1.409	0.01	0.957	1.349
	LTE Band 4	20M	QPSK	1	0	Left Side	5	Reduced	20175	1732.5	12.57	14.00	1.390	0.06	0.017	0.023
	LTE Band 4	20M	QPSK	50	24	Left Side	5	Reduced	20175	1732.5	12.65	14.00	1.365	0.01	0.016	0.021
	LTE Band 4	20M	QPSK	1	0	Right Side	5	Reduced	20175	1732.5	12.57	14.00	1.390	0.01	0.016	0.023
	LTE Band 4	20M	QPSK	50	24	Right Side	5	Reduced	20175	1732.5	12.65	14.00	1.365	0.08	0.016	0.022
	LTE Band 4	20M	QPSK	1	0	Bottom Side	5	Reduced	20175	1732.5	12.57	14.00	1.390	-0.07	0.888	1.234
	LTE Band 4	20M	QPSK	50	24	Bottom Side	5	Reduced	20175	1732.5	12.65	14.00	1.365	0.07	0.942	1.285
	LTE Band 4	20M	QPSK	100	0	Bottom Side	5	Reduced	20175	1732.5	12.61	14.00	1.377	-0.04	0.935	1.288
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	21100	2535	20.05	20.50	1.109	0.01	0.822	0.912
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	20850	2510	20.01	20.50	1.119	-0.13	0.746	0.835
	LTE Band 7	20M	QPSK	1	0	Front	5	Reduced	21350	2560	19.88	20.50	1.153	-0.12	0.978	1.128
	LTE Band 7	20M	QPSK	50	24	Front	5	Reduced	21100	2535	20.02	20.50	1.117	0.04	0.879	0.982
	LTE Band 7	20M	QPSK	50	24	Front	5	Reduced	20850	2510	19.95	20.50	1.135	0.06	0.770	0.874
	LTE Band 7	20M	QPSK	50	24	Front	5	Reduced	21350	2560	19.95	20.50	1.135	0.01	1.010	1.146
	LTE Band 7	20M	QPSK	100	0	Front	5	Reduced	21100	2535	20.01	20.50	1.119	-0.07	0.876	0.981
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	21100	2535	20.05	20.50	1.109	0.06	0.911	1.010
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	20850	2510	20.01	20.50	1.119	0.01	0.849	0.950
	LTE Band 7	20M	QPSK	1	0	Back	5	Reduced	21350	2560	19.88	20.50	1.153	0.01	1.080	1.246
	LTE Band 7	20M	QPSK	50	24	Back	5	Reduced	21100	2535	20.02	20.50	1.117	0.08	0.993	1.109
	LTE Band 7	20M	QPSK	50	24	Back	5	Reduced	20850	2510	19.95	20.50	1.135	-0.07	1.070	1.214
23	LTE Band 7	20M	QPSK	50	24	Back	5	Reduced	21350	2560	19.95	20.50	1.135	-0.08	1.160	1.317
	LTE Band 7	20M	QPSK	100	0	Back	5	Reduced	21100	2535	20.01	20.50	1.119	0.04	1.160	1.299
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Reduced	21100	2535	20.05	20.50	1.109	0.07	0.719	0.797
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Reduced	20850	2510	20.01	20.50	1.119	0.02	0.658	0.737
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Reduced	21350	2560	19.88	20.50	1.153	0.06	0.833	0.961
	LTE Band 7	20M	QPSK	50	24	Left Side	5	Reduced	21100	2535	20.02	20.50	1.117	0.06	0.868	0.969
	LTE Band 7	20M	QPSK	50	24	Left Side	5	Reduced	20850	2510	19.95	20.50	1.135	0.01	0.677	0.768
	LTE Band 7	20M	QPSK	50	24	Left Side	5	Reduced	21350	2560	19.95	20.50	1.135	-0.07	0.887	1.007
	LTE Band 7	20M	QPSK	100	0	Left Side	5	Reduced	21100	2535	20.01	20.50	1.119	0.06	0.775	0.868
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	21100	2535	20.05	20.50	1.109	0.01	0.818	0.907
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	20850	2510	20.01	20.50	1.119	0.08	0.699	0.782
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Reduced	21350	2560	19.88	20.50	1.153	-0.04	0.947	1.092
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5	Reduced	21100	2535	20.02	20.50	1.117	0.09	0.967	1.080
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5	Reduced	20850	2510	19.95	20.50	1.135	-0.07	0.789	0.896
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5	Reduced	21350	2560	19.95	20.50	1.135	-0.12	1.080	1.226
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5	Reduced	21100	2535	20.01	20.50	1.119	0.05	0.948	1.061



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	0.01	0.816	0.842
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	-0.07	0.699	0.766
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	0.06	0.981	1.095
	LTE Band 41	20M	QPSK	1	0	Front	5	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	-0.14	1.060	1.219
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	0.06	0.835	0.882
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.06	0.688	0.759
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	0.01	0.975	1.061
	LTE Band 41	20M	QPSK	50	0	Front	5	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	-0.07	0.984	1.116
	LTE Band 41	20M	QPSK	100	0	Front	5	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	0.06	0.897	0.954
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	0.01	1.010	1.042
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	0.08	0.809	0.886
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	0.05	1.080	1.205
	LTE Band 41	20M	QPSK	1	0	Back	5	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	0.01	1.090	1.253
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	0.02	0.955	1.008
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.02	0.811	0.895
	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	0.06	1.050	1.142
24	LTE Band 41	20M	QPSK	50	0	Back	5	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	0.02	1.130	1.281
	LTE Band 41	20M	QPSK	100	0	Back	5	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	0.02	1.090	1.159
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	0.06	0.562	0.580
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	0.01	0.573	0.628
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	-0.07	0.763	0.851
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	0.06	0.738	0.849
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	0.01	0.560	0.591
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.08	0.568	0.627
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	-0.04	0.738	0.803
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	0.09	0.706	0.801
	LTE Band 41	20M	QPSK	100	0	Left Side	5	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	-0.07	0.665	0.707
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	-0.12	0.664	0.685
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	0.05	0.518	0.567
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	0.07	0.696	0.777
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	0.01	0.834	0.959
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	-0.07	0.663	0.700
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.06	0.658	0.726
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	0.01	0.894	0.973
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	0.01	0.856	0.971
	LTE Band 41	20M	QPSK	100	0	Bottom Side	5	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	0.08	0.823	0.875



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	1	2412	18.18	19.00	1.208	98.61	1.014	-0.03	0.681	0.834
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	6	2437	18.15	19.00	1.216	98.61	1.014	-0.11	0.673	0.830
25	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	1	2412	18.18	19.00	1.208	98.61	1.014	0.11	0.806	0.987
	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	6	2437	18.15	19.00	1.216	98.61	1.014	0.05	0.789	0.973
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5	Full	1	2412	18.18	19.00	1.208	98.61	1.014	0.08	0.419	0.513
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	Full	1	2412	18.18	19.00	1.208	98.61	1.014	-0.01	0.773	0.947
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	Full	6	2437	18.15	19.00	1.216	98.61	1.014	0.07	0.769	0.948

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	39	2441	12.35	12.50	1.035	77.36	1.077	0.03	0.092	0.102
26	Bluetooth	1Mbps	Back	5	39	2441	12.35	12.50	1.035	77.36	1.077	0.01	0.104	0.116
	Bluetooth	1Mbps	Right Side	5	39	2441	12.35	12.50	1.035	77.36	1.077	-0.07	0.054	0.061
	Bluetooth	1Mbps	Top Side	5	39	2441	12.35	12.50	1.035	77.36	1.077	0.06	0.100	0.111



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx slots	Front	5	-	Full	251	848.8	30.89	31.50	1.151	0.06	0.454	0.522
	GSM850	GPRS 2 Tx slots	Back	5	-	Full	251	848.8	30.89	31.50	1.151	-0.09	1.110	1.277
	GSM850	GPRS 2 Tx slots	Back	5	-	Full	128	824.2	30.71	31.50	1.199	0.06	1.010	1.211
	GSM850	GPRS 2 Tx slots	Back	5	-	Full	189	836.4	30.82	31.50	1.169	-0.19	1.120	1.310
27	GSM850	GPRS 2 Tx slots	Back	5	Headset	Full	189	836.4	30.82	31.50	1.169	0.01	1.130	1.322
	GSM850	GPRS 2 Tx slots	Back	5	Headset	Full	128	824.2	30.71	31.50	1.199	0.07	1.090	1.307
	GSM850	GPRS 2 Tx slots	Back	5	Headset	Full	251	848.8	30.89	31.50	1.151	-0.01	1.120	1.289
	GSM1900	GPRS 2 Tx slots	Front	5	-	Reduced	512	1850.2	22.70	23.50	1.202	0.01	0.621	0.747
	GSM1900	GPRS 2 Tx slots	Back	5	-	Reduced	512	1850.2	22.70	23.50	1.202	-0.13	0.874	1.051
	GSM1900	GPRS 2 Tx slots	Back	5	-	Reduced	661	1880	22.61	23.50	1.227	0.01	1.010	1.240
	GSM1900	GPRS 2 Tx slots	Back	5	-	Reduced	810	1909.8	22.65	23.50	1.216	0.02	0.990	1.204
28	GSM1900	GPRS 2 Tx slots	Back	5	Headset	Reduced	661	1880	22.61	23.50	1.227	-0.07	1.090	1.338
	GSM1900	GPRS 2 Tx slots	Back	5	Headset	Reduced	512	1850.2	22.70	23.50	1.202	0.04	0.844	1.015
	GSM1900	GPRS 2 Tx slots	Back	5	Headset	Reduced	810	1909.8	22.65	23.50	1.216	0.06	0.934	1.136

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9262	1852.4	14.94	16.00	1.276	-0.06	0.633	0.808
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9400	1880	14.90	16.00	1.288	0.03	0.720	0.928
	WCDMA II	RMC 12.2Kbps	Front	5	-	Reduced	9538	1907.6	14.93	16.00	1.279	0.01	0.855	1.094
	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9262	1852.4	14.94	16.00	1.276	0.02	0.843	1.076
	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9400	1880	14.90	16.00	1.288	0.02	0.800	1.031
29	WCDMA II	RMC 12.2Kbps	Back	5	-	Reduced	9538	1907.6	14.93	16.00	1.279	0.06	0.918	1.174
	WCDMA II	RMC 12.2Kbps	Back	5	Headset	Reduced	9538	1907.6	14.93	16.00	1.279	0.07	0.834	1.067
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1513	1752.6	15.65	16.50	1.216	0.13	0.727	0.884
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1312	1712.4	15.45	16.50	1.274	0.06	0.716	0.912
	WCDMA IV	RMC 12.2Kbps	Front	5	-	Reduced	1413	1732.6	15.56	16.50	1.242	0.07	0.770	0.956
	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1513	1752.6	15.65	16.50	1.216	0.08	1.010	1.228
	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1312	1712.4	15.45	16.50	1.274	0.17	0.923	1.175
30	WCDMA IV	RMC 12.2Kbps	Back	5	-	Reduced	1413	1732.6	15.56	16.50	1.242	0.05	1.020	1.266
	WCDMA IV	RMC 12.2Kbps	Back	5	Headset	Reduced	1413	1732.6	15.56	16.50	1.242	0.03	0.995	1.235
	WCDMA V	RMC 12.2Kbps	Front	5	-	Full	4233	846.6	22.69	24.00	1.352	0.03	0.699	0.945
	WCDMA V	RMC 12.2Kbps	Front	5	-	Full	4132	826.4	22.62	24.00	1.374	0.09	0.555	0.763
	WCDMA V	RMC 12.2Kbps	Front	5	-	Full	4182	836.4	22.65	24.00	1.365	0.04	0.665	0.907
	WCDMA V	RMC 12.2Kbps	Back	5	-	Full	4233	846.6	22.69	24.00	1.352	-0.04	0.784	1.060
	WCDMA V	RMC 12.2Kbps	Back	5	-	Full	4132	826.4	22.62	24.00	1.374	0.06	0.792	1.088
	WCDMA V	RMC 12.2Kbps	Back	5	-	Full	4182	836.4	22.65	24.00	1.365	0.07	0.898	1.225
31	WCDMA V	RMC 12.2Kbps	Back	5	Headset	Full	4182	836.4	22.65	24.00	1.365	0.06	1.000	1.365
	WCDMA V	RMC 12.2Kbps	Back	5	Headset	Full	4132	826.4	22.62	24.00	1.374	-0.07	0.955	1.312
	WCDMA V	RMC 12.2Kbps	Back	5	Headset	Full	4233	846.6	22.69	24.00	1.352	0.13	0.980	1.325



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	37	Front	5	-	Full	26865	831.5	21.70	23.00	1.349	-0.07	0.478	0.645
	LTE Band 26	15M	QPSK	36	20	Front	5	-	Full	26865	831.5	21.19	22.00	1.205	0.01	0.295	0.355
32	LTE Band 26	15M	QPSK	1	37	Back	5	-	Full	26865	831.5	21.70	23.00	1.349	-0.08	0.653	0.881
	LTE Band 26	15M	QPSK	36	20	Back	5	-	Full	26865	831.5	21.19	22.00	1.205	0.03	0.502	0.605
	LTE Band 26	15M	QPSK	75	0	Back	5	-	Full	26865	831.5	21.21	22.00	1.199	0.05	0.378	0.453
	LTE Band 5	10M	QPSK	1	0	Front	5	-	Full	20525	836.5	22.85	24.00	1.303	0.06	0.648	0.844
	LTE Band 5	10M	QPSK	25	12	Front	5	-	Full	20525	836.5	21.71	23.00	1.346	0.06	0.393	0.529
	LTE Band 5	10M	QPSK	50	0	Front	5	-	Full	20525	836.5	21.45	23.00	1.429	-0.04	0.388	0.554
33	LTE Band 5	10M	QPSK	1	0	Back	5	-	Full	20525	836.5	22.85	24.00	1.303	-0.02	0.843	1.099
	LTE Band 5	10M	QPSK	25	12	Back	5	-	Full	20525	836.5	21.71	23.00	1.346	-0.09	0.504	0.678
	LTE Band 5	10M	QPSK	50	0	Back	5	-	Full	20525	836.5	21.45	23.00	1.429	0.06	0.530	0.757
	LTE Band 2	20M	QPSK	1	0	Front	5	-	Reduced	18900	1880	15.98	16.50	1.127	0.09	0.857	0.966
	LTE Band 2	20M	QPSK	1	0	Front	5	-	Reduced	18700	1860	15.61	16.50	1.227	0.07	0.634	0.779
	LTE Band 2	20M	QPSK	1	0	Front	5	-	Reduced	19100	1900	15.67	16.50	1.211	0.02	0.815	0.987
	LTE Band 2	20M	QPSK	50	24	Front	5	-	Reduced	18900	1880	15.71	16.50	1.199	0.08	0.754	0.904
	LTE Band 2	20M	QPSK	50	24	Front	5	-	Reduced	18700	1860	15.70	16.50	1.202	0.05	0.911	1.095
	LTE Band 2	20M	QPSK	50	24	Front	5	-	Reduced	19100	1900	15.42	16.50	1.282	0.07	0.879	1.127
	LTE Band 2	20M	QPSK	100	0	Front	5	-	Reduced	18900	1880	15.62	16.50	1.225	0.01	0.772	0.945
	LTE Band 2	20M	QPSK	1	0	Back	5	-	Reduced	18900	1880	15.98	16.50	1.127	-0.07	0.959	1.081
	LTE Band 2	20M	QPSK	1	0	Back	5	-	Reduced	18700	1860	15.61	16.50	1.227	0.05	0.823	1.010
	LTE Band 2	20M	QPSK	1	0	Back	5	-	Reduced	19100	1900	15.67	16.50	1.211	0.08	0.991	1.200
	LTE Band 2	20M	QPSK	50	24	Back	5	-	Reduced	18900	1880	15.71	16.50	1.199	-0.04	0.929	1.114
	LTE Band 2	20M	QPSK	50	24	Back	5	-	Reduced	18700	1860	15.70	16.50	1.202	0.06	0.914	1.099
	LTE Band 2	20M	QPSK	50	24	Back	5	-	Reduced	19100	1900	15.42	16.50	1.282	0.07	1.090	1.398
	LTE Band 2	20M	QPSK	100	0	Back	5	-	Reduced	18900	1880	15.62	16.50	1.225	-0.11	1.040	1.274
34	LTE Band 2	20M	QPSK	50	24	Back	5	Headset	Reduced	19100	1900	15.42	16.50	1.282	0.07	1.110	1.423
	LTE Band 2	20M	QPSK	50	24	Back	5	Headset	Reduced	18700	1860	15.70	16.50	1.202	0.03	0.941	1.131
	LTE Band 2	20M	QPSK	50	24	Back	5	Headset	Reduced	18900	1880	15.71	16.50	1.199	0.03	1.060	1.271



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	5	-	Reduced	20175	1732.5	16.25	17.50	1.334	0.04	0.781	1.041
	LTE Band 4	20M	QPSK	50	24	Front	5	-	Reduced	20175	1732.5	16.07	17.50	1.390	0.08	0.891	1.238
	LTE Band 4	20M	QPSK	100	0	Front	5	-	Reduced	20175	1732.5	16.01	17.50	1.409	0.04	0.893	1.258
	LTE Band 4	20M	QPSK	1	0	Back	5	-	Reduced	20175	1732.5	16.25	17.50	1.334	0.02	1.000	1.334
35	LTE Band 4	20M	QPSK	50	24	Back	5	-	Reduced	20175	1732.5	16.07	17.50	1.390	0.03	1.020	1.418
	LTE Band 4	20M	QPSK	100	0	Back	5	-	Reduced	20175	1732.5	16.01	17.50	1.409	0.01	0.957	1.349
	LTE Band 4	20M	QPSK	50	24	Back	5	Headset	Reduced	20175	1732.5	16.07	17.50	1.390	-0.16	0.991	1.377
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	21100	2535	20.05	20.50	1.109	0.01	0.822	0.912
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	20850	2510	20.01	20.50	1.119	-0.13	0.746	0.835
	LTE Band 7	20M	QPSK	1	0	Front	5	-	Reduced	21350	2560	19.88	20.50	1.153	-0.12	0.978	1.128
	LTE Band 7	20M	QPSK	50	24	Front	5	-	Reduced	21100	2535	20.02	20.50	1.117	0.04	0.879	0.982
	LTE Band 7	20M	QPSK	50	24	Front	5	-	Reduced	20850	2510	19.95	20.50	1.135	0.06	0.770	0.874
	LTE Band 7	20M	QPSK	50	24	Front	5	-	Reduced	21350	2560	19.95	20.50	1.135	0.01	1.010	1.146
	LTE Band 7	20M	QPSK	100	0	Front	5	-	Reduced	21100	2535	20.01	20.50	1.119	-0.07	0.876	0.981
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	21100	2535	20.05	20.50	1.109	0.06	0.911	1.010
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	20850	2510	20.01	20.50	1.119	0.01	0.849	0.950
	LTE Band 7	20M	QPSK	1	0	Back	5	-	Reduced	21350	2560	19.88	20.50	1.153	0.01	1.080	1.246
	LTE Band 7	20M	QPSK	50	24	Back	5	-	Reduced	21100	2535	20.02	20.50	1.117	0.08	0.993	1.109
	LTE Band 7	20M	QPSK	50	24	Back	5	-	Reduced	20850	2510	19.95	20.50	1.135	-0.07	1.070	1.214
36	LTE Band 7	20M	QPSK	50	24	Back	5	-	Reduced	21350	2560	19.95	20.50	1.135	-0.08	1.160	1.317
	LTE Band 7	20M	QPSK	100	0	Back	5	-	Reduced	21100	2535	20.01	20.50	1.119	0.04	1.160	1.299
	LTE Band 7	20M	QPSK	50	24	Back	5	Headset	Reduced	21350	2560	19.95	20.50	1.135	0.05	1.120	1.271

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	0.01	0.816	0.842
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	-0.07	0.699	0.766
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	0.06	0.981	1.095
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	-0.14	1.060	1.219
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	0.06	0.835	0.882
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.06	0.688	0.759
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	0.01	0.975	1.061
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	-0.07	0.984	1.116
	LTE Band 41	20M	QPSK	100	0	Front	5	-	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	0.06	0.897	0.954
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	40400	2571	21.39	21.50	1.026	62.9	1.006	0.01	1.010	1.042
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	40140	2545	21.13	21.50	1.089	62.9	1.006	0.08	0.809	0.886
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	40670	2598	21.05	21.50	1.109	62.9	1.006	0.05	1.080	1.205
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Reduced	41140	2645	20.92	21.50	1.143	62.9	1.006	0.01	1.090	1.253
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	40400	2571	21.29	21.50	1.050	62.9	1.006	0.02	0.955	1.008
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	40140	2545	21.10	21.50	1.096	62.9	1.006	0.02	0.811	0.895
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	40670	2598	21.16	21.50	1.081	62.9	1.006	0.06	1.050	1.142
37	LTE Band 41	20M	QPSK	50	0	Back	5	-	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	0.02	1.130	1.281
	LTE Band 41	20M	QPSK	100	0	Back	5	-	Reduced	40400	2571	21.26	21.50	1.057	62.9	1.006	0.02	1.090	1.159
	LTE Band 41	20M	QPSK	50	0	Back	5	Headset	Reduced	41140	2645	20.98	21.50	1.127	62.9	1.006	0.06	1.060	1.202



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	-	Full	1	2412	18.18	19.00	1.208	98.61	1.014	-0.03	0.681	0.834
	WLAN2.4GHz	802.11b 1Mbps	Front	5	-	Full	6	2437	18.15	19.00	1.216	98.61	1.014	-0.11	0.673	0.830
38	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	1	2412	18.18	19.00	1.208	98.61	1.014	0.11	0.806	0.987
	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	6	2437	18.15	19.00	1.216	98.61	1.014	0.05	0.789	0.973

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	-	39	2441	12.35	12.50	1.035	77.36	1.077	0.03	0.092	0.102
39	Bluetooth	1Mbps	Back	5	-	39	2441	12.35	12.50	1.035	77.36	1.077	0.01	0.104	0.116



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
40	GSM850	GPRS 2 Tx slots	Back	0	Full	251	848.8	30.89	31.50	1.151	0.01	1.640	1.887
	GSM1900	GPRS 2 Tx slots	Front	0	Reduced	512	1850.2	26.25	27.00	1.189	0.01	1.850	2.199
	GSM1900	GPRS 2 Tx slots	Front	0	Reduced	661	1880	26.07	27.00	1.239	0.06	1.760	2.180
	GSM1900	GPRS 2 Tx slots	Front	0	Reduced	810	1909.8	25.96	27.00	1.271	0.13	2.090	2.655
	GSM1900	GPRS 2 Tx slots	Back	0	Reduced	512	1850.2	26.25	27.00	1.189	-0.07	2.270	2.698
41	GSM1900	GPRS 2 Tx slots	Back	0	Reduced	661	1880	26.07	27.00	1.239	0.01	2.520	3.122
	GSM1900	GPRS 2 Tx slots	Back	0	Reduced	810	1909.8	25.96	27.00	1.271	0.05	2.360	2.999
	GSM1900	GPRS 2 Tx slots	Bottom Side	0	Reduced	512	1850.2	26.25	27.00	1.189	-0.01	1.000	1.189

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0	Reduced	9262	1852.4	20.00	20.50	1.122	-0.07	2.630	2.951
42	WCDMA II	RMC 12.2Kbps	Front	0	Reduced	9400	1880	19.88	20.50	1.153	0.05	2.650	3.057
	WCDMA II	RMC 12.2Kbps	Front	0	Reduced	9538	1907.6	19.78	20.50	1.180	0.08	2.530	2.986
	WCDMA II	RMC 12.2Kbps	Back	0	Reduced	9262	1852.4	20.00	20.50	1.122	0.08	2.680	3.007
	WCDMA II	RMC 12.2Kbps	Back	0	Reduced	9400	1880	19.88	20.50	1.153	-0.04	2.230	2.572
	WCDMA II	RMC 12.2Kbps	Back	0	Reduced	9538	1907.6	19.78	20.50	1.180	0.06	2.180	2.573
	WCDMA II	RMC 12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	20.00	20.50	1.122	-0.05	1.580	1.773
	WCDMA IV	RMC 12.2Kbps	Front	0	Reduced	1513	1752.6	18.40	20.00	1.445	0.08	1.590	2.298
	WCDMA IV	RMC 12.2Kbps	Front	0	Reduced	1312	1712.4	18.20	20.00	1.514	-0.04	1.500	2.270
	WCDMA IV	RMC 12.2Kbps	Front	0	Reduced	1413	1732.6	18.38	20.00	1.452	0.06	1.580	2.294
	WCDMA IV	RMC 12.2Kbps	Back	0	Reduced	1513	1752.6	18.40	20.00	1.445	0.07	2.010	2.905
	WCDMA IV	RMC 12.2Kbps	Back	0	Reduced	1312	1712.4	18.20	20.00	1.514	-0.11	1.990	3.012
	WCDMA IV	RMC 12.2Kbps	Back	0	Reduced	1413	1732.6	18.38	20.00	1.452	0.07	2.080	3.020
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	18.40	20.00	1.445	0.03	2.040	2.949
43	WCDMA IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1312	1712.4	18.20	20.00	1.514	0.03	2.160	3.269
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0	Reduced	1413	1732.6	18.38	20.00	1.452	0.09	2.100	3.049
	WCDMA V	RMC 12.2Kbps	Back	0	Full	4233	846.6	22.69	24.00	1.352	0.02	1.750	2.366
	WCDMA V	RMC 12.2Kbps	Back	0	Full	4132	826.4	22.62	24.00	1.374	0.06	1.610	2.212
44	WCDMA V	RMC 12.2Kbps	Back	0	Full	4182	836.4	22.65	24.00	1.365	0.17	1.790	2.443
	WCDMA V	RMC 12.2Kbps	Bottom Side	0	Full	4233	846.6	22.69	24.00	1.352	0.03	1.450	1.961



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0	Reduced	18900	1880	21.17	21.50	1.079	0.07	2.600	2.805
	LTE Band 2	20M	QPSK	1	0	Front	0	Reduced	18700	1860	21.10	21.50	1.096	0.08	2.890	3.169
45	LTE Band 2	20M	QPSK	1	0	Front	0	Reduced	19100	1900	21.15	21.50	1.084	0.01	3.270	3.544
	LTE Band 2	20M	QPSK	50	24	Front	0	Reduced	18900	1880	20.92	21.50	1.143	0.06	2.520	2.880
	LTE Band 2	20M	QPSK	50	24	Front	0	Reduced	18700	1860	20.68	21.50	1.208	-0.07	2.350	2.838
	LTE Band 2	20M	QPSK	50	24	Front	0	Reduced	19100	1900	20.91	21.50	1.146	0.01	2.660	3.047
	LTE Band 2	20M	QPSK	100	0	Front	0	Reduced	18900	1880	20.90	21.50	1.148	0.01	2.540	2.916
	LTE Band 2	20M	QPSK	1	0	Back	0	Reduced	18900	1880	21.17	21.50	1.079	0.01	2.930	3.161
	LTE Band 2	20M	QPSK	1	0	Back	0	Reduced	18700	1860	21.10	21.50	1.096	-0.07	3.050	3.344
	LTE Band 2	20M	QPSK	1	0	Back	0	Reduced	19100	1900	21.15	21.50	1.084	0.06	3.060	3.317
	LTE Band 2	20M	QPSK	50	24	Back	0	Reduced	18900	1880	20.92	21.50	1.143	0.01	2.740	3.131
	LTE Band 2	20M	QPSK	50	24	Back	0	Reduced	18700	1860	20.68	21.50	1.208	0.06	2.920	3.527
	LTE Band 2	20M	QPSK	50	24	Back	0	Reduced	19100	1900	20.91	21.50	1.146	0.08	2.970	3.402
	LTE Band 2	20M	QPSK	100	0	Back	0	Reduced	18900	1880	20.90	21.50	1.148	-0.04	2.800	3.215
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Reduced	18900	1880	21.17	21.50	1.079	0.09	2.920	3.151
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Reduced	18700	1860	21.10	21.50	1.096	0.09	2.640	2.895
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Reduced	19100	1900	21.15	21.50	1.084	0.08	2.970	3.219
	LTE Band 2	20M	QPSK	50	24	Bottom Side	0	Reduced	18900	1880	20.92	21.50	1.143	0.06	2.690	3.074
	LTE Band 2	20M	QPSK	50	24	Bottom Side	0	Reduced	18700	1860	20.68	21.50	1.208	-0.07	2.500	3.020
	LTE Band 2	20M	QPSK	50	24	Bottom Side	0	Reduced	19100	1900	20.91	21.50	1.146	0.01	2.850	3.265
	LTE Band 2	20M	QPSK	100	0	Bottom Side	0	Reduced	18900	1880	20.90	21.50	1.148	-0.07	2.570	2.951
	LTE Band 4	20M	QPSK	1	0	Front	0	Reduced	20175	1732.5	19.98	21.00	1.265	0.09	1.990	2.517
	LTE Band 4	20M	QPSK	50	24	Front	0	Reduced	20175	1732.5	19.67	21.00	1.358	-0.07	1.900	2.581
	LTE Band 4	20M	QPSK	100	0	Front	0	Reduced	20175	1732.5	19.54	21.00	1.400	-0.12	2.110	2.953
	LTE Band 4	20M	QPSK	1	0	Back	0	Reduced	20175	1732.5	19.98	21.00	1.265	0.05	1.880	2.378
	LTE Band 4	20M	QPSK	50	24	Back	0	Reduced	20175	1732.5	19.67	21.00	1.358	0.04	1.990	2.703
	LTE Band 4	20M	QPSK	100	0	Back	0	Reduced	20175	1732.5	19.54	21.00	1.400	0.01	1.980	2.771
	LTE Band 4	20M	QPSK	1	0	Bottom Side	0	Reduced	20175	1732.5	19.98	21.00	1.265	0.05	2.390	3.023
	LTE Band 4	20M	QPSK	50	24	Bottom Side	0	Reduced	20175	1732.5	19.67	21.00	1.358	0.09	2.250	3.056
46	LTE Band 4	20M	QPSK	100	0	Bottom Side	0	Reduced	20175	1732.5	19.54	21.00	1.400	0.06	2.370	3.317



FCC SAR Test Report

Report No. : FA900901-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	21100	2535	21.54	22.50	1.247	0.07	2.440	3.044
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	20850	2510	21.27	22.50	1.327	0.02	2.320	3.080
	LTE Band 7	20M	QPSK	1	0	Front	0	Reduced	21350	2560	21.43	22.50	1.279	0.06	2.270	2.904
	LTE Band 7	20M	QPSK	50	24	Front	0	Reduced	21100	2535	21.51	22.50	1.256	0.06	2.160	2.713
	LTE Band 7	20M	QPSK	50	24	Front	0	Reduced	20850	2510	21.34	22.50	1.306	0.01	2.520	3.292
	LTE Band 7	20M	QPSK	50	24	Front	0	Reduced	21350	2560	21.50	22.50	1.259	-0.07	2.340	2.946
	LTE Band 7	20M	QPSK	100	0	Front	0	Reduced	21100	2535	21.45	22.50	1.274	0.06	2.250	2.865
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	21100	2535	21.54	22.50	1.247	-0.11	2.090	2.607
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	20850	2510	21.27	22.50	1.327	0.03	2.120	2.814
	LTE Band 7	20M	QPSK	1	0	Back	0	Reduced	21350	2560	21.43	22.50	1.279	0.09	2.350	3.007
	LTE Band 7	20M	QPSK	50	24	Back	0	Reduced	21100	2535	21.51	22.50	1.256	0.09	2.470	3.102
	LTE Band 7	20M	QPSK	50	24	Back	0	Reduced	20850	2510	21.34	22.50	1.306	0.08	2.280	2.978
47	LTE Band 7	20M	QPSK	50	24	Back	0	Reduced	21350	2560	21.50	22.50	1.259	-0.03	2.670	3.361
	LTE Band 7	20M	QPSK	100	0	Back	0	Reduced	21100	2535	21.45	22.50	1.274	-0.11	2.460	3.133
	LTE Band 7	20M	QPSK	1	0	Left Side	0	Reduced	21100	2535	21.54	22.50	1.247	0.02	2.210	2.757
	LTE Band 7	20M	QPSK	1	0	Left Side	0	Reduced	20850	2510	21.27	22.50	1.327	0.08	2.030	2.695
	LTE Band 7	20M	QPSK	1	0	Left Side	0	Reduced	21350	2560	21.43	22.50	1.279	0.06	2.300	2.943
	LTE Band 7	20M	QPSK	50	24	Left Side	0	Reduced	21100	2535	21.51	22.50	1.256	0.01	2.350	2.952
	LTE Band 7	20M	QPSK	50	24	Left Side	0	Reduced	20850	2510	21.34	22.50	1.306	0.02	2.150	2.808
	LTE Band 7	20M	QPSK	50	24	Left Side	0	Reduced	21350	2560	21.50	22.50	1.259	0.07	2.440	3.072
	LTE Band 7	20M	QPSK	100	0	Left Side	0	Reduced	21100	2535	21.45	22.50	1.274	0.06	2.330	2.967
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	21100	2535	21.54	22.50	1.247	-0.06	2.210	2.757
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	20850	2510	21.27	22.50	1.327	0.02	2.140	2.841
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Reduced	21350	2560	21.43	22.50	1.279	0.04	2.330	2.981
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0	Reduced	21100	2535	21.51	22.50	1.256	0.04	2.310	2.901
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0	Reduced	20850	2510	21.34	22.50	1.306	0.06	2.190	2.861
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0	Reduced	21350	2560	21.50	22.50	1.259	0.05	2.390	3.009
	LTE Band 7	20M	QPSK	100	0	Bottom Side	0	Reduced	21100	2535	21.45	22.50	1.274	-0.11	2.230	2.840



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	0	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	-0.07	2.120	2.741
	LTE Band 41	20M	QPSK	1	0	Front	0	Full	40140	2545	22.71	24.00	1.346	62.9	1.006	-0.09	1.820	2.464
	LTE Band 41	20M	QPSK	1	0	Front	0	Full	40670	2598	22.64	24.00	1.368	62.9	1.006	0.04	2.150	2.958
	LTE Band 41	20M	QPSK	1	0	Front	0	Full	41140	2645	22.56	24.00	1.393	62.9	1.006	0.05	1.960	2.747
	LTE Band 41	20M	QPSK	50	0	Front	0	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.07	1.520	1.956
	LTE Band 41	20M	QPSK	50	0	Front	0	Full	40140	2545	21.68	23.00	1.355	62.9	1.006	0.02	1.340	1.827
	LTE Band 41	20M	QPSK	50	0	Front	0	Full	40670	2598	21.88	23.00	1.294	62.9	1.006	0.06	1.770	2.304
	LTE Band 41	20M	QPSK	50	0	Front	0	Full	41140	2645	21.58	23.00	1.387	62.9	1.006	0.06	1.690	2.358
	LTE Band 41	20M	QPSK	100	0	Front	0	Full	40400	2571	21.92	23.00	1.282	62.9	1.006	0.01	1.550	2.000
	LTE Band 41	20M	QPSK	1	0	Back	0	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	-0.07	2.020	2.612
	LTE Band 41	20M	QPSK	1	0	Back	0	Full	40140	2545	22.71	24.00	1.346	62.9	1.006	0.06	1.840	2.491
	LTE Band 41	20M	QPSK	1	0	Back	0	Full	40670	2598	22.64	24.00	1.368	62.9	1.006	0.01	2.250	3.096
48	LTE Band 41	20M	QPSK	1	0	Back	0	Full	41140	2645	22.56	24.00	1.393	62.9	1.006	0.08	2.250	3.153
	LTE Band 41	20M	QPSK	50	0	Back	0	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	-0.04	1.640	2.111
	LTE Band 41	20M	QPSK	50	0	Back	0	Full	40140	2545	21.68	23.00	1.355	62.9	1.006	0.09	1.490	2.031
	LTE Band 41	20M	QPSK	50	0	Back	0	Full	40670	2598	21.88	23.00	1.294	62.9	1.006	-0.07	1.700	2.213
	LTE Band 41	20M	QPSK	50	0	Back	0	Full	41140	2645	21.58	23.00	1.387	62.9	1.006	-0.12	1.590	2.218
	LTE Band 41	20M	QPSK	100	0	Back	0	Full	40400	2571	21.92	23.00	1.282	62.9	1.006	0.05	1.710	2.206
	LTE Band 41	20M	QPSK	1	0	Left Side	0	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	0.07	1.900	2.457
	LTE Band 41	20M	QPSK	1	0	Left Side	0	Full	40140	2545	22.71	24.00	1.346	62.9	1.006	0.01	1.770	2.396
	LTE Band 41	20M	QPSK	1	0	Left Side	0	Full	40670	2598	22.64	24.00	1.368	62.9	1.006	0.01	2.010	2.766
	LTE Band 41	20M	QPSK	1	0	Left Side	0	Full	41140	2645	22.56	24.00	1.393	62.9	1.006	-0.07	1.910	2.677
	LTE Band 41	20M	QPSK	50	0	Left Side	0	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	0.06	1.360	1.750
	LTE Band 41	20M	QPSK	50	0	Left Side	0	Full	40140	2545	21.68	23.00	1.355	62.9	1.006	0.01	1.240	1.691
	LTE Band 41	20M	QPSK	50	0	Left Side	0	Full	40670	2598	21.88	23.00	1.294	62.9	1.006	0.08	1.450	1.888
	LTE Band 41	20M	QPSK	50	0	Left Side	0	Full	41140	2645	21.58	23.00	1.387	62.9	1.006	-0.04	1.350	1.883
	LTE Band 41	20M	QPSK	100	0	Left Side	0	Full	40400	2571	21.92	23.00	1.282	62.9	1.006	0.09	1.380	1.780
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0	Full	40400	2571	22.91	24.00	1.285	62.9	1.006	-0.07	1.570	2.030
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0	Full	40140	2545	22.71	24.00	1.346	62.9	1.006	-0.12	1.410	1.909
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0	Full	40670	2598	22.64	24.00	1.368	62.9	1.006	-0.04	1.500	2.064
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0	Full	41140	2645	22.56	24.00	1.393	62.9	1.006	0.09	1.280	1.794
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0	Full	40400	2571	21.93	23.00	1.279	62.9	1.006	-0.07	1.050	1.351
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0	Full	40140	2545	21.68	23.00	1.355	62.9	1.006	0.07	1.120	1.527
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0	Full	40670	2598	21.88	23.00	1.294	62.9	1.006	0.01	1.230	1.601
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0	Full	41140	2645	21.58	23.00	1.387	62.9	1.006	0.09	1.070	1.493
	LTE Band 41	20M	QPSK	100	0	Bottom Side	0	Full	40400	2571	21.92	23.00	1.282	62.9	1.006	-0.07	1.090	1.406



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)	
1st	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	0.06	0.868	1	1.053	
2nd	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	Reduced	1	2412	15.72	16.50	1.197	98.61	1.014	-0.01	0.844	1.028	1.024	
1st	LTE Band 2	-	20M	QPSK	50	24	Bottom Side	5	Reduced	19100	1900	12.92	13.50	1.143	-	1.000	0.02	1.200	1	1.371	
2nd	LTE Band 2	-	20M	QPSK	50	24	Bottom Side	5	Reduced	19100	1900	12.92	13.50	1.143	-	1.000	-0.01	1.150	1.043	1.314	
1st	LTE Band 4	-	20M	QPSK	50	24	Back	5	Reduced	20175	1732.5	16.07	17.50	1.390	-	1.000	0.03	1.020	1	1.418	
2nd	LTE Band 4	-	20M	QPSK	50	24	Back	5	Reduced	20175	1732.5	16.07	17.50	1.390	-	1.000	-0.11	0.983	1.038	1.366	
1st	LTE Band 7	-	20M	QPSK	50	24	Back	5	Reduced	21350	2560	19.95	20.50	1.135	-	1.000	-0.08	1.160	1	1.317	
2nd	LTE Band 7	-	20M	QPSK	50	24	Back	5	Reduced	21350	2560	19.95	20.50	1.135	-	1.000	0.07	1.110	1.045	1.260	
1st	GSM850	GPRS 2 Tx slots	-	-	-	-	Back	5	Headset	Full	189	836.4	30.82	31.50	1.169	-	1.000	0.01	1.130	1	1.322
2nd	GSM850	GPRS 2 Tx slots	-	-	-	-	Back	5	Headset	Full	189	836.4	30.82	31.50	1.169	-	1.000	-0.09	1.090	1.037	1.275

<10g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 2	-	20M	QPSK	1	0	Front	0	Reduced	19100	1900	21.15	21.50	1.084	1.000	0.01	3.270	1	3.544	
2nd	LTE Band 2	-	20M	QPSK	1	0	Front	0	Reduced	19100	1900	21.15	21.50	1.084	1.000	0.08	3.190	1.025	3.458	
1st	LTE Band 4	-	20M	QPSK	1	0	Bottom Side	0	Reduced	20175	1732.5	19.98	21.00	1.265	1.000	0.05	2.390	1	3.023	
2nd	LTE Band 4	-	20M	QPSK	1	0	Bottom Side	0	Reduced	20175	1732.5	19.98	21.00	1.265	1.000	-0.11	2.280	1.048	2.884	
1st	LTE Band 7	-	20M	QPSK	50	24	Back	0	Reduced	21350	2560	21.50	22.50	1.259	1.000	-0.03	2.670	1	3.361	
2nd	LTE Band 7	-	20M	QPSK	50	24	Back	0	Reduced	21350	2560	21.50	22.50	1.259	1.000	0.07	2.490	1.072	3.135	

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + Bluetooth	Yes	Yes		
6.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
7.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
8.	LTE + Bluetooth	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
5. The reported SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 16.4.



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2		1+3	
			WWAN	2.4GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.234	0.532	0.097	0.77			0.33
		Right Tilted	0.088	0.479	0.104	0.57			0.19
		Left Cheek	0.185	1.053	0.226	1.24			0.41
		Left Tilted	0.098	1.042	0.183	1.14			0.28
	GSM1900	Right Cheek	0.031	0.532	0.097	0.56			0.13
		Right Tilted	0.026	0.479	0.104	0.51			0.13
		Left Cheek	0.056	1.053	0.226	1.11			0.28
		Left Tilted	0.028	1.042	0.183	1.07			0.21
WCDMA	WCDMA II	Right Cheek	0.079	0.532	0.097	0.61			0.18
		Right Tilted	0.061	0.479	0.104	0.54			0.17
		Left Cheek	0.151	1.053	0.226	1.20			0.38
		Left Tilted	0.058	1.042	0.183	1.10			0.24
	WCDMA IV	Right Cheek	0.116	0.532	0.097	0.65			0.21
		Right Tilted	0.056	0.479	0.104	0.54			0.16
		Left Cheek	0.076	1.053	0.226	1.13			0.30
		Left Tilted	0.055	1.042	0.183	1.10			0.24
	WCDMA V	Right Cheek	0.392	0.532	0.097	0.92			0.49
		Right Tilted	0.155	0.479	0.104	0.63			0.26
		Left Cheek	0.288	1.053	0.226	1.34			0.51
		Left Tilted	0.170	1.042	0.183	1.21			0.35
LTE	LTE Band 2	Right Cheek	0.075	0.532	0.097	0.61			0.17
		Right Tilted	0.014	0.479	0.104	0.49			0.12
		Left Cheek	0.151	1.053	0.226	1.20			0.38
		Left Tilted	0.012	1.042	0.183	1.05			0.20
	LTE Band 4	Right Cheek	0.142	0.532	0.097	0.67			0.24
		Right Tilted	0.043	0.479	0.104	0.52			0.15
		Left Cheek	0.023	1.053	0.226	1.08			0.25
		Left Tilted	0.015	1.042	0.183	1.06			0.20
	LTE Band 5	Right Cheek	0.332	0.532	0.097	0.86			0.43
		Right Tilted	0.155	0.479	0.104	0.63			0.26
		Left Cheek	0.263	1.053	0.226	1.32			0.49
		Left Tilted	0.136	1.042	0.183	1.18			0.32
	LTE Band 7	Right Cheek	0.398	0.532	0.097	0.93			0.50
		Right Tilted	0.343	0.479	0.104	0.82			0.45
		Left Cheek	0.563	1.053	0.226	1.62	#01	0.02	0.79
		Left Tilted	0.202	1.042	0.183	1.24			0.39
	LTE Band 26	Right Cheek	0.206	0.532	0.097	0.74			0.30
		Right Tilted	0.095	0.479	0.104	0.57			0.20
		Left Cheek	0.182	1.053	0.226	1.24			0.41
		Left Tilted	0.086	1.042	0.183	1.13			0.27
	LTE Band 41	Right Cheek	0.274	0.532	0.097	0.81			0.37
		Right Tilted	0.235	0.479	0.104	0.71			0.34
		Left Cheek	0.383	1.053	0.226	1.44			0.61
		Left Tilted	0.131	1.042	0.183	1.17			0.31

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2		1+3	
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)
GSM	GSM850	Front	0.522	0.834	0.102	1.36			0.62
		Back	1.310	0.987	0.116	2.30	#02	0.03	1.43
		Left side	0.270			0.27			0.27
		Right side	0.544	0.513	0.061	1.06			0.61
		Top side		0.948	0.111	0.95			0.11
		Bottom side	0.896			0.90			0.90
	GSM1900	Front	0.747	0.834	0.102	1.58			0.85
		Back	1.240	0.987	0.116	2.23	#03	0.02	1.36
		Left side	0.027			0.03			0.03
		Right side	0.033	0.513	0.061	0.55			0.09
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.362			1.36			1.36
WCDMA	WCDMA II	Front	1.094	0.834	0.102	1.93	#04	0.02	1.20
		Back	1.174	0.987	0.116	2.16	#05	0.02	1.29
		Left side	0.022			0.02			0.02
		Right side	0.027	0.513	0.061	0.54			0.09
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.295			1.30			1.30
	WCDMA IV	Front	0.956	0.834	0.102	1.79	#06	0.01	1.06
		Back	1.266	0.987	0.116	2.25	#07	0.02	1.38
		Left side	0.020			0.02			0.02
		Right side	0.031	0.513	0.061	0.54			0.09
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.344			1.34			1.34
	WCDMA V	Front	0.945	0.834	0.102	1.78	#08	0.02	1.05
		Back	1.225	0.987	0.116	2.21	#09	0.02	1.34
		Left side	0.322			0.32			0.32
		Right side	0.622	0.513	0.061	1.14			0.68
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.320			1.32			1.32



WWAN Band	Exposure Position	1	2	3	1+2			1+3	
		WWAN	2.4GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	LTE Band 2	Front	1.127	0.834	0.102	1.96	#10	0.02	1.23
		Back	1.398	0.987	0.116	2.39	#11	0.03	1.51
		Left side	0.027			0.03			0.03
		Right side	0.029	0.513	0.061	0.54			0.09
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.371			1.37			1.37
	LTE Band 4	Front	1.258	0.834	0.102	2.09	#12	0.02	1.36
		Back	1.418	0.987	0.116	2.41	#13	0.03	1.53
		Left side	0.023			0.02			0.02
		Right side	0.023	0.513	0.061	0.54			0.08
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.288			1.29			1.29
	LTE Band 5	Front	0.844	0.834	0.102	1.68	#14	0.01	0.95
		Back	1.099	0.987	0.116	2.09	#15	0.02	1.22
		Left side	0.219			0.22			0.22
		Right side	0.417	0.513	0.061	0.93			0.48
		Top side		0.948	0.111	0.95			0.11
		Bottom side	0.794			0.79			0.79
	LTE Band 7	Front	1.146	0.834	0.102	1.98	#16	0.02	1.25
		Back	1.317	0.987	0.116	2.30	#17	0.03	1.43
		Left side	1.007			1.01			1.01
		Right side		0.513	0.061	0.51			0.06
		Top side		0.948	0.111	0.95			0.11
		Bottom side	1.226			1.23			1.23
	LTE Band 26	Front	0.645	0.834	0.102	1.48			0.75
		Back	0.881	0.987	0.116	1.87	#18	0.02	1.00
		Left side	0.289			0.29			0.29
		Right side	0.546	0.513	0.061	1.06			0.61
		Top side		0.948	0.111	0.95			0.11
		Bottom side	0.880			0.88			0.88
LTE Band 41	Front	1.219	0.834	0.102	2.05	#19	0.02	1.32	
	Back	1.281	0.987	0.116	2.27	#20	0.03	1.40	
	Left side	0.851			0.85			0.85	
	Right side		0.513	0.061	0.51			0.06	
	Top side		0.948	0.111	0.95			0.11	
	Bottom side	0.973			0.97			0.97	



16.3 Body-Worn Accessory Exposure Conditions


WWAN Band		Exposure Position	1	2	3	1+2		1+3	
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)
GSM	GSM850	Front	0.522	0.834	0.102	1.36			0.62
		Back	1.310	0.987	0.116	2.30	#02	0.03	1.43
		Back with Headset	1.322			1.32			1.32
	GSM1900	Front	0.747	0.834	0.102	1.58			0.85
		Back	1.240	0.987	0.116	2.23	#03	0.02	1.36
		Back with Headset	1.338			1.34			1.34
WCDMA	WCDMA II	Front	1.094	0.834	0.102	1.93	#04	0.02	1.20
		Back	1.174	0.987	0.116	2.16	#05	0.02	1.29
		Back with Headset	1.067			1.07			1.07
	WCDMA IV	Front	0.956	0.834	0.102	1.79	#06	0.01	1.06
		Back	1.266	0.987	0.116	2.25	#07	0.02	1.38
		Back with Headset	1.235			1.24			1.24
	WCDMA V	Front	0.945	0.834	0.102	1.78	#08	0.02	1.05
		Back	1.225	0.987	0.116	2.21	#09	0.02	1.34
		Back with Headset	1.365			1.37			1.37
LTE	LTE Band 2	Front	1.127	0.834	0.102	1.96	#10	0.02	1.23
		Back	1.398	0.987	0.116	2.39	#11	0.03	1.51
		Back with Headset	1.423			1.42			1.42
	LTE Band 4	Front	1.258	0.834	0.102	2.09	#12	0.02	1.36
		Back	1.418	0.987	0.116	2.41	#13	0.03	1.53
		Back with Headset	1.377			1.38			1.38
	LTE Band 5	Front	0.844	0.834	0.102	1.68	#14	0.01	0.95
		Back	1.099	0.987	0.116	2.09	#15	0.02	1.22
	LTE Band 7	Front	1.146	0.834	0.102	1.98	#16	0.02	1.25
		Back	1.317	0.987	0.116	2.30	#17	0.03	1.43
		Back with Headset	1.271			1.27			1.27
	LTE Band 26	Front	0.645	0.834	0.102	1.48			0.75
		Back	0.881	0.987	0.116	1.87	#18	0.02	1.00
	LTE Band 41	Front	1.219	0.834	0.102	2.05	#19	0.02	1.32
		Back	1.281	0.987	0.116	2.27	#20	0.03	1.40
Back with Headset		1.202			1.20			1.20	

16.4 SPLSR Evaluation and Analysis


General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.


Case #01	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Left Cheek	0.563	0	43.46	-56.83	-1.51	84.0	1.62	0.02	Not required
	WLAN2.4GHz		1.053	0	10.27	20.37	-1.72				

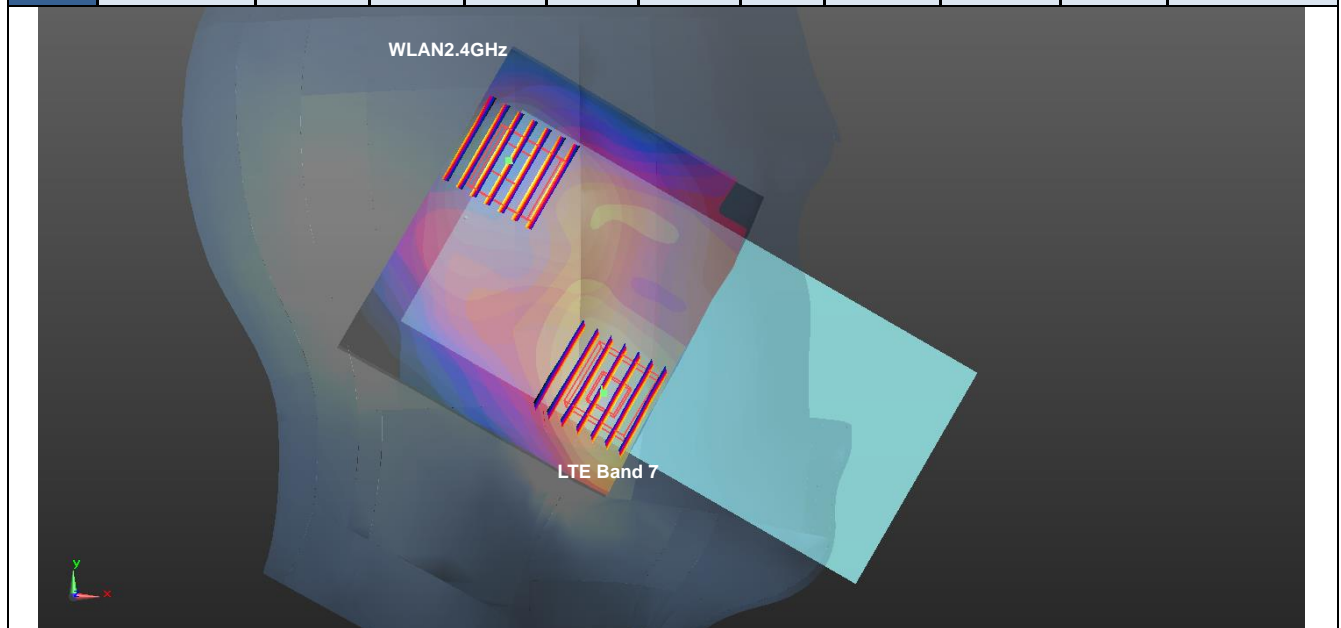


Case #02	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #02	GSM850 cube1	Back	1.31	5mm	12	-73.5	-1.62	136.3	2.30	0.03	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				
	GSM850 cube2	Back	1.31	5mm	4	-79.9	-1.64	140.5	2.30	0.02	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

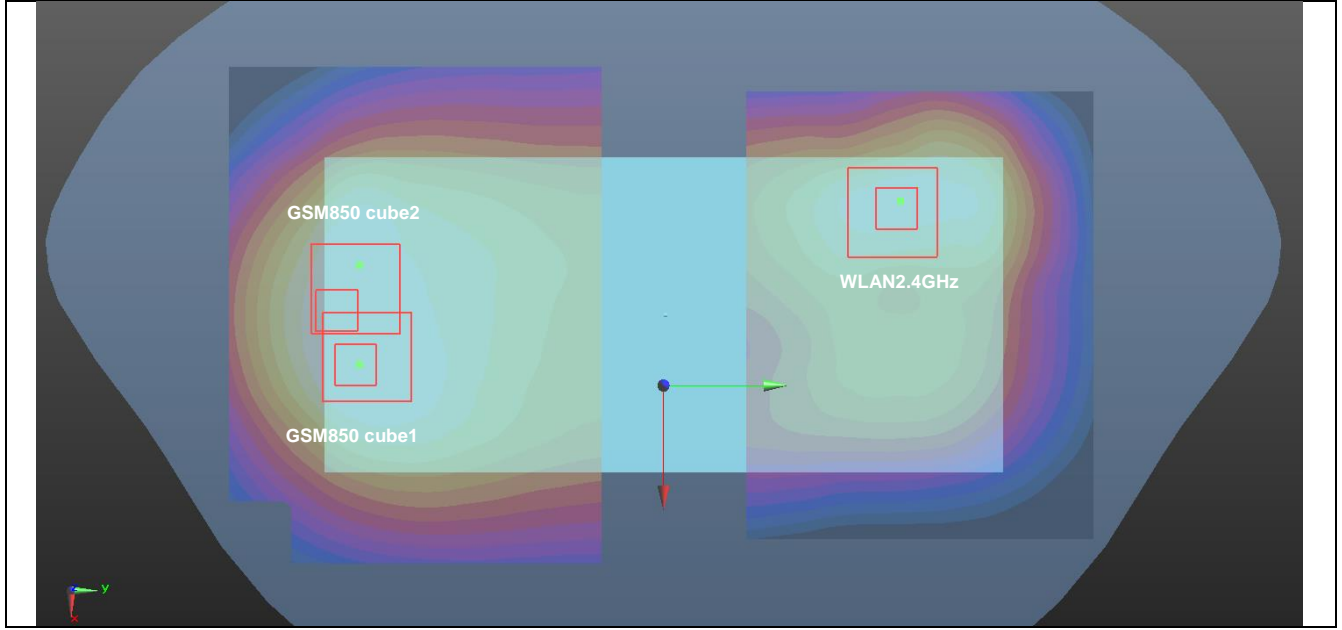


Case #03	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM 1900				X	Y	Z				
	WLAN2.4GHz	Back	0.987	5mm	-26.6	57.2	-1.7	135.0	2.23	0.02	Not required

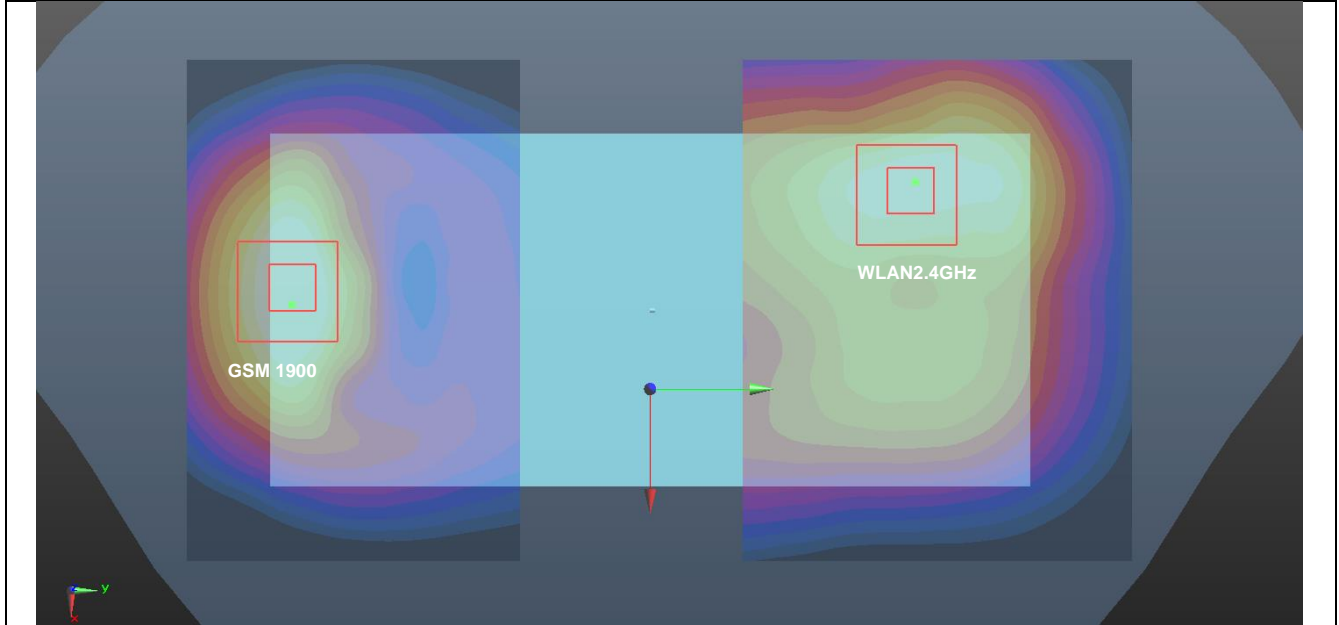


Case #04	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Front	1.094	5mm	1.5	-80.3	-1.46	154.1	1.93	0.02	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

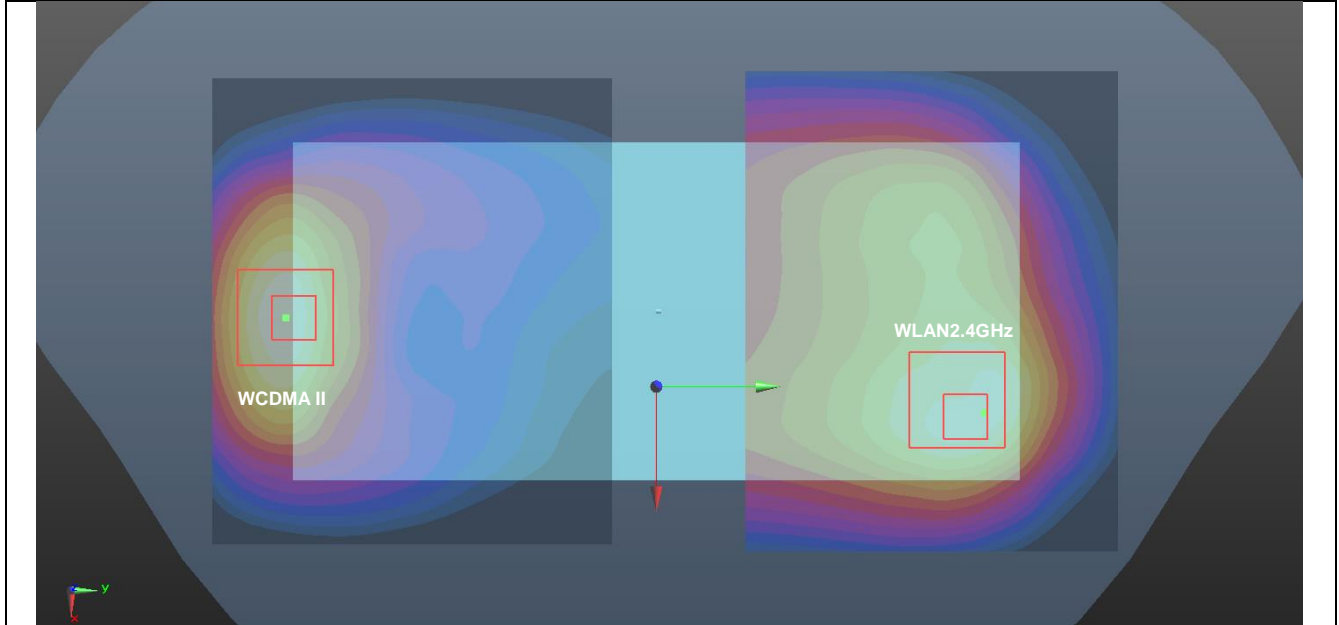


Case #05	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	WCDMA II	Back	1.174	5mm	-3.2	-79.4	-1.56	138.6	2.16	0.02	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

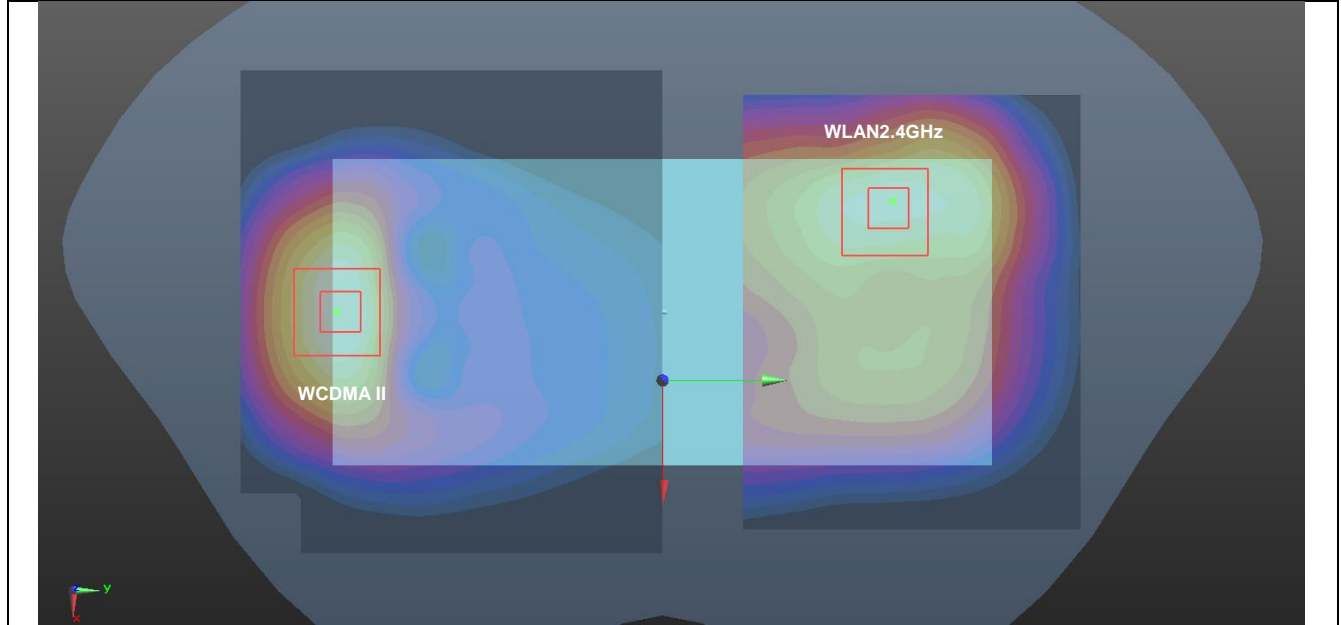


Case #06	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WCDMA IV	Front	0.956	5mm	4.3	-86.4	-1.52	159.7	1.79	0.01	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

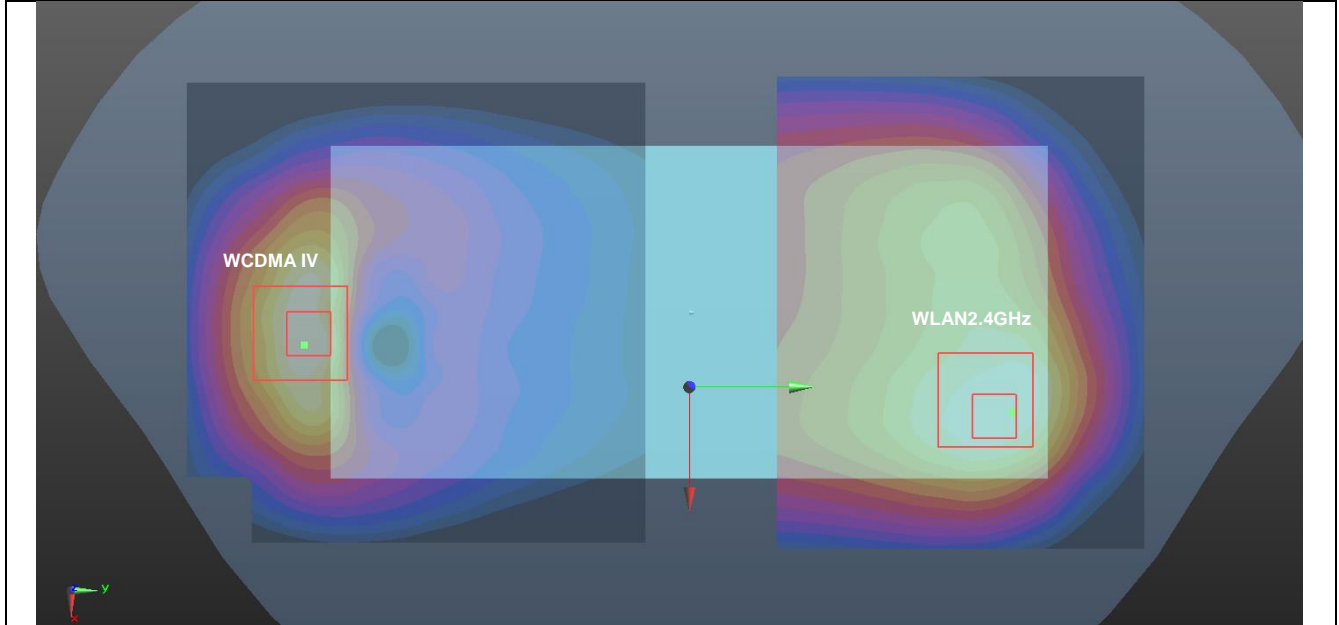


Case #07	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	WCDMA IV	Back	1.266	5mm	-1.7	-81	-1.55	140.4	2.25	0.02	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

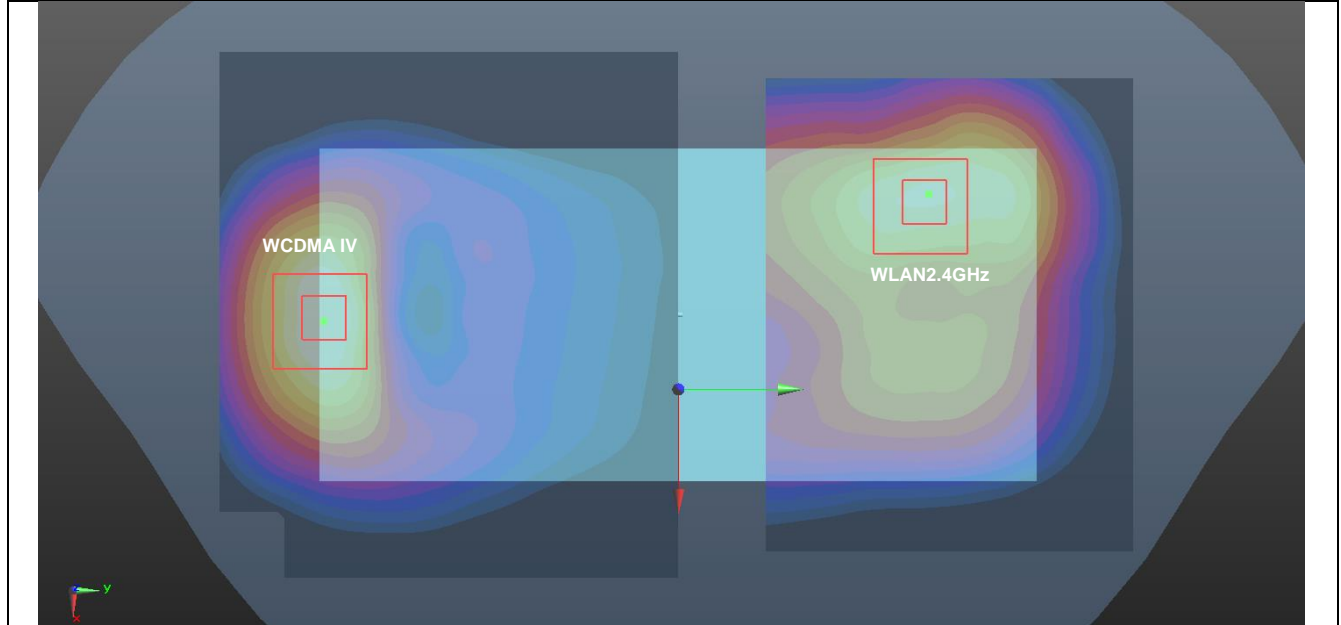


Case #08	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WCDMA V	Front	0.945	5mm	-6	-79.9	-1.72	155.0	1.78	0.02	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

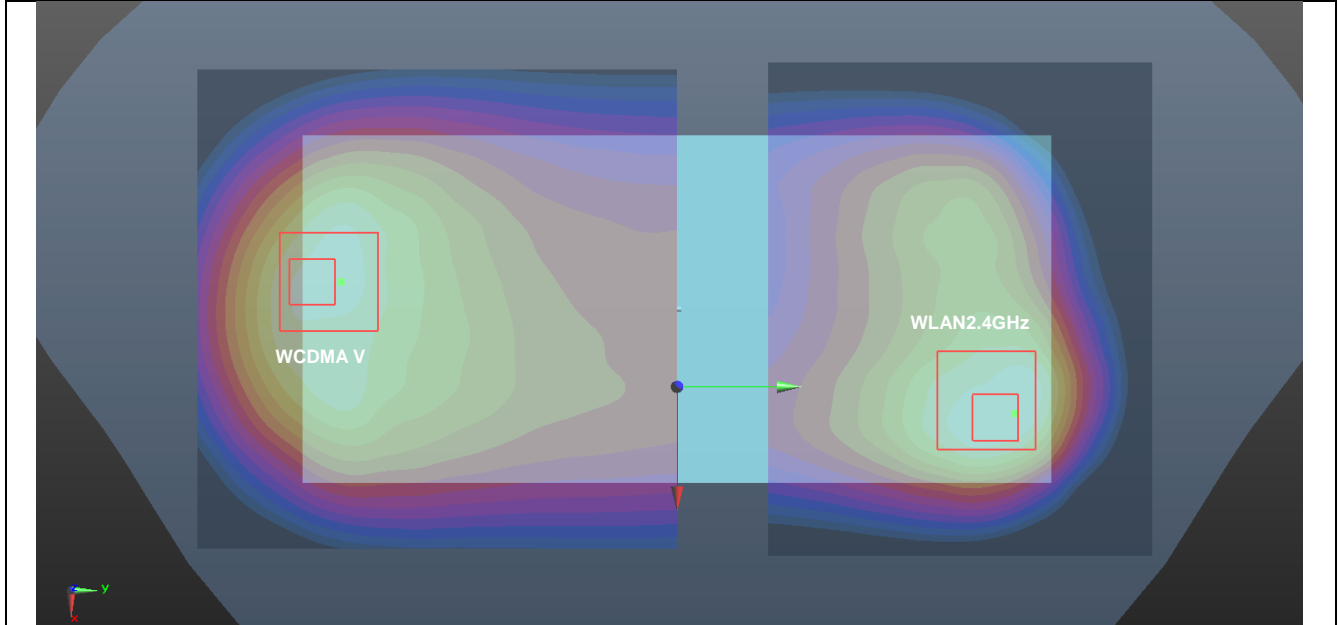


Case #09	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	WCDMA V	Back	1.225	5mm	12.4	-75.2	-1.69	138.0	2.21	0.02	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

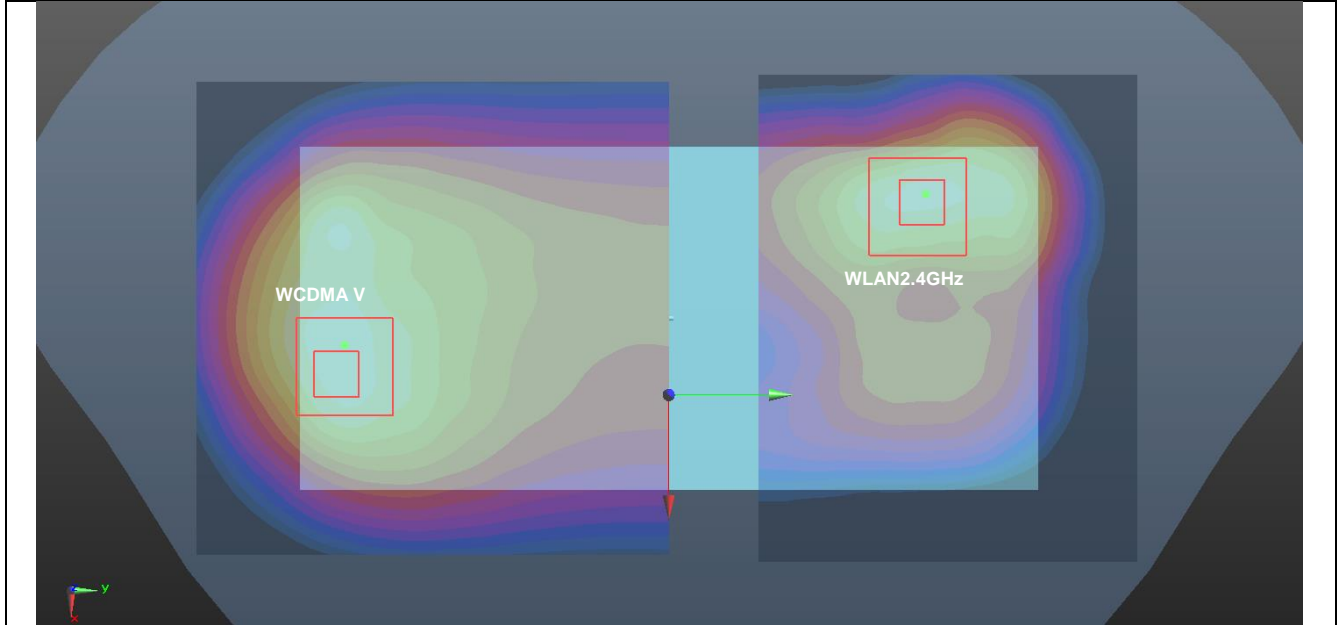


Case #10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2				X	Y	Z				
	WLAN2.4GHz	Front	0.834	5mm	24.8	72	-1.26	158.1	1.96	0.02	Not required

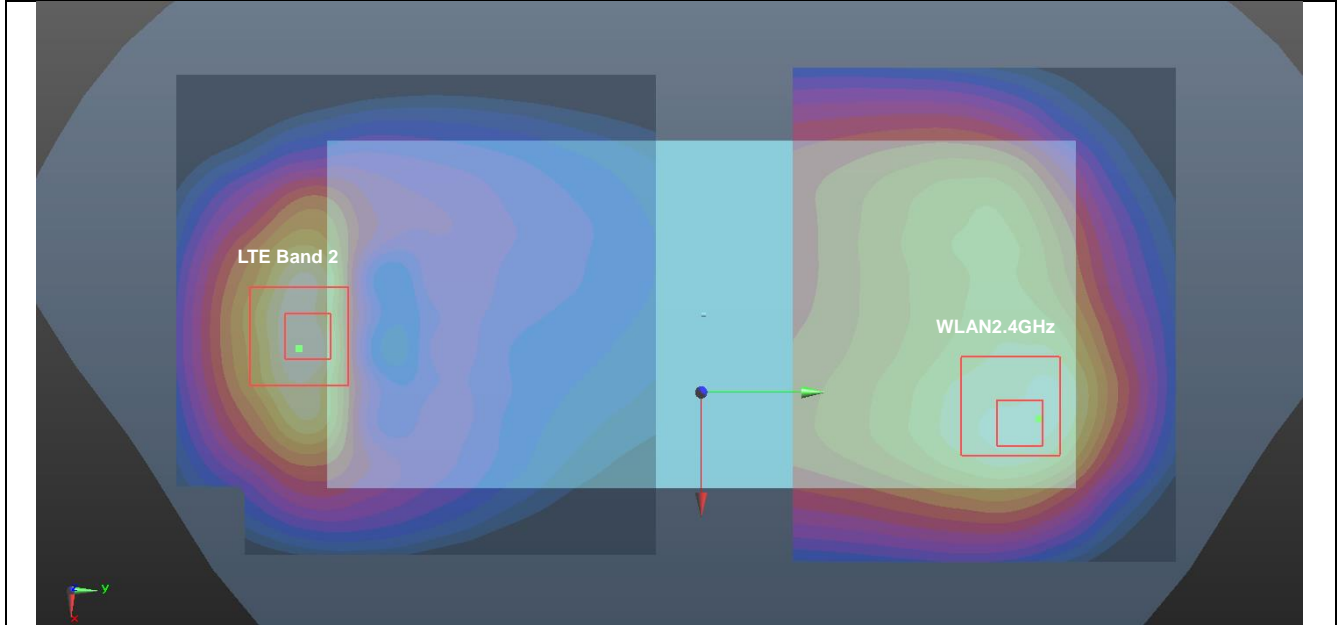


Case #11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2				X	Y	Z				
	WLAN2.4GHz	Back	0.987	5mm	-26.6	57.2	-1.7	136.1	2.39	0.03	Not required

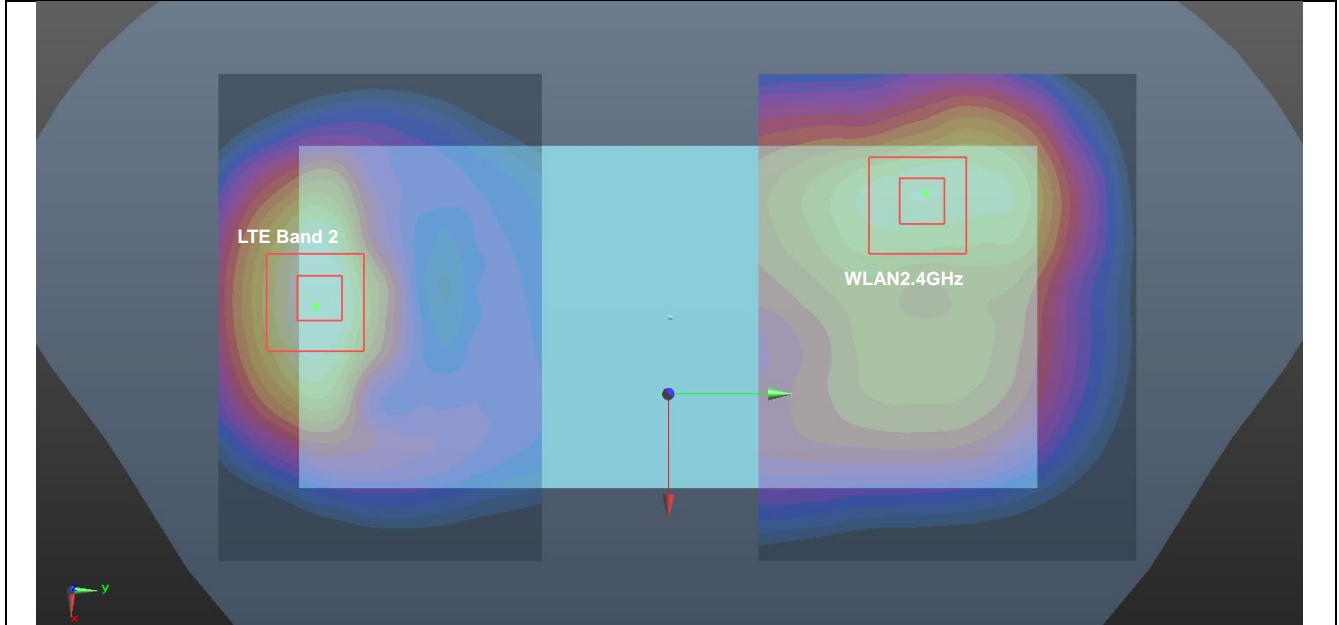


Case #12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4				X	Y	Z				
	WLAN2.4GHz	Front	0.834	5mm	24.8	72	-1.26	156.3	2.09	0.02	Not required

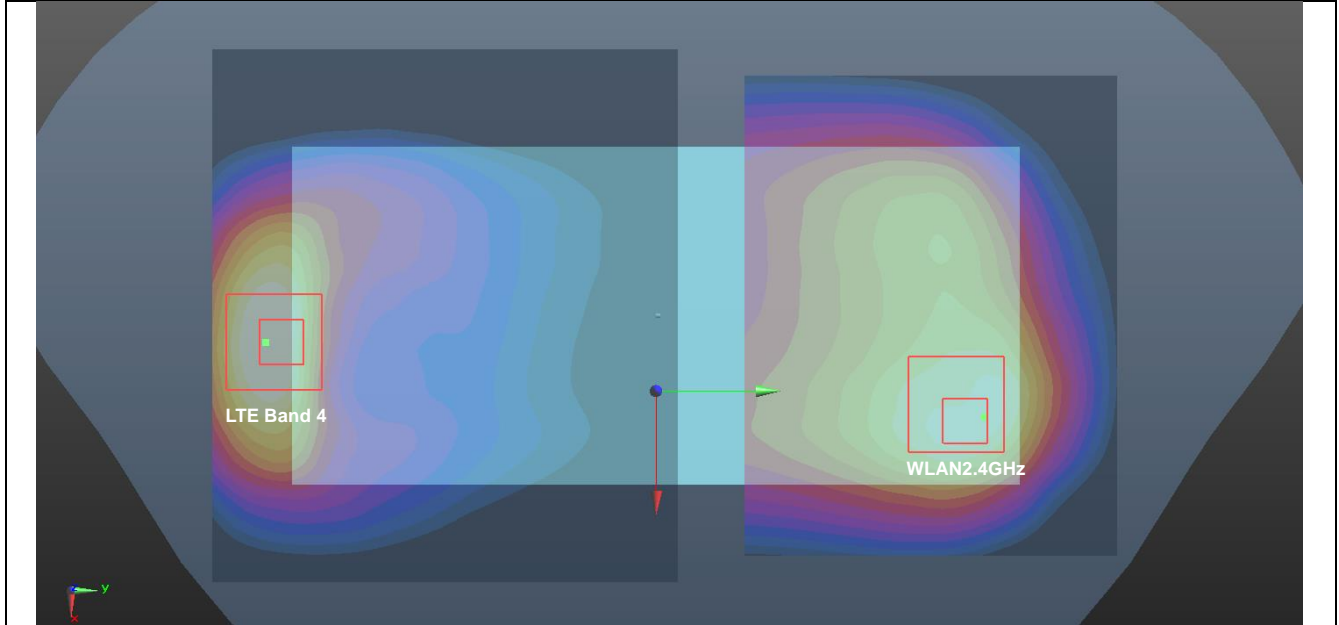


Case #13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4				X	Y	Z				
	WLAN2.4GHz	Back	0.987	5mm	-26.6	57.2	-1.7	138.6	2.41	0.03	Not required

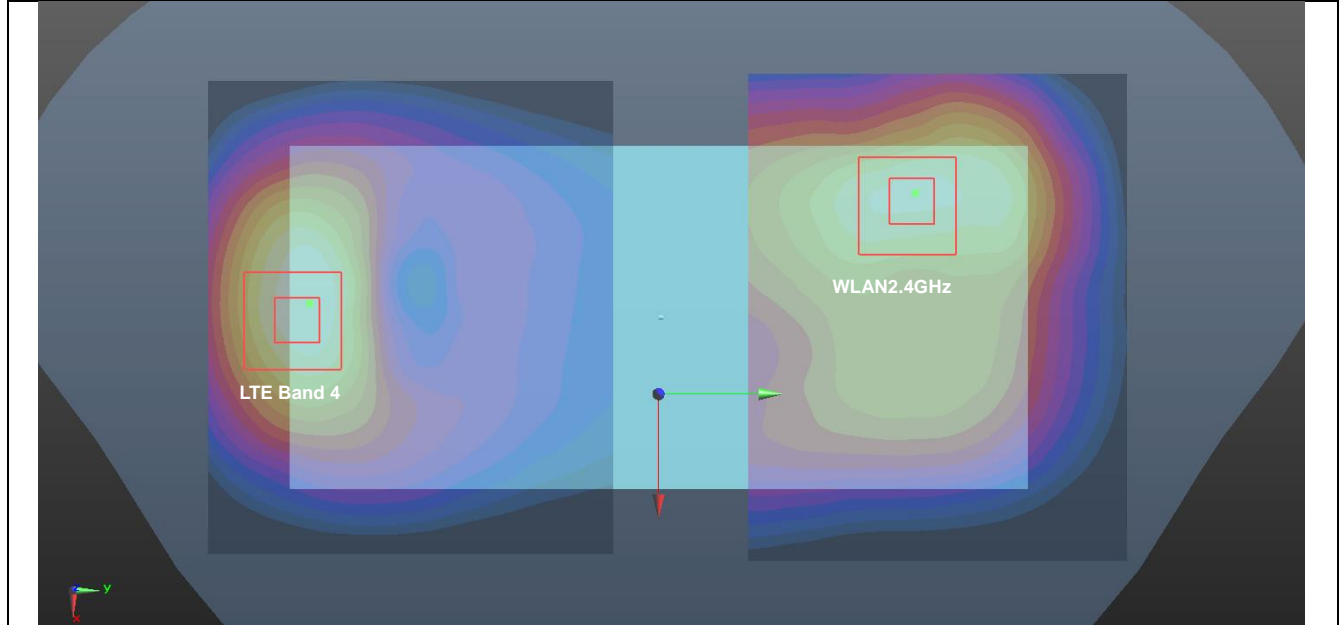


Case #14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Front	0.844	5mm	-1.3	-79.9	-1.73	154.1	1.68	0.01	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

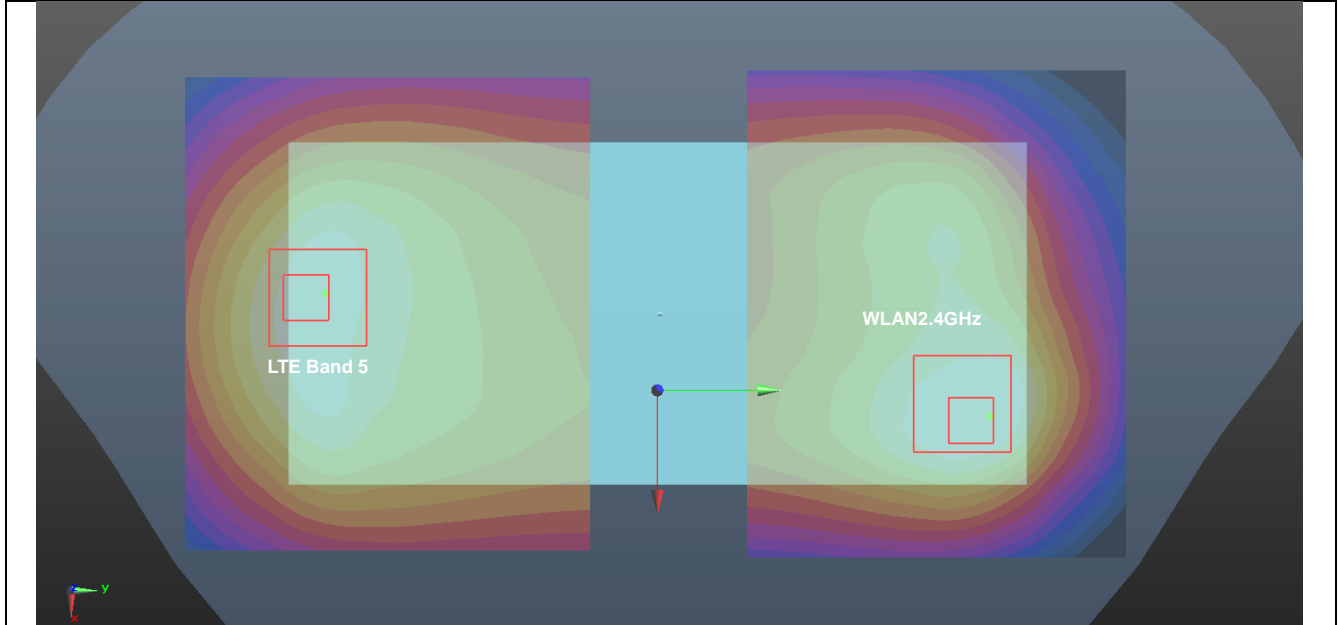


Case #15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				X	Y	Z				
	LTE Band 5	Back	1.099	5mm	12	-76.7	-1.64	139.4	2.09	0.02	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

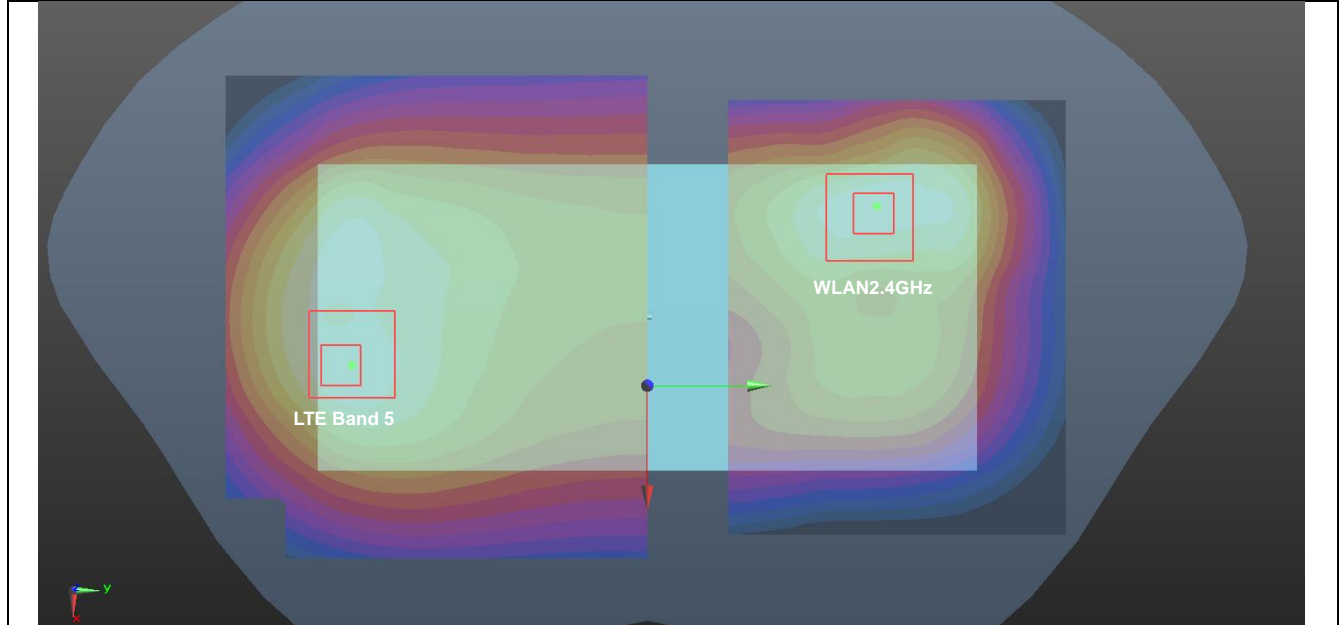


Case #16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Front	1.146	5mm	-27.6	-75.4	-1.63	156.4	1.98	0.02	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

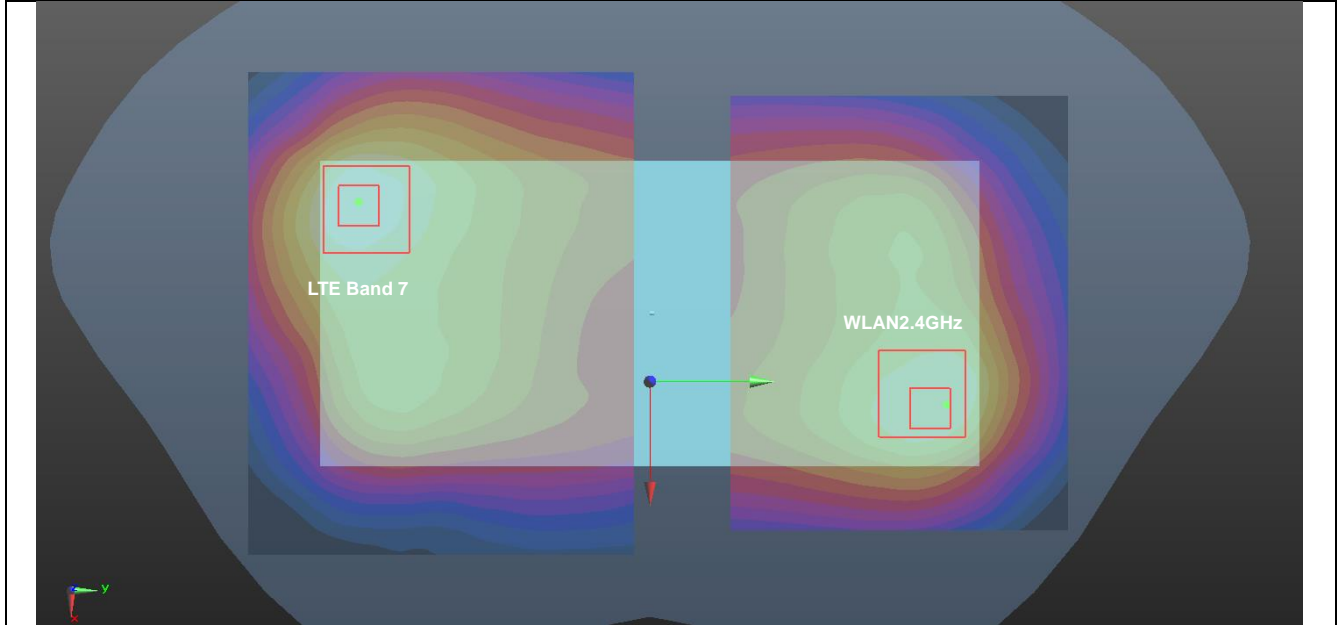


Case #17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7				X	Y	Z				
	LTE Band 7	Back	1.317	5mm	27.6	-70	-1.27	138.3	2.30	0.03	Not required
	WLAN2.4GHz		0.987	5mm	-26.6	57.2	-1.7				

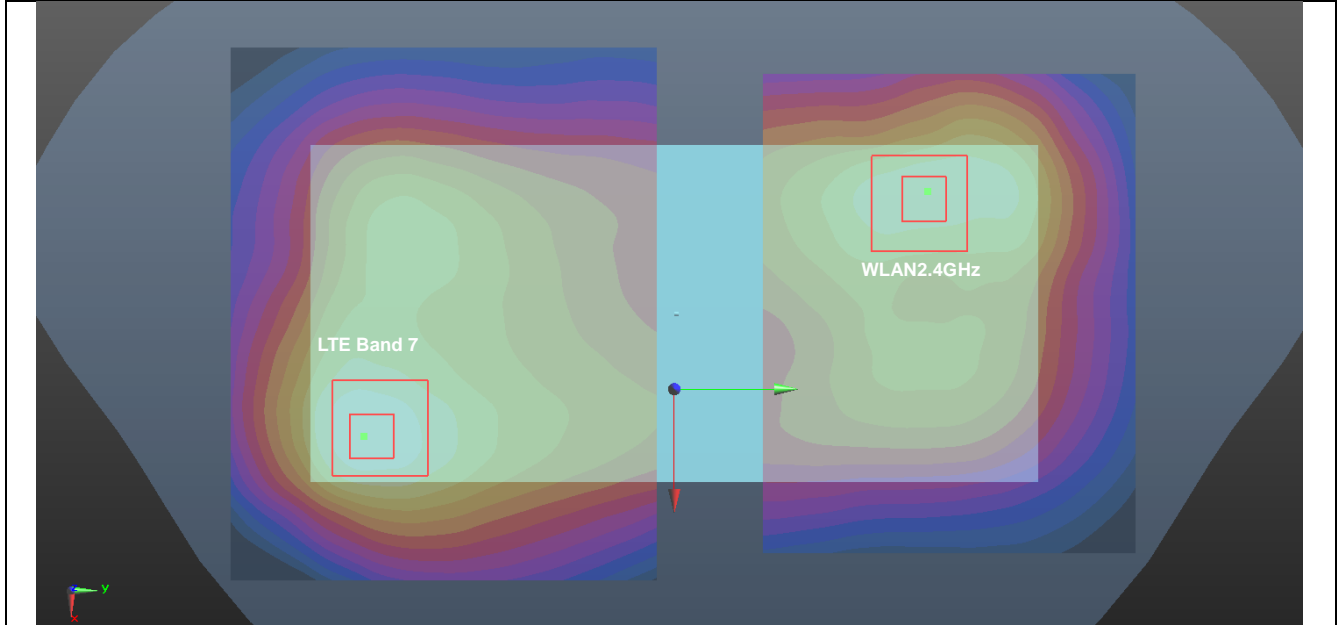


Case #18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 26				X	Y	Z				
	WLAN2.4GHz	Back	0.881	5mm	13.6	-75.1	-1.6	138.3	1.87	0.02	Not required
	LTE Band 26		0.987	5mm	-26.6	57.2	-1.7				

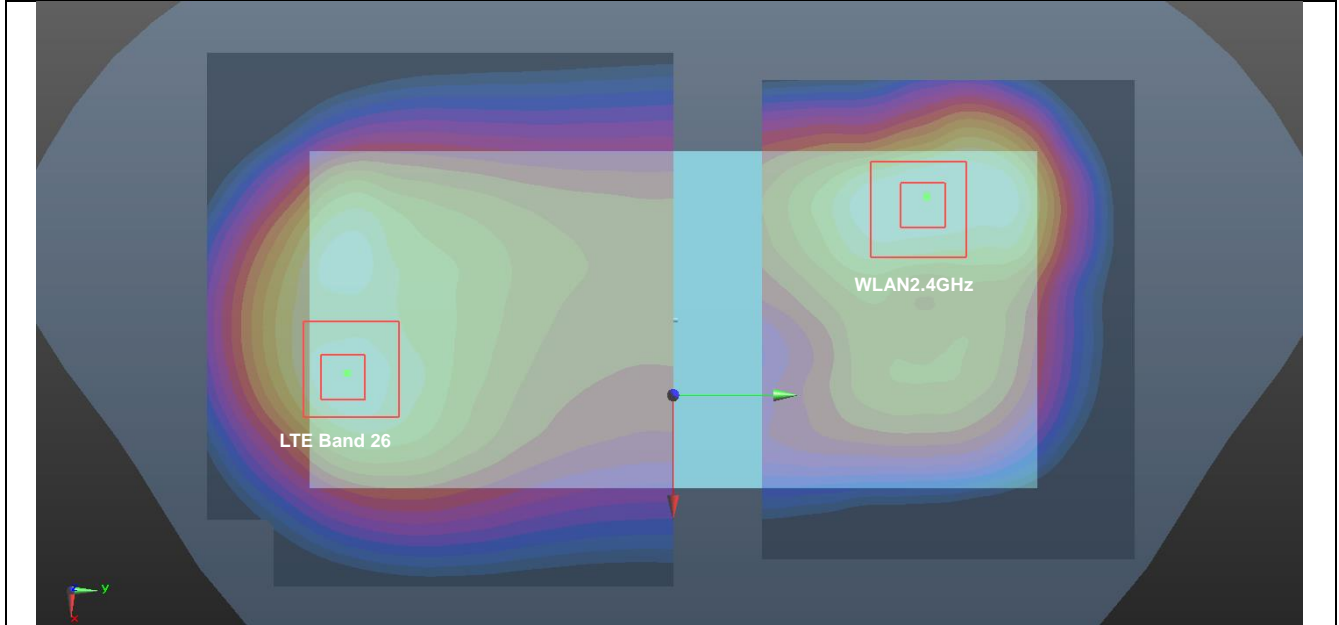

Case #19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 41	Front	1.219	5mm	-27.2	-75.4	-1.66	156.3	2.05	0.02	Not required
	WLAN2.4GHz		0.834	5mm	24.8	72	-1.26				

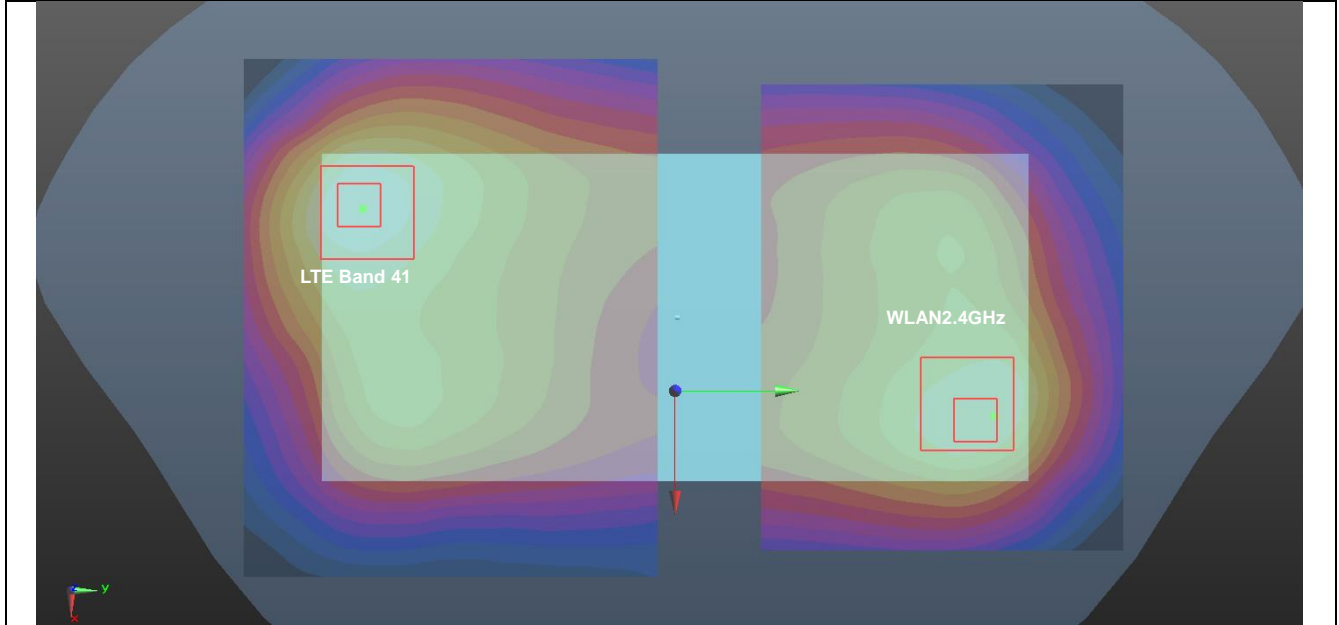

Case #20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 41				X	Y	Z				
	WLAN2.4GHz	Back	0.987	5mm	-26.6	57.2	-1.7	136.3	2.27	0.03	Not required

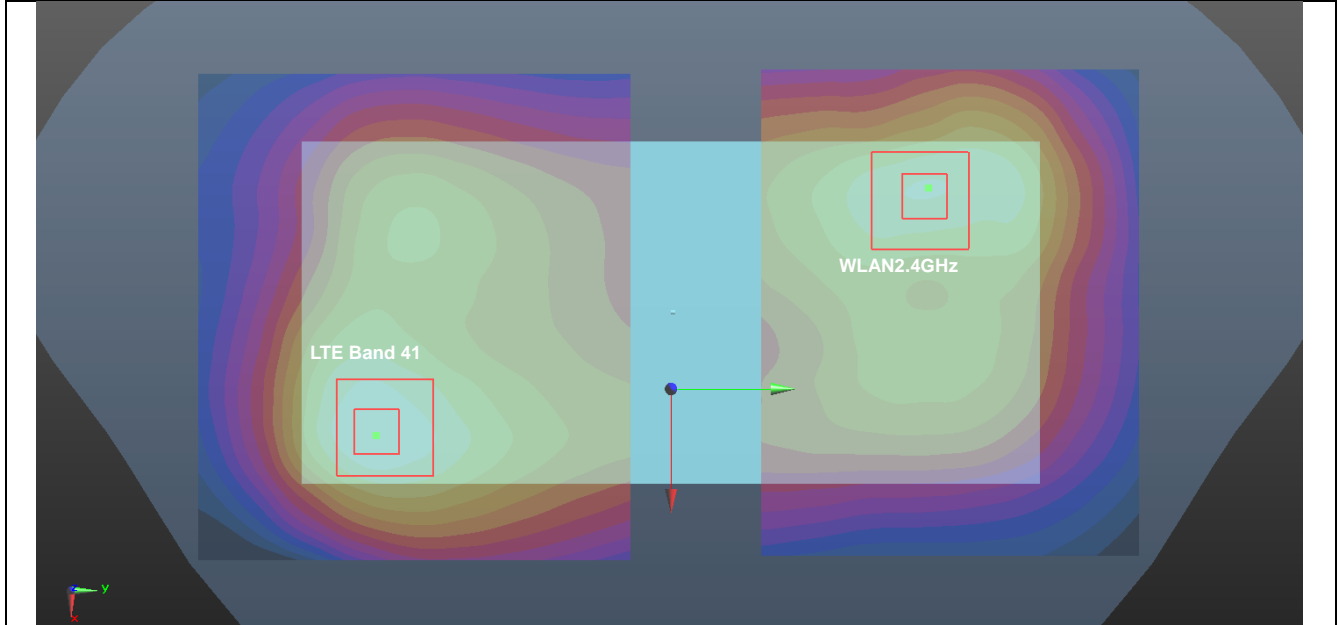

17. Supplemental Tuner Tests Results

General Note:

1. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
2. To evaluate all of the tuner states, the 144 tuner states are divided evenly among bands (except for GSM850/1900/LTE band7/38/41), mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
3. According to workshop 2019, if any single point SAR measurement result is $> 1.2 \text{ W/kg}$ for a band/exposure condition combination set, all supported tuner states are evaluated with single point SAR measurements for the combination. So we verified the single point SAR that bands with SAR value high than 1.2 W/Kg .
4. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

17.1 Supplemental Tuner Head & Body SAR Results

Please refer to Appendix C.

Test Engineer: Nick Hu, Yuan Zhao, Jiaying Chang, Yuankai Kong



18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz

DUT: D835V2 - SN:4d151

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.072$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.38, 6.38, 6.38); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.03 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.05 V/m ; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 3.56 W/kg
SAR(1 g) = 2.43 W/kg ; SAR(10 g) = 1.6 W/kg
Maximum value of SAR (measured) = 3.06 W/kg

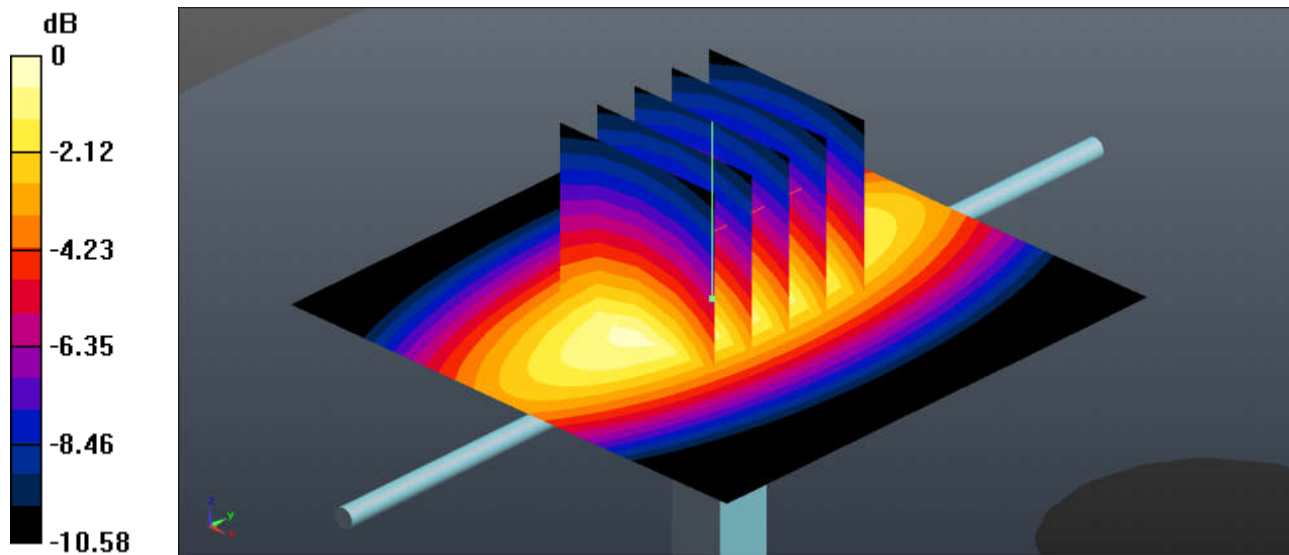

0 dB = 3.06 W/kg = 4.86 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2 - SN:1090

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.59, 5.59, 5.59); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 14.1 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 89.96 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 17.7 W/kg
SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.23 W/kg
Maximum value of SAR (measured) = 14.0 W/kg

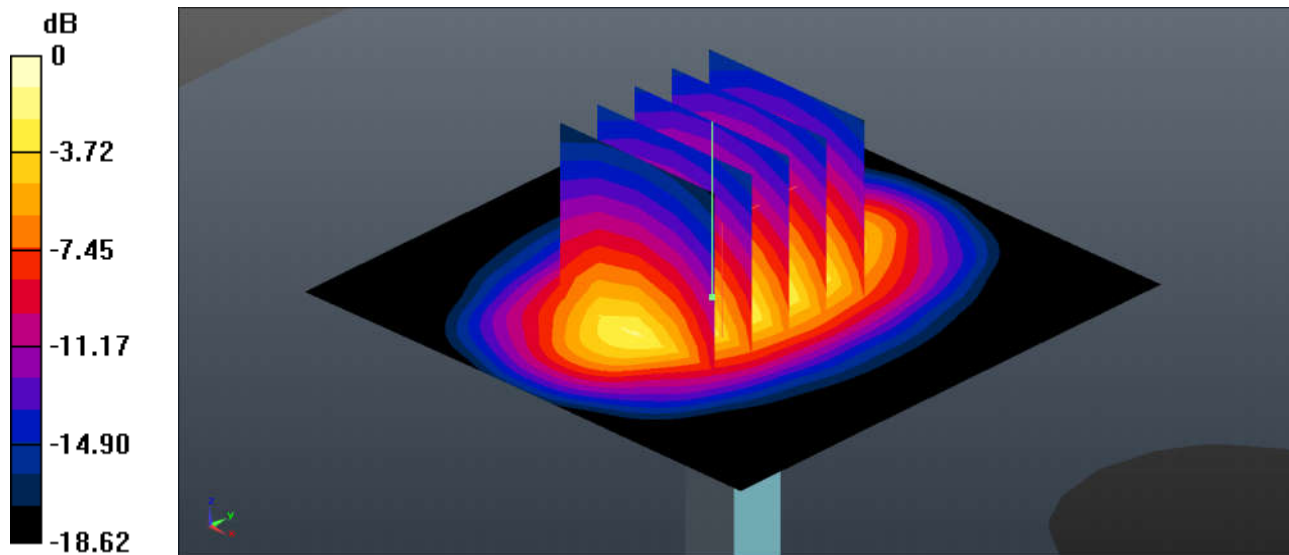

0 dB = 14.0 W/kg = 11.46 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2 - SN:5d170

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.64 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 9.77 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 14.2 W/kg

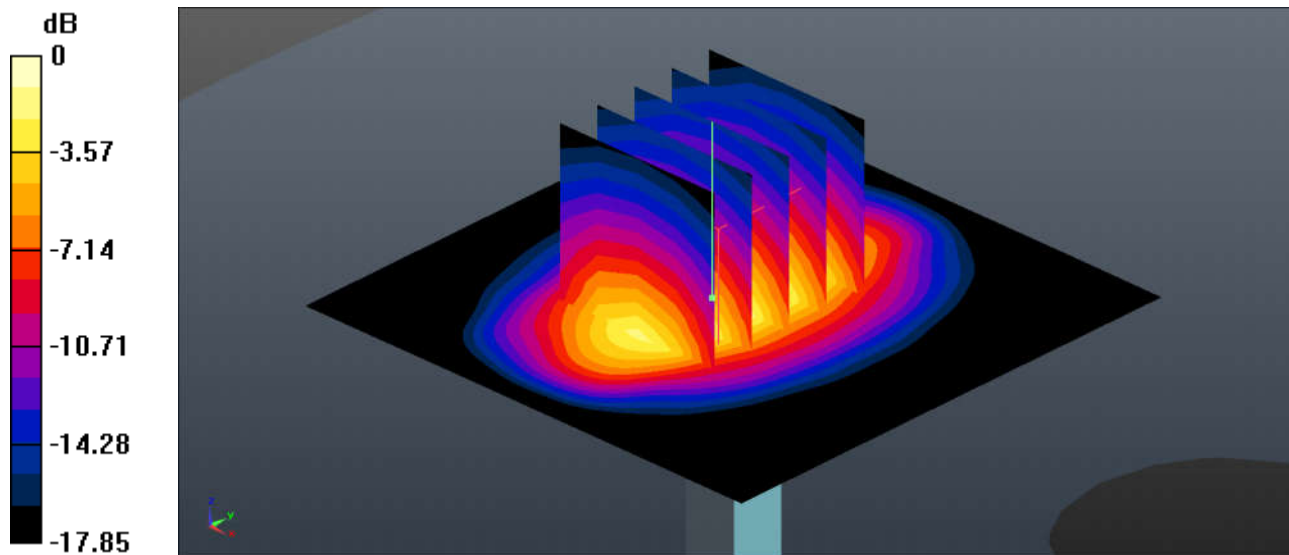

0 dB = 14.2 W/kg = 11.52 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN:908

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.77, 4.77, 4.77); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.41 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

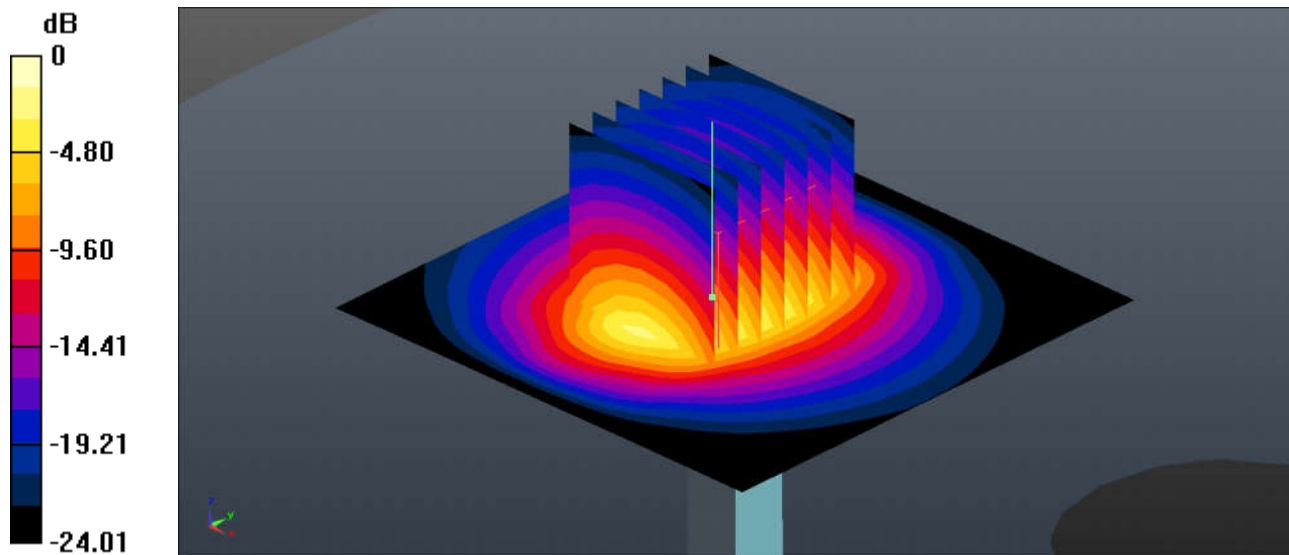

0 dB = 21.2 W/kg = 13.26 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 37.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.58, 4.58, 4.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.0 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.06 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.22 W/kg

Maximum value of SAR (measured) = 22.3 W/kg

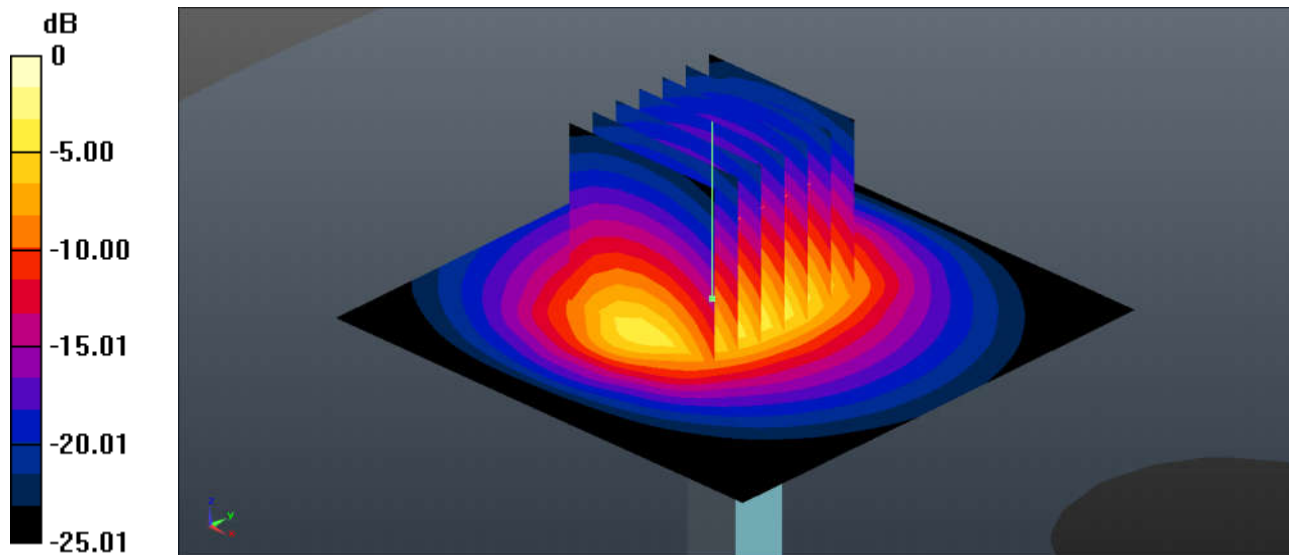

0 dB = 22.3 W/kg = 13.48 dBW/kg



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.