



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2063-3  
**FCC ID** : IHDT56YU2  
**STANDARD** : FCC Part 15 Subpart C §15.225  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

The product was received on Jan. 08, 2020 and testing was completed on Mar. 14, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by SPORTON INTERNATIONAL INC. EMC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**TABLE OF CONTENTS .....2**  
**REVISION HISTORY .....3**  
**SUMMARY OF THE TEST RESULT .....4**  
**1. GENERAL DESCRIPTION .....5**  
    1.1 Applicant..... 5  
    1.2 Manufacturer ..... 5  
    1.3 Product Feature of Equipment Under Test ..... 5  
    1.4 Product Specification of Equipment Under Test ..... 6  
    1.5 Specification of Accessory..... 6  
    1.6 Modification of EUT ..... 8  
    1.7 Testing Location ..... 8  
    1.8 Test Software ..... 9  
    1.9 Applicable Standards..... 9  
**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....10**  
    2.1 Descriptions of Test Mode ..... 10  
    2.2 Connection Diagram of Test System ..... 11  
    2.3 Table for Supporting Units ..... 12  
    2.4 EUT Operation Test Setup ..... 12  
**3. TEST RESULTS.....13**  
    3.1 AC Power Line Conducted Emissions Measurement ..... 13  
    3.2 20dB and 99% OBW Spectrum Bandwidth Measurement..... 15  
    3.3 Frequency Stability Measurement ..... 16  
    3.4 Field Strength of Fundamental Emissions and Mask Measurement..... 17  
    3.5 Radiated Emissions Measurement ..... 19  
    3.6 Antenna Requirements..... 22  
**4. LIST OF MEASURING EQUIPMENT .....23**  
**5. UNCERTAINTY OF EVALUATION .....24**  
**APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST**  
**APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS**  
    B1. Test Result of 20dB Spectrum Bandwidth  
    B2. Test Result of Frequency Stability  
**APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS**  
    C1. Test Result of Field Strength of Fundamental Emissions  
    C2. Results of Radiated Emissions (9 kHz~30MHz)  
    C3. Results of Radiated Emissions (30MHz~1GHz)  
**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF THE TEST RESULT

Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 6.38 dB at 0.181MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 19.03 dBμV/m at 13.56 MHz
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 6.35 dB at 40.67MHz
3.6	15.203	Antenna Requirements	Complies	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2063-3
FCC ID	IHDT56YU2
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM Receiver
IMEI Code	Conducted: N/A Conduction: 353585110018531/353585110018549 Radiation: 353585110016675/353585110016683
HW Version	DVT2
SW Version	QPD30.65
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.504 kHz
99%OBW	2.127 kHz
Antenna Type	ferrite+FPC Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.5 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name SC-53UK
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name SC-55AU
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 3(Chile)	Brand Name	Motorola (Salom)	Model Name SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 3(BR)	Brand Name	Motorola (Salom)	Model Name SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 3 (BR Local Build)	Brand Name	Motorola (Flex/Salom)	Model Name SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	
AC Adapter 4(IN)	Brand Name	Motorola (Salom)	Model Name SC-54
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA	



<b>AC Adapter5 (BR Local Build)</b>	<b>Brand Name</b>	Motorola (Cliptech/Tenpao)	<b>Model Name</b>	SC-57
	<b>Power Rating</b>	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
<b>Battery</b>	<b>Brand Name</b>	Motorola(ATL)	<b>Model Name</b>	LR50
	<b>Power Rating</b>	3.87Vdc,4235/4500mAh	Type	Li-ion Polymer
<b>Earphone 1</b>	<b>Brand Name</b>	Motorola (Lianyun)	<b>Model Name</b>	SH38C37773
	<b>Signal Line Type</b>	1.1 meter, shielded cable, without ferrite core		
<b>Earphone 2</b>	<b>Brand Name</b>	Motorola (Cosonic)	<b>Model Name</b>	SH38C44959
	<b>Signal Line Type</b>	1.1 meter, shielded cable, without ferrite core		
<b>USB Cable 1</b>	<b>Brand Name</b>	Motorola (Sai bao)	<b>Model Name</b>	SC18C24367
	<b>Signal Line Type</b>	1.0 meter, shielded cable, without ferrite core		
<b>USB Cable 2</b>	<b>Brand Name</b>	Motorola (Luxshare)	<b>Model Name</b>	SC18C24368
	<b>Signal Line Type</b>	1.0 meter, shielded cable, without ferrite core		
<b>USB Cable 3</b>	<b>Brand Name</b>	Motorola (I SHENG)	<b>Model Name</b>	SC18C28955
	<b>Signal Line Type</b>	1.0 meter, shielded cable, without ferrite core		



### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Testing Location

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Site</b>	Sporton International (Kunshan) Inc.			
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS	CO01-KS	CN1257	314309
<b>Test Engineer</b>	Lay Li	Amos Zhang		
<b>Temperature</b>	22~24°C	25.3~26.2°C		
<b>Relative Humidity</b>	53~55%	38~40%		



<FCC>-TW

<b>Test Site</b>	SPORTON INTERNATIONAL INC.EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0978 FAX: +886-3-327-0978
<b>Test Site No.</b>	<b>Sporton Site No.</b> 03CH11-HY TAF Code: 1190
<b>Test Engineer</b>	Cookie Ku
<b>Temperature</b>	20.2~23.9°C
<b>Relative Humidity</b>	50.7~70.2%

Note: Test data subcontracted: radiated spurious emissions in section 3.4 and 3.5 of this report.

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH11-HY	AUDIX	E3	6.2009-8-24

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013



## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.


Test Cases	
<b>AC Conducted Emission</b>	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 2(Charging from Adapter 5) + Earphone 1 + NFC Tx
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable.	

## 2.2 Connection Diagram of Test System

### For Radiation

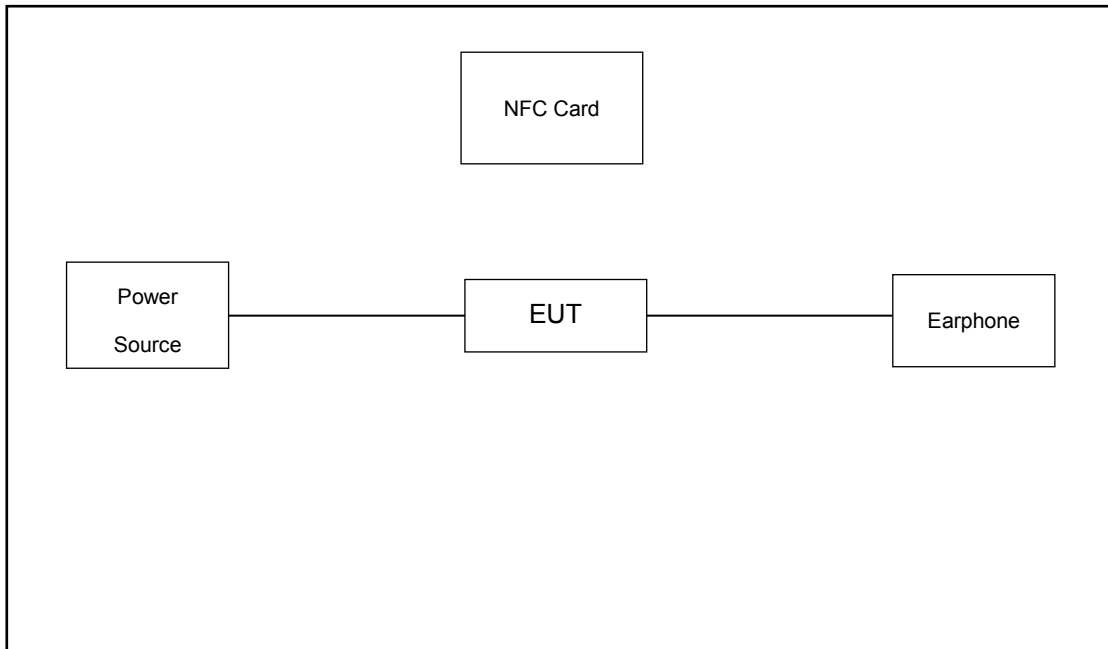

### For Conduction

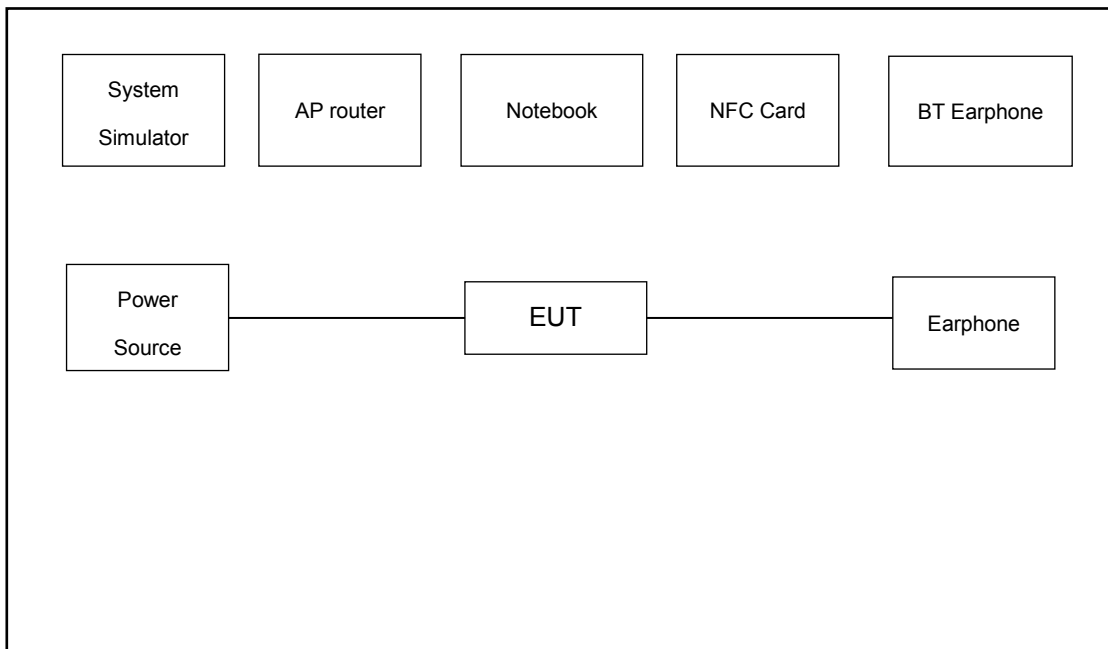

## 2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
5.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

### 3. Test Results

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test setup

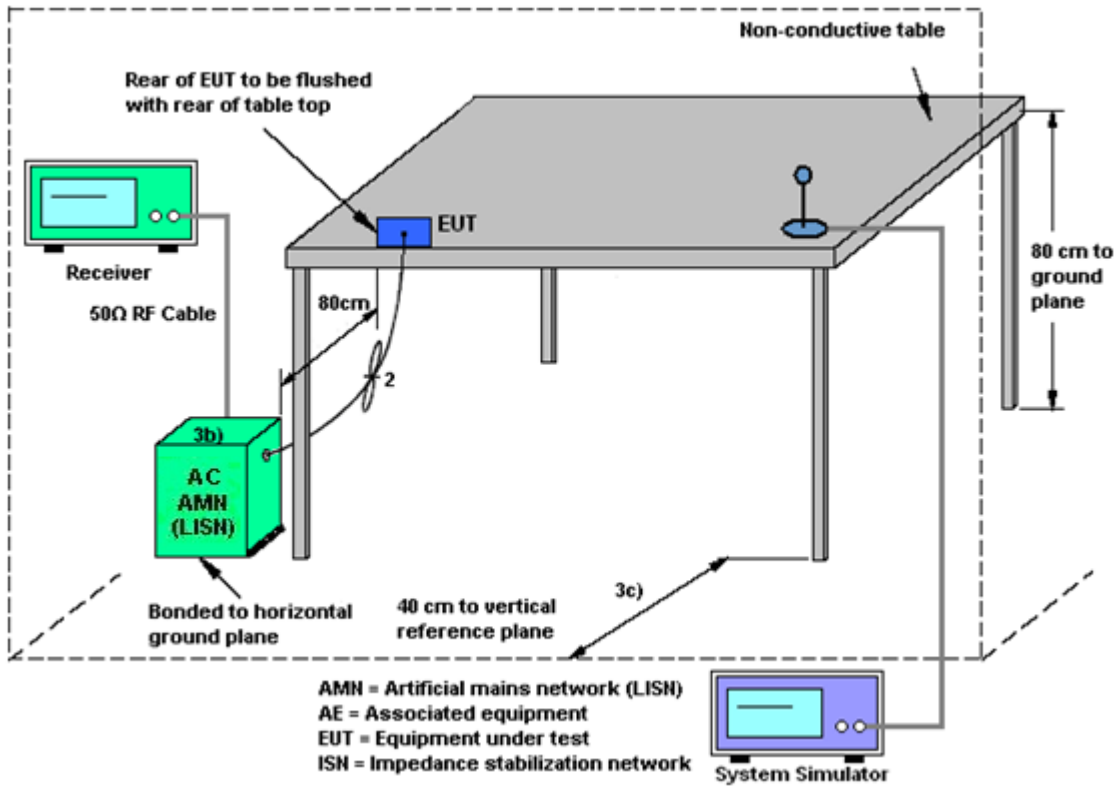

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

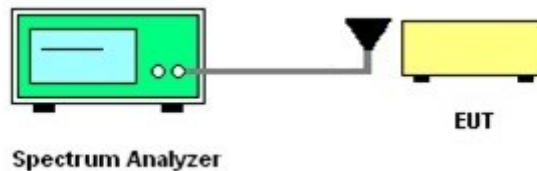

### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

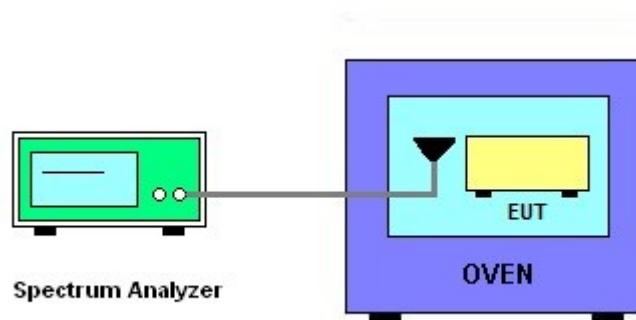

#### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ( $\mu\text{V/m}$ ) at 30m	Field Strength ( $\text{dB}\mu\text{V/m}$ ) at 30m	Field Strength ( $\text{dB}\mu\text{V/m}$ ) at 10m	Field Strength ( $\text{dB}\mu\text{V/m}$ ) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

For radiated emissions below 30MHz

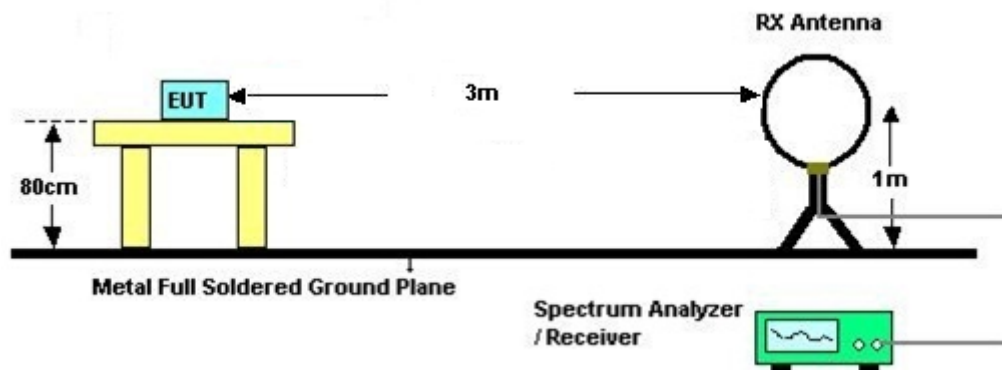

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

## 3.5 Radiated Emissions Measurement

### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




### **3.5.4 Test Procedures**


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

### 3.5.5 Test Setup

For radiated emissions below 30MHz

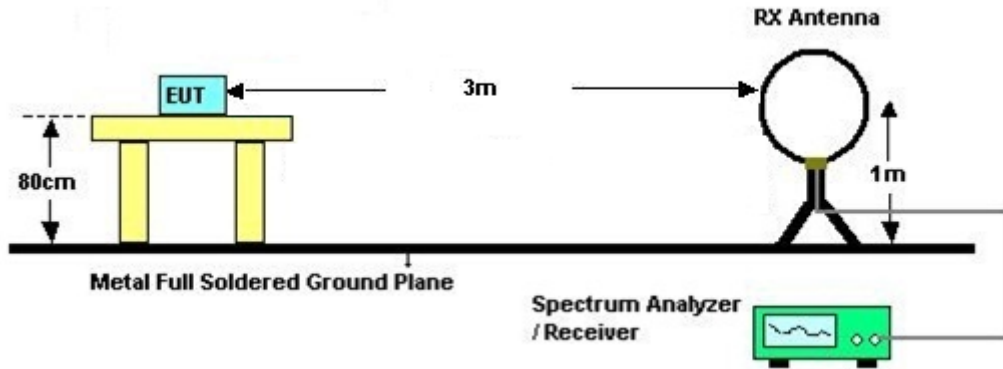

For radiated emissions above 30MHz

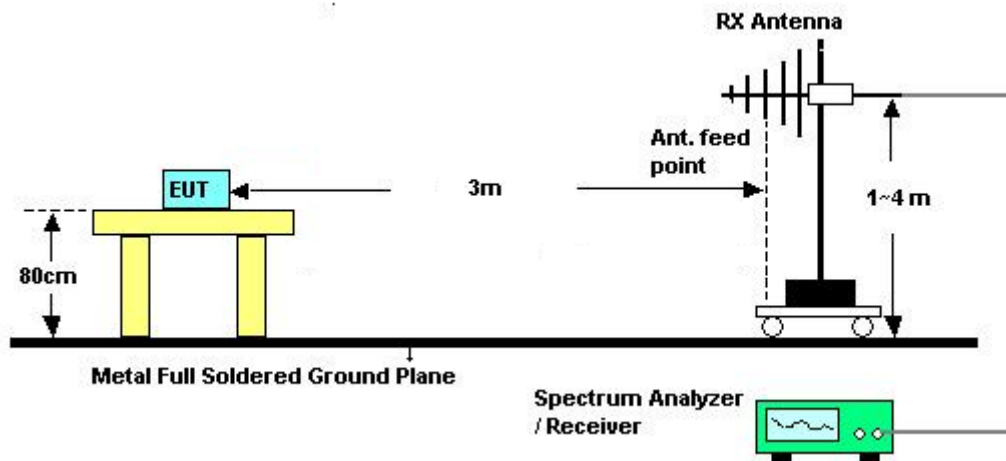

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:** There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 16, 2019	Mar. 14, 2020	Apr. 15, 2020	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2019	Mar. 14, 2020	Jul. 03, 2020	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2019	Mar. 07, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Mar. 07, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Mar. 07, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Mar. 07, 2020	Oct. 17, 2020	Conduction (CO01-KS)
EMI Test Receiver	Agilent	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Mar. 08, 2019	Mar. 03, 2020	Mar. 07, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 28, 2019	Mar. 03, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Mar. 03, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Mar. 03, 2020	Jan. 08, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Mar. 03, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 03, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 03, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 03, 2020	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 03, 2020	N/A	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000 C7/40SS	SN2	20M High Pass	Sep. 15, 2019	Mar. 03, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 13, 2019	Mar. 03, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 13, 2019	Mar. 03, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Mar. 03, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	Mar. 03, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP161237	N/A	Oct. 25, 2019	Mar. 03, 2020	Oct. 24, 2020	Radiation (03CH11-HY)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.45dB
---	--------


### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.2dB
---	-------



## Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

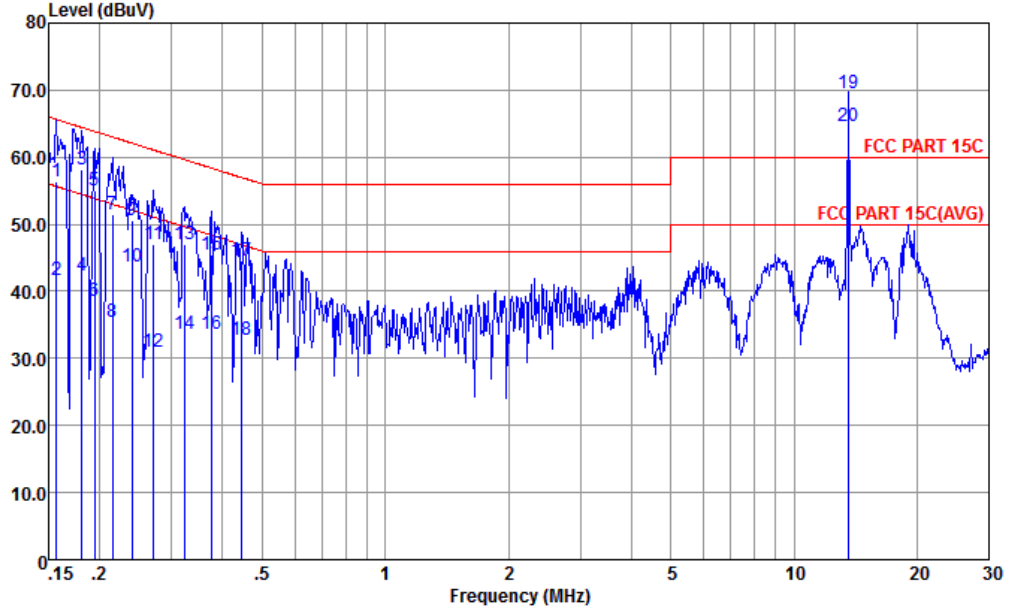

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-191028-060105 NEUTRAL


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	56.34	-9.31	65.65	45.80	0.08	10.46	QP
2	0.156	41.74	-13.91	55.65	31.20	0.08	10.46	Average
3	0.181	58.08	-6.38	64.46	47.60	0.08	10.40	QP
4	0.181	42.38	-12.08	54.46	31.90	0.08	10.40	Average
5	0.194	55.05	-8.79	63.84	44.60	0.08	10.37	QP
6	0.194	38.65	-15.19	53.84	28.20	0.08	10.37	Average
7	0.215	51.54	-11.47	63.01	41.11	0.08	10.35	QP
8	0.215	35.34	-17.67	53.01	24.91	0.08	10.35	Average
9	0.240	50.62	-11.46	62.08	40.20	0.08	10.34	QP
10	0.240	43.72	-8.36	52.08	33.30	0.08	10.34	Average
11	0.272	47.01	-14.06	61.07	36.60	0.09	10.32	QP
12	0.272	31.01	-20.06	51.07	20.60	0.09	10.32	Average
13	0.322	46.99	-12.67	59.66	36.60	0.09	10.30	QP
14	0.322	33.69	-15.97	49.66	23.30	0.09	10.30	Average
15	0.377	45.57	-12.77	58.34	35.20	0.09	10.28	QP
16	0.377	33.57	-14.77	48.34	23.20	0.09	10.28	Average
17	0.444	44.55	-12.43	56.98	34.20	0.10	10.25	QP
18	0.444	32.65	-14.33	46.98	22.30	0.10	10.25	Average
19 *	13.560	69.53	9.53	60.00	58.80	0.35	10.38	QP
20 *	13.560	64.53	14.53	50.00	53.80	0.35	10.38	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

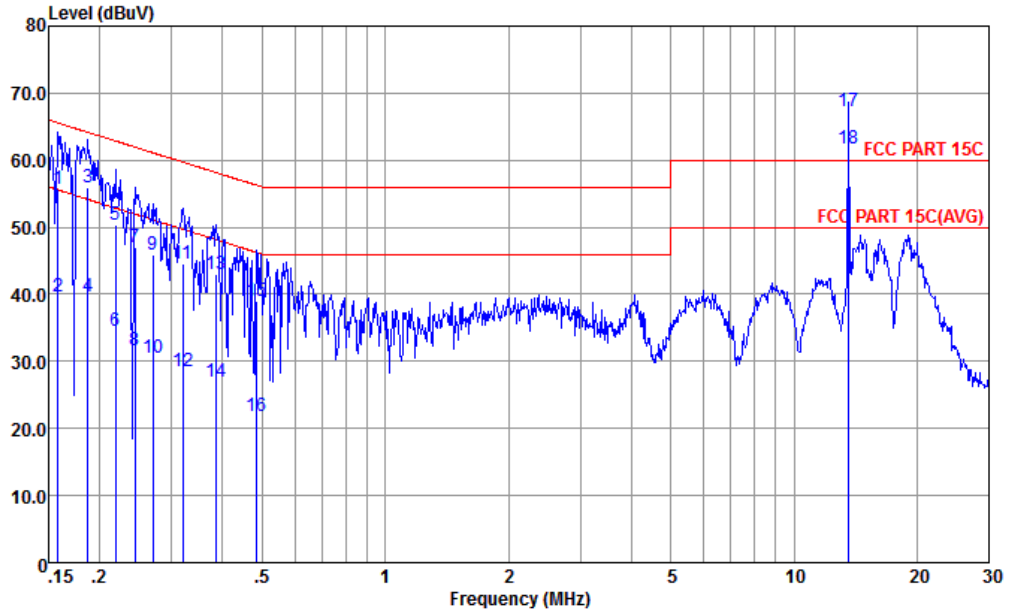

Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-191028-060105 LINE


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.168	55.69	-9.87	65.56	45.20	0.03	10.46	QP
2	0.168	39.69	-15.87	55.56	29.20	0.03	10.46	Average
3	0.187	55.93	-8.22	64.15	45.50	0.04	10.39	QP
4	0.187	39.63	-14.52	54.15	29.20	0.04	10.39	Average
5	0.219	50.29	-12.59	62.88	39.90	0.04	10.35	QP
6	0.219	34.59	-18.29	52.88	24.20	0.04	10.35	Average
7	0.244	46.98	-14.97	61.95	36.60	0.04	10.34	QP
8	0.244	31.58	-20.37	51.95	21.20	0.04	10.34	Average
9	0.270	45.87	-15.25	61.12	35.50	0.05	10.32	QP
10	0.270	30.57	-20.55	51.12	20.20	0.05	10.32	Average
11	0.320	44.55	-15.16	59.71	34.20	0.05	10.30	QP
12	0.320	28.55	-21.16	49.71	18.20	0.05	10.30	Average
13	0.385	42.93	-15.24	58.17	32.61	0.05	10.27	QP
14	0.385	26.93	-21.24	48.17	16.61	0.05	10.27	Average
15	0.484	38.90	-17.37	56.27	28.60	0.06	10.24	QP
16	0.484	21.90	-24.37	46.27	11.60	0.06	10.24	Average
17 *	13.560	67.33	7.33	60.00	56.61	0.34	10.38	QP
18 *	13.560	61.83	11.83	50.00	51.11	0.34	10.38	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

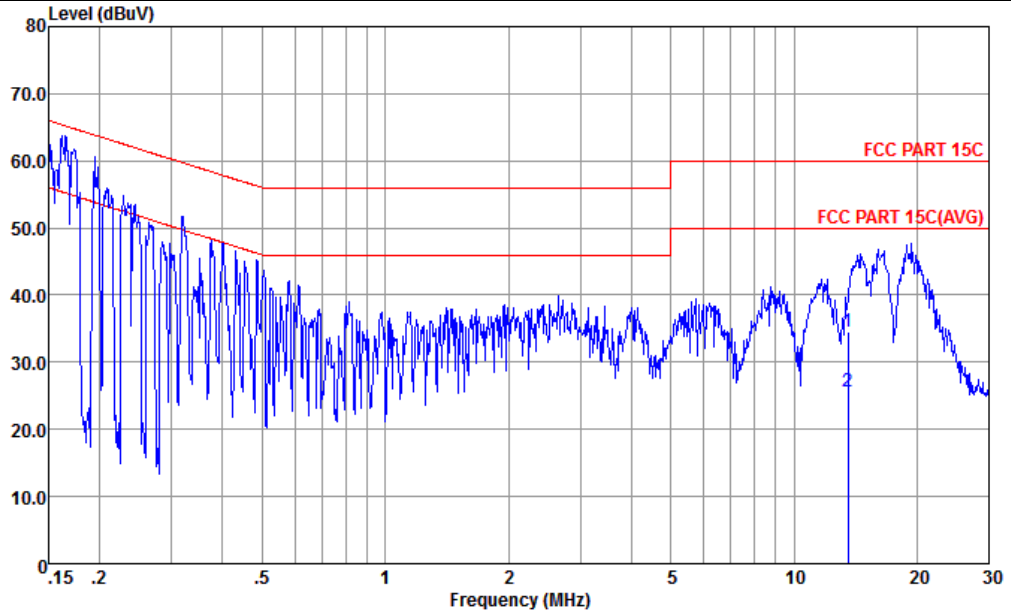

Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-191028-060105 LINE


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	13.560	34.63	-25.37	60.00	23.91	0.34	10.38	QP
2 *	13.560	25.53	-24.47	50.00	14.81	0.34	10.38	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

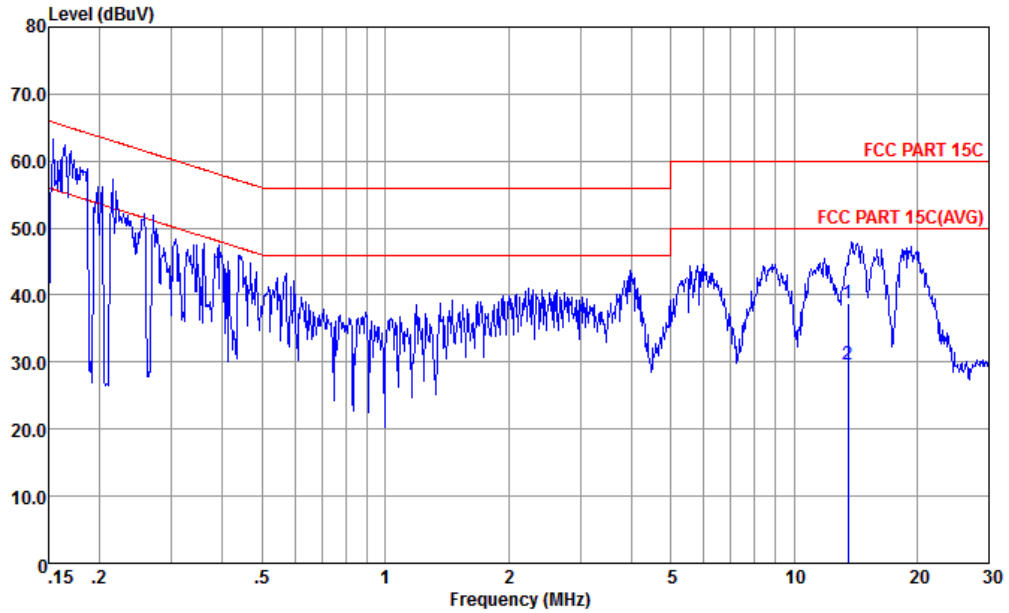

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-191028-060105 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	13.560	38.83	-21.17	60.00	28.10	0.35	10.38	QP
2 *	13.560	29.53	-20.47	60.00	18.80	0.35	10.38	Average

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



# Appendix B. Test Results of Conducted Test Items

## B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56
<b>20dB Bandwidth (kHz)</b>	2.504	<b>99% OccupiedBW(kHz)</b>	2.127
<b>Frequency range (MHz)</b>	$f_L > 13.553$	13.558712	<b>Test Result</b>
	$f_H < 13.567$	13.561216	<b>Complies</b>

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.




**B2. Test Result of Frequency Stability**


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vdc)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
4.4	13.559964	-20	13.559964
3.8	13.559957	-10	13.559964
3.4	13.559964	0	13.559964
-	-	10	13.559964
-	-	20	13.559964
-	-	30	13.559964
-	-	40	13.559964
-	-	50	13.559964
<b>Max.Deviation (MHz)</b>	-0.000044	<b>Max.Deviation (MHz)</b>	-0.000036
<b>Max.Deviation (ppm)</b>	-3.2080	<b>Max.Deviation (ppm)</b>	-2.6549
<b>Limit</b>	<b>FS &lt; ±100 ppm</b>	<b>Limit</b>	<b>FS &lt; ±100 ppm</b>
<b>Test Result</b>	<b>PASS</b>	<b>Test Result</b>	<b>PASS</b>



## Appendix C. Test Results of Radiated Test Items

### C1. Test Result of Field Strength of Fundamental Emissions

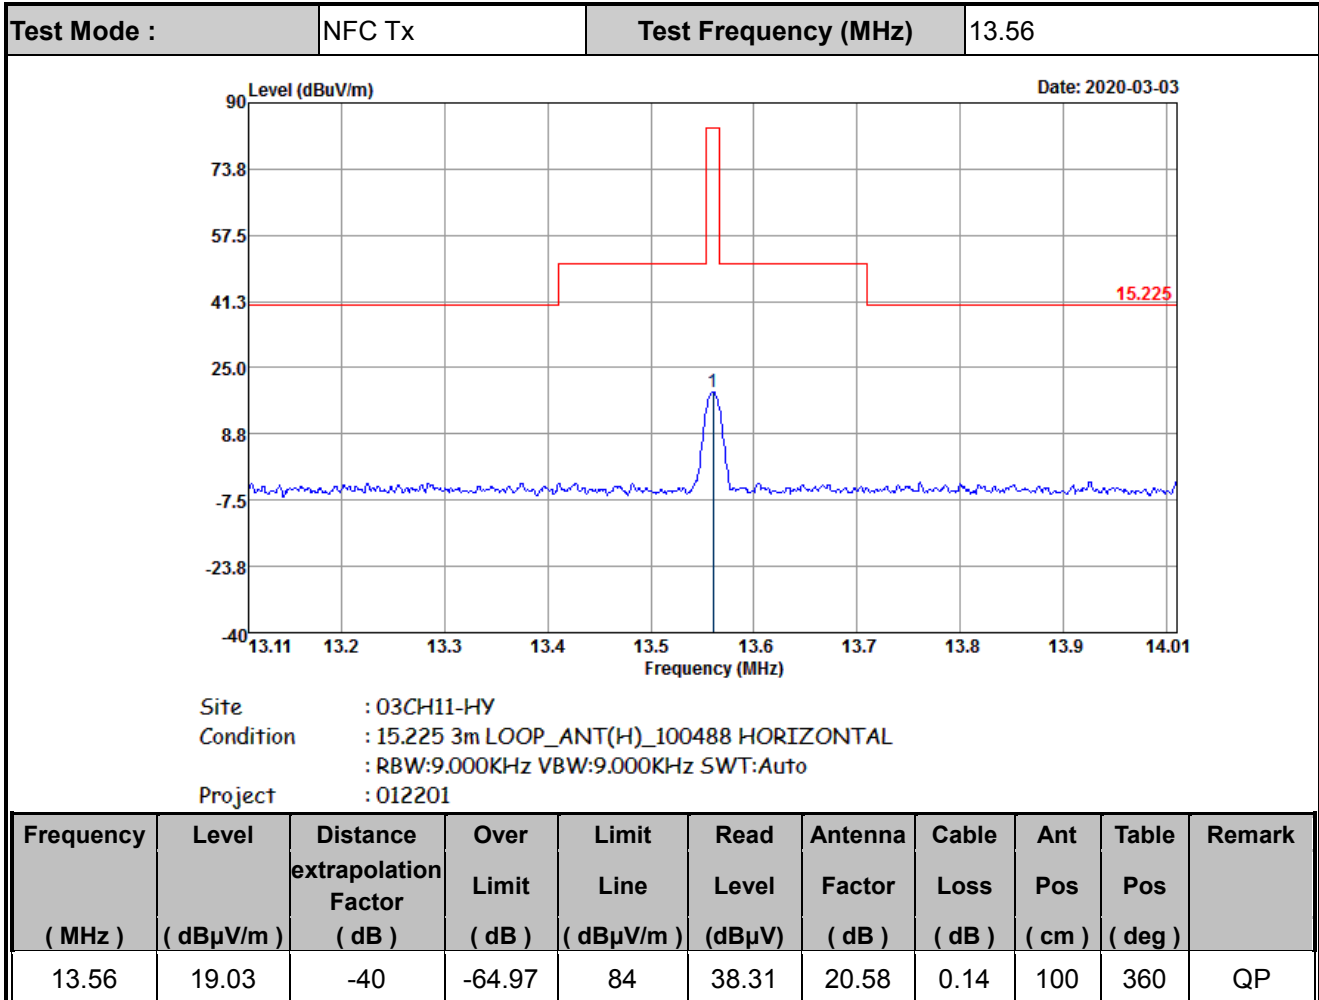

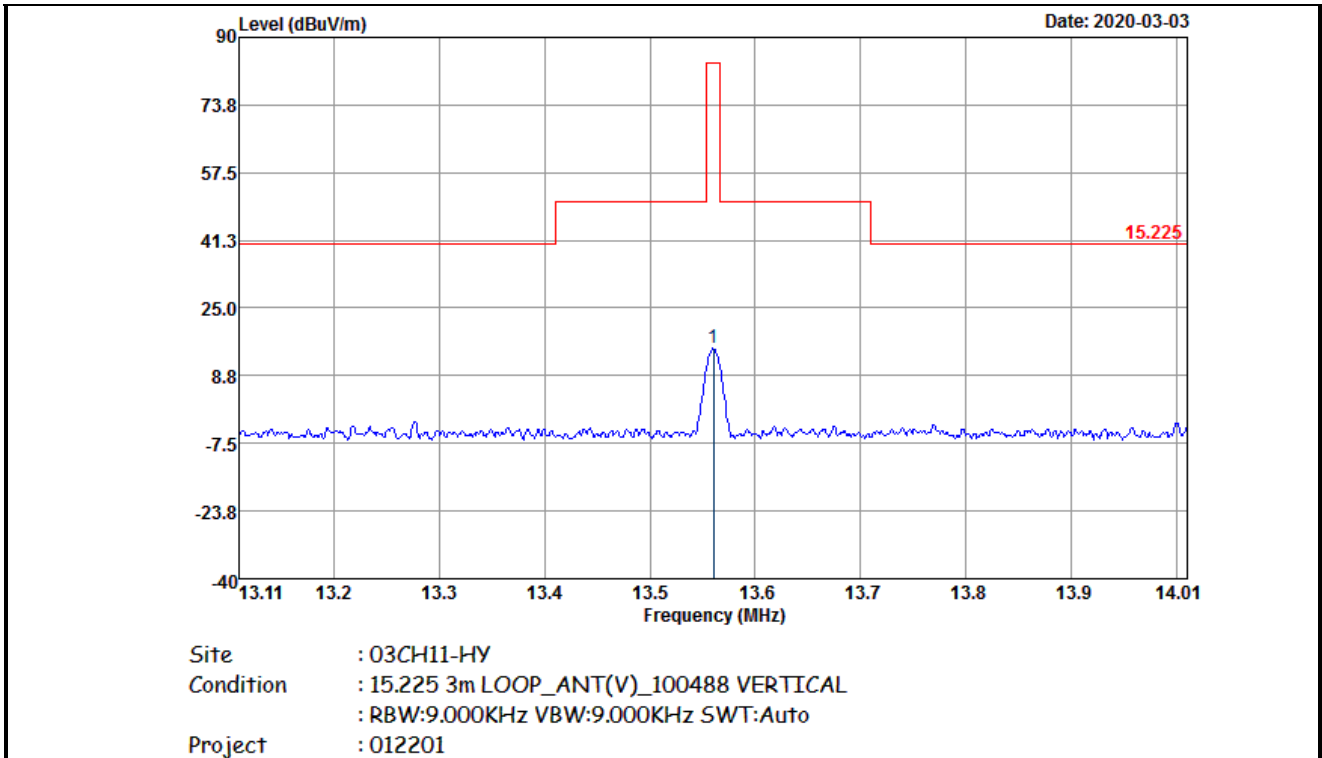

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
13.56	15.23	-40	-68.77	84	34.51	20.58	0.14	100	86	QP


Note:

1. Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) + Distance extrapolation Factor(dB)
2. Distance extrapolation factor = 40 log (test distance/specific distance) (dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)


Test Mode :	NFC Tx	Polarization :	Horizontal
-------------	--------	----------------	------------

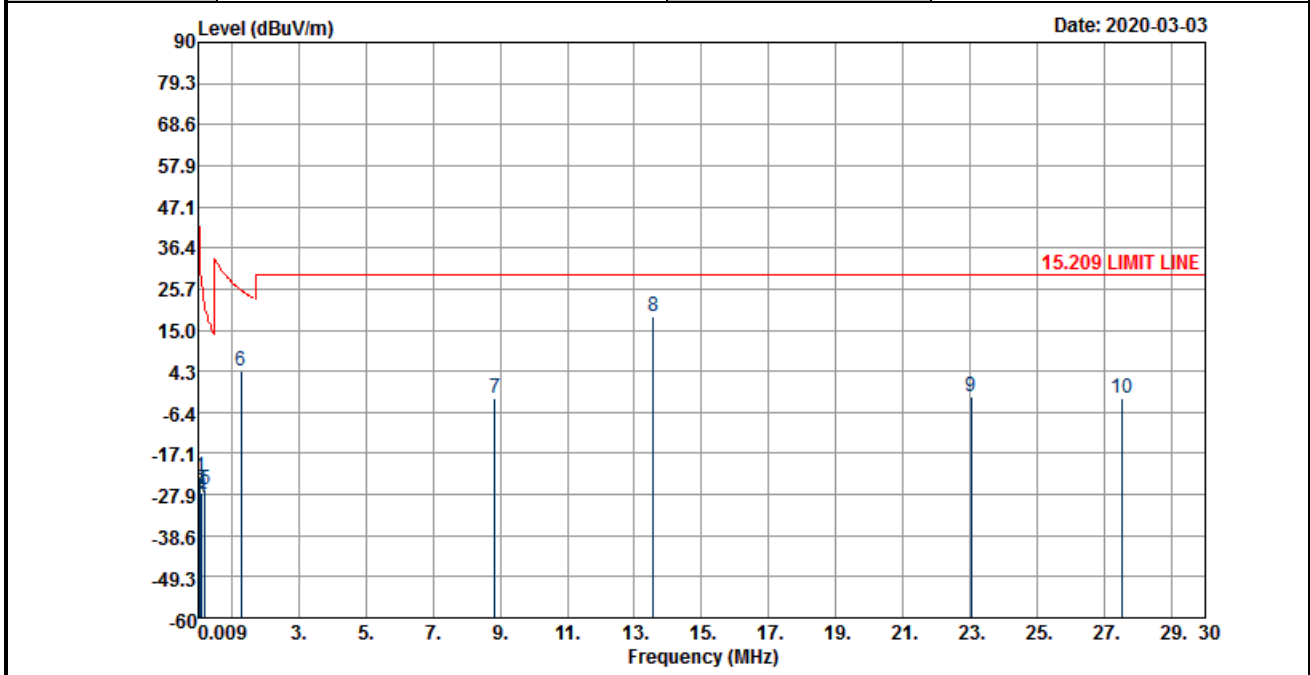

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.06249	-23.06	-80	-54.75	31.69	37.95	18.98	0.01	-	-	Average
0.07815	-26.45	-80	-56.2	29.75	34.72	18.82	0.01	-	-	Average
0.0938	-27.37	-80	-55.53	28.16	33.96	18.66	0.01	-	-	QP
0.125	-28.75	-80	-54.42	25.67	32.64	18.6	0.01	-	-	Average
0.20372	-26.78	-80	-48.2	21.42	34.61	18.6	0.01	-	-	Average
1.279	4.3	-40	-21.17	25.47	25.69	18.6	0.01	100	0	QP
8.848	-2.61	-40	-32.11	29.5	17.22	20.05	0.12	-	-	QP
13.56	18.69	-40	-10.81	29.5	37.97	20.58	0.14	-	-	QP
23.029	-2.39	-40	-31.89	29.5	16.27	21.16	0.18	-	-	QP
27.5	-2.65	-40	-32.15	29.5	15.91	21.25	0.19	-	-	QP



Test Mode :	NFC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

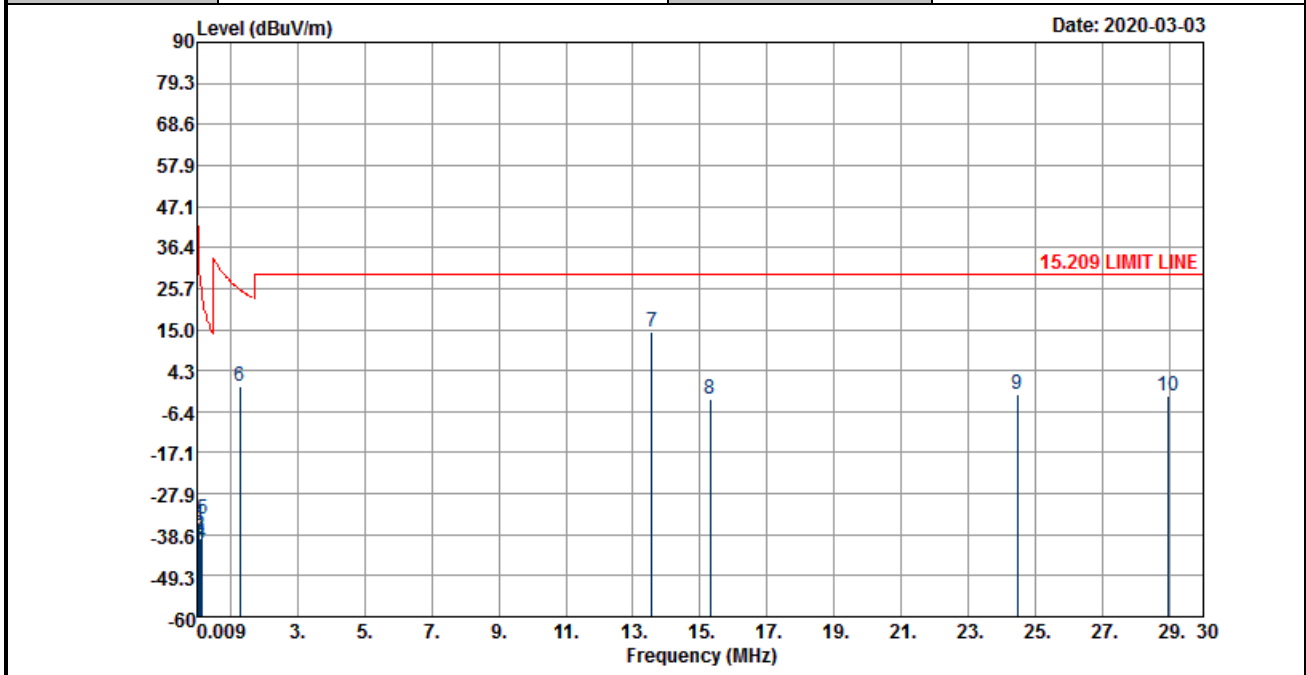


Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.06249	-36	-80	-67.69	31.69	25.01	18.98	0.01	-	-	Average
0.07812	-38.77	-80	-68.52	29.75	22.4	18.82	0.01	-	-	Average
0.09376	-39.38	-80	-67.54	28.16	21.95	18.66	0.01	-	-	QP
0.125	-40.61	-80	-66.28	25.67	20.78	18.6	0.01	-	-	Average
0.15884	-34.34	-80	-57.92	23.58	27.05	18.6	0.01	-	-	Average
1.279	0.13	-40	-25.34	25.47	21.52	18.6	0.01	100	0	QP
13.56	14.52	-40	-14.98	29.5	33.8	20.58	0.14	-	-	QP
15.312	-3	-40	-32.5	29.5	16.13	20.72	0.15	-	-	QP
24.469	-1.72	-40	-31.22	29.5	16.9	21.19	0.19	-	-	QP
28.94	-2.39	-40	-31.89	29.5	16.13	21.28	0.2	-	-	QP


**Note:**

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = 40 log (test distance/specific distance) (dB);
- Limit line = specific limits (dBμV) + distance extrapolation factor.



C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

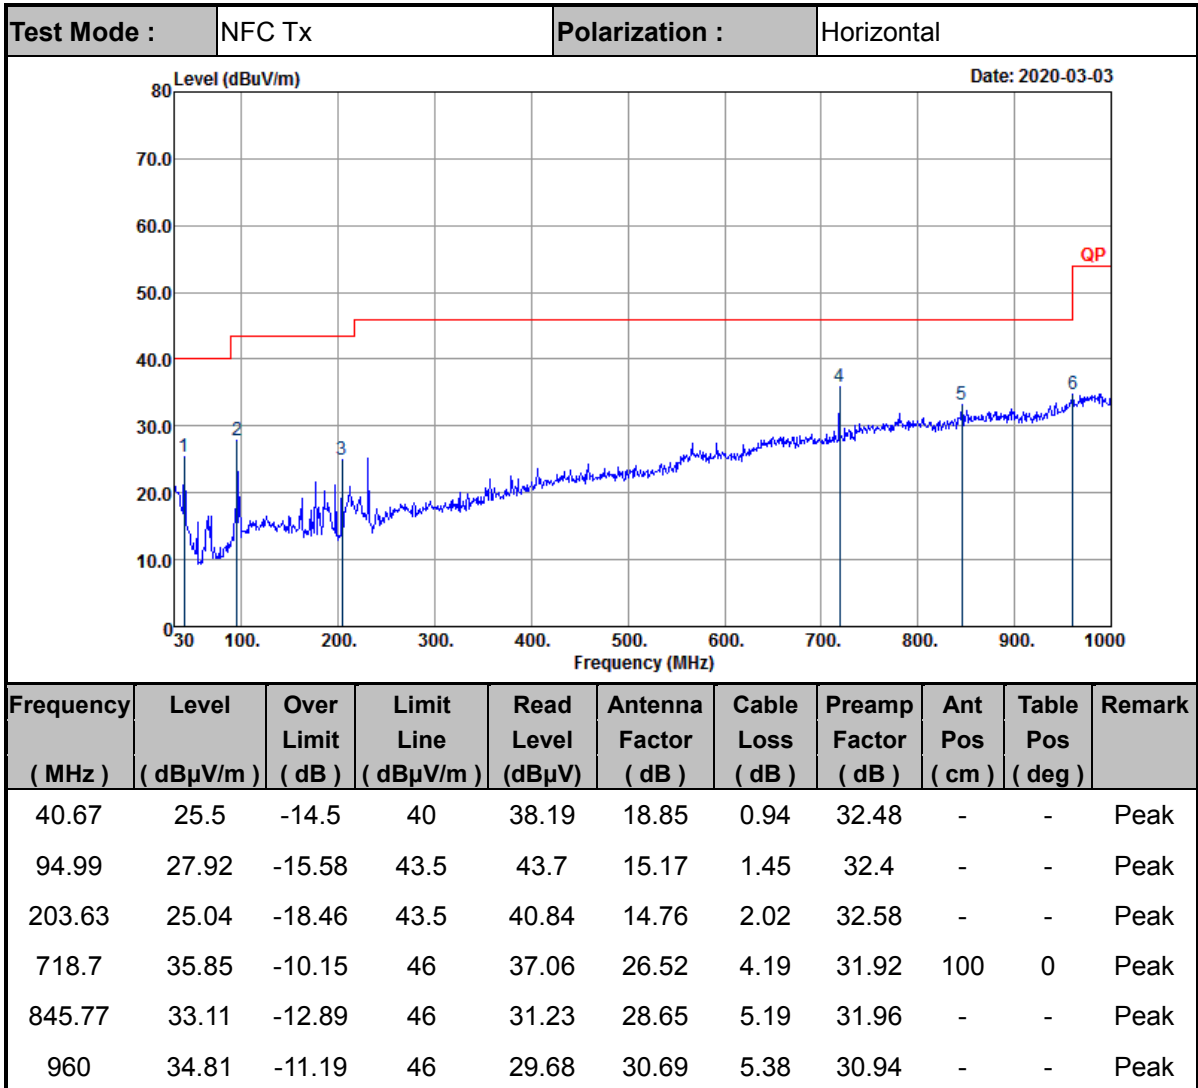

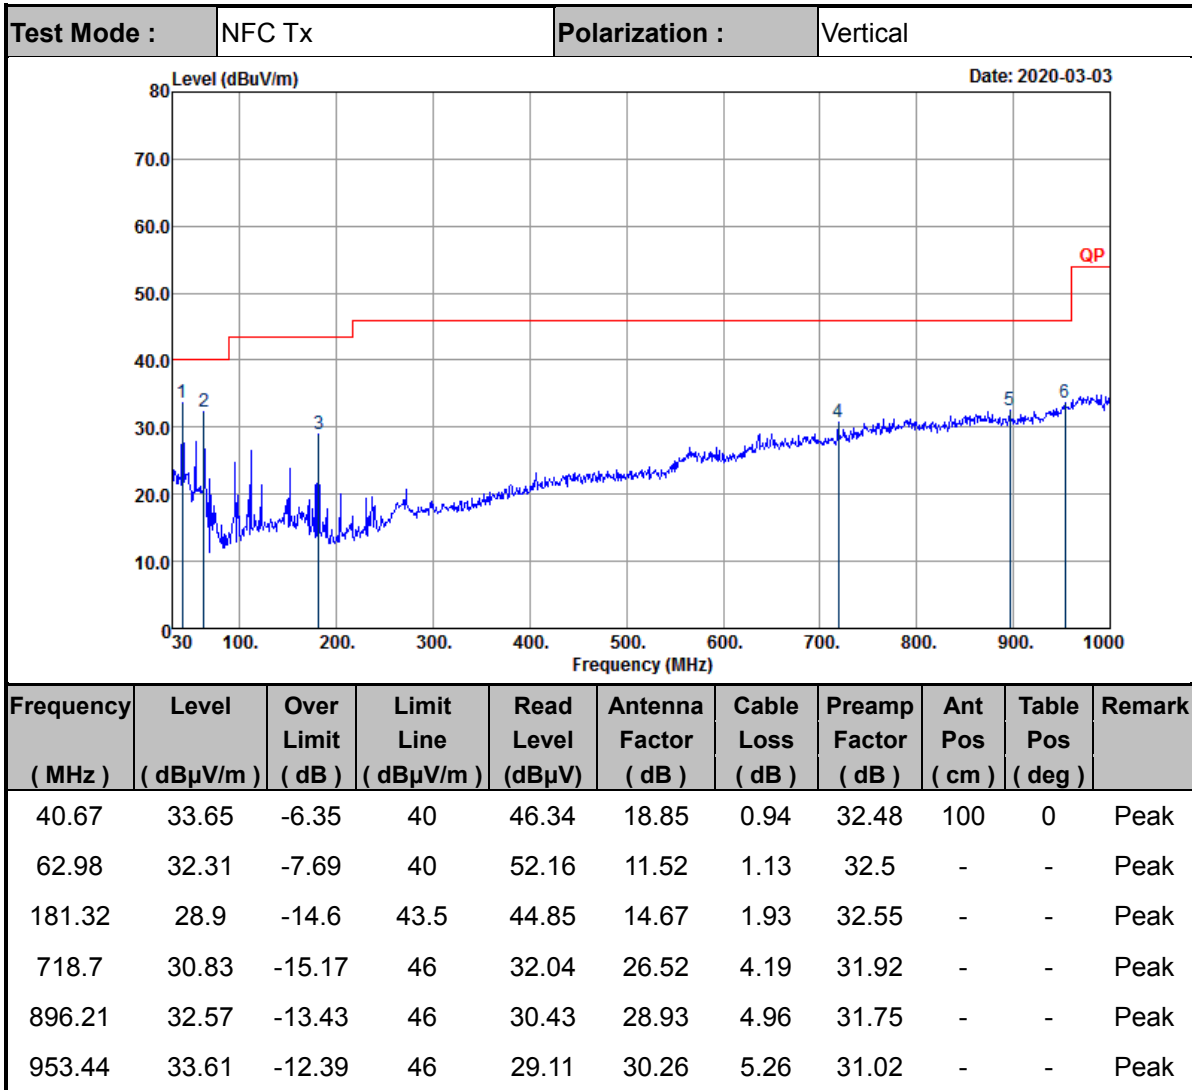

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.