



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2073-1
FCC ID : IHDT56ZA2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 17, 2020 and testing was completed on May 04, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Laboratory SPORTON INTERNATIONAL INC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Specification of Accessory.....	7
1.7 Testing Location	8
1.8 Test Software.....	8
1.9 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	10
2.1 Carrier Frequency Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 TEST RESULT	14
3.1 6dB Bandwidth Measurement	14
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	29
3.5 Radiated Band Edges and Spurious Emission Measurement	38
3.6 AC Conducted Emission Measurement.....	42
3.7 Antenna Requirements.....	44
4 LIST OF MEASURING EQUIPMENT.....	45
5 UNCERTAINTY OF EVALUATION.....	46
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR011708-01B	Rev. 01	Initial issue of report	May 08, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.28 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.99 dB at 0.565 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2073-1
FCC ID	IHDT56ZA2
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Radiation: 353598110124803/353598110164809 Conducted: 353598110124647/353598110164643 Conduction: 353598110006455/353598110006463
HW Version	DVT2
SW Version	QPL30.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v4.2 LE: 10.72 dBm (0.0118 W) Bluetooth v5.0 LE: 10.95 dBm (0.0124 W)
Antenna Type / Gain	IPA Antenna type with gain -2.50 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola(Acbel)	Model Name SC-41
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 1(EU)	Brand Name	Motorola(Acbel)	Model Name SC-42
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 1(AR)	Brand Name	Motorola(Acbel)	Model Name SC-46
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name SC-41
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name SC-42
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name SC-46
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name SC-43
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 3(Chile)	Brand Name	Motorola(Salom)	Model Name SC-42
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 3 (BR) (Salom China build)	Brand Name	Motorola(Salom)	Model Name SC-47
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 3 (BR) (Flex Brazil local build)	Brand Name	Motorola(Flex)	Model Name SC-47
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
AC Adapter 4 (BR) (Cliptech Brazil local build)	Brand Name	Motorola(Cliptech)	Model Name SC-47
	Power Rating	I/P: 100-240 Vac, 300mA , O/P: 5Vdc, 2000mA	
Battery	Brand Name	Motorola (ATL)	Model Name JK50
	Power Rating	3.8Vdc, 4000mAh	Type Li-ion, Polymer
Earphone 1	Brand Name	Motorola (NEW LEADER)	Model Name NLD-EM301K-01SF
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core	
Earphone 2	Brand Name	Motorola (Lianyun)	Model Name MI181 (SH38C37773)
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core	
Earphone 3	Brand Name	Motorola (Cosonic)	Model Name MI181 (SH38C44959)
	Signal Line Type	1.1 meter, non-shielded cable, without ferrite core	
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	



USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SC18C49697
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 4	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06-KS TH01-KS	CN1257	314309

SPORTON INTERNATIONAL INC. is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and under the FCC-recognized accredited testing laboratories by Mutual Recognition Agreement (MRA) in FCC Test.

Test Firm	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist. Taoyuan City Taiwan Tel: 886-3-327-3456 FAX: +886-3-327-0978		
Test Site No.	Sporton Site No.		
	CO05-HY		

Test data subcontracted: AC Conducted Emission in section 3.6 of this report.

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO05-HY	Rohde & Schwarz	EMC32 V10.30	N/A

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 2(Charging from Adapter 2) + Earphone 2 + Battery + SIM 2
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, USB cable 1 and Earphone1.	

2.3 Connection Diagram of Test System

For Radiation

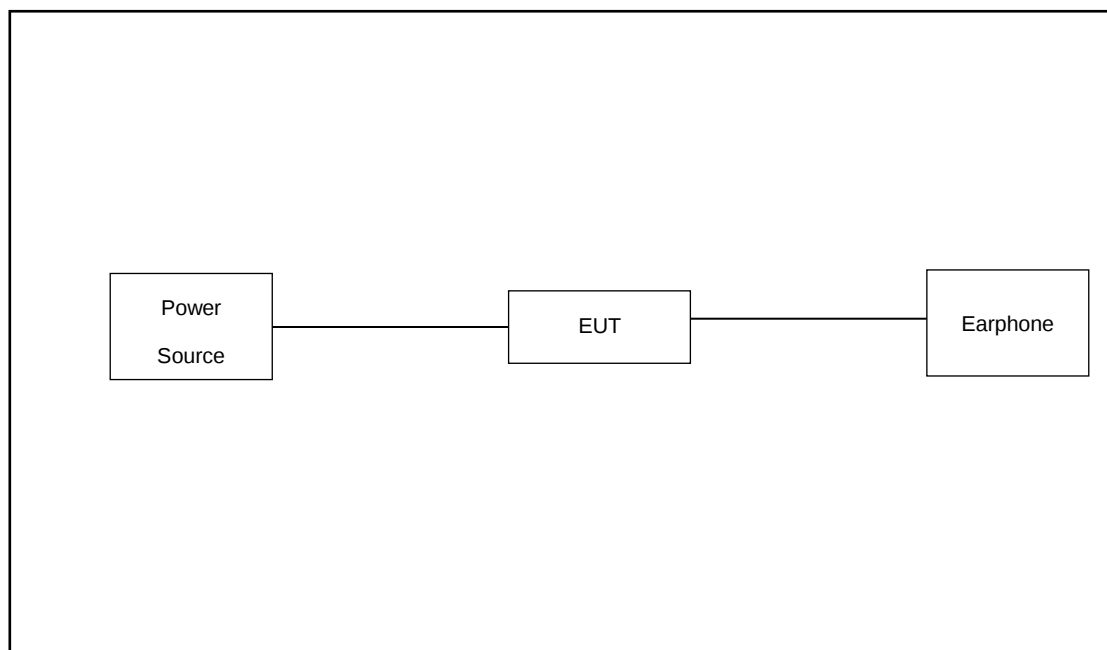

For Conducted Emission

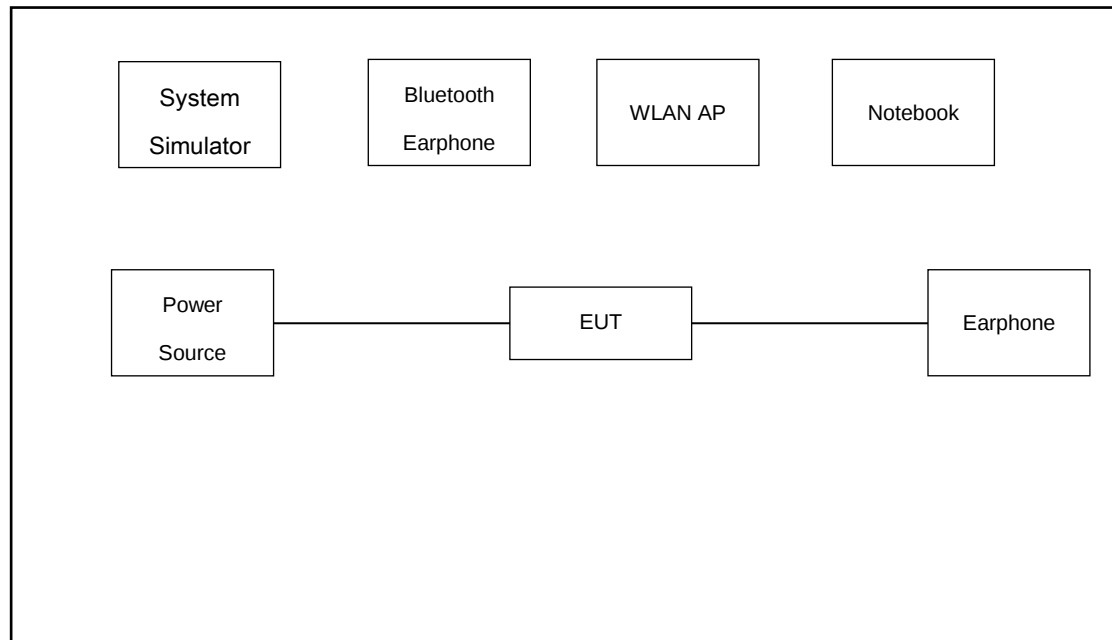

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.50 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\
 &= 5.50 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

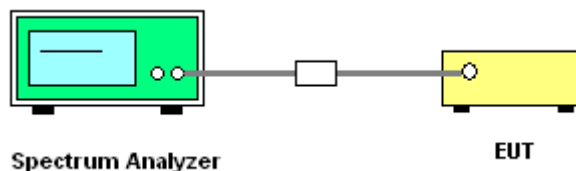




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

Bluetooth v4.2 LE


6 dB Bandwidth Plot on Channel 00

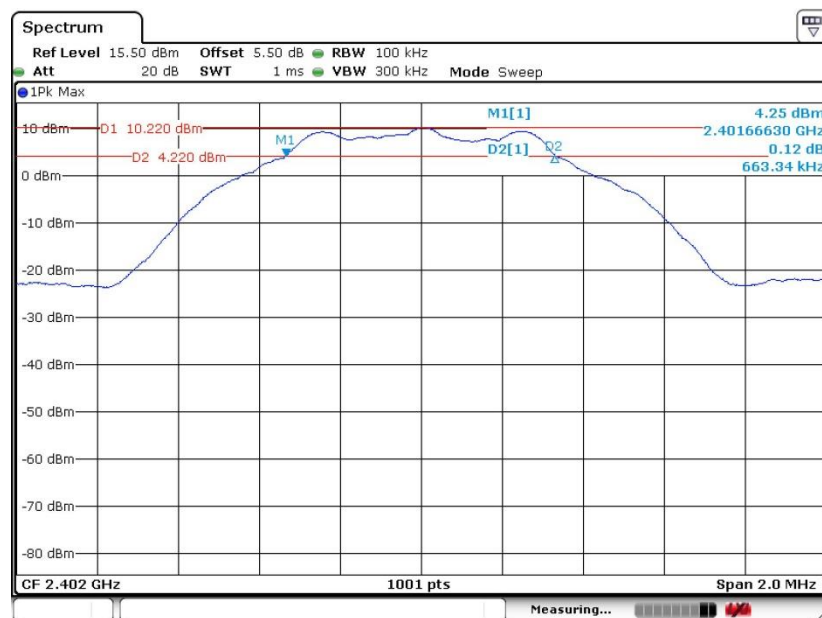

Date: 20.APR.2020 17:21:09




6 dB Bandwidth Plot on Channel 19

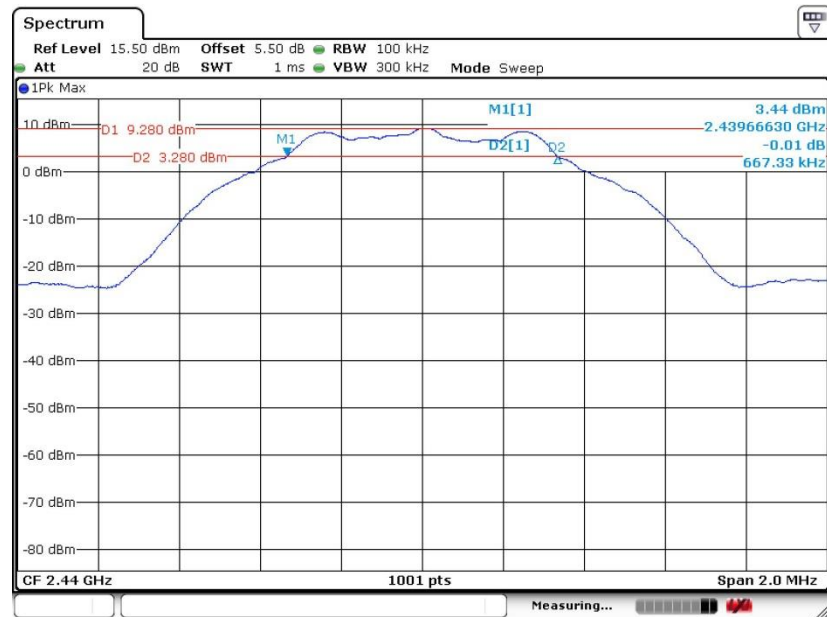

Date: 20.APR.2020 17:23:23

6 dB Bandwidth Plot on Channel 39

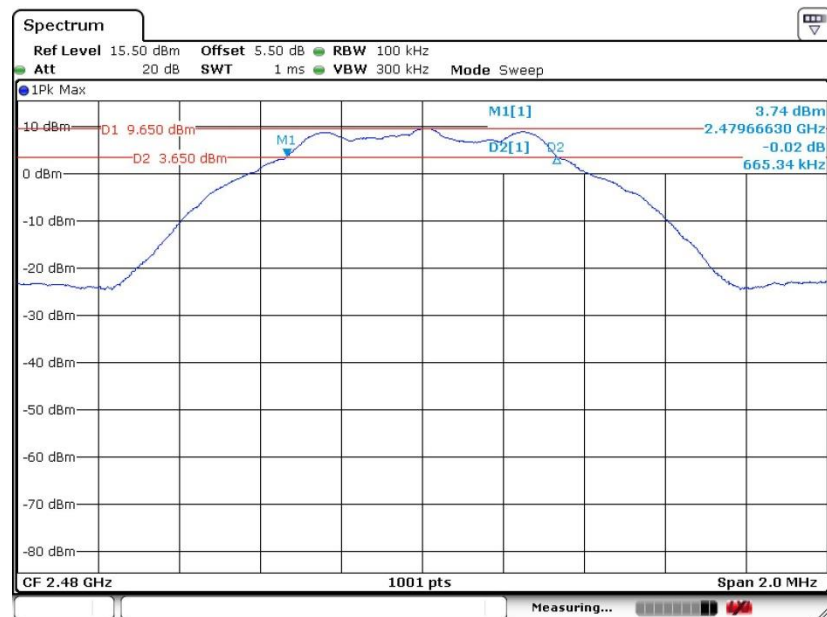


Date: 20.APR.2020 17:25:07



Bluetooth v5.0 LE


6 dB Bandwidth Plot on Channel 00

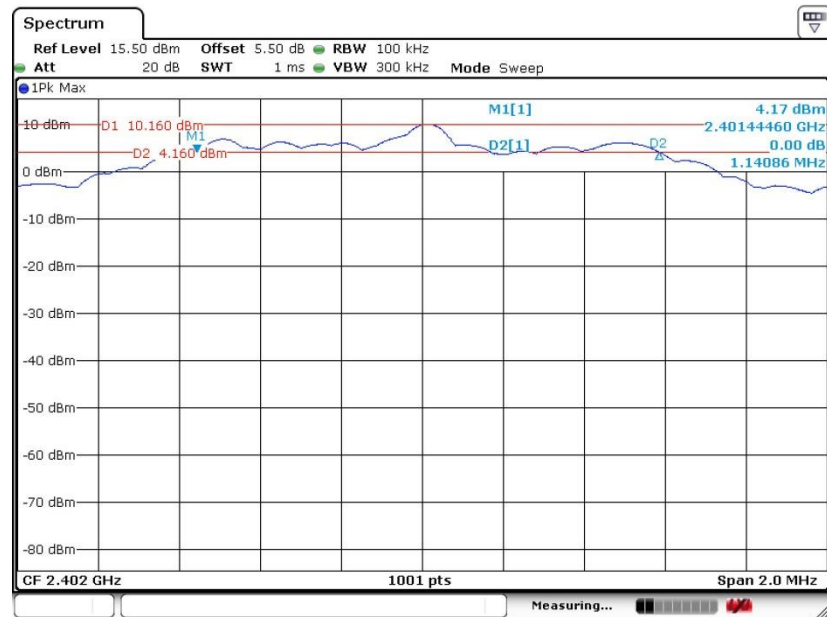

Date: 21.APR.2020 10:41:25




6 dB Bandwidth Plot on Channel 19

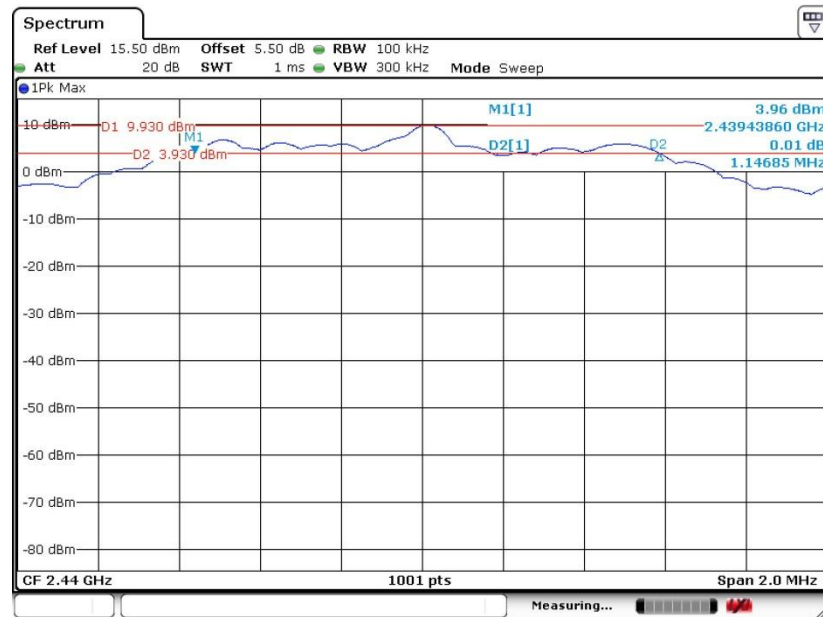

Date: 21.APR.2020 10:45:28

6 dB Bandwidth Plot on Channel 39

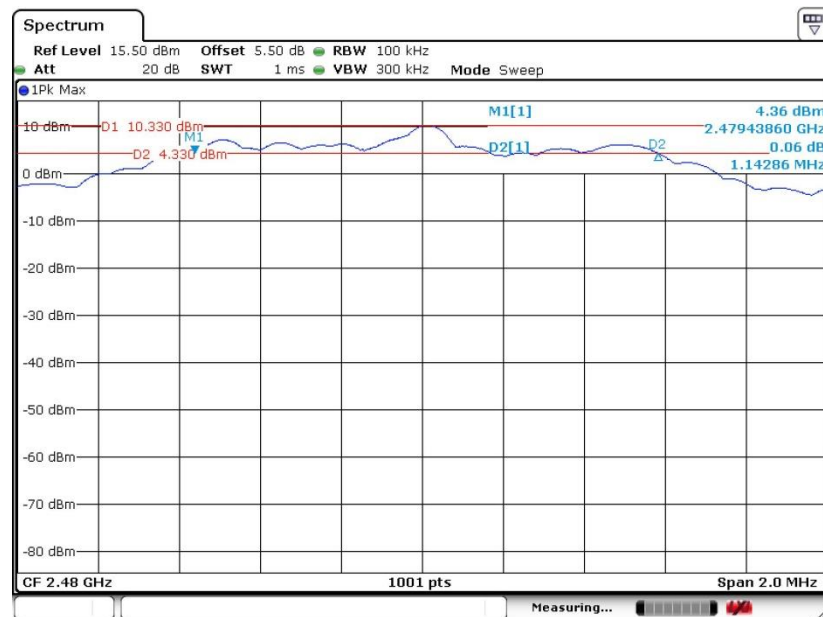

Date: 21.APR.2020 10:50:10

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

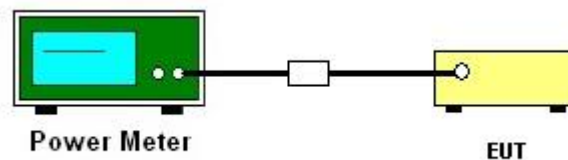

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

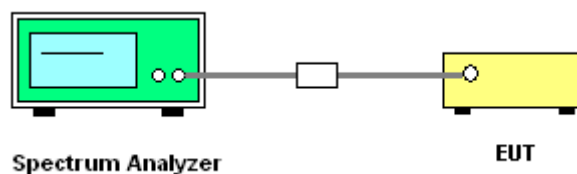

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth v4.2 LE

PSD 100kHz Plot on Channel 00

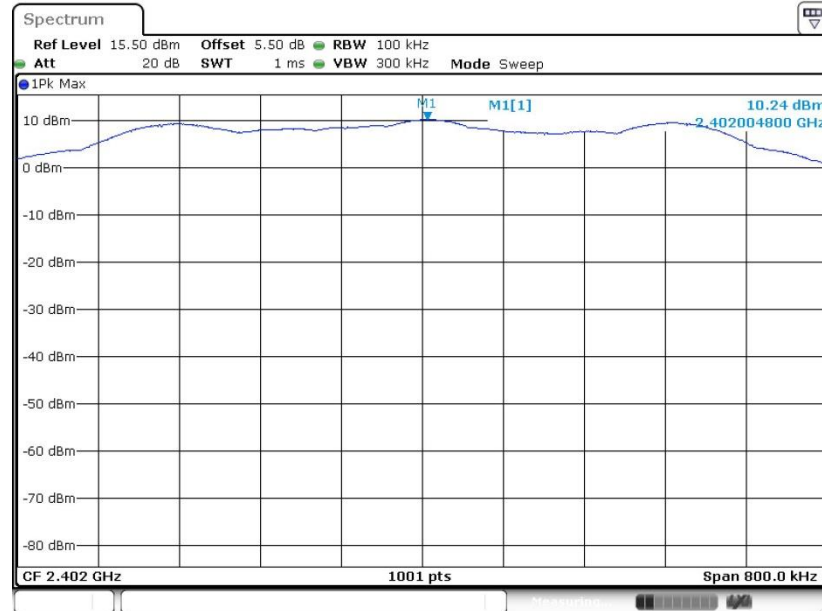


PSD 100kHz Plot on Channel 19

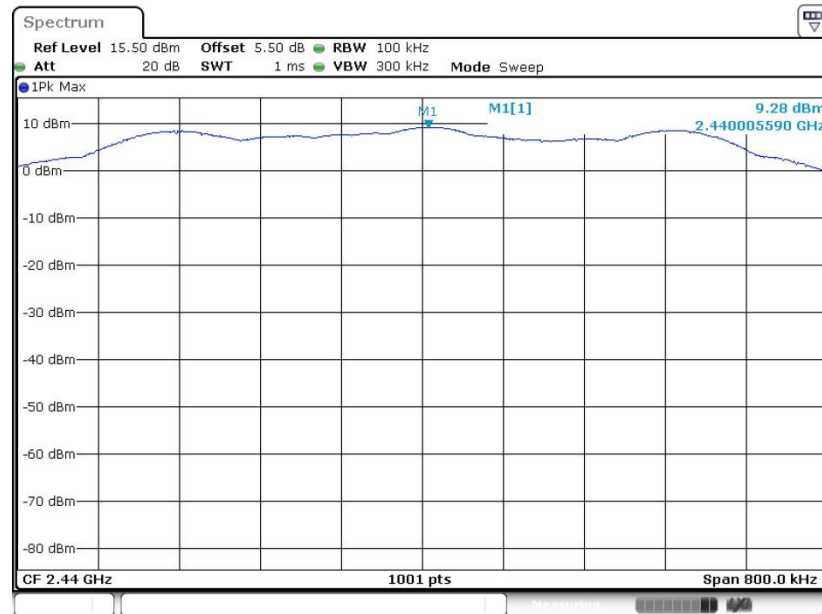



PSD 100kHz Plot on Channel 39

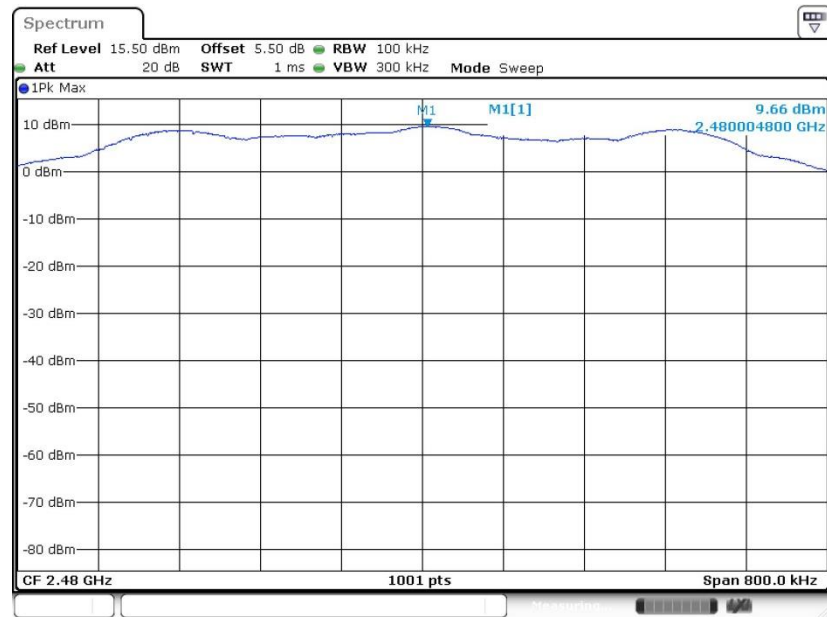


Date: 20.APR.2020 17:25:33




Bluetooth v5.0 LE

PSD 100kHz Plot on Channel 00

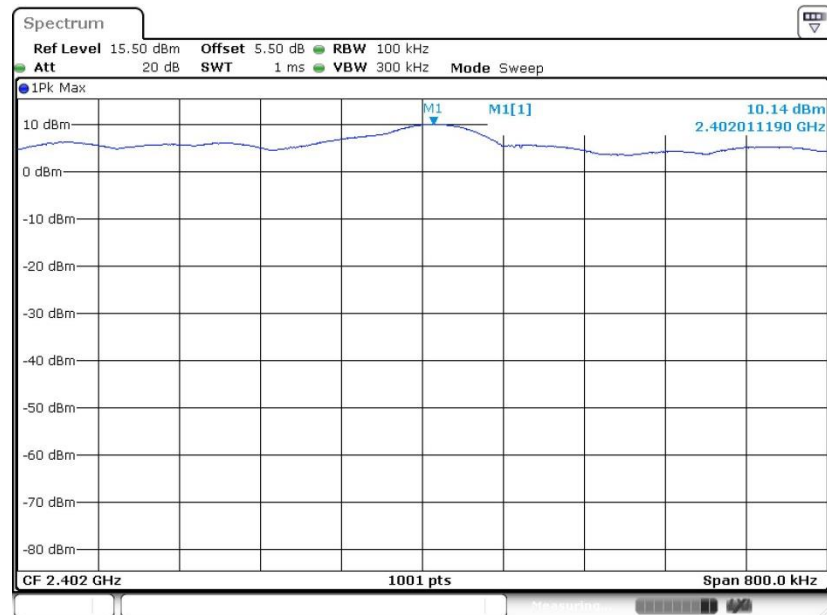

Date: 21.APR.2020 10:42:04


PSD 100kHz Plot on Channel 19

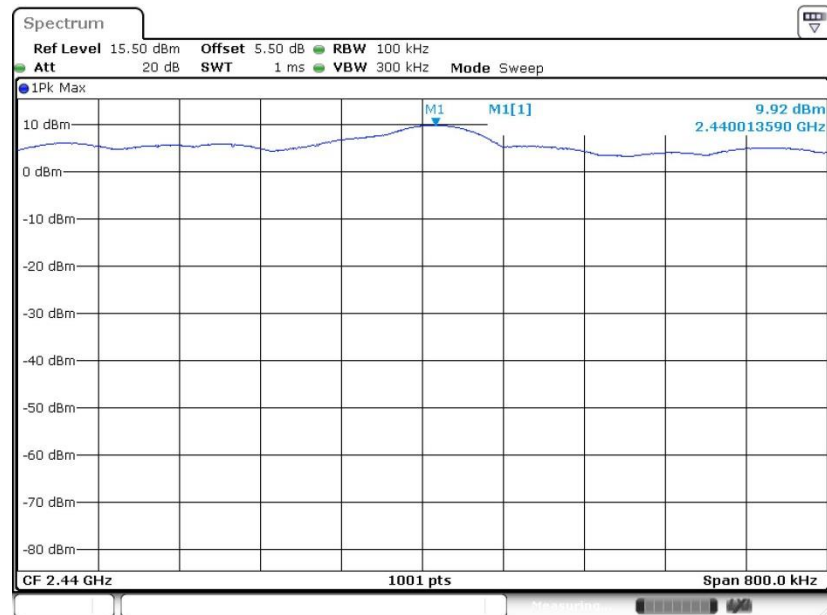

Date: 21.APR.2020 10:45:59



PSD 100kHz Plot on Channel 39

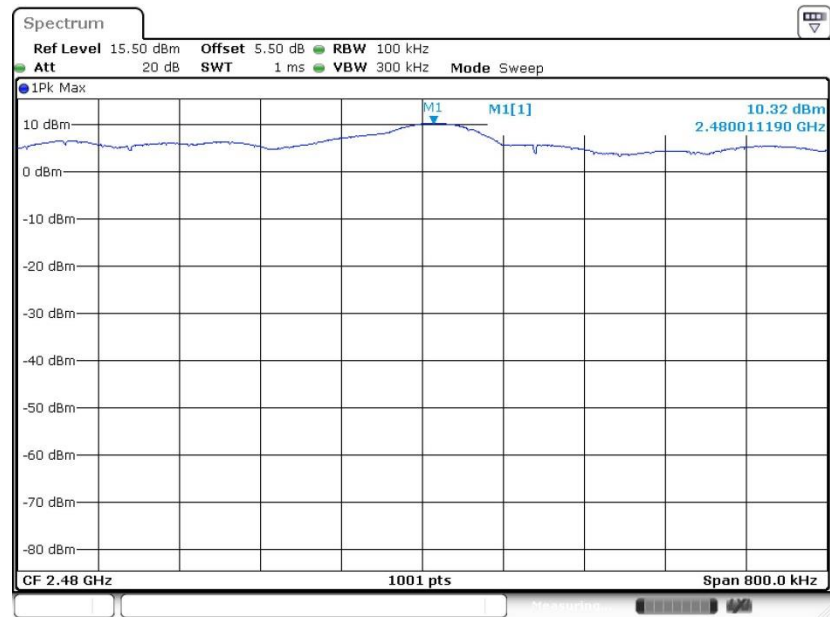


Date: 21.APR.2020 10:50:58



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


Bluetooth v4.2 LE

PSD 3kHz Plot on Channel 00

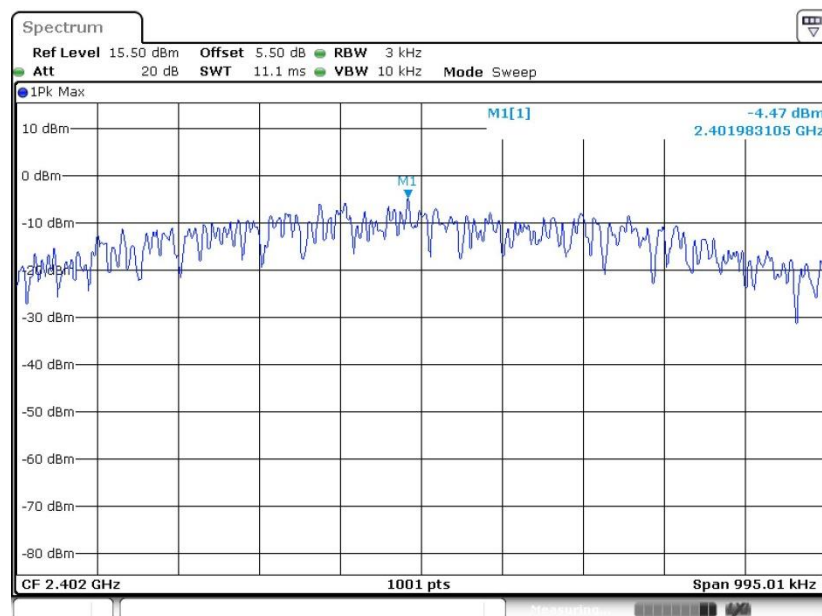

Date: 21.APR.2020 12:45:36


PSD 3kHz Plot on Channel 19

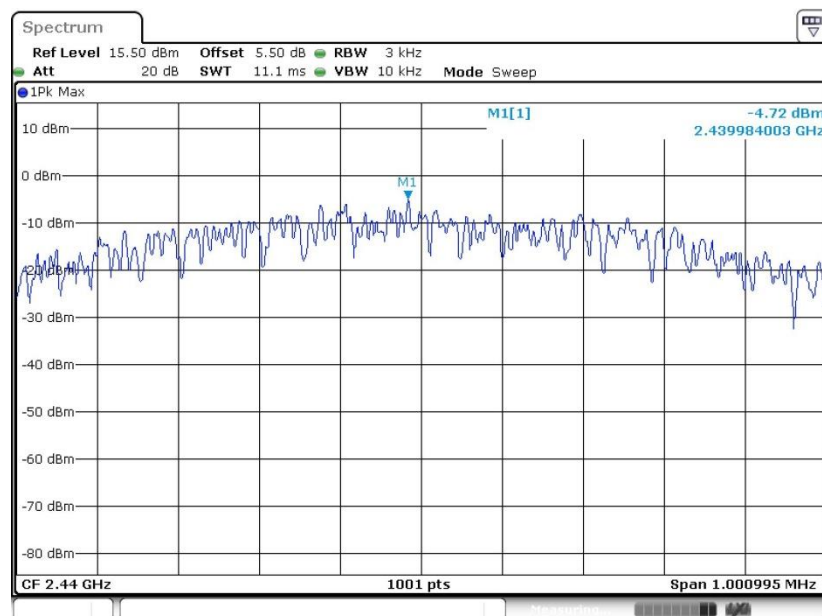

Date: 21.APR.2020 12:46:32



PSD 3kHz Plot on Channel 39

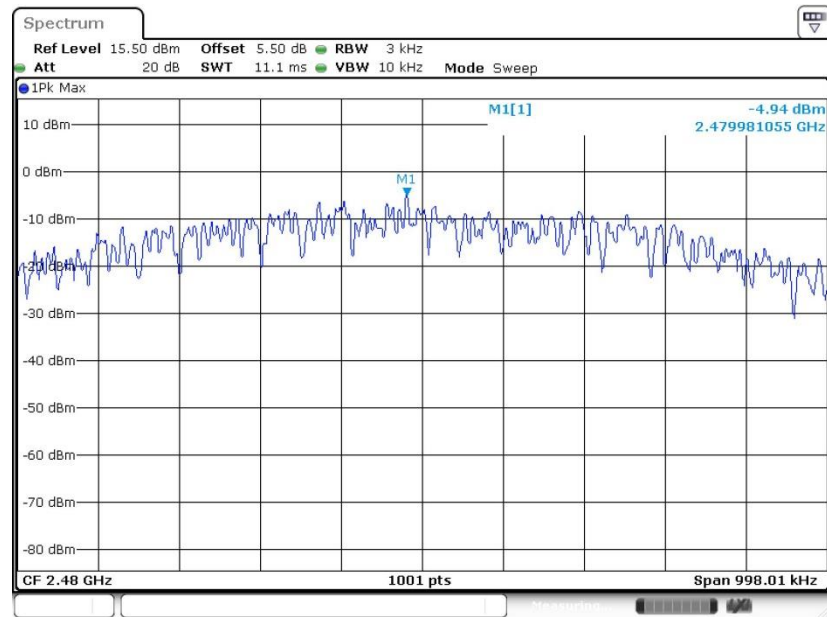


Date: 20.APR.2020 17:25:22




Bluetooth v5.0 LE

PSD 3kHz Plot on Channel 00

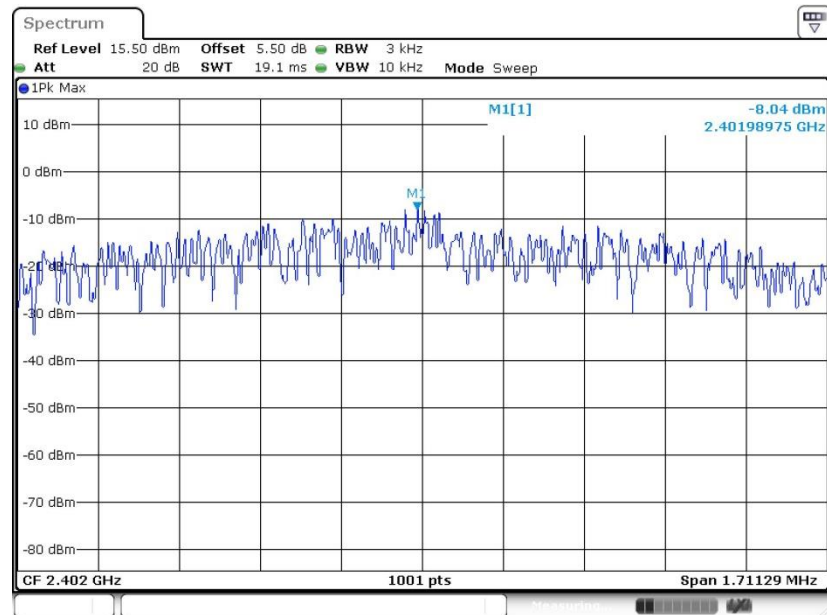

Date: 21.APR.2020 10:41:52


PSD 3kHz Plot on Channel 19

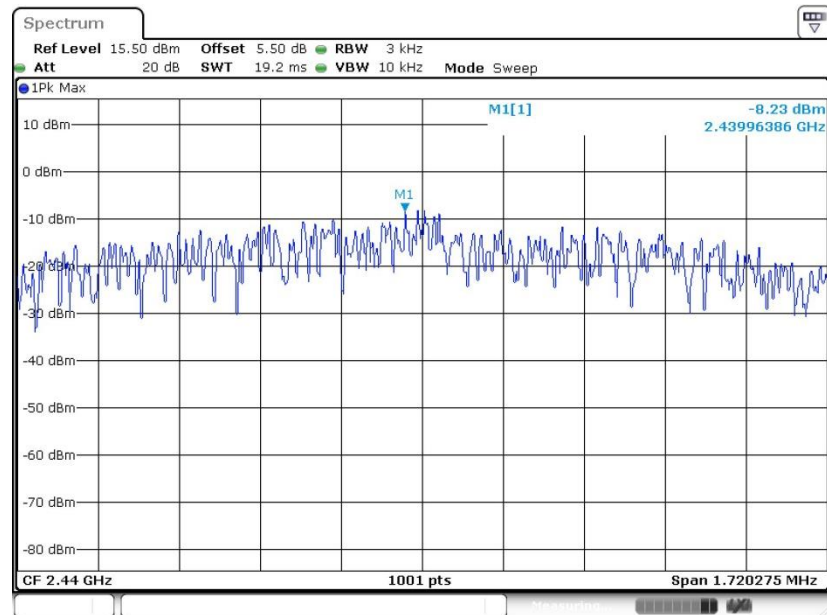

Date: 21.APR.2020 10:45:48



PSD 3kHz Plot on Channel 39

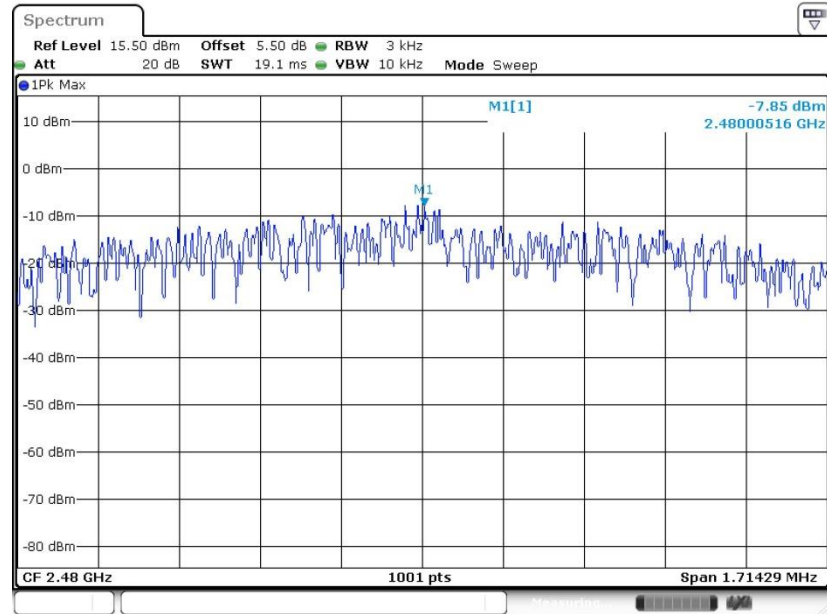

Date: 21.APR.2020 10:50:34

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

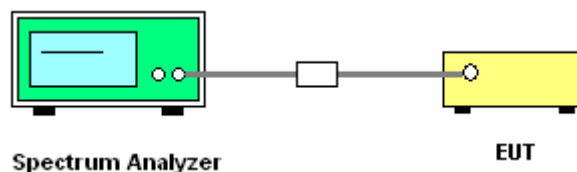




3.4.5 Test Result of Conducted Band Edges Plots


Bluetooth v4.2 LE

Low Band Edge Plot on Channel 00

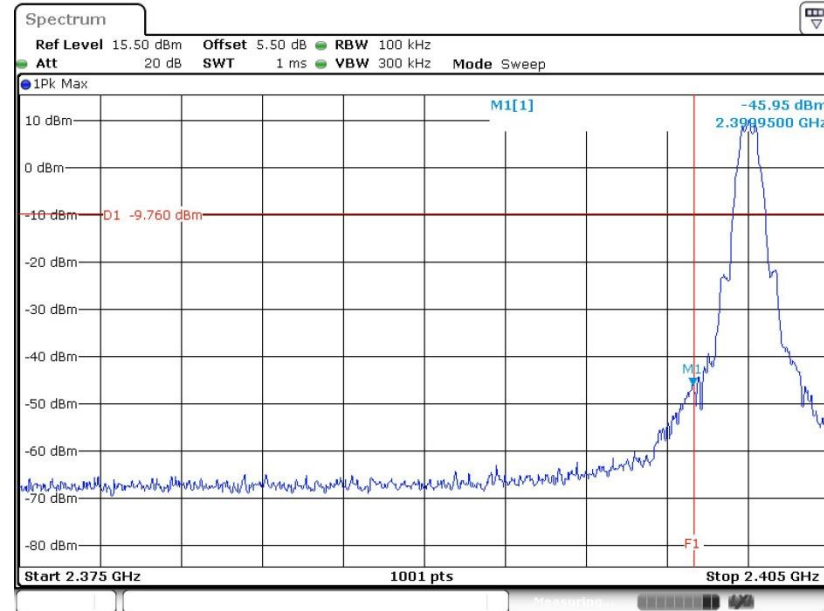

Date: 20.APR.2020 17:21:44

High Band Edge Plot on Channel 39

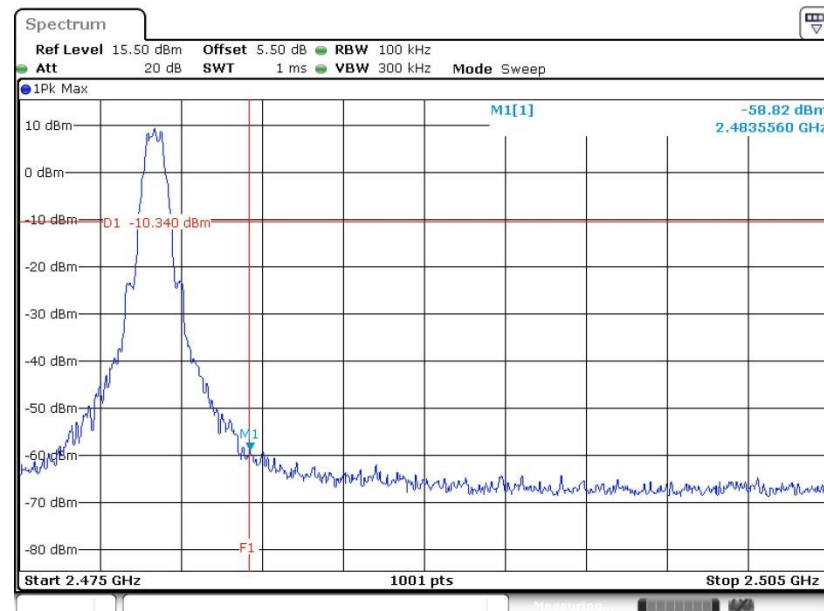


Date: 20.APR.2020 17:25:47




Bluetooth v5.0 LE

Low Band Edge Plot on Channel 00

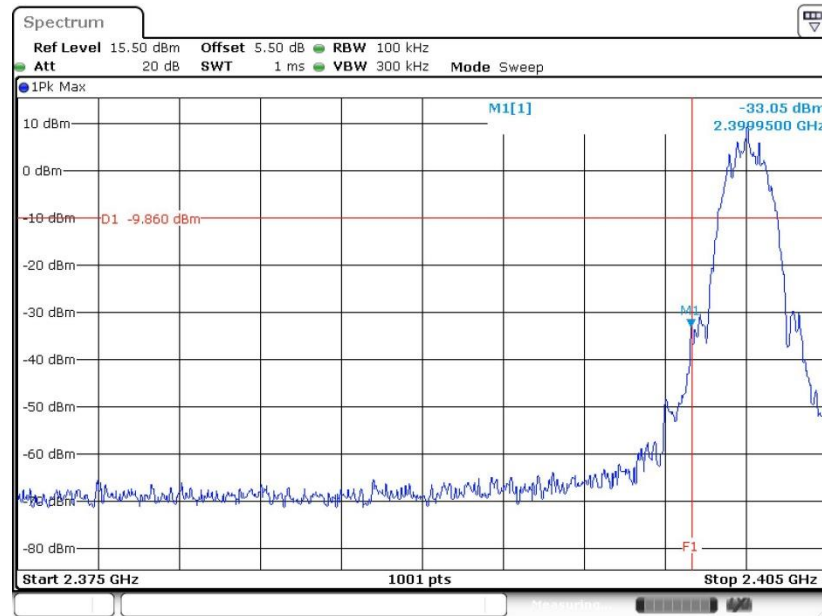

Date: 21.APR.2020 10:42:33

High Band Edge Plot on Channel 39

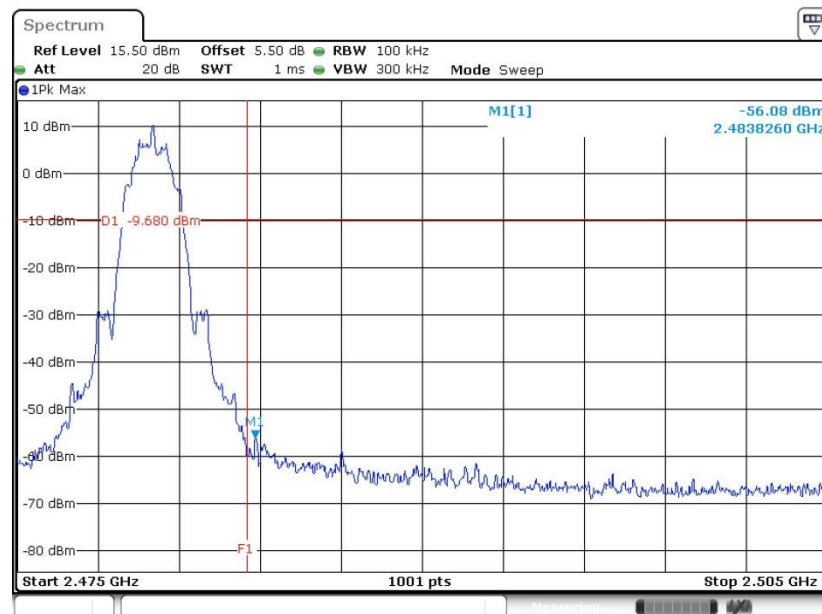


Date: 21.APR.2020 10:51:04



3.4.6 Test Result of Conducted Spurious Emission Plots


Bluetooth v4.2 LE

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

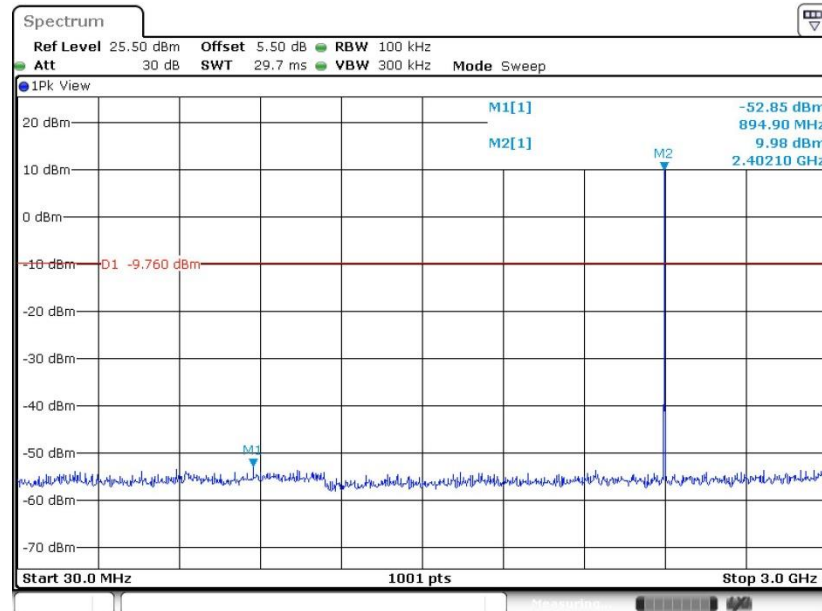

Date: 20.APR.2020 17:21:54


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

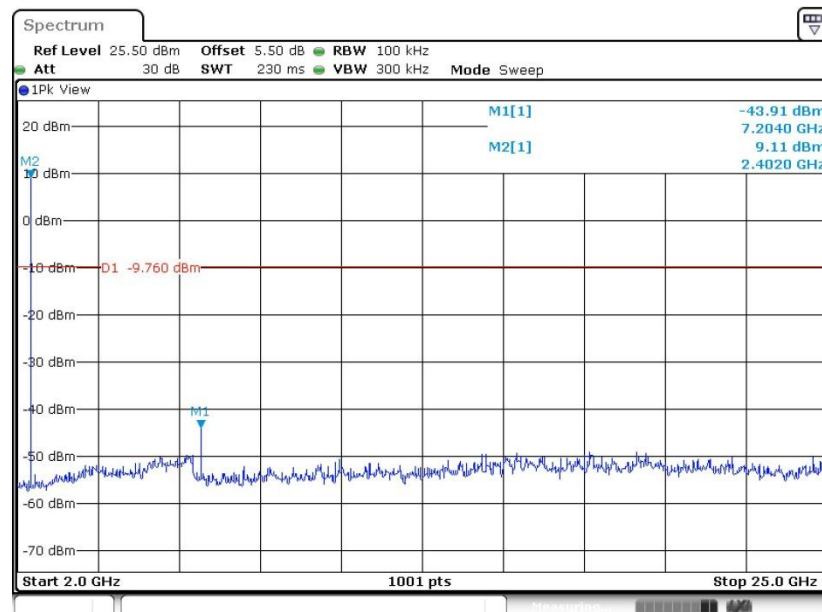

Date: 20.APR.2020 17:22:02




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

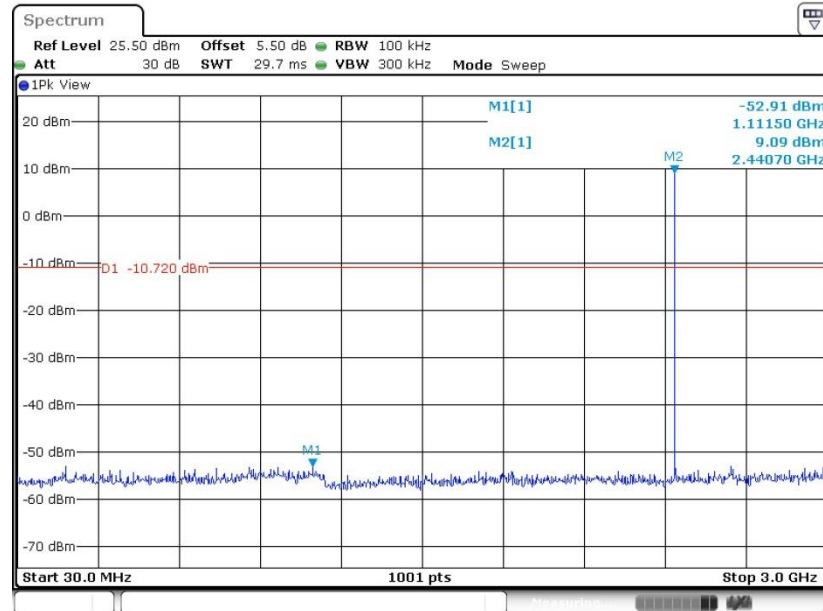

Date: 20.APR.2020 17:24:04


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

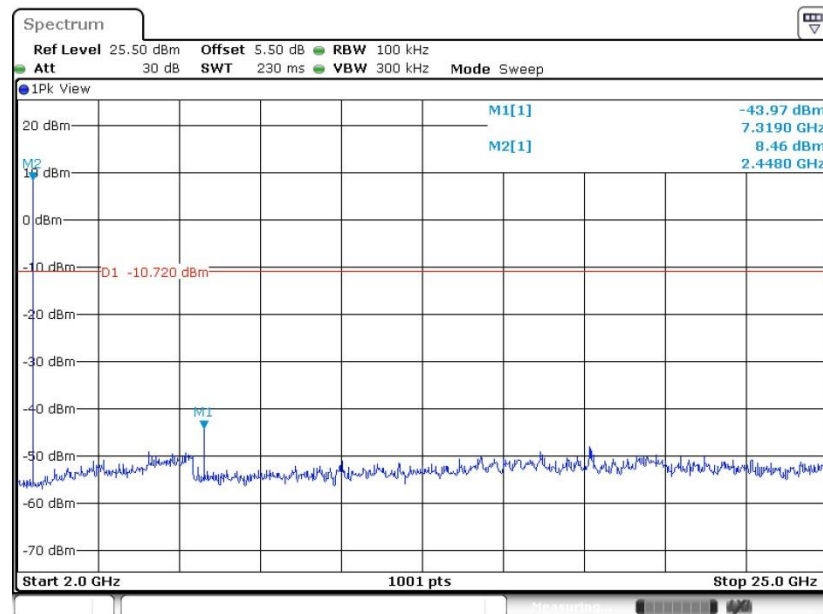

Date: 20.APR.2020 17:24:13




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

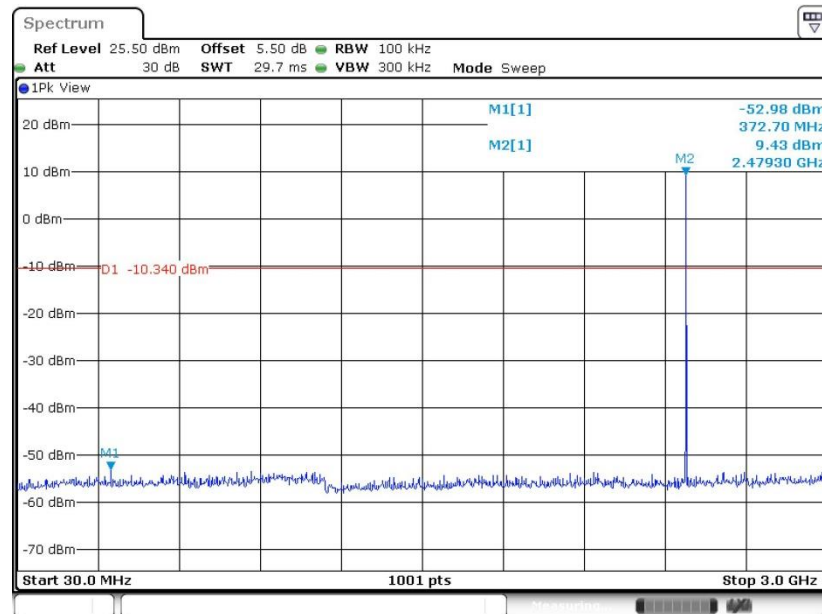

Date: 20.APR.2020 17:25:56

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

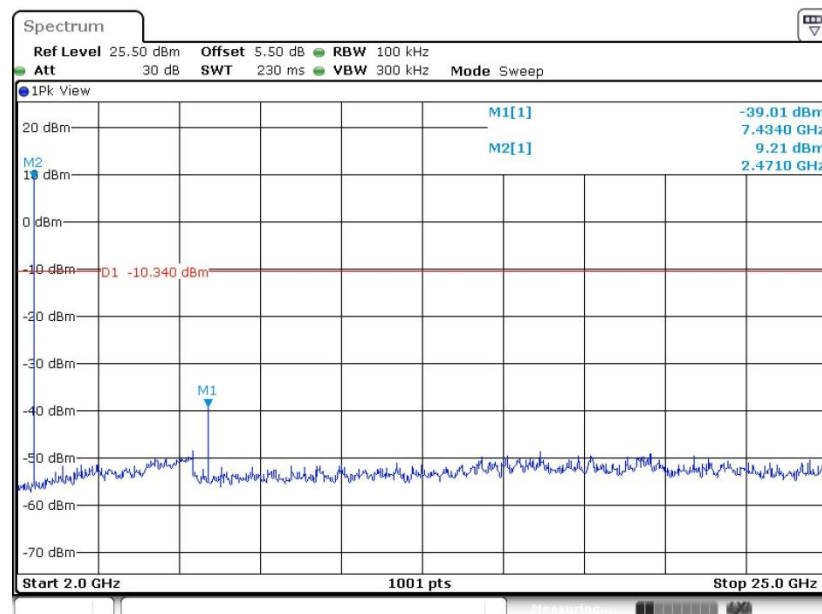


Date: 20.APR.2020 17:26:04




Bluetooth v5.0 LE

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

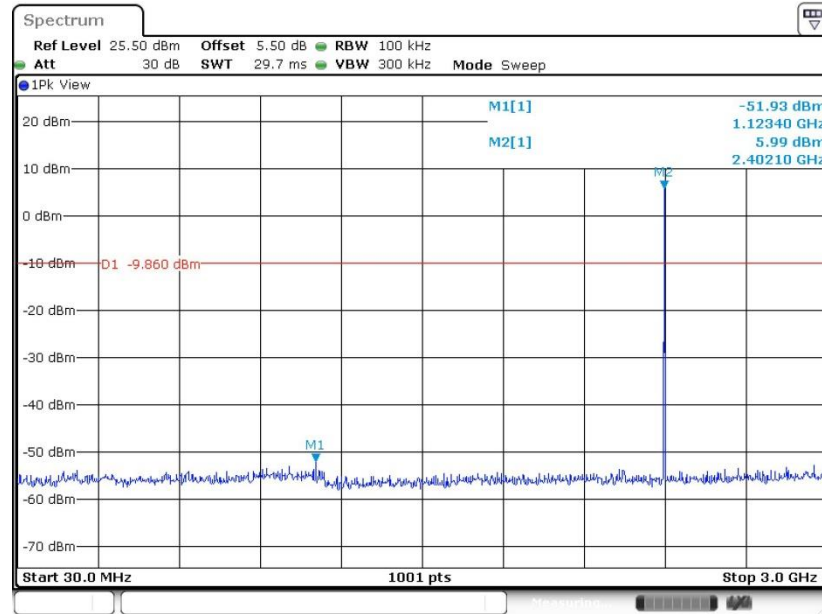

Date: 21.APR.2020 10:42:45


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

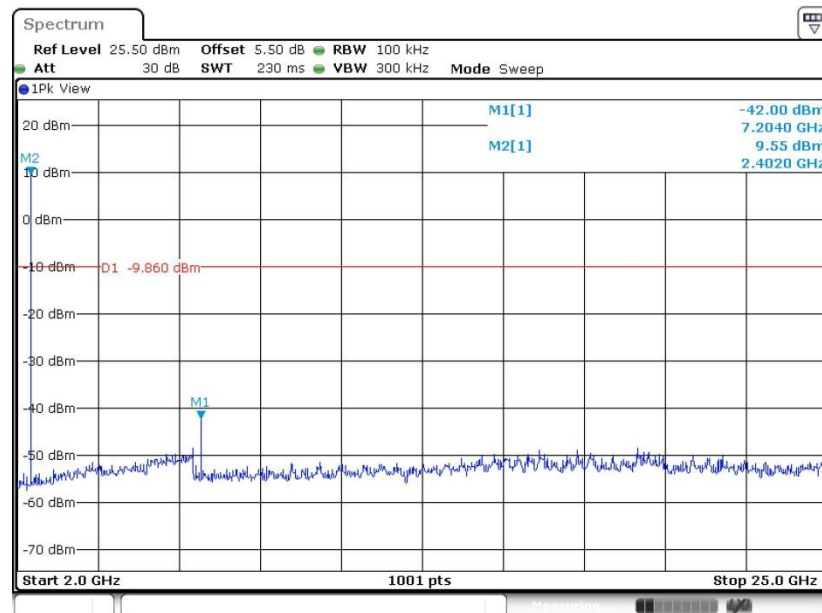

Date: 21.APR.2020 10:42:53




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

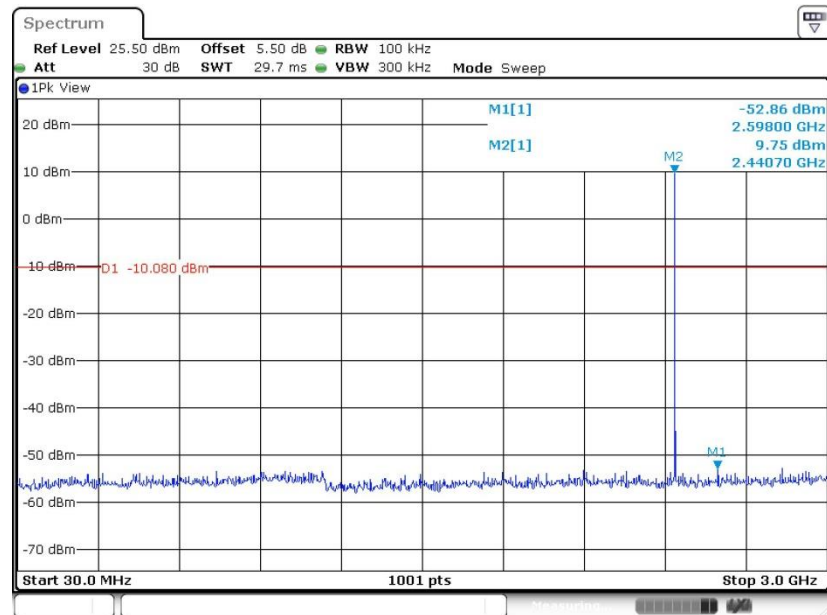

Date: 21.APR.2020 10:46:09


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

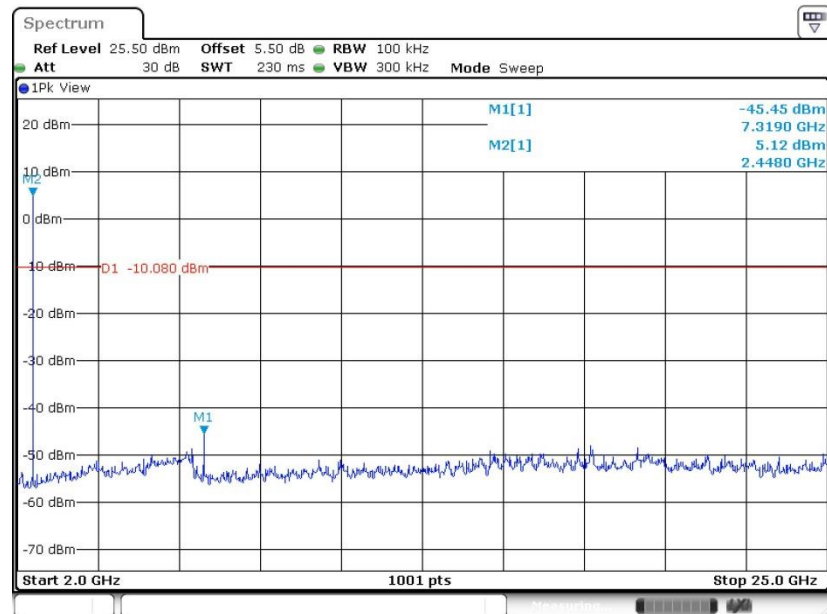

Date: 21.APR.2020 10:46:17




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 39

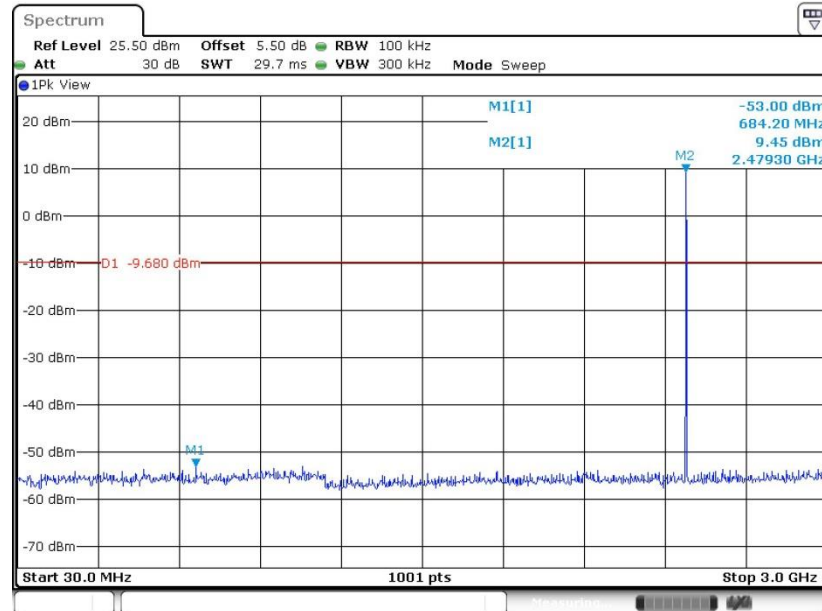

Date: 21.APR.2020 10:51:15

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 39

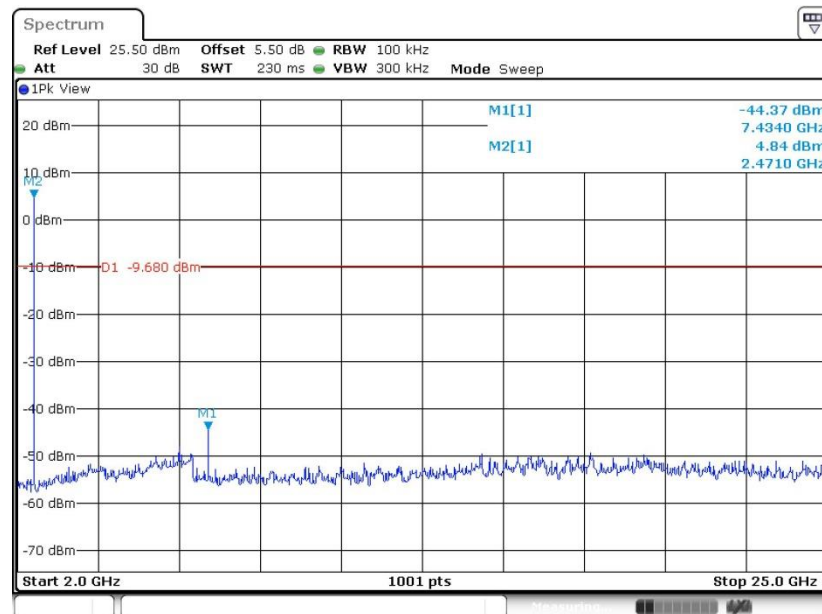

Date: 21.APR.2020 10:51:23

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

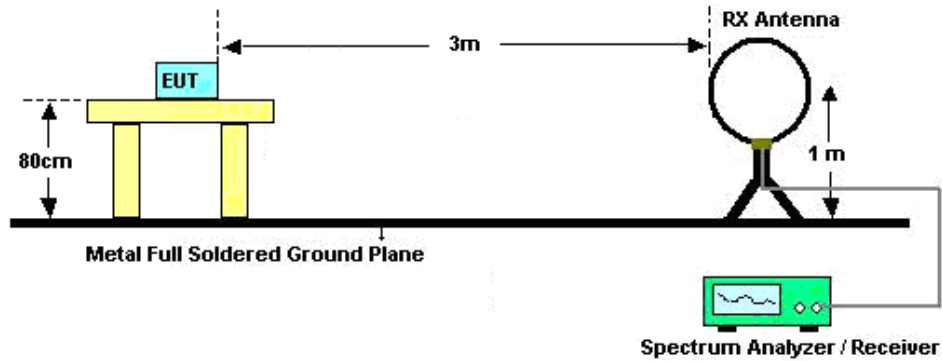

For radiated emissions from 30MHz to 1GHz

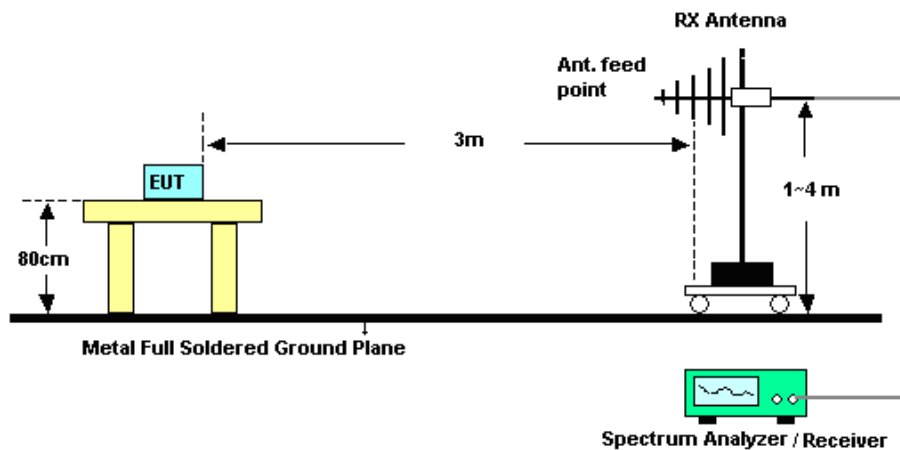

For radiated emissions above 1GHz

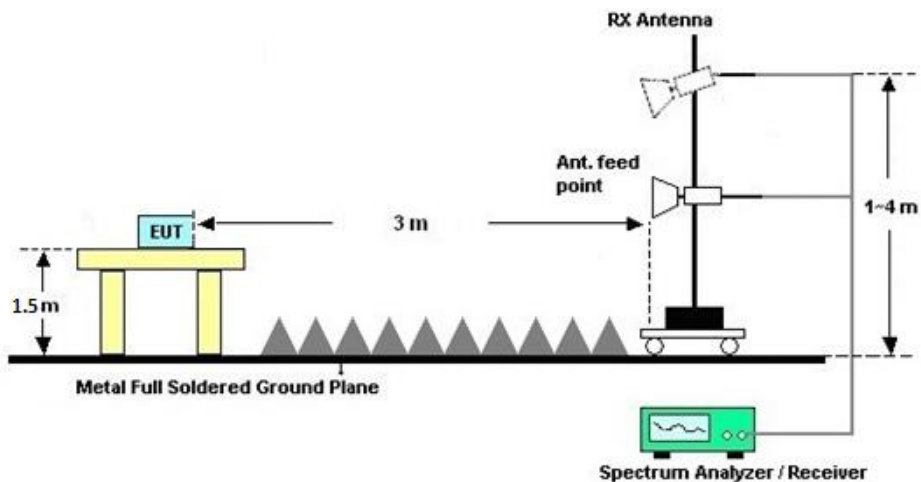

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

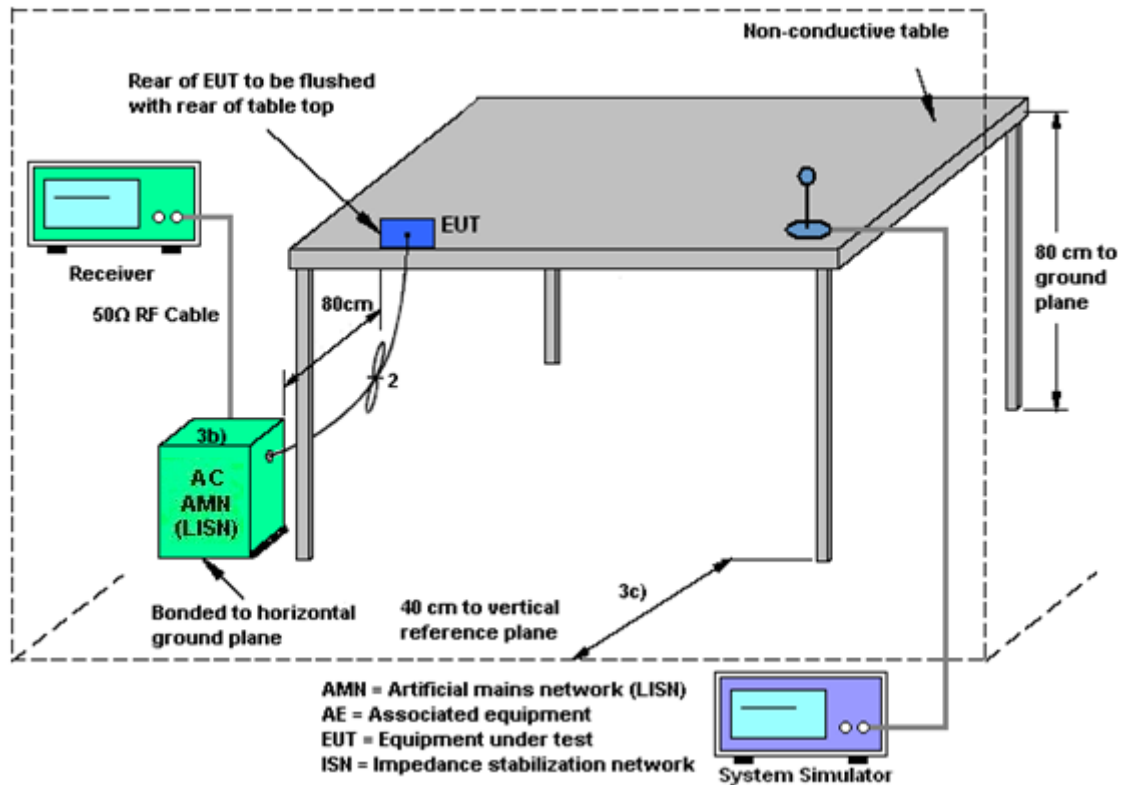

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Apr. 20, 2020~ Apr. 21, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 08, 2020	Apr. 20, 2020~ Apr. 21, 2020	Jan. 07, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Apr. 20, 2020~ Apr. 21, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz; Max 30dBm	Jul. 18, 2019	Apr. 17, 2020	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 15, 2020	Apr. 17, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Apr. 17, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 30, 2019	Apr. 17, 2020	May 29, 2020	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2019	Apr. 17, 2020	Apr. 26, 2020	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2020	Apr. 17, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2019	Apr. 17, 2020	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jun. 05, 2019	Apr. 17, 2020	Jun. 04, 2020	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Aug. 16, 2019	Apr. 17, 2020	Aug. 15, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 13, 2020	Apr. 17, 2020	Apr. 12, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 17, 2020	NCR	Radiation (03CH06-KS)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	NCR	May 04, 2020	NCR	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	May 04, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	May 04, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	May 04, 2020	Nov. 14, 2020	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	May 04, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	May 04, 2020	Jan. 01, 2021	Conduction (CO05-HY)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------



Appendix A. Conducted Test Results

Bluetooth v4.2 Low Energy

Test Engineer:	weller liu	Temperature:	20~26	°C
Test Date:	2020/4/20~2020/4/21	Relative Humidity:	40~51	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	0.66	0.50	Pass
BLE	1Mbps	1	19	2440	1.02	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.02	0.67	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	10.70	30.00	-2.50	8.20	36.00	Pass
BLE	1Mbps	1	19	2440	10.51	30.00	-2.50	8.01	36.00	Pass
BLE	1Mbps	1	39	2480	10.72	30.00	-2.50	8.22	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	10.59
BLE	1Mbps	1	19	2440	2.04	10.39
BLE	1Mbps	1	39	2480	2.04	10.70

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	10.24	-4.47	-2.50	8.00	Pass
BLE	1Mbps	1	19	2440	9.28	-4.72	-2.50	8.00	Pass
BLE	1Mbps	1	39	2480	9.66	-4.94	-2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth v5.0 Low Energy

Test Engineer:	weller liu	Temperature:	20~26	°C
Test Date:	2020/4/20~2020/4/21	Relative Humidity:	40~51	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	1000	2.03	1.14	0.50	Pass
BLE	2Mbps	1	19	2440	2.03	1.15	0.50	Pass
BLE	2Mbps	1	39	2480	2.03	1.14	0.50	Pass

TEST RESULTS DATA Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	10.87	30.00	-2.50	8.37	36.00	Pass
BLE	2Mbps	1	19	2440	10.79	30.00	-2.50	8.29	36.00	Pass
BLE	2Mbps	1	39	2480	10.95	30.00	-2.50	8.45	36.00	Pass

TEST RESULTS DATA Average Power Table (Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	4.83	10.60
BLE	2Mbps	1	19	2440	4.83	10.55
BLE	2Mbps	1	39	2480	4.83	10.91

TEST RESULTS DATA Peak Power Density


Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	10.14	-8.04	-2.50	8.00	Pass
BLE	2Mbps	1	19	2440	9.92	-8.23	-2.50	8.00	Pass
BLE	2Mbps	1	39	2480	10.32	-7.85	-2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	21~25°C
		Relative Humidity :	41~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

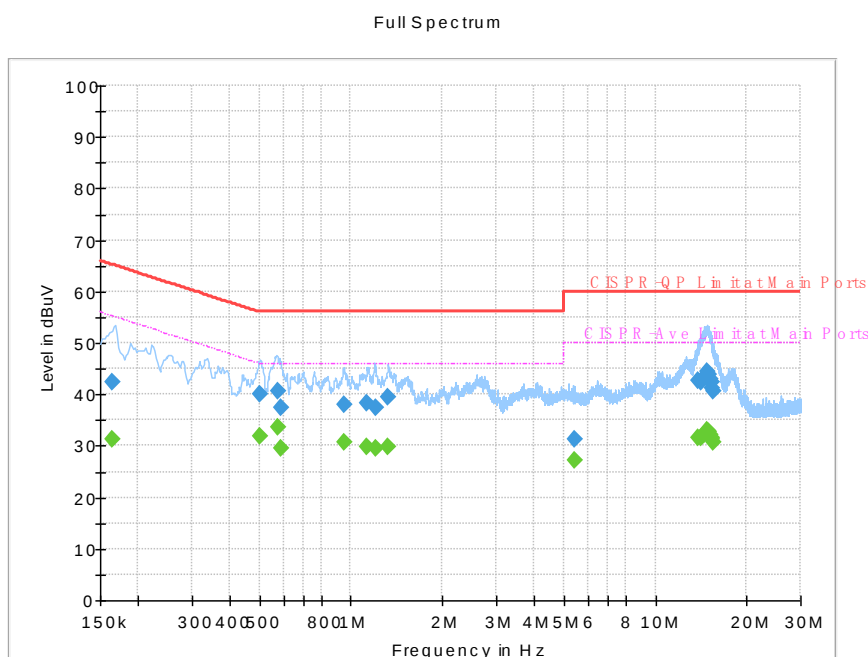


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163500	---	31.14	55.28	24.14	L1	OFF	19.6
0.163500	42.25	---	65.28	23.03	L1	OFF	19.6
0.500460	---	31.81	46.00	14.19	L1	OFF	19.6
0.500460	39.94	---	56.00	16.06	L1	OFF	19.6
0.573000	---	33.53	46.00	12.47	L1	OFF	19.6
0.573000	40.69	---	56.00	15.31	L1	OFF	19.6
0.590820	---	29.59	46.00	16.41	L1	OFF	19.6
0.590820	37.51	---	56.00	18.49	L1	OFF	19.6
0.945600	---	30.60	46.00	15.40	L1	OFF	19.6
0.945600	38.07	---	56.00	17.93	L1	OFF	19.6
1.130820	---	29.76	46.00	16.24	L1	OFF	19.6
1.130820	38.19	---	56.00	17.81	L1	OFF	19.6
1.200750	---	29.64	46.00	16.36	L1	OFF	19.6
1.200750	37.43	---	56.00	18.57	L1	OFF	19.6
1.326390	---	29.88	46.00	16.12	L1	OFF	19.6
1.326390	39.60	---	56.00	16.40	L1	OFF	19.6
5.430660	---	27.32	50.00	22.68	L1	OFF	19.8
5.430660	31.31	---	60.00	28.69	L1	OFF	19.8
13.892730	---	31.67	50.00	18.33	L1	OFF	20.2
13.892730	42.56	---	60.00	17.44	L1	OFF	20.2



Test Engineer :	Howard Huang	Temperature :	21~25°C
		Relative Humidity :	41~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

Full Spectrum

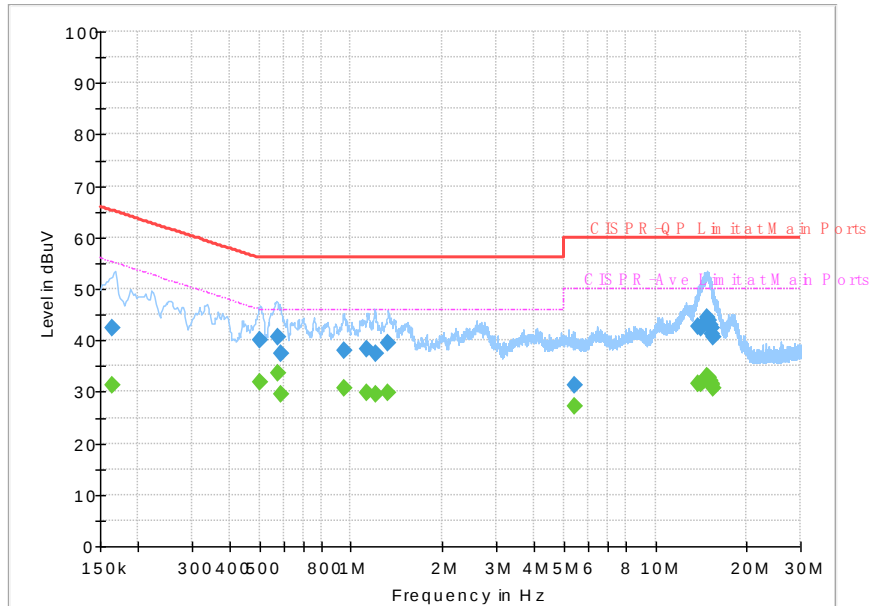
**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
14.185500	---	31.63	50.00	18.37	L1	OFF	20.2
14.185500	42.26	---	60.00	17.74	L1	OFF	20.2
14.487000	---	32.22	50.00	17.78	L1	OFF	20.2
14.487000	43.28	---	60.00	16.72	L1	OFF	20.2
14.761500	---	33.15	50.00	16.85	L1	OFF	20.2
14.761500	44.51	---	60.00	15.49	L1	OFF	20.2
15.027000	---	32.69	50.00	17.31	L1	OFF	20.2
15.027000	43.81	---	60.00	16.19	L1	OFF	20.2
15.171000	---	32.07	50.00	17.93	L1	OFF	20.2
15.171000	42.88	---	60.00	17.12	L1	OFF	20.2
15.265500	---	31.68	50.00	18.32	L1	OFF	20.2
15.265500	42.34	---	60.00	17.66	L1	OFF	20.2
15.366750	---	31.16	50.00	18.84	L1	OFF	20.2
15.366750	41.32	---	60.00	18.68	L1	OFF	20.2
15.491220	---	30.63	50.00	19.37	L1	OFF	20.2
15.491220	40.51	---	60.00	19.49	L1	OFF	20.2



Test Engineer :	Howard Huang	Temperature :	21~25°C
		Relative Humidity :	41~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

Full Spectrum

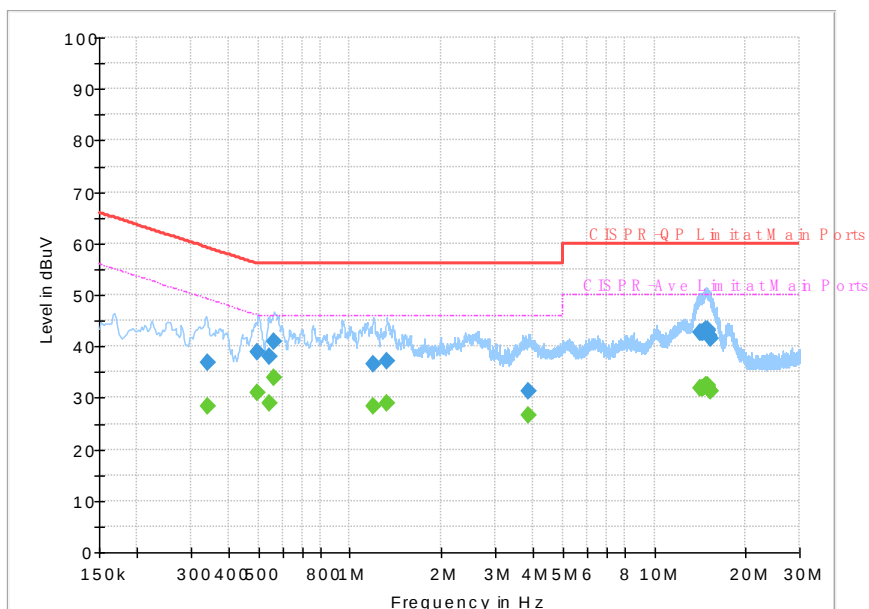


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.339810	---	28.22	49.21	20.99	N	OFF	19.6
0.339810	36.73	---	59.21	22.48	N	OFF	19.6
0.498120	---	30.93	46.03	15.10	N	OFF	19.6
0.498120	39.03	---	56.03	17.00	N	OFF	19.6
0.545280	---	29.02	46.00	16.98	N	OFF	19.6
0.545280	37.97	---	56.00	18.03	N	OFF	19.6
0.565350	---	34.01	46.00	11.99	N	OFF	19.6
0.565350	40.83	---	56.00	15.17	N	OFF	19.6
1.189500	---	28.37	46.00	17.63	N	OFF	19.6
1.189500	36.49	---	56.00	19.51	N	OFF	19.6
1.328280	---	29.02	46.00	16.98	N	OFF	19.6
1.328280	37.21	---	56.00	18.79	N	OFF	19.6
3.844500	---	26.66	46.00	19.34	N	OFF	19.7
3.844500	31.40	---	56.00	24.60	N	OFF	19.7
14.163000	---	31.75	50.00	18.25	N	OFF	20.2
14.163000	42.55	---	60.00	17.45	N	OFF	20.2



Test Engineer :	Howard Huang	Temperature :	21~25°C
		Relative Humidity :	41~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

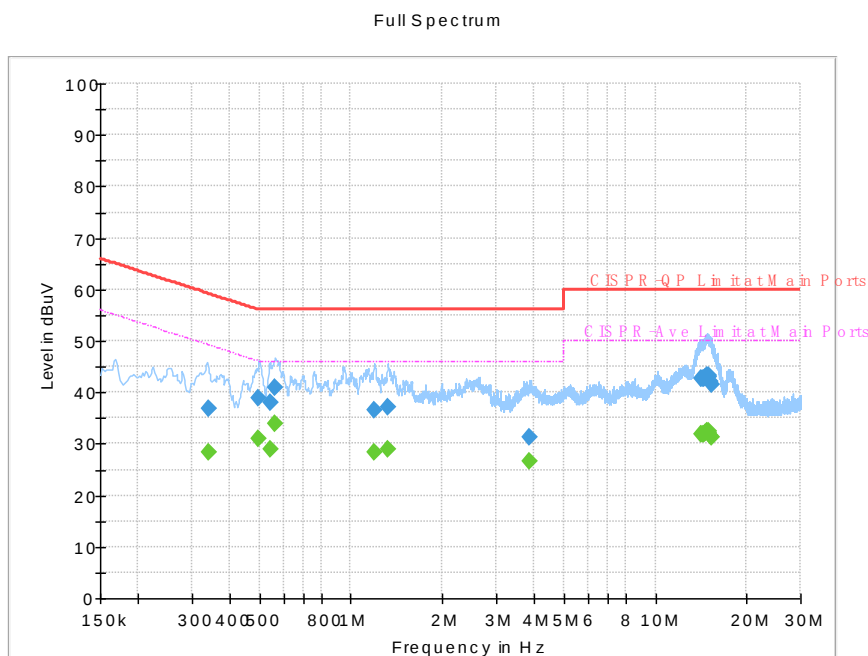

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
14.284500	---	31.73	50.00	18.27	N	OFF	20.2
14.284500	42.62	---	60.00	17.38	N	OFF	20.2
14.534250	---	31.84	50.00	18.16	N	OFF	20.2
14.534250	42.78	---	60.00	17.22	N	OFF	20.2
14.671500	---	32.06	50.00	17.94	N	OFF	20.2
14.671500	43.04	---	60.00	16.96	N	OFF	20.2
14.822250	---	32.33	50.00	17.67	N	OFF	20.2
14.822250	43.33	---	60.00	16.67	N	OFF	20.2
14.896500	---	32.32	50.00	17.68	N	OFF	20.2
14.896500	43.31	---	60.00	16.69	N	OFF	20.2
15.014850	---	32.16	50.00	17.84	N	OFF	20.2
15.014850	43.09	---	60.00	16.91	N	OFF	20.2
15.195750	---	31.66	50.00	18.34	N	OFF	20.2
15.195750	42.18	---	60.00	17.82	N	OFF	20.2
15.292500	---	31.24	50.00	18.76	N	OFF	20.2
15.292500	41.39	---	60.00	18.61	N	OFF	20.2

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Bluetooth v4.2

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2352.64	54.71	-19.29	74	47.79	32	7.25	32.33	148	118	P	H
		2380.07	44.91	-9.09	54	37.87	32.1	7.28	32.34	148	118	A	H
	*	2402	102.66	-	-	95.5	32.2	7.3	32.34	148	118	P	H
	*	2402	102.09	-	-	94.93	32.2	7.3	32.34	148	118	A	H
		2381.76	54.74	-19.26	74	47.7	32.1	7.28	32.34	389	81	P	V
		2375.52	44.92	-9.08	54	37.88	32.1	7.28	32.34	389	81	A	V
	*	2402	101.97	-	-	94.81	32.2	7.3	32.34	389	81	P	V
	*	2402	101.41	-	-	94.25	32.2	7.3	32.34	389	81	A	V
BLE CH 39 2480MHz		2490.28	55.48	-18.52	74	48.27	31.94	7.52	32.25	110	110	P	H
		2483.5	46.84	-7.16	54	39.64	31.99	7.48	32.27	110	110	A	H
	*	2480	101.07	-	-	93.87	31.99	7.48	32.27	110	110	P	H
	*	2480	100.69	-	-	93.49	31.99	7.48	32.27	110	110	A	H
		2489.8	54.66	-19.34	74	47.45	31.94	7.52	32.25	365	73	P	V
		2483.5	46.45	-7.55	54	39.25	31.99	7.48	32.27	365	73	A	V
	*	2480	99.72	-	-	92.52	31.99	7.48	32.27	365	73	P	V
	*	2480	99.11	-	-	91.91	31.99	7.48	32.27	365	73	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	41.44	-32.56	74	57.81	35.16	10.49	62.02	100	0	P	H
		4806	41.01	-32.99	74	57.38	35.16	10.49	62.02	100	360	P	V
BLE CH 19 2440MHz		4878	42.38	-31.62	74	58.55	35.17	10.58	61.92	100	0	P	H
		7320	42.53	-31.47	74	53.91	36.87	13.62	61.87	100	0	P	H
		4878	40.25	-33.75	74	56.42	35.17	10.58	61.92	100	360	P	V
		7320	42.83	-31.17	74	54.21	36.87	13.62	61.87	100	360	P	V
BLE CH 39 2480MHz		4962	44.48	-29.52	74	60.41	35.19	10.68	61.8	100	0	P	H
		7440	43.21	-30.79	74	54.6	36.89	13.58	61.86	100	0	P	H
		4962	42.81	-31.19	74	58.74	35.19	10.68	61.8	100	360	P	V
		7440	41.45	-32.55	74	52.84	36.89	13.58	61.86	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.97	22.02	-17.98	40	29.43	24.57	1.1	33.08	100	0	P	H
		53.28	17.09	-22.91	40	35.33	13.65	1.27	33.16	-	-	P	H
		152.22	21.64	-21.86	43.5	35.68	16.98	1.98	33	-	-	P	H
		182.29	22.54	-20.96	43.5	38.3	15.04	2.14	32.94	-	-	P	H
		228.85	25.86	-20.14	46	40.03	16.29	2.38	32.84	-	-	P	H
		377.26	24.09	-21.91	46	32.46	21.14	3.02	32.53	-	-	P	H
		30.97	31.82	-8.18	40	39.23	24.57	1.1	33.08	100	307	P	V
		53.28	28.66	-11.34	40	46.9	13.65	1.27	33.16	-	-	P	V
		78.5	26.36	-13.64	40	44.54	13.4	1.49	33.07	-	-	P	V
		257.95	23.56	-22.44	46	33.69	20.12	2.53	32.78	-	-	P	V
		397.63	25.7	-20.3	46	33.08	21.83	3.11	32.32	-	-	P	V
		951.5	30.6	-15.4	46	27.01	30.98	4.71	32.1	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Bluetooth v5.0

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2358.62	55.8	-18.2	74	48.88	32	7.25	32.33	146	114	P	H
		2381.11	45.63	-8.37	54	38.59	32.1	7.28	32.34	146	114	A	H
	*	2402	102.05	-	-	94.89	32.2	7.3	32.34	146	114	P	H
	*	2402	100.55	-	-	93.39	32.2	7.3	32.34	146	114	A	H
		2380.59	54.61	-19.39	74	47.57	32.1	7.28	32.34	392	82	P	V
		2387.09	45.62	-8.38	54	38.46	32.2	7.3	32.34	392	82	A	V
	*	2402	101.65	-	-	94.49	32.2	7.3	32.34	392	82	P	V
	*	2402	100.1	-	-	92.94	32.2	7.3	32.34	392	82	A	V
BLE CH 39 2480MHz		2483.56	57.2	-16.8	74	50	31.99	7.48	32.27	110	111	P	H
		2483.5	49.72	-4.28	54	42.52	31.99	7.48	32.27	110	111	A	H
	*	2480	100.99	-	-	93.79	31.99	7.48	32.27	110	111	P	H
	*	2480	99.56	-	-	92.36	31.99	7.48	32.27	110	111	A	H
		2483.5	56.44	-17.56	74	49.24	31.99	7.48	32.27	361	87	P	V
		2483.5	48.5	-5.5	54	41.3	31.99	7.48	32.27	361	87	A	V
	*	2480	99.33	-	-	92.13	31.99	7.48	32.27	361	87	P	V
	*	2480	97.22	-	-	90.02	31.99	7.48	32.27	361	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	42.44	-31.56	74	58.81	35.16	10.49	62.02	100	0	P	H
		4806	39.95	-34.05	74	56.32	35.16	10.49	62.02	100	360	P	V
BLE CH 19 2440MHz		4878	40.56	-33.44	74	56.73	35.17	10.58	61.92	300	0	P	H
		7320	42.12	-31.88	74	53.5	36.87	13.62	61.87	300	0	P	H
		4878	40.04	-33.96	74	56.21	35.17	10.58	61.92	100	360	P	V
		7320	42.54	-31.46	74	53.92	36.87	13.62	61.87	100	360	P	V
BLE CH 39 2480MHz		4962	42.07	-31.93	74	58	35.19	10.68	61.8	300	0	P	H
		7440	42.16	-31.84	74	53.55	36.89	13.58	61.86	300	0	P	H
		4962	40.49	-33.51	74	56.42	35.19	10.68	61.8	300	360	P	V
		7440	42.75	-31.25	74	54.14	36.89	13.58	61.86	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	19.48	-20.52	40	26.37	25.1	1.11	33.1	-	-	P	H
		236.61	23.63	-22.37	46	36.87	17.17	2.42	32.83	-	-	P	H
		378.23	21.81	-24.19	46	30.14	21.16	3.03	32.52	-	-	P	H
		522.76	21.57	-24.43	46	26.36	24.63	3.26	32.68	-	-	P	H
		847.71	25.98	-20.02	46	24.86	29.26	4.15	32.29	100	0	P	H
		968.96	27.08	-26.92	54	23.55	30.85	4.74	32.06	-	-	P	H
		30.97	30.21	-9.79	40	37.62	24.57	1.1	33.08	100	360	P	V
		54.25	26.58	-13.42	40	45.08	13.4	1.28	33.18	-	-	P	V
		96.93	25.56	-17.94	43.5	41.19	15.71	1.64	32.98	-	-	P	V
		132.82	21.31	-22.19	43.5	34.92	17.57	1.85	33.03	-	-	P	V
		258.92	23.65	-22.35	46	33.64	20.26	2.53	32.78	-	-	P	V
		392.78	25.48	-20.52	46	33.1	21.66	3.09	32.37	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v4.2	62.50	0.391	2.556	2.7KHz
Bluetooth LE v5.0	32.87	0.206	4.859	5.1KHz

Bluetooth LE v4.2

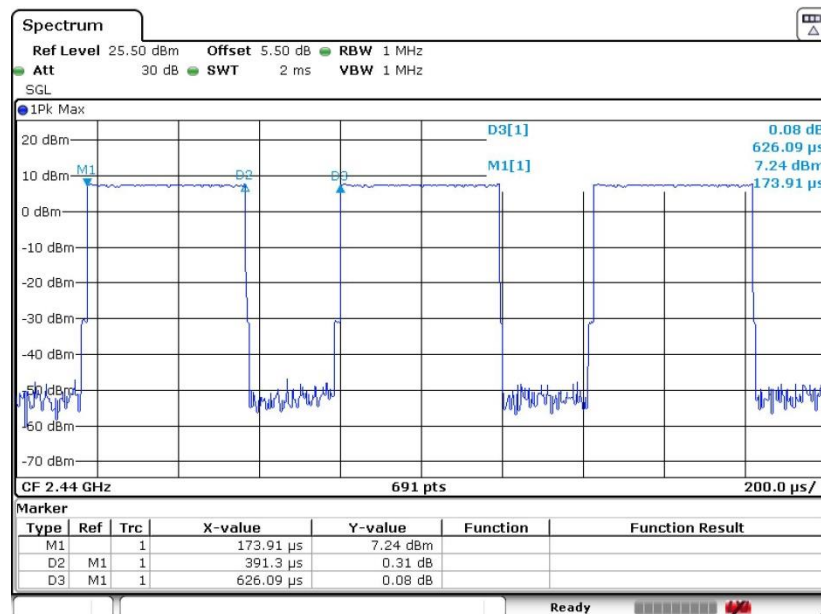

Bluetooth LE v5.0

