



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2083-3
FCC ID : IHDT56ZD6
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Apr. 21, 2020 and testing was completed on Jun. 01, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Specification of Accessory 7

 1.7. Test Location 8

 1.8. Test Software 8

 1.9. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 22

5. UNCERTAINTY OF EVALUATION 23

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|-------------|---------|-------------------------|---------------|
| FC042102-01 | Rev. 01 | Initial issue of report | Jun. 24, 2020 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|----------|-----------------------|-----------------|--------|--|
| 3.1 | 15.107 | AC Conducted Emission | < 15.107 limits | PASS | Under limit 6.54 dB at 0.201 MHz |
| 3.2 | 15.109 | Radiated Emission | < 15.109 limits | PASS | Under limit 4.59 dB at 180.350 MHz |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.3. Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2083-3 |
| FCC ID | IHDT56ZD6 |
| EUT supports Radios application | GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS |
| IMEI Code | Conduction/Radiation: 355541110009036/355541110009044 |
| HW Version | DVT2 |
| SW Version | QPX30.34 |
| EUT Stage | Production Unit |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two different types of EUT. Sample1 is dual SIM card and sample 2 is single SIM card, the others are the same. So we chose dual SIM card sample to perform all tests.



1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx Frequency | GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56MHz |
| Rx Frequency | GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz NFC: 13.56MHz |
| Antenna Type | WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna FM: External Earphone Antenna NFC: Loop Antenna |
| Type of Modulation | GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (uplink is not supported) |



| | |
|--|--|
| | DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM NFC:ASK |
|--|--|

Note: GNSS Rx = GLONASS + GPS + Galileo

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|----------------------------|------------|--------------|
| AC Adapter 1(US) | Brand Name | Motorola (Acbel) | Model Name | MC-201 |
| AC Adapter 1(EU) | Brand Name | Motorola (Acbel) | Model Name | MC-202 |
| AC Adapter 1(UK) | Brand Name | Motorola (Acbel) | Model Name | MC-203 |
| AC Adapter 1(AU) | Brand Name | Motorola (Acbel) | Model Name | MC-205 |
| AC Adapter 1(AR) | Brand Name | Motorola (Acbel) | Model Name | MC-206 |
| AC Adapter 1(BR) | Brand Name | Motorola (Acbel) | Model Name | MC-207 |
| AC Adapter 1(Chile) | Brand Name | Motorola (Acbel) | Model Name | MC-209 |
| AC Adapter 2(US) | Brand Name | Motorola (Chenyang) | Model Name | MC-201 |
| AC Adapter 2(EU) | Brand Name | Motorola (Chenyang) | Model Name | MC-202 |
| AC Adapter 2(UK) | Brand Name | Motorola (Chenyang) | Model Name | MC-203 |
| AC Adapter 2(IN) | Brand Name | Motorola (Chenyang) | Model Name | MC-204 |
| AC Adapter 2(AU) | Brand Name | Motorola (Chenyang) | Model Name | MC-205 |
| AC Adapter 2(AR) | Brand Name | Motorola (Chenyang) | Model Name | MC-206 |
| AC Adapter 2(BR) | Brand Name | Motorola (Chenyang) | Model Name | MC-207 |
| AC Adapter 3(BR) | Brand Name | Motorola (Flex/Salom) | Model Name | SC-57 |
| AC Adapter 4(BR) | Brand Name | Motorola (Cliptech/Tenpao) | Model Name | SC-57 |
| Battery | Brand Name | Motorola(ATL) | Model Name | JK50 |
| Earphone 1 | Brand Name | Motorola (New Leader) | Model Name | EM09-IN |
| Earphone 2 | Brand Name | Motorola (Juwei) | Model Name | JWEP1123-T03 |
| USB Cable 1 | Brand Name | Motorola (Yihuaxing) | Model Name | T365-008 |
| USB Cable 2 | Brand Name | Motorola (Saibao) | Model Name | STN-A110 |



1.7. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-KS 03CH02-KS | CN1257 | 314309 |

1.8. Test Software

| Item | Site | Manufacture | Name | Version |
|------|-----------|-------------|------|--------------|
| 1. | 03CH02-KS | AUDIX | E3 | 6.2009-8-24a |
| 2. | CO01-KS | AUDIX | E3 | 6.2009-8-24 |

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

| Test Items | Function Type |
|-----------------------|---|
| AC Conducted Emission | Mode 1: GSM 850 Rx(Middle) + USB Cable 1(Charging from Adapter 1) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + Battery |
| | Mode 2: WCDMA Band II Rx + USB Cable 2(Charging from Adapter 2) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + Camera(Front) + Battery |
| | Mode 3: WCDMA 850 Rx(Low) + USB Cable 1(Charging from Adapter 3) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + MP4 + Battery |
| | Mode 4: LTE Band 5 Rx(High) + USB Cable 1(Charging from Adapter 4) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + FM Rx(98MHz) + Battery |
| | Mode 5: LTE Band 26 Rx(Middle) + USB Cable 1(Data Link with Notebook) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + GNSS Rx + Battery |
| | Mode 6: LTE Band 7 Rx + USB Cable 2(Data Link with Notebook) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + Battery |
| | Mode 7: LTE Band 5 Rx(High) + USB Cable 1(Charging from Adapter 4) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + NFC On + Battery |
| | Mode 8: LTE Band 5 Rx(High) + USB Cable 1(Charging from Adapter 4) + Earphone 2+ Bluetooth Idle + WLAN Idle(5G) + FM Rx(98MHz) + Battery |




| | |
|--------------------|--|
| Radiated Emissions | <p>Mode 1: GSM 850 Rx(Middle) + USB Cable 1(Charging from Adapter 1) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + Camera(Rear) + Battery</p> <p>Mode 2: WCDMA Band II Rx + USB Cable 2(Charging from Adapter 2) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + Camera(Front) + Battery</p> <p>Mode 3: WCDMA 850 Rx(Low) + USB Cable 1(Charging from Adapter 3) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + MP4 + Battery</p> <p>Mode 4: LTE Band 5 Rx(High) + USB Cable 1(Charging from Adapter 4) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + FM Rx(88MHz) + Battery</p> <p>Mode 5: LTE Band 26 Rx(Middle) + USB Cable 1(Data Link with Notebook) + Earphone 1+ Bluetooth Idle + WLAN Idle(2.4G) + GNSS Rx + Battery</p> <p>Mode 6: LTE Band 7 Rx + USB Cable 2(Data Link with Notebook) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + Battery</p> <p>Mode 7: GSM 850 Rx(Middle) + USB Cable 1(Charging from Adapter 1) + Earphone 1+ Bluetooth Idle + WLAN Idle(5G) + NFC On + Battery</p> <p>Mode 8: LTE Band 26 Rx(Middle) Rx + USB Cable 1(Data Link with Notebook) + Earphone 2+ Bluetooth Idle + WLAN Idle(5G) + GNSS Rx + Battery</p> |
|--------------------|--|

Remark:

1. The worst case of AC is mode 4; only the test data of this mode is reported.
2. The worst case of RE is mode 5; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.

2.2.Connection Diagram of Test System

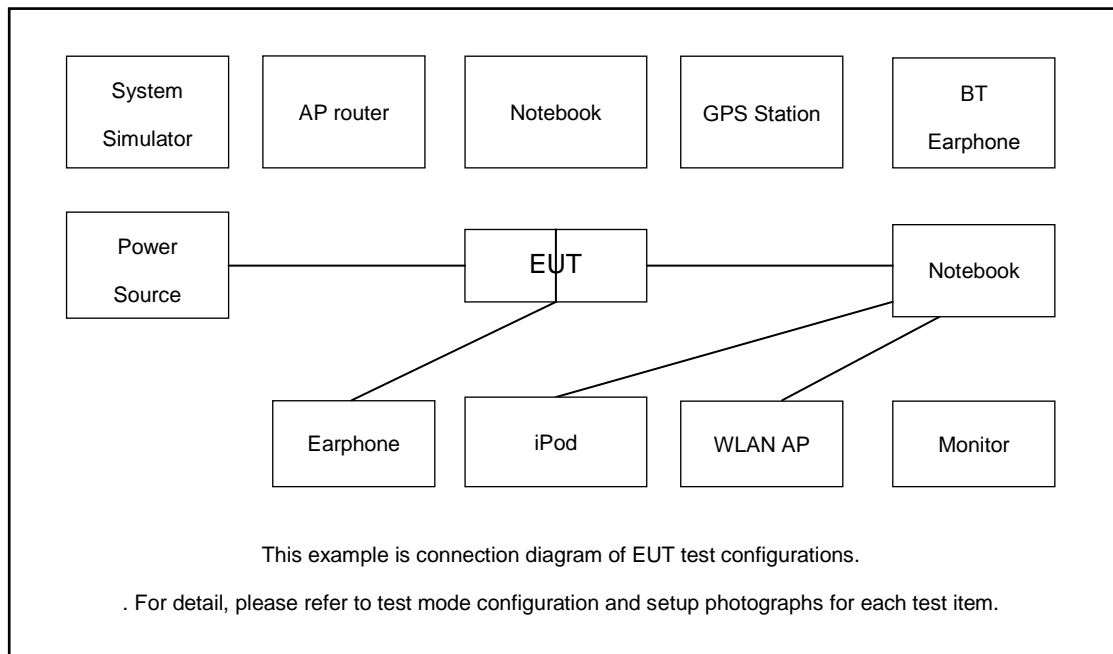

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-------------------------|------------|--------------|---------------|----------------|--|
| 1. | Base Station | Anritsu | MT8820C | N/A | N/A | Unshielded,1.8m |
| 2. | Vector Signal Generator | R&S | SMBV100A | N/A | N/A | N/A |
| 3. | WLAN AP | D-link | DIR-655 | KA21R655B1 | N/A | Unshielded,1.8m |
| 4. | WLAN AP | TP-Link | TL-WDR5600 | N/A | N/A | Unshielded,1.8m |
| 5. | Bluetooth Earphone | Lenovo | LBH308 | N/A | N/A | N/A |
| 6. | Bluetooth Earphone | Xiaomi | LYEJ02LM | N/A | N/A | N/A |
| 7. | Notebook | Lenovo | G480 | QDS-BRCM1050I | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 8. | Notebook | Dell | Latitude3440 | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 9. | Hard Disk | Lenovo | F310 | DoC | Shielded, 1.2m | N/A |
| 10. | Hard disk | KINGSHARE | KSP6120G | Fcc DoC | Shielded, 1.2m | N/A |
| 11. | SD Card | Kingston | 8GB | N/A | N/A | N/A |
| 12. | SD Card | SanDisk | Uitra | N/A | N/A | N/A |

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Turn on camera to capture images.
4. Turn on FM receiver function to make the EUT receive continuous signals from FM station.
5. Turn on MPEG4 function.
6. Turn on NFC function.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |

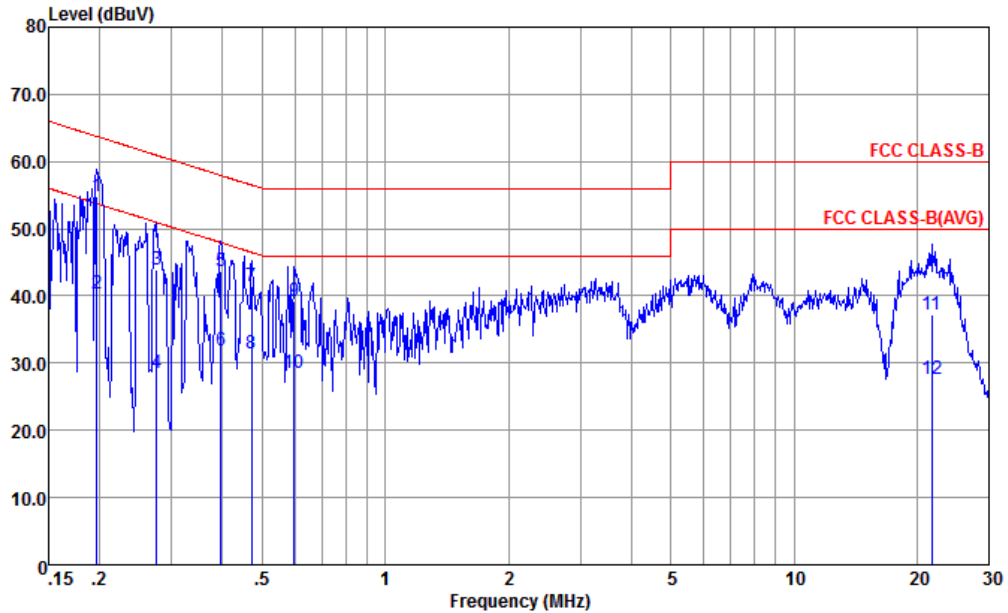


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-191028-060105 LINE
 Project : (FC) 042102-01

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.197 | 54.91 | -8.85 | 63.76 | 44.50 | 0.04 | 10.37 | QP |
| 2 | 0.197 | 40.31 | -13.45 | 53.76 | 29.90 | 0.04 | 10.37 | Average |
| 3 | 0.276 | 43.97 | -16.97 | 60.94 | 33.60 | 0.05 | 10.32 | QP |
| 4 | 0.276 | 28.57 | -22.37 | 50.94 | 18.20 | 0.05 | 10.32 | Average |
| 5 | 0.396 | 43.62 | -14.33 | 57.95 | 33.30 | 0.05 | 10.27 | QP |
| 6 | 0.396 | 31.92 | -16.03 | 47.95 | 21.60 | 0.05 | 10.27 | Average |
| 7 | 0.471 | 41.50 | -14.99 | 56.49 | 31.20 | 0.06 | 10.24 | QP |
| 8 | 0.471 | 31.50 | -14.99 | 46.49 | 21.20 | 0.06 | 10.24 | Average |
| 9 | 0.598 | 39.20 | -16.80 | 56.00 | 28.89 | 0.07 | 10.24 | QP |
| 10 | 0.598 | 28.60 | -17.40 | 46.00 | 18.29 | 0.07 | 10.24 | Average |
| 11 | 21.715 | 37.13 | -22.87 | 60.00 | 25.91 | 0.70 | 10.52 | QP |
| 12 | 21.715 | 27.53 | -22.47 | 50.00 | 16.31 | 0.70 | 10.52 | Average |



| | | | |
|-----------------|---------------|---------------------|-------------|
| Test Engineer : | Amos Zhang | Temperature : | 25.3~26.2°C |
| | | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |

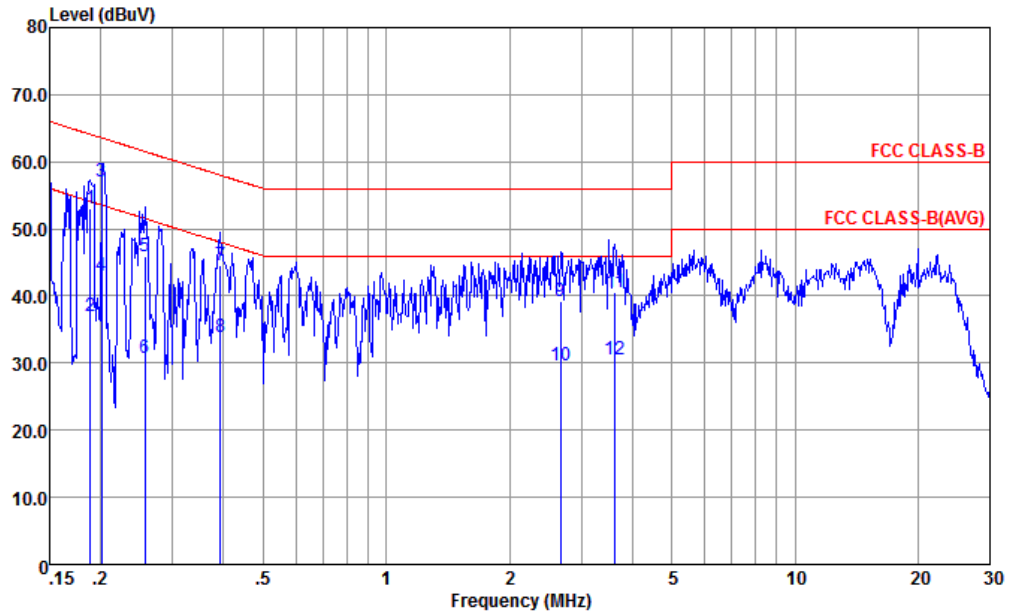

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-191028-060105 NEUTRAL
 Project : (FC) 042102-01

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.188 | 53.07 | -11.04 | 64.11 | 42.60 | 0.08 | 10.39 | QP |
| 2 | 0.188 | 37.07 | -17.04 | 54.11 | 26.60 | 0.08 | 10.39 | Average |
| 3 * | 0.201 | 57.04 | -6.54 | 63.58 | 46.60 | 0.08 | 10.36 | QP |
| 4 | 0.201 | 43.04 | -10.54 | 53.58 | 32.60 | 0.08 | 10.36 | Average |
| 5 | 0.256 | 45.91 | -15.65 | 61.56 | 35.49 | 0.09 | 10.33 | QP |
| 6 | 0.256 | 30.71 | -20.85 | 51.56 | 20.29 | 0.09 | 10.33 | Average |
| 7 | 0.393 | 44.56 | -13.43 | 57.99 | 34.20 | 0.09 | 10.27 | QP |
| 8 | 0.393 | 33.96 | -14.03 | 47.99 | 23.60 | 0.09 | 10.27 | Average |
| 9 | 2.664 | 39.28 | -16.72 | 56.00 | 28.90 | 0.14 | 10.24 | QP |
| 10 | 2.664 | 29.68 | -16.32 | 46.00 | 19.30 | 0.14 | 10.24 | Average |
| 11 | 3.623 | 40.60 | -15.40 | 56.00 | 30.20 | 0.15 | 10.25 | QP |
| 12 | 3.623 | 30.60 | -15.40 | 46.00 | 20.20 | 0.15 | 10.25 | Average |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

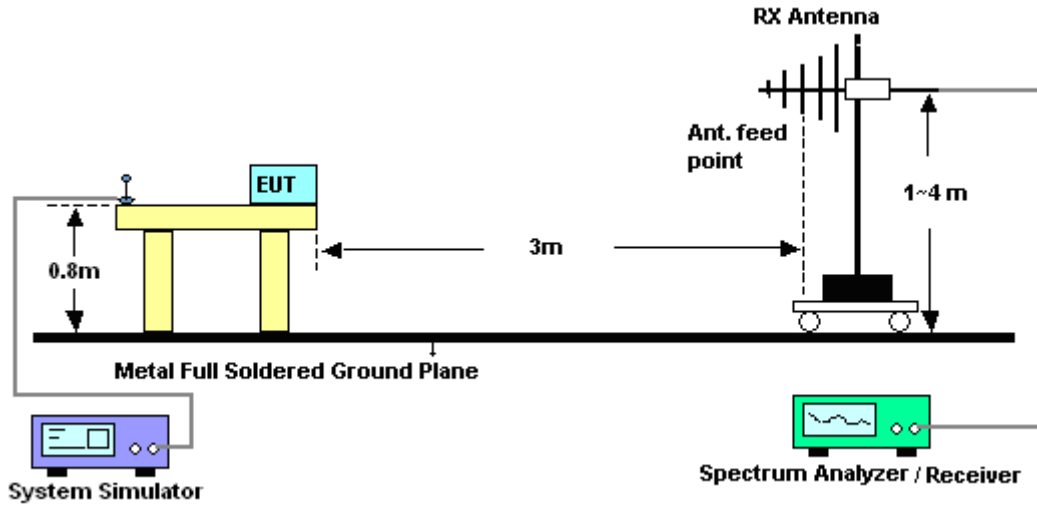


For radiated emissions above 1GHz

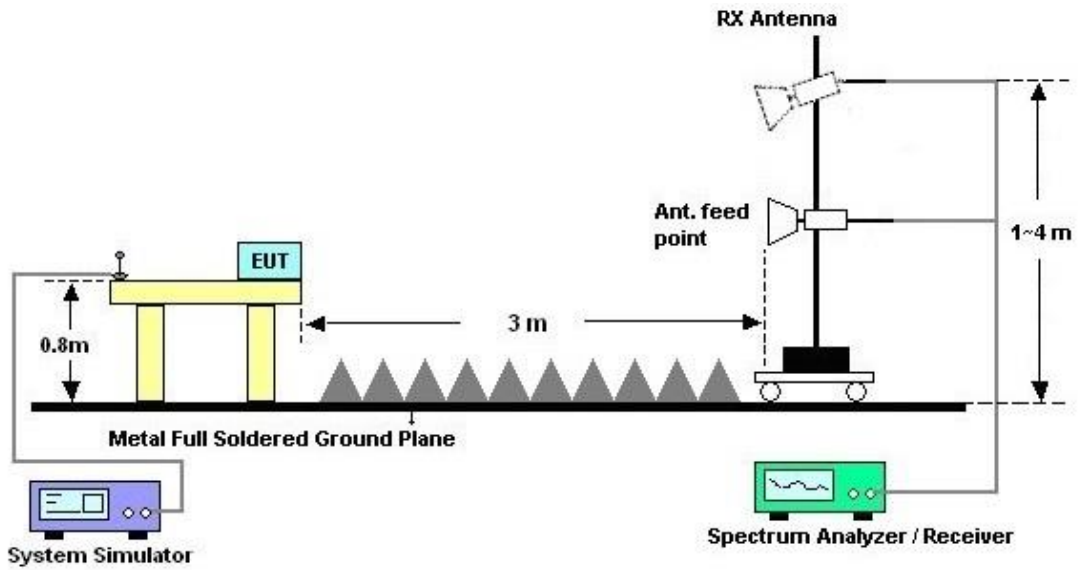



3.2.5. Test Result of Radiated Emission

| | | | |
|-----------------|---|---------------------|------------|
| Test Engineer : | Jack Wang | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #7 is system simulator signal which can be ignored. | | |

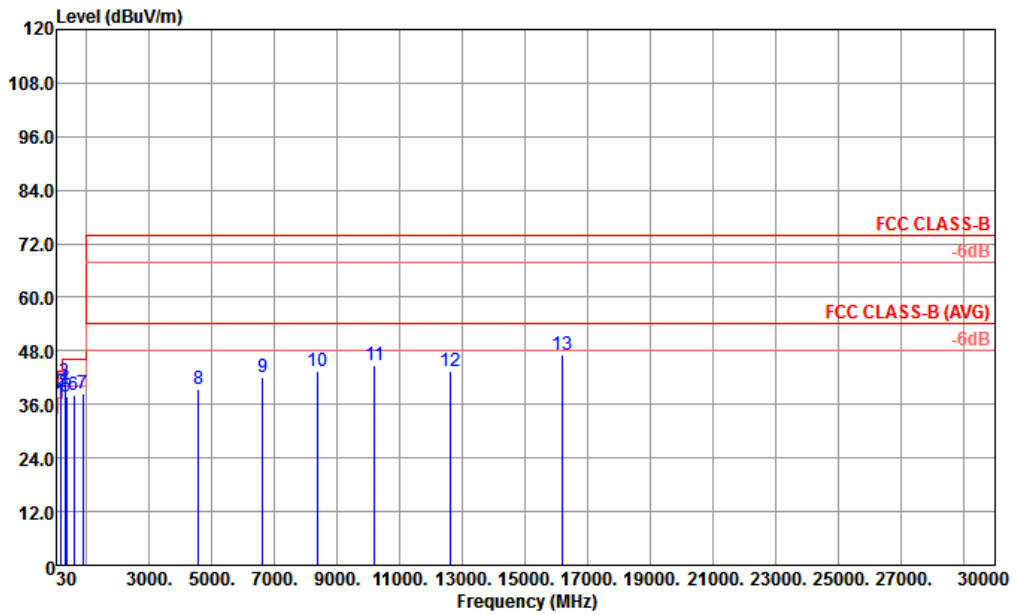


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M HORIZONTAL
 Project : (FC)042102-01
 Mode : 5

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Factor | Preamp Loss | A/Pos | T/Pos | Remark |
|-----|----------|--------|------------|------------|-------------------|--------------|-------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 167.74 | 36.36 | -7.14 | 43.50 | 50.32 | 16.46 | 1.51 | 31.93 | --- | Peak |
| 2 ! | 180.35 | 38.91 | -4.59 | 43.50 | 53.37 | 15.92 | 1.54 | 31.92 | 100 | Peak |
| 3 ! | 299.66 | 41.20 | -4.80 | 46.00 | 51.92 | 19.30 | 1.98 | 32.00 | --- | Peak |
| 4 | 312.27 | 39.93 | -6.07 | 46.00 | 50.32 | 19.62 | 2.01 | 32.02 | --- | Peak |
| 5 | 359.80 | 37.73 | -8.27 | 46.00 | 46.84 | 20.85 | 2.13 | 32.09 | --- | Peak |
| 6 | 600.36 | 38.01 | -7.99 | 46.00 | 41.69 | 26.00 | 2.73 | 32.41 | --- | Peak |
| 7 | 881.66 | 38.57 | | | 37.50 | 29.24 | 3.41 | 31.58 | --- | Peak |
| 8 | 4560.00 | 39.51 | -34.49 | 74.00 | 59.63 | 33.45 | 7.95 | 61.52 | --- | Peak |
| 9 | 6624.00 | 42.05 | -31.95 | 74.00 | 59.08 | 35.27 | 9.71 | 62.01 | --- | Peak |
| 10 | 8392.00 | 43.60 | -30.40 | 74.00 | 58.16 | 36.42 | 11.04 | 62.02 | --- | Peak |
| 11 | 10179.00 | 44.65 | -29.35 | 74.00 | 57.58 | 36.91 | 12.69 | 62.53 | --- | Peak |
| 12 | 12627.00 | 43.59 | -30.41 | 74.00 | 53.04 | 38.62 | 14.15 | 62.22 | --- | Peak |
| 13 | 16164.00 | 47.10 | -26.90 | 74.00 | 51.82 | 41.18 | 16.83 | 62.73 | --- | Peak |



| | | | |
|-----------------|---|---------------------|----------|
| Test Engineer : | Jack Wang | Temperature : | 21~22°C |
| | | Relative Humidity : | 41~42% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #7 is system simulator signal which can be ignored. | | |

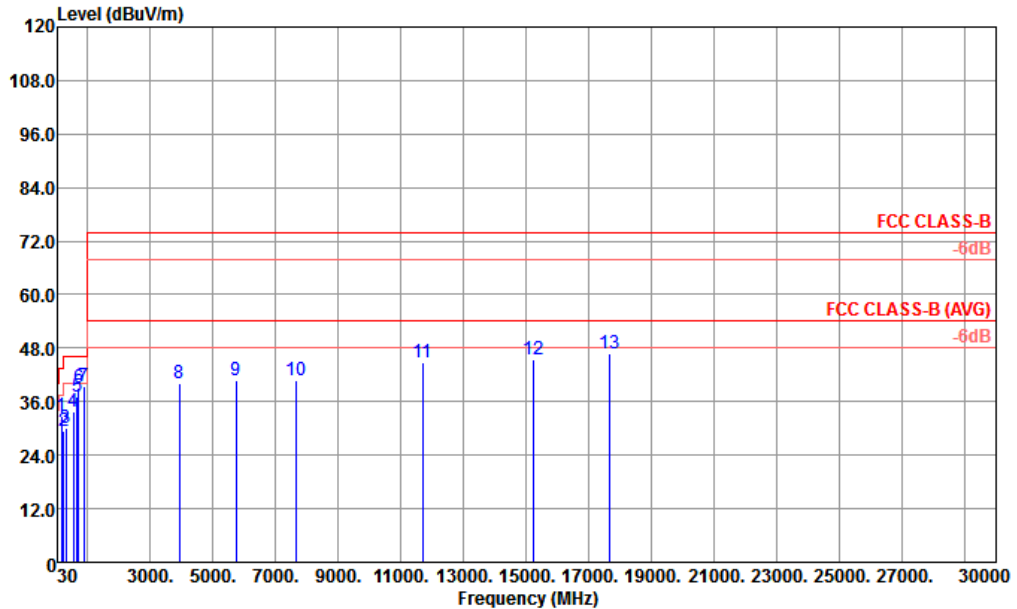

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL
 Project : (FC)042102-01
 Mode : 5

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark | |
|----|----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 167.74 | 32.85 | -10.65 | 43.50 | 46.81 | 16.46 | 1.51 | 31.93 | --- | --- | Peak |
| 2 | 240.49 | 29.31 | -16.69 | 46.00 | 41.43 | 18.01 | 1.82 | 31.95 | --- | --- | Peak |
| 3 | 312.27 | 30.15 | -15.85 | 46.00 | 40.54 | 19.62 | 2.01 | 32.02 | --- | --- | Peak |
| 4 | 530.52 | 33.66 | -12.34 | 46.00 | 38.48 | 24.89 | 2.60 | 32.31 | --- | --- | Peak |
| 5 | 650.80 | 36.94 | -9.06 | 46.00 | 39.79 | 26.60 | 2.91 | 32.36 | --- | --- | Peak |
| 6 | 717.73 | 39.23 | -6.77 | 46.00 | 41.13 | 27.34 | 3.07 | 32.31 | 100 | --- | 0 Peak |
| 7 | 882.63 | 39.58 | | | 38.52 | 29.23 | 3.41 | 31.58 | --- | --- | Peak |
| 8 | 3928.00 | 40.03 | -33.97 | 74.00 | 60.71 | 33.68 | 7.39 | 61.75 | --- | --- | Peak |
| 9 | 5736.00 | 40.82 | -33.18 | 74.00 | 58.93 | 34.79 | 8.97 | 61.87 | --- | --- | Peak |
| 10 | 7648.00 | 40.83 | -33.17 | 74.00 | 56.45 | 36.17 | 10.49 | 62.28 | --- | --- | Peak |
| 11 | 11691.00 | 44.63 | -29.37 | 74.00 | 55.42 | 38.08 | 13.67 | 62.54 | --- | --- | Peak |
| 12 | 15219.00 | 45.61 | -28.39 | 74.00 | 51.87 | 40.51 | 15.88 | 62.65 | --- | --- | Peak |
| 13 | 17667.00 | 46.96 | -27.04 | 74.00 | 50.66 | 40.93 | 16.56 | 61.19 | --- | --- | Peak |

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|-----------|--------------|-------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver | R&S | ESC17 | 100768 | 9kHz~7GHz; | Apr. 14, 2020 | Jun. 01, 2020 | Apr. 13, 2021 | Conduction (CO01-KS) |
| AC LISN | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 11, 2019 | Jun. 01, 2020 | Oct. 10, 2020 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060105 | 9kHz~30MHz | Oct. 18, 2019 | Jun. 01, 2020 | Oct. 17, 2020 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP000000811 | AC 0V~300V, 45Hz~1000Hz | Oct. 11, 2019 | Jun. 01, 2020 | Oct. 10, 2020 | Conduction (CO01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz;Max 30dBm | Aug. 06, 2019 | May 10, 2020 | Aug. 05, 2020 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55370528 | 10Hz-44G,MAX 30dB | Oct. 18, 2019 | May 10, 2020 | Oct. 17, 2020 | Radiation (03CH02-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 49922 | 30MHz-1GHz | May 30, 2019 | May 10, 2020 | May 29, 2020 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 75957 | 1GHz~18GHz | Nov. 10, 2019 | May 10, 2020 | Nov. 09, 2020 | Radiation (03CH02-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz-1GHz | Aug. 06, 2019 | May 10, 2020 | Aug. 05, 2020 | Radiation (03CH02-KS) |
| Amplifier | Keysight | 83017A | MY53270316 | 500MHz~26.5G Hz | Oct. 18, 2019 | May 10, 2020 | Oct. 17, 2020 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 616010002473 | N/A | NCR | May 10, 2020 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | May 10, 2020 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | May 10, 2020 | NCR | Radiation (03CH02-KS) |

NCR: No Calibration Required.



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.9dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.9dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.0dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.1dB |
|---|-------|