

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2115-1,XT2115-2,XT2115-3,XT2115-4,XT2115DL
FCC ID : IHDT56ZG1
STANDARD : FCC 47 CFR Part 2 (2.1093)

The product was received on Aug. 13, 2020 and testing was started from Aug. 17, 2020 and completed on Sep. 16, 2020. We, Sporton International (ShenZhen) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Hank Huang

Reviewed by: Hank Huang / Supervisor

Johnny Chen

Approved by: Johnny Chen / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 6
3. Guidance Applied 6
4. Equipment Under Test (EUT) Information 7
4.1 General Information 7
4.2 General LTE SAR Test and Reporting Considerations 9
5. Proximity Sensor Triggering Test 12
5.1 Proximity sensor triggering distances(Per KDB616217§6.2) 12
6. RF Exposure Limits 23
6.1 Uncontrolled Environment 23
6.2 Controlled Environment 23
7. Specific Absorption Rate (SAR) 24
7.1 Introduction 24
7.2 SAR Definition 24
8. System Description and Setup 25
8.1 E-Field Probe 26
8.2 Data Acquisition Electronics (DAE) 26
8.3 Phantom 27
8.4 Device Holder 28
9. Measurement Procedures 29
9.1 Spatial Peak SAR Evaluation 29
9.2 Power Reference Measurement 30
9.3 Area Scan 30
9.4 Zoom Scan 31
9.5 Volume Scan Procedures 31
9.6 Power Drift Monitoring 31
10. Test Equipment List 32
11. System Verification 33
11.1 Tissue Simulating Liquids 33
11.2 Tissue Verification 34
11.3 System Performance Check Results 35
12. RF Exposure Positions 37
12.1 Ear and handset reference point 37
12.2 Definition of the cheek position 38
12.3 Definition of the tilt position 39
12.4 Body Worn Accessory 40
12.5 Product Specific 10g SAR Exposure 41
12.6 Wireless Router 41
13. Conducted RF Output Power (Unit: dBm) 42
14. Antenna Location 56
15. SAR Test Results 57
15.1 Head SAR 60
15.2 Hotspot SAR 66
15.3 Body Worn Accessory SAR 77
15.4 Product specific 10g SAR 85
15.5 TDD LTE Band 41(HPUE) Linearity Data Analysis 93
15.6 Repeated SAR Measurement 94
16. Simultaneous Transmission Analysis 95
16.1 Head Exposure Conditions 96
16.2 Hotspot Exposure Conditions 98
16.3 Body-Worn Accessory Exposure Conditions 101
16.4 Product specific 10g SAR Exposure Conditions 104
16.5 SPLSR Evaluation and Analysis 107
17. Supplemental Tuner Tests Results 123
17.1 Supplemental Tuner Head & Body SAR Results 123
18. Uncertainty Assessment 124
19. References 125
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos
Appendix E. Conducted RF Output Power Table



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA081310	Rev. 01	Initial issue of report	Sep. 24, 2020



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2115-1,XT2115-2,XT2115-3,XT2115-4,XT2115DL**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.51	1.30	1.30	1.59
		GSM1900	<0.10	1.44	1.44	
	WCDMA	Band V	0.44	1.40	1.40	
		Band IV	0.19	1.44	1.44	
		Band II	0.20	1.44	1.44	
	CDMA	BC0	0.44	1.42	1.30	
		BC10	0.42	1.35	1.39	
		BC1	0.18	1.29	1.42	
	LTE	Band 71	0.24	0.88	0.88	
		Band 12/Band 17	0.28	0.93	0.93	
		Band 13	0.36	1.38	1.38	
		Band 14	0.36	1.26	1.26	
		Band 5	0.44	1.32	1.32	
		Band 26	0.46	1.33	1.33	
		Band 66/Band 4	0.15	1.44	1.44	
Band 25/Band 2		0.16	1.44	1.44		
	Band 7	0.49	1.42	1.42		
	Band 41/Band 38	0.45	1.44	1.44		
DTS	WLAN	2.4GHz WLAN	1.09	1.14	1.14	1.59
NII		5GHz WLAN	0.10	1.17	1.20	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.16	<0.10	<0.10	1.59
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)		Highest Simultaneous Transmission 10g SAR (W/kg)	
Licensed	GSM	GSM850	1.17		3.58	
		GSM1900	3.58			
	WCDMA	Band V	2.55			
		Band IV	3.58			
		Band II	3.58			
	CDMA	BC0	2.55			
		BC10	2.50			
		BC1	3.08			
	LTE	Band 13	2.66			
		Band 14	2.50			
		Band 5	2.48			
		Band 26	2.27			
		Band 66/Band 4	3.29			
Band 25/Band 2		3.25				
Band 7		3.54				
	Band 41/Band 38	3.57				
NII	WLAN	5GHz WLAN	3.39		3.58	
Date of Testing:			2020/8/17~2020/9/16			



Remark: This device supports LTE B2 / B4 / B17 / B38 and B25 / B66 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B12 / B41.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory		
Test Firm	Sporton International (Shenzhen) Inc.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1256	421272

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2115-1,XT2115-2,XT2115-3,XT2115-4,XT2115DL
FCC ID	IHDT56ZG1
IMEI Code	356887110008489
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink) CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DVT2
SW Version	QPC30.Q4-3
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	1. 802.11n-HT40 is not supported in 2.4GHz WLAN. 2. WLAN operation in 5600 MHz ~ 5650 MHz is notched 3. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 4. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.



5. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
6. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.
7. This device supports HPUE for LTE band 41 with class 2 power level, so HPUE SAR has been performed.
8. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity).
9. The device will invoke corresponding work scenarios power level, which are provided in the operational description.
10. For Some WWAN bands, sensor on reduced power level higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
11. When handheld state, when WWAN transmit simultaneous with WLAN/Bluetooth, for WLAN5.2GHz/5.3GHz/5.5GHz /5.8GHz, product specific 10g SAR condition reduced powers will be active.
12. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, CDMA2000 BC0/BC1/BC10, and LTE Band 2/4/5/12/13/14/17/25/26/66/71, WWAN antenna 2 frequency band include LTE Band 7/38/41.
13. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA, CDMA and LTE modes of WWAN antenna 1. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information on section17.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56ZG1																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R11, Cat4																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, head/body-worn/ hotspot/extremity will trigger reduced power for some LTE bands, the detail please referred to section 13.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for 41C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 3 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133247	675.5	133272	678	133297	680.5	133322	683				
H	133447	695.5	133422	693	133397	690.5	133372	688				


5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

- Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5825MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
- Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or bottom or left side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
- When the proximity sensor is active, GSM850/1900, WCDMA band II/IV/V, CDMA BC0/1/10, LTE band 2/4/5/7/14/25/26/66/38/41/41HPUE and WLAN5.2GHz/5.3GHz/5.5GHz/5.8GHz reduced power will be active for front/ back body worn SAR.
- P-sensor can detect handheld state, GSM1900, WCDMA band II/IV, CDMA BC1 and LTE B2/4/7/25/66 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active for handheld SAR.
- For WLAN P-sensor can detect handheld state WLAN5.5GHz/5.8GHz for back sides of product specific 10g SAR condition reduced powers will be active for handheld SAR.
- The proximity sensors used to detect the proximity of the user's body at the front or back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:
Front: [13 mm](#)
Back: [23 mm](#)
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:
For antenna 1
Front: [5 mm](#)
Back: [10 mm](#)
Bottom side: [11 mm](#)


For antenna 2
Front: [5 mm](#)
Back: [8 mm](#)
Bottom side: [6 mm](#)


For WLAN
Back: [5 mm](#)


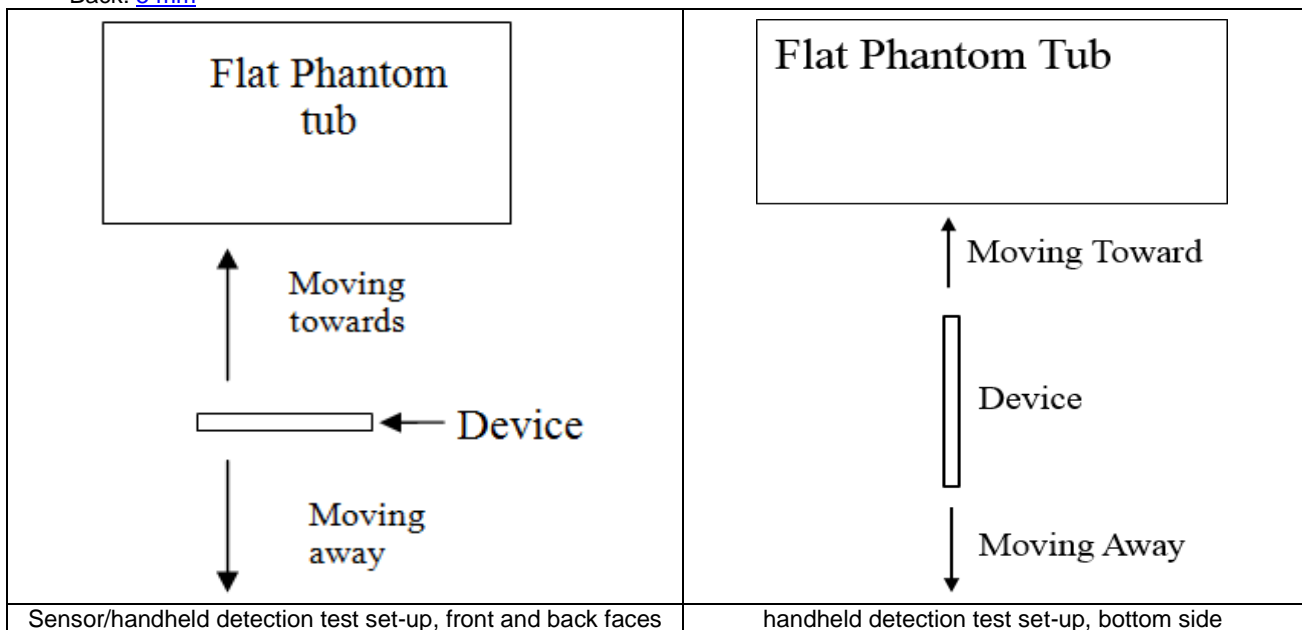


<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	14	14	24	25


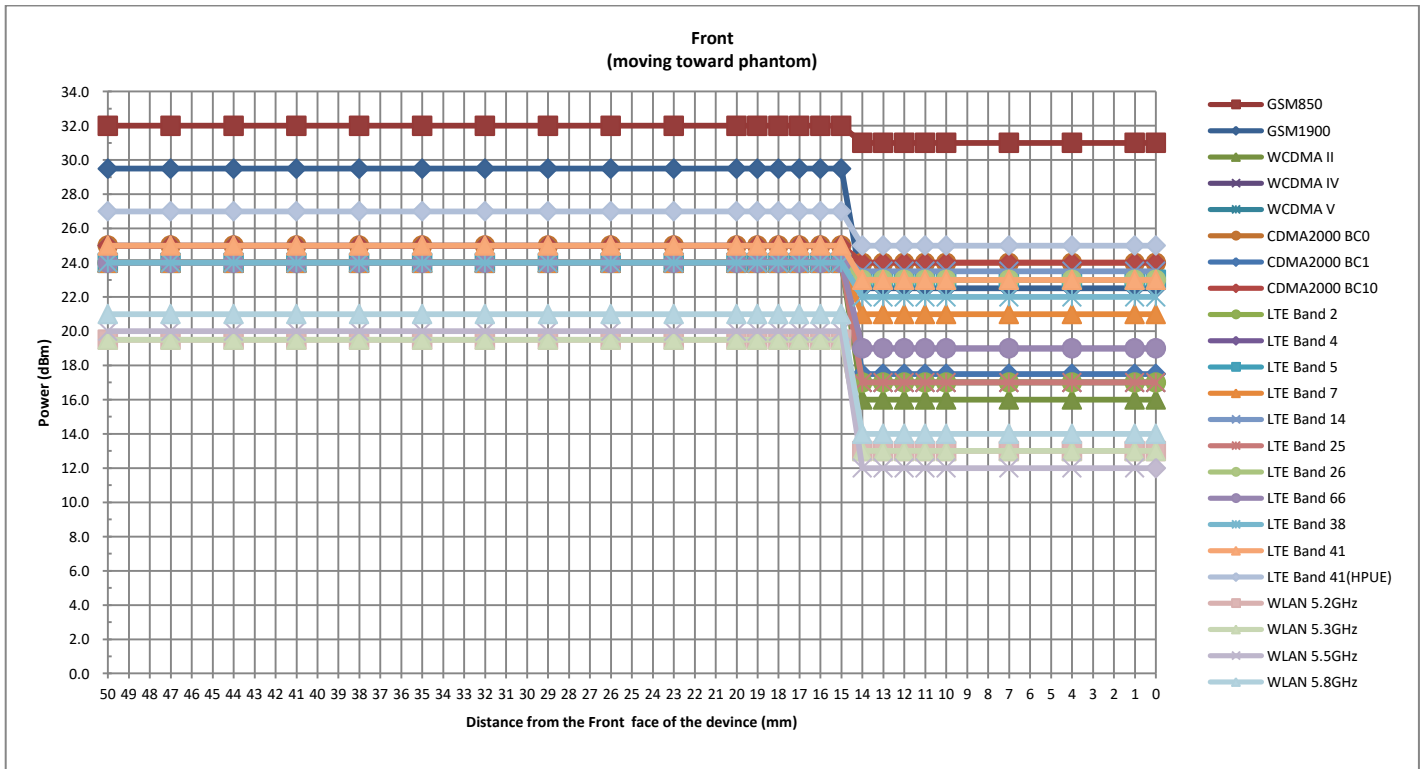



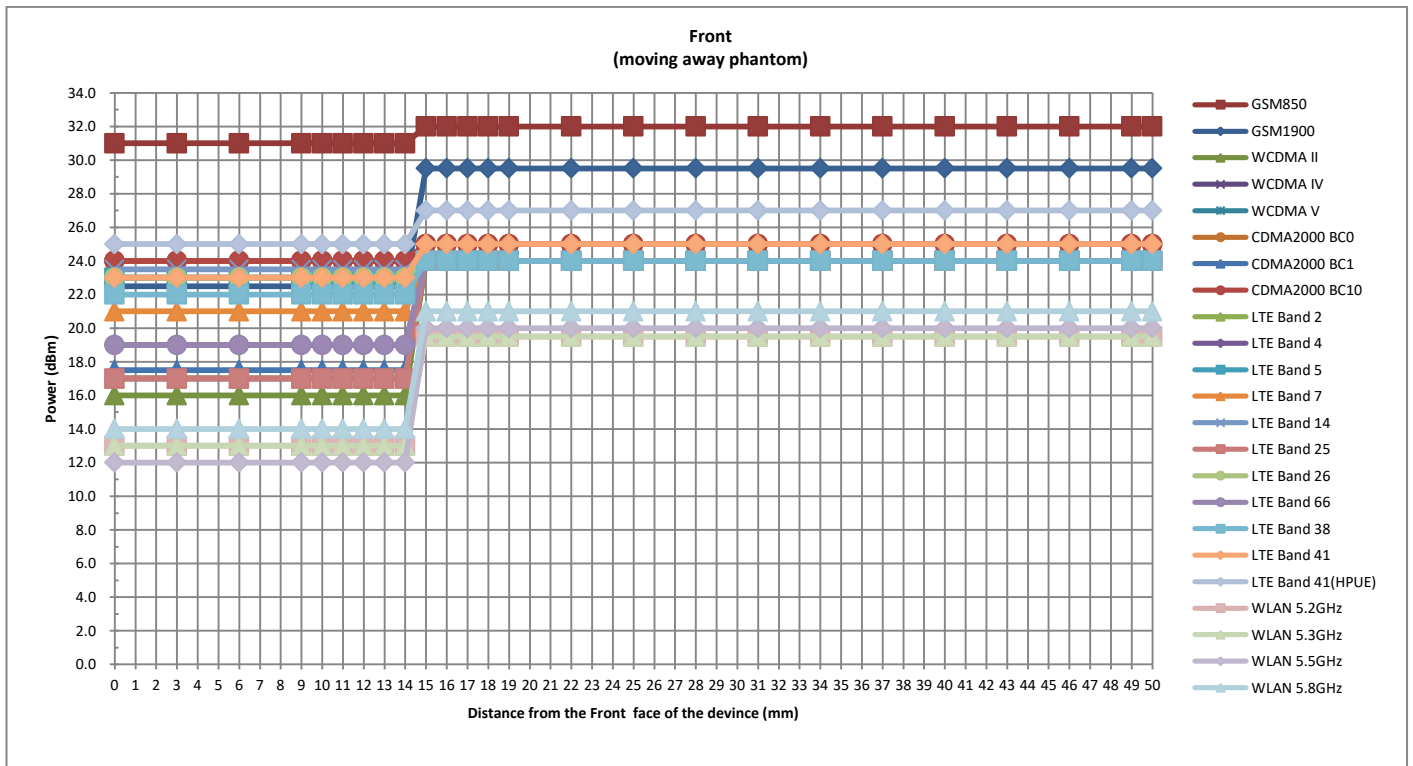


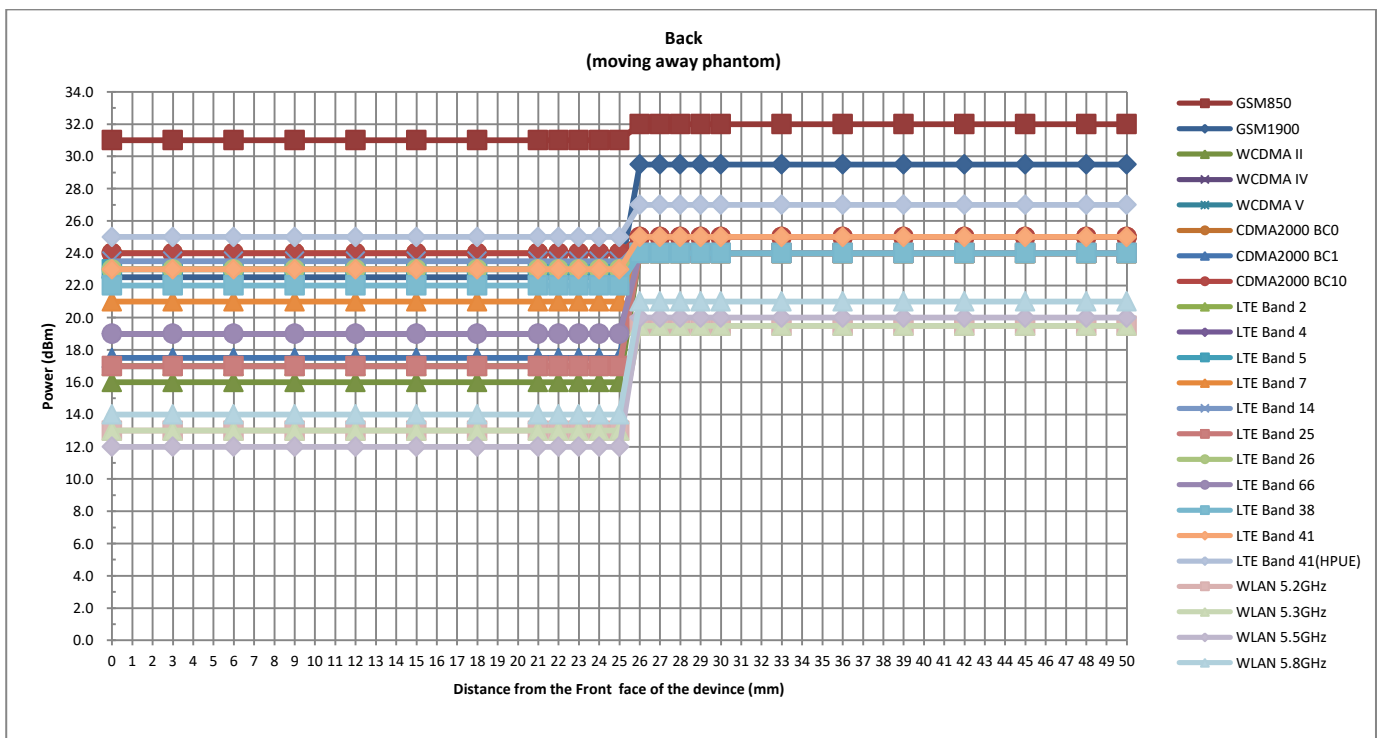
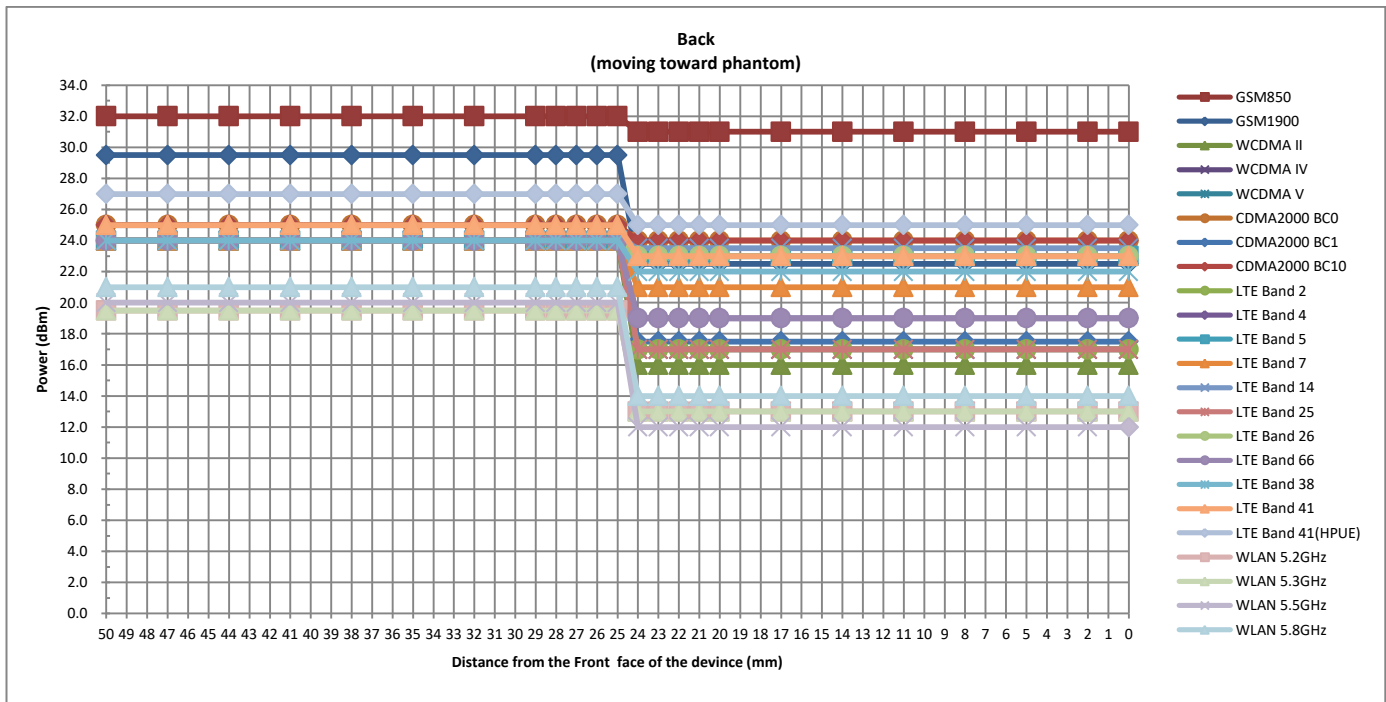


<Handheld for antenna 1>

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	9	11	15	12	14

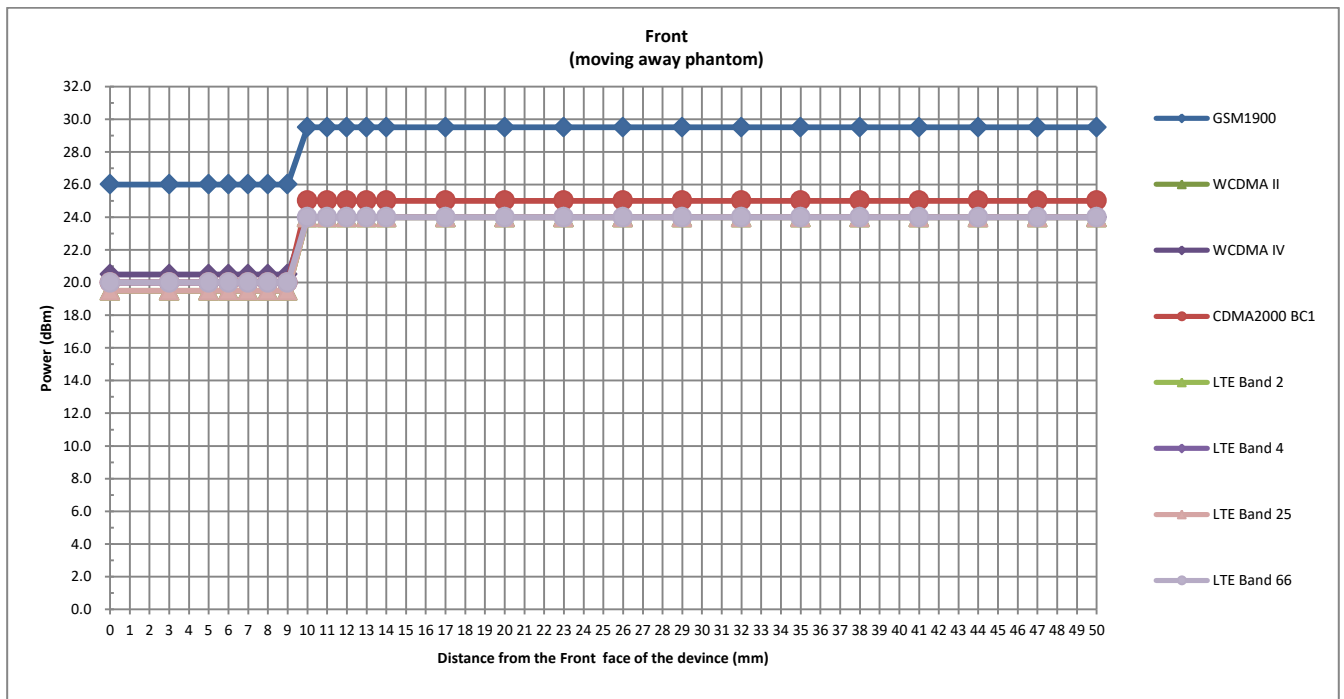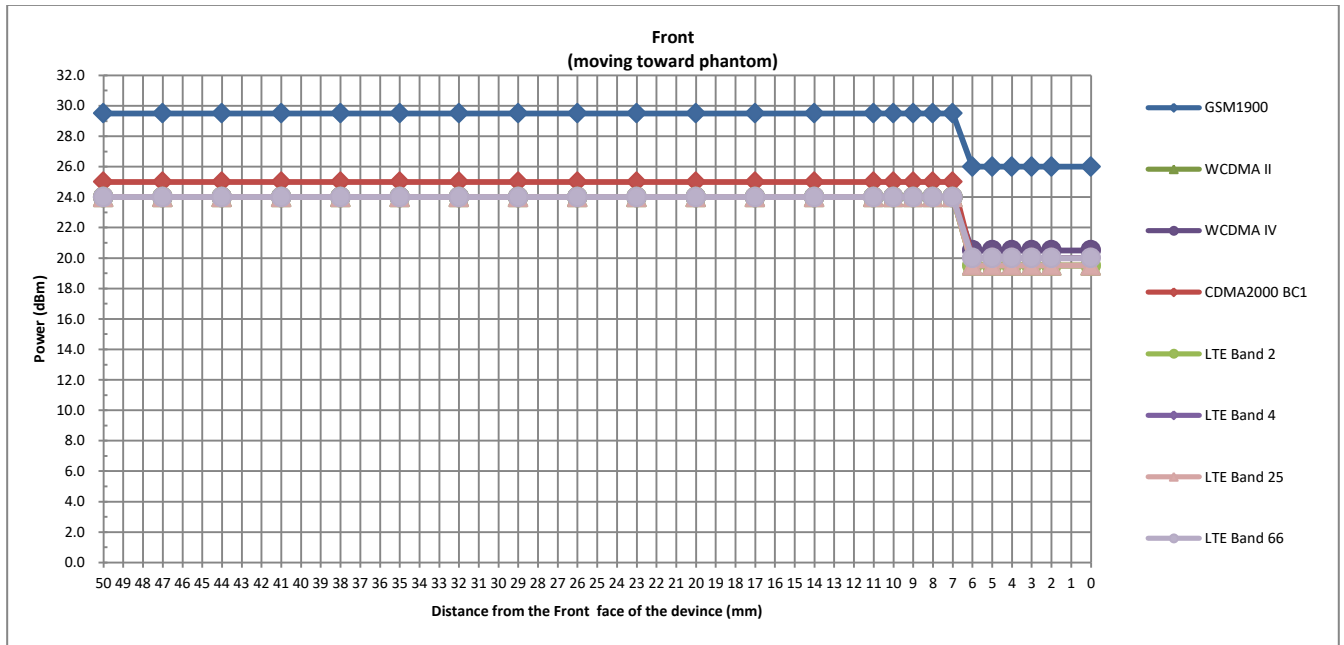

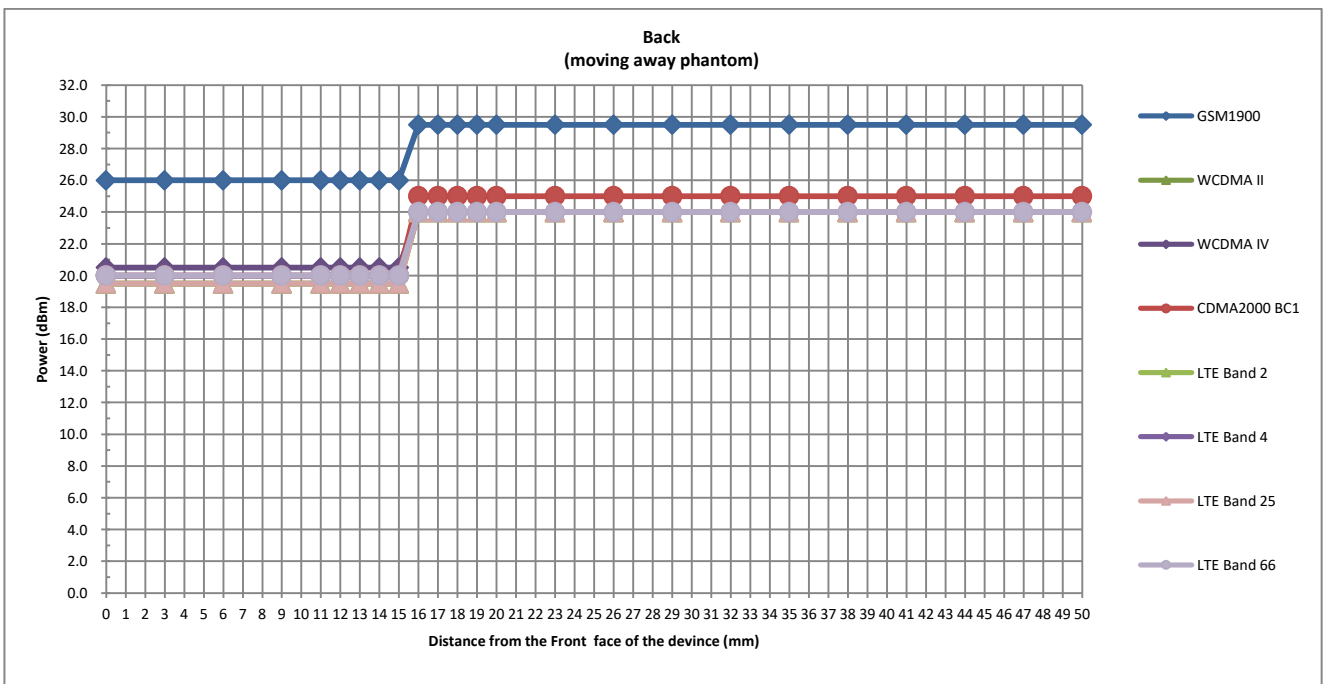
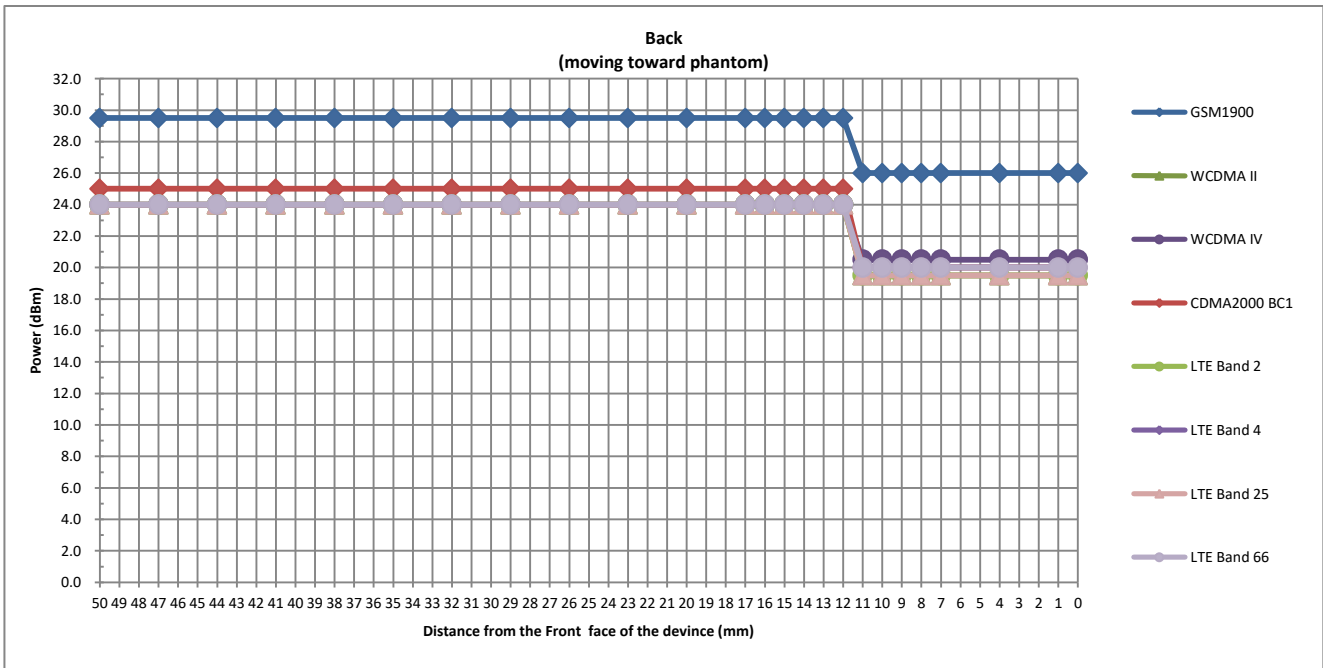


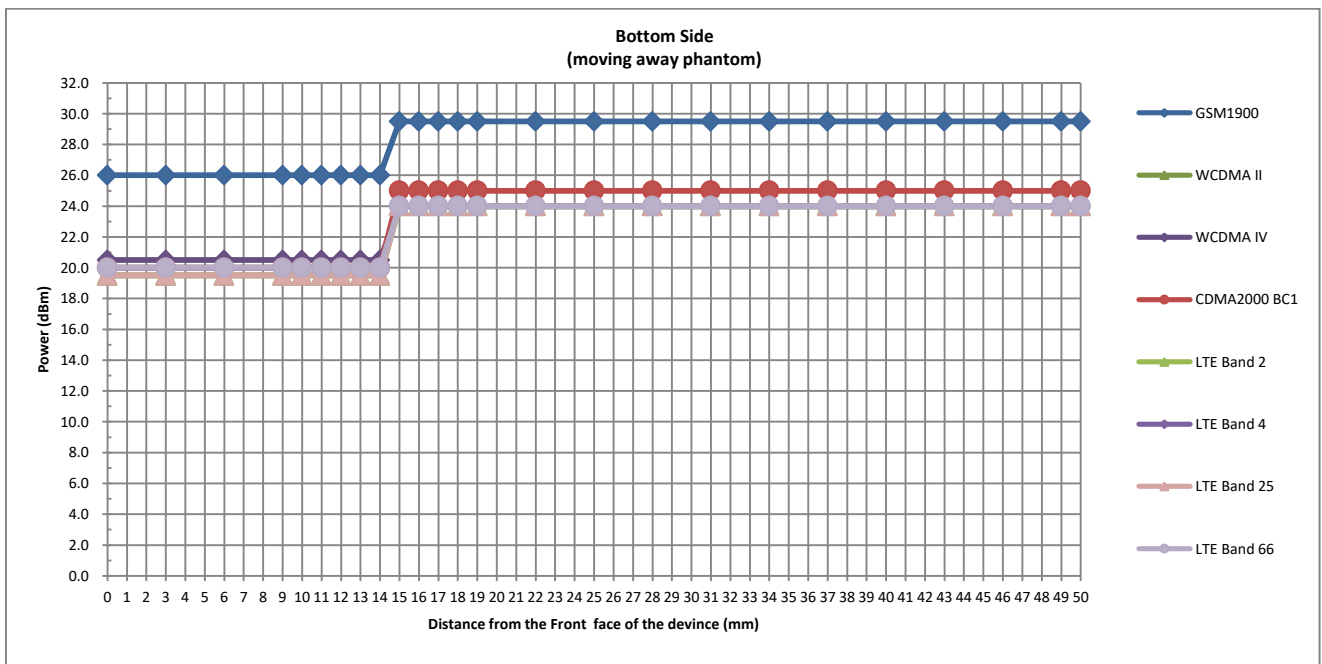
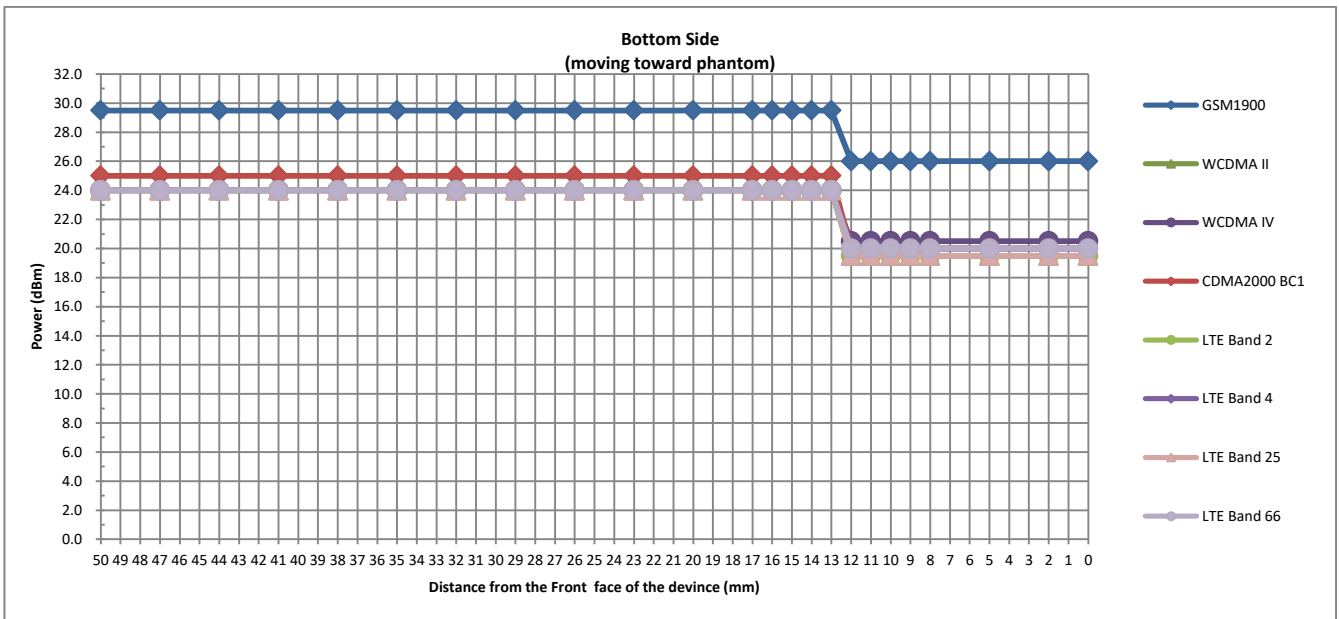






<Handheld for antenna 2>

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	9	9	12	7	12

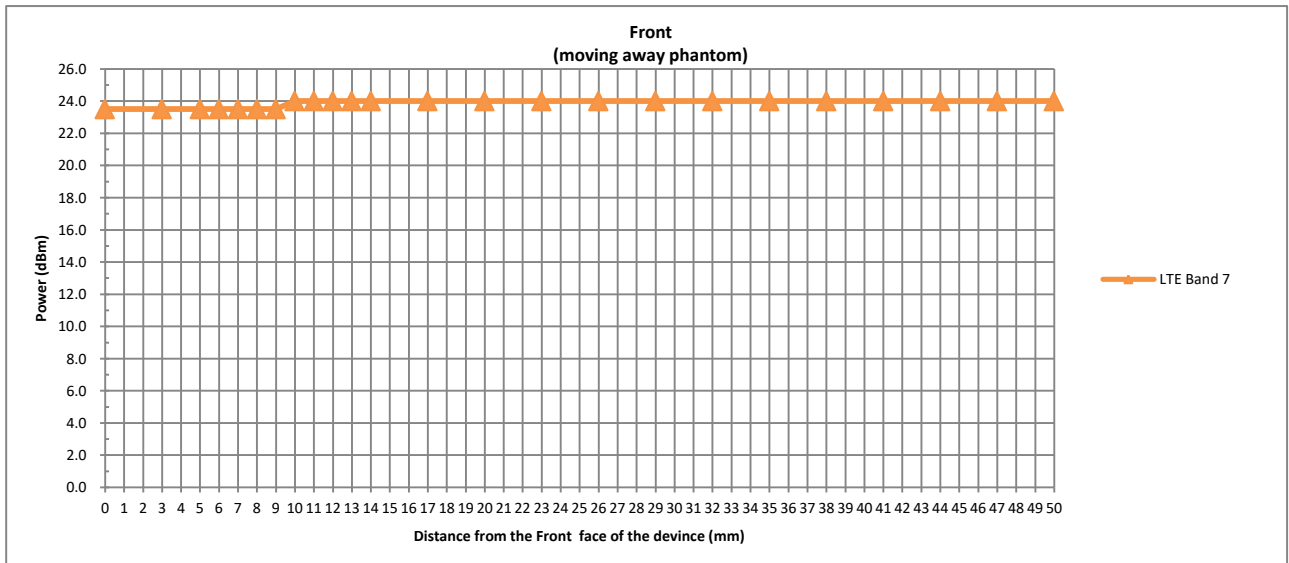
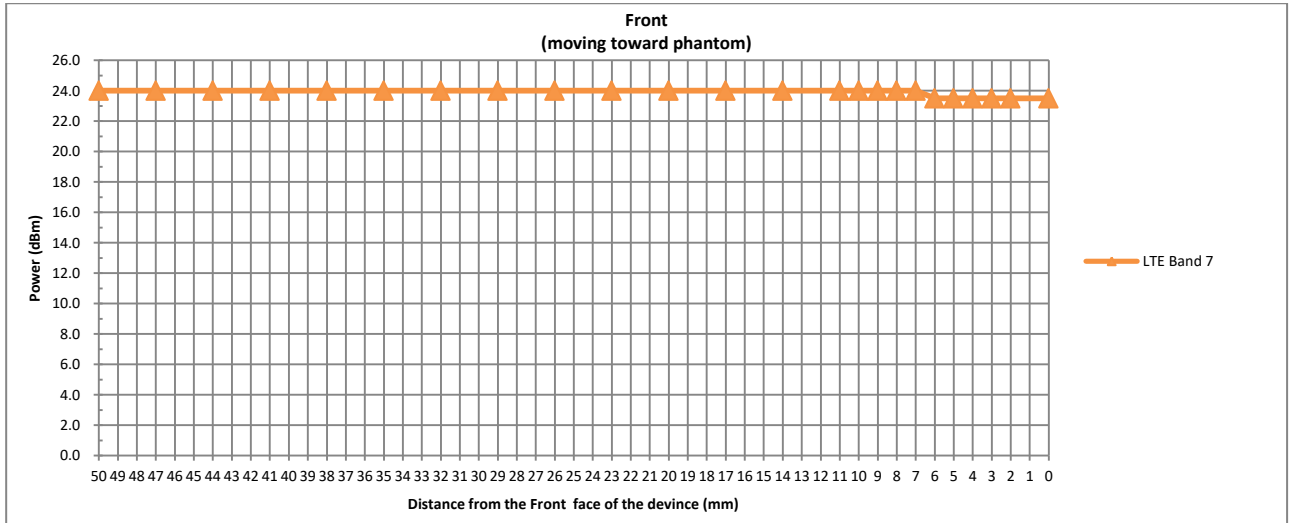


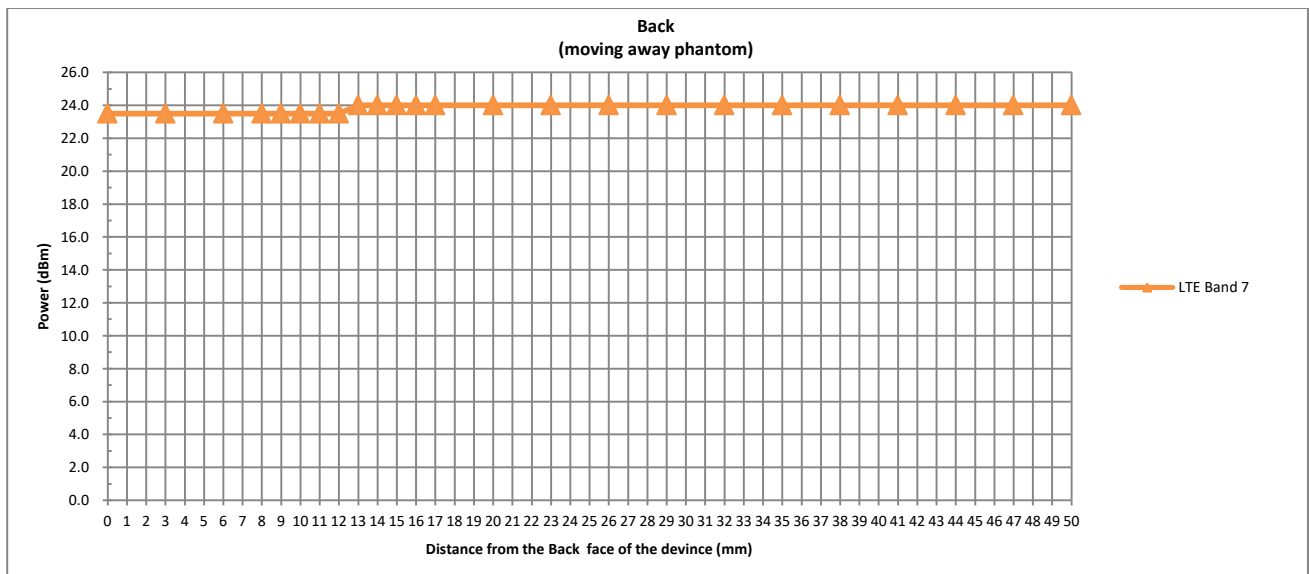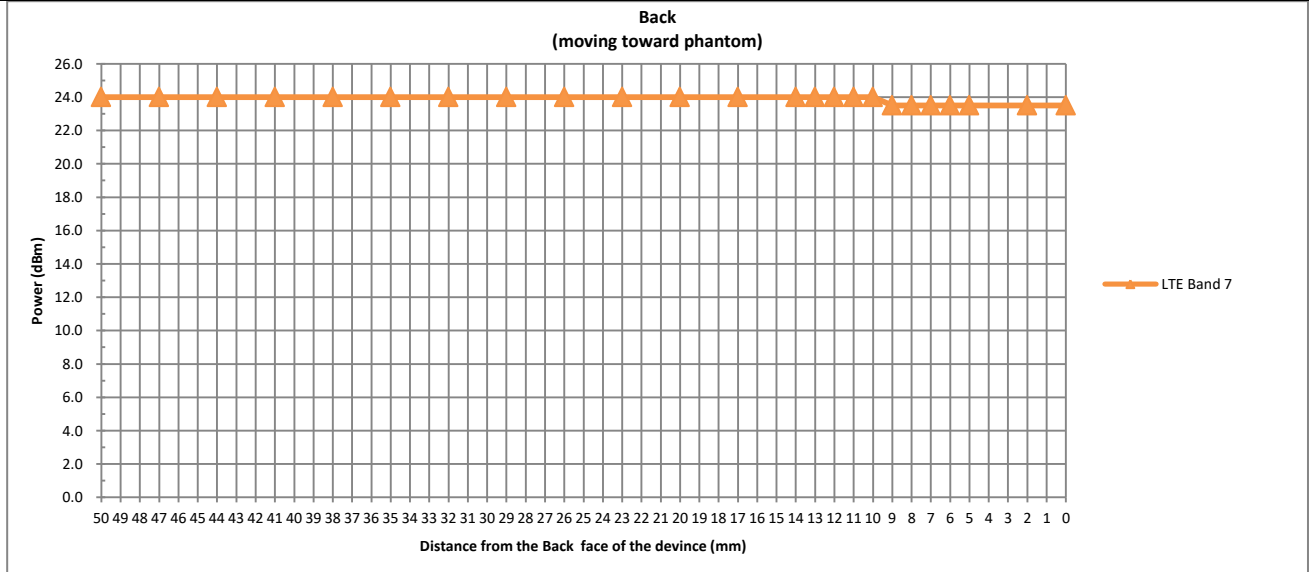

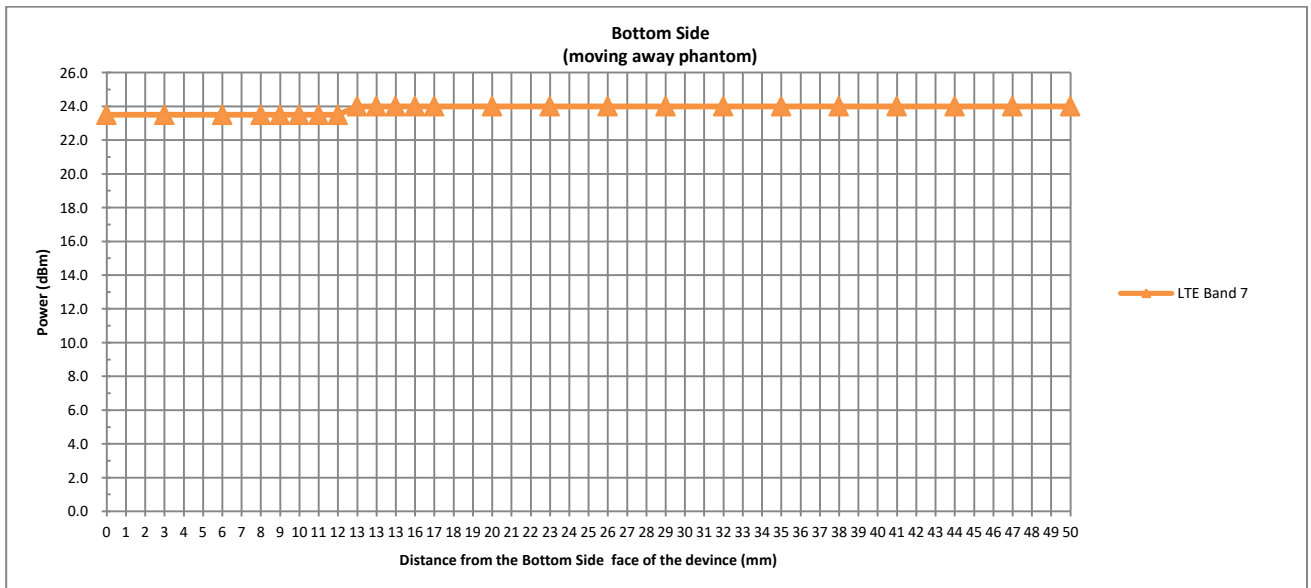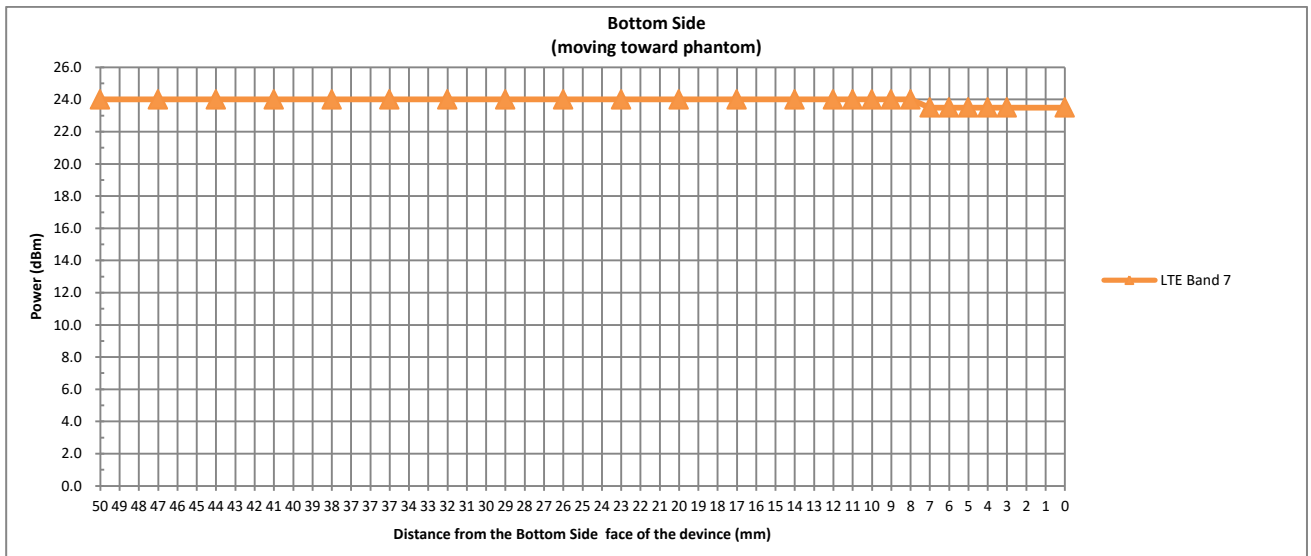

<Handheld for WLAN>

Position	Back	
	Moving towards	Moving away
Minimum	6	8

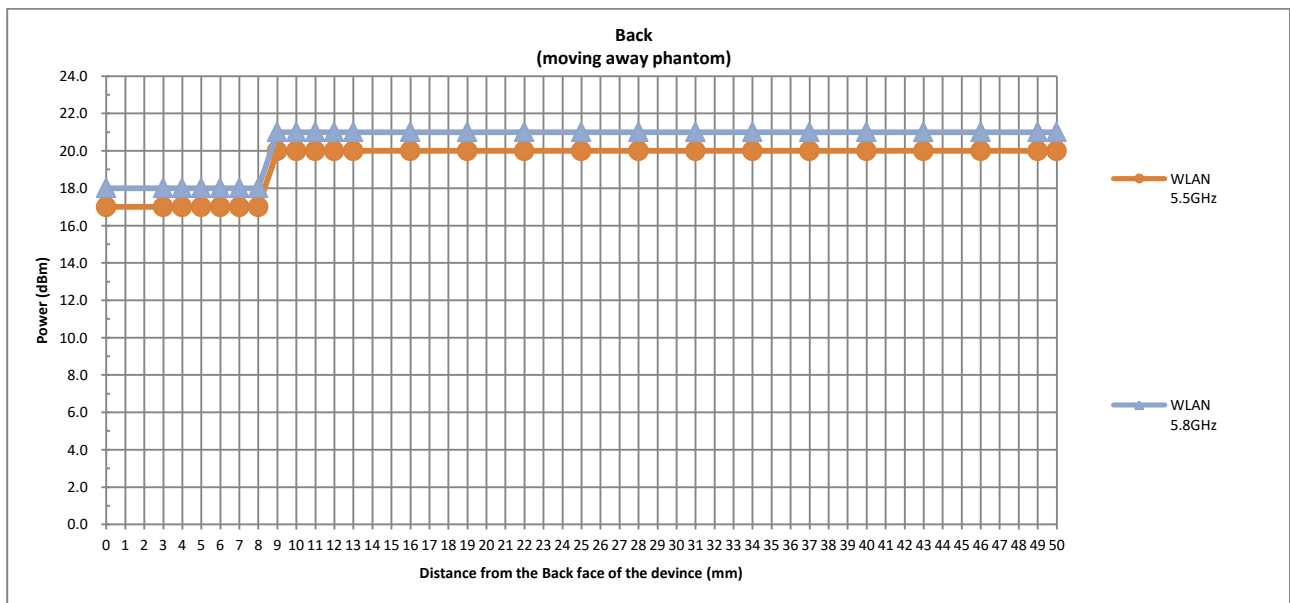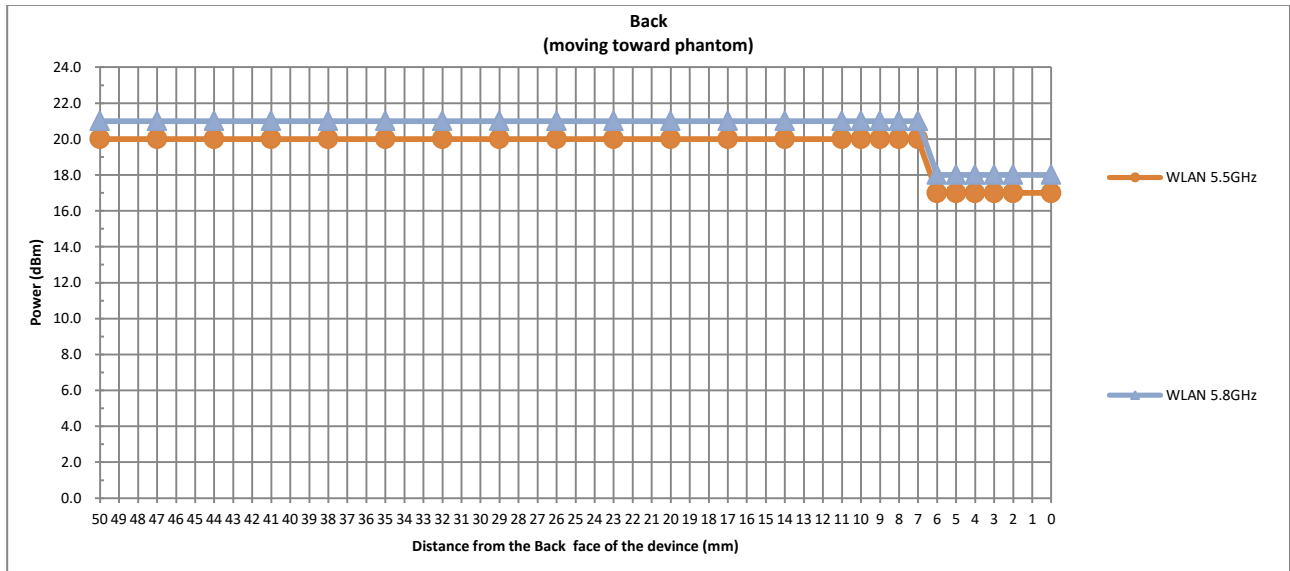

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

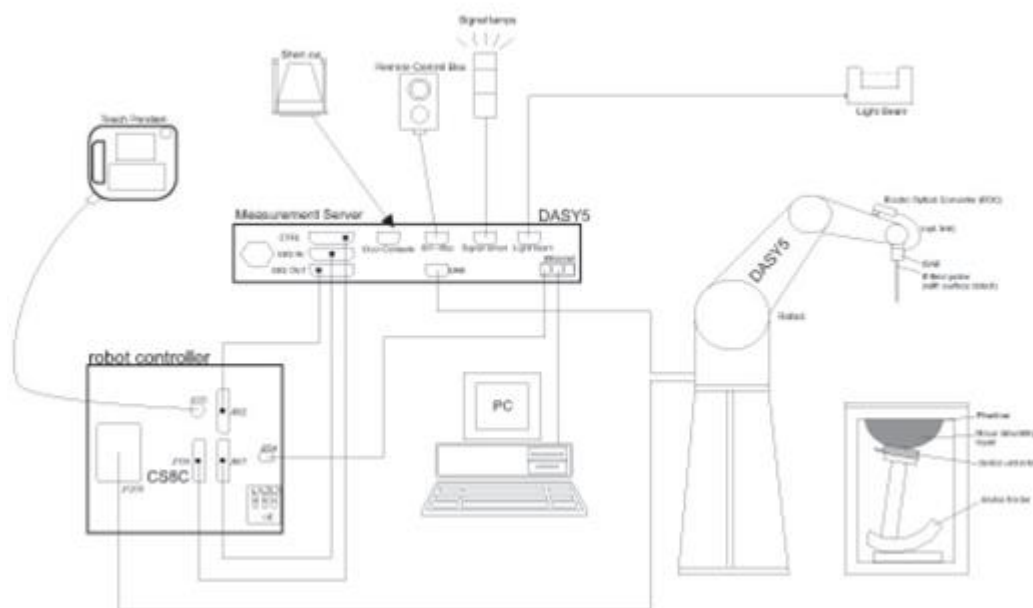


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

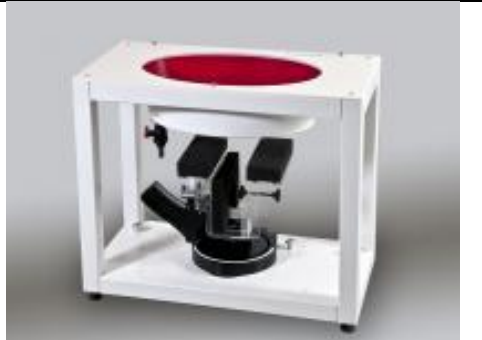Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Dec. 06, 2018	Dec. 05, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 05, 2018	Dec. 04, 2021
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Jul. 30, 2018	Jul. 29, 2021
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 07, 2018	Dec. 06, 2021
SPEAG	2450MHz System Validation Kit	D2450V2	924	Apr. 15, 2019	Apr. 14, 2022
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Dec. 07, 2018	Dec. 06, 2021
SPEAG	5000MHz System Validation Kit	D5GHzV2	1167	Aug. 03, 2018	Aug. 02, 2021
SPEAG	Data Acquisition Electronics	DAE3	528	Mar. 16, 2020	Mar. 15, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7576	Jan. 22, 2020	Jan. 21, 2021
SPEAG	SAM Twin Phantom	SAM V5.0	1795	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300653	Jul. 21, 2020	Jul. 20, 2021
Anritsu	Radio communication analyzer	MT8821C	6201588572	Dec. 26, 2019	Dec. 25, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Jul. 21, 2020	Jul. 20, 2021
Agilent	Network Analyzer	E5071C	MY46523671	Oct. 17, 2019	Oct. 16, 2020
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Oct. 28, 2019	Oct. 27, 2020
Agilent	Signal Generator	N5181A	MY50145381	Dec. 26, 2019	Dec. 25, 2020
Anritsu	Power Sensor	MA2411B	1306099	Jul. 21, 2020	Jul. 20, 2021
Anritsu	Power Meter	ML2495A	1349001	Jul. 21, 2020	Jul. 20, 2021
Anritsu	Power Sensor	MA2411B	1207253	Dec. 26, 2019	Dec. 25, 2020
Anritsu	Power Meter	ML2495A	1218010	Dec. 26, 2019	Dec. 25, 2020
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 26, 2019	Dec. 25, 2020
R&S	Spectrum Analyzer	FSP7	100818	Jul. 21, 2020	Jul. 20, 2021
TES	Hygrometer	1310	200505600	Jul. 30, 2020	Jul. 29, 2021
Anymetre	Thermo-Hygrometer	JR593	2015102801	Dec. 30, 2019	Dec. 29, 2020
AR	Amplifier	5S1G4	0333096		Note
mini-circuits	Amplifier	ZVE-3W-83+	599201528		Note
ARRA	Power Divider	A3200-2	N/A		Note
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A		Note
Agilent	Dual Directional Coupler	778D	50422		Note
MCL	Attenuator 1	BW-S10W5	N/A		Note
Weinschel	Attenuator 2	3M-20	N/A		Note
Zhongjilianhe	Attenuator 3	MVE2214-03	N/A		Note

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

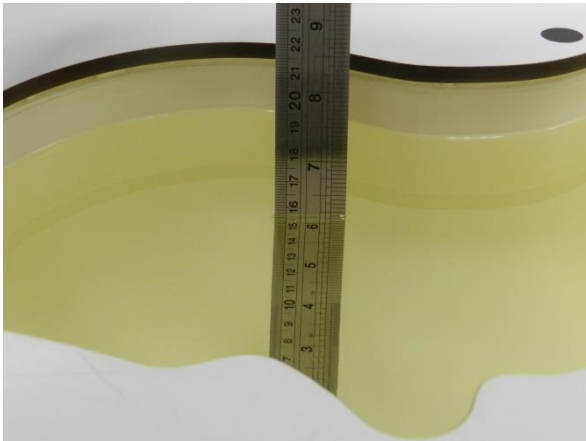


Fig 11.1 Photo of Liquid Height for Head SAR

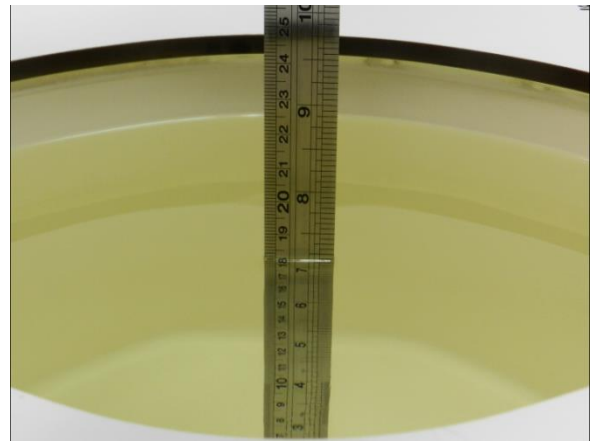


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.5	0.882	40.803	0.89	41.90	-0.90	-2.62	±5	2020/8/20
750	Head	22.4	0.886	41.532	0.89	41.90	-0.45	-0.88	±5	2020/8/30
835	Head	22.6	0.910	42.910	0.90	41.50	1.11	3.40	±5	2020/8/22
835	Head	22.6	0.904	41.212	0.90	41.50	0.44	-0.69	±5	2020/8/29
1750	Head	22.7	1.374	38.860	1.37	40.10	0.29	-3.09	±5	2020/8/17
1750	Head	22.4	1.406	41.525	1.37	40.10	2.63	3.55	±5	2020/9/1
1900	Head	22.5	1.406	39.291	1.40	40.00	0.43	-1.77	±5	2020/8/17
1900	Head	22.7	1.448	39.000	1.40	40.00	3.43	-2.50	±5	2020/9/3
2450	Head	22.7	1.829	40.081	1.80	39.20	1.61	2.25	±5	2020/8/24
2600	Head	22.4	2.050	38.344	1.96	39.00	4.59	-1.68	±5	2020/8/18
2600	Head	22.4	2.053	38.335	1.96	39.00	4.74	-1.71	±5	2020/9/5
5250	Head	22.8	4.748	36.881	4.71	35.95	0.81	2.59	±5	2020/8/26
5250	Head	22.5	4.570	37.646	4.71	35.95	-2.97	4.72	±5	2020/9/8
5250	Head	22.6	4.767	36.978	4.71	35.95	1.21	2.86	±5	2020/9/15
5600	Head	22.8	5.189	36.130	5.07	35.50	2.35	1.77	±5	2020/8/27
5600	Head	22.5	4.923	37.157	5.07	35.50	-2.90	4.67	±5	2020/9/10
5600	Head	22.7	5.211	36.228	5.07	35.50	2.78	2.05	±5	2020/9/16
5750	Head	22.8	5.364	35.845	5.22	35.35	2.76	1.40	±5	2020/8/28
5750	Head	22.4	5.049	36.943	5.22	35.35	-3.28	4.51	±5	2020/9/12

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/8/20	750	Head	250	1099	7576	528	2.11	8.52	8.44	-0.94
2020/8/30	750	Head	250	1099	7576	528	2.12	8.52	8.48	-0.47
2020/8/22	835	Head	250	4d162	7576	528	2.46	9.61	9.84	2.39
2020/8/29	835	Head	250	4d162	7576	528	2.44	9.61	9.76	1.56
2020/8/17	1750	Head	250	1137	7576	528	9.30	36.50	37.2	1.92
2020/9/1	1750	Head	250	1137	7576	528	9.52	36.50	38.08	4.33
2020/8/17	1900	Head	250	5d182	7576	528	10.00	39.60	40	1.01
2020/9/3	1900	Head	250	5d182	7576	528	10.30	39.60	41.2	4.04
2020/8/24	2450	Head	250	924	7576	528	12.90	52.10	51.6	-0.96
2020/8/18	2600	Head	250	1070	7576	528	15.40	58.10	61.6	6.02
2020/9/5	2600	Head	250	1070	7576	528	15.40	58.10	61.6	6.02
2020/8/26	5250	Head	100	1167	7576	528	8.29	77.00	82.9	7.66
2020/9/8	5250	Head	100	1167	7576	528	7.67	77.00	76.7	-0.39
2020/9/15	5250	Head	100	1167	7576	528	8.32	77.00	83.2	8.05
2020/8/27	5600	Head	100	1167	7576	528	8.44	80.80	84.4	4.46
2020/9/10	5600	Head	100	1167	7576	528	8.13	80.80	81.3	0.62
2020/9/16	5600	Head	100	1167	7576	528	8.48	80.80	84.8	4.95
2020/8/28	5750	Head	100	1167	7576	528	8.33	76.90	83.3	8.32
2020/9/12	5750	Head	100	1167	7576	528	7.69	76.90	76.9	0.00

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%) ²
2020/8/20	750	Head	250	1099	7576	528	1.42	5.64	5.68	0.71
2020/8/30	750	Head	250	1099	7576	528	1.43	5.64	5.72	1.42
2020/8/22	835	Head	250	4d162	7576	528	1.62	6.35	6.48	2.05
2020/8/29	835	Head	250	4d162	7576	528	1.61	6.35	6.44	1.42
2020/8/17	1750	Head	250	1137	7576	528	4.98	19.50	19.92	2.15
2020/9/1	1750	Head	250	1137	7576	528	5.10	19.50	20.4	4.62
2020/8/17	1900	Head	250	5d182	7576	528	5.14	20.70	20.56	-0.68
2020/9/3	1900	Head	250	5d182	7576	528	5.29	20.70	21.16	2.22
2020/8/24	2450	Head	250	924	7576	528	5.87	23.90	23.48	-1.76
2020/8/18	2600	Head	250	1070	7576	528	6.68	26.10	26.72	2.38
2020/9/5	2600	Head	250	1070	7576	528	6.69	26.10	26.76	2.53
2020/8/26	5250	Head	100	1167	7576	528	2.34	22.00	23.4	6.36
2020/9/8	5250	Head	100	1167	7576	528	2.10	22.00	21	-4.55
2020/9/15	5250	Head	100	1167	7576	528	2.35	22.00	23.5	6.82
2020/8/27	5600	Head	100	1167	7576	528	2.39	23.20	23.9	3.02
2020/9/10	5600	Head	100	1167	7576	528	2.22	23.20	22.2	-4.31
2020/9/16	5600	Head	100	1167	7576	528	2.40	23.20	24	3.45
2020/8/28	5750	Head	100	1167	7576	528	2.36	21.60	23.6	9.26
2020/9/12	5750	Head	100	1167	7576	528	2.11	21.60	21.1	-2.31

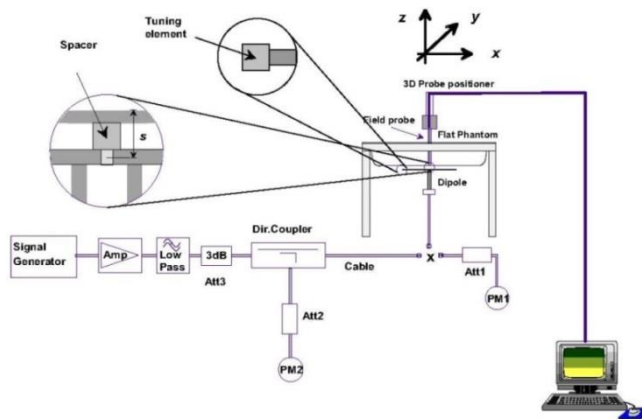


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

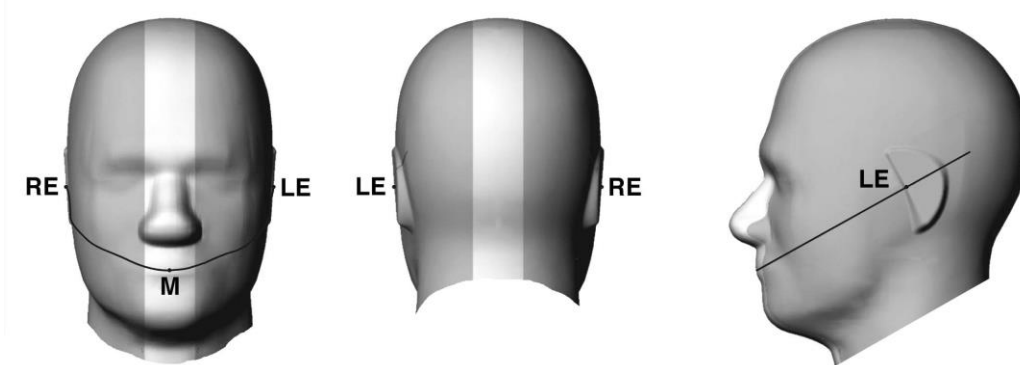


Fig 12.1.1 Front, back, and side views of SAM twin phantom

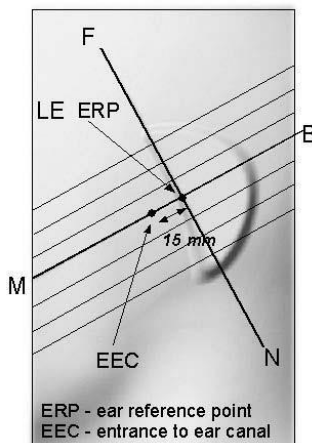


Fig 12.1.2 Close-up side view of phantom showing the ear region.

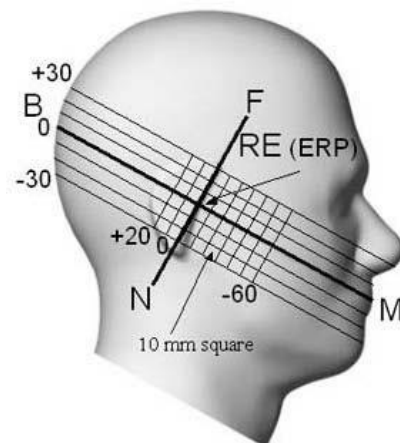


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

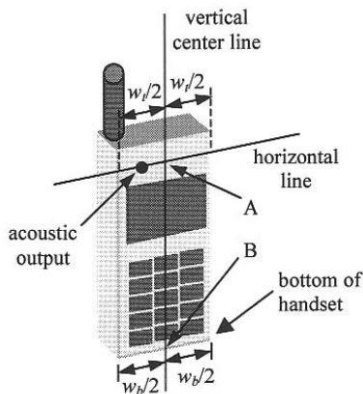


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

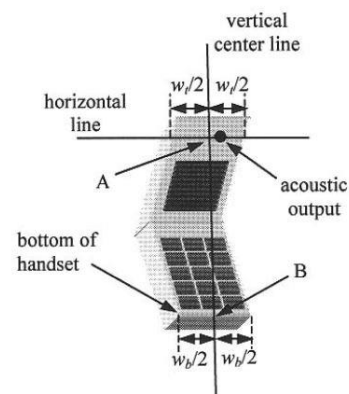


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

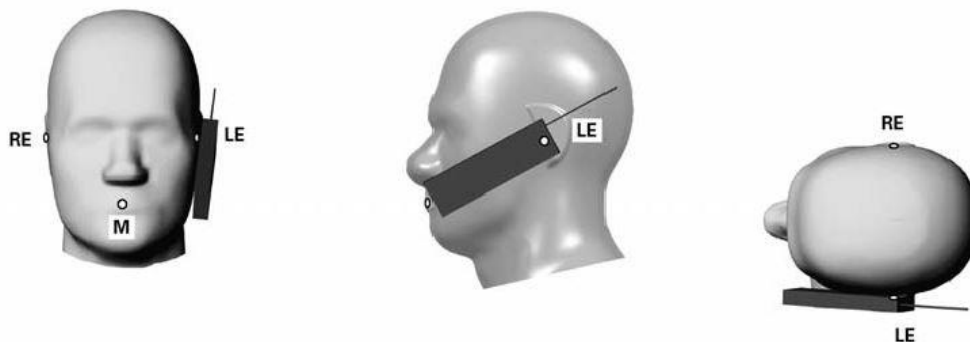


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

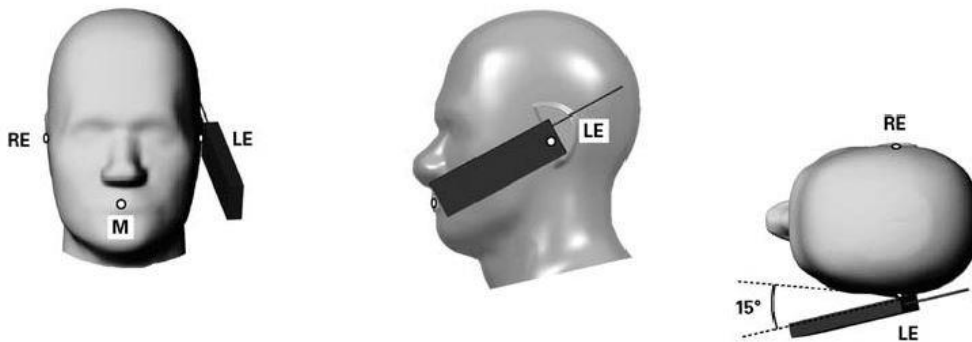


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

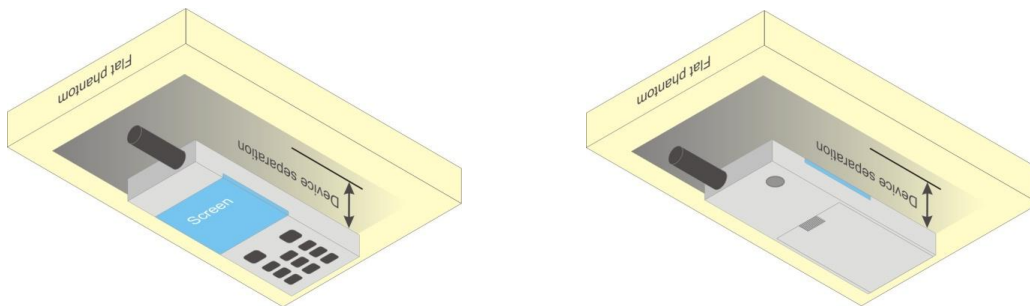


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

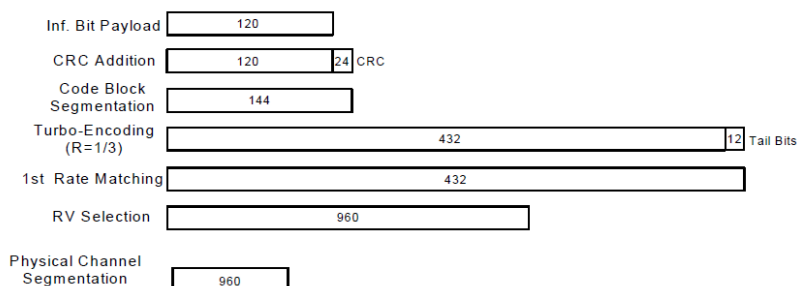


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA/ HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA/ HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA/ HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA/ HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA/ HSPA+

<CDMA2000 Conducted Power>


General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B17 / B2 / B4 / B38 SAR test was covered by B12 / B25 / B66 /B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

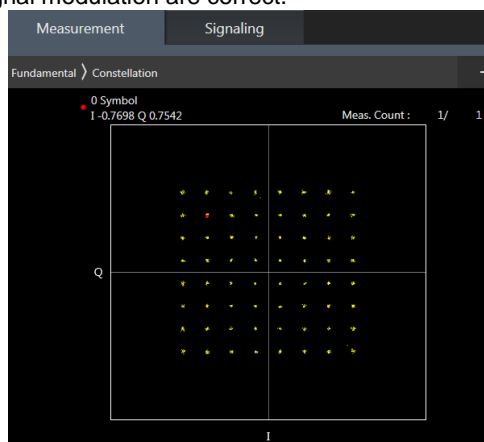

64QAM

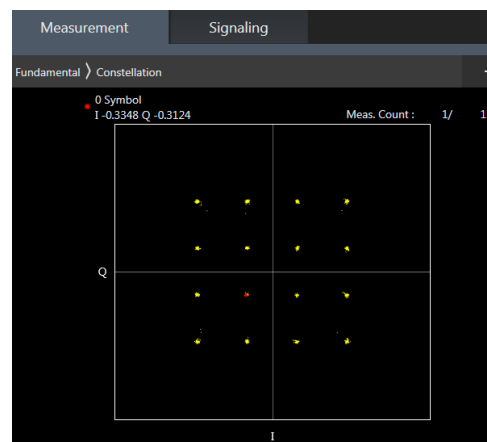

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

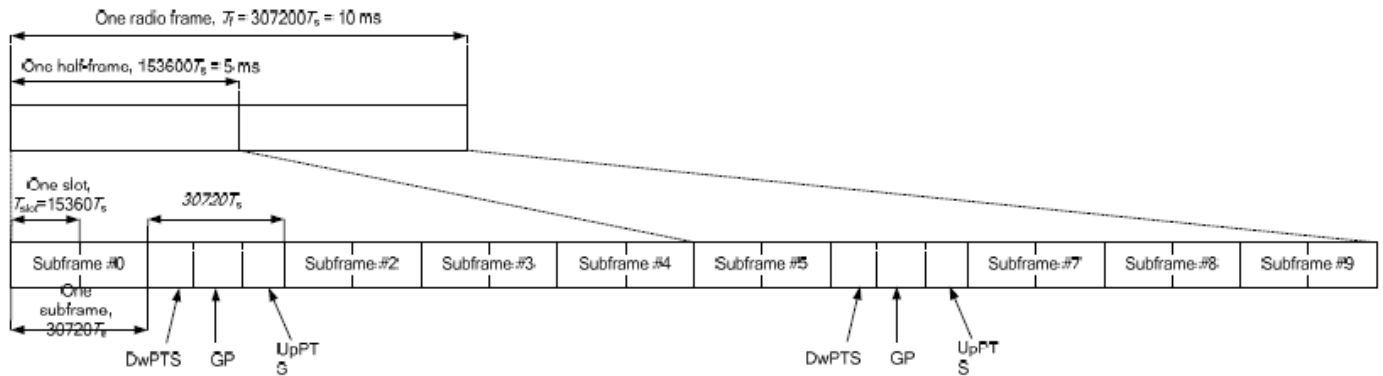


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	-	-	-	-	-
9	$13168 \cdot T_s$	-	-	-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE Band 41 Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

2CC Downlink Carrier Aggregation					3CC Downlink Carrier Aggregation				
Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset
1	CA_2A-2A			3CC-1	1	CA_2A-2A-4A			
2	CA_2A-4A			3CC-1	2	CA_2A-2A-12A			
3	CA_2A-5A			3CC-8	3	CA_2A-2A-14A			
4	CA_2A-7A			3CC-9	4	CA_2A-2A-29A		B29 SCC Only	
5	CA_2A-12A			3CC-10	5	CA_2A-2A-66A			
6	CA_2A-13A				6	CA_2A-2A-71A			
7	CA_2A-14A			3CC-15	7	CA_2A-4A-4A			
8	CA_2A-29A		B29 SCC Only	3CC-11	8	CA_2A-4A-5A			
9	CA_2A-66A			3CC-14	9	CA_2A-4A-7A			
10	CA_2A-71A			3CC-12	10	CA_2A-4A-12A			
11	CA_2C			3CC-20	11	CA_2A-4A-29A		B29 SCC Only	
12	CA_4A-4A			3CC-22	12	CA_2A-4A-71A			
13	CA_4A-5A				13	CA_2A-7A-7A			
14	CA_4A-7A			3CC-24	14	CA_2A-12A-66A			
15	CA_4A-12A			3CC-25	15	CA_2A-14A-66A			
16	CA_4A-13A				16	CA_2A-66A-66A			
17	CA_4A-29A		B29 SCC Only	3CC-22	17	CA_2A-66A-71A			
18	CA_4A-71A			3CC-12	18	CA_2A-5B			
19	CA_5A-5A				19	CA_2A-12B			
20	CA_5A-7A			3CC-25	20	CA_2C-66A			
21	CA_5A-66A				21	CA_4A-4A-12A		B29 SCC Only	
22	CA_5B			3CC-28	22	CA_4A-4A-29A		B29 SCC Only	
23	CA_7A-7A			3CC-24	23	CA_4A-4A-71A			
24	CA_7A-12A			3CC-25	24	CA_4A-7A-7A			
25	CA_7A-66A				25	CA_4A-7A-12A			
26	CA_7B				26	CA_5A-7A-7A			
27	CA_7C			3CC-27	27	CA_5A-7C			
28	CA_12A-66A			3CC-29	28	CA_5B-66A			
29	CA_12B			3CC-19	29	CA_12A-66A-66A			
30	CA_13A-66A				30	CA_12A-66C			
31	CA_14A-66A			3CC-31	31	CA_14A-66A-66A			
32	CA_25A-25A			3CC-32	32	CA_25A-25A_26A			
33	CA_25A-26A			3CC-32	33	CA_25A-41C			
34	CA_25A-41A				34	CA_41A-41C			
35	CA_41A-41A				35	CA_41D			
36	CA_41C			3CC-34	36	CA_66A-66A-71A			
37	CA_66A-66A			3CC-36	37	CA_66C-71A			
38	CA_66A-71A			3CC-36					
39	CA_66B								
40	CA_66C			3CC-37					

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_41C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.



<WLAN Conducted Power>


General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.69 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

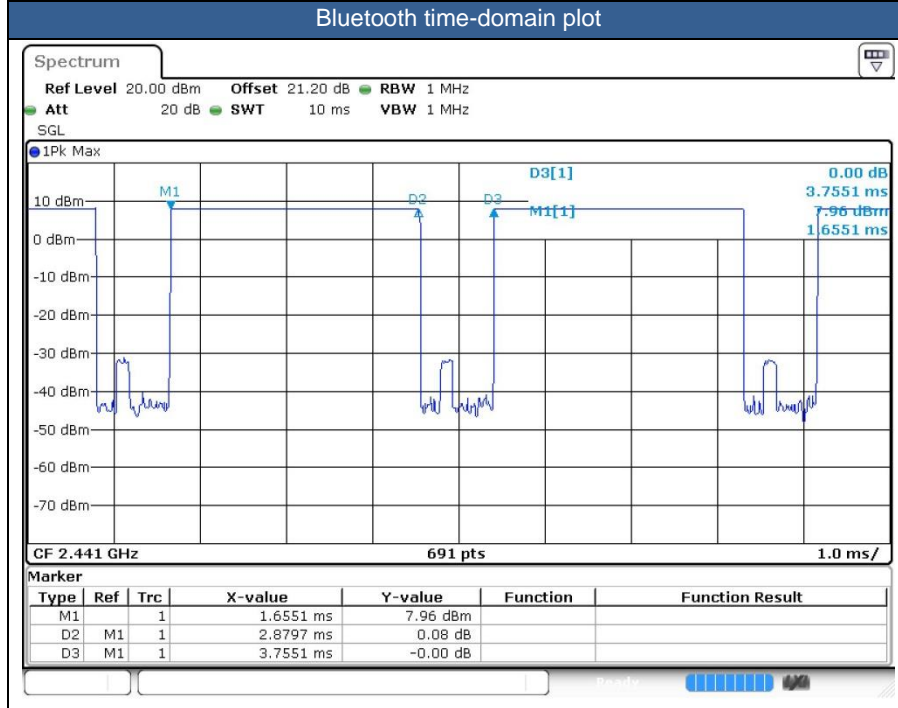



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. When headset SAR is less than or equal than without headset SAR, no need to verify the remaining channels for headset SAR.
5. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity).
6. The device will invoke corresponding work scenarios power level, which are provided in the operational description.
7. For Some WWAN bands, sensor on reduced power level higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
8. When handheld state, when WWAN transmit simultaneous with WLAN/Bluetooth, for WLAN5.2GHz/5.3GHz/5.5GHz /5.8GHz, product specific 10g SAR condition reduced powers will be active.
9. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/IV/V, CDMA2000 BC0/BC1/BC10, and LTE Band 2/4/5/12/13/14/17/25/26/66/71, WWAN antenna 2 frequency band include LTE Band 7/38/41.
10. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2 W/kg of GSM850/1900, WCDMA Band II/IV/V, CDMA BC0/ BC1/ BC10, LTE Band 2/4/5/7/13/14/ 25/26/38/41/66, and WLAN 5.2/5.8GHz therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
11. The following table "n/a" means the measured SAR is too small to find the 1g cube SAR.
12. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:
Front: [13 mm](#)
Back: [23 mm](#)
13. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:
For antenna 1
Front: [5 mm](#)



Back: [10 mm](#)
bottom side: [11 mm](#)

For antenna 2
Front: [5 mm](#)
Back: [8 mm](#)
bottom side: [6 mm](#)

For WLAN
Back: [5 mm](#)

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 2Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is \leq ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA/HSPA+ is \leq ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA/HSPA+ to RMC12.2Kbps and the adjusted SAR is \leq 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA/HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA/HSPA+) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA/HSPA+.

CDMA Note:

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. This device supports HPUE for LTE band 41 with class 2 level, so HPUE SAR has been performed.
7. For LTE B4 / B5 / B12 / B17 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B2 / B4 / B17 / B38 SAR test was covered by LTE B25 / B66 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - c. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Right Cheek	Full Power	128	824.2	31.46	32.00	1.132	0.05	0.421	0.477
	GSM850	GPRS(2 Tx slots)	Right Tilted	Full Power	128	824.2	31.46	32.00	1.132	0.12	0.181	0.205
	GSM850	GPRS(2 Tx slots)	Left Cheek	Full Power	128	824.2	31.46	32.00	1.132	0.06	0.279	0.316
	GSM850	GPRS(2 Tx slots)	Left Tilted	Full Power	128	824.2	31.46	32.00	1.132	-0.03	0.166	0.188
01	GSM850	GPRS(2 Tx slots)	Right Cheek	Full Power	189	836.4	31.28	32.00	1.180	0.11	0.431	0.509
	GSM850	GPRS(2 Tx slots)	Right Cheek	Full Power	251	848.8	31.16	32.00	1.213	0.07	0.331	0.402
	GSM1900	GPRS(2 Tx slots)	Right Cheek	Full Power	661	1880	28.51	29.50	1.256	0.04	0.050	0.063
	GSM1900	GPRS(2 Tx slots)	Right Tilted	Full Power	661	1880	28.51	29.50	1.256	0.11	0.034	0.042
	GSM1900	GPRS(2 Tx slots)	Left Cheek	Full Power	661	1880	28.51	29.50	1.256	-0.05	0.043	0.053
	GSM1900	GPRS(2 Tx slots)	Left Tilted	Full Power	661	1880	28.51	29.50	1.256	0.13	0.043	0.054
02	GSM1900	GPRS(2 Tx slots)	Right Cheek	Full Power	512	1850.2	28.32	29.50	1.312	0.09	0.058	0.076
	GSM1900	GPRS(2 Tx slots)	Right Cheek	Full Power	810	1909.8	28.50	29.50	1.259	0.08	0.046	0.058

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	Full Power	4233	846.6	23.13	24.00	1.222	0.04	0.310	0.379
	WCDMA V	RMC 12.2Kbps	Right Tilted	Full Power	4233	846.6	23.13	24.00	1.222	0.11	0.150	0.183
	WCDMA V	RMC 12.2Kbps	Left Cheek	Full Power	4233	846.6	23.13	24.00	1.222	0.08	0.263	0.321
	WCDMA V	RMC 12.2Kbps	Left Tilted	Full Power	4233	846.6	23.13	24.00	1.222	-0.05	0.149	0.182
	WCDMA V	RMC 12.2Kbps	Right Cheek	Full Power	4132	826.4	22.74	24.00	1.337	-0.12	0.312	0.417
03	WCDMA V	RMC 12.2Kbps	Right Cheek	Full Power	4182	836.4	23.08	24.00	1.236	0.14	0.356	0.440
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full Power	1513	1752.6	22.77	24.00	1.327	0.03	0.144	0.191
	WCDMA IV	RMC 12.2Kbps	Right Tilted	Full Power	1513	1752.6	22.77	24.00	1.327	0.15	0.072	0.095
	WCDMA IV	RMC 12.2Kbps	Left Cheek	Full Power	1513	1752.6	22.77	24.00	1.327	0.09	0.102	0.135
	WCDMA IV	RMC 12.2Kbps	Left Tilted	Full Power	1513	1752.6	22.77	24.00	1.327	0.04	0.099	0.131
	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full Power	1312	1712.4	22.72	24.00	1.343	-0.03	0.100	0.134
	WCDMA IV	RMC 12.2Kbps	Right Cheek	Full Power	1413	1732.6	22.68	24.00	1.355	0.02	0.139	0.188
	WCDMA II	RMC 12.2Kbps	Right Cheek	Full Power	9538	1907.6	23.28	24.00	1.180	-0.1	0.154	0.182
	WCDMA II	RMC 12.2Kbps	Right Tilted	Full Power	9538	1907.6	23.28	24.00	1.180	0.09	0.055	0.065
	WCDMA II	RMC 12.2Kbps	Left Cheek	Full Power	9538	1907.6	23.28	24.00	1.180	0.06	0.139	0.164
	WCDMA II	RMC 12.2Kbps	Left Tilted	Full Power	9538	1907.6	23.28	24.00	1.180	-0.11	0.114	0.135
	WCDMA II	RMC 12.2Kbps	Right Cheek	Full Power	9262	1852.4	23.08	24.00	1.236	0.15	0.143	0.177
05	WCDMA II	RMC 12.2Kbps	Right Cheek	Full Power	9400	1880	23.11	24.00	1.227	0.03	0.163	0.200



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0	RC3+SO55	Right Cheek	Full Power	777	848.31	24.09	25.00	1.233	-0.02	0.336	0.414
	CDMA2000 BC0	RC3+SO55	Right Tilted	Full Power	777	848.31	24.09	25.00	1.233	0.17	0.129	0.159
	CDMA2000 BC0	RC3+SO55	Left Cheek	Full Power	777	848.31	24.09	25.00	1.233	0.18	0.260	0.321
	CDMA2000 BC0	RC3+SO55	Left Tilted	Full Power	777	848.31	24.09	25.00	1.233	0.02	0.129	0.159
	CDMA2000 BC0	RC3+SO55	Right Cheek	Full Power	1013	824.7	23.95	25.00	1.274	0.16	0.318	0.405
06	CDMA2000 BC0	RC3+SO55	Right Cheek	Full Power	384	836.52	24.06	25.00	1.242	0.15	0.351	0.436
	CDMA2000 BC10	RC3+SO55	Right Cheek	Full Power	684	823.1	23.96	25.00	1.271	-0.11	0.311	0.395
	CDMA2000 BC10	RC3+SO55	Right Tilted	Full Power	684	823.1	23.96	25.00	1.271	0.04	0.134	0.170
	CDMA2000 BC10	RC3+SO55	Left Cheek	Full Power	684	823.1	23.96	25.00	1.271	-0.03	0.240	0.305
	CDMA2000 BC10	RC3+SO55	Left Tilted	Full Power	684	823.1	23.96	25.00	1.271	0.12	0.117	0.082
	CDMA2000 BC10	RC3+SO55	Right Cheek	Full Power	476	817.9	23.80	25.00	1.318	0.03	0.272	0.359
07	CDMA2000 BC10	RC3+SO55	Right Cheek	Full Power	580	820.5	23.89	25.00	1.291	-0.02	0.322	0.416
08	CDMA2000 BC1	RC3+SO55	Right Cheek	Full Power	600	1880	24.18	25.00	1.208	0.02	0.150	0.181
	CDMA2000 BC1	RC3+SO55	Right Tilted	Full Power	600	1880	24.18	25.00	1.208	-0.06	0.068	0.082
	CDMA2000 BC1	RC3+SO55	Left Cheek	Full Power	600	1880	24.18	25.00	1.208	0.04	0.128	0.155
	CDMA2000 BC1	RC3+SO55	Left Tilted	Full Power	600	1880	24.18	25.00	1.208	0.13	0.120	0.145
	CDMA2000 BC1	RC3+SO55	Right Cheek	Full Power	25	1851.25	24.04	25.00	1.247	0.02	0.123	0.153
	CDMA2000 BC1	RC3+SO55	Right Cheek	Full Power	1175	1908.75	24.12	25.00	1.225	0.03	0.129	0.158



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 71	20M	QPSK	1	0	Right Cheek	Full Power	133322	683	23.09	24.00	1.233	-0.14	0.195	0.240
	LTE Band 71	20M	QPSK	1	0	Right Tilted	Full Power	133322	683	23.09	24.00	1.233	-0.01	0.084	0.103
	LTE Band 71	20M	QPSK	1	0	Left Cheek	Full Power	133322	683	23.09	24.00	1.233	0.18	0.173	0.213
	LTE Band 71	20M	QPSK	1	0	Left Tilted	Full Power	133322	683	23.09	24.00	1.233	0.01	0.084	0.103
	LTE Band 71	20M	QPSK	50	0	Right Cheek	Full Power	133322	683	22.04	23.00	1.247	0.04	0.152	0.190
	LTE Band 71	20M	QPSK	50	0	Right Tilted	Full Power	133322	683	22.04	23.00	1.247	-0.1	0.065	0.081
	LTE Band 71	20M	QPSK	50	0	Left Cheek	Full Power	133322	683	22.04	23.00	1.247	-0.06	0.134	0.167
	LTE Band 71	20M	QPSK	50	0	Left Tilted	Full Power	133322	683	22.04	23.00	1.247	0.17	0.064	0.080
10	LTE Band 12	10M	QPSK	1	49	Right Cheek	Full Power	23095	707.5	22.81	24.00	1.315	0.17	0.211	0.278
	LTE Band 12	10M	QPSK	1	49	Right Tilted	Full Power	23095	707.5	22.81	24.00	1.315	-0.07	0.092	0.121
	LTE Band 12	10M	QPSK	1	49	Left Cheek	Full Power	23095	707.5	22.81	24.00	1.315	-0.1	0.194	0.255
	LTE Band 12	10M	QPSK	1	49	Left Tilted	Full Power	23095	707.5	22.81	24.00	1.315	-0.08	0.085	0.112
	LTE Band 12	10M	QPSK	25	12	Right Cheek	Full Power	23095	707.5	21.89	23.00	1.291	-0.03	0.095	0.123
	LTE Band 12	10M	QPSK	25	12	Right Tilted	Full Power	23095	707.5	21.89	23.00	1.291	-0.05	0.047	0.061
	LTE Band 12	10M	QPSK	25	12	Left Cheek	Full Power	23095	707.5	21.89	23.00	1.291	0.17	0.080	0.103
	LTE Band 12	10M	QPSK	25	12	Left Tilted	Full Power	23095	707.5	21.89	23.00	1.291	0.18	0.041	0.053
11	LTE Band 13	10M	QPSK	1	25	Right Cheek	Full Power	23230	782	22.60	24.00	1.380	-0.1	0.261	0.360
	LTE Band 13	10M	QPSK	1	25	Right Tilted	Full Power	23230	782	22.60	24.00	1.380	-0.05	0.120	0.166
	LTE Band 13	10M	QPSK	1	25	Left Cheek	Full Power	23230	782	22.60	24.00	1.380	0.14	0.215	0.297
	LTE Band 13	10M	QPSK	1	25	Left Tilted	Full Power	23230	782	22.60	24.00	1.380	0.08	0.118	0.163
	LTE Band 13	10M	QPSK	25	12	Right Cheek	Full Power	23230	782	21.70	23.00	1.349	-0.06	0.119	0.161
	LTE Band 13	10M	QPSK	25	12	Right Tilted	Full Power	23230	782	21.70	23.00	1.349	0.14	0.065	0.088
	LTE Band 13	10M	QPSK	25	12	Left Cheek	Full Power	23230	782	21.70	23.00	1.349	0.03	0.094	0.127
	LTE Band 13	10M	QPSK	25	12	Left Tilted	Full Power	23230	782	21.70	23.00	1.349	0.14	0.060	0.081
12	LTE Band 14	10M	QPSK	1	49	Right Cheek	Full Power	23330	793	22.70	24.00	1.349	-0.16	0.263	0.355
	LTE Band 14	10M	QPSK	1	49	Right Tilted	Full Power	23330	793	22.70	24.00	1.349	-0.05	0.115	0.155
	LTE Band 14	10M	QPSK	1	49	Left Cheek	Full Power	23330	793	22.70	24.00	1.349	-0.06	0.205	0.277
	LTE Band 14	10M	QPSK	1	49	Left Tilted	Full Power	23330	793	22.70	24.00	1.349	0.15	0.101	0.136
	LTE Band 14	10M	QPSK	25	0	Right Cheek	Full Power	23330	793	21.70	23.00	1.349	0.1	0.124	0.167
	LTE Band 14	10M	QPSK	25	0	Right Tilted	Full Power	23330	793	21.70	23.00	1.349	-0.08	0.068	0.092
	LTE Band 14	10M	QPSK	25	0	Left Cheek	Full Power	23330	793	21.70	23.00	1.349	0.04	0.098	0.132
	LTE Band 14	10M	QPSK	25	0	Left Tilted	Full Power	23330	793	21.70	23.00	1.349	0.17	0.060	0.081
13	LTE Band 5	10M	QPSK	1	49	Right Cheek	Full Power	20525	836.5	22.53	24.00	1.403	-0.09	0.315	0.442
	LTE Band 5	10M	QPSK	1	49	Right Tilted	Full Power	20525	836.5	22.53	24.00	1.403	-0.12	0.127	0.178
	LTE Band 5	10M	QPSK	1	49	Left Cheek	Full Power	20525	836.5	22.53	24.00	1.403	-0.06	0.241	0.338
	LTE Band 5	10M	QPSK	1	49	Left Tilted	Full Power	20525	836.5	22.53	24.00	1.403	0.11	0.124	0.174
	LTE Band 5	10M	QPSK	25	25	Right Cheek	Full Power	20525	836.5	21.62	23.00	1.374	0.04	0.151	0.207
	LTE Band 5	10M	QPSK	25	25	Right Tilted	Full Power	20525	836.5	21.62	23.00	1.374	-0.03	0.073	0.100
	LTE Band 5	10M	QPSK	25	25	Left Cheek	Full Power	20525	836.5	21.62	23.00	1.374	0.1	0.100	0.137
	LTE Band 5	10M	QPSK	25	25	Left Tilted	Full Power	20525	836.5	21.62	23.00	1.374	0.16	0.067	0.092
14	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full Power	26965	841.5	22.84	24.00	1.306	0.17	0.351	0.458
	LTE Band 26	15M	QPSK	1	37	Right Tilted	Full Power	26965	841.5	22.84	24.00	1.306	0.1	0.134	0.175
	LTE Band 26	15M	QPSK	1	37	Left Cheek	Full Power	26965	841.5	22.84	24.00	1.306	0.04	0.266	0.347
	LTE Band 26	15M	QPSK	1	37	Left Tilted	Full Power	26965	841.5	22.84	24.00	1.306	0.13	0.123	0.161
	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full Power	26765	821.5	22.66	24.00	1.361	0.03	0.271	0.369
	LTE Band 26	15M	QPSK	1	37	Right Cheek	Full Power	26865	831.5	22.79	24.00	1.321	-0.05	0.313	0.414
	LTE Band 26	15M	QPSK	36	20	Right Cheek	Full Power	26965	841.5	21.91	23.00	1.285	0.04	0.166	0.213
	LTE Band 26	15M	QPSK	36	20	Right Tilted	Full Power	26965	841.5	21.91	23.00	1.285	0.06	0.071	0.091
	LTE Band 26	15M	QPSK	36	20	Left Cheek	Full Power	26965	841.5	21.91	23.00	1.285	0.09	0.112	0.144
	LTE Band 26	15M	QPSK	36	20	Left Tilted	Full Power	26965	841.5	21.91	23.00	1.285	-0.02	0.064	0.082



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
15	LTE Band 66	20M	QPSK	1	99	Right Cheek	Full Power	132572	1770	22.41	24.00	1.442	0.13	0.102	0.147
	LTE Band 66	20M	QPSK	1	99	Right Tilted	Full Power	132572	1770	22.41	24.00	1.442	-0.12	0.053	0.076
	LTE Band 66	20M	QPSK	1	99	Left Cheek	Full Power	132572	1770	22.41	24.00	1.442	0.16	0.086	0.124
	LTE Band 66	20M	QPSK	1	99	Left Tilted	Full Power	132572	1770	22.41	24.00	1.442	0.18	0.066	0.094
	LTE Band 66	20M	QPSK	1	99	Right Cheek	Full Power	132072	1720	22.18	24.00	1.521	0.02	0.042	0.064
	LTE Band 66	20M	QPSK	1	99	Right Cheek	Full Power	132322	1745	22.12	24.00	1.542	0.1	0.035	0.055
	LTE Band 66	20M	QPSK	50	50	Right Cheek	Full Power	132572	1770	21.65	23.00	1.365	0.14	0.056	0.077
	LTE Band 66	20M	QPSK	50	50	Right Tilted	Full Power	132572	1770	21.65	23.00	1.365	0.06	0.034	0.046
	LTE Band 66	20M	QPSK	50	50	Left Cheek	Full Power	132572	1770	21.65	23.00	1.365	0.17	0.054	0.074
	LTE Band 66	20M	QPSK	50	50	Left Tilted	Full Power	132572	1770	21.65	23.00	1.365	0.18	0.046	0.063
16	LTE Band 25	20M	QPSK	1	49	Right Cheek	Full Power	26340	1880	22.84	24.00	1.306	0.05	0.123	0.161
	LTE Band 25	20M	QPSK	1	49	Right Tilted	Full Power	26340	1880	22.84	24.00	1.306	0.15	0.067	0.088
	LTE Band 25	20M	QPSK	1	49	Left Cheek	Full Power	26340	1880	22.84	24.00	1.306	0.1	0.122	0.159
	LTE Band 25	20M	QPSK	1	49	Left Tilted	Full Power	26340	1880	22.84	24.00	1.306	-0.11	0.119	0.155
	LTE Band 25	20M	QPSK	1	49	Right Cheek	Full Power	26140	1860	22.67	24.00	1.358	-0.05	0.117	0.159
	LTE Band 25	20M	QPSK	1	49	Right Cheek	Full Power	26590	1905	22.75	24.00	1.334	-0.03	0.120	0.160
	LTE Band 25	20M	QPSK	50	0	Right Cheek	Full Power	26340	1880	21.86	23.00	1.300	0.07	0.080	0.104
	LTE Band 25	20M	QPSK	50	0	Right Tilted	Full Power	26340	1880	21.86	23.00	1.300	-0.01	0.045	0.059
	LTE Band 25	20M	QPSK	50	0	Left Cheek	Full Power	26340	1880	21.86	23.00	1.300	0.02	0.074	0.096
	LTE Band 25	20M	QPSK	50	0	Left Tilted	Full Power	26340	1880	21.86	23.00	1.300	-0.08	0.072	0.093
	LTE Band 7	20M	QPSK	1	99	Right Cheek	Full Power	21350	2560	22.90	24.00	1.288	0.01	0.251	0.323
	LTE Band 7	20M	QPSK	1	99	Right Tilted	Full Power	21350	2560	22.90	24.00	1.288	0.04	0.243	0.313
	LTE Band 7	20M	QPSK	1	99	Left Cheek	Full Power	21350	2560	22.90	24.00	1.288	-0.03	0.330	0.425
	LTE Band 7	20M	QPSK	1	99	Left Tilted	Full Power	21350	2560	22.90	24.00	1.288	0.14	0.122	0.157
17	LTE Band 7	20M	QPSK	1	99	Left Cheek	Full Power	20850	2510	22.54	24.00	1.400	0.11	0.353	0.494
	LTE Band 7	20M	QPSK	1	99	Left Cheek	Full Power	21100	2535	22.83	24.00	1.309	-0.09	0.336	0.440
	LTE Band 7	20M	QPSK	50	24	Right Cheek	Full Power	21350	2560	21.86	23.00	1.300	-0.12	0.195	0.254
	LTE Band 7	20M	QPSK	50	24	Right Tilted	Full Power	21350	2560	21.86	23.00	1.300	0.09	0.187	0.243
	LTE Band 7	20M	QPSK	50	24	Left Cheek	Full Power	21350	2560	21.86	23.00	1.300	0.16	0.261	0.339
	LTE Band 7	20M	QPSK	50	24	Left Tilted	Full Power	21350	2560	21.86	23.00	1.300	0.01	0.093	0.121



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Full Power	41490	2680	24.02	25.00	1.253	62.9	1.006	0.01	0.145	0.183
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Full Power	41490	2680	24.02	25.00	1.253	62.9	1.006	0.03	0.179	0.226
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full Power	41490	2680	24.02	25.00	1.253	62.9	1.006	-0.07	0.207	0.261
	LTE Band 41	20M	QPSK	1	0	Left Tilted	Full Power	41490	2680	24.02	25.00	1.253	62.9	1.006	0.07	0.097	0.122
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full Power	39750	2506	23.54	25.00	1.400	62.9	1.006	0.18	0.223	0.314
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full Power	40185	2549.5	23.73	25.00	1.340	62.9	1.006	0.13	0.211	0.284
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full Power	40620	2593	23.65	25.00	1.365	62.9	1.006	-0.12	0.207	0.284
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full Power	41055	2636.5	23.75	25.00	1.334	62.9	1.006	0.13	0.219	0.294
	LTE Band 41C	20M	QPSK	1	0	Left Cheek	Full Power	41490(PCC)+41292(SCC)	2680(PCC)+2660.2(SCC)	23.99	25.00	1.262	62.9	1.006	0.05	0.201	0.255
	LTE Band 41C	20M	QPSK	1	0	Left Cheek	Full Power	39750(PCC)+39948(SCC)	2506(PCC)+2525.8(SCC)	23.63	25.00	1.371	62.9	1.006	0.11	0.216	0.298
	LTE Band 41C	20M	QPSK	1	0	Left Cheek	Full Power	40185(PCC)+39987(SCC)	2549.5(PCC)+2529.7(SCC)	23.81	25.00	1.315	62.9	1.006	-0.06	0.206	0.273
	LTE Band 41C	20M	QPSK	1	0	Left Cheek	Full Power	40620(PCC)+40422(SCC)	2593(PCC)+2573.2(SCC)	23.82	25.00	1.312	62.9	1.006	0.05	0.208	0.275
	LTE Band 41C	20M	QPSK	1	0	Left Cheek	Full Power	41055(PCC)+40857(SCC)	2636.5(PCC)+2616.7(SCC)	23.97	25.00	1.268	62.9	1.006	0.14	0.230	0.293
	LTE Band 41	20M	QPSK	50	24	Right Cheek	Full Power	41490	2680	21.51	23.00	1.409	62.9	1.006	-0.09	0.062	0.088
	LTE Band 41	20M	QPSK	50	24	Right Tilted	Full Power	41490	2680	21.51	23.00	1.409	62.9	1.006	0.05	0.076	0.108
	LTE Band 41	20M	QPSK	50	24	Left Cheek	Full Power	41490	2680	21.51	23.00	1.409	62.9	1.006	-0.08	0.114	0.162
	LTE Band 41	20M	QPSK	50	24	Left Tilted	Full Power	41490	2680	21.51	23.00	1.409	62.9	1.006	0.16	0.032	0.045
	LTE Band 41-HPUE	20M	QPSK	1	0	Right Cheek	Full Power	41490	2680	25.89	27.00	1.291	42.9	1.009	-0.1	0.154	0.201
	LTE Band 41-HPUE	20M	QPSK	1	0	Right Tilted	Full Power	41490	2680	25.89	27.00	1.291	42.9	1.009	-0.02	0.190	0.248
	LTE Band 41-HPUE	20M	QPSK	1	0	Left Cheek	Full Power	41490	2680	25.89	27.00	1.291	42.9	1.009	0.02	0.251	0.327
	LTE Band 41-HPUE	20M	QPSK	1	0	Left Tilted	Full Power	41490	2680	25.89	27.00	1.291	42.9	1.009	0.11	0.108	0.141
18	LTE Band 41-HPUE	20M	QPSK	1	0	Left Cheek	Full Power	39750	2506	25.40	27.00	1.445	42.9	1.009	0.08	0.305	0.445
	LTE Band 41-HPUE	20M	QPSK	1	0	Left Cheek	Full Power	40185	2549.5	25.64	27.00	1.368	42.9	1.009	0.1	0.289	0.399
	LTE Band 41-HPUE	20M	QPSK	1	0	Left Cheek	Full Power	40620	2593	25.58	27.00	1.387	42.9	1.009	-0.06	0.281	0.393
	LTE Band 41-HPUE	20M	QPSK	1	0	Left Cheek	Full Power	41055	2636.5	25.60	27.00	1.380	42.9	1.009	0.05	0.243	0.338
	LTE Band 41-HPUE	20M	QPSK	50	24	Right Cheek	Full Power	41490	2680	24.43	26.00	1.435	42.9	1.009	0.04	0.089	0.129
	LTE Band 41-HPUE	20M	QPSK	50	24	Right Tilted	Full Power	41490	2680	24.43	26.00	1.435	42.9	1.009	0.05	0.102	0.148
	LTE Band 41-HPUE	20M	QPSK	50	24	Left Cheek	Full Power	41490	2680	24.43	26.00	1.435	42.9	1.009	0.18	0.143	0.207
	LTE Band 41-HPUE	20M	QPSK	50	24	Left Tilted	Full Power	41490	2680	24.43	26.00	1.435	42.9	1.009	-0.03	0.059	0.085



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Right Cheek	Full Power	0	2402	8.60	9.00	1.096	76.69	1.086	0.08	0.050	0.059
	Bluetooth	DH5 1Mbps	Right Tilted	Full Power	0	2402	8.60	9.00	1.096	76.69	1.086	0.04	0.050	0.060
	Bluetooth	DH5 1Mbps	Left Cheek	Full Power	0	2402	8.60	9.00	1.096	76.69	1.086	0.04	0.112	0.133
	Bluetooth	DH5 1Mbps	Left Tilted	Full Power	0	2402	8.60	9.00	1.096	76.69	1.086	-0.11	0.091	0.109
	Bluetooth	DH5 1Mbps	Left Cheek	Full Power	39	2441	8.00	9.00	1.259	76.69	1.086	0.03	0.106	0.145
19	Bluetooth	DH5 1Mbps	Left Cheek	Full Power	78	2480	7.40	9.00	1.445	76.69	1.086	0.08	0.101	0.159

<WLAN2.4G SAR>

Plot No.	Band	Mode	TeSt PoSition	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	0.02	0.468	0.530
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	0.01	0.485	0.550
20	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	-0.03	0.964	1.092
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	0.12	0.884	1.002
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	1	2412	19.50	20.50	1.259	99.02	1.010	0.11	0.857	1.090
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	6	2437	19.60	20.50	1.230	99.02	1.010	-0.02	0.876	1.088
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	1	2412	19.50	20.50	1.259	99.02	1.010	0.05	0.782	0.994
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	6	2437	19.60	20.50	1.230	99.02	1.010	0.02	0.789	0.980

<WLAN5G SAR>

Plot No.	Band	Mode	TeSt PoSition	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	Full Power	62	5310	17.88	19.50	1.452	95.15	1.051	0.02	0.038	0.058
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	Full Power	62	5310	17.88	19.50	1.452	95.15	1.051	0.01	0.051	0.078
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	Full Power	62	5310	17.88	19.50	1.452	95.15	1.051	0.05	0.058	0.089
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	Full Power	62	5310	17.88	19.50	1.452	95.15	1.051	0.06	0.061	0.093
21	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	Full Power	54	5270	17.80	19.50	1.479	95.15	1.051	-0.04	0.062	0.096
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Cheek	Full Power	134	5670	18.44	20.00	1.432	95.15	1.051	-	n/a	n/a
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Tilted	Full Power	134	5670	18.44	20.00	1.432	95.15	1.051	0.05	0.029	0.044
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	Full Power	134	5670	18.44	20.00	1.432	95.15	1.051	0.03	0.033	0.050
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	Full Power	134	5670	18.44	20.00	1.432	95.15	1.051	-0.12	0.035	0.053
22	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	Full Power	102	5510	18.25	20.00	1.496	95.15	1.051	0.06	0.054	0.084
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	Full Power	110	5550	18.30	20.00	1.479	95.15	1.051	0.07	0.051	0.079
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	Full Power	165	5825	19.39	21.00	1.449	98.13	1.019	-	n/a	n/a
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Full Power	165	5825	19.39	21.00	1.449	98.13	1.019	0.03	0.025	0.037
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	Full Power	165	5825	19.39	21.00	1.449	98.13	1.019	0.05	0.012	0.018
23	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Full Power	165	5825	19.39	21.00	1.449	98.13	1.019	-0.09	0.026	0.039
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Full Power	149	5745	18.97	20.50	1.422	98.13	1.019	-0.05	0.021	0.030
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Full Power	157	5785	19.20	21.00	1.514	98.13	1.019	0.06	0.024	0.037



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Front	5mm	Reduced	128	824.2	30.18	31.00	1.208	0.05	0.794	0.959
	GSM850	GPRS(2 Tx slots)	Front	5mm	Reduced	189	836.4	30.17	31.00	1.211	-0.03	0.790	0.956
	GSM850	GPRS(2 Tx slots)	Front	5mm	Reduced	251	848.8	30.06	31.00	1.242	0.12	0.482	0.598
24	GSM850	GPRS(2 Tx slots)	Back	5mm	Reduced	128	824.2	30.18	31.00	1.208	0.08	1.080	1.304
	GSM850	GPRS(2 Tx slots)	Back	5mm	Reduced	189	836.4	30.17	31.00	1.211	-0.11	1.060	1.283
	GSM850	GPRS(2 Tx slots)	Back	5mm	Reduced	251	848.8	30.06	31.00	1.242	-0.05	0.688	0.854
	GSM850	GPRS(2 Tx slots)	Left Side	5mm	Reduced	128	824.2	30.18	31.00	1.208	0.06	0.224	0.271
	GSM850	GPRS(2 Tx slots)	Right Side	5mm	Reduced	128	824.2	30.18	31.00	1.208	0.07	0.406	0.490
	GSM850	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	128	824.2	30.18	31.00	1.208	-0.06	0.870	1.051
	GSM850	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	189	836.4	30.17	31.00	1.211	0.11	0.759	0.919
	GSM850	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	251	848.8	30.06	31.00	1.242	0.05	0.551	0.684
	GSM1900	GPRS(2 Tx slots)	Front	5mm	Reduced	661	1880	21.73	22.50	1.194	0.03	0.634	0.757
	GSM1900	GPRS(2 Tx slots)	Back	5mm	Reduced	661	1880	21.73	22.50	1.194	-0.08	1.160	1.385
	GSM1900	GPRS(2 Tx slots)	Back	5mm	Reduced	512	1850.2	21.64	22.50	1.219	0.01	1.110	1.353
25	GSM1900	GPRS(2 Tx slots)	Back	5mm	Reduced	810	1909.8	21.71	22.50	1.199	0.05	1.200	1.439
	GSM1900	GPRS(2 Tx slots)	Left Side	5mm	Reduced	661	1880	19.40	20.50	1.288	-0.01	0.032	0.041
	GSM1900	GPRS(2 Tx slots)	Right Side	5mm	Reduced	661	1880	19.40	20.50	1.288	0.12	0.021	0.027
	GSM1900	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	661	1880	19.40	20.50	1.288	-0.08	0.993	1.279
	GSM1900	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	512	1850.2	19.38	20.50	1.294	-0.09	0.932	1.206
	GSM1900	GPRS(2 Tx slots)	Bottom Side	5mm	Reduced	810	1909.8	19.20	20.50	1.349	-0.06	0.974	1.314



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4233	846.6	21.90	23.00	1.288	0.01	0.631	0.813
	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4132	826.4	21.85	23.00	1.303	0.11	0.661	0.861
	WCDMA V	RMC 12.2Kbps	Front	5mm	Reduced	4182	836.4	21.87	23.00	1.297	0.03	0.635	0.824
26	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4233	846.6	21.90	23.00	1.288	0.04	1.090	1.404
	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4132	826.4	21.85	23.00	1.303	0.14	1.070	1.394
	WCDMA V	RMC 12.2Kbps	Back	5mm	Reduced	4182	836.4	21.87	23.00	1.297	-0.07	1.020	1.323
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	Reduced	4233	846.6	21.90	23.00	1.288	-0.05	0.184	0.237
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	Reduced	4233	846.6	21.90	23.00	1.288	-0.11	0.344	0.443
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4233	846.6	21.90	23.00	1.288	-0.03	0.845	1.089
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4132	826.4	21.85	23.00	1.303	-0.04	0.784	1.022
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Reduced	4182	836.4	21.87	23.00	1.297	0.18	0.789	1.023
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1513	1752.6	15.87	17.00	1.297	0.1	0.652	0.846
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1312	1712.4	15.67	17.00	1.358	-0.01	0.275	0.374
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Reduced	1413	1732.6	15.60	17.00	1.380	0.12	0.657	0.907
27	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1513	1752.6	15.87	17.00	1.297	0.08	1.110	1.440
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1312	1712.4	15.67	17.00	1.358	-0.04	0.428	0.581
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Reduced	1413	1732.6	15.60	17.00	1.380	0.06	1.040	1.436
	WCDMA IV	RMC 12.2Kbps	Left Side	5mm	Reduced	1513	1752.6	15.04	16.00	1.247	0.07	0.015	0.018
	WCDMA IV	RMC 12.2Kbps	Right Side	5mm	Reduced	1513	1752.6	15.04	16.00	1.247	0.12	0.021	0.026
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1513	1752.6	15.04	16.00	1.247	-0.05	1.090	1.360
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1312	1712.4	14.92	16.00	1.282	-0.1	0.453	0.581
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1413	1732.6	14.88	16.00	1.294	0.03	1.100	1.424
	WCDMA II	RMC 12.2Kbps	Front	5mm	Reduced	9538	1907.6	15.47	16.00	1.130	0.06	0.622	0.703
	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9538	1907.6	15.47	16.00	1.130	0.11	1.026	1.159
	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9262	1852.4	15.40	16.00	1.148	0.01	1.140	1.309
28	WCDMA II	RMC 12.2Kbps	Back	5mm	Reduced	9400	1880	15.46	16.00	1.132	0.04	1.270	1.438
	WCDMA II	RMC 12.2Kbps	Left Side	5mm	Reduced	9538	1907.6	13.96	14.50	1.132	0.17	0.038	0.042
	WCDMA II	RMC 12.2Kbps	Right Side	5mm	Reduced	9538	1907.6	13.96	14.50	1.132	0.03	0.023	0.025
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9538	1907.6	13.96	14.50	1.132	-0.06	1.088	1.232
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9262	1852.4	13.83	14.50	1.167	0.13	1.220	1.424
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9400	1880	13.94	14.50	1.138	0.01	1.190	1.354



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5mm	Reduced	777	848.31	23.01	24.00	1.256	-0.11	0.676	0.849
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5mm	Reduced	1013	824.7	22.98	24.00	1.265	-0.01	0.720	0.911
	CDMA2000 BC0	RTAP 153.6Kbps	Front	5mm	Reduced	384	836.52	22.98	24.00	1.265	-0.07	0.698	0.883
	CDMA2000 BC0	RTAP 153.6Kbps	Back	5mm	Reduced	777	848.31	23.01	24.00	1.256	0.09	1.040	1.306
29	CDMA2000 BC0	RTAP 153.6Kbps	Back	5mm	Reduced	1013	824.7	22.98	24.00	1.265	0.08	1.120	1.417
	CDMA2000 BC0	RTAP 153.6Kbps	Back	5mm	Reduced	384	836.52	22.98	24.00	1.265	0.17	1.000	1.265
	CDMA2000 BC0	RTAP 153.6Kbps	Left Side	5mm	Reduced	777	848.31	23.01	24.00	1.256	-0.1	0.176	0.221
	CDMA2000 BC0	RTAP 153.6Kbps	Right Side	5mm	Reduced	777	848.31	23.01	24.00	1.256	0.14	0.329	0.413
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	777	848.31	23.01	24.00	1.256	-0.1	0.858	1.078
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	1013	824.7	22.98	24.00	1.265	-0.07	0.830	1.050
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	384	836.52	22.98	24.00	1.265	0.07	0.816	1.032
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5mm	Reduced	684	823.1	23.03	24.00	1.250	0.02	0.688	0.860
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5mm	Reduced	476	817.9	22.99	24.00	1.262	0.09	0.680	0.858
	CDMA2000 BC10	RTAP 153.6Kbps	Front	5mm	Reduced	580	820.5	23.02	24.00	1.253	0.14	0.689	0.863
	CDMA2000 BC10	RTAP 153.6Kbps	Back	5mm	Reduced	684	823.1	23.03	24.00	1.250	0.16	1.070	1.338
	CDMA2000 BC10	RTAP 153.6Kbps	Back	5mm	Reduced	476	817.9	22.99	24.00	1.262	0.08	1.050	1.325
30	CDMA2000 BC10	RTAP 153.6Kbps	Back	5mm	Reduced	580	820.5	23.02	24.00	1.253	0.08	1.080	1.353
	CDMA2000 BC10	RTAP 153.6Kbps	Left Side	5mm	Reduced	684	823.1	23.03	24.00	1.250	0.04	0.186	0.233
	CDMA2000 BC10	RTAP 153.6Kbps	Right Side	5mm	Reduced	684	823.1	23.03	24.00	1.250	0.18	0.342	0.428
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	684	823.1	23.03	24.00	1.250	0.1	0.800	1.000
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	476	817.9	22.99	24.00	1.262	0.06	0.772	0.974
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	580	820.5	23.02	24.00	1.253	-0.11	0.795	0.996
	CDMA2000 BC1	RTAP 153.6Kbps	Front	5mm	Reduced	600	1880	14.98	15.50	1.127	0.05	0.516	0.582
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5mm	Reduced	600	1880	14.98	15.50	1.127	0.15	0.770	0.868
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5mm	Reduced	25	1851.25	14.80	15.50	1.175	0.17	0.730	0.858
	CDMA2000 BC1	RTAP 153.6Kbps	Back	5mm	Reduced	1175	1908.75	14.96	15.50	1.132	0.08	0.743	0.841
	CDMA2000 BC1	RTAP 153.6Kbps	Left Side	5mm	Reduced	600	1880	14.98	15.50	1.127	0.15	0.025	0.028
	CDMA2000 BC1	RTAP 153.6Kbps	Right Side	5mm	Reduced	600	1880	14.98	15.50	1.127	0.03	0.025	0.029
31	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	600	1880	14.98	15.50	1.127	0.11	1.140	1.285
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	25	1851.25	14.80	15.50	1.175	0.13	1.090	1.281
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	1175	1908.75	14.96	15.50	1.132	0.18	1.010	1.144



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71	20M	QPSK	1	0	Front	5mm	Full	133322	683	23.09	24.00	1.233	0.05	0.408	0.503
32	LTE Band 71	20M	QPSK	1	0	Back	5mm	Full	133322	683	23.09	24.00	1.233	-0.02	0.711	0.877
	LTE Band 71	20M	QPSK	1	0	Left Side	5mm	Full	133322	683	23.09	24.00	1.233	0.08	0.330	0.407
	LTE Band 71	20M	QPSK	1	0	Right Side	5mm	Full	133322	683	23.09	24.00	1.233	0.06	0.467	0.576
	LTE Band 71	20M	QPSK	1	0	Bottom Side	5mm	Full	133322	683	23.09	24.00	1.233	-0.01	0.574	0.708
	LTE Band 71	20M	QPSK	50	0	Front	5mm	Full	133322	683	22.04	23.00	1.247	0.06	0.234	0.292
	LTE Band 71	20M	QPSK	50	0	Back	5mm	Full	133322	683	22.04	23.00	1.247	-0.04	0.405	0.505
	LTE Band 71	20M	QPSK	50	0	Left Side	5mm	Full	133322	683	22.04	23.00	1.247	0.1	0.180	0.225
	LTE Band 71	20M	QPSK	50	0	Right Side	5mm	Full	133322	683	22.04	23.00	1.247	0.16	0.255	0.318
	LTE Band 71	20M	QPSK	50	0	Bottom Side	5mm	Full	133322	683	22.04	23.00	1.247	-0.07	0.324	0.404
	LTE Band 71	20M	QPSK	100	0	Back	5mm	Full	133322	683	21.94	23.00	1.276	0.03	0.400	0.511
	LTE Band 12	10M	QPSK	1	49	Front	5mm	Full	23095	707.5	22.81	24.00	1.315	0.13	0.440	0.579
33	LTE Band 12	10M	QPSK	1	49	Back	5mm	Full	23095	707.5	22.81	24.00	1.315	0.01	0.710	0.934
	LTE Band 12	10M	QPSK	1	49	Left Side	5mm	Full	23095	707.5	22.81	24.00	1.315	-0.04	0.212	0.279
	LTE Band 12	10M	QPSK	1	49	Right Side	5mm	Full	23095	707.5	22.81	24.00	1.315	0.11	0.359	0.472
	LTE Band 12	10M	QPSK	1	49	Bottom Side	5mm	Full	23095	707.5	22.81	24.00	1.315	0.16	0.657	0.864
	LTE Band 12	10M	QPSK	25	12	Front	5mm	Full	23095	707.5	21.89	23.00	1.291	0.03	0.251	0.324
	LTE Band 12	10M	QPSK	25	12	Back	5mm	Full	23095	707.5	21.89	23.00	1.291	0.14	0.411	0.531
	LTE Band 12	10M	QPSK	25	12	Left Side	5mm	Full	23095	707.5	21.89	23.00	1.291	0.02	0.129	0.167
	LTE Band 12	10M	QPSK	25	12	Right Side	5mm	Full	23095	707.5	21.89	23.00	1.291	0.13	0.203	0.262
	LTE Band 12	10M	QPSK	25	12	Bottom Side	5mm	Full	23095	707.5	21.89	23.00	1.291	0.1	0.378	0.488
	LTE Band 12	10M	QPSK	50	0	Back	5mm	Full	23095	707.5	21.88	23.00	1.294	0.01	0.415	0.537
	LTE Band 12	10M	QPSK	50	0	Bottom Side	5mm	Full	23095	707.5	21.88	23.00	1.294	-0.07	0.370	0.479
	LTE Band 13	10M	QPSK	1	25	Front	5mm	Full	23230	782	22.60	24.00	1.380	-0.12	0.598	0.825
34	LTE Band 13	10M	QPSK	1	25	Back	5mm	Full	23230	782	22.60	24.00	1.380	0.04	1.000	1.380
	LTE Band 13	10M	QPSK	1	25	Left Side	5mm	Full	23230	782	22.60	24.00	1.380	0.03	0.295	0.407
	LTE Band 13	10M	QPSK	1	25	Right Side	5mm	Full	23230	782	22.60	24.00	1.380	0.05	0.453	0.625
	LTE Band 13	10M	QPSK	1	25	Bottom Side	5mm	Full	23230	782	22.60	24.00	1.380	0.04	0.831	1.147
	LTE Band 13	10M	QPSK	25	12	Front	5mm	Full	23230	782	21.70	23.00	1.349	0.11	0.345	0.465
	LTE Band 13	10M	QPSK	25	12	Back	5mm	Full	23230	782	21.70	23.00	1.349	-0.1	0.570	0.769
	LTE Band 13	10M	QPSK	25	12	Left Side	5mm	Full	23230	782	21.70	23.00	1.349	0.06	0.171	0.231
	LTE Band 13	10M	QPSK	25	12	Right Side	5mm	Full	23230	782	21.70	23.00	1.349	-0.07	0.264	0.356
	LTE Band 13	10M	QPSK	25	12	Bottom Side	5mm	Full	23230	782	21.70	23.00	1.349	0.06	0.481	0.649
	LTE Band 13	10M	QPSK	50	0	Front	5mm	Full	23230	782	21.65	23.00	1.365	-0.07	0.348	0.475
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Full	23230	782	21.65	23.00	1.365	0.08	0.569	0.776
	LTE Band 13	10M	QPSK	50	0	Bottom Side	5mm	Full	23230	782	21.65	23.00	1.365	-0.12	0.472	0.644
	LTE Band 14	10M	QPSK	1	49	Front	5mm	Reduced	23330	793	22.20	23.50	1.349	0.02	0.495	0.668
35	LTE Band 14	10M	QPSK	1	49	Back	5mm	Reduced	23330	793	22.20	23.50	1.349	0.07	0.936	1.263
	LTE Band 14	10M	QPSK	1	49	Left Side	5mm	Reduced	23330	793	22.20	23.50	1.349	-0.08	0.172	0.232
	LTE Band 14	10M	QPSK	1	49	Right Side	5mm	Reduced	23330	793	22.20	23.50	1.349	-0.04	0.328	0.442
	LTE Band 14	10M	QPSK	1	49	Bottom Side	5mm	Reduced	23330	793	22.20	23.50	1.349	0.06	0.624	0.842



FCC SAR Test Report

Report No. : FA081310

	LTE Band 14	10M	QPSK	25	0	Front	5mm	Reduced	23330	793	21.74	23.00	1.337	-0.02	0.330	0.441
	LTE Band 14	10M	QPSK	25	0	Back	5mm	Reduced	23330	793	21.74	23.00	1.337	0.16	0.574	0.767
	LTE Band 14	10M	QPSK	25	0	Left Side	5mm	Reduced	23330	793	21.74	23.00	1.337	0.05	0.120	0.160
	LTE Band 14	10M	QPSK	25	0	Right Side	5mm	Reduced	23330	793	21.74	23.00	1.337	-0.1	0.220	0.294
	LTE Band 14	10M	QPSK	25	0	Bottom Side	5mm	Reduced	23330	793	21.74	23.00	1.337	-0.12	0.382	0.511
	LTE Band 14	10M	QPSK	50	0	Back	5mm	Reduced	23330	793	21.71	23.00	1.346	0.12	0.571	0.768
	LTE Band 5	10M	QPSK	1	49	Front	5mm	Reduced	20525	836.5	21.69	23.00	1.352	0.15	0.621	0.840
36	LTE Band 5	10M	QPSK	1	49	Back	5mm	Reduced	20525	836.5	21.69	23.00	1.352	0.06	0.973	1.316
	LTE Band 5	10M	QPSK	1	49	Left Side	5mm	Reduced	20525	836.5	21.69	23.00	1.352	0.06	0.144	0.195
	LTE Band 5	10M	QPSK	1	49	Right Side	5mm	Reduced	20525	836.5	21.69	23.00	1.352	0.11	0.269	0.364
	LTE Band 5	10M	QPSK	1	49	Bottom Side	5mm	Reduced	20525	836.5	21.69	23.00	1.352	-0.05	0.723	0.978
	LTE Band 5	10M	QPSK	25	25	Front	5mm	Reduced	20525	836.5	21.67	23.00	1.358	0.15	0.444	0.603
	LTE Band 5	10M	QPSK	25	25	Back	5mm	Reduced	20525	836.5	21.67	23.00	1.358	0.11	0.683	0.928
	LTE Band 5	10M	QPSK	25	25	Left Side	5mm	Reduced	20525	836.5	21.67	23.00	1.358	-0.04	0.103	0.140
	LTE Band 5	10M	QPSK	25	25	Right Side	5mm	Reduced	20525	836.5	21.67	23.00	1.358	0.18	0.190	0.258
	LTE Band 5	10M	QPSK	25	25	Bottom Side	5mm	Reduced	20525	836.5	21.67	23.00	1.358	0.11	0.495	0.672
	LTE Band 5	10M	QPSK	50	0	Front	5mm	Reduced	20525	836.5	21.66	23.00	1.361	0.04	0.440	0.599
	LTE Band 5	10M	QPSK	50	0	Back	5mm	Reduced	20525	836.5	21.66	23.00	1.361	0.16	0.681	0.927
	LTE Band 5	10M	QPSK	50	0	Bottom Side	5mm	Reduced	20525	836.5	21.66	23.00	1.361	0.02	0.501	0.682
	LTE Band 26	15M	QPSK	1	37	Front	5mm	Reduced	26965	841.5	21.96	23.00	1.271	0.06	0.668	0.849
	LTE Band 26	15M	QPSK	1	37	Front	5mm	Reduced	26765	821.5	21.84	23.00	1.306	0.1	0.644	0.841
	LTE Band 26	15M	QPSK	1	37	Front	5mm	Reduced	26865	831.5	21.88	23.00	1.294	-0.07	0.672	0.870
37	LTE Band 26	15M	QPSK	1	37	Back	5mm	Reduced	26965	841.5	21.96	23.00	1.271	0.08	1.050	1.334
	LTE Band 26	15M	QPSK	1	37	Back	5mm	Reduced	26765	821.5	21.84	23.00	1.306	0.12	1.020	1.332
	LTE Band 26	15M	QPSK	1	37	Back	5mm	Reduced	26865	831.5	21.88	23.00	1.294	-0.05	1.010	1.307
	LTE Band 26	15M	QPSK	1	37	Left Side	5mm	Reduced	26965	841.5	21.96	23.00	1.271	-0.12	0.137	0.174
	LTE Band 26	15M	QPSK	1	37	Right Side	5mm	Reduced	26965	841.5	21.96	23.00	1.271	-0.05	0.280	0.356
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5mm	Reduced	26965	841.5	21.96	23.00	1.271	0.15	0.788	1.001
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5mm	Reduced	26765	821.5	21.84	23.00	1.306	0.05	0.756	0.987
	LTE Band 26	15M	QPSK	1	37	Bottom Side	5mm	Reduced	26865	831.5	21.88	23.00	1.294	-0.07	0.700	0.906
	LTE Band 26	15M	QPSK	36	20	Front	5mm	Reduced	26965	841.5	21.94	23.00	1.276	-0.11	0.479	0.611
	LTE Band 26	15M	QPSK	36	20	Back	5mm	Reduced	26965	841.5	21.94	23.00	1.276	-0.01	0.737	0.941
	LTE Band 26	15M	QPSK	36	20	Back	5mm	Reduced	26765	821.5	21.82	23.00	1.312	-0.04	0.721	0.946
	LTE Band 26	15M	QPSK	36	20	Back	5mm	Reduced	26865	831.5	21.86	23.00	1.300	-0.02	0.735	0.956
	LTE Band 26	15M	QPSK	36	20	Left Side	5mm	Reduced	26965	841.5	21.94	23.00	1.276	0.04	0.095	0.121
	LTE Band 26	15M	QPSK	36	20	Right Side	5mm	Reduced	26965	841.5	21.94	23.00	1.276	-0.02	0.207	0.264
	LTE Band 26	15M	QPSK	36	20	Bottom Side	5mm	Reduced	26965	841.5	21.94	23.00	1.276	0.13	0.555	0.708
	LTE Band 26	15M	QPSK	75	0	Front	5mm	Reduced	26965	841.5	21.91	23.00	1.285	0.11	0.476	0.612
	LTE Band 26	15M	QPSK	75	0	Back	5mm	Reduced	26965	841.5	21.91	23.00	1.285	-0.02	0.721	0.927
	LTE Band 26	15M	QPSK	75	0	Bottom Side	5mm	Reduced	26965	841.5	21.91	23.00	1.285	0.09	0.550	0.707
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Reduced	132572	1770	17.81	19.00	1.315	0.02	0.716	0.942
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Reduced	132072	1720	17.65	19.00	1.365	0.07	0.251	0.343
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Reduced	132322	1745	17.59	19.00	1.384	0.15	0.591	0.818
	LTE Band 66	20M	QPSK	1	99	Back	5mm	Reduced	132572	1770	17.81	19.00	1.315	0.01	1.090	1.434
	LTE Band 66	20M	QPSK	1	99	Back	5mm	Reduced	132072	1720	17.65	19.00	1.365	-0.15	0.589	0.804
38	LTE Band 66	20M	QPSK	1	99	Back	5mm	Reduced	132322	1745	17.59	19.00	1.384	0.09	1.040	1.439



FCC SAR Test Report

Report No. : FA081310

	LTE Band 66	20M	QPSK	1	99	Left Side	5mm	Reduced	132572	1770	15.72	17.00	1.343	-0.06	0.033	0.044
	LTE Band 66	20M	QPSK	1	99	Right Side	5mm	Reduced	132572	1770	15.72	17.00	1.343	0.03	0.028	0.037
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	Reduced	132572	1770	15.72	17.00	1.343	0.01	0.906	1.217
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	Reduced	132072	1720	15.67	17.00	1.358	0.08	0.525	0.713
	LTE Band 66	20M	QPSK	1	99	Bottom Side	5mm	Reduced	132322	1745	15.54	17.00	1.400	0.13	0.768	1.075
	LTE Band 66	20M	QPSK	50	50	Front	5mm	Reduced	132572	1770	17.78	19.00	1.324	0.07	0.703	0.931
	LTE Band 66	20M	QPSK	50	50	Front	5mm	Reduced	132072	1720	17.62	19.00	1.374	0.14	0.238	0.327
	LTE Band 66	20M	QPSK	50	50	Front	5mm	Reduced	132322	1745	17.57	19.00	1.390	0.12	0.559	0.777
	LTE Band 66	20M	QPSK	50	50	Back	5mm	Reduced	132572	1770	17.78	19.00	1.324	-0.09	1.030	1.364
	LTE Band 66	20M	QPSK	50	50	Back	5mm	Reduced	132072	1720	17.62	19.00	1.374	0.11	0.571	0.785
	LTE Band 66	20M	QPSK	50	50	Back	5mm	Reduced	132322	1745	17.57	19.00	1.390	0.11	0.992	1.379
	LTE Band 66	20M	QPSK	50	50	Left Side	5mm	Reduced	132572	1770	15.70	17.00	1.349	0.11	0.030	0.040
	LTE Band 66	20M	QPSK	50	50	Right Side	5mm	Reduced	132572	1770	15.70	17.00	1.349	0.03	0.025	0.034
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	Reduced	132572	1770	15.70	17.00	1.349	0.12	0.898	1.211
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	Reduced	132072	1720	15.65	17.00	1.365	-0.08	0.504	0.688
	LTE Band 66	20M	QPSK	50	50	Bottom Side	5mm	Reduced	132322	1745	15.52	17.00	1.406	0.15	0.734	1.032
	LTE Band 66	20M	QPSK	100	0	Front	5mm	Reduced	132572	1770	17.76	19.00	1.330	0.16	0.708	0.942
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Reduced	132572	1770	17.76	19.00	1.330	0.08	0.959	1.276
	LTE Band 66	20M	QPSK	100	0	Bottom Side	5mm	Reduced	132572	1770	15.67	17.00	1.358	-0.05	0.933	1.267
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Reduced	26340	1880	16.01	17.00	1.256	0.09	0.836	1.050
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Reduced	26140	1860	15.95	17.00	1.274	-0.08	0.815	1.038
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Reduced	26590	1905	15.96	17.00	1.271	0.1	0.614	0.780
	LTE Band 25	20M	QPSK	1	49	Back	5mm	Reduced	26340	1880	16.01	17.00	1.256	-0.11	1.120	1.407
39	LTE Band 25	20M	QPSK	1	49	Back	5mm	Reduced	26140	1860	15.95	17.00	1.274	0.02	1.130	1.439
	LTE Band 25	20M	QPSK	1	49	Back	5mm	Reduced	26590	1905	15.96	17.00	1.271	-0.09	1.080	1.372
	LTE Band 25	20M	QPSK	1	49	Left Side	5mm	Reduced	26340	1880	14.04	14.50	1.112	-0.01	0.029	0.032
	LTE Band 25	20M	QPSK	1	49	Right Side	5mm	Reduced	26340	1880	14.04	14.50	1.112	0.12	0.017	0.019
	LTE Band 25	20M	QPSK	1	49	Bottom Side	5mm	Reduced	26340	1880	14.04	14.50	1.112	-0.12	1.030	1.145
	LTE Band 25	20M	QPSK	1	49	Bottom Side	5mm	Reduced	26140	1860	14.00	14.50	1.122	0.06	1.050	1.178
	LTE Band 25	20M	QPSK	1	49	Bottom Side	5mm	Reduced	26590	1905	13.98	14.50	1.127	0.01	1.010	1.138
	LTE Band 25	20M	QPSK	50	0	Front	5mm	Reduced	26340	1880	15.98	17.00	1.265	-0.07	0.828	1.047
	LTE Band 25	20M	QPSK	50	0	Front	5mm	Reduced	26140	1860	15.92	17.00	1.282	-0.01	0.810	1.039
	LTE Band 25	20M	QPSK	50	0	Front	5mm	Reduced	26590	1905	15.94	17.00	1.276	0.13	0.610	0.779
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Reduced	26340	1880	15.98	17.00	1.265	-0.03	1.100	1.391
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Reduced	26140	1860	15.92	17.00	1.282	0.17	1.090	1.398
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Reduced	26590	1905	15.94	17.00	1.276	0.07	1.070	1.366
	LTE Band 25	20M	QPSK	50	0	Left Side	5mm	Reduced	26340	1880	14.01	14.50	1.119	0.18	0.028	0.031
	LTE Band 25	20M	QPSK	50	0	Right Side	5mm	Reduced	26340	1880	14.01	14.50	1.119	-0.08	0.016	0.018
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26340	1880	14.01	14.50	1.119	-0.12	1.010	1.131
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26140	1860	13.97	14.50	1.130	-0.07	1.030	1.164
	LTE Band 25	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26590	1905	13.95	14.50	1.135	-0.08	1.000	1.135
	LTE Band 25	20M	QPSK	100	0	Front	5mm	Reduced	26340	1880	15.95	17.00	1.274	0.07	0.821	1.046
	LTE Band 25	20M	QPSK	100	0	Back	5mm	Reduced	26340	1880	15.95	17.00	1.274	0.1	1.090	1.388
	LTE Band 25	20M	QPSK	100	0	Bottom Side	5mm	Reduced	26340	1880	14.00	14.50	1.122	0.13	1.020	1.144
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Reduced	21350	2560	19.80	21.00	1.318	0.13	0.879	1.159
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Reduced	20850	2510	19.72	21.00	1.343	-0.05	0.885	1.188
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Reduced	21100	2535	19.61	21.00	1.377	0.16	0.906	1.248

Sporton International (Shenzhen) Inc.

TEL : +86-755-86379589 / FAX : +86-755-86379595

FCC ID : IHDT56ZG1

Issued Date : Sep. 24, 2020

Form version. : 181113



FCC SAR Test Report

Report No. : FA081310

	LTE Band 7	20M	QPSK	1	99	Back	5mm	Reduced	21350	2560	19.80	21.00	1.318	-0.01	1.010	1.331
	LTE Band 7	20M	QPSK	1	99	Back	5mm	Reduced	20850	2510	19.72	21.00	1.343	-0.08	1.020	1.370
	LTE Band 7	20M	QPSK	1	99	Back	5mm	Reduced	21100	2535	19.61	21.00	1.377	0.05	1.020	1.405
	LTE Band 7	20M	QPSK	1	99	Left Side	5mm	Reduced	21350	2560	19.80	21.00	1.318	0.07	0.505	0.666
	LTE Band 7	20M	QPSK	1	99	Right Side	5mm	Reduced	21350	2560	19.80	21.00	1.318	0.12	0.125	0.165
	LTE Band 7	20M	QPSK	1	99	Bottom Side	5mm	Reduced	21350	2560	19.80	21.00	1.318	0.04	0.844	1.113
	LTE Band 7	20M	QPSK	1	99	Bottom Side	5mm	Reduced	20850	2510	19.72	21.00	1.343	0.04	0.842	1.131
	LTE Band 7	20M	QPSK	1	99	Bottom Side	5mm	Reduced	21100	2535	19.61	21.00	1.377	-0.09	0.854	1.176
	LTE Band 7	20M	QPSK	50	24	Front	5mm	Reduced	21350	2560	19.76	21.00	1.330	-0.11	0.886	1.179
	LTE Band 7	20M	QPSK	50	24	Front	5mm	Reduced	20850	2510	19.70	21.00	1.349	0.1	0.902	1.217
	LTE Band 7	20M	QPSK	50	24	Front	5mm	Reduced	21100	2535	19.60	21.00	1.380	-0.09	0.915	1.263
	LTE Band 7	20M	QPSK	50	24	Back	5mm	Reduced	21350	2560	19.76	21.00	1.330	0.14	1.030	1.370
	LTE Band 7	20M	QPSK	50	24	Back	5mm	Reduced	20850	2510	19.70	21.00	1.349	0.18	1.040	1.403
40	LTE Band 7	20M	QPSK	50	24	Back	5mm	Reduced	21100	2535	19.60	21.00	1.380	-0.06	1.030	1.422
	LTE Band 7	20M	QPSK	50	24	Left Side	5mm	Reduced	21350	2560	19.76	21.00	1.330	0.11	0.508	0.676
	LTE Band 7	20M	QPSK	50	24	Right Side	5mm	Reduced	21350	2560	19.76	21.00	1.330	0.13	0.127	0.169
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5mm	Reduced	21350	2560	19.76	21.00	1.330	-0.12	0.852	1.134
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5mm	Reduced	20850	2510	19.70	21.00	1.349	-0.05	0.857	1.156
	LTE Band 7	20M	QPSK	50	24	Bottom Side	5mm	Reduced	21100	2535	19.60	21.00	1.380	0.01	0.866	1.195
	LTE Band 7	20M	QPSK	100	0	Front	5mm	Reduced	21350	2560	19.73	21.00	1.340	0.05	0.875	1.172
	LTE Band 7	20M	QPSK	100	0	Back	5mm	Reduced	21350	2560	19.73	21.00	1.340	0.01	0.996	1.334
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5mm	Reduced	21350	2560	19.73	21.00	1.340	0.17	0.857	1.148



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	0.06	0.819	0.991
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Reduced	39750	2506	22.09	23.00	1.233	62.9	1.006	-0.04	0.832	1.032
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Reduced	40185	2549.5	21.98	23.00	1.265	62.9	1.006	-0.03	0.816	1.038
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.06	0.833	1.080
	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	-0.1	0.812	0.993
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	-0.09	1.160	1.403
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	39750	2506	22.09	23.00	1.233	62.9	1.006	-0.1	1.140	1.414
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	40185	2549.5	21.98	23.00	1.265	62.9	1.006	-0.09	1.120	1.425
41	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.09	1.110	1.439
	LTE Band 41-HPUE	20M	QPSK	1	0	-	Back	5mm	Reduced	40620	2593	22.14	23.00	1.219	42.9	1.009	0.02	0.829	1.020
	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	-0.11	1.170	1.431
	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	-0.03	0.407	0.492
	LTE Band 41	20M	QPSK	1	0	-	Right Side	5mm	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	0.12	0.145	0.175
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	0.05	0.762	0.922
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	39750	2506	22.09	23.00	1.233	62.9	1.006	0.02	0.809	1.004
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	40185	2549.5	21.98	23.00	1.265	62.9	1.006	-0.06	0.796	1.013
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.12	0.824	1.068
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	0.17	0.797	0.975
	LTE Band 41C	20M	QPSK	1	0	-	Back	5mm	Reduced	41490(PCC) + 41292(SCC)	2680(PCC) + 2660.2(SCC)	21.96	23.00	1.271	62.9	1.006	0.14	1.080	1.380
	LTE Band 41C	20M	QPSK	1	0	-	Back	5mm	Reduced	39750(PCC) + 39948(SCC)	2506(PCC) + 2525.8(SCC)	21.76	23.00	1.330	62.9	1.006	0.09	0.909	1.217
	LTE Band 41C	20M	QPSK	1	0	-	Back	5mm	Reduced	40185(PCC) + 39987(SCC)	2549.5(PCC) + 2529.7(SCC)	21.73	23.00	1.340	62.9	1.006	0.03	0.955	1.287
	LTE Band 41C	20M	QPSK	1	0	-	Back	5mm	Reduced	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	21.83	23.00	1.309	62.9	1.006	-0.07	0.975	1.284
	LTE Band 41C	20M	QPSK	1	0	-	Back	5mm	Reduced	41055(PCC) + 40857(SCC)	2636.5(PCC) + 2616.7(SCC)	21.89	23.00	1.291	62.9	1.006	-0.01	0.993	1.290
	LTE Band 41	20M	QPSK	50	24	-	Front	5mm	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	-0.03	0.558	0.762
	LTE Band 41	20M	QPSK	50	24	-	Front	5mm	Reduced	39750	2506	21.52	23.00	1.406	62.9	1.006	0.12	0.580	0.820
	LTE Band 41	20M	QPSK	50	24	-	Front	5mm	Reduced	40185	2549.5	21.46	23.00	1.426	62.9	1.006	0.09	0.573	0.822
	LTE Band 41	20M	QPSK	50	24	-	Front	5mm	Reduced	40620	2593	21.57	23.00	1.390	62.9	1.006	-0.09	0.596	0.833
	LTE Band 41	20M	QPSK	50	24	-	Front	5mm	Reduced	41055	2636.5	21.49	23.00	1.416	62.9	1.006	0.02	0.539	0.768
	LTE Band 41	20M	QPSK	50	24	-	Back	5mm	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	-0.03	0.744	1.017
	LTE Band 41	20M	QPSK	50	24	-	Back	5mm	Reduced	39750	2506	21.52	23.00	1.406	62.9	1.006	-0.04	0.746	1.055
	LTE Band 41	20M	QPSK	50	24	-	Back	5mm	Reduced	40185	2549.5	21.46	23.00	1.426	62.9	1.006	0.18	0.745	1.068
	LTE Band 41	20M	QPSK	50	24	-	Back	5mm	Reduced	40620	2593	21.57	23.00	1.390	62.9	1.006	0.05	0.783	1.095
	LTE Band 41	20M	QPSK	50	24	-	Back	5mm	Reduced	41055	2636.5	21.49	23.00	1.416	62.9	1.006	0.09	0.745	1.061
	LTE Band 41	20M	QPSK	50	24	-	Left Side	5mm	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	0.02	0.261	0.357



FCC SAR Test Report

Report No. : FA081310

	LTE Band 41	20M	QPSK	50	24	-	Right Side	5mm	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	0.18	0.100	0.137
	LTE Band 41	20M	QPSK	50	24	-	Bottom Side	5mm	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	-0.05	0.496	0.678
	LTE Band 41	20M	QPSK	50	24	-	Bottom Side	5mm	Reduced	39750	2506	21.52	23.00	1.406	62.9	1.006	-0.04	0.512	0.724
	LTE Band 41	20M	QPSK	50	24	-	Bottom Side	5mm	Reduced	40185	2549.5	21.46	23.00	1.426	62.9	1.006	0.12	0.520	0.746
	LTE Band 41	20M	QPSK	50	24	-	Bottom Side	5mm	Reduced	40620	2593	21.57	23.00	1.390	62.9	1.006	-0.11	0.538	0.752
	LTE Band 41	20M	QPSK	50	24	-	Bottom Side	5mm	Reduced	41055	2636.5	21.49	23.00	1.416	62.9	1.006	0.18	0.506	0.721
	LTE Band 41	20M	QPSK	100	0	-	Front	5mm	Reduced	41490	2680	21.65	23.00	1.365	62.9	1.006	-0.05	0.552	0.758
	LTE Band 41	20M	QPSK	100	0	-	Back	5mm	Reduced	41490	2680	21.65	23.00	1.365	62.9	1.006	-0.01	0.740	1.016
	LTE Band 41	20M	QPSK	100	0	-	Bottom Side	5mm	Reduced	41490	2680	21.65	23.00	1.365	62.9	1.006	-0.02	0.492	0.675



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Front	5mm	0	2402	8.60	9.00	1.096	76.69	1.086	-0.03	0.040	0.047
	Bluetooth	DH5 1Mbps	Back	5mm	0	2402	8.60	9.00	1.096	76.69	1.086	0.18	0.051	0.060
	Bluetooth	DH5 1Mbps	Back	5mm	39	2441	8.00	9.00	1.259	76.69	1.086	0.16	0.058	0.079
42	Bluetooth	DH5 1Mbps	Back	5mm	78	2480	7.40	9.00	1.445	76.69	1.086	0.01	0.055	0.086
	Bluetooth	DH5 1Mbps	Left Side	5mm	0	2402	8.60	9.00	1.096	76.69	1.086	0.01	0.011	0.013
	Bluetooth	DH5 1Mbps	Right Side	5mm	0	2402	8.60	9.00	1.096	76.69	1.086	-0.07	0.030	0.036
	Bluetooth	DH5 1Mbps	Top Side	5mm	0	2402	8.60	9.00	1.096	76.69	1.086	0.16	0.050	0.059

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	11	2462	22.10	23.00	1.230	99.02	1.010	0.01	0.679	0.844
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	1	2412	21.60	23.00	1.380	99.02	1.010	0.11	0.610	0.850
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	6	2437	22.00	23.00	1.259	99.02	1.010	-0.12	0.671	0.853
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	11	2462	22.10	23.00	1.230	99.02	1.010	-0.04	0.821	1.020
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	1	2412	21.60	23.00	1.380	99.02	1.010	0.14	0.796	1.110
43	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	6	2437	22.00	23.00	1.259	99.02	1.010	0.09	0.897	1.141
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	11	2462	22.10	23.00	1.230	99.02	1.010	-0.1	0.183	0.227
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	11	2462	22.10	23.00	1.230	99.02	1.010	0.07	0.417	0.518
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	11	2462	22.10	23.00	1.230	99.02	1.010	0.09	0.818	1.016
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	1	2412	21.60	23.00	1.380	99.02	1.010	0.05	0.735	1.025
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	6	2437	22.00	23.00	1.259	99.02	1.010	0.16	0.817	1.039



<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	5mm	Reduced	46	5230	11.23	13.00	1.503	95.15	1.051	0.05	0.002	0.003
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5mm	Reduced	46	5230	11.23	13.00	1.503	95.15	1.051	0.12	0.680	1.074
44	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5mm	Reduced	38	5190	11.18	13.00	1.521	95.15	1.051	0.01	0.692	1.106
	WLAN5.2GHz	802.11n-HT40 MCS0	Left Side	5mm	Reduced	46	5230	11.23	13.00	1.503	95.15	1.051	0.04	0.010	0.016
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	5mm	Reduced	46	5230	11.23	13.00	1.503	95.15	1.051	0.08	0.006	0.009
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	5mm	Reduced	46	5230	11.23	13.00	1.503	95.15	1.051	-0.05	0.039	0.062
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	0.01	0.002	0.003
45	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	-0.03	0.789	1.165
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	149	5745	11.97	13.50	1.422	98.13	1.019	0.15	0.725	1.051
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Reduced	157	5785	12.20	14.00	1.514	98.13	1.019	0.02	0.737	1.137
	WLAN5.8GHz	802.11a 6Mbps	Left Side	5mm	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	-0.06	0.015	0.022
	WLAN5.8GHz	802.11a 6Mbps	Right Side	5mm	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	0.07	0.006	0.009
	WLAN5.8GHz	802.11a 6Mbps	Top Side	5mm	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	0.08	0.045	0.067



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Front	5mm	-	Reduced	128	824.2	30.18	31.00	1.208	0.05	0.794	0.959
	GSM850	GPRS(2 Tx slots)	Front	5mm	-	Reduced	189	836.4	30.17	31.00	1.211	-0.03	0.790	0.956
	GSM850	GPRS(2 Tx slots)	Front	5mm	-	Reduced	251	848.8	30.06	31.00	1.242	0.12	0.482	0.598
46	GSM850	GPRS(2 Tx slots)	Back	5mm	-	Reduced	128	824.2	30.18	31.00	1.208	0.08	1.080	1.304
	GSM850	GPRS(2 Tx slots)	Back	5mm	-	Reduced	189	836.4	30.17	31.00	1.211	-0.11	1.060	1.283
	GSM850	GPRS(2 Tx slots)	Back	5mm	-	Reduced	251	848.8	30.06	31.00	1.242	-0.05	0.688	0.854
	GSM850	GPRS(2 Tx slots)	Back	5mm	Headset	Reduced	128	824.2	30.18	31.00	1.208	0.04	1.010	1.220
	GSM850	GPRS(2 Tx slots)	Front	13mm	-	Full	128	824.2	31.46	32.00	1.132	0.14	0.304	0.344
	GSM850	GPRS(2 Tx slots)	Front	13mm	-	Full	189	836.4	31.28	32.00	1.180	0.18	0.284	0.335
	GSM850	GPRS(2 Tx slots)	Front	13mm	-	Full	251	848.8	31.16	32.00	1.213	0.06	0.206	0.250
	GSM850	GPRS(2 Tx slots)	Back	23mm	-	Full	128	824.2	31.46	32.00	1.132	0.02	0.275	0.311
	GSM1900	GPRS(2 Tx slots)	Front	5mm	-	Reduced	661	1880	21.73	22.50	1.194	0.03	0.634	0.757
	GSM1900	GPRS(2 Tx slots)	Back	5mm	-	Reduced	661	1880	21.73	22.50	1.194	-0.08	1.160	1.385
	GSM1900	GPRS(2 Tx slots)	Back	5mm	-	Reduced	512	1850.2	21.64	22.50	1.219	0.01	1.110	1.353
47	GSM1900	GPRS(2 Tx slots)	Back	5mm	-	Reduced	810	1909.8	21.71	22.50	1.199	0.05	1.200	1.439
	GSM1900	GPRS(2 Tx slots)	Back	5mm	Headset	Reduced	810	1909.8	21.71	22.50	1.199	0.14	1.120	1.343
	GSM1900	GPRS(2 Tx slots)	Front	13mm	-	Full	661	1880	28.51	29.50	1.256	-0.11	0.617	0.775
	GSM1900	GPRS(2 Tx slots)	Front	13mm	-	Full	512	1850.2	28.32	29.50	1.312	0.04	0.602	0.790
	GSM1900	GPRS(2 Tx slots)	Front	13mm	-	Full	810	1909.8	28.50	29.50	1.259	-0.06	0.548	0.690
	GSM1900	GPRS(2 Tx slots)	Back	23mm	-	Full	661	1880	28.51	29.50	1.256	-0.05	0.584	0.734



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	5mm	-	Reduced	4233	846.6	21.90	23.00	1.288	0.01	0.631	0.813
	WCDMA V	RMC 12.2Kbps	Front	5mm	-	Reduced	4132	826.4	21.85	23.00	1.303	0.11	0.661	0.861
	WCDMA V	RMC 12.2Kbps	Front	5mm	-	Reduced	4182	836.4	21.87	23.00	1.297	0.03	0.635	0.824
48	WCDMA V	RMC 12.2Kbps	Back	5mm	-	Reduced	4233	846.6	21.90	23.00	1.288	0.04	1.090	1.404
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	Reduced	4132	826.4	21.85	23.00	1.303	0.14	1.070	1.394
	WCDMA V	RMC 12.2Kbps	Back	5mm	-	Reduced	4182	836.4	21.87	23.00	1.297	-0.07	1.020	1.323
	WCDMA V	RMC 12.2Kbps	Back	5mm	Headset	Reduced	4233	846.6	21.90	23.00	1.288	0.05	1.070	1.378
	WCDMA V	RMC 12.2Kbps	Front	13mm	-	Full	4233	846.6	23.13	24.00	1.222	0.06	0.245	0.299
	WCDMA V	RMC 12.2Kbps	Front	13mm	-	Full	4132	826.4	22.74	24.00	1.337	0.02	0.248	0.331
	WCDMA V	RMC 12.2Kbps	Front	13mm	-	Full	4182	836.4	23.08	24.00	1.236	0.13	0.268	0.331
	WCDMA V	RMC 12.2Kbps	Back	23mm	-	Full	4233	846.6	23.13	24.00	1.222	-0.05	0.209	0.255
	WCDMA IV	RMC 12.2Kbps	Front	5mm	-	Reduced	1513	1752.6	15.87	17.00	1.297	0.1	0.652	0.846
	WCDMA IV	RMC 12.2Kbps	Front	5mm	-	Reduced	1312	1712.4	15.67	17.00	1.358	-0.01	0.275	0.374
	WCDMA IV	RMC 12.2Kbps	Front	5mm	-	Reduced	1413	1732.6	15.60	17.00	1.380	0.12	0.657	0.907
49	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	Reduced	1513	1752.6	15.87	17.00	1.297	0.08	1.110	1.440
	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	Reduced	1312	1712.4	15.67	17.00	1.358	-0.04	0.428	0.581
	WCDMA IV	RMC 12.2Kbps	Back	5mm	-	Reduced	1413	1732.6	15.60	17.00	1.380	0.06	1.040	1.436
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1513	1752.6	15.87	17.00	1.297	0.14	1.080	1.401
	WCDMA IV	RMC 12.2Kbps	Front	13mm	-	Full	1513	1752.6	22.77	24.00	1.327	0.02	0.733	0.973
	WCDMA IV	RMC 12.2Kbps	Front	13mm	-	Full	1312	1712.4	22.72	24.00	1.343	-0.12	0.726	0.975
	WCDMA IV	RMC 12.2Kbps	Front	13mm	-	Full	1413	1732.6	22.68	24.00	1.355	0.03	0.725	0.983
	WCDMA IV	RMC 12.2Kbps	Back	23mm	-	Full	1513	1752.6	22.77	24.00	1.327	-0.01	0.653	0.867
	WCDMA IV	RMC 12.2Kbps	Back	23mm	-	Full	1312	1712.4	22.72	24.00	1.343	0.08	0.642	0.862
	WCDMA IV	RMC 12.2Kbps	Back	23mm	-	Full	1413	1732.6	22.68	24.00	1.355	0.17	0.633	0.858
	WCDMA II	RMC 12.2Kbps	Front	5mm	-	Reduced	9538	1907.6	15.47	16.00	1.130	0.06	0.622	0.703
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	Reduced	9538	1907.6	15.47	16.00	1.130	0.11	1.026	1.159
	WCDMA II	RMC 12.2Kbps	Back	5mm	-	Reduced	9262	1852.4	15.40	16.00	1.148	0.01	1.140	1.309
50	WCDMA II	RMC 12.2Kbps	Back	5mm	-	Reduced	9400	1880	15.46	16.00	1.132	0.04	1.270	1.438
	WCDMA II	RMC 12.2Kbps	Back	5mm	Headset	Reduced	9400	1880	15.46	16.00	1.132	-0.03	1.210	1.370
	WCDMA II	RMC 12.2Kbps	Front	13mm	-	Full	9538	1907.6	23.28	24.00	1.180	-0.04	0.982	1.159
	WCDMA II	RMC 12.2Kbps	Front	13mm	-	Full	9262	1852.4	23.08	24.00	1.236	-0.01	0.840	1.038
	WCDMA II	RMC 12.2Kbps	Front	13mm	-	Full	9400	1880	23.11	24.00	1.227	0.07	0.969	1.189
	WCDMA II	RMC 12.2Kbps	Back	23mm	-	Full	9538	1907.6	23.28	24.00	1.180	-0.1	0.961	1.134
	WCDMA II	RMC 12.2Kbps	Back	23mm	-	Full	9262	1852.4	23.08	24.00	1.236	0.07	0.954	1.179
	WCDMA II	RMC 12.2Kbps	Back	23mm	-	Full	9400	1880	23.11	24.00	1.227	0.05	0.971	1.192



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap		Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
				(mm)	Headset									
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	777	848.31	22.99	24.00	1.262	-0.12	0.668	0.843
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	1013	824.7	22.95	24.00	1.274	0.02	0.687	0.875
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	384	836.52	22.97	24.00	1.268	-0.01	0.667	0.846
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	777	848.31	22.99	24.00	1.262	-0.12	0.990	1.249
51	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	1013	824.7	22.95	24.00	1.274	0.03	1.020	1.299
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	384	836.52	22.97	24.00	1.268	0.02	0.970	1.230
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	5mm	Headset	Reduced	1013	824.7	22.95	24.00	1.274	0.15	1.000	1.274
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	13mm	-	Full	777	848.31	24.06	25.00	1.242	-0.01	0.243	0.302
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	13mm	-	Full	1013	824.7	23.92	25.00	1.282	-0.1	0.251	0.322
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	13mm	-	Full	384	836.52	24.04	25.00	1.247	-0.06	0.232	0.289
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	23mm	-	Full	777	848.31	24.06	25.00	1.242	0.09	0.188	0.233
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	684	823.1	23.04	24.00	1.247	0.11	0.652	0.813
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	476	817.9	23.03	24.00	1.250	0.17	0.650	0.813
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	580	820.5	23.03	24.00	1.250	-0.04	0.658	0.823
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	684	823.1	23.04	24.00	1.247	-0.1	1.100	1.372
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	476	817.9	23.03	24.00	1.250	-0.01	1.070	1.338
52	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	580	820.5	23.03	24.00	1.250	0.07	1.110	1.388
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	5mm	Headset	Reduced	580	820.5	23.03	24.00	1.250	0.11	1.050	1.313
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	13mm	-	Full	684	823.1	23.94	25.00	1.276	0.14	0.245	0.313
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	13mm	-	Full	476	817.9	23.78	25.00	1.324	-0.12	0.228	0.302
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	13mm	-	Full	580	820.5	23.88	25.00	1.294	0.02	0.235	0.304
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	23mm	-	Full	684	823.1	23.94	25.00	1.276	-0.08	0.148	0.189
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	600	1880	16.97	17.50	1.130	0.15	0.737	0.833
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	25	1851.25	16.96	17.50	1.132	0.07	0.720	0.815
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	1175	1908.75	16.95	17.50	1.135	0.06	0.696	0.790
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	600	1880	16.97	17.50	1.130	-0.01	1.180	1.333
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	25	1851.25	16.96	17.50	1.132	0.09	1.110	1.257
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	1175	1908.75	16.95	17.50	1.135	-0.1	1.190	1.351
53	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	5mm	Headset	Reduced	1175	1908.75	16.95	17.50	1.135	0.01	1.250	1.419
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	13mm	-	Full	600	1880	24.17	25.00	1.211	-0.01	0.978	1.184
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	13mm	-	Full	25	1851.25	24.02	25.00	1.253	-0.1	0.874	1.095
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	13mm	-	Full	1175	1908.75	24.10	25.00	1.230	-0.06	0.898	1.105
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	23mm	-	Full	600	1880	24.17	25.00	1.211	0.09	0.915	1.108
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	23mm	-	Full	25	1851.25	24.02	25.00	1.253	0.01	0.901	1.129
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	23mm	-	Full	1175	1908.75	24.10	25.00	1.230	0.05	0.920	1.132



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71	20M	QPSK	1	0	Front	5mm	-	Full	133322	683	23.09	24.00	1.233	0.05	0.408	0.503
54	LTE Band 71	20M	QPSK	1	0	Back	5mm	-	Full	133322	683	23.09	24.00	1.233	-0.02	0.711	0.877
	LTE Band 71	20M	QPSK	50	0	Front	5mm	-	Full	133322	683	22.04	23.00	1.247	0.06	0.234	0.292
	LTE Band 71	20M	QPSK	50	0	Back	5mm	-	Full	133322	683	22.04	23.00	1.247	-0.04	0.405	0.505
	LTE Band 71	20M	QPSK	100	0	Back	5mm	-	Full	133322	683	21.94	23.00	1.276	0.03	0.400	0.511
	LTE Band 12	10M	QPSK	1	49	Front	5mm	-	Full	23095	707.5	22.81	24.00	1.315	0.13	0.440	0.579
55	LTE Band 12	10M	QPSK	1	49	Back	5mm	-	Full	23095	707.5	22.81	24.00	1.315	0.01	0.710	0.934
	LTE Band 12	10M	QPSK	25	12	Front	5mm	-	Full	23095	707.5	21.89	23.00	1.291	0.03	0.251	0.324
	LTE Band 12	10M	QPSK	25	12	Back	5mm	-	Full	23095	707.5	21.89	23.00	1.291	0.14	0.411	0.531
	LTE Band 12	10M	QPSK	50	0	Back	5mm	-	Full	23095	707.5	21.88	23.00	1.294	0.01	0.415	0.537
	LTE Band 13	10M	QPSK	1	25	Front	5mm	-	Full	23230	782	22.60	24.00	1.380	-0.12	0.598	0.825
56	LTE Band 13	10M	QPSK	1	25	Back	5mm	-	Full	23230	782	22.60	24.00	1.380	0.04	1.000	1.380
	LTE Band 13	10M	QPSK	1	25	Back	5mm	Headset	Full	23230	782	22.60	24.00	1.380	0.05	0.959	1.324
	LTE Band 13	10M	QPSK	25	12	Front	5mm	-	Full	23230	782	21.70	23.00	1.349	0.11	0.345	0.465
	LTE Band 13	10M	QPSK	25	12	Back	5mm	-	Full	23230	782	21.70	23.00	1.349	-0.1	0.570	0.769
	LTE Band 13	10M	QPSK	50	0	Front	5mm	-	Full	23230	782	21.65	23.00	1.365	-0.07	0.348	0.475
	LTE Band 13	10M	QPSK	50	0	Back	5mm	-	Full	23230	782	21.65	23.00	1.365	0.08	0.569	0.776
	LTE Band 14	10M	QPSK	1	49	Front	5mm	-	Reduced	23330	793	22.20	23.50	1.349	0.02	0.495	0.668
57	LTE Band 14	10M	QPSK	1	49	Back	5mm	-	Reduced	23330	793	22.20	23.50	1.349	0.07	0.936	1.263
	LTE Band 14	10M	QPSK	1	49	Back	5mm	Headset	Reduced	23330	793	22.20	23.50	1.349	0.05	0.933	1.259
	LTE Band 14	10M	QPSK	1	49	Front	13mm	-	Full	23330	793	22.70	24.00	1.349	0.02	0.231	0.312
	LTE Band 14	10M	QPSK	1	49	Back	23mm	-	Full	23330	793	22.70	24.00	1.349	0.13	0.292	0.394
	LTE Band 14	10M	QPSK	25	0	Front	5mm	-	Reduced	23330	793	21.74	23.00	1.337	-0.02	0.330	0.441
	LTE Band 14	10M	QPSK	25	0	Back	5mm	-	Reduced	23330	793	21.74	23.00	1.337	0.16	0.574	0.767
	LTE Band 14	10M	QPSK	50	0	Back	5mm	-	Reduced	23330	793	21.71	23.00	1.346	0.12	0.571	0.768
	LTE Band 5	10M	QPSK	1	49	Front	5mm	-	Reduced	20525	836.5	21.69	23.00	1.352	0.15	0.621	0.840
58	LTE Band 5	10M	QPSK	1	49	Back	5mm	-	Reduced	20525	836.5	21.69	23.00	1.352	0.06	0.973	1.316
	LTE Band 5	10M	QPSK	1	49	Back	5mm	Headset	Reduced	20525	836.5	21.69	23.00	1.352	-0.01	0.948	1.282
	LTE Band 5	10M	QPSK	1	49	Front	13mm	-	Full	20525	836.5	22.53	24.00	1.403	0.15	0.228	0.320
	LTE Band 5	10M	QPSK	1	49	Back	23mm	-	Full	20525	836.5	22.53	24.00	1.403	-0.01	0.175	0.245
	LTE Band 5	10M	QPSK	25	25	Front	5mm	-	Reduced	20525	836.5	21.67	23.00	1.358	0.15	0.444	0.603
	LTE Band 5	10M	QPSK	25	25	Back	5mm	-	Reduced	20525	836.5	21.67	23.00	1.358	0.11	0.683	0.928
	LTE Band 5	10M	QPSK	50	0	Front	5mm	-	Reduced	20525	836.5	21.66	23.00	1.361	0.04	0.440	0.599
	LTE Band 5	10M	QPSK	50	0	Back	5mm	-	Reduced	20525	836.5	21.66	23.00	1.361	0.16	0.681	0.927
	LTE Band 26	15M	QPSK	1	37	Front	5mm	-	Reduced	26965	841.5	21.96	23.00	1.271	0.06	0.668	0.849
	LTE Band 26	15M	QPSK	1	37	Front	5mm	-	Reduced	26765	821.5	21.84	23.00	1.306	0.1	0.644	0.841
	LTE Band 26	15M	QPSK	1	37	Front	5mm	-	Reduced	26865	831.5	21.88	23.00	1.294	-0.07	0.672	0.870
59	LTE Band 26	15M	QPSK	1	37	Back	5mm	-	Reduced	26965	841.5	21.96	23.00	1.271	0.08	1.050	1.334
	LTE Band 26	15M	QPSK	1	37	Back	5mm	-	Reduced	26765	821.5	21.84	23.00	1.306	0.12	1.020	1.332
	LTE Band 26	15M	QPSK	1	37	Back	5mm	-	Reduced	26865	831.5	21.88	23.00	1.294	-0.05	1.010	1.307
	LTE Band 26	15M	QPSK	1	37	Back	5mm	Headset	Reduced	26965	841.5	21.96	23.00	1.271	-0.12	1.030	1.309



FCC SAR Test Report

Report No. : FA081310

	LTE Band 26	15M	QPSK	1	37	Front	13mm	-	Full	26965	841.5	22.84	24.00	1.306	0.12	0.242	0.316
	LTE Band 26	15M	QPSK	1	37	Front	13mm		Full	26765	821.5	22.66	24.00	1.361	0.11	0.184	0.251
	LTE Band 26	15M	QPSK	1	37	Front	13mm		Full	26865	831.5	22.79	24.00	1.321	0.11	0.168	0.222
	LTE Band 26	15M	QPSK	1	37	Back	23mm	-	Full	26965	841.5	22.84	24.00	1.306	-0.09	0.176	0.230
	LTE Band 26	15M	QPSK	36	20	Front	5mm	-	Reduced	26965	841.5	21.94	23.00	1.276	-0.11	0.479	0.611
	LTE Band 26	15M	QPSK	36	20	Back	5mm	-	Reduced	26965	841.5	21.94	23.00	1.276	-0.01	0.737	0.941
	LTE Band 26	15M	QPSK	36	20	Back	5mm	-	Reduced	26765	821.5	21.82	23.00	1.312	-0.04	0.721	0.946
	LTE Band 26	15M	QPSK	36	20	Back	5mm	-	Reduced	26865	831.5	21.86	23.00	1.300	-0.02	0.735	0.956
	LTE Band 26	15M	QPSK	75	0	Front	5mm	-	Reduced	26965	841.5	21.91	23.00	1.285	0.11	0.476	0.612
	LTE Band 26	15M	QPSK	75	0	Back	5mm	-	Reduced	26965	841.5	21.91	23.00	1.285	-0.02	0.721	0.927
	LTE Band 66	20M	QPSK	1	99	Front	5mm	-	Reduced	132572	1770	17.81	19.00	1.315	0.02	0.716	0.942
	LTE Band 66	20M	QPSK	1	99	Front	5mm	-	Reduced	132072	1720	17.65	19.00	1.365	0.07	0.251	0.343
	LTE Band 66	20M	QPSK	1	99	Front	5mm	-	Reduced	132322	1745	17.59	19.00	1.384	0.15	0.591	0.818
	LTE Band 66	20M	QPSK	1	99	Back	5mm	-	Reduced	132572	1770	17.81	19.00	1.315	0.01	1.090	1.434
	LTE Band 66	20M	QPSK	1	99	Back	5mm	-	Reduced	132072	1720	17.65	19.00	1.365	-0.15	0.589	0.804
60	LTE Band 66	20M	QPSK	1	99	Back	5mm	-	Reduced	132322	1745	17.59	19.00	1.384	0.09	1.040	1.439
	LTE Band 66	20M	QPSK	1	99	Back	5mm	Headset	Reduced	132322	1745	17.59	19.00	1.384	-0.05	0.984	1.361
	LTE Band 66	20M	QPSK	1	99	Front	13mm	-	Full	132572	1770	22.41	24.00	1.442	0.02	0.598	0.862
	LTE Band 66	20M	QPSK	1	99	Front	13mm	-	Full	132072	1720	22.18	24.00	1.521	0.15	0.308	0.468
	LTE Band 66	20M	QPSK	1	99	Front	13mm	-	Full	132322	1745	22.12	24.00	1.542	0.11	0.693	1.068
	LTE Band 66	20M	QPSK	1	99	Back	23mm	-	Full	132572	1770	22.41	24.00	1.442	0.03	0.519	0.748
	LTE Band 66	20M	QPSK	50	50	Front	5mm	-	Reduced	132572	1770	17.78	19.00	1.324	0.07	0.703	0.931
	LTE Band 66	20M	QPSK	50	50	Front	5mm	-	Reduced	132072	1720	17.62	19.00	1.374	0.14	0.238	0.327
	LTE Band 66	20M	QPSK	50	50	Front	5mm	-	Reduced	132322	1745	17.57	19.00	1.390	0.12	0.559	0.777
	LTE Band 66	20M	QPSK	50	50	Back	5mm	-	Reduced	132572	1770	17.78	19.00	1.324	-0.09	1.030	1.364
	LTE Band 66	20M	QPSK	50	50	Back	5mm	-	Reduced	132072	1720	17.62	19.00	1.374	0.11	0.571	0.785
	LTE Band 66	20M	QPSK	50	50	Back	5mm	-	Reduced	132322	1745	17.57	19.00	1.390	0.11	0.992	1.379
	LTE Band 66	20M	QPSK	50	50	Back	5mm	Headset	Reduced	132322	1745	17.57	19.00	1.390	-0.07	0.964	1.340
	LTE Band 66	20M	QPSK	100	0	Front	5mm	-	Reduced	132572	1770	17.76	19.00	1.330	0.16	0.708	0.942
	LTE Band 66	20M	QPSK	100	0	Back	5mm	-	Reduced	132572	1770	17.76	19.00	1.330	0.08	0.959	1.276
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Headset	Reduced	132572	1770	17.76	19.00	1.330	0.01	0.948	1.261
	LTE Band 25	20M	QPSK	1	49	Front	5mm	-	Reduced	26340	1880	16.01	17.00	1.256	0.09	0.836	1.050
	LTE Band 25	20M	QPSK	1	49	Front	5mm	-	Reduced	26140	1860	15.95	17.00	1.274	-0.08	0.815	1.038
	LTE Band 25	20M	QPSK	1	49	Front	5mm	-	Reduced	26590	1905	15.96	17.00	1.271	0.1	0.614	0.780
	LTE Band 25	20M	QPSK	1	49	Back	5mm	-	Reduced	26340	1880	16.01	17.00	1.256	-0.11	1.120	1.407
61	LTE Band 25	20M	QPSK	1	49	Back	5mm	-	Reduced	26140	1860	15.95	17.00	1.274	0.02	1.130	1.439
	LTE Band 25	20M	QPSK	1	49	Back	5mm	-	Reduced	26590	1905	15.96	17.00	1.271	-0.09	1.080	1.372
	LTE Band 25	20M	QPSK	1	49	Back	5mm	Headset	Reduced	26140	1860	15.95	17.00	1.274	-0.11	1.100	1.401
	LTE Band 25	20M	QPSK	1	49	Front	13mm	-	Full	26340	1880	22.84	24.00	1.306	-0.06	0.817	1.067
	LTE Band 25	20M	QPSK	1	49	Front	13mm	-	Full	26140	1860	22.67	24.00	1.358	0.03	0.795	1.080
	LTE Band 25	20M	QPSK	1	49	Front	13mm	-	Full	26590	1905	22.75	24.00	1.334	0.04	0.788	1.051
	LTE Band 25	20M	QPSK	1	49	Back	23mm	-	Full	26340	1880	22.84	24.00	1.306	0.02	0.756	0.987
	LTE Band 25	20M	QPSK	1	49	Back	23mm	-	Full	26140	1860	22.67	24.00	1.358	0.05	0.761	1.034
	LTE Band 25	20M	QPSK	1	49	Back	23mm	-	Full	26590	1905	22.75	24.00	1.334	0.09	0.751	1.001
	LTE Band 25	20M	QPSK	50	0	Front	5mm	-	Reduced	26340	1880	15.98	17.00	1.265	-0.07	0.828	1.047
	LTE Band 25	20M	QPSK	50	0	Front	5mm	-	Reduced	26140	1860	15.92	17.00	1.282	-0.01	0.810	1.039
	LTE Band 25	20M	QPSK	50	0	Front	5mm	-	Reduced	26590	1905	15.94	17.00	1.276	0.13	0.610	0.779
	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	Reduced	26340	1880	15.98	17.00	1.265	-0.03	1.100	1.391

Sporton International (Shenzhen) Inc.

TEL : +86-755-86379589 / FAX : +86-755-86379595

FCC ID : IHDT56ZG1

Issued Date : Sep. 24, 2020

Form version. : 181113



FCC SAR Test Report

Report No. : FA081310

	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	Reduced	26140	1860	15.92	17.00	1.282	0.17	1.090	1.398
	LTE Band 25	20M	QPSK	50	0	Back	5mm	-	Reduced	26590	1905	15.94	17.00	1.276	0.07	1.070	1.366
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Headset	Reduced	26140	1860	15.92	17.00	1.282	0.06	1.080	1.385
	LTE Band 25	20M	QPSK	100	0	Front	5mm	-	Reduced	26340	1880	15.95	17.00	1.274	0.07	0.821	1.046
	LTE Band 25	20M	QPSK	100	0	Back	5mm	-	Reduced	26340	1880	15.95	17.00	1.274	0.1	1.090	1.388
	LTE Band 25	20M	QPSK	100	0	Back	5mm	Headset	Reduced	26340	1880	15.95	17.00	1.274	0.05	1.010	1.286
	LTE Band 7	20M	QPSK	1	99	Front	5mm	-	Reduced	21350	2560	19.80	21.00	1.318	0.13	0.879	1.159
	LTE Band 7	20M	QPSK	1	99	Front	5mm	-	Reduced	20850	2510	19.72	21.00	1.343	-0.05	0.885	1.188
	LTE Band 7	20M	QPSK	1	99	Front	5mm	-	Reduced	21100	2535	19.61	21.00	1.377	0.16	0.891	1.227
	LTE Band 7	20M	QPSK	1	99	Back	5mm	-	Reduced	21350	2560	19.80	21.00	1.318	-0.01	1.010	1.331
	LTE Band 7	20M	QPSK	1	99	Back	5mm	-	Reduced	20850	2510	19.72	21.00	1.343	-0.08	1.020	1.370
	LTE Band 7	20M	QPSK	1	99	Back	5mm	-	Reduced	21100	2535	19.61	21.00	1.377	0.05	1.020	1.405
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Headset	Reduced	21100	2535	19.61	21.00	1.377	0.02	0.504	0.694
	LTE Band 7	20M	QPSK	1	99	Back	5mm	Headset	Reduced	21100	2535	19.61	21.00	1.377	0.08	0.800	1.102
	LTE Band 7	20M	QPSK	1	99	Front	13mm	-	Full	21350	2560	22.90	24.00	1.288	0.02	0.393	0.506
	LTE Band 7	20M	QPSK	1	99	Front	13mm	-	Full	20850	2510	22.54	24.00	1.400	0.08	0.397	0.556
	LTE Band 7	20M	QPSK	1	99	Front	13mm	-	Full	21100	2535	22.83	24.00	1.309	0.13	0.382	0.500
	LTE Band 7	20M	QPSK	1	99	Back	23mm	-	Full	21350	2560	22.90	24.00	1.288	0.15	0.218	0.281
	LTE Band 7	20M	QPSK	50	24	Front	5mm	-	Reduced	21350	2560	19.76	21.00	1.330	-0.11	0.886	1.179
	LTE Band 7	20M	QPSK	50	24	Front	5mm	-	Reduced	20850	2510	19.70	21.00	1.349	0.1	0.902	1.217
	LTE Band 7	20M	QPSK	50	24	Front	5mm	-	Reduced	21100	2535	19.60	21.00	1.380	-0.09	0.915	1.263
	LTE Band 7	20M	QPSK	50	24	Back	5mm	-	Reduced	21350	2560	19.76	21.00	1.330	0.14	1.030	1.370
	LTE Band 7	20M	QPSK	50	24	Back	5mm	-	Reduced	20850	2510	19.70	21.00	1.349	0.18	1.040	1.403
62	LTE Band 7	20M	QPSK	50	24	Back	5mm	-	Reduced	21100	2535	19.60	21.00	1.380	-0.06	1.030	1.422
	LTE Band 7	20M	QPSK	50	24	Front	5mm	Headset	Reduced	21100	2535	19.60	21.00	1.380	0.04	0.540	0.745
	LTE Band 7	20M	QPSK	50	24	Back	5mm	Headset	Reduced	21100	2535	19.60	21.00	1.380	-0.04	0.711	0.981
	LTE Band 7	20M	QPSK	100	0	Front	5mm	-	Reduced	21350	2560	19.73	21.00	1.340	0.05	0.875	1.172
	LTE Band 7	20M	QPSK	100	0	Back	5mm	-	Reduced	21350	2560	19.73	21.00	1.340	0.01	0.996	1.334
	LTE Band 7	20M	QPSK	100	0	Back	5mm	Headset	Reduced	21350	2560	19.73	21.00	1.340	0.03	0.649	0.869



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5mm	-	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	0.06	0.819	0.991
	LTE Band 41	20M	QPSK	1	0	Front	5mm	-	Reduced	39750	2506	22.09	23.00	1.233	62.9	1.006	-0.04	0.832	1.032
	LTE Band 41	20M	QPSK	1	0	Front	5mm	-	Reduced	40185	2549.5	21.98	23.00	1.265	62.9	1.006	-0.03	0.816	1.038
	LTE Band 41	20M	QPSK	1	0	Front	5mm	-	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.06	0.833	1.080
	LTE Band 41	20M	QPSK	1	0	Front	5mm	-	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	-0.1	0.812	0.993
	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	41490	2680	22.20	23.00	1.202	62.9	1.006	-0.09	1.160	1.403
	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	39750	2506	22.09	23.00	1.233	62.9	1.006	-0.1	1.140	1.414
	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	40185	2549.5	21.98	23.00	1.265	62.9	1.006	-0.09	1.120	1.425
63	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.09	1.110	1.439
	LTE Band 41-HPUE	20M	QPSK	1	0	Back	5mm	-	Reduced	40620	2593	22.14	23.00	1.219	42.9	1.009	0.02	0.829	1.020
	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	-0.11	1.170	1.431
	LTE Band 41	20M	QPSK	1	0	Back	5mm	Headset	Reduced	40620	2593	21.90	23.00	1.288	62.9	1.006	-0.08	0.844	1.094
	LTE Band 41	20M	QPSK	1	0	Front	13mm	-	Full	41490	2680	24.02	25.00	1.253	62.9	1.006	-0.03	0.240	0.303
	LTE Band 41	20M	QPSK	1	0	Front	13mm	-	Full	39750	2506	23.54	25.00	1.400	62.9	1.006	-0.09	0.266	0.375
	LTE Band 41	20M	QPSK	1	0	Front	13mm	-	Full	40185	2549.5	23.73	25.00	1.340	62.9	1.006	0.02	0.255	0.344
	LTE Band 41	20M	QPSK	1	0	Front	13mm	-	Full	40620	2593	23.65	25.00	1.365	62.9	1.006	0.05	0.244	0.335
	LTE Band 41	20M	QPSK	1	0	Front	13mm	-	Full	41055	2636.5	23.75	25.00	1.334	62.9	1.006	0.01	0.239	0.321
	LTE Band 41	20M	QPSK	1	0	Back	23mm	-	Full	41490	2680	24.02	25.00	1.253	62.9	1.006	-0.06	0.142	0.179
	LTE Band 41	20M	QPSK	1	0	Back	5mm	-	Reduced	41490(PCC) + 41292(SCC)	2680(PCC) + 2660.2(SCC)	21.96	23.00	1.271	62.9	1.006	0.14	1.080	1.380
	LTE Band 41C	20M	QPSK	1	0	Back	5mm	-	Reduced	39750(PCC) + 39948(SCC)	2506(PCC) + 2525.8(SCC)	21.76	23.00	1.330	62.9	1.006	0.09	0.909	1.217
	LTE Band 41C	20M	QPSK	1	0	Back	5mm	-	Reduced	40185(PCC) + 39987(SCC)	2549.5(PCC) + 2529.7(SCC)	21.73	23.00	1.340	62.9	1.006	0.03	0.955	1.287
	LTE Band 41C	20M	QPSK	1	0	Back	5mm	-	Reduced	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	21.83	23.00	1.309	62.9	1.006	-0.07	0.975	1.284
	LTE Band 41C	20M	QPSK	1	0	Back	5mm	-	Reduced	41055(PCC) + 40857(SCC)	2636.5(PCC) + 2616.7(SCC)	21.89	23.00	1.291	62.9	1.006	-0.01	0.993	1.290
	LTE Band 41	20M	QPSK	50	24	Front	5mm	-	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	-0.03	0.558	0.762
	LTE Band 41	20M	QPSK	50	24	Front	5mm	-	Reduced	39750	2506	21.52	23.00	1.406	62.9	1.006	0.12	0.580	0.820
	LTE Band 41	20M	QPSK	50	24	Front	5mm	-	Reduced	40185	2549.5	21.46	23.00	1.426	62.9	1.006	0.09	0.573	0.822
	LTE Band 41	20M	QPSK	50	24	Front	5mm	-	Reduced	40620	2593	21.57	23.00	1.390	62.9	1.006	-0.09	0.596	0.833
	LTE Band 41	20M	QPSK	50	24	Front	5mm	-	Reduced	41055	2636.5	21.49	23.00	1.416	62.9	1.006	0.02	0.539	0.768
	LTE Band 41	20M	QPSK	50	24	Back	5mm	-	Reduced	41490	2680	21.67	23.00	1.358	62.9	1.006	-0.03	0.744	1.017
	LTE Band 41	20M	QPSK	50	24	Back	5mm	-	Reduced	39750	2506	21.52	23.00	1.406	62.9	1.006	-0.04	0.746	1.055
	LTE Band 41	20M	QPSK	50	24	Back	5mm	-	Reduced	40185	2549.5	21.46	23.00	1.426	62.9	1.006	0.18	0.745	1.068
	LTE Band 41	20M	QPSK	50	24	Back	5mm	-	Reduced	40620	2593	21.57	23.00	1.390	62.9	1.006	0.05	0.783	1.095
	LTE Band 41	20M	QPSK	50	24	Back	5mm	-	Reduced	41055	2636.5	21.49	23.00	1.416	62.9	1.006	0.09	0.745	1.061
	LTE Band 41	20M	QPSK	100	0	Front	5mm	-	Reduced	41490	2680	21.65	23.00	1.365	62.9	1.006	-0.05	0.552	0.758
	LTE Band 41	20M	QPSK	100	0	Back	5mm	-	Reduced	41490	2680	21.65	23.00	1.365	62.9	1.006	-0.01	0.740	1.016



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	DH5 1Mbps	Front	5mm	-	0	2402	8.60	9.00	1.096	76.69	1.086	-0.03	0.040	0.047
	Bluetooth	DH5 1Mbps	Back	5mm	-	0	2402	8.60	9.00	1.096	76.69	1.086	0.18	0.051	0.060
	Bluetooth	DH5 1Mbps	Back	5mm	-	39	2441	8.00	9.00	1.259	76.69	1.086	0.16	0.058	0.079
64	Bluetooth	DH5 1Mbps	Back	5mm	-	78	2480	7.40	9.00	1.445	76.69	1.086	0.01	0.055	0.086

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	11	2462	22.10	23.00	1.230	99.02	1.010	0.01	0.679	0.844
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	1	2412	21.60	23.00	1.380	99.02	1.010	0.11	0.610	0.850
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	6	2437	22.00	23.00	1.259	99.02	1.010	-0.12	0.671	0.853
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	11	2462	22.10	23.00	1.230	99.02	1.010	-0.04	0.821	1.020
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	1	2412	21.60	23.00	1.380	99.02	1.010	0.14	0.796	1.110
65	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	6	2437	22.00	23.00	1.259	99.02	1.010	0.09	0.897	1.141

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	5mm	-	Reduced	62	5310	11.51	13.00	1.409	95.15	1.051	0.12	0.002	0.003
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	-	Reduced	62	5310	11.51	13.00	1.409	95.15	1.051	0.06	0.741	1.098
66	WLAN5.3GHz	802.11n-HT40 MCS0	Back	5mm	-	Reduced	54	5270	11.50	13.00	1.413	95.15	1.051	-0.09	0.792	1.176
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	13mm	-	Full	62	5310	17.88	19.50	1.452	95.15	1.051	-	n/a	n/a
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	23mm	-	Full	54	5270	17.80	19.50	1.479	95.15	1.051	0.03	0.727	1.130
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	23mm	-	Full	62	5310	17.88	19.50	1.452	95.15	1.051	0.05	0.701	1.070
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	5mm	-	Reduced	134	5670	10.44	12.00	1.432	95.15	1.051	-	n/a	n/a
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	-	Reduced	134	5670	10.44	12.00	1.432	95.15	1.051	0.03	0.544	0.819
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	-	Reduced	102	5510	10.25	12.00	1.496	95.15	1.051	0.12	0.619	0.973
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	-	Reduced	110	5550	10.37	12.00	1.455	95.15	1.051	-0.04	0.771	1.179
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	13mm	-	Full	134	5670	18.44	20.00	1.432	95.15	1.051	-	n/a	n/a
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	23mm	-	Full	134	5670	18.44	20.00	1.432	95.15	1.051	0.02	0.701	1.055
67	WLAN5.5GHz	802.11n-HT40 MCS0	Back	23mm	-	Full	102	5510	18.25	20.00	1.496	95.15	1.051	0.04	0.762	1.198
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	23mm	-	Full	110	5550	18.30	20.00	1.479	95.15	1.051	-0.02	0.760	1.181
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	-	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	0.01	0.002	0.003
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Reduced	165	5825	12.39	14.00	1.449	98.13	1.019	-0.03	0.789	1.165
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Reduced	149	5745	11.97	13.50	1.422	98.13	1.019	0.15	0.725	1.051
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Reduced	157	5785	12.20	14.00	1.514	98.13	1.019	0.02	0.737	1.137
	WLAN5.8GHz	802.11a 6Mbps	Front	13mm	-	Full	165	5825	19.39	21.00	1.449	98.13	1.019	-	n/a	n/a
68	WLAN5.8GHz	802.11a 6Mbps	Back	23mm	-	Full	165	5825	19.39	21.00	1.449	98.13	1.019	-0.01	0.810	1.196
	WLAN5.8GHz	802.11a 6Mbps	Back	23mm	-	Full	149	5745	18.97	20.50	1.422	98.13	1.019	0.03	0.811	1.175
	WLAN5.8GHz	802.11a 6Mbps	Back	23mm	-	Full	157	5785	19.25	21.00	1.496	98.13	1.019	0.01	0.782	1.192

15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
69	GSM850	GPRS(2 Tx slots)	Front	0mm	Full	128	824.2	31.46	32.00	1.132	-0.07	1.030	1.166
	GSM850	GPRS(2 Tx slots)	Front	0mm	Full	189	836.4	31.28	32.00	1.180	0.03	0.926	1.093
	GSM850	GPRS(2 Tx slots)	Front	0mm	Full	251	848.8	31.16	32.00	1.213	0.12	0.659	0.800
	GSM850	GPRS(2 Tx slots)	Back	0mm	Full	128	824.2	31.46	32.00	1.132	0.05	0.775	0.878
	GSM850	GPRS(2 Tx slots)	Bottom Side	0mm	Full	128	824.2	31.46	32.00	1.132	-0.06	0.425	0.481
	GSM1900	GPRS(2 Tx slots)	Front	0mm	Reduced	661	1880	24.48	26.00	1.419	0.01	1.800	2.554
	GSM1900	GPRS(2 Tx slots)	Front	0mm	Reduced	512	1850.2	24.41	26.00	1.442	0.13	1.700	2.452
	GSM1900	GPRS(2 Tx slots)	Front	0mm	Reduced	810	1909.8	24.43	26.00	1.435	-0.09	1.670	2.397
	GSM1900	GPRS(2 Tx slots)	Back	0mm	Reduced	661	1880	24.48	26.00	1.419	0.03	2.170	3.079
	GSM1900	GPRS(2 Tx slots)	Back	0mm	Reduced	512	1850.2	24.41	26.00	1.442	-0.01	2.280	3.288
	GSM1900	GPRS(2 Tx slots)	Back	0mm	Reduced	810	1909.8	24.43	26.00	1.435	0.03	2.090	3.000
70	GSM1900	GPRS(2 Tx slots)	Bottom Side	0mm	Reduced	661	1880	24.48	26.00	1.419	0.06	2.520	3.576
	GSM1900	GPRS(2 Tx slots)	Bottom Side	0mm	Reduced	512	1850.2	24.41	26.00	1.442	0.08	2.370	3.418
	GSM1900	GPRS(2 Tx slots)	Bottom Side	0mm	Reduced	810	1909.8	24.43	26.00	1.435	0.17	2.310	3.316
	GSM1900	GPRS(2 Tx slots)	Front	5mm	Full	661	1880	28.51	29.50	1.256	0.06	1.090	1.369
	GSM1900	GPRS(2 Tx slots)	Back	10mm	Full	661	1880	28.51	29.50	1.256	0.07	0.958	1.203
	GSM1900	GPRS(2 Tx slots)	Bottom Side	11mm	Full	661	1880	28.51	29.50	1.256	-0.06	1.170	1.470
	GSM1900	GPRS(2 Tx slots)	Bottom Side	11mm	Full	512	1850.2	28.32	29.50	1.312	0.01	1.180	1.548
	GSM1900	GPRS(2 Tx slots)	Bottom Side	11mm	Full	810	1909.8	28.50	29.50	1.259	0.13	1.140	1.435



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Back	0mm	Full	4233	846.6	23.13	24.00	1.222	-0.03	1.880	2.297
71	WCDMA V	RMC 12.2Kbps	Back	0mm	Full	4132	826.4	22.74	24.00	1.337	0.06	1.910	2.553
	WCDMA V	RMC 12.2Kbps	Back	0mm	Full	4182	836.4	23.08	24.00	1.236	0.03	2.010	2.484
	WCDMA V	RMC 12.2Kbps	Bottom Side	0mm	Full	4233	846.6	23.13	24.00	1.222	-0.12	1.360	1.662
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1513	1752.6	19.37	20.50	1.297	0.11	1.800	2.335
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1312	1712.4	19.27	20.50	1.327	0.07	1.650	2.190
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Reduced	1413	1732.6	19.20	20.50	1.349	-0.11	1.760	2.374
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1513	1752.6	19.37	20.50	1.297	0.04	2.490	3.230
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1312	1712.4	19.27	20.50	1.327	-0.08	2.470	3.279
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Reduced	1413	1732.6	19.20	20.50	1.349	0.01	2.540	3.426
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1513	1752.6	19.37	20.50	1.297	0.11	2.630	3.412
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1312	1712.4	19.27	20.50	1.327	0.04	2.520	3.345
72	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1413	1732.6	19.20	20.50	1.349	0.09	2.650	3.575
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Full	1513	1752.6	22.77	24.00	1.327	0.08	1.390	1.845
	WCDMA IV	RMC 12.2Kbps	Back	10mm	Full	1513	1752.6	22.77	24.00	1.327	0.17	1.150	1.527
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Full	1513	1752.6	22.77	24.00	1.327	0.06	1.410	1.872
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Full	1312	1712.4	22.72	24.00	1.343	0.07	1.160	1.558
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Full	1413	1732.6	22.68	24.00	1.355	0.02	1.200	1.626
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9538	1907.6	18.99	19.50	1.125	0.1	2.010	2.260
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9262	1852.4	18.90	19.50	1.148	0.08	1.830	2.101
	WCDMA II	RMC 12.2Kbps	Front	0mm	Reduced	9400	1880	18.95	19.50	1.135	-0.11	1.940	2.202
	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9538	1907.6	18.99	19.50	1.125	0.09	2.660	2.991
	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9262	1852.4	18.90	19.50	1.148	0.03	2.550	2.928
	WCDMA II	RMC 12.2Kbps	Back	0mm	Reduced	9400	1880	18.95	19.50	1.135	-0.05	2.720	3.087
73	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Reduced	9538	1907.6	18.99	19.50	1.125	-0.02	3.180	3.576
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Reduced	9262	1852.4	18.90	19.50	1.148	0.05	2.900	3.330
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Reduced	9400	1880	18.95	19.50	1.135	0.12	2.890	3.280
	WCDMA II	RMC 12.2Kbps	Front	5mm	Full	9538	1907.6	23.28	24.00	1.180	0.14	2.030	2.396
	WCDMA II	RMC 12.2Kbps	Front	5mm	Full	9262	1852.4	23.08	24.00	1.236	0.05	1.810	2.237
	WCDMA II	RMC 12.2Kbps	Front	5mm	Full	9400	1880	23.11	24.00	1.227	0.02	1.950	2.394
	WCDMA II	RMC 12.2Kbps	Back	10mm	Full	9538	1907.6	23.28	24.00	1.180	0.16	1.650	1.948
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Full	9538	1907.6	23.28	24.00	1.180	0.08	2.300	2.715
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Full	9262	1852.4	23.08	24.00	1.236	0.08	1.870	2.311
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Full	9400	1880	23.11	24.00	1.227	0.04	2.140	2.627



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	CDMA2000 BC0	RTAP 153.6Kbps	Back	0mm	Full	777	848.31	24.08	25.00	1.236	0.03	1.980	2.447
74	CDMA2000 BC0	RTAP 153.6Kbps	Back	0mm	Full	1013	824.7	23.96	25.00	1.271	0.05	2.010	2.554
	CDMA2000 BC0	RTAP 153.6Kbps	Back	0mm	Full	384	836.52	24.04	25.00	1.247	0.01	2.020	2.520
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	0mm	Full	777	848.31	24.08	25.00	1.236	-0.06	1.300	1.607
	CDMA2000 BC10	RTAP 153.6Kbps	Back	0mm	Full	684	823.1	23.94	25.00	1.276	0.08	1.880	2.400
	CDMA2000 BC10	RTAP 153.6Kbps	Back	0mm	Full	476	817.9	23.79	25.00	1.321	0.12	1.840	2.431
75	CDMA2000 BC10	RTAP 153.6Kbps	Back	0mm	Full	580	820.5	23.88	25.00	1.294	0.09	1.930	2.498
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	0mm	Full	684	823.1	23.94	25.00	1.276	-0.02	1.060	1.353
	CDMA2000 BC1	RTAP 153.6Kbps	Front	0mm	Reduced	600	1880	19.60	20.00	1.096	0.07	1.610	1.765
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0mm	Reduced	600	1880	19.60	20.00	1.096	0.06	1.920	2.105
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0mm	Reduced	25	1851.25	19.53	20.00	1.114	0.09	2.200	2.451
	CDMA2000 BC1	RTAP 153.6Kbps	Back	0mm	Reduced	1175	1908.75	19.59	20.00	1.099	0.03	2.040	2.242
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	600	1880	19.60	20.00	1.096	-0.02	2.680	2.939
76	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	25	1851.25	19.53	20.00	1.114	-0.03	2.760	3.075
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	1175	1908.75	19.59	20.00	1.099	-0.06	2.660	2.923
	CDMA2000 BC1	RTAP 153.6Kbps	Front	5mm	Full	600	1880	24.17	25.00	1.211	0.17	1.060	1.283
	CDMA2000 BC1	RTAP 153.6Kbps	Back	10mm	Full	600	1880	24.17	25.00	1.211	0.08	1.600	1.937
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	11mm	Full	600	1880	24.17	25.00	1.211	0.15	2.010	2.433
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	11mm	Full	25	1851.25	24.03	25.00	1.250	0.03	1.780	2.225
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	11mm	Full	1175	1908.75	24.10	25.00	1.230	0.11	2.060	2.534



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
77	LTE Band 13	10M	QPSK	1	25	Back	0mm	Full	23230	782	22.60	24.00	1.380	0.08	1.930	2.664
	LTE Band 13	10M	QPSK	25	12	Back	0mm	Full	23230	782	21.70	23.00	1.349	0.11	1.100	1.484
	LTE Band 13	10M	QPSK	50	0	Back	0mm	Full	23230	782	21.65	23.00	1.365	-0.1	1.080	1.474
78	LTE Band 14	10M	QPSK	1	49	Back	0mm	Full	23330	793	22.70	24.00	1.349	0.1	1.850	2.496
	LTE Band 14	10M	QPSK	25	0	Back	0mm	Full	23330	793	21.70	23.00	1.349	0.12	1.052	1.419
	LTE Band 14	10M	QPSK	50	0	Back	0mm	Full	23330	793	21.69	23.00	1.352	0.01	1.037	1.402
79	LTE Band 5	10M	QPSK	1	49	Back	0mm	Full	20525	836.5	22.53	24.00	1.403	0.02	1.770	2.483
	LTE Band 5	10M	QPSK	1	49	Bottom Side	0mm	Full	20525	836.5	22.53	24.00	1.403	0.06	1.210	1.697
	LTE Band 5	10M	QPSK	25	25	Back	0mm	Full	20525	836.5	21.62	23.00	1.374	-0.08	1.046	1.437
	LTE Band 5	10M	QPSK	25	25	Bottom Side	0mm	Full	20525	836.5	21.62	23.00	1.374	0.06	0.702	0.965
	LTE Band 5	10M	QPSK	50	0	Back	0mm	Full	20525	836.5	21.65	23.00	1.365	0.01	0.709	0.967
80	LTE Band 26	15M	QPSK	1	37	Back	0mm	Full	26965	841.5	22.84	24.00	1.306	0.06	1.740	2.273
	LTE Band 26	15M	QPSK	1	37	Back	0mm	Full	26765	821.5	22.66	24.00	1.361	-0.08	1.620	2.206
	LTE Band 26	15M	QPSK	1	37	Back	0mm	Full	26865	831.5	22.79	24.00	1.321	0.13	1.650	2.180
	LTE Band 26	15M	QPSK	1	37	Bottom Side	0mm	Full	26965	841.5	22.84	24.00	1.306	0.05	1.400	1.829
	LTE Band 26	15M	QPSK	36	20	Back	0mm	Full	26965	841.5	21.91	23.00	1.285	-0.02	0.985	1.266
	LTE Band 26	15M	QPSK	36	20	Bottom Side	0mm	Full	26965	841.5	21.91	23.00	1.285	-0.1	0.805	1.035
	LTE Band 26	15M	QPSK	75	0	Back	0mm	Full	26965	841.5	21.82	23.00	1.312	-0.11	0.803	1.054
	LTE Band 66	20M	QPSK	1	99	Front	0mm	Reduced	132572	1770	18.84	20.00	1.306	0.14	1.430	1.868
	LTE Band 66	20M	QPSK	1	99	Back	0mm	Reduced	132572	1770	18.84	20.00	1.306	0.13	2.150	2.808
	LTE Band 66	20M	QPSK	1	99	Back	0mm	Reduced	132072	1720	18.78	20.00	1.324	0.06	2.010	2.662
	LTE Band 66	20M	QPSK	1	99	Back	0mm	Reduced	132322	1745	18.63	20.00	1.371	0.17	2.180	2.989
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0mm	Reduced	132572	1770	18.84	20.00	1.306	0.14	2.250	2.939
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0mm	Reduced	132072	1720	18.78	20.00	1.324	0.13	1.360	1.801
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0mm	Reduced	132322	1745	18.63	20.00	1.371	-0.02	2.350	3.222
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Full	132572	1770	22.41	24.00	1.442	0.01	1.320	1.904
	LTE Band 66	20M	QPSK	1	99	Back	10mm	Full	132572	1770	22.41	24.00	1.442	-0.15	1.030	1.485
	LTE Band 66	20M	QPSK	1	99	Bottom Side	11mm	Full	132572	1770	22.41	24.00	1.442	0.09	1.230	1.774
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Full	132072	1720	22.18	24.00	1.521	-0.06	0.507	0.771
	LTE Band 66	20M	QPSK	1	99	Front	5mm	Full	132322	1745	22.12	24.00	1.542	0.03	1.370	2.112
	LTE Band 66	20M	QPSK	50	50	Front	0mm	Reduced	132572	1770	18.82	20.00	1.312	-0.09	1.450	1.903
	LTE Band 66	20M	QPSK	50	50	Back	0mm	Reduced	132572	1770	18.82	20.00	1.312	0.07	2.180	2.861
	LTE Band 66	20M	QPSK	50	50	Back	0mm	Reduced	132072	1720	18.75	20.00	1.334	0.09	2.050	2.734
	LTE Band 66	20M	QPSK	50	50	Back	0mm	Reduced	132322	1745	18.61	20.00	1.377	0.11	2.210	3.044
	LTE Band 66	20M	QPSK	50	50	Bottom Side	0mm	Reduced	132572	1770	18.82	20.00	1.312	-0.04	2.290	3.005
	LTE Band 66	20M	QPSK	50	50	Bottom Side	0mm	Reduced	132072	1720	18.75	20.00	1.334	0.02	1.370	1.827
81	LTE Band 66	20M	QPSK	50	50	Bottom Side	0mm	Reduced	132322	1745	18.61	20.00	1.377	0.02	2.390	3.292
	LTE Band 66	20M	QPSK	100	0	Back	0mm	Reduced	132572	1770	18.80	20.00	1.318	-0.11	2.130	2.808
	LTE Band 66	20M	QPSK	100	0	Bottom Side	0mm	Reduced	132572	1770	18.80	20.00	1.318	0.02	2.210	2.913
	LTE Band 25	20M	QPSK	1	49	Front	0mm	Reduced	26340	1880	18.53	19.50	1.250	-0.07	1.600	2.000
	LTE Band 25	20M	QPSK	1	49	Front	0mm	Reduced	26140	1860	18.42	19.50	1.282	0.04	1.580	2.026



FCC SAR Test Report

Report No. : FA081310

	LTE Band 25	20M	QPSK	1	49	Front	0mm	Reduced	26590	1905	18.37	19.50	1.297	-0.01	1.600	2.075
	LTE Band 25	20M	QPSK	1	49	Back	0mm	Reduced	26340	1880	18.53	19.50	1.250	0.04	2.280	2.851
	LTE Band 25	20M	QPSK	1	49	Back	0mm	Reduced	26140	1860	18.42	19.50	1.282	0.04	2.320	2.975
	LTE Band 25	20M	QPSK	1	49	Back	0mm	Reduced	26590	1905	18.37	19.50	1.297	-0.1	2.140	2.776
	LTE Band 25	20M	QPSK	1	49	Bottom Side	0mm	Reduced	26340	1880	18.53	19.50	1.250	0.04	2.500	3.126
	LTE Band 25	20M	QPSK	1	49	Bottom Side	0mm	Reduced	26140	1860	18.42	19.50	1.282	-0.01	2.500	3.206
	LTE Band 25	20M	QPSK	1	49	Bottom Side	0mm	Reduced	26590	1905	18.37	19.50	1.297	0.12	2.440	3.165
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Full	26340	1880	22.84	24.00	1.306	0.13	1.050	1.371
	LTE Band 25	20M	QPSK	1	49	Back	10mm	Full	26340	1880	22.84	24.00	1.306	-0.03	0.746	0.974
	LTE Band 25	20M	QPSK	1	49	Bottom Side	11mm	Full	26340	1880	22.84	24.00	1.306	0.17	0.986	1.288
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Full	26140	1860	22.67	24.00	1.358	0.07	0.936	1.271
	LTE Band 25	20M	QPSK	1	49	Front	5mm	Full	26590	1905	22.75	24.00	1.334	0.18	0.996	1.328
	LTE Band 25	20M	QPSK	50	0	Front	0mm	Reduced	26340	1880	18.50	19.50	1.259	0.18	1.620	2.039
	LTE Band 25	20M	QPSK	50	0	Front	0mm	Reduced	26140	1860	18.40	19.50	1.288	0.18	1.620	2.087
	LTE Band 25	20M	QPSK	50	0	Front	0mm	Reduced	26590	1905	18.35	19.50	1.303	0.03	1.600	2.085
	LTE Band 25	20M	QPSK	50	0	Back	0mm	Reduced	26340	1880	18.50	19.50	1.259	-0.08	2.360	2.971
	LTE Band 25	20M	QPSK	50	0	Back	0mm	Reduced	26140	1860	18.40	19.50	1.288	0.17	2.410	3.105
	LTE Band 25	20M	QPSK	50	0	Back	0mm	Reduced	26590	1905	18.35	19.50	1.303	-0.12	2.250	2.932
	LTE Band 25	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26340	1880	18.50	19.50	1.259	-0.09	2.510	3.160
82	LTE Band 25	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26140	1860	18.40	19.50	1.288	0.08	2.520	3.246
	LTE Band 25	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26590	1905	18.35	19.50	1.303	-0.04	2.480	3.232
	LTE Band 25	20M	QPSK	100	0	Front	0mm	Reduced	26340	1880	18.48	19.50	1.265	-0.05	1.620	2.049
	LTE Band 25	20M	QPSK	100	0	Back	0mm	Reduced	26340	1880	18.48	19.50	1.265	0.03	2.270	2.871
	LTE Band 25	20M	QPSK	100	0	Bottom Side	0mm	Reduced	26340	1880	18.48	19.50	1.265	0.15	2.450	3.099
	LTE Band 7	20M	QPSK	1	99	Front	0mm	Reduced	21350	2560	22.28	23.50	1.324	0.02	2.320	3.072
	LTE Band 7	20M	QPSK	1	99	Front	0mm	Reduced	20850	2510	22.13	23.50	1.371	0.06	2.510	3.441
	LTE Band 7	20M	QPSK	1	99	Front	0mm	Reduced	21100	2535	22.16	23.50	1.361	0.08	2.260	3.077
	LTE Band 7	20M	QPSK	1	99	Back	0mm	Reduced	21350	2560	22.28	23.50	1.324	-0.03	2.580	3.417
83	LTE Band 7	20M	QPSK	1	99	Back	0mm	Reduced	20850	2510	22.13	23.50	1.371	-0.03	2.580	3.537
	LTE Band 7	20M	QPSK	1	99	Back	0mm	Reduced	21100	2535	22.16	23.50	1.361	0.02	2.540	3.458
	LTE Band 7	20M	QPSK	1	99	Bottom Side	0mm	Reduced	21350	2560	22.28	23.50	1.324	0.15	2.510	3.324
	LTE Band 7	20M	QPSK	1	99	Bottom Side	0mm	Reduced	20850	2510	22.13	23.50	1.371	0.08	2.480	3.400
	LTE Band 7	20M	QPSK	1	99	Bottom Side	0mm	Reduced	21100	2535	22.16	23.50	1.361	0.01	2.570	3.499
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Full	21350	2560	22.90	24.00	1.288	-0.05	0.507	0.653
	LTE Band 7	20M	QPSK	1	99	Back	8mm	Full	21350	2560	22.90	24.00	1.288	0.16	0.326	0.420
	LTE Band 7	20M	QPSK	1	99	Bottom Side	6mm	Full	21350	2560	22.90	24.00	1.288	-0.01	0.313	0.403
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Full	20850	2510	22.54	24.00	1.400	-0.08	0.541	0.757
	LTE Band 7	20M	QPSK	1	99	Front	5mm	Full	21100	2535	22.83	24.00	1.309	0.05	0.517	0.677
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Reduced	21350	2560	21.82	23.00	1.312	0.14	1.660	2.178
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Reduced	20850	2510	21.68	23.00	1.355	0.07	1.780	2.412
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Reduced	21100	2535	21.79	23.00	1.321	0.17	1.700	2.246
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Reduced	21350	2560	21.82	23.00	1.312	-0.04	1.840	2.414
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Reduced	20850	2510	21.68	23.00	1.355	0.15	1.850	2.507
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Reduced	21100	2535	21.79	23.00	1.321	-0.12	1.850	2.444
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0mm	Reduced	21350	2560	21.82	23.00	1.312	0.15	1.820	2.388
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0mm	Reduced	20850	2510	21.68	23.00	1.355	-0.11	1.800	2.439
	LTE Band 7	20M	QPSK	50	24	Bottom Side	0mm	Reduced	21100	2535	21.79	23.00	1.321	-0.01	1.850	2.444



FCC SAR Test Report

Report No. : FA081310

	LTE Band 7	20M	QPSK	100	0	Front	0mm	Reduced	21350	2560	21.79	23.00	1.321	0.18	1.640	2.167
	LTE Band 7	20M	QPSK	100	0	Back	0mm	Reduced	21350	2560	21.79	23.00	1.321	-0.01	1.840	2.431
	LTE Band 7	20M	QPSK	100	0	Bottom Side	0mm	Reduced	21350	2560	21.79	23.00	1.321	0.08	1.830	2.418



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Full	41490	2680	24.02	25.00	1.253	62.9	1.006	0.13	1.380	1.740
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Full	41490	2680	24.02	25.00	1.253	62.9	1.006	-0.08	1.730	2.181
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Full	39750	2506	23.54	25.00	1.400	62.9	1.006	0.08	1.960	2.760
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Full	40185	2549.5	23.73	25.00	1.340	62.9	1.006	-0.1	1.910	2.574
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Full	40620	2593	23.65	25.00	1.365	62.9	1.006	-0.06	1.750	2.402
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Full	41055	2636.5	23.75	25.00	1.334	62.9	1.006	-0.11	1.530	2.053
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0mm	Full	41490	2680	24.02	25.00	1.253	62.9	1.006	0.04	1.210	1.525
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Full	41490(PCC) + 41292(SCC)	2680(PCC) + 2660.2(SCC)	23.99	25.00	1.262	62.9	1.006	-0.05	1.500	1.904
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Full	39750(PCC) + 39948(SCC)	2506(PCC) + 2525.8(SCC)	23.63	25.00	1.371	62.9	1.006	-0.08	1.730	2.386
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Full	40185(PCC) + 39987(SCC)	2549.5(PCC) + 2529.7(SCC)	23.81	25.00	1.315	62.9	1.006	0.07	1.750	2.315
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Full	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	23.82	25.00	1.312	62.9	1.006	0.04	1.680	2.218
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Full	41055(PCC) + 40857(SCC)	2636.5(PCC) + 2616.7(SCC)	23.97	25.00	1.268	62.9	1.006	-0.01	1.520	1.938
	LTE Band 41	20M	QPSK	50	24	Front	0mm	Full	41490	2680	21.51	23.00	1.409	62.9	1.006	-0.06	0.753	1.068
	LTE Band 41	20M	QPSK	50	24	Back	0mm	Full	41490	2680	21.51	23.00	1.409	62.9	1.006	0.08	0.952	1.350
	LTE Band 41	20M	QPSK	50	24	Bottom Side	0mm	Full	41490	2680	21.51	23.00	1.409	62.9	1.006	0.18	0.533	0.756
	LTE Band 41	20M	QPSK	100	0	Back	0mm	Full	41490	2680	21.47	23.00	1.422	62.9	1.006	0.01	0.939	1.344
	LTE Band 41-HPUE	20M	QPSK	1	0	Front	0mm	Full	41490	2680	25.89	27.00	1.291	42.9	1.009	0.18	1.590	2.072
	LTE Band 41-HPUE	20M	QPSK	1	0	Front	0mm	Full	39750	2506	25.40	27.00	1.445	42.9	1.009	0.07	2.180	3.179
	LTE Band 41-HPUE	20M	QPSK	1	0	Front	0mm	Full	40185	2549.5	25.64	27.00	1.368	42.9	1.009	0.09	2.090	2.884
	LTE Band 41-HPUE	20M	QPSK	1	0	Front	0mm	Full	40620	2593	25.58	27.00	1.387	42.9	1.009	-0.05	2.010	2.812
	LTE Band 41-HPUE	20M	QPSK	1	0	Front	0mm	Full	41055	2636.5	25.60	27.00	1.380	42.9	1.009	0.08	1.850	2.577
	LTE Band 41-HPUE	20M	QPSK	1	0	Back	0mm	Full	41490	2680	25.89	27.00	1.291	42.9	1.009	0.16	1.790	2.332
84	LTE Band 41-HPUE	20M	QPSK	1	0	Back	0mm	Full	39750	2506	25.40	27.00	1.445	42.9	1.009	0.12	2.450	3.573
	LTE Band 41-HPUE	20M	QPSK	1	0	Back	0mm	Full	40185	2549.5	25.64	27.00	1.368	42.9	1.009	0.08	2.450	3.381
	LTE Band 41-HPUE	20M	QPSK	1	0	Back	0mm	Full	40620	2593	25.58	27.00	1.387	42.9	1.009	-0.12	2.370	3.316
	LTE Band 41-HPUE	20M	QPSK	1	0	Back	0mm	Full	41055	2636.5	25.60	27.00	1.380	42.9	1.009	0.07	1.900	2.646
	LTE Band 41-HPUE	20M	QPSK	1	0	Bottom Side	0mm	Full	41490	2680	25.89	27.00	1.291	42.9	1.009	-0.09	1.290	1.681
	LTE Band 41-HPUE	20M	QPSK	50	24	Front	0mm	Full	41490	2680	24.43	26.00	1.435	42.9	1.009	0.18	1.090	1.579
	LTE Band 41-HPUE	20M	QPSK	50	24	Back	0mm	Full	41490	2680	24.43	26.00	1.435	42.9	1.009	-0.01	1.280	1.854
	LTE Band 41-HPUE	20M	QPSK	50	24	Bottom Side	0mm	Full	41490	2680	24.43	26.00	1.435	42.9	1.009	0.16	0.905	1.311
	LTE Band 41-HPUE	20M	QPSK	100	0	Front	0mm	Full	41490	2680	24.42	26.00	1.439	42.9	1.009	0.15	1.070	1.553
	LTE Band 41-HPUE	20M	QPSK	100	0	Back	0mm	Full	41490	2680	24.42	26.00	1.439	42.9	1.009	-0.01	1.230	1.786



<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	0mm	Full	46	5230	17.73	19.50	1.503	95.15	1.051	0.12	2.050	3.239
85	WLAN5.2GHz	802.11n-HT40 MCS0	Back	0mm	Full	38	5190	17.68	19.50	1.521	95.15	1.051	0.03	2.030	3.244
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	46	5230	16.22	18.00	1.507	95.15	1.051	0.04	1.500	2.375
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	38	5190	16.16	18.00	1.528	95.15	1.051	0.18	1.460	2.344
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Full	62	5310	17.88	19.50	1.452	95.15	1.051	-0.07	0.038	0.058
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Full	62	5310	17.88	19.50	1.452	95.15	1.051	0.03	2.160	3.297
86	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Full	54	5270	17.80	19.50	1.479	95.15	1.051	0.05	2.180	3.389
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Side	0mm	Full	62	5310	17.88	19.50	1.452	95.15	1.051	0.12	0.004	0.006
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Full	62	5310	17.88	19.50	1.452	95.15	1.051	0.05	0.012	0.018
	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0mm	Full	62	5310	17.88	19.50	1.452	95.15	1.051	-0.09	0.128	0.195
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Reduced-Simultaneous	62	5310	16.22	18.00	1.507	95.15	1.051	0.05	0.026	0.041
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	62	5310	16.22	18.00	1.507	95.15	1.051	0.13	1.500	2.375
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	54	5270	16.20	18.00	1.514	95.15	1.051	0.07	1.490	2.370
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Side	0mm	Reduced-Simultaneous	62	5310	16.22	18.00	1.507	95.15	1.051	-0.08	0.003	0.004
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Reduced-Simultaneous	62	5310	16.22	18.00	1.507	95.15	1.051	0.12	0.008	0.012
	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0mm	Reduced-Simultaneous	62	5310	16.22	18.00	1.507	95.15	1.051	0.04	0.082	0.130
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Full	134	5670	18.44	20.00	1.432	95.15	1.051	0.01	0.037	0.056
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced	134	5670	17.44	19.00	1.432	95.15	1.051	-0.05	1.970	2.965
87	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced	102	5510	17.25	19.00	1.496	95.15	1.051	0.06	2.140	3.365
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced	110	5550	17.30	19.00	1.479	95.15	1.051	0.11	2.070	3.218
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Side	0mm	Full	134	5670	18.44	20.00	1.432	95.15	1.051	0.04	0.084	0.126
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Full	134	5670	18.44	20.00	1.432	95.15	1.051	0.09	0.012	0.018
	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0mm	Full	134	5670	18.44	20.00	1.432	95.15	1.051	-0.02	0.280	0.421
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	Full	134	5670	18.44	20.00	1.432	95.15	1.051	0.06	1.120	1.686
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	Full	102	5510	18.25	20.00	1.496	95.15	1.051	0.03	1.230	1.934
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	5mm	Full	110	5550	18.30	20.00	1.479	95.15	1.051	0.12	1.180	1.834
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Reduced-Simultaneous	134	5670	15.39	17.00	1.449	95.15	1.051	-	n/a	n/a
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	134	5670	15.39	17.00	1.449	95.15	1.051	0.03	1.090	1.660
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	102	5510	15.22	17.00	1.507	95.15	1.051	0.04	1.030	1.631
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Reduced-Simultaneous	110	5550	15.22	17.00	1.507	95.15	1.051	0.05	1.040	1.647
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Side	0mm	Reduced-Simultaneous	134	5670	15.39	17.00	1.449	95.15	1.051	-0.02	0.057	0.087
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Reduced-Simultaneous	134	5670	15.39	17.00	1.449	95.15	1.051	0.01	0.008	0.012
	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0mm	Reduced-Simultaneous	134	5670	15.39	17.00	1.449	95.15	1.051	0.11	0.124	0.189
88	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced	165	5825	18.39	20.00	1.449	98.13	1.019	0.06	2.140	3.159
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced	149	5745	17.97	19.50	1.422	98.13	1.019	0.02	2.130	3.087
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced	157	5785	18.20	20.00	1.514	98.13	1.019	0.14	2.040	3.146
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Full	165	5825	19.39	21.00	1.449	98.13	1.019	0.02	0.886	1.308
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Full	149	5745	18.97	20.50	1.422	98.13	1.019	0.11	0.877	1.271
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Full	157	5785	19.25	21.00	1.496	98.13	1.019	-0.06	0.821	1.252
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced-Simultaneous	165	5825	16.22	18.00	1.507	98.13	1.019	-0.02	1.330	2.042
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced-Simultaneous	149	5745	15.58	17.50	1.556	98.13	1.019	0.05	1.280	2.029
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Reduced-Simultaneous	157	5785	16.04	18.00	1.570	98.13	1.019	0.03	1.310	2.096

15.5 TDD LTE Band 41(HPUE) Linearity Data Analysis

LTE Band 41(HPUE)-Linearity Data for Hotspot/Body-worn		
	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	23.00	23.00
Reported 1g SAR (W/kg)	1.439	1.020
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	126.30	86.39
Linearity SAR (W/kg)	0.984	
% deviation from expected linearity		3.62%

General Note:

1. The device can adjust uplink/downlink configuration automatically according to the transmitting power class level for LTE band 41.
2. According to TCB Workshop May 2017, Rel. 14 has introduced HPUE Power Class 2 for Band 41. HPUE Power Class 2 does not support uplink downlink configurations 0 and 6.
3. Power class 3 is expected to be the dominant use configuration; therefore, SAR should be tested as normally required.
4. Power class 2 is tested using the highest SAR test configuration in power class 3 of each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in power class 2.
5. Separate SAR testing for Power Class 2 is not required when
 - the reported SAR vs. output power can be linearly scaled with < 10%
 - discrepancy between power classes and all reported 1g SAR are < 1.4 W/kg (The same procedures should be adapted for measurements according to extremity limits by applying a factor of 2.5 for extremity exposure.)

15.6 Repeated SAR Measurement

<1g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	-0.03	0.964	1	1.092
2nd	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm	Reduced	11	2462	20.00	20.50	1.122	99.02	1.010	-0.09	0.920	1.048	1.043
1st	WCDMA IV					RMC 12.2Kbps	Back	5mm	Reduced	1513	1752.6	15.87	17.00	1.297		1.000	0.08	1.110	1	1.440
2nd	WCDMA IV					RMC 12.2Kbps	Back	5mm	Reduced	1513	1752.6	15.87	17.00	1.297		1.000	0.13	1.060	1.047	1.375
1st	WCDMA II					RMC 12.2Kbps	Back	5mm	Reduced	9400	1880	15.46	16.00	1.132		1.000	0.04	1.270	1	1.438
2nd	WCDMA II					RMC 12.2Kbps	Back	5mm	Reduced	9400	1880	15.46	16.00	1.132		1.000	0.02	1.260	1.008	1.427
1st	CDMA2000 BC0	-	-	-	-	RTAP 153.6Kbps	Back	5mm	Reduced	1013	824.7	22.98	24.00	1.265		1.000	0.08	1.120	1	1.417
2nd	CDMA2000 BC0	-	-	-	-	RTAP 153.6Kbps	Back	5mm	Reduced	1013	824.7	22.98	24.00	1.265		1.000	0.06	1.100	1.018	1.391
1st	LTE Band 13	10M	QPSK	1	25	-	Back	5mm	Full	23230	782	22.60	24.00	1.380		1.000	0.04	1.000	1	1.380
2nd	LTE Band 13	10M	QPSK	1	25	-	Back	5mm	Full	23230	782	22.60	24.00	1.380		1.000	0.02	0.998	1.002	1.378
1st	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	-0.11	1.170	1	1.431
2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Reduced	41055	2636.5	22.15	23.00	1.216	62.9	1.006	0.03	1.070	1.093	1.309
1st	WLAN5.8GHz					802.11a 6Mbps	Back	23mm	Full	165	5825	19.39	21.00	1.449	98.13	1.019	-0.01	0.810	1	1.196
2nd	WLAN5.8GHz					802.11a 6Mbps	Back	23mm	Full	165	5825	19.39	21.00	1.449	98.13	1.019	0.06	0.790	1.025	1.166

<10g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA IV					RMC 12.2Kbps	Bottom Side	0mm	Reduced	1413	1732.6	19.20	20.50	1.349		1.000	0.09	2.650	1	3.575
2nd	WCDMA IV					RMC 12.2Kbps	Bottom Side	0mm	Reduced	1413	1732.6	19.20	20.50	1.349		1.000	0.07	2.640	1.004	3.561
1st	WCDMA II					RMC 12.2Kbps	Bottom Side	0mm	Reduced	9538	1907.6	18.99	19.50	1.125		1.000	-0.02	3.180	1	3.576
2nd	WCDMA II					RMC 12.2Kbps	Bottom Side	0mm	Reduced	9538	1907.6	18.99	19.50	1.125		1.000	0.06	3.150	1.010	3.543
1st	CDMA2000 BC0	-	-	-	-	RTAP 153.6Kbps	Back	0mm	Full	384	836.52	24.04	25.00	1.247		1.000	0.01	2.020	1	2.520
2nd	CDMA2000 BC0	-	-	-	-	RTAP 153.6Kbps	Back	0mm	Full	384	836.52	24.04	25.00	1.247		1.000	0.01	1.890	1.069	2.358
1st	LTE Band 7	20M	QPSK	1	99	-	Back	0mm	Reduced	20850	2510	22.13	23.50	1.371		1.000	-0.03	2.580	1	3.537
2nd	LTE Band 7	20M	QPSK	1	99	-	Back	0mm	Reduced	20850	2510	22.13	23.50	1.371		1.000	0.13	2.570	1.004	3.523
1st	WLAN5.3GHz					802.11n-HT40 MCS0	Back	0mm	Full	54	5270	17.80	19.50	1.479	95.15	1.051	0.05	2.180	1	3.389
2nd	WLAN5.3GHz					802.11n-HT40 MCS0	Back	0mm	Full	54	5270	17.80	19.50	1.479	95.15	1.051	0.02	2.070	1.053	3.218
1st	WLAN5.5GHz					802.11n-HT40 MCS0	Back	0mm	Reduced	102	5510	17.25	19.00	1.496	95.15	1.051	0.06	2.140	1	3.365
2nd	WLAN5.5GHz					802.11n-HT40 MCS0	Back	0mm	Reduced	102	5510	17.25	19.00	1.496	95.15	1.051	0.06	2.080	1.029	3.271
1st	WLAN5.8GHz					802.11a 6Mbps	Back	0mm	Reduced	165	5825	18.39	20.00	1.449	98.13	1.019	0.06	2.140	1	3.159
2nd	WLAN5.8GHz					802.11a 6Mbps	Back	0mm	Reduced	165	5825	18.39	20.00	1.449	98.13	1.019	0.06	2.090	1.024	3.085

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	CDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
6.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	CDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
10.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
11.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		Yes
12.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
14.	CDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
15.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
16.	GSM Voice + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
17.	GPRS/EDGE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
18.	WCDMA + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
19.	CDMA + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
20.	LTE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
21.	GSM Voice + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes		Yes
22.	GPRS/EDGE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
23.	WCDMA + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
24.	CDMA + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
25.	LTE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
26.	WLAN5.2/5.8GHz+ Bluetooth	Yes	Yes	Yes	Yes
27.	WLAN5.3/5.5GHz + Bluetooth	Yes	Yes	Yes	Yes
28.	GSM Voice + Bluetooth	Yes	Yes		Yes
29.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
30.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
31.	CDMA + Bluetooth	Yes	Yes	Yes	Yes
32.	LTE + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, CDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, CDMA, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT character, WLAN 5GHz and Bluetooth can transmit simultaneously. WWAN+WLAN5GHz+Bluetooth can represent WWAN+WLAN5GHz or WWAN+ Bluetooth, So no need to do co-located analysis separately.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 16.5.



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	4	6	1+2	1+4+6
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
GSM	GSM850	Right Cheek	0.509	0.530	0.058	0.059	1.04	0.63
		Right Tilted	0.205	0.550	0.078	0.060	0.76	0.34
		Left Cheek	0.316	1.092	0.089	0.159	1.41	0.56
		Left Tilted	0.188	1.002	0.096	0.109	1.19	0.39
	GSM1900	Right Cheek	0.076	0.530	0.058	0.059	0.61	0.19
		Right Tilted	0.042	0.550	0.078	0.060	0.59	0.18
		Left Cheek	0.053	1.092	0.089	0.159	1.15	0.30
		Left Tilted	0.054	1.002	0.096	0.109	1.06	0.26
WCDMA	WCDMA V	Right Cheek	0.440	0.530	0.058	0.059	0.97	0.56
		Right Tilted	0.183	0.550	0.078	0.060	0.73	0.32
		Left Cheek	0.321	1.092	0.089	0.159	1.41	0.57
		Left Tilted	0.182	1.002	0.096	0.109	1.18	0.39
	WCDMA IV	Right Cheek	0.191	0.530	0.058	0.059	0.72	0.31
		Right Tilted	0.095	0.550	0.078	0.060	0.65	0.23
		Left Cheek	0.135	1.092	0.089	0.159	1.23	0.38
		Left Tilted	0.131	1.002	0.096	0.109	1.13	0.34
	WCDMA II	Right Cheek	0.200	0.530	0.058	0.059	0.73	0.32
		Right Tilted	0.065	0.550	0.078	0.060	0.62	0.20
		Left Cheek	0.164	1.092	0.089	0.159	1.26	0.41
		Left Tilted	0.135	1.002	0.096	0.109	1.14	0.34
CDMA	CDMA2000 BC0	Right Cheek	0.436	0.530	0.058	0.059	0.97	0.55
		Right Tilted	0.159	0.550	0.078	0.060	0.71	0.30
		Left Cheek	0.321	1.092	0.089	0.159	1.41	0.57
		Left Tilted	0.159	1.002	0.096	0.109	1.16	0.36
	CDMA2000 BC10	Right Cheek	0.416	0.530	0.058	0.059	0.95	0.53
		Right Tilted	0.170	0.550	0.078	0.060	0.72	0.31
		Left Cheek	0.305	1.092	0.089	0.159	1.40	0.55
		Left Tilted	0.082	1.002	0.096	0.109	1.08	0.29
	CDMA2000 BC1	Right Cheek	0.181	0.530	0.058	0.059	0.71	0.30
		Right Tilted	0.082	0.550	0.078	0.060	0.63	0.22
		Left Cheek	0.155	1.092	0.089	0.159	1.25	0.40
		Left Tilted	0.145	1.002	0.096	0.109	1.15	0.35
LTE	LTE Band 71	Right Cheek	0.240	0.530	0.058	0.059	0.77	0.36
		Right Tilted	0.103	0.550	0.078	0.060	0.65	0.24
		Left Cheek	0.213	1.092	0.089	0.159	1.31	0.46
		Left Tilted	0.103	1.002	0.096	0.109	1.11	0.31
	LTE Band 12	Right Cheek	0.278	0.530	0.058	0.059	0.81	0.40
		Right Tilted	0.121	0.550	0.078	0.060	0.67	0.26
		Left Cheek	0.255	1.092	0.089	0.159	1.35	0.50
		Left Tilted	0.112	1.002	0.096	0.109	1.11	0.32
	LTE Band 13	Right Cheek	0.360	0.530	0.058	0.059	0.89	0.48
		Right Tilted	0.166	0.550	0.078	0.060	0.72	0.30
		Left Cheek	0.297	1.092	0.089	0.159	1.39	0.55
		Left Tilted	0.163	1.002	0.096	0.109	1.17	0.37
	LTE Band 14	Right Cheek	0.355	0.530	0.058	0.059	0.89	0.47
		Right Tilted	0.155	0.550	0.078	0.060	0.71	0.29
		Left Cheek	0.277	1.092	0.089	0.159	1.37	0.53
		Left Tilted	0.136	1.002	0.096	0.109	1.14	0.34



WWAN Band		Exposure Position	1	2	4	6	1+2	1+4+6
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE	LTE Band 5	Right Cheek	0.442	0.530	0.058	0.059	0.97	0.56
		Right Tilted	0.178	0.550	0.078	0.060	0.73	0.32
		Left Cheek	0.338	1.092	0.089	0.159	1.43	0.59
		Left Tilted	0.174	1.002	0.096	0.109	1.18	0.38
	LTE Band 26	Right Cheek	0.458	0.530	0.058	0.059	0.99	0.58
		Right Tilted	0.175	0.550	0.078	0.060	0.73	0.31
		Left Cheek	0.347	1.092	0.089	0.159	1.44	0.60
		Left Tilted	0.161	1.002	0.096	0.109	1.16	0.37
	LTE Band 66	Right Cheek	0.147	0.530	0.058	0.059	0.68	0.26
		Right Tilted	0.076	0.550	0.078	0.060	0.63	0.21
		Left Cheek	0.124	1.092	0.089	0.159	1.22	0.37
		Left Tilted	0.094	1.002	0.096	0.109	1.10	0.30
	LTE Band 25	Right Cheek	0.161	0.530	0.058	0.059	0.69	0.28
		Right Tilted	0.088	0.550	0.078	0.060	0.64	0.23
		Left Cheek	0.159	1.092	0.089	0.159	1.25	0.41
		Left Tilted	0.155	1.002	0.096	0.109	1.16	0.36
	LTE Band 7	Right Cheek	0.323	0.530	0.058	0.059	0.85	0.44
		Right Tilted	0.313	0.550	0.078	0.060	0.86	0.45
		Left Cheek	0.494	1.092	0.089	0.159	1.59	0.74
		Left Tilted	0.157	1.002	0.096	0.109	1.16	0.36
	LTE Band 41	Right Cheek	0.183	0.530	0.058	0.059	0.71	0.30
		Right Tilted	0.226	0.550	0.078	0.060	0.78	0.36
		Left Cheek	0.314	1.092	0.089	0.159	1.41	0.56
		Left Tilted	0.122	1.002	0.096	0.109	1.12	0.33
	LTE Band 41-HPUE	Right Cheek	0.201	0.530	0.058	0.059	0.73	0.32
		Right Tilted	0.248	0.550	0.078	0.060	0.80	0.39
		Left Cheek	0.445	1.092	0.089	0.159	1.54	0.69
		Left Tilted	0.141	1.002	0.096	0.109	1.14	0.35



16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	4	6	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850	Front	0.959	0.853	0.003	0.047	1.81	0.02	#20	1.01		
		Back	1.304	1.141	1.165	0.086	2.45	0.02	#01	2.56	0.03	#35
		Left side	0.271	0.227	0.022	0.013	0.50			0.31		
		Right side	0.490	0.518	0.009	0.036	1.01			0.54		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.051				1.05			1.05		
	GSM1900	Front	0.757	0.853	0.003	0.047	1.61	0.01	#21	0.81		
		Back	1.439	1.141	1.165	0.086	2.58	0.03	#02	2.69	0.03	#36
		Left side	0.041	0.227	0.022	0.013	0.27			0.08		
		Right side	0.027	0.518	0.009	0.036	0.55			0.07		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.314				1.31			1.31		
	WCDMA V	Front	0.861	0.853	0.003	0.047	1.71	0.01	#22	0.91		
		Back	1.404	1.141	1.165	0.086	2.55	0.03	#03	2.66	0.03	#37
		Left side	0.237	0.227	0.022	0.013	0.46			0.27		
		Right side	0.443	0.518	0.009	0.036	0.96			0.49		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.089				1.09			1.09		
WCDMA	WCDMA IV	Front	0.907	0.853	0.003	0.047	1.76	0.01	#23	0.96		
		Back	1.440	1.141	1.165	0.086	2.58	0.03	#04	2.69	0.03	#38
		Left side	0.018	0.227	0.022	0.013	0.25			0.05		
		Right side	0.026	0.518	0.009	0.036	0.54			0.07		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.424				1.42			1.42		
WCDMA II	Front	0.703	0.853	0.003	0.047	1.56			0.75			
	Back	1.438	1.141	1.165	0.086	2.58	0.03	#05	2.69	0.03	#39	
	Left side	0.042	0.227	0.022	0.013	0.27			0.08			
	Right side	0.025	0.518	0.009	0.036	0.54			0.07			
	Top side		1.039	0.067	0.059	1.04			0.13			
	Bottom side	1.424				1.42			1.42			
CDMA	CDMA2000 BC0	Front	0.911	0.853	0.003	0.047	1.76	0.01	#24A	0.96		
		Back	1.417	1.141	1.165	0.086	2.56	0.03	#06	2.67	0.03	#40
		Left side	0.221	0.227	0.022	0.013	0.45			0.26		
		Right side	0.413	0.518	0.009	0.036	0.93			0.46		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.078				1.08			1.08		
	CDMA2000 BC10	Front	0.863	0.853	0.003	0.047	1.72	0.01	#25A	0.91		
		Back	1.353	1.141	1.165	0.086	2.49	0.02	#07	2.60	0.03	#41
		Left side	0.233	0.227	0.022	0.013	0.46			0.27		
		Right side	0.428	0.518	0.009	0.036	0.95			0.47		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.000				1.00			1.00		
	CDMA2000 BC1	Front	0.582	0.853	0.003	0.047	1.44			0.63		
		Back	0.868	1.141	1.165	0.086	2.01	0.02	#08	2.12	0.03	#90
		Left side	0.028	0.227	0.022	0.013	0.26			0.06		
		Right side	0.029	0.518	0.009	0.036	0.55			0.07		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.285				1.29			1.29		



WWAN Band	Exposure Position	1	2	4	6	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)							
LTE	LTE Band 71	Front	0.503	0.853	0.003	0.047	1.36			0.55		
		Back	0.877	1.141	1.165	0.086	2.02	0.02	#09	2.13	0.03	#91
		Left side	0.407	0.227	0.022	0.013	0.63			0.44		
		Right side	0.576	0.518	0.009	0.036	1.09			0.62		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	0.708				0.71			0.71		
	LTE Band 12	Front	0.579	0.853	0.003	0.047	1.43			0.63		
		Back	0.934	1.141	1.165	0.086	2.08	0.02	#10	2.19	0.03	#92
		Left side	0.279	0.227	0.022	0.013	0.51			0.31		
		Right side	0.472	0.518	0.009	0.036	0.99			0.52		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	0.864				0.86			0.86		
	LTE Band 13	Front	0.825	0.853	0.003	0.047	1.68	0.01	#27	0.88		
		Back	1.380	1.141	1.165	0.086	2.52	0.03	#11	2.63	0.03	#46
		Left side	0.407	0.227	0.022	0.013	0.63			0.44		
		Right side	0.625	0.518	0.009	0.036	1.14			0.67		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.147				1.15			1.15		
	LTE Band 14	Front	0.668	0.853	0.003	0.047	1.52			0.72		
		Back	1.263	1.141	1.165	0.086	2.40	0.02	#12	2.51	0.03	#47
		Left side	0.232	0.227	0.022	0.013	0.46			0.27		
		Right side	0.442	0.518	0.009	0.036	0.96			0.49		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	0.842				0.84			0.84		
LTE Band 5	Front	0.840	0.853	0.003	0.047	1.69	0.01	#28	0.89			
	Back	1.316	1.141	1.165	0.086	2.46	0.02	#13	2.57	0.03	#48	
	Left side	0.195	0.227	0.022	0.013	0.42			0.23			
	Right side	0.364	0.518	0.009	0.036	0.88			0.41			
	Top side		1.039	0.067	0.059	1.04			0.13			
	Bottom side	0.978				0.98			0.98			
LTE Band 26	Front	0.870	0.853	0.003	0.047	1.72	0.01	#29	0.92			
	Back	1.334	1.141	1.165	0.086	2.48	0.02	#14	2.59	0.03	#49	
	Left side	0.174	0.227	0.022	0.013	0.40			0.21			
	Right side	0.356	0.518	0.009	0.036	0.87			0.40			
	Top side		1.039	0.067	0.059	1.04			0.13			
	Bottom side	1.001				1.00			1.00			
LTE Band 66	Front	0.942	0.853	0.003	0.047	1.80	0.01	#30	0.99			
	Back	1.439	1.141	1.165	0.086	2.58	0.03	#15	2.69	0.03	#50	
	Left side	0.044	0.227	0.022	0.013	0.27			0.08			
	Right side	0.037	0.518	0.009	0.036	0.56			0.08			
	Top side		1.039	0.067	0.059	1.04			0.13			
	Bottom side	1.267				1.27			1.27			
LTE Band 25	Front	1.050	0.853	0.003	0.047	1.90	0.02	#31	1.10			
	Back	1.439	1.141	1.165	0.086	2.58	0.03	#16	2.69	0.03	#51	
	Left side	0.032	0.227	0.022	0.013	0.26			0.07			
	Right side	0.019	0.518	0.009	0.036	0.54			0.06			
	Top side		1.039	0.067	0.059	1.04			0.13			
	Bottom side	1.178				1.18			1.18			



WWAN Band	Exposure Position	1	2	4	6	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
LTE	LTE Band 7	Front	1.263	0.853	0.003	0.047	2.12	0.02	#32	1.31		
		Back	1.422	1.141	1.165	0.086	2.56	0.03	#17	2.67	0.03	#52
		Left side	0.676	0.227	0.022	0.013	0.90			0.71		
		Right side	0.169	0.518	0.009	0.036	0.69			0.21		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.195				1.20			1.20		
	LTE Band 41	Front	1.080	0.853	0.003	0.047	1.93	0.02	#33	1.13		
		Back	1.439	1.141	1.165	0.086	2.58	0.03	#18	2.69	0.03	#53
		Left side	0.492	0.227	0.022	0.013	0.72			0.53		
		Right side	0.175	0.518	0.009	0.036	0.69			0.22		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side	1.068				1.07			1.07		
	LTE Band 41-HPUE	Front		0.853	0.003	0.047	0.85			0.05		
		Back	1.020	1.141	1.165	0.086	2.16	0.02	#19	2.27	0.03	#54
		Left side		0.227	0.022	0.013	0.23			0.04		
		Right side		0.518	0.009	0.036	0.52			0.05		
		Top side		1.039	0.067	0.059	1.04			0.13		
		Bottom side					0.00			0.00		



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	4	6	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)							
GSM	GSM850	Front	0.959	0.853	0.003	0.047	1.81	0.02	#20	1.01		
		Back	1.304	1.141	1.179	0.086	2.45	0.02	#01	2.57	0.04	#73
		Front with Headset					0.00			0.00		
		Back with Headset	1.220				1.22			1.22		
	GSM1900	Front	0.757	0.853	0.003	0.047	1.61	0.01	#21	0.81		
		Back	1.439	1.141	1.179	0.086	2.58	0.03	#02	2.70	0.04	#74
		Front with Headset					0.00			0.00		
		Back with Headset	1.343				1.34			1.34		
WCDMA	WCDMA V	Front	0.861	0.853	0.003	0.047	1.71	0.01	#22	0.91		
		Back	1.404	1.141	1.179	0.086	2.55	0.03	#03	2.67	0.04	#75
		Front with Headset					0.00			0.00		
		Back with Headset	1.378				1.38			1.38		
	WCDMA IV	Front	0.907	0.853	0.003	0.047	1.76	0.01	#23	0.96		
		Back	1.440	1.141	1.179	0.086	2.58	0.03	#04	2.71	0.04	#76
		Front with Headset					0.00			0.00		
		Back with Headset	1.401				1.40			1.40		
	WCDMA II	Front	0.703	0.853	0.003	0.047	1.56			0.75		
		Back	1.438	1.141	1.179	0.086	2.58	0.03	#05	2.70	0.04	#77
		Front with Headset					0.00			0.00		
		Back with Headset	1.370				1.37			1.37		
CDMA	CDMA2000 BC0	Front	0.875	0.853	0.003	0.047	1.73	0.01	#24	0.93		
		Back	1.299	1.141	1.179	0.086	2.44	0.02	#6A	2.56	0.04	#78
		Front with Headset					0.00			0.00		
		Back with Headset	1.274				1.27			1.27		
	CDMA2000 BC10	Front	0.823	0.853	0.003	0.047	1.68	0.01	#25	0.87		
		Back	1.388	1.141	1.179	0.086	2.53	0.02	#7A	2.65	0.04	#79
		Front with Headset					0.00			0.00		
		Back with Headset	1.313				1.31			1.31		
	CDMA2000 BC1	Front	0.833	0.853	0.003	0.047	1.69	0.01	#26	0.88		
		Back	1.351	1.141	1.179	0.086	2.49	0.03	#8A	2.62	0.04	#80
		Front with Headset					0.00			0.00		
		Back with Headset	1.419				1.42			1.42		



WWAN Band	Exposure Position	1	2	4	6	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No	1+4+6 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)						
LTE Band 71	Front	0.503	0.853	0.003	0.047	1.36			0.55		
	Back	0.877	1.141	1.179	0.086	2.02	0.02	#09	2.14	0.04	#93
	Front with Headset					0.00			0.00		
	Back with Headset					0.00			0.00		
LTE Band 12	Front	0.579	0.853	0.003	0.047	1.43			0.63		
	Back	0.934	1.141	1.179	0.086	2.08	0.02	#10	2.20	0.04	#94
	Front with Headset					0.00			0.00		
	Back with Headset					0.00			0.00		
LTE Band 13	Front	0.825	0.853	0.003	0.047	1.68	0.01	#27	0.88		
	Back	1.380	1.141	1.179	0.086	2.52	0.03	#11	2.65	0.04	#81
	Front with Headset					0.00			0.00		
	Back with Headset	1.324				1.32			1.32		
LTE Band 14	Front	0.668	0.853	0.003	0.047	1.52			0.72		
	Back	1.263	1.141	1.179	0.086	2.40	0.02	#12	2.53	0.04	#82
	Front with Headset					0.00			0.00		
	Back with Headset	1.259				1.26			1.26		
LTE Band 5	Front	0.840	0.853	0.003	0.047	1.69	0.01	#28	0.89		
	Back	1.316	1.141	1.179	0.086	2.46	0.02	#13	2.58	0.04	#83
	Front with Headset					0.00			0.00		
	Back with Headset	1.282				1.28			1.28		
LTE Band 26	Front	0.870	0.853	0.003	0.047	1.72	0.01	#29	0.92		
	Back	1.334	1.141	1.179	0.086	2.48	0.02	#14	2.60	0.04	#84
	Front with Headset					0.00			0.00		
	Back with Headset	1.309				1.31			1.31		
LTE Band 66	Front	0.942	0.853	0.003	0.047	1.80	0.01	#30	0.99		
	Back	1.439	1.141	1.179	0.086	2.58	0.03	#15	2.70	0.04	#85
	Front with Headset					0.00			0.00		
	Back with Headset	1.361				1.36			1.36		
LTE Band 25	Front	1.050	0.853	0.003	0.047	1.90	0.02	#31	1.10		
	Back	1.439	1.141	1.179	0.086	2.58	0.03	#16	2.70	0.04	#86
	Front with Headset					0.00			0.00		
	Back with Headset	1.401				1.40			1.40		
LTE Band 7	Front	1.263	0.853	0.003	0.047	2.12	0.02	#32	1.31		
	Back	1.422	1.141	1.179	0.086	2.56	0.03	#17	2.69	0.04	#87
	Front with Headset	0.745				0.75			0.75		
	Back with Headset	1.102				1.10			1.10		
LTE Band 41	Front	1.080	0.853	0.003	0.047	1.93	0.02	#33	1.13		
	Back	1.439	1.141	1.179	0.086	2.58	0.03	#18	2.70	0.04	#88
	Front with Headset					0.00			0.00		
	Back with Headset	1.094				1.09			1.09		
LTE Band 41-HPUE	Front		0.853	0.003	0.047	0.85			0.05		
	Back	1.020	1.141	1.179	0.086	2.16	0.02	#19	2.29	0.04	#89
	Front with Headset					0.00			0.00		
	Back with Headset					0.00			0.00		



WWAN Band		Exposure Position	1	4	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)			
GSM	GSM850	Front at 13mm	0.344		0.34		
		Back at 23mm	0.311	1.198	1.51		
	GSM1900	Front at 13mm	0.790		0.79		
		Back at 23mm	0.734	1.198	1.93	0.02	#95
WCDMA	WCDMA V	Front at 13mm	0.331		0.33		
		Back at 23mm	0.255	1.198	1.45		
	WCDMA IV	Front at 13mm	0.983		0.98		
		Back at 23mm	0.867	1.198	2.07	0.02	#96
	WCDMA II	Front at 13mm	1.189		1.19		
		Back at 23mm	1.192	1.198	2.39	0.02	#97
CDMA	CDMA2000 BC0	Front at 13mm	0.322		0.32		
		Back at 23mm	0.233	1.198	1.43		
	CDMA2000 BC10	Front at 13mm	0.313		0.31		
		Back at 23mm	0.189	1.198	1.39		
	CDMA2000 BC1	Front at 13mm	1.184		1.18		
		Back at 23mm	1.132	1.198	2.33	0.02	#98
LTE	LTE Band 14	Front at 13mm	0.312		0.31		
		Back at 23mm	0.394	1.198	1.59		
	LTE Band 5	Front at 13mm	0.320		0.32		
		Back at 23mm	0.245	1.198	1.44		
	LTE Band 26	Front at 13mm	0.316		0.32		
		Back at 23mm	0.230	1.198	1.43		
	LTE Band 66	Front at 13mm	1.068		1.07		
		Back at 23mm	0.748	1.198	1.95	0.02	#99
LTE	LTE Band 25	Front at 13mm	1.080		1.08		
		Back at 23mm	1.034	1.198	2.23	0.02	#100
	LTE Band 7	Front at 13mm	0.556		0.56		
		Back at 23mm	0.281	1.198	1.48		
	LTE Band 41	Front at 13mm	0.375		0.38		
		Back at 23mm	0.179	1.198	1.38		
	LTE Band 41-HPUE	Front at 13mm			0.00		
		Back at 23mm		1.198	1.20		



16.4 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1	4	1+4 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)			
GSM	GSM850	Front	1.166	0.041	1.21		
		Back	0.878	2.375	3.25		
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	0.481		0.48		
	GSM1900	Front	2.554	0.041	2.60		
		Back	3.288	2.375	5.66	0.09	#57
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.576		3.58		
WCDMA	WCDMA V	Front		0.041	0.04		
		Back	2.553	2.375	4.93	0.08	#58
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	1.662		1.66		
	WCDMA IV	Front	2.374	0.041	2.42		
		Back	3.426	2.375	5.80	0.09	#59
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.575		3.58		
	WCDMA II	Front	2.260	0.041	2.30		
		Back	3.087	2.375	5.46	0.09	#60
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.576		3.58		
CDMA	CDMA2000 BC0	Front		0.041	0.04		
		Back	2.554	2.375	4.93	0.08	#61
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	1.607		1.61		
	CDMA2000 BC10	Front		0.041	0.04		
		Back	2.498	2.375	4.87	0.07	#62
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	1.353		1.35		
	CDMA2000 BC1	Front	1.765	0.041	1.81		
		Back	2.451	2.375	4.83	0.07	#63
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.075		3.08		



WWAN Band	Exposure Position	1	4	1+4 Summed 10g SAR (W/kg)	SPLSR	Case No	
		WWAN	5GHz WLAN				
		10g SAR (W/kg)	10g SAR (W/kg)				
LTE	LTE Band 13	Front		0.041	0.04		
		Back	2.664	2.375	5.04	0.08	#64
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side			0.00		
	LTE Band 14	Front		0.041	0.04		
		Back	2.496	2.375	4.87	0.07	#65
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side			0.00		
	LTE Band 5	Front		0.041	0.04		
		Back	2.483	2.375	4.86	0.07	#66
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	1.697		1.70		
	LTE Band 26	Front		0.041	0.04		
		Back	2.273	2.375	4.65	0.07	#67
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	1.829		1.83		
	LTE Band 66	Front	1.903	0.041	1.94		
		Back	3.044	2.375	5.42	0.08	#68
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.292		3.29		
	LTE Band 25	Front	2.087	0.041	2.13		
		Back	3.105	2.375	5.48	0.09	#69
		Left side		0.087	0.09		
		Right side		0.012	0.01		
		Top side		0.189	0.19		
		Bottom side	3.246		3.25		
LTE Band 7	Front	3.441	0.041	3.48			
	Back	3.537	2.375	5.91	0.10	#70	
	Left side		0.087	0.09			
	Right side		0.012	0.01			
	Top side		0.189	0.19			
	Bottom side	3.499		3.50			
LTE Band 41	Front	1.740	0.041	1.78			
	Back	2.760	2.375	5.14	0.08	#71	
	Left side		0.087	0.09			
	Right side		0.012	0.01			
	Top side		0.189	0.19			
	Bottom side	1.525		1.53			
LTE Band 41-HPUE	Front	3.179	0.041	3.22			
	Back	3.573	2.375	5.95	0.10	#72	
	Left side		0.087	0.09			
	Right side		0.012	0.01			
	Top side		0.189	0.19			
	Bottom side	1.681		1.68			

Remark:

Sporton International (Shenzhen) Inc.

TEL : +86-755-86379589 / FAX : +86-755-86379595

FCC ID : IHDT56ZG1




1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <math><1.2\text{W/kg}</math>.
2. If $\text{SPLSR} \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.


16.5 SPLSR Evaluation and Analysis

General Note:


1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

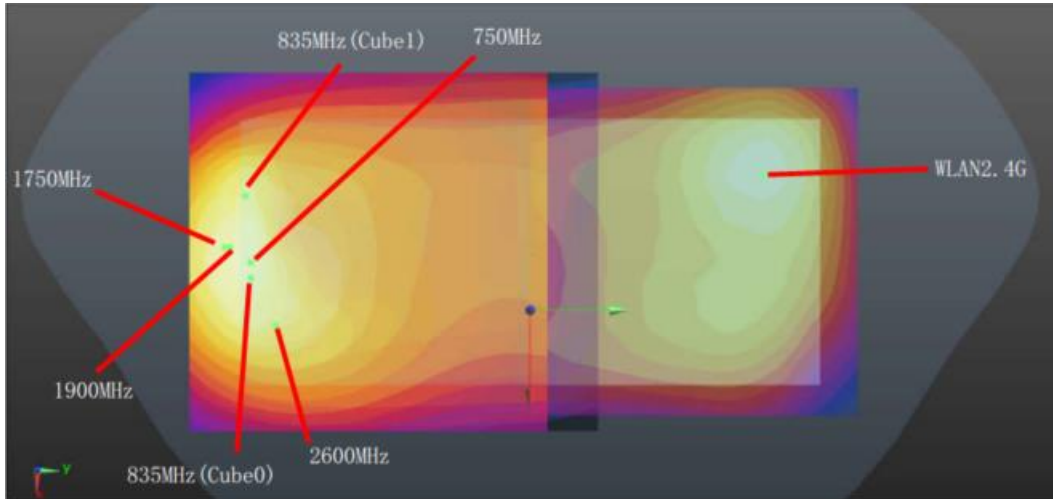


Back for WWAN+WLAN2.4GHz_5mm

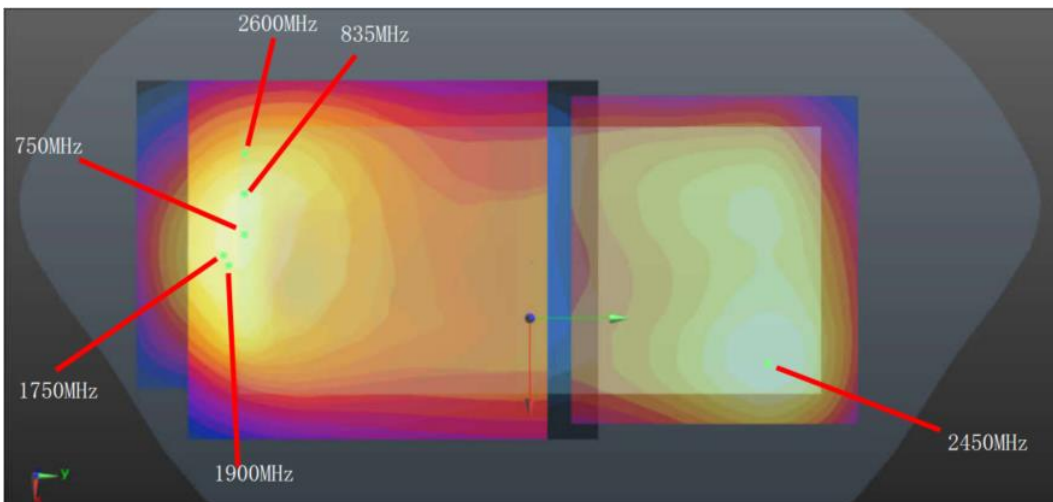


Front for WWAN+WLAN2.4GHz_5mm

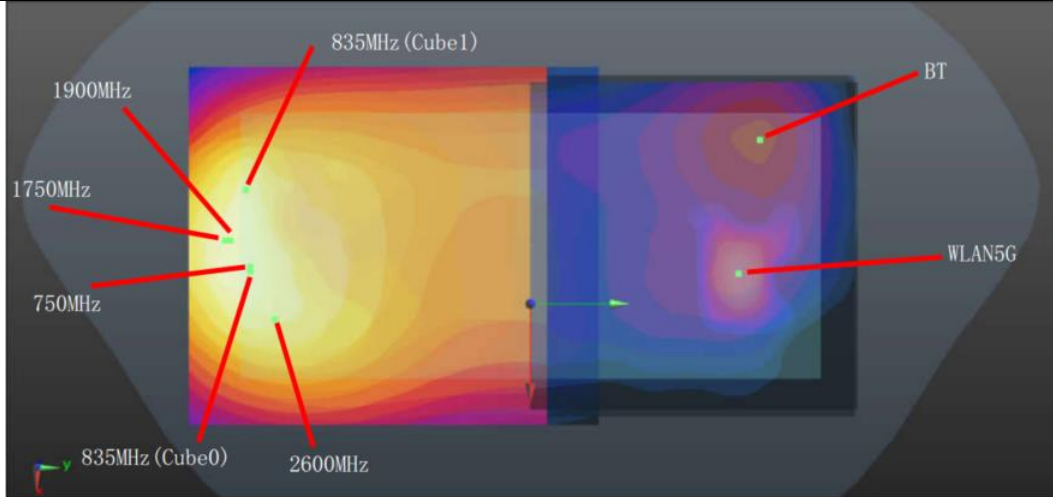

Back for WWAN+WLAN5GHz+BT_5mm

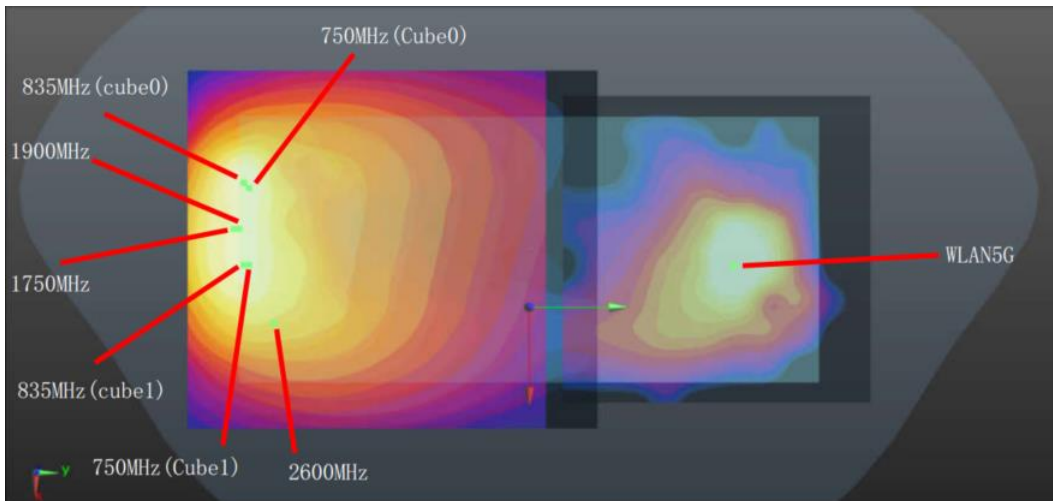

Back for WWAN+WLAN5GHz_0mm

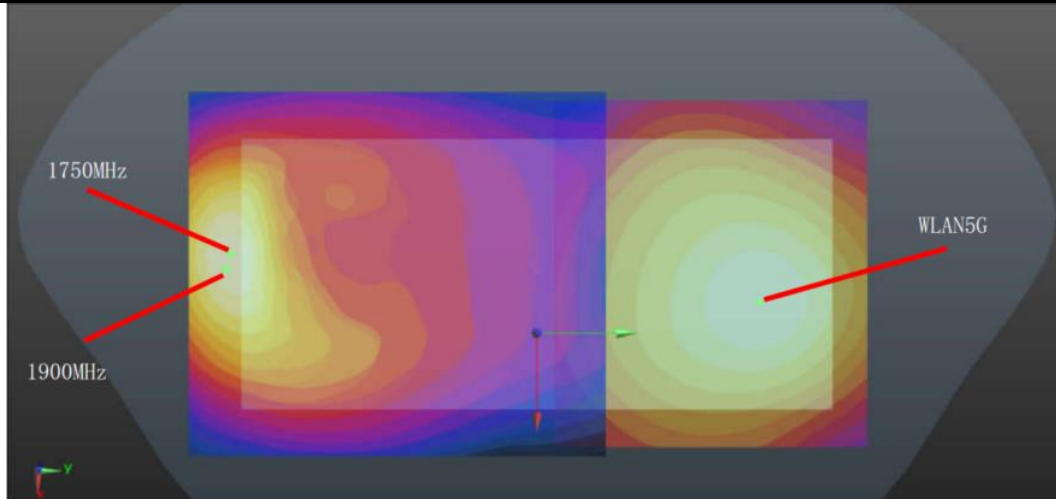

Back for WWAN+WLAN5GHz_23mm

Back 5mm(WWAN+2.4G) Hotspot & Body-worn											
Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.3	2.45	0.02	Not required
	GSM850		1.304	5mm	-0.0095	-0.09	-0.206				
	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.5	2.40	0.02	Not required
	GSM850		1.256	5mm	-0.0175	-0.0915	-0.206				
Case 2	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	156.2	2.58	0.03	Not required
	GSM1900		1.439	5mm	-0.02	-0.0865	-0.205				
Case 3	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.0	2.55	0.03	Not required
	WCDMA V		1.404	5mm	-0.011	-0.09	-0.206				
	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	162.7	2.51	0.02	Not required
	WCDMA V		1.366	5mm	-0.0095	-0.0915	-0.206				
Case 4	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	159.3	2.58	0.03	Not required
	WCDMA IV		1.44	5mm	-0.0185	-0.0895	-0.205				
Case 5	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	157.8	2.58	0.03	Not required
	WCDMA II		1.438	5mm	-0.0185	-0.088	-0.205				
Case 6	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.8	2.56	0.03	Not required
	CDMA2000 BC0		1.417	5mm	-0.007	-0.09	-0.205				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 7	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.8	2.49	0.02	Not required
	CDMA2000 BC10		1.353	5mm	-0.007	-0.09	-0.205				
Case 8	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	157.5	2.01	0.02	Not required
	CDMA2000 BC1		0.868	5mm	-0.0215	-0.088	-0.205				
Case 6A	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.5	2.44	0.02	Not required
	CDMA2000 BC0		1.299	5mm	-0.0085	-0.09	-0.205				
Case 7A	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.8	2.53	0.02	Not required
	CDMA2000 BC10		1.388	5mm	-0.007	-0.09	-0.205				
Case 8A	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	155.8	2.49	0.03	Not required
	CDMA2000 BC1		1.351	5mm	-0.023	-0.0865	-0.205				
Case 9	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	155.8	2.02	0.02	Not required
	LTE Band 71		0.877	5mm	-0.023	-0.0865	-0.205				
Case 10	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	150.7	2.08	0.02	Not required
	LTE Band 12		0.934	5mm	-0.03	-0.082	-0.206				
Case 11	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	153.1	2.52	0.03	Not required
	LTE Band 13		1.38	5mm	-0.011	-0.082	-0.206				
Case 12	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	153.1	2.40	0.02	Not required
	LTE Band 14		1.263	5mm	-0.011	-0.082	-0.206				
Case 13	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	161.0	2.46	0.02	Not required
	LTE Band 5		1.316	5mm	-0.011	-0.09	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 14	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	160.0	2.48	0.02	Not required
	LTE Band 26		1.334	5mm	-0.0175	-0.09	-0.206				
Case 15	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	156.2	2.58	0.03	Not required
	LTE Band 66		1.439	5mm	-0.02	-0.0865	-0.205				
Case 16	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	157.3	2.58	0.03	Not required
	LTE Band 25		1.439	5mm	-0.023	-0.088	-0.205				
Case 17	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	154.7	2.56	0.03	Not required
	LTE Band 7		1.422	5mm	0.0046	-0.0798	-0.205				
Case 18	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	157.7	2.58	0.03	Not required
	LTE Band 41		1.439	5mm	0.0108	-0.081	-0.205				
Case 19	WLAN2.4GHz	Back	1.141	5mm	-0.0398	0.0684	-0.205	149.9	2.16	0.02	Not required
	LTE Band 41 HPUE		1.02	5mm	0.0046	-0.0748	-0.205				
Front 5mm(wwan+2.4G)_Hotspot & Body-worn											
Case 20	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	159.7	1.81	0.02	Not required
	GSM850		0.959	5mm	-0.0325	-0.0835	-0.206				
Case 21	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	163.4	1.61	0.01	Not required
	GSM1900		0.757	5mm	-0.017	-0.091	-0.205				
Case 22	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	167.5	1.71	0.01	Not required
	WCDMA V		0.861	5mm	-0.027	-0.093	-0.206				
Case 23	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	166.6	1.76	0.01	Not required
	WCDMA IV		0.907	5mm	-0.0185	-0.094	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 24A	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	165.6	1.76	0.01	Not required
	CDMA2000 BC0		0.911	5mm	-0.0255	-0.0915	-0.205				
Case 25A	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	165.6	1.72	0.01	Not required
	CDMA2000 BC10		0.863	5mm	-0.0255	-0.0915	-0.205				
Case 24	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	165.6	1.73	0.01	Not required
	CDMA2000 BC0		0.875	5mm	-0.0255	-0.0915	-0.205				
Case 25	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	165.6	1.68	0.01	Not required
	CDMA2000 BC10		0.823	5mm	-0.0255	-0.0915	-0.205				
Case 26	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	163.4	1.69	0.01	Not required
	CDMA2000 BC1		0.833	5mm	-0.017	-0.091	-0.206				
Case 27	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	165.4	1.68	0.01	Not required
	LTE Band 13		0.825	5mm	-0.0245	-0.0915	-0.206				
Case 28	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	166.4	1.69	0.01	Not required
	LTE Band 5		0.84	5mm	-0.0285	-0.0915	-0.206				
Case 29	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	166.4	1.72	0.01	Not required
	LTE Band 26		0.87	5mm	-0.0285	-0.0915	-0.206				
Case 30	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	162.2	1.80	0.01	Not required
	LTE Band 66		0.942	5mm	-0.0185	-0.0895	-0.206				
Case 31	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	160.2	1.90	0.02	Not required
	LTE Band 25		1.05	5mm	-0.0155	-0.088	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 32	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	164.6	2.12	0.02	Not required
	LTE Band 7		1.263	5mm	-0.0482	-0.0832	-0.206				
Case 33	WLAN2.4GHz	Front	0.853	5mm	0.013	0.0696	-0.205	161.9	1.93	0.02	Not required
	LTE Band 41		1.08	5mm	-0.047	-0.0808	-0.206				
Back 5mm(wwan+5G+BT) Hotspot											
Case 35	GSM850 Cube 0	Back	1.304	5mm	-0.0095	-0.09	-0.206	151.0	2.47	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	GSM850 Cube 0	Back	1.304	5mm	-0.0095	-0.09	-0.206	161.9	1.39	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	GSM850 Cube 1	Back	1.256	5mm	-0.0175	-0.0915	-0.206	152.8	2.42	0.02	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	GSM850 Cube 1	Back	1.256	5mm	-0.0175	-0.0915	-0.206	161.6	1.34	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required	
Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206					
Case 36	GSM1900	Back	1.439	5mm	-0.02	-0.0865	-0.205	148.0	2.60	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	GSM1900	Back	1.439	5mm	-0.02	-0.0865	-0.205	156.3	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 37	WCDMA V Cube 0	Back	1.404	5mm	-0.011	-0.09	-0.206	151.0	2.57	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	WCDMA V Cube 0	Back	1.404	5mm	-0.011	-0.09	-0.206	161.5	1.49	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WCDMA V Cube 1	Back	1.366	5mm	-0.0095	-0.0915	-0.206	152.5	2.53	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	WCDMA V Cube 1	Back	1.366	5mm	-0.0095	-0.0915	-0.206	163.4	1.45	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
Bluetooth	0.086		5mm	-0.0482	0.0672	-0.206					
Case 38	WCDMA IV	Back	1.44	5mm	-0.0185	-0.0895	-0.205	150.9	2.61	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	WCDMA IV	Back	1.44	5mm	-0.0185	-0.0895	-0.205	159.5	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 39	WCDMA II	Back	1.438	5mm	-0.0185	-0.088	-0.205	149.4	2.60	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	WCDMA II	Back	1.438	5mm	-0.0185	-0.088	-0.205	158.0	1.52	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 40	CDMA2000 BC0	Back	1.417	5mm	-0.007	-0.09	-0.205	151.0	2.58	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	CDMA2000 BC0	Back	1.417	5mm	-0.007	-0.09	-0.205	162.5	1.50	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 41	CDMA2000 BC10	Back	1.353	5mm	-0.007	-0.09	-0.205	151.0	2.52	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	CDMA2000 BC10	Back	1.353	5mm	-0.007	-0.09	-0.205	162.5	1.44	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 90	CDMA2000 BC1	Back	0.868	5mm	-0.0215	-0.088	-0.205	149.6	2.03	0.02	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	CDMA2000 BC1	Back	0.868	5mm	-0.0215	-0.088	-0.205	157.5	0.95	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 91	LTE Band 71	Back	0.877	5mm	-0.023	-0.082	-0.206	143.8	2.04	0.02	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 71	Back	0.877	5mm	-0.023	-0.082	-0.206	151.3	0.96	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 92	LTE Band 12	Back	0.934	5mm	-0.03	-0.082	-0.206	144.7	2.10	0.02	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 12	Back	0.934	5mm	-0.03	-0.082	-0.206	150.3	1.02	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 46	LTE Band 13	Back	1.38	5mm	-0.011	-0.082	-0.206	143.0	2.55	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 13	Back	1.38	5mm	-0.011	-0.082	-0.206	153.8	1.47	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 47	LTE Band 14	Back	1.263	5mm	-0.011	-0.082	-0.206	143.0	2.43	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 14	Back	1.263	5mm	-0.011	-0.082	-0.206	153.8	1.35	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 48	LTE Band 5	Back	1.316	5mm	-0.011	-0.09	-0.206	151.0	2.48	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 5	Back	1.316	5mm	-0.011	-0.09	-0.206	161.5	1.40	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 49	LTE Band 26	Back	1.334	5mm	-0.0175	-0.09	-0.206	151.3	2.50	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 26	Back	1.334	5mm	-0.0175	-0.09	-0.206	160.2	1.42	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 50	LTE Band 66	Back	1.439	5mm	-0.02	-0.0865	-0.205	148.0	2.60	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 66	Back	1.439	5mm	-0.02	-0.0865	-0.205	156.3	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 51	LTE Band 25	Back	1.439	5mm	-0.023	-0.088	-0.205	149.8	2.60	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 25	Back	1.439	5mm	-0.023	-0.088	-0.205	157.2	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 52	LTE Band 7	Back	1.422	5mm	0.0046	-0.0798	-0.205	141.4	2.59	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 7	Back	1.422	5mm	0.0046	-0.0798	-0.205	156.2	1.51	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 53	LTE Band 41	Back	1.439	5mm	0.0108	-0.081	-0.205	143.2	2.60	0.03	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 41	Back	1.439	5mm	0.0108	-0.081	-0.205	159.5	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 54	LTE Band 41 HPUE	Back	1.02	5mm	0.0046	-0.0748	-0.205	136.4	2.19	0.02	Not required
	WLAN5GHz		1.165	5mm	-0.008	0.061	-0.206				
	LTE Band 41 HPUE	Back	1.02	5mm	0.0046	-0.0748	-0.205	151.5	1.11	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.165	5mm	-0.008	0.061	-0.206	40.7	1.25	0.03	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Back 5mm(wwan+5G+BT)_Body-worn											
Case 73	GSM850 Cube 0	Back	1.304	5mm	-0.0095	-0.09	-0.206	152.0	2.48	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	GSM850 Cube 0	Back	1.304	5mm	-0.0095	-0.09	-0.206	161.9	1.39	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	GSM850 Cube 1	Back	1.256	5mm	-0.0175	-0.0915	-0.206	153.6	2.44	0.02	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	GSM850 Cube 1	Back	1.256	5mm	-0.0175	-0.0915	-0.206	161.6	1.34	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 74	GSM1900	Back	1.439	5mm	-0.02	-0.0865	-0.205	148.7	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	GSM1900	Back	1.439	5mm	-0.02	-0.0865	-0.205	156.3	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 75	WCDMA V Cube 0	Back	1.404	5mm	-0.011	-0.09	-0.206	152.0	2.58	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	WCDMA V Cube 0	Back	1.404	5mm	-0.011	-0.09	-0.206	161.5	1.49	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WCDMA V Cube 1	Back	1.366	5mm	-0.0095	-0.0915	-0.206	153.5	2.55	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	WCDMA V Cube 1	Back	1.366	5mm	-0.0095	-0.0915	-0.206	163.4	1.45	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 76	WCDMA IV	Back	1.44	5mm	-0.0185	-0.0895	-0.205	151.6	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	WCDMA IV	Back	1.44	5mm	-0.0185	-0.0895	-0.205	159.5	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 77	WCDMA II	Back	1.438	5mm	-0.0185	-0.088	-0.205	150.1	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	WCDMA II	Back	1.438	5mm	-0.0185	-0.088	-0.205	158.0	1.52	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 78	CDMA2000 BC0	Back	1.299	5mm	-0.0085	-0.09	-0.205	152.1	2.48	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	CDMA2000 BC0	Back	1.299	5mm	-0.0085	-0.09	-0.205	162.1	1.39	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 79	CDMA2000 BC10	Back	1.388	5mm	-0.007	-0.09	-0.205	152.1	2.57	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	CDMA2000 BC10	Back	1.388	5mm	-0.007	-0.09	-0.205	162.5	1.47	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 80	CDMA2000 BC1	Back	1.351	5mm	-0.023	-0.0865	-0.205	148.8	2.53	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	CDMA2000 BC1	Back	1.351	5mm	-0.023	-0.0865	-0.205	155.8	1.44	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 93	LTE Band 71	Back	0.877	5mm	-0.023	-0.082	-0.206	144.3	2.06	0.02	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 71	Back	0.877	5mm	-0.023	-0.082	-0.206	151.3	0.96	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 94	LTE Band 12	Back	0.934	5mm	-0.03	-0.082	-0.206	145.0	2.11	0.02	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 12	Back	0.934	5mm	-0.03	-0.082	-0.206	150.3	1.02	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 81	LTE Band 13	Back	1.38	5mm	-0.011	-0.082	-0.206	144.0	2.56	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 13	Back	1.38	5mm	-0.011	-0.082	-0.206	153.8	1.47	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 82	LTE Band 14	Back	1.263	5mm	-0.011	-0.082	-0.206	144.0	2.44	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 14	Back	1.263	5mm	-0.011	-0.082	-0.206	153.8	1.35	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 83	LTE Band 5	Back	1.316	5mm	-0.011	-0.09	-0.206	152.0	2.50	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 5	Back	1.316	5mm	-0.011	-0.09	-0.206	161.5	1.40	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 84	LTE Band 26	Back	1.334	5mm	-0.0175	-0.09	-0.206	152.1	2.51	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 26	Back	1.334	5mm	-0.0175	-0.09	-0.206	160.2	1.42	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 85	LTE Band 66	Back	1.439	5mm	-0.02	-0.0865	-0.205	148.7	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 66	Back	1.439	5mm	-0.02	-0.0865	-0.205	156.3	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 86	LTE Band 25	Back	1.439	5mm	-0.023	-0.088	-0.205	150.3	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 25	Back	1.439	5mm	-0.023	-0.088	-0.205	157.2	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 87	LTE Band 7	Back	1.422	5mm	0.0046	-0.0798	-0.205	142.9	2.60	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 7	Back	1.422	5mm	0.0046	-0.0798	-0.205	156.2	1.51	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 88	LTE Band 41	Back	1.439	5mm	0.0108	-0.081	-0.205	145.0	2.62	0.03	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 41	Back	1.439	5mm	0.0108	-0.081	-0.205	159.5	1.53	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
Case 89	LTE Band 41 HPUE	Back	1.02	5mm	0.0046	-0.0748	-0.205	137.9	2.20	0.02	Not required
	WLAN5GHz		1.179	5mm	-0.013	0.062	-0.206				
	LTE Band 41 HPUE	Back	1.02	5mm	0.0046	-0.0748	-0.205	151.5	1.11	0.01	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				
	WLAN5GHz	Back	1.179	5mm	-0.013	0.062	-0.206	35.6	1.27	0.04	Not required
	Bluetooth		0.086	5mm	-0.0482	0.0672	-0.206				

Back 0mm(wwan+5G)											
Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 57	GSM1900	Back	3.288	0mm	-0.0215	-0.0865	-0.205	147.7	5.66	0.09	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 58	WCDMA V Cube 0	Back	2.553	0mm	-0.0365	-0.082	-0.205	144.9	4.93	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	WCDMA V Cube 1	Back	2.553	0mm	-0.035	-0.082	-0.205	144.7	4.93	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 59	WCDMA IV	Back	3.426	0mm	-0.023	-0.0865	-0.205	147.8	5.80	0.09	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 60	WCDMA II	Back	3.087	0mm	-0.023	-0.085	-0.205	146.3	5.46	0.09	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 61	CDMA2000 BC0 Cube 0	Back	2.554	0mm	-0.0285	-0.0835	-0.205	145.3	4.93	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	CDMA2000 BC0 Cube 1	Back	2.44	0mm	-0.0285	-0.0835	-0.205	145.3	4.82	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 62	CDMA2000 BC10	Back	2.498	0mm	-0.0295	-0.0835	-0.205	145.4	4.87	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 63	CDMA2000 BC1	Back	2.451	0mm	-0.018	-0.085	-0.205	146.1	4.83	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 64	LTE Band 13 Cube 0	Back	2.664	0mm	-0.0365	-0.082	-0.205	144.9	5.04	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	LTE Band 13 Cube 1	Back	2.664	0mm	-0.035	-0.082	-0.205	144.7	5.04	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 65	LTE Band 14 Cube 0	Back	2.496	0mm	-0.0365	-0.0835	-0.206	146.4	4.87	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	LTE Band 14 Cube 1	Back	2.266	0mm	-0.0285	-0.0835	-0.206	145.3	4.64	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 66	LTE Band 5 Cube 0	Back	2.483	0mm	-0.031	-0.0915	-0.206	153.6	4.86	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	LTE Band 5 Cube 1	Back	2.132	0mm	-0.0085	-0.0915	-0.205	152.6	4.51	0.06	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 67	LTE Band 26 Cube 0	Back	2.273	0mm	-0.0125	-0.0835	-0.206	144.5	4.65	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
	LTE Band 26 Cube 1	Back	2.26	0mm	-0.035	-0.082	-0.206	144.7	4.64	0.07	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 68	LTE Band 66	Back	3.044	0mm	-0.02	-0.0895	-0.205	150.7	5.42	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 69	LTE Band 25	Back	3.105	0mm	-0.0215	-0.0895	-0.205	150.7	5.48	0.09	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 70	LTE Band 7	Back	3.537	0mm	0.0046	-0.0798	-0.205	141.9	5.91	0.10	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 71	LTE Band 41	Back	2.76	0mm	0.0046	-0.0798	-0.205	141.9	5.14	0.08	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Case 72	LTE Band 41-HPUE	Back	3.573	0mm	0.0046	-0.0798	-0.205	141.9	5.95	0.10	Not required
	WLAN5GHz		2.375	0mm	-0.013	0.061	-0.206				
Back Sensor(wwan+5G)											
Case 95	GSM1900	Back	0.734	23mm	-0.017	-0.0895	-0.205	154.7	1.93	0.02	Not required
	WLAN5GHz		1.198	23mm	-0.01	0.065	-0.206				
Case 96	WCDMA IV	Back	0.867	23mm	-0.0185	-0.0895	-0.205	154.7	2.07	0.02	Not required
	WLAN5GHz		1.198	23mm	-0.01	0.065	-0.206				
Case 97	WCDMA II	Back	1.192	23mm	-0.0185	-0.088	-0.205	153.2	2.39	0.02	Not required
	WLAN5GHz		1.198	23mm	-0.01	0.065	-0.206				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 98	CDMA2000 BC1	Back	1.132	23mm	-0.023	-0.0865	-0.205	152.1	2.33	0.02	Not required
	WLAN5GHz		1.198	23mm	-0.01	0.065	-0.206				
Case 99	LTE Band 66	Back	0.748	0mm	-0.02	-0.0865	-0.205	151.8	1.95	0.02	Not required
	WLAN5GHz		1.198	0mm	-0.01	0.065	-0.206				
Case 100	LTE Band 25	Back	1.034	23mm	-0.023	-0.088	-0.205	153.6	2.23	0.02	Not required
	WLAN5GHz		1.198	23mm	-0.01	0.065	-0.206				

17. Supplemental Tuner Tests Results

General Note:

1. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
2. To evaluate all of the tuner states, the 144 tuner states are divided evenly among bands (except for GSM850/1900/ LTE B7/38/41), mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
3. This device supports LTE B2 / B4 / B17 and B25 / B66 / B12. Since the supported frequency span for LTE B2 / B4 / B17 falls completely within the supports frequency span for LTE B25 / B66 / B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, chose LTE B25 / B66 / B12 for dynamic antenna analysis.
4. According to workshop 2019, if any single point SAR measurement result is $> 1.2 \text{ W/kg}$ for a band/exposure condition combination set, all supported tuner states are evaluated with single point SAR measurements for the combination. So we verified the single point SAR that bands with SAR value high than 1.2 W/Kg .
5. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

17.1 Supplemental Tuner Head & Body SAR Results

Please refer to Appendix F.

Test Engineer : Changlin Huang, Bin He, Mengming Dai



18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [7] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [8] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [11] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [12] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [13] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3-SN:1099


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: HSL_750_200820 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 40.803$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.71, 10.71, 10.71); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.62 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.49 V/m ; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 3.05 W/kg
SAR(1 g) = 2.11 W/kg ; SAR(10 g) = 1.42 W/kg
Maximum value of SAR (measured) = 2.63 W/kg

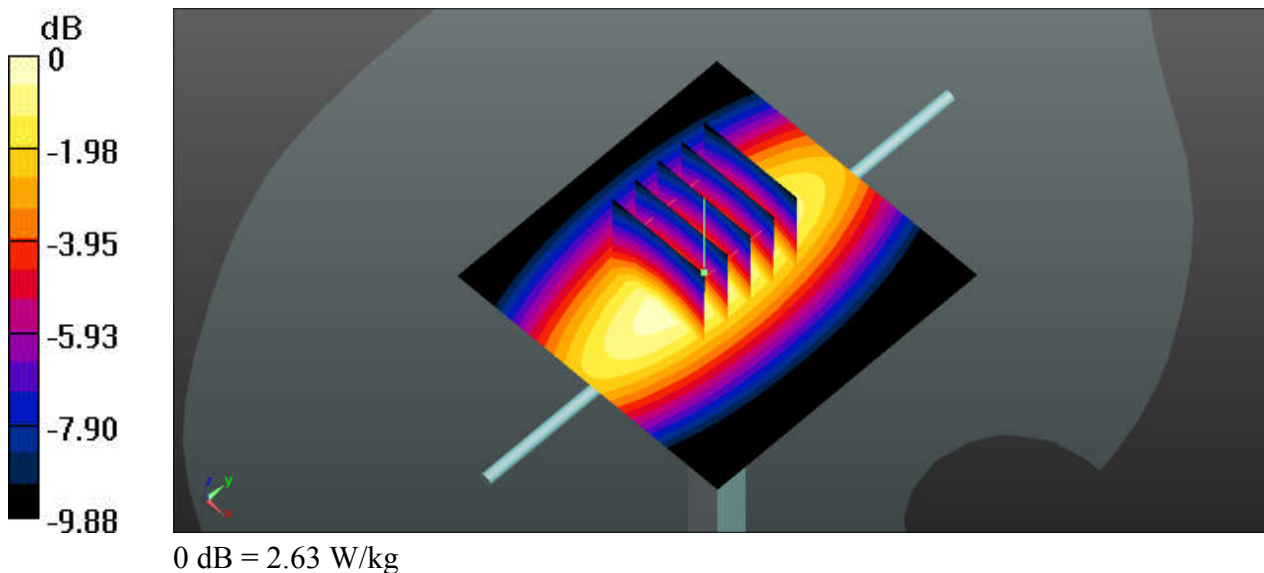

System Check_Head_750MHz

DUT: D750V3-SN:1099


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: HSL_750_200830 Medium parameters used: $f = 750$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.532$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.71, 10.71, 10.71); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.63 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 55.49 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 3.06 W/kg
SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.43 W/kg
Maximum value of SAR (measured) = 2.64 W/kg

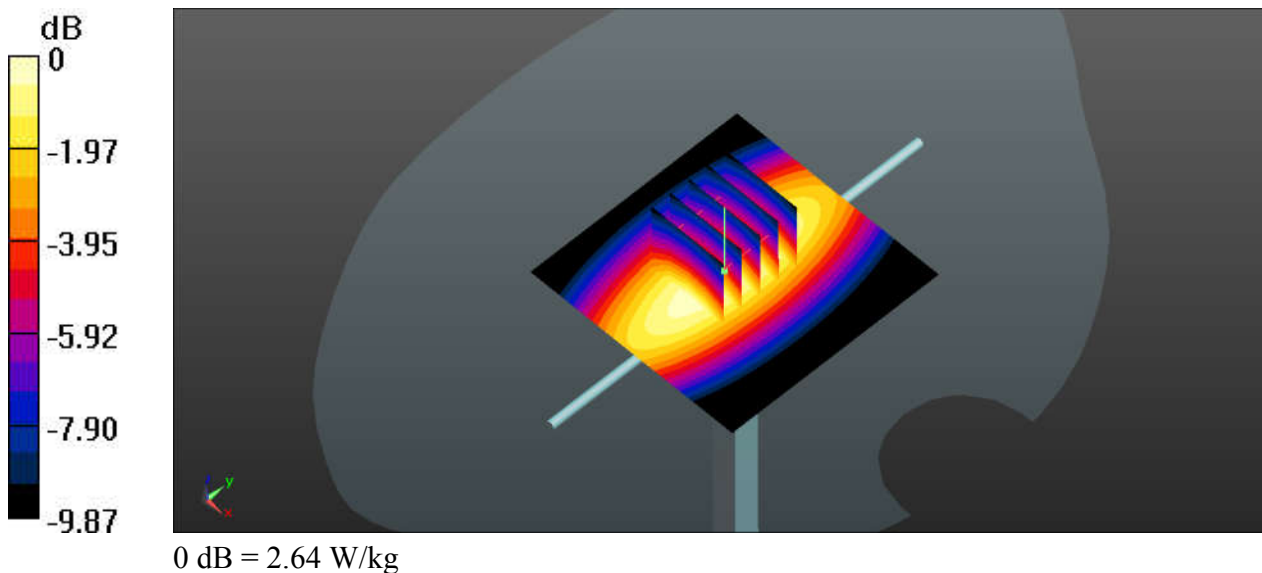

System Check_Head_835MHz

DUT: D835V2-SN:4d162


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL_835_200822 Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.91$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.45, 10.45, 10.45); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.07 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 59.22 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.60 W/kg
SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.62 W/kg
Maximum value of SAR (measured) = 3.10 W/kg

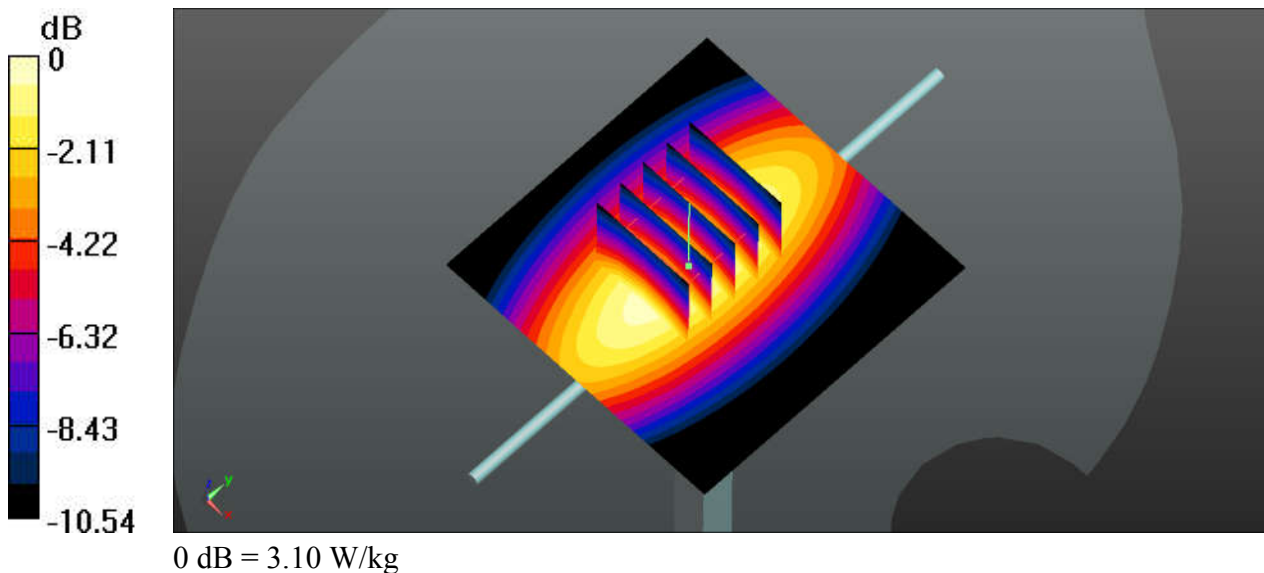

System Check_Head_835MHz

DUT: D835V2-SN:4d162


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL_835_200829 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.212$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.45, 10.45, 10.45); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.05 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 59.22 V/m ; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.57 W/kg
SAR(1 g) = 2.44 W/kg ; SAR(10 g) = 1.61 W/kg
Maximum value of SAR (measured) = 3.08 W/kg

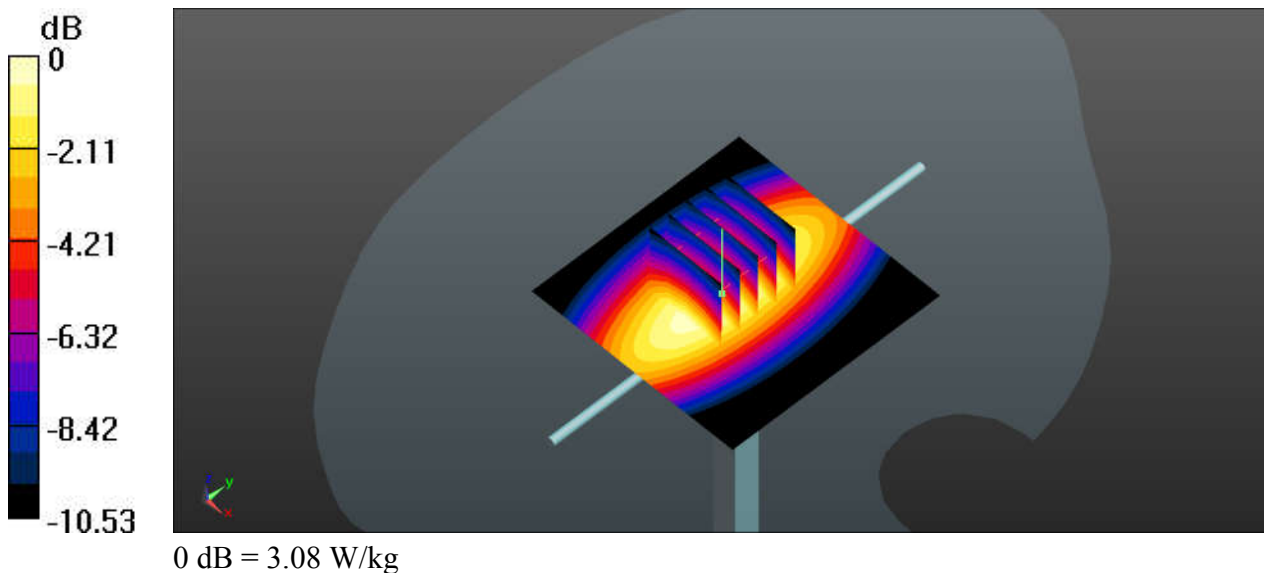

System Check_Head_1750MHz

DUT: D1750V2-SN:1137


Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: HSL_1750_200817 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.86$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.88, 8.88, 8.88); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.2 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 96.69 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 16.6 W/kg
SAR(1 g) = 9.3 W/kg; SAR(10 g) = 4.98 W/kg
Maximum value of SAR (measured) = 13.0 W/kg

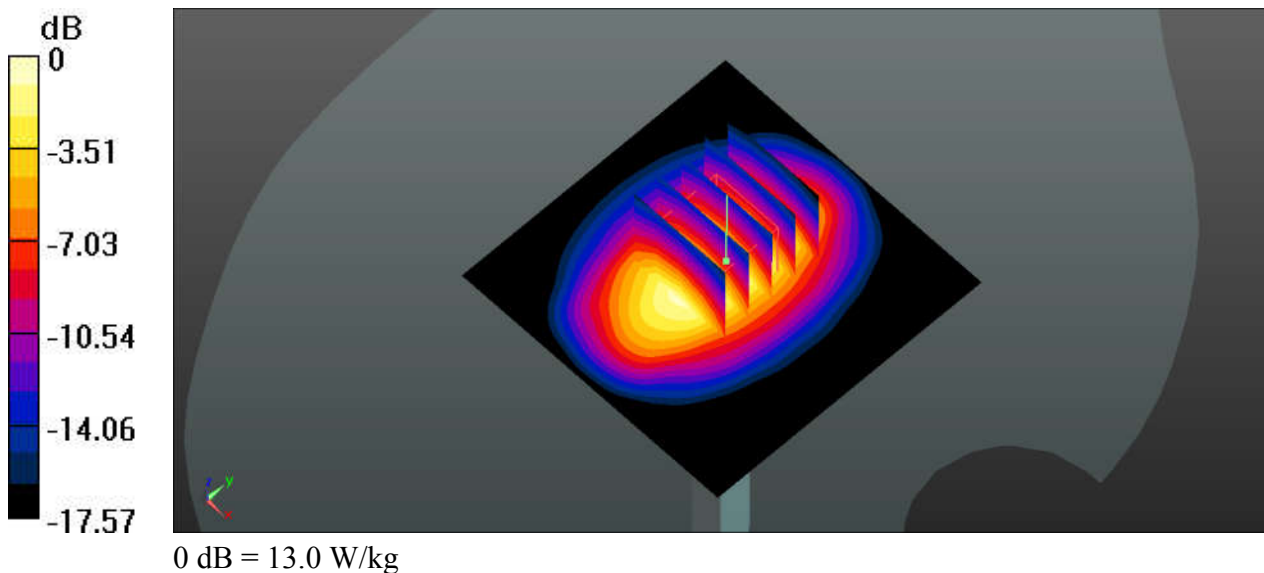

System Check_Head_1750MHz

DUT: D1750V2-SN:1137


Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: HSL_1750_200901 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 41.525$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.88, 8.88, 8.88); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.5 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 96.69 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 17.0 W/kg
SAR(1 g) = 9.52 W/kg; SAR(10 g) = 5.1 W/kg
Maximum value of SAR (measured) = 13.3 W/kg

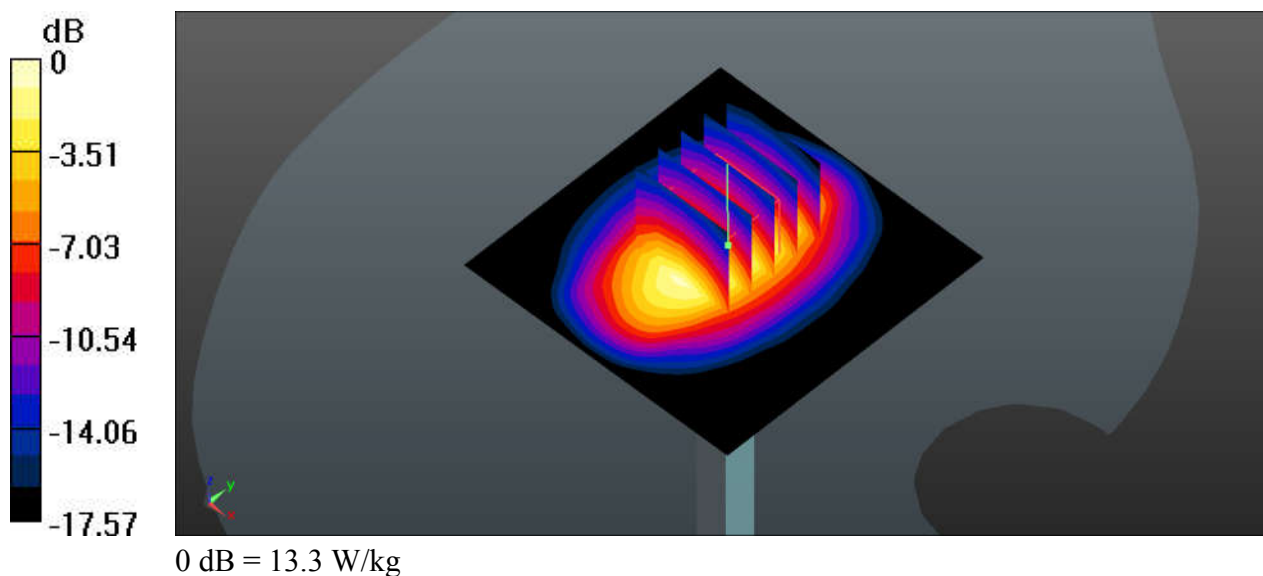

System Check_Head_1900MHz

DUT: D1900V2-SN:5d182


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200817 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.291$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.58, 8.58, 8.58); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.2 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 95.08 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 18.8 W/kg
SAR(1 g) = 10 W/kg; SAR(10 g) = 5.14 W/kg
Maximum value of SAR (measured) = 14.5 W/kg

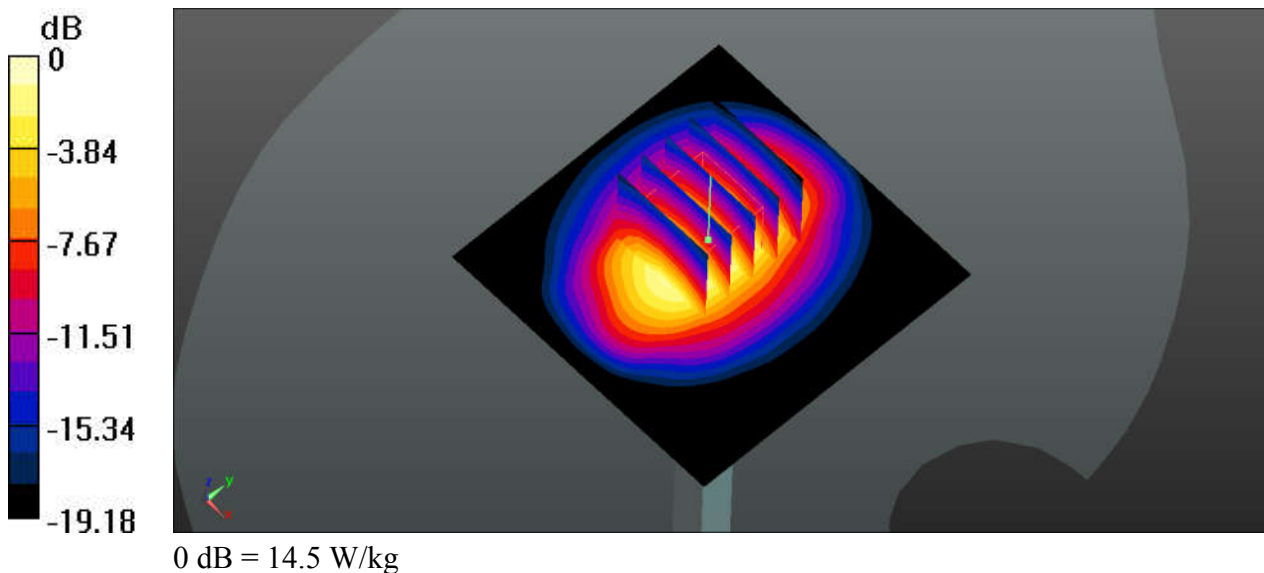

System Check_Head_1900MHz

DUT: D1900V2-SN:5d182


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200903 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.58, 8.58, 8.58); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.7 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 95.08 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 19.4 W/kg
SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.29 W/kg
Maximum value of SAR (measured) = 14.9 W/kg

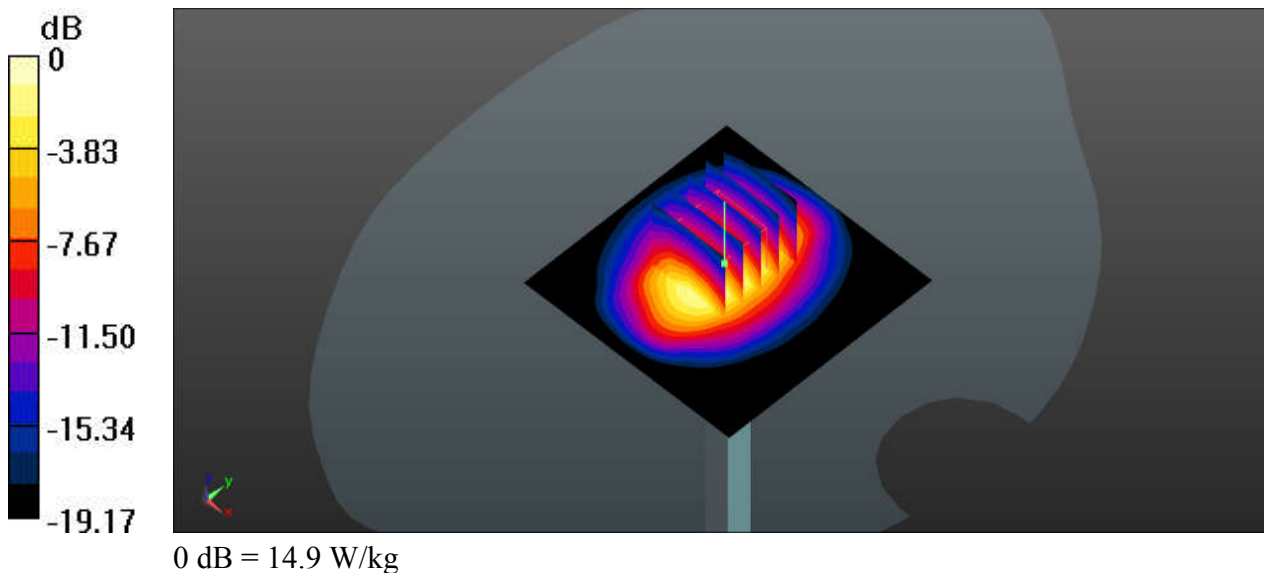

System Check_Head_2450MHz

DUT: D2450V2-SN:924


Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL_2450_200824 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.829$ S/m; $\epsilon_r = 40.081$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.76, 7.76, 7.76); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 20.0 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 78.93 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 27.6 W/kg
SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.87 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

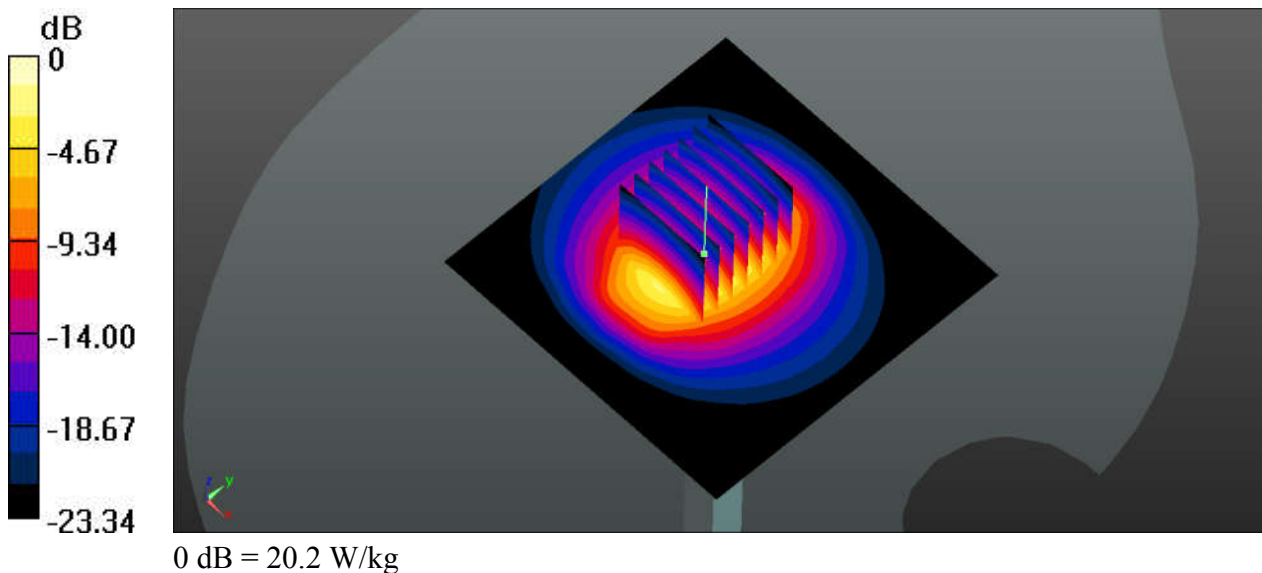

System Check_Head_2600MHz

DUT: D2600V2-SN:1070


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: HSL_2600_200818 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 38.344$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.47, 7.47, 7.47); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 25.5 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.17 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 34.8 W/kg
SAR(1 g) = 15.4 W/kg; SAR(10 g) = 6.68 W/kg
Maximum value of SAR (measured) = 24.7 W/kg

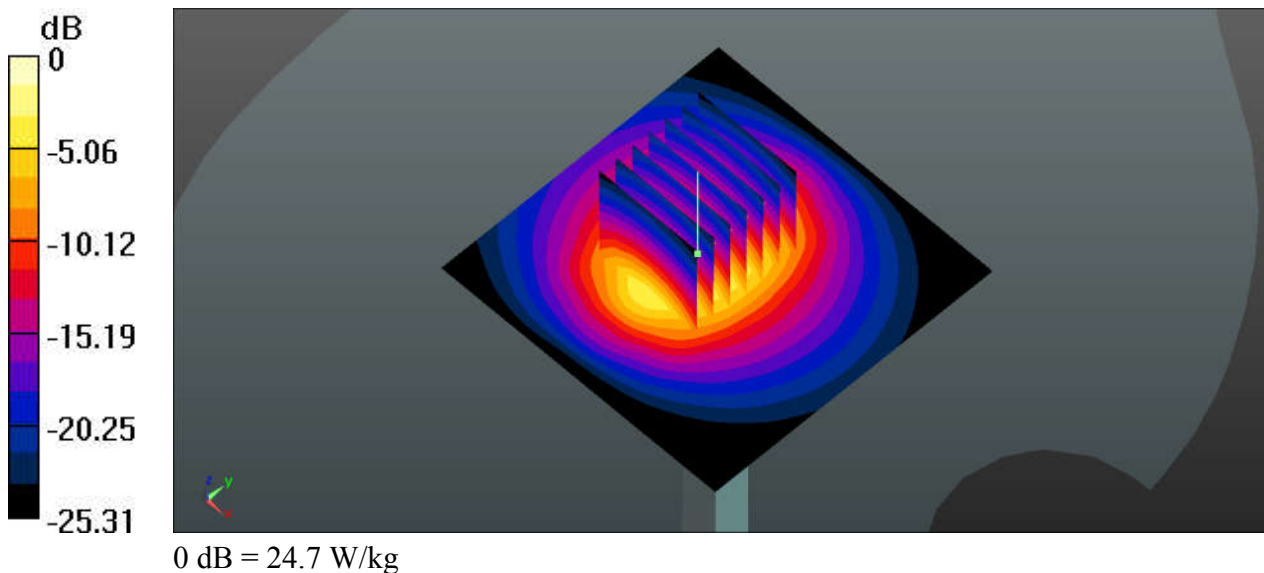

System Check_Head_2600MHz

DUT: D2600V2-SN:1070


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: HSL_2600_200905 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.053$ S/m; $\epsilon_r = 38.335$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.47, 7.47, 7.47); Calibrated: 2020.01.22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 25.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.17 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 34.8 W/kg
SAR(1 g) = 15.4 W/kg; SAR(10 g) = 6.69 W/kg
Maximum value of SAR (measured) = 24.7 W/kg

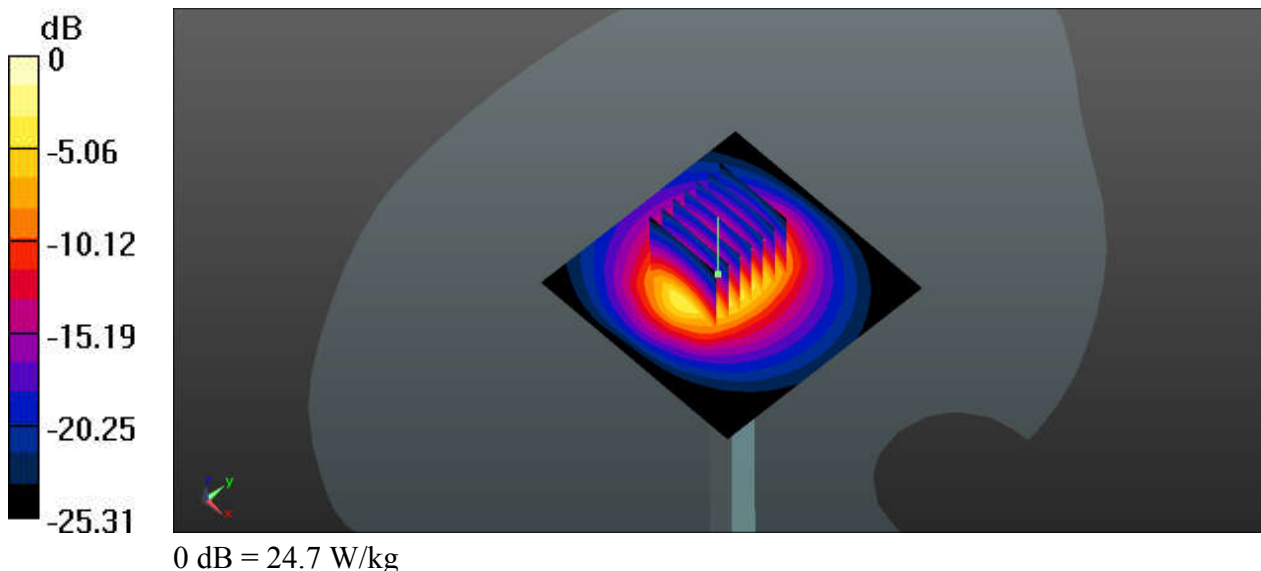

System Check_Head_5250MHz

DUT: D5GHzV2-SN:1167


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5250_200826 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.748$ S/m; $\epsilon_r = 36.881$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.2, 5.2, 5.2); Calibrated: 2020.01.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.6 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.99 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 34.1 W/kg
SAR(1 g) = 8.29 W/kg; SAR(10 g) = 2.34 W/kg
Maximum value of SAR (measured) = 20.3 W/kg

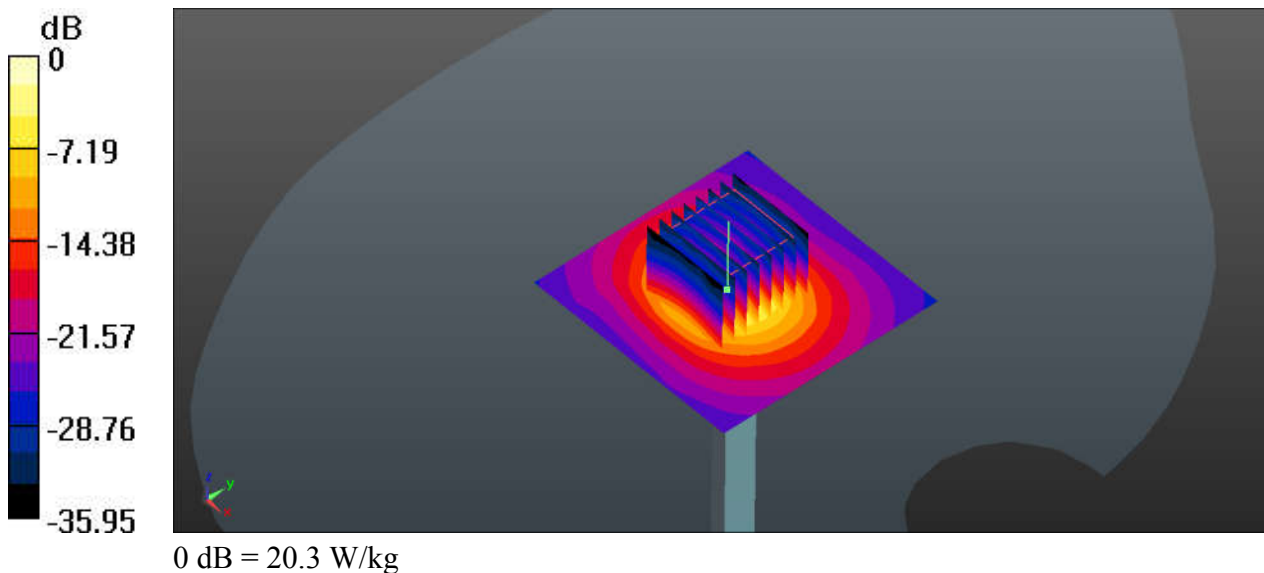

System Check_Head_5250MHz

DUT: D5GHzV2-SN:1167


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5250_200908 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 37.646$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.2, 5.2, 5.2); Calibrated: 2020.01.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.9 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 56.62 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 32.3 W/kg
SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.1 W/kg
Maximum value of SAR (measured) = 19.3 W/kg

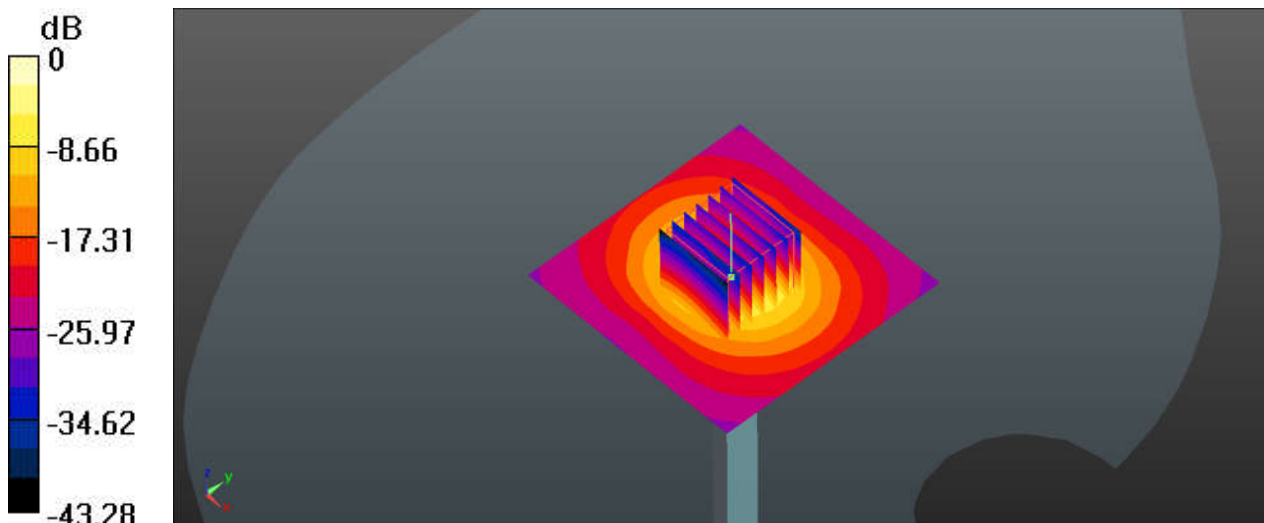

0 dB = 19.3 W/kg

System Check_Head_5250MHz

DUT: D5GHzV2-SN:1167


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5250_200915 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.767$ S/m; $\epsilon_r = 36.978$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.2, 5.2, 5.2); Calibrated: 2020.01.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.7 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.99 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 34.2 W/kg
SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.35 W/kg
Maximum value of SAR (measured) = 20.4 W/kg

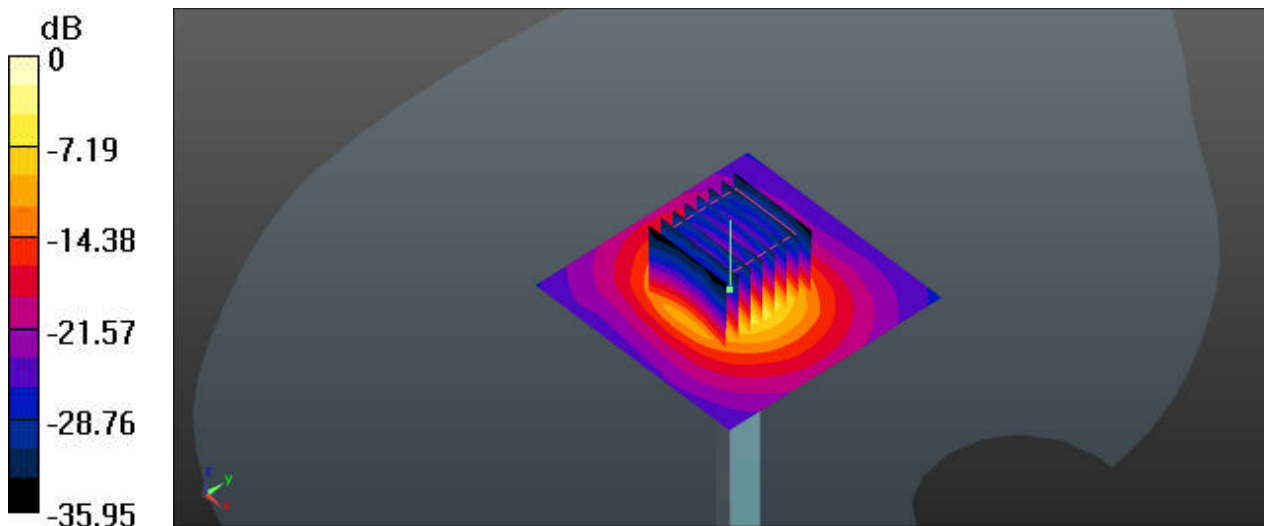

0 dB = 20.4 W/kg

System Check_Head_5600MHz

DUT: D5GHzV2-SN:1167


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: HSL_5600_200827 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.189$ S/m; $\epsilon_r = 36.13$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.62, 4.62, 4.62); Calibrated: 2020.01.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 22.3 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 54.39 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 37.0 W/kg
SAR(1 g) = 8.44 W/kg; SAR(10 g) = 2.39 W/kg
Maximum value of SAR (measured) = 22.0 W/kg

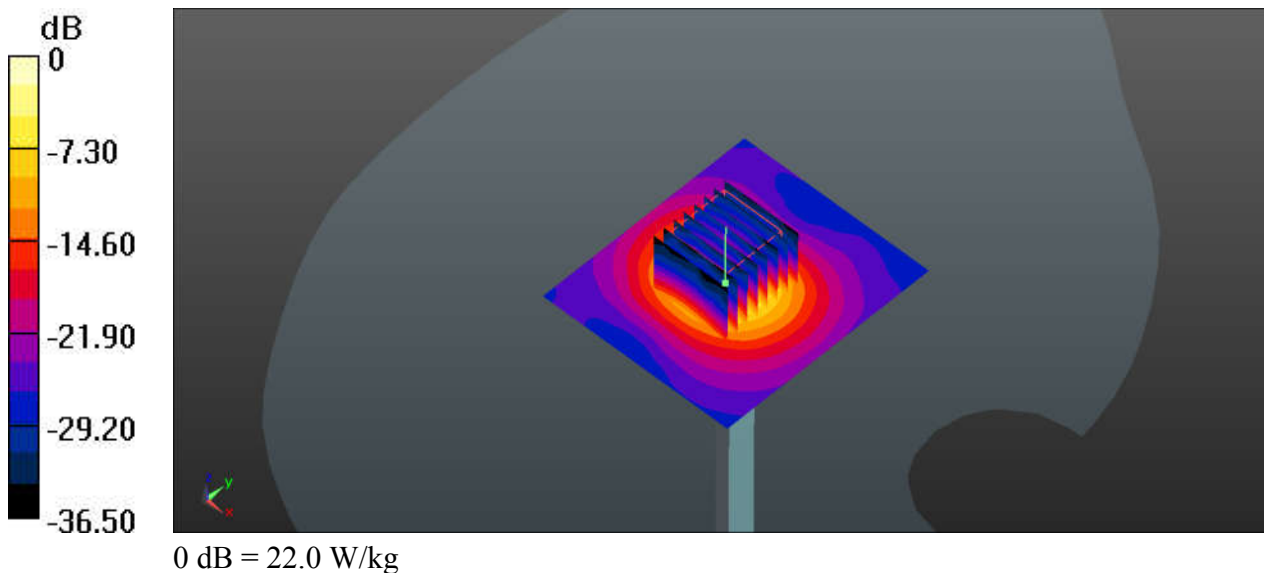

System Check_Head_5600MHz

DUT: D5GHzV2-SN:1167


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: HSL_5600_200910 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.923$ S/m; $\epsilon_r = 37.157$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.62, 4.62, 4.62); Calibrated: 2020.01.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn528; Calibrated: 2020.03.16
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.1 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 56.98 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 34.6 W/kg
SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.22 W/kg
Maximum value of SAR (measured) = 20.8 W/kg

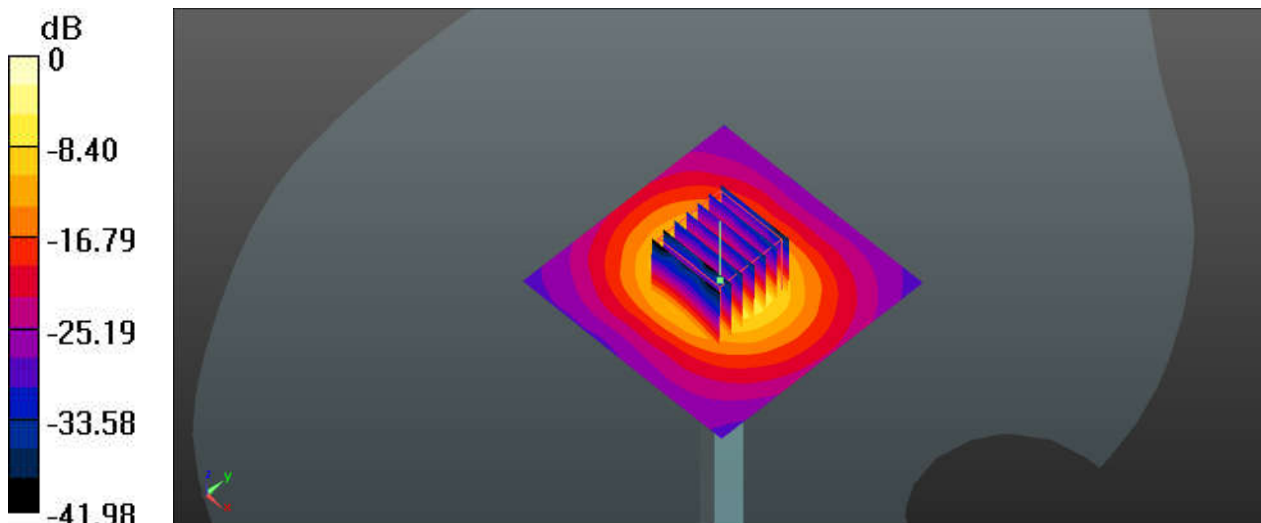

0 dB = 20.8 W/kg