




3.7.5 Test Result of Conducted Spurious Emission


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

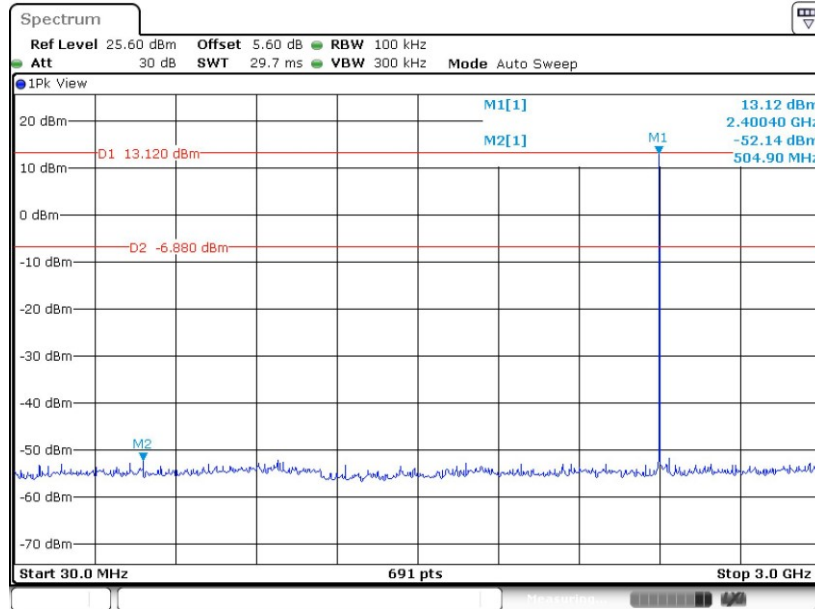

Date: 17.NOV.2020 09:25:21


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

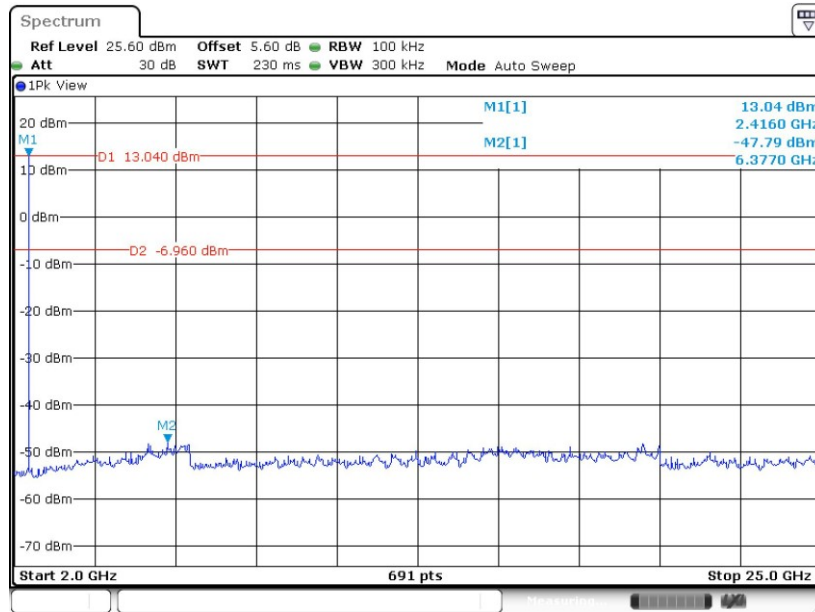

Date: 17.NOV.2020 09:25:55




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

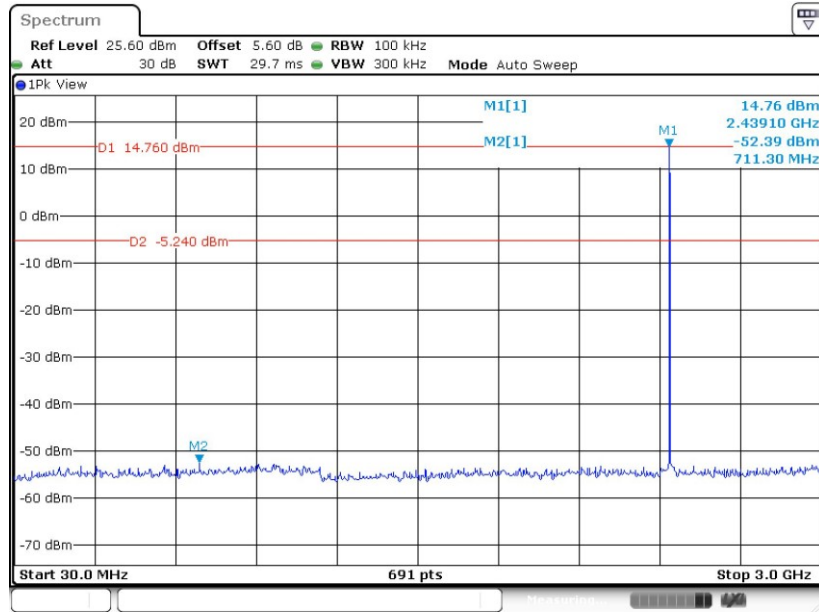

Date: 17.NOV.2020 09:29:13


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

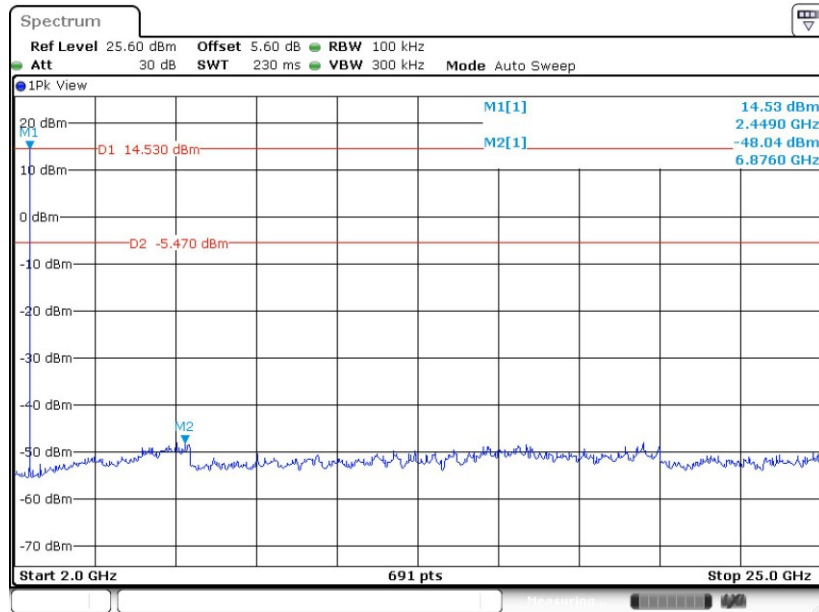

Date: 17.NOV.2020 09:29:55




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

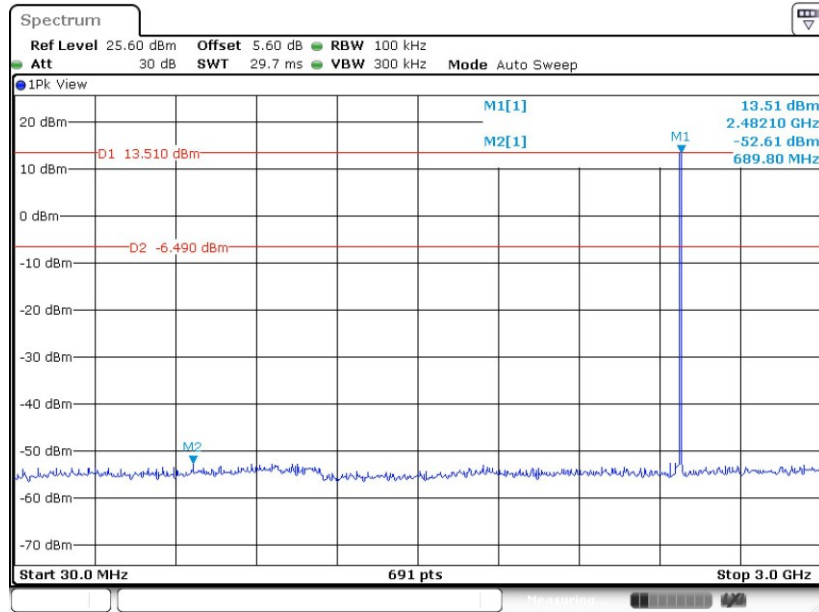

Date: 17.NOV.2020 09:35:56

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

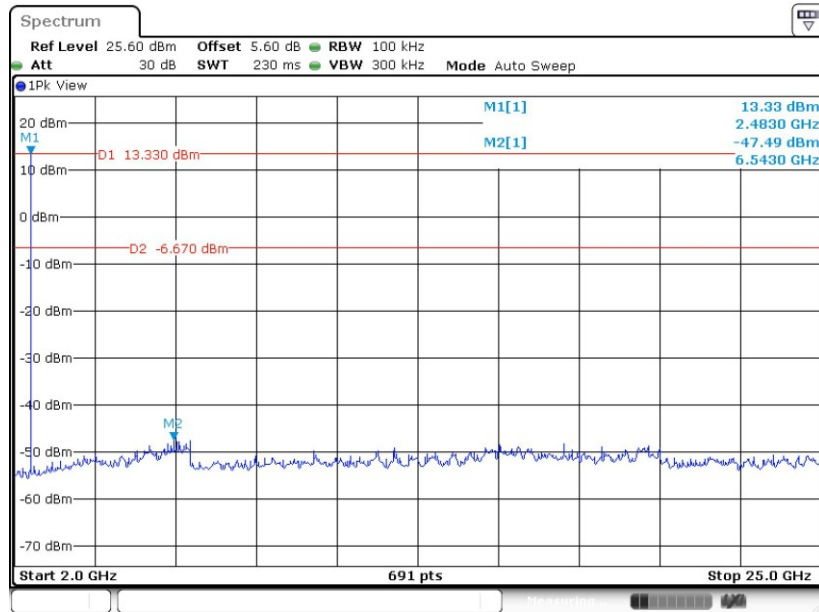


Date: 17.NOV.2020 09:36:26




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

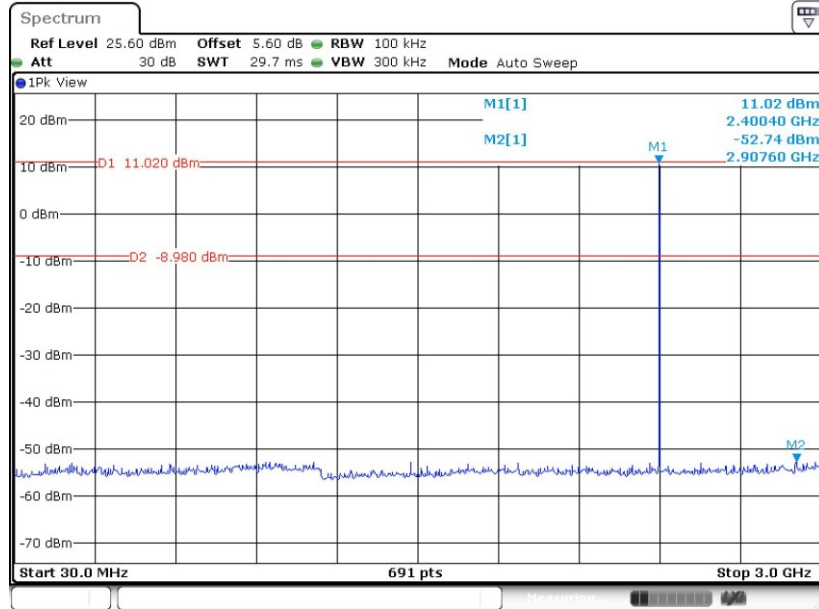

Date: 17.NOV.2020 09:51:59


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

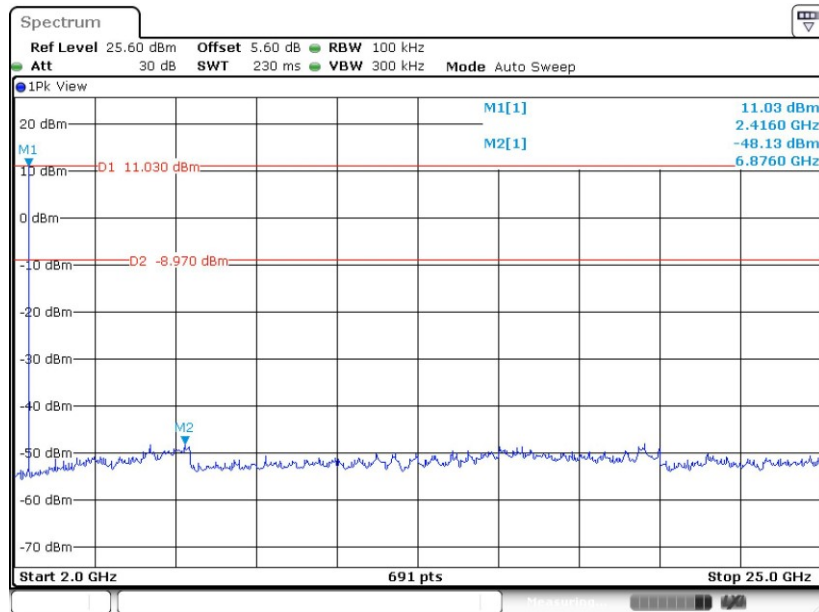

Date: 17.NOV.2020 09:52:27




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

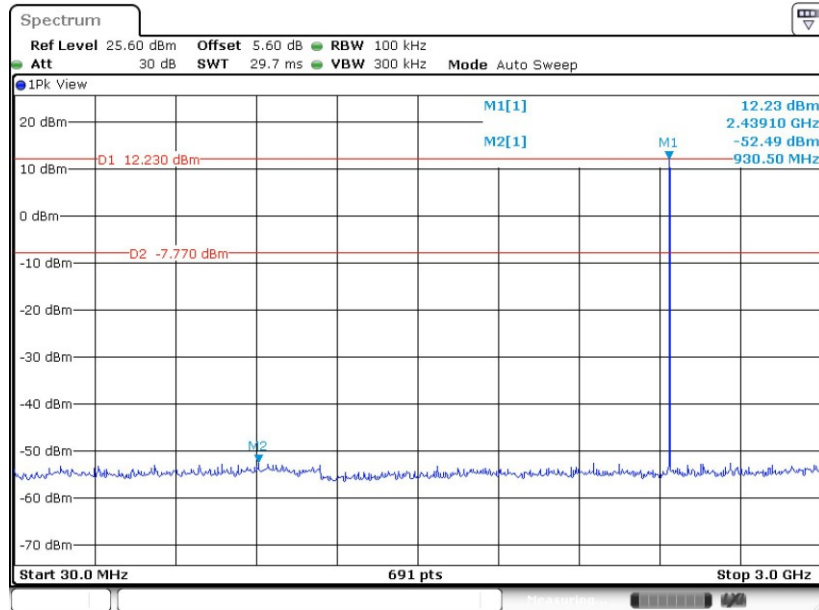

Date: 17.NOV.2020 09:55:52


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

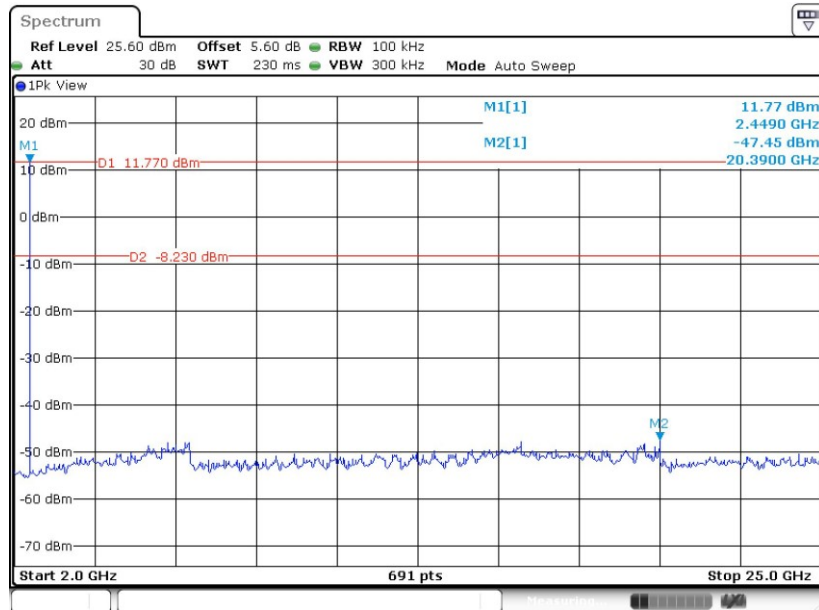

Date: 17.NOV.2020 09:56:19




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

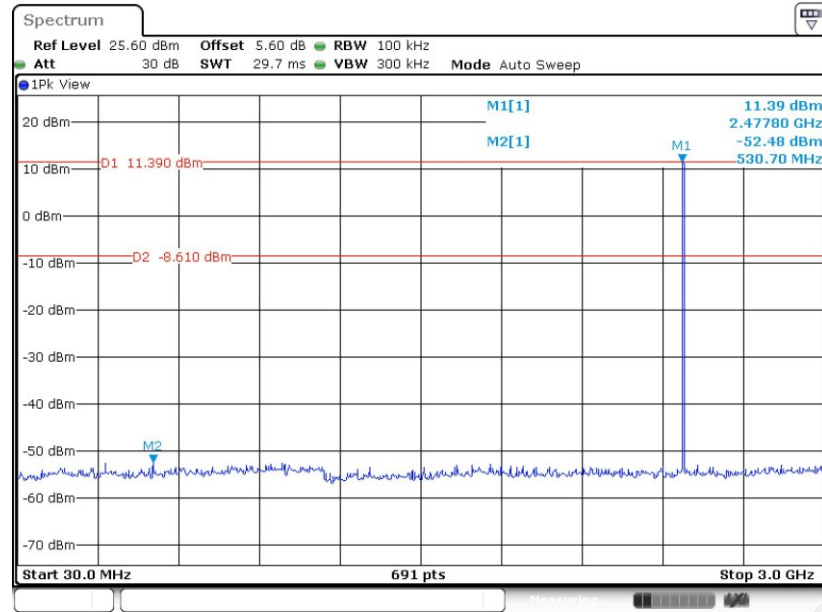

Date: 17.NOV.2020 10:03:32

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

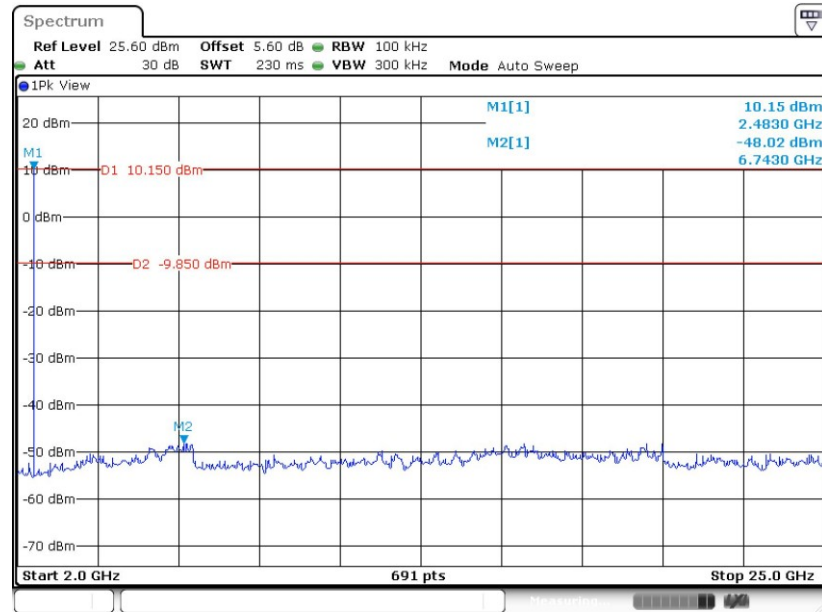


Date: 17.NOV.2020 10:04:00




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

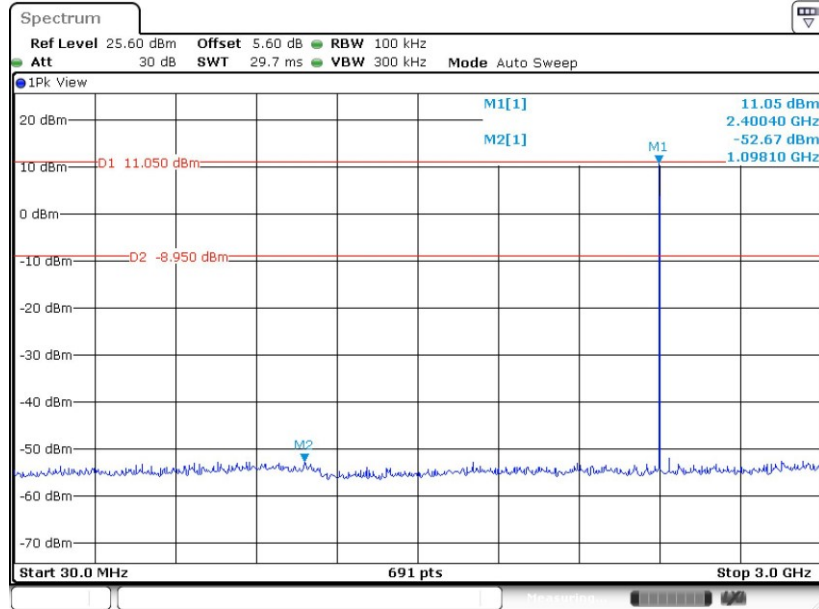

Date: 17.NOV.2020 10:08:53


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

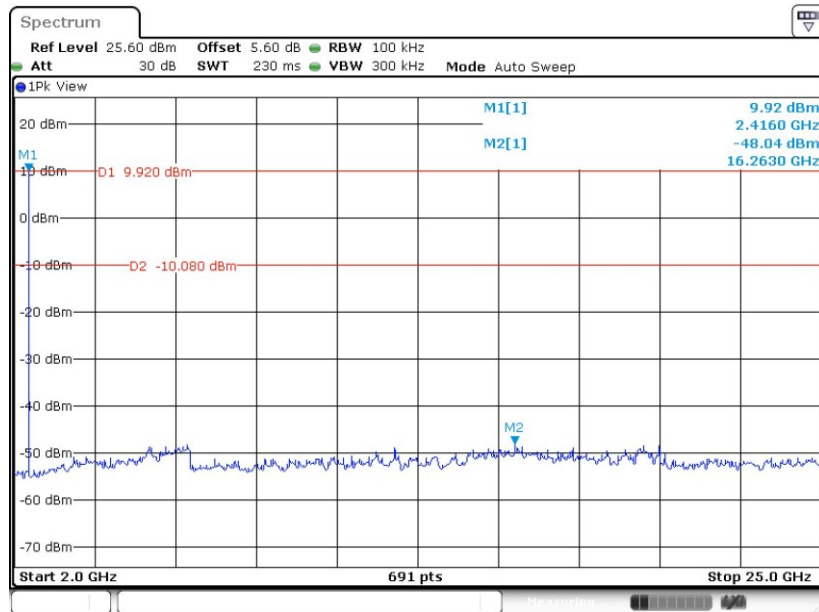

Date: 17.NOV.2020 10:09:20




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

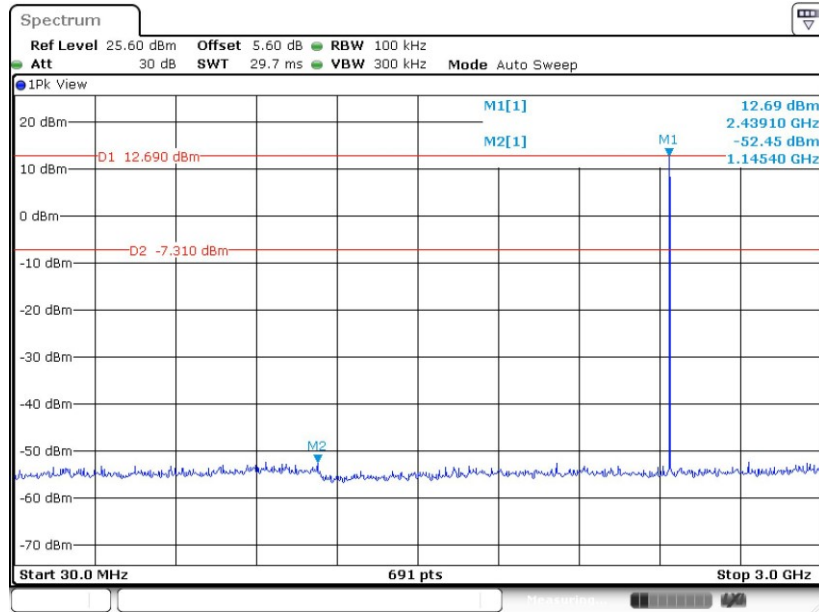

Date: 17.NOV.2020 10:21:52


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

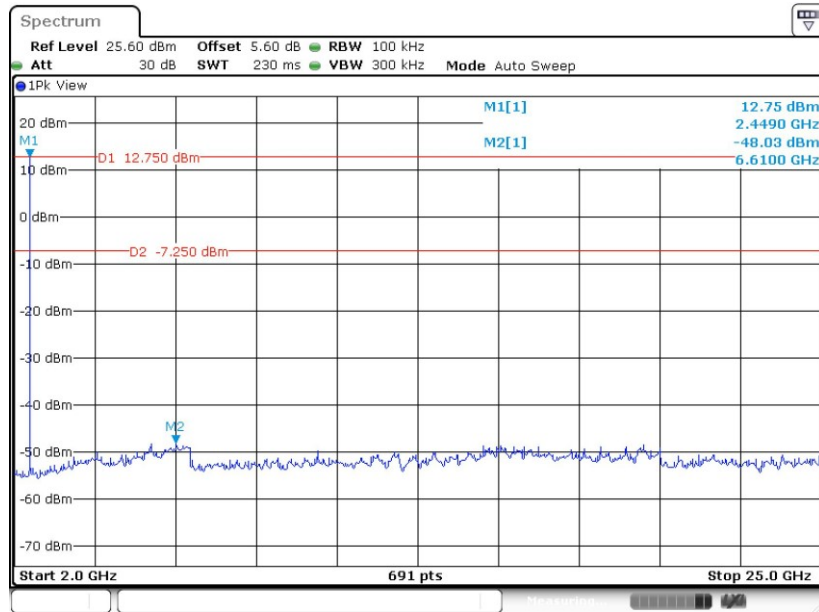

Date: 17.NOV.2020 10:22:20




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

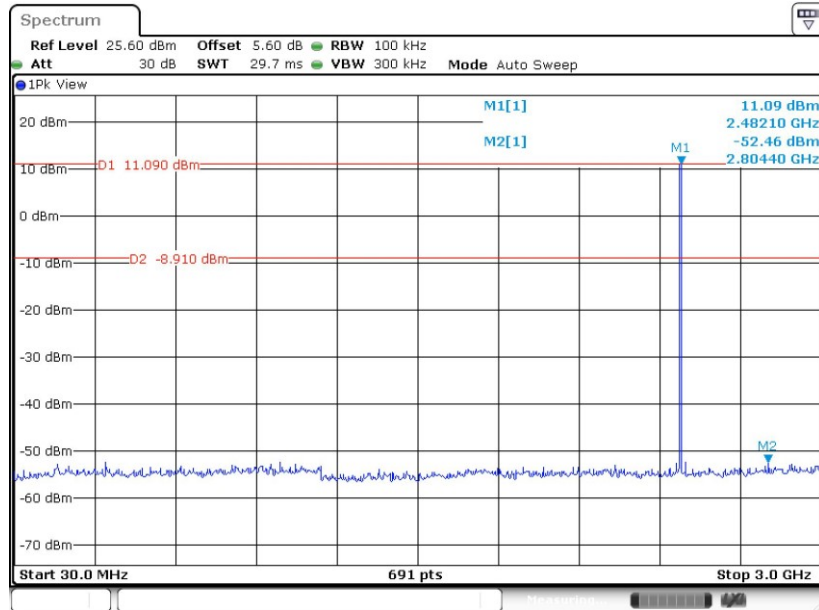

Date: 17.NOV.2020 10:36:47

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

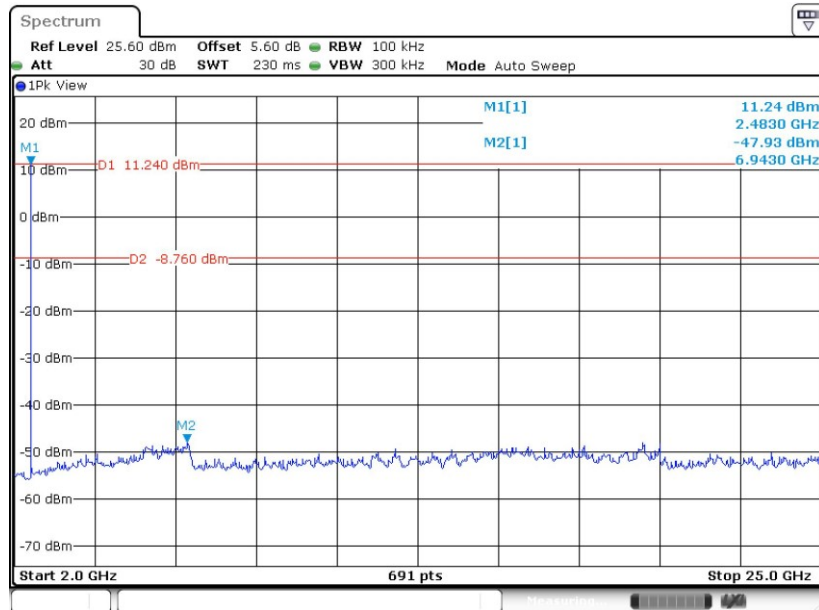

Date: 17.NOV.2020 10:37:14



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79 dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

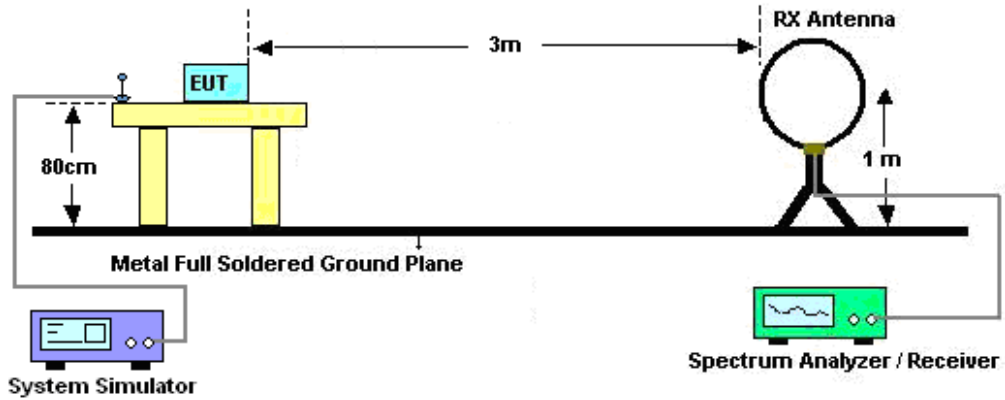

For radiated emissions from 30MHz to 1GHz

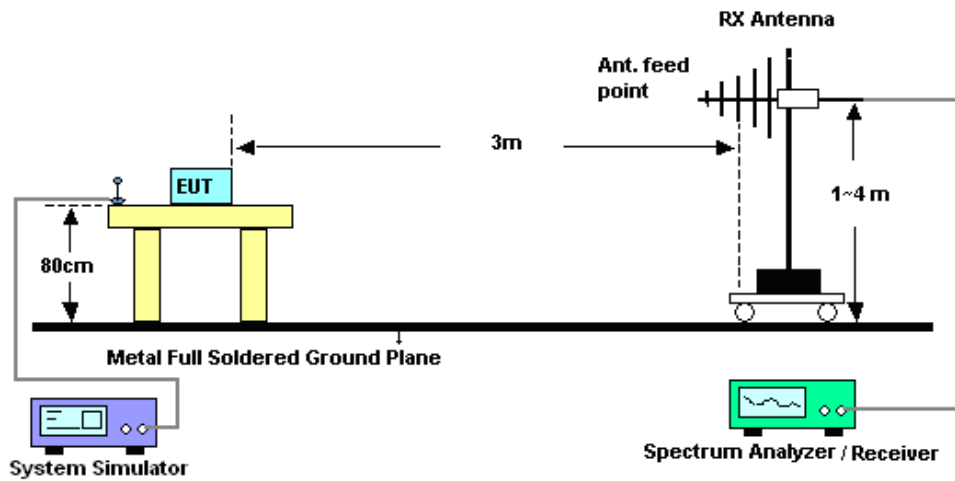

For radiated emissions above 1GHz

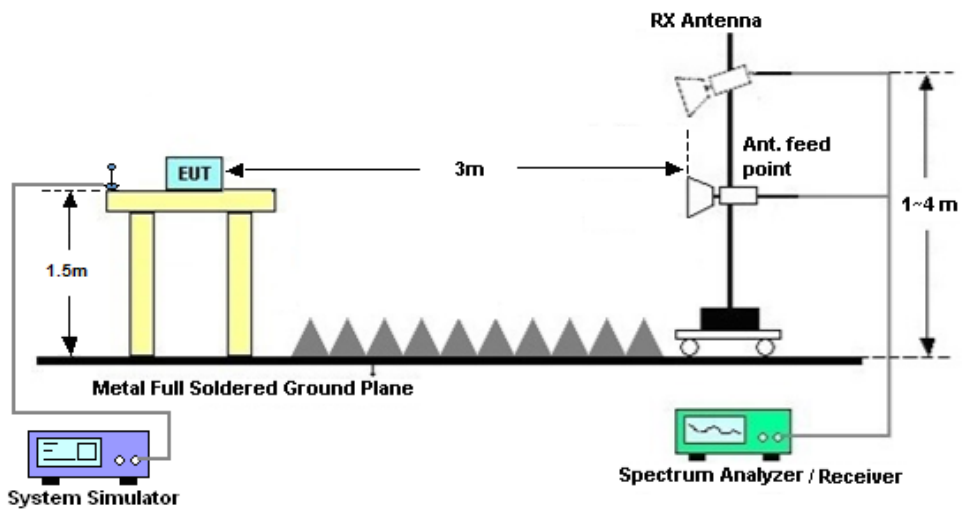



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

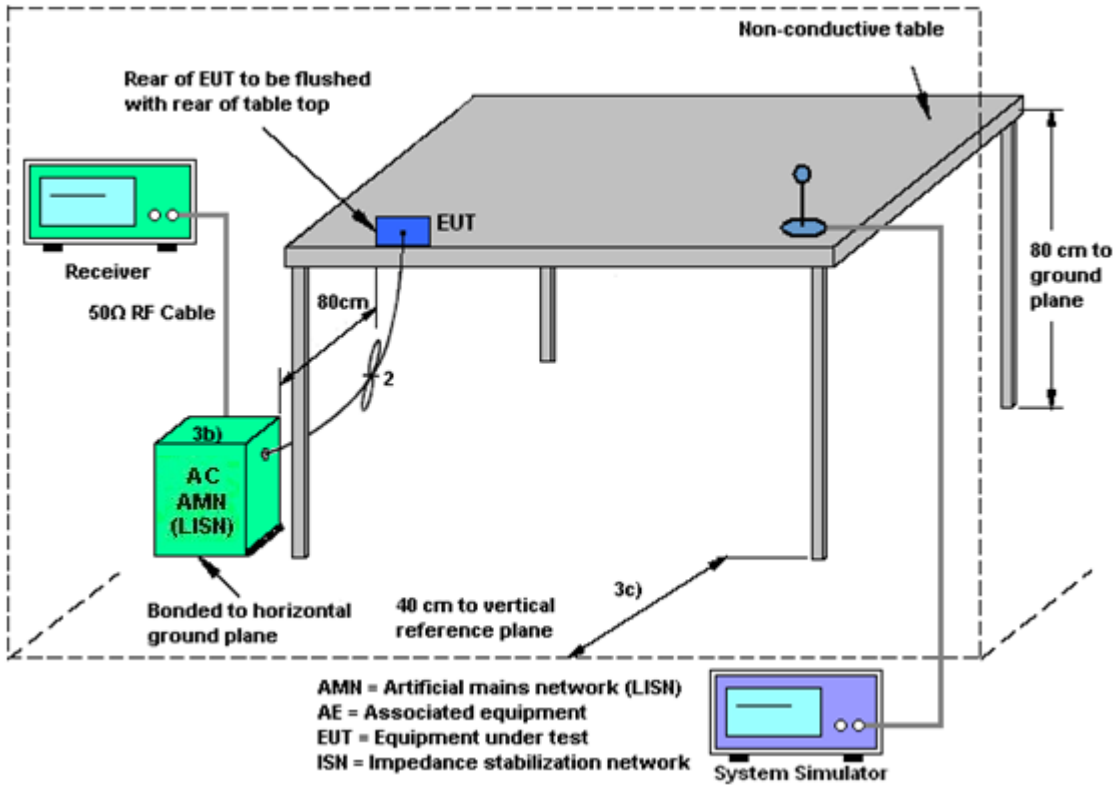

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2020	Nov. 11, 2020~ Nov. 17, 2020	Nov. 01, 2021	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 13, 2020	Nov. 11, 2020~ Nov. 17, 2020	Jan. 12, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 13, 2020	Nov. 11, 2020~ Nov. 17, 2020	Jan. 12, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Nov. 22, 2020~ Dec. 08, 2020	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Nov. 22, 2020~ Dec. 08, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Nov. 22, 2020~ Dec. 08, 2020	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Nov. 22, 2020~ Dec. 08, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Nov. 22, 2020~ Dec. 08, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 09, 2020	Nov. 22, 2020~ Dec. 08, 2020	Nov. 08, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Nov. 22, 2020~ Dec. 08, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Nov. 22, 2020~ Dec. 08, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 03, 2020	Nov. 22, 2020~ Dec. 08, 2020	Jan. 02, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Nov. 22, 2020~ Dec. 08, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 22, 2020~ Dec. 08, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 22, 2020~ Dec. 08, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 22, 2020~ Dec. 08, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Nov. 12, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Nov. 12, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 27, 2020	Nov. 12, 2020	Oct. 26, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Nov. 12, 2020	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

Bluetooth

Test Engineer:	Rise liu	Temperature:	20~26	°C
Test Date:	2020/11/11~2020/11/17	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (kHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.834	998.550	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.834	998.600	0.6252	Pass
DH	1Mbps	1	78	2480	0.938	0.834	998.600	0.6252	Pass
2DH	2Mbps	1	0	2402	1.285	1.164	994.200	0.8567	Pass
2DH	2Mbps	1	39	2441	1.285	1.164	1002.900	0.8567	Pass
2DH	2Mbps	1	78	2480	1.289	1.166	1033.300	0.8596	Pass
3DH	3Mbps	1	0	2402	1.233	1.152	1002.900	0.8220	Pass
3DH	3Mbps	1	39	2441	1.233	1.149	1302.500	0.8220	Pass
3DH	3Mbps	1	78	2480	1.229	1.149	985.500	0.8191	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.8884	0.31	0.4	Pass
AFH	20	53.33	2.8884	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	9.52	20.97	Pass
	39	1	10.95	20.97	Pass
	78	1	9.97	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	9.02	20.97	Pass
	39	1	10.49	20.97	Pass
	78	1	9.59	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	9.49	20.97	Pass
	39	1	10.99	20.97	Pass
	78	1	10.08	20.97	Pass


TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

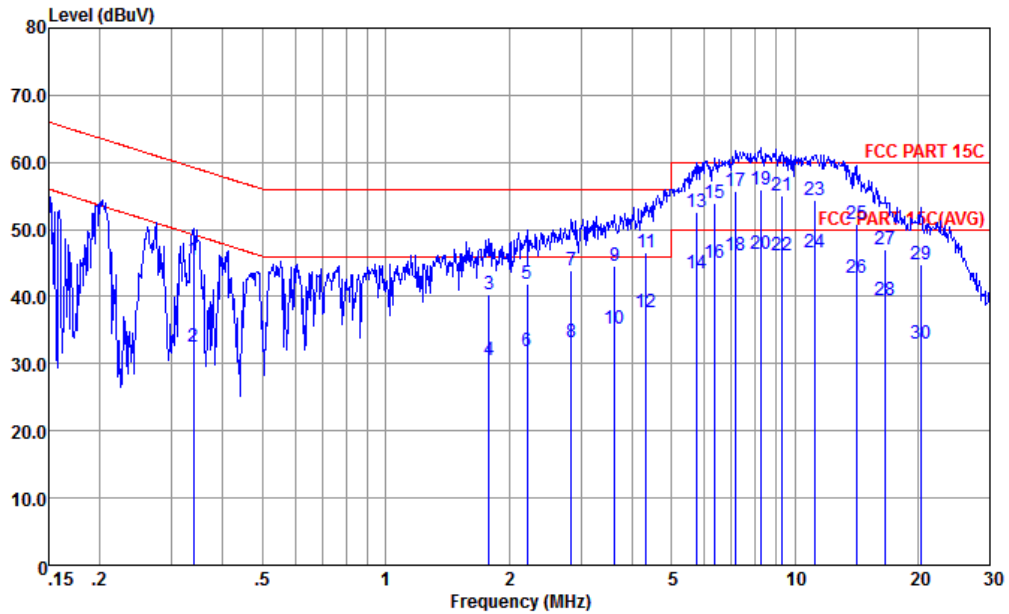


Site : CO01-KS
Condition : FCC PART 15C TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.339	45.53	-13.69	59.22	25.60	9.64	10.29	QP
2	0.339	32.43	-16.79	49.22	12.50	9.64	10.29	Average
3	1.790	40.33	-15.67	56.00	20.20	9.90	10.23	QP
4	1.790	30.43	-15.57	46.00	10.30	9.90	10.23	Average
5	2.213	42.00	-14.00	56.00	21.80	9.97	10.23	QP
6	2.213	31.80	-14.20	46.00	11.60	9.97	10.23	Average
7	2.839	43.88	-12.12	56.00	23.60	10.04	10.24	QP
8	2.839	33.18	-12.82	46.00	12.90	10.04	10.24	Average
9	3.623	44.48	-11.52	56.00	24.10	10.13	10.25	QP
10	3.623	35.18	-10.82	46.00	14.80	10.13	10.25	Average
11	4.338	46.65	-9.35	56.00	26.20	10.19	10.26	QP
12	4.338	37.65	-8.35	46.00	17.20	10.19	10.26	Average
13	5.774	52.49	-7.51	60.00	31.91	10.30	10.28	QP
14	5.774	43.49	-6.51	50.00	22.91	10.30	10.28	Average
15	6.386	53.84	-6.16	60.00	33.20	10.35	10.29	QP
16	6.386	44.94	-5.06	50.00	24.30	10.35	10.29	Average
17	7.175	55.60	-4.40	60.00	34.89	10.40	10.31	QP
18	7.175	46.20	-3.80	50.00	25.49	10.40	10.31	Average
19	8.235	55.96	-4.04	60.00	35.20	10.44	10.32	QP
20	8.235	46.26	-3.74	50.00	25.50	10.44	10.32	Average
21	9.302	55.01	-4.99	60.00	34.20	10.48	10.33	QP
22	9.302	46.21	-3.79	50.00	25.40	10.48	10.33	Average
23	11.198	54.47	-5.53	60.00	33.50	10.61	10.36	QP
24 *	11.198	46.57	-3.43	50.00	25.60	10.61	10.36	Average
25	14.213	50.86	-9.14	60.00	29.63	10.84	10.39	QP
26	14.213	42.83	-7.17	50.00	21.60	10.84	10.39	Average
27	16.661	47.02	-12.98	60.00	25.60	10.99	10.43	QP
28	16.661	39.52	-10.48	50.00	18.10	10.99	10.43	Average
29	20.377	44.88	-15.12	60.00	23.20	11.18	10.50	QP
30	20.377	32.98	-17.02	50.00	11.30	11.18	10.50	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

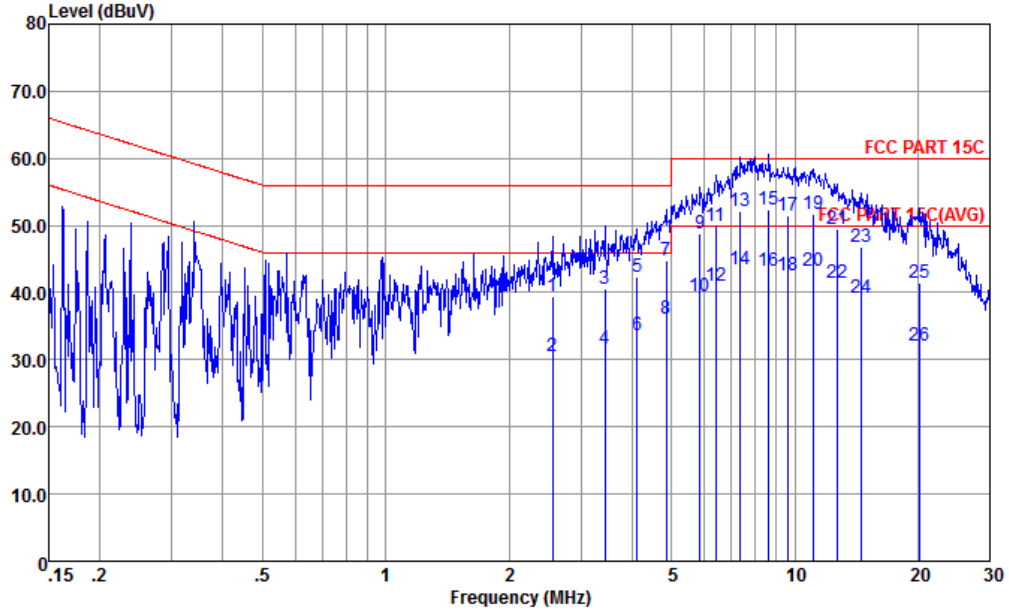

Site : CO01-KS
 Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.554	39.45	-16.55	56.00	19.20	10.01	10.24	QP
2	2.554	30.55	-15.45	46.00	10.30	10.01	10.24	Average
3	3.436	40.67	-15.33	56.00	20.30	10.12	10.25	QP
4	3.436	31.67	-14.33	46.00	11.30	10.12	10.25	Average
5	4.114	42.24	-13.76	56.00	21.81	10.18	10.25	QP
6	4.114	33.74	-12.26	46.00	13.31	10.18	10.25	Average
7	4.848	44.71	-11.29	56.00	24.20	10.24	10.27	QP
8	4.848	36.01	-9.99	46.00	15.50	10.24	10.27	Average
9	5.867	48.82	-11.18	60.00	28.21	10.33	10.28	QP
10	5.867	39.52	-10.48	50.00	18.91	10.33	10.28	Average
11	6.420	49.87	-10.13	60.00	29.21	10.37	10.29	QP
12	6.420	40.97	-9.03	50.00	20.31	10.37	10.29	Average
13	7.368	52.04	-7.96	60.00	31.29	10.44	10.31	QP
14 *	7.368	43.34	-6.66	50.00	22.59	10.44	10.31	Average
15	8.637	52.32	-7.68	60.00	31.49	10.50	10.33	QP
16	8.637	43.12	-6.88	50.00	22.29	10.50	10.33	Average
17	9.654	51.47	-8.53	60.00	30.59	10.54	10.34	QP
18	9.654	42.47	-7.53	50.00	21.59	10.54	10.34	Average
19	11.139	51.64	-8.36	60.00	30.60	10.68	10.36	QP
20	11.139	43.34	-6.66	50.00	22.30	10.68	10.36	Average
21	12.716	49.42	-10.58	60.00	28.21	10.84	10.37	QP
22	12.716	41.52	-8.48	50.00	20.31	10.84	10.37	Average
23	14.594	46.91	-13.09	60.00	25.51	11.01	10.39	QP
24	14.594	39.21	-10.79	50.00	17.81	11.01	10.39	Average
25	20.270	41.55	-18.45	60.00	19.60	11.45	10.50	QP
26	20.270	32.15	-17.85	50.00	10.20	11.45	10.50	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2371.88	53.39	-20.61	74	47.89	32.1	7.4	34	387	85	P	H
		2371.88	28.6	-25.4	54	-	-	-	-	-	-	A	H
	*	2402	108.88	-	-	103.23	32.2	7.43	33.98	387	85	P	H
	*	2402	84.09	-	-	-	-	-	-	-	-	A	H
		2379.68	53.26	-20.74	74	47.76	32.1	7.4	34	300	128	P	V
		2379.68	28.47	-25.53	54	-	-	-	-	-	-	A	V
	*	2402	104.38	-	-	98.73	32.2	7.43	33.98	300	128	P	V
	*	2402	79.59	-	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		2483.56	56.55	-17.45	74	50.94	31.99	7.56	33.94	365	91	P	H
		2483.56	31.76	-22.24	54	-	-	-	-	-	-	A	H
	*	2480	109.04	-	-	103.43	31.99	7.56	33.94	365	91	P	H
	*	2480	84.25	-	-	-	-	-	-	-	-	A	H
		2490.4	53.92	-20.08	74	48.32	31.94	7.59	33.93	354	109	P	V
		2490.4	29.13	-24.87	54	-	-	-	-	-	-	A	V
	*	2480	104.7	-	-	99.09	31.99	7.56	33.94	354	109	P	V
	*	2480	79.91	-	-	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4806	39.69	-34.31	74	56.46	35.16	10.65	62.58	100	360	P	H
		4806	39.8	-34.2	74	56.57	35.16	10.65	62.58	100	360	P	V
BT CH 39 2441MHz		4884	42.52	-31.48	74	58.8	35.17	10.75	62.2	100	360	P	H
		7320	43.55	-30.45	74	55.47	36.87	13.35	62.14	100	360	P	H
		4884	43.59	-30.41	74	59.87	35.17	10.75	62.2	100	360	P	V
		7320	44.05	-29.95	74	55.97	36.87	13.35	62.14	100	360	P	V
BT CH 78 2480MHz		4962	41.38	-32.62	74	57.35	35.19	10.87	62.03	100	360	P	H
		7440	41.76	-32.24	74	53.53	36.89	13.45	62.11	100	360	P	H
		4962	40.61	-33.39	74	56.58	35.19	10.87	62.03	100	360	P	V
		7440	42.23	-31.77	74	54	36.89	13.45	62.11	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		33.88	21.98	-18.02	40	30.29	22.98	0.91	32.2	-	-	P	H
		128.94	16.38	-27.12	43.5	28.94	17.6	1.98	32.14	-	-	P	H
		170.65	22.01	-21.49	43.5	36.18	15.65	2.28	32.1	-	-	P	H
		220.12	23.91	-22.09	46	38.16	15.3	2.59	32.14	-	-	P	H
		314.21	25.76	-20.24	46	35.26	19.54	3.09	32.13	-	-	P	H
		843.83	28.05	-17.95	46	26.23	29.17	5.04	32.39	100	0	P	H
		32.91	30.75	-9.25	40	38.55	23.51	0.89	32.2	100	360	P	V
		54.25	25.69	-14.31	40	43.22	13.4	1.27	32.2	-	-	P	V
		115.36	20.73	-22.77	43.5	33.7	17.33	1.87	32.17	-	-	P	V
		207.51	21.66	-21.84	43.5	36.07	15.18	2.52	32.11	-	-	P	V
		613.94	24.39	-21.61	46	26.36	25.99	4.31	32.27	-	-	P	V
		948.59	28.19	-17.81	46	24.08	30.96	5.35	32.2	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)


For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 00

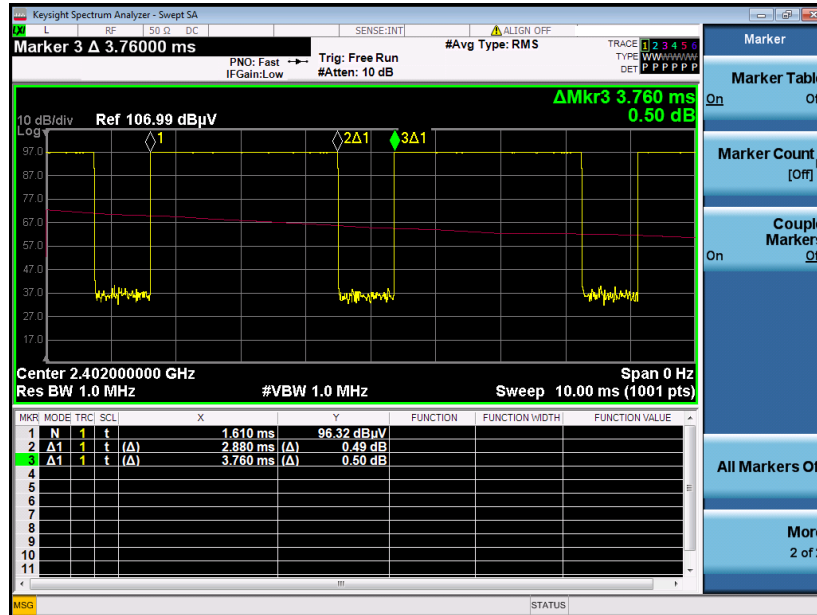

DH5 on time (Count Pulses) Plot on Channel 00

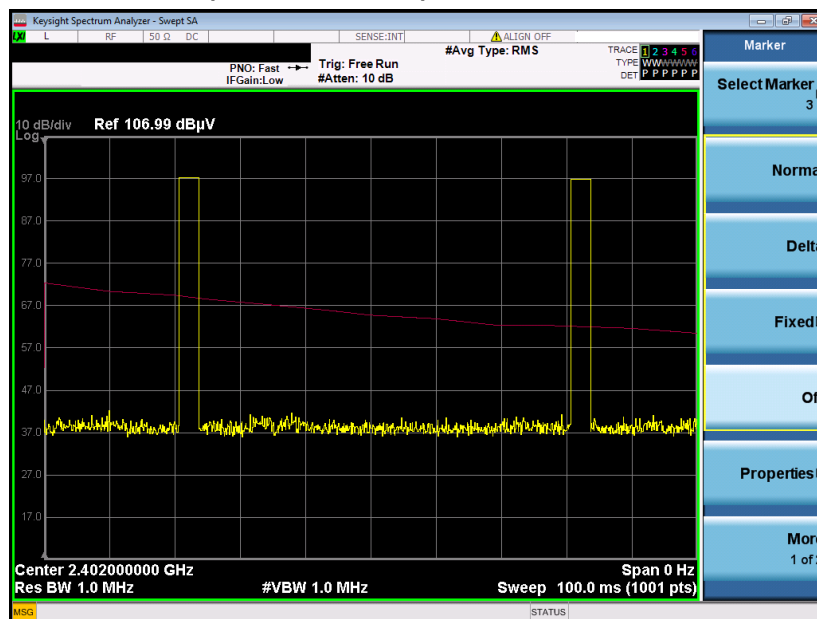

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.