

SUBMITTED MEASURED DATA INDEX

6A	RF Power Output - Measured Data
6B	Audio Response - Graph
6C	Post Limiter Low Pass Filter Response - Graph
6D	Signaling Channel Audio Roll-Off Filter Response - Graph
6E-1	Modulation Limiting (Compandor On) - Graph
6E-2	Modulation Limiting (Compandor Off) - Graph
6F-1	Occupied Bandwidth, Audio - Photograph
6F-2	Occupied Bandwidth, Audio and SAT - Graph
6F-3	Occupied Bandwidth, Wideband Data - Graph
6F-4	Occupied Bandwidth, Signaling Tone and SAT - Graph
6G	Conducted Spurious and Harmonic Emissions, -Graph
6H	Radiated Spurious and Harmonic Emissions, -Graph
6J	Reference Oscillator Stability vs. Temperature - Graph
6K	Reference Oscillator Stability vs. Supply Voltage

RF POWER OUTPUT DATA

The input supply to the transmitter was set at 13.7 Volts. The RF power output was measured with the indicated voltage and current applied into the final RF amplifying device(s).


Measured RF output: 3 W

Measured DC voltage: 13.7 V


Measured DC current: 450 mA

Measured RF input: 0.4 W


AUDIO RESPONSE

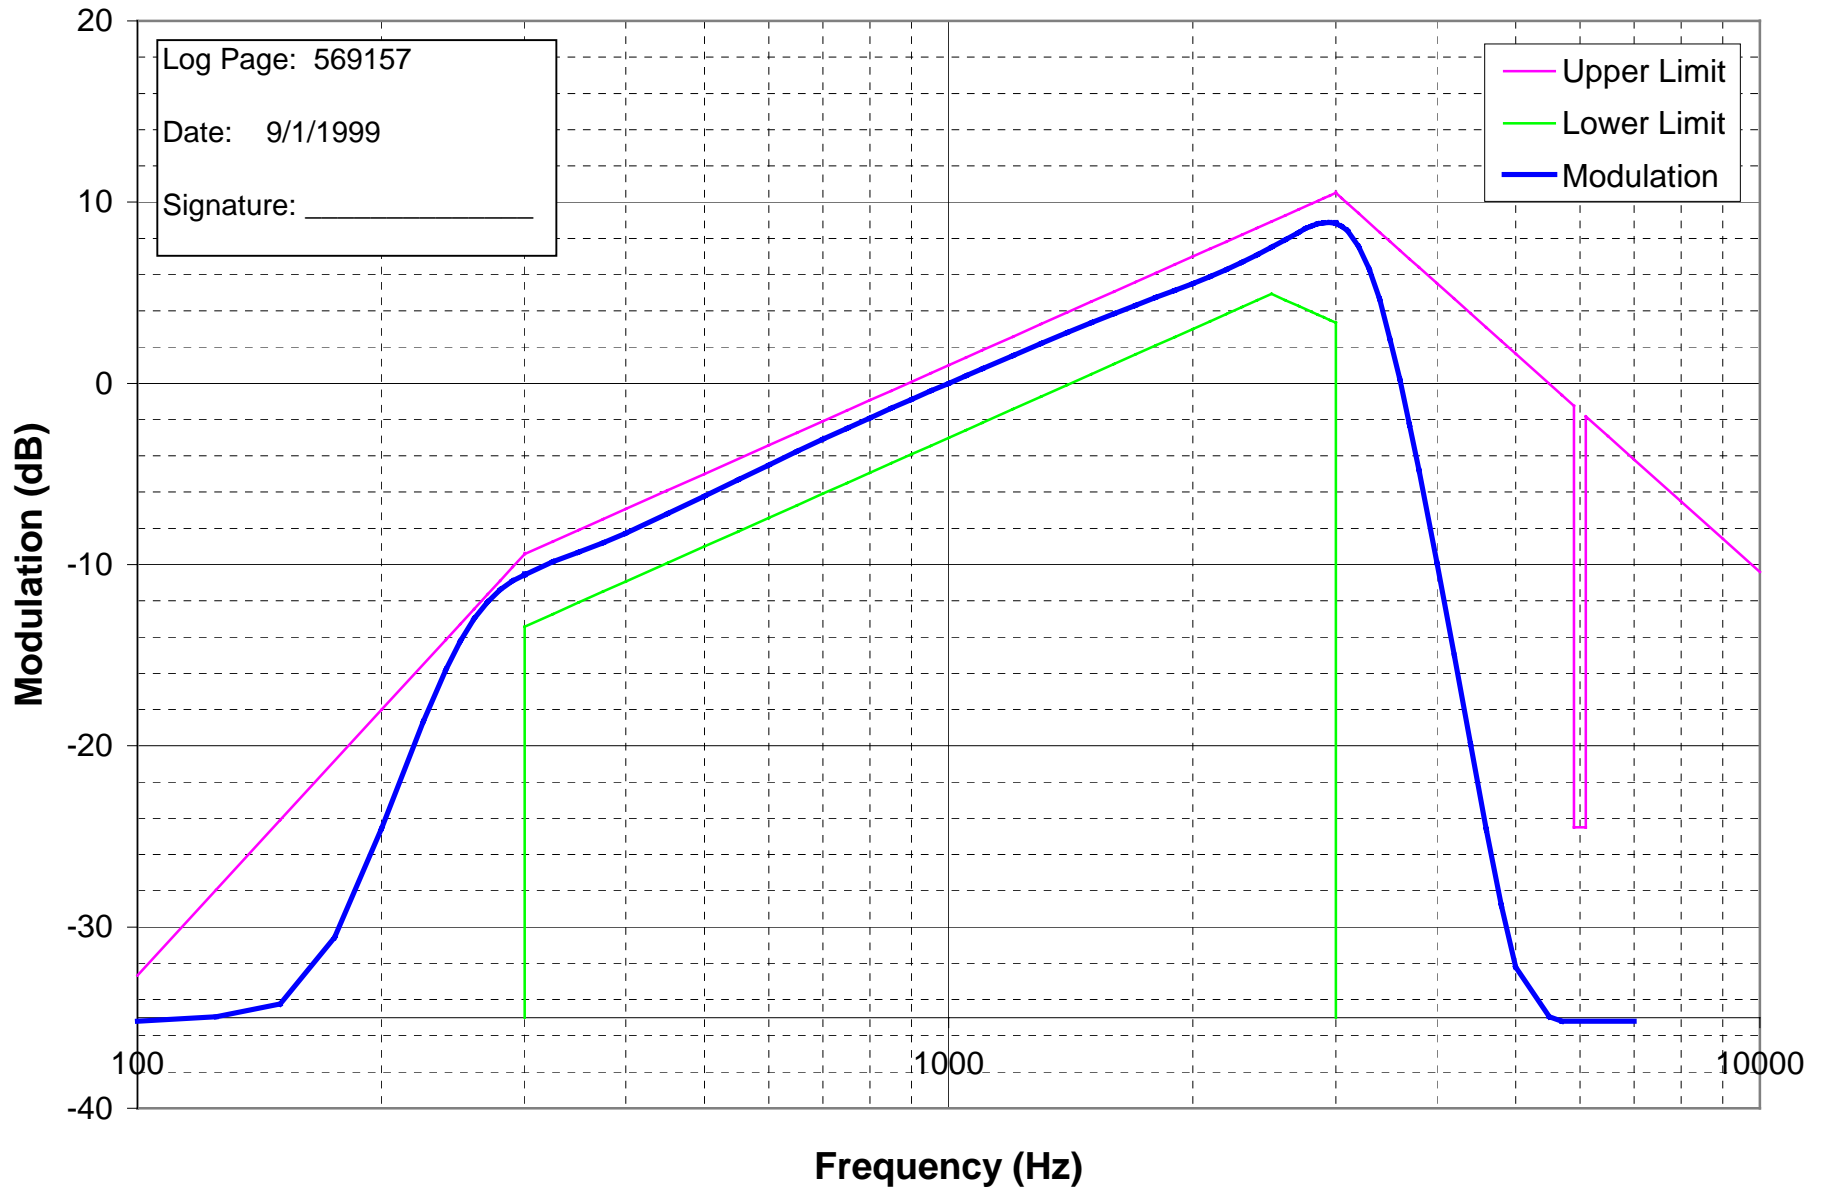



Post-Limiter Low Pass Filter Response

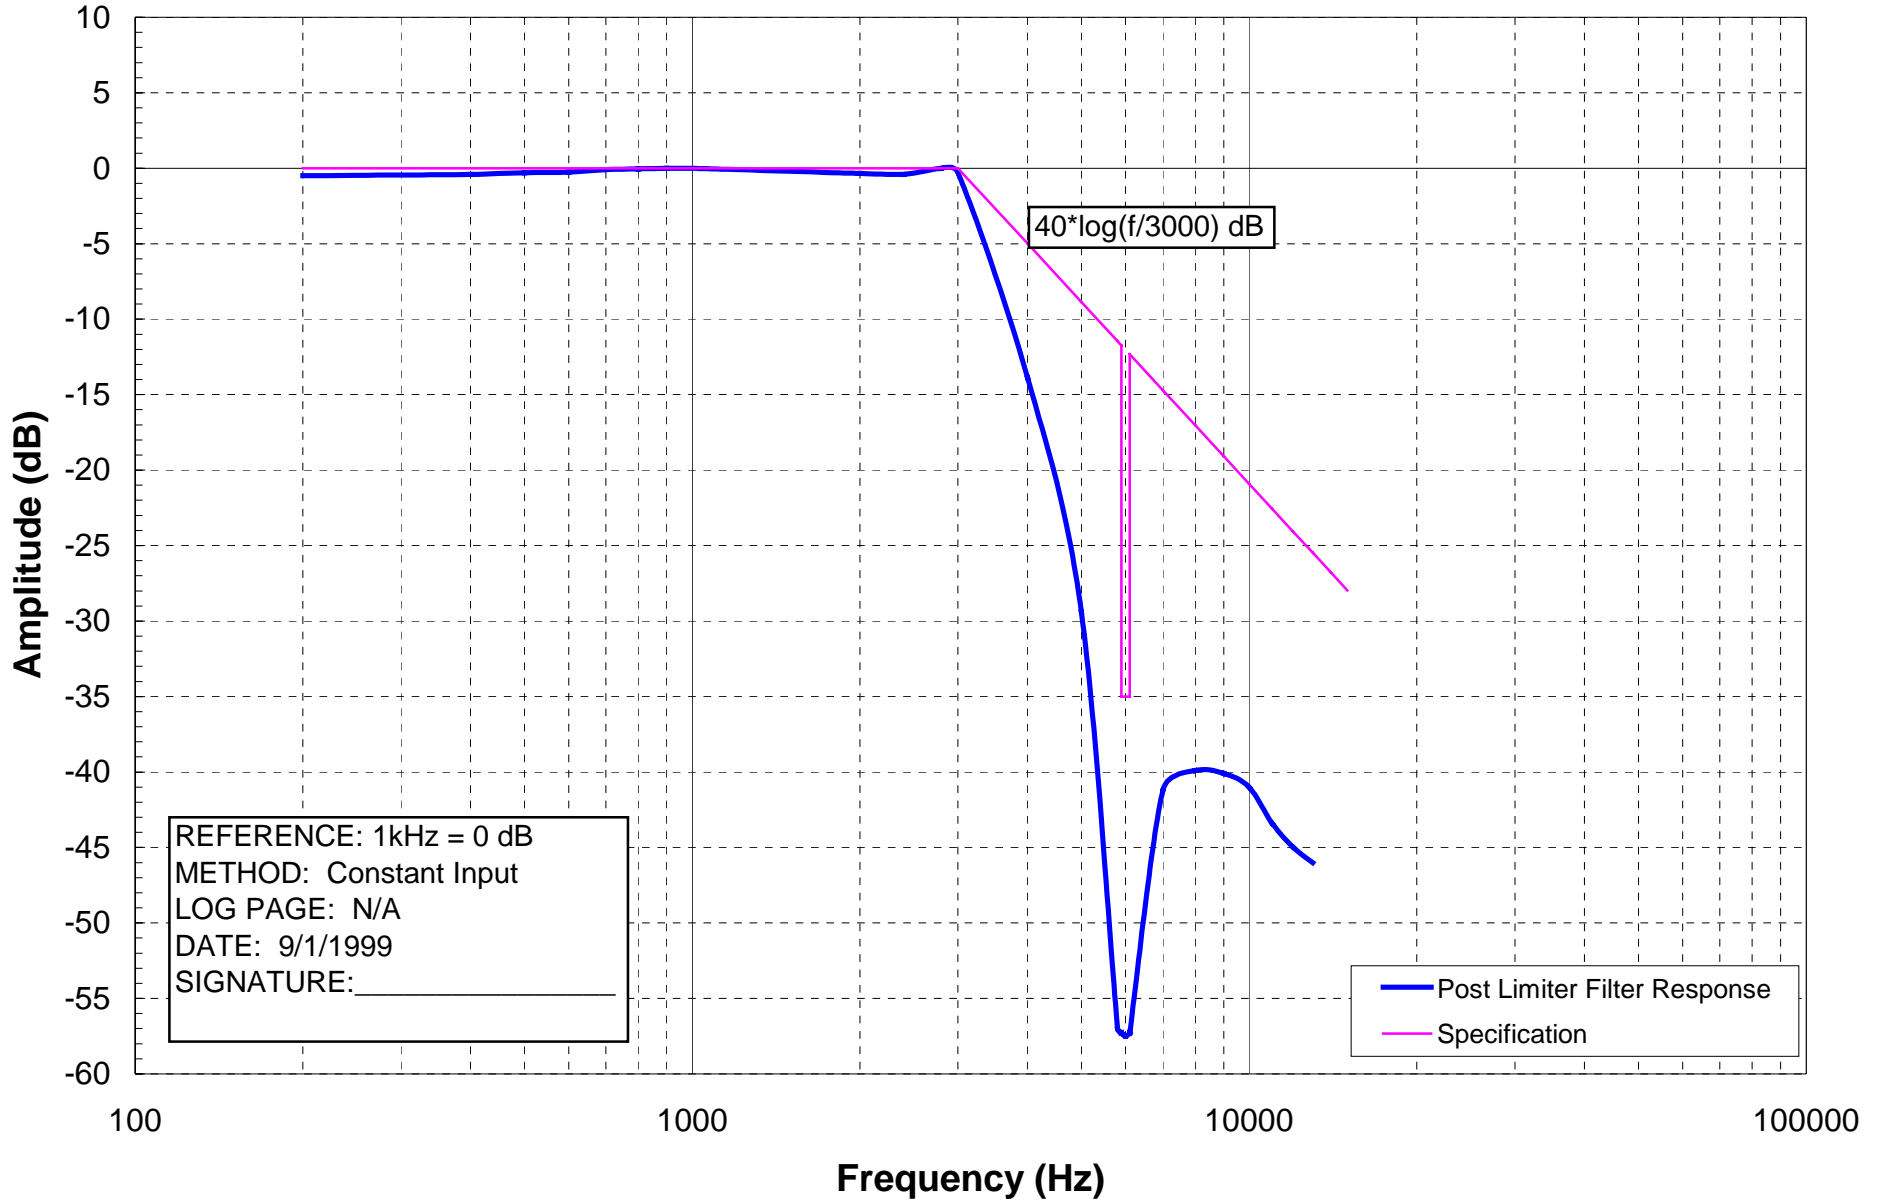

Signaling Channel Audio Roll-Off Filter Response

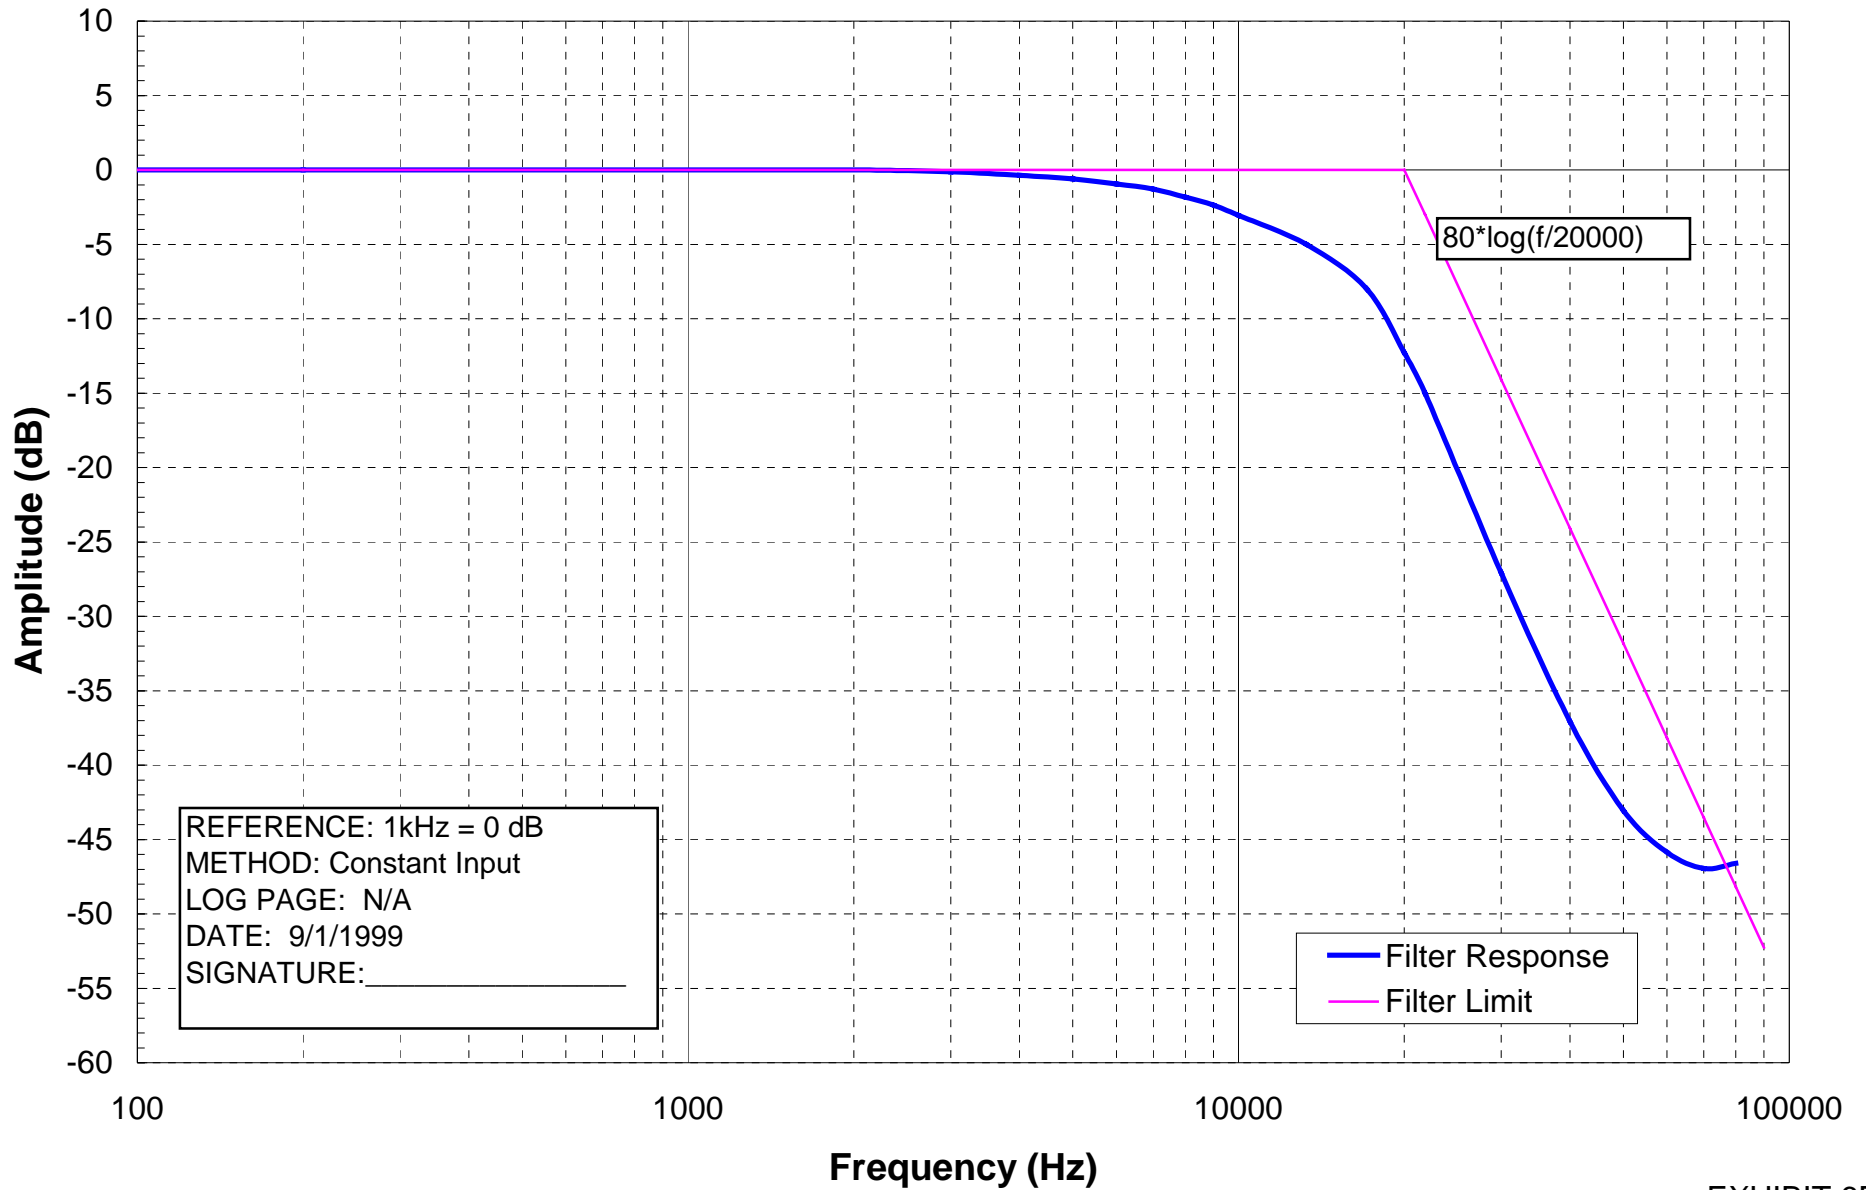

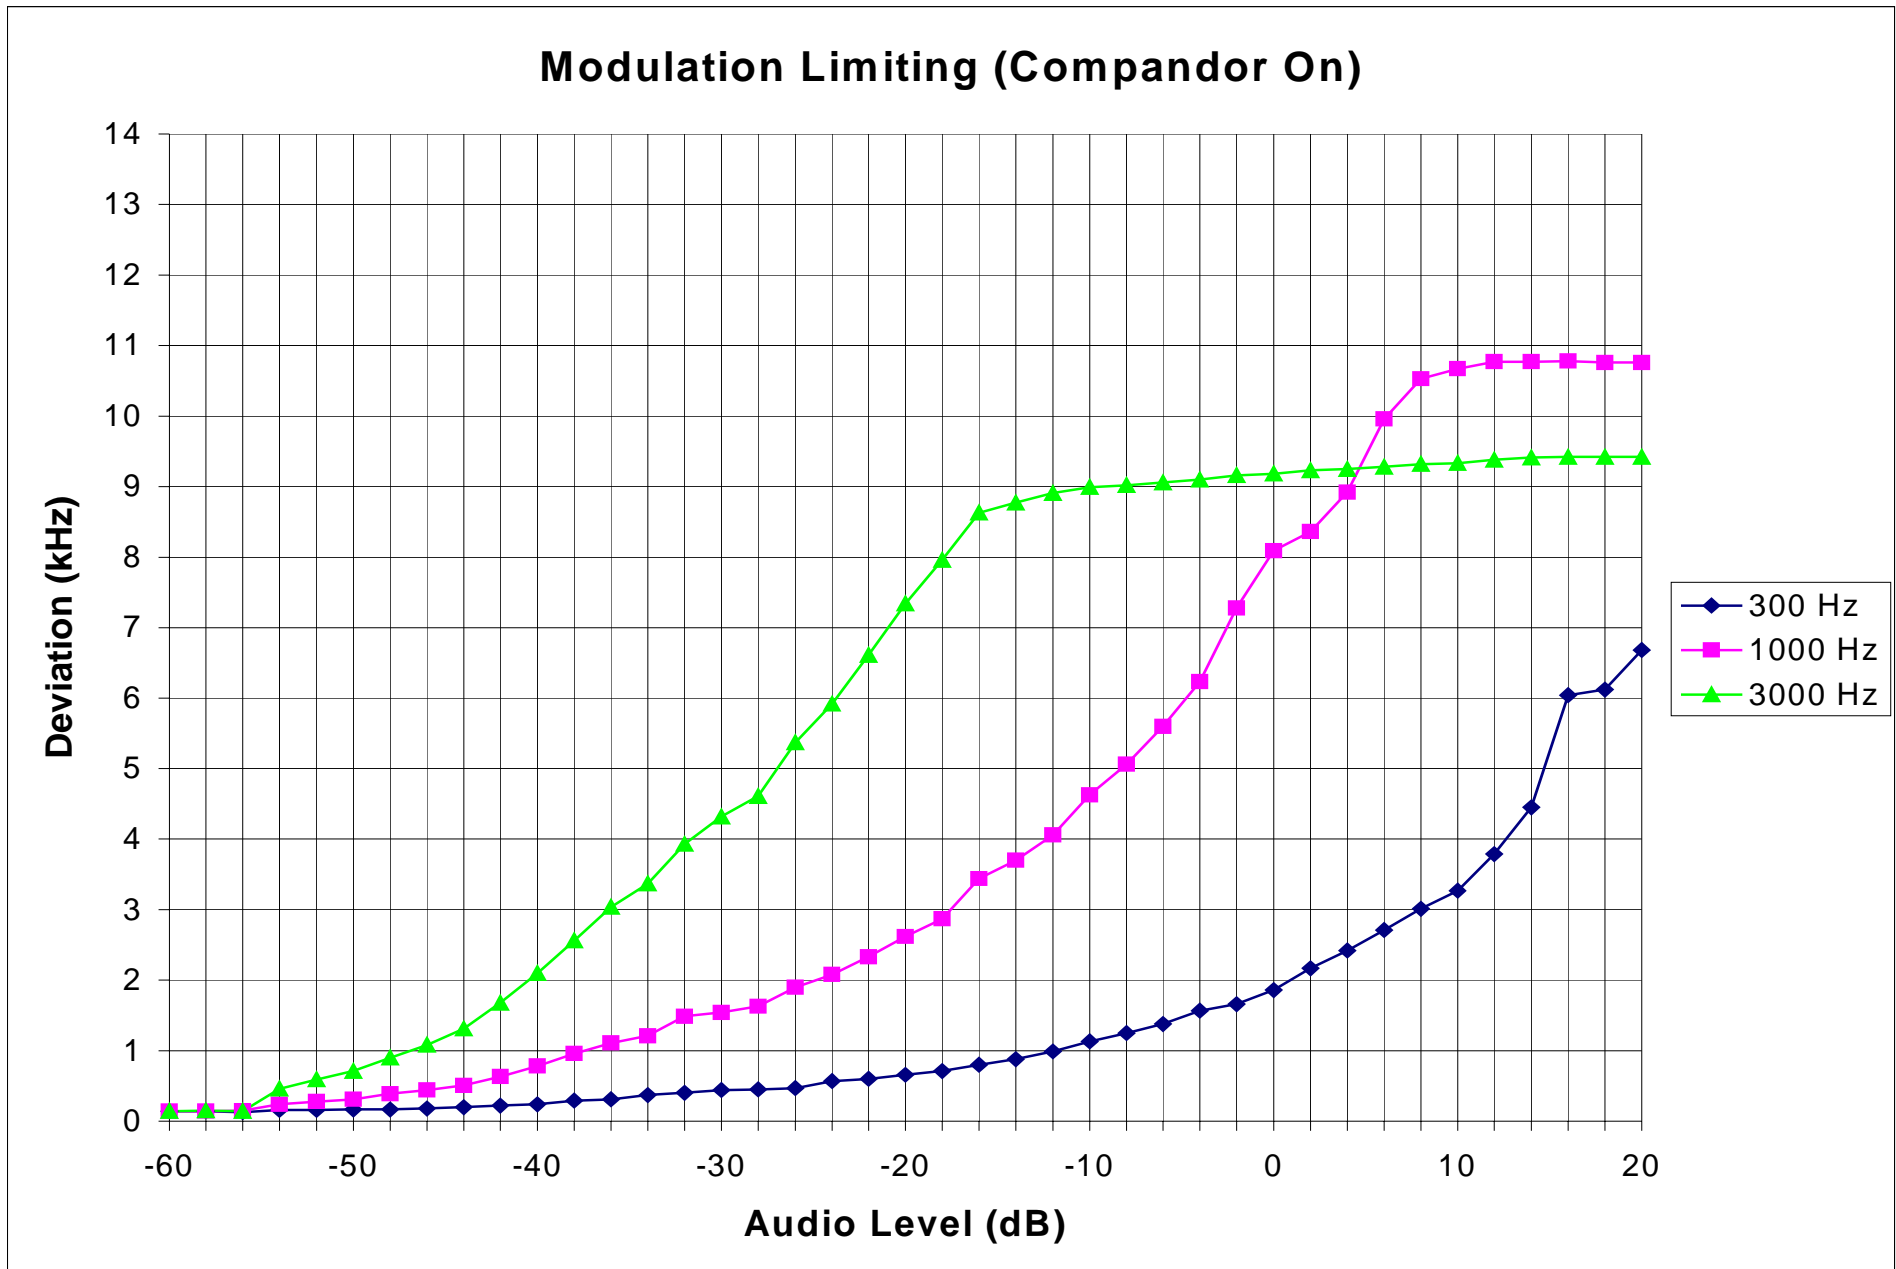

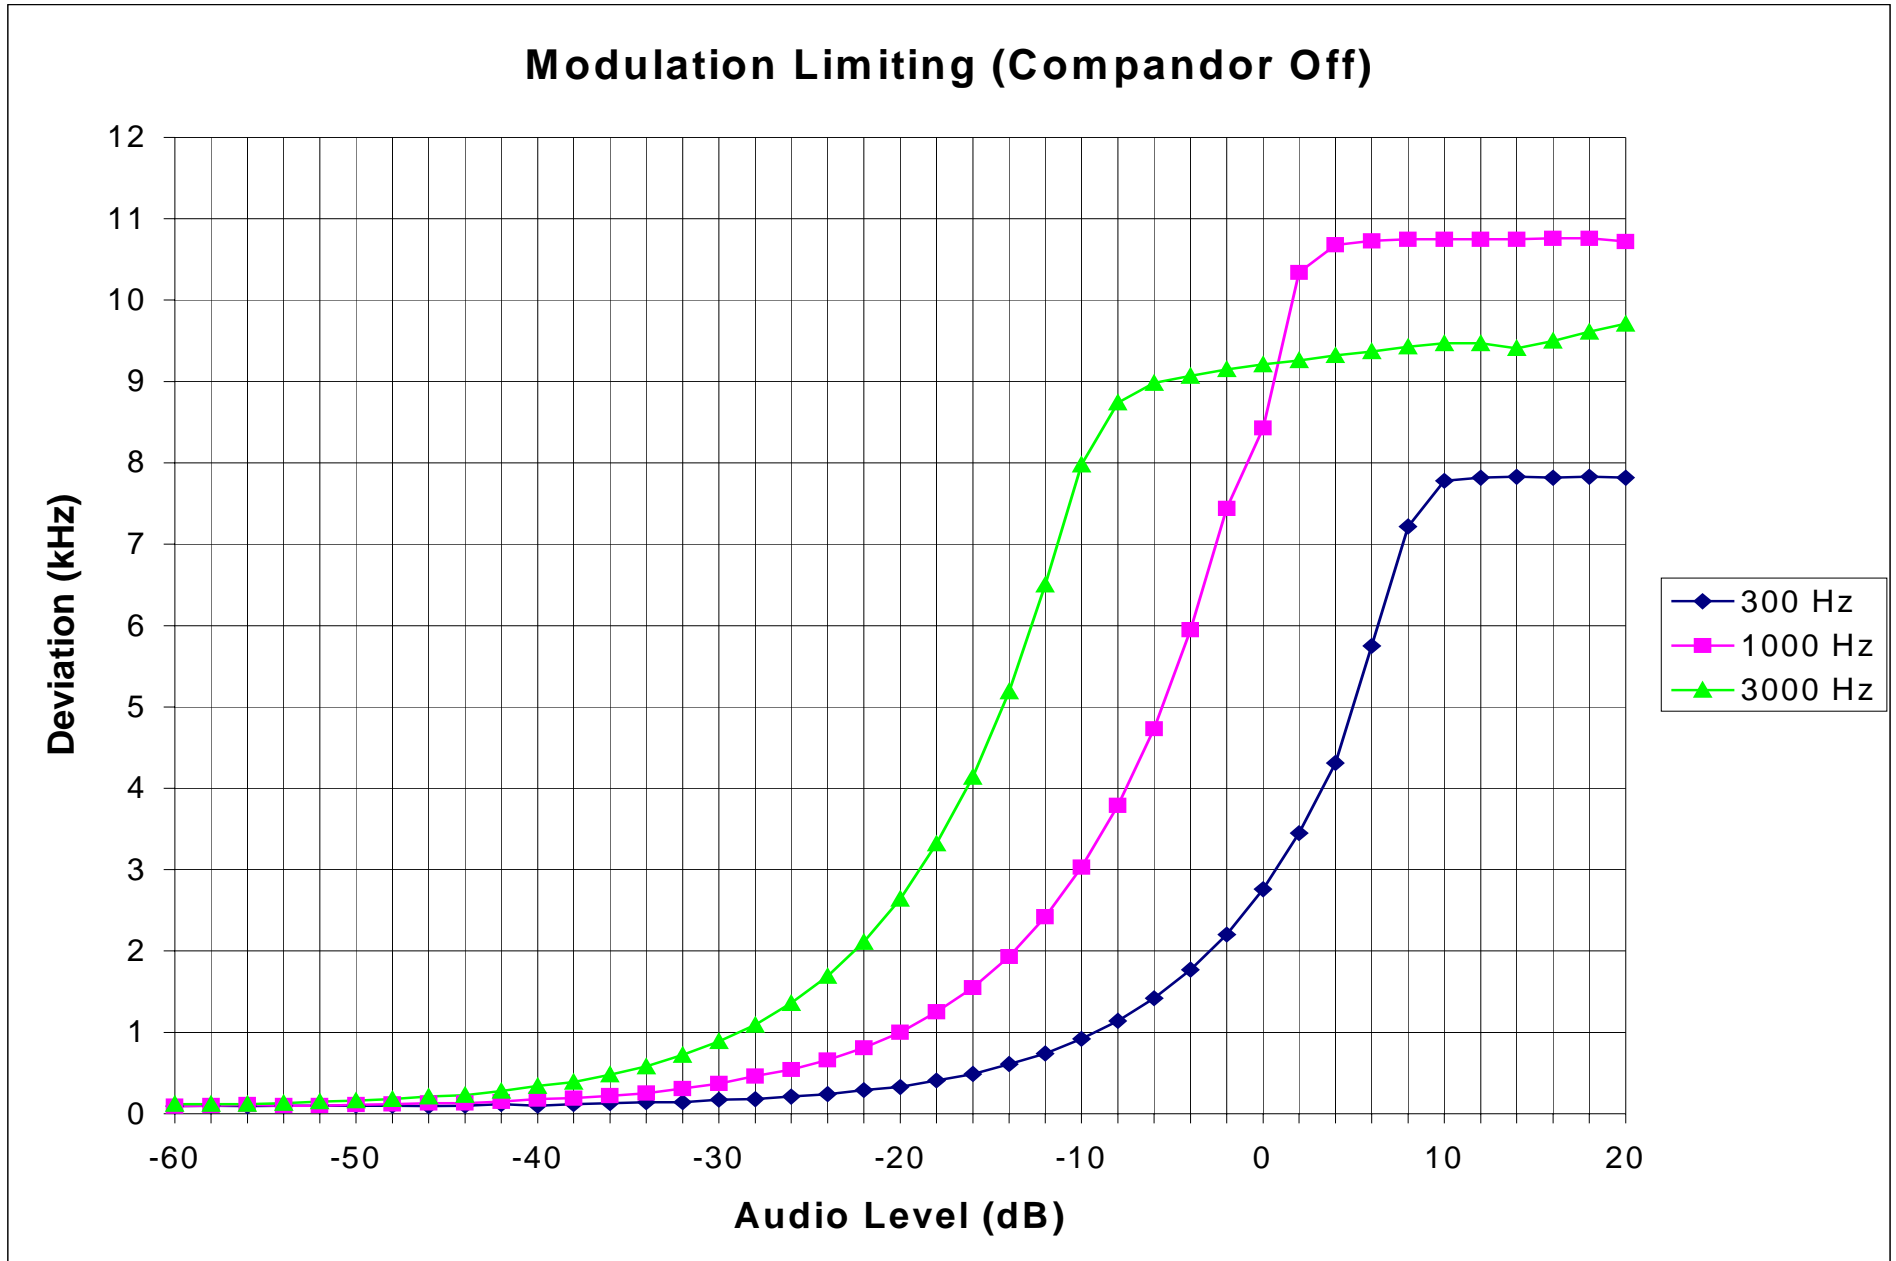

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F8W

DEVIATION OF THE CARRIER WITH 2500 Hz AUDIO MODULATION

HORIZONTAL SCALE = 20 kHz/DIVISION


VERTICAL SCALE = 10 dB/DIVISION (ATTENUATION)

RESOLUTION BANDWIDTH = 300 Hz

AUDIO LEVEL = 16 dB GREATER THAN LEVEL REQUIRED TO PRODUCE ±6kHz PEAK FM DEVIATION

POWER LEVEL = 3 W

MEASURED DATA:

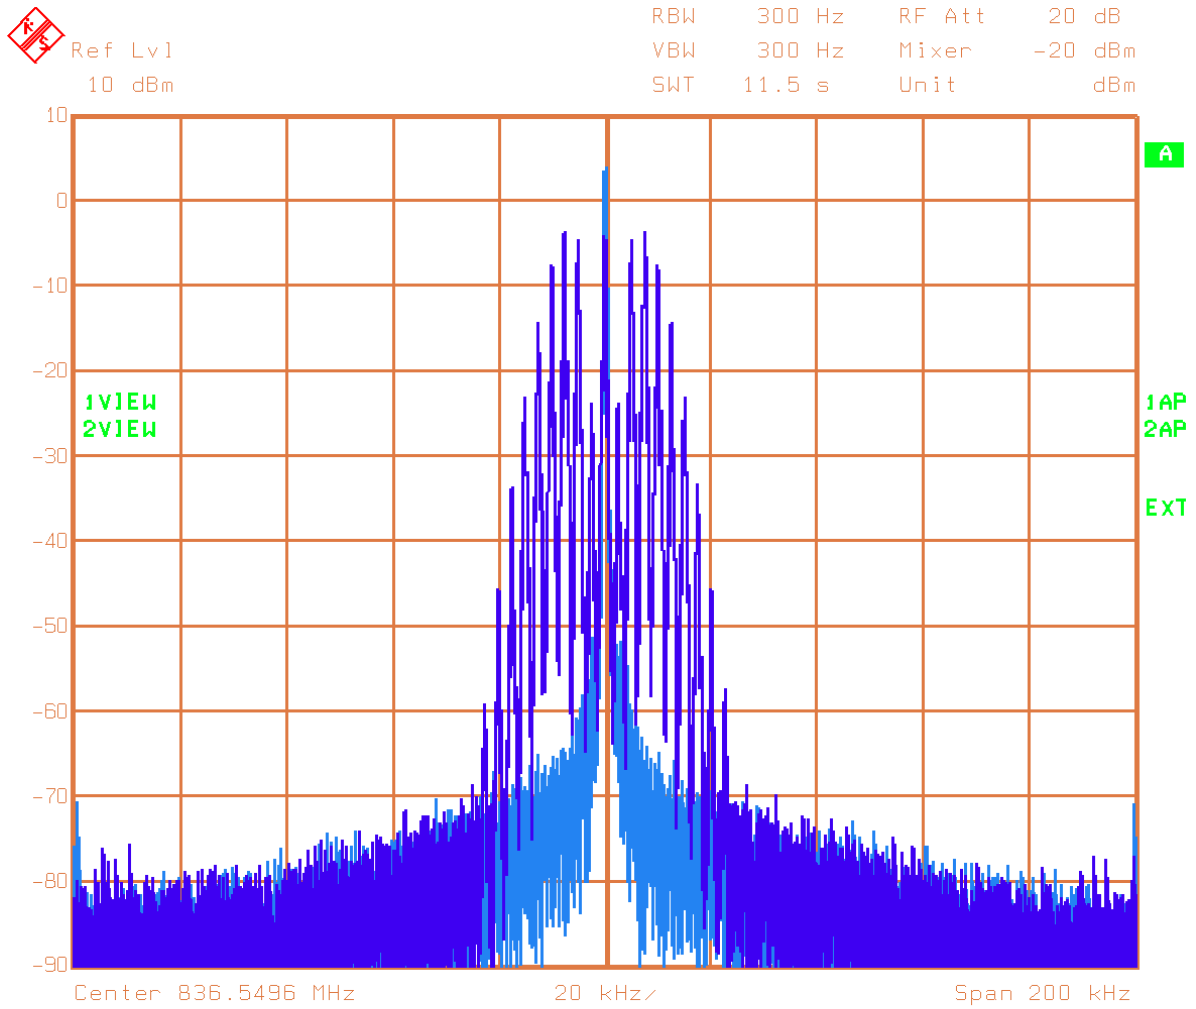

Date: 23.SEP.1999 22:24:41

1. Instantaneous Deviation Control set for a maximum of ±12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.

3. Modulate the transmitter with a 2.5 kHz tone, 16 dB greater than that required to produce ± 6 kHz deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, the sideband is at least $63 + 10\log_{10}$ (mean power output in Watts) dB below the carrier.

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F8W

DEVIATION OF THE CARRIER WITH 2500 Hz AUDIO MODULATION AND SUPERVISORY AUDIO TONE

HORIZONTAL SCALE = 20 kHz/DIVISION


VERTICAL SCALE = 10 dB/DIVISION (ATTENUATION)

RESOLUTION BANDWIDTH = 300 Hz

AUDIO LEVEL = 16 dB GREATER THAN LEVEL REQUIRED TO PRODUCE ±6kHz FM DEVIATION

POWER LEVEL = 3 W

MEASURED DATA:

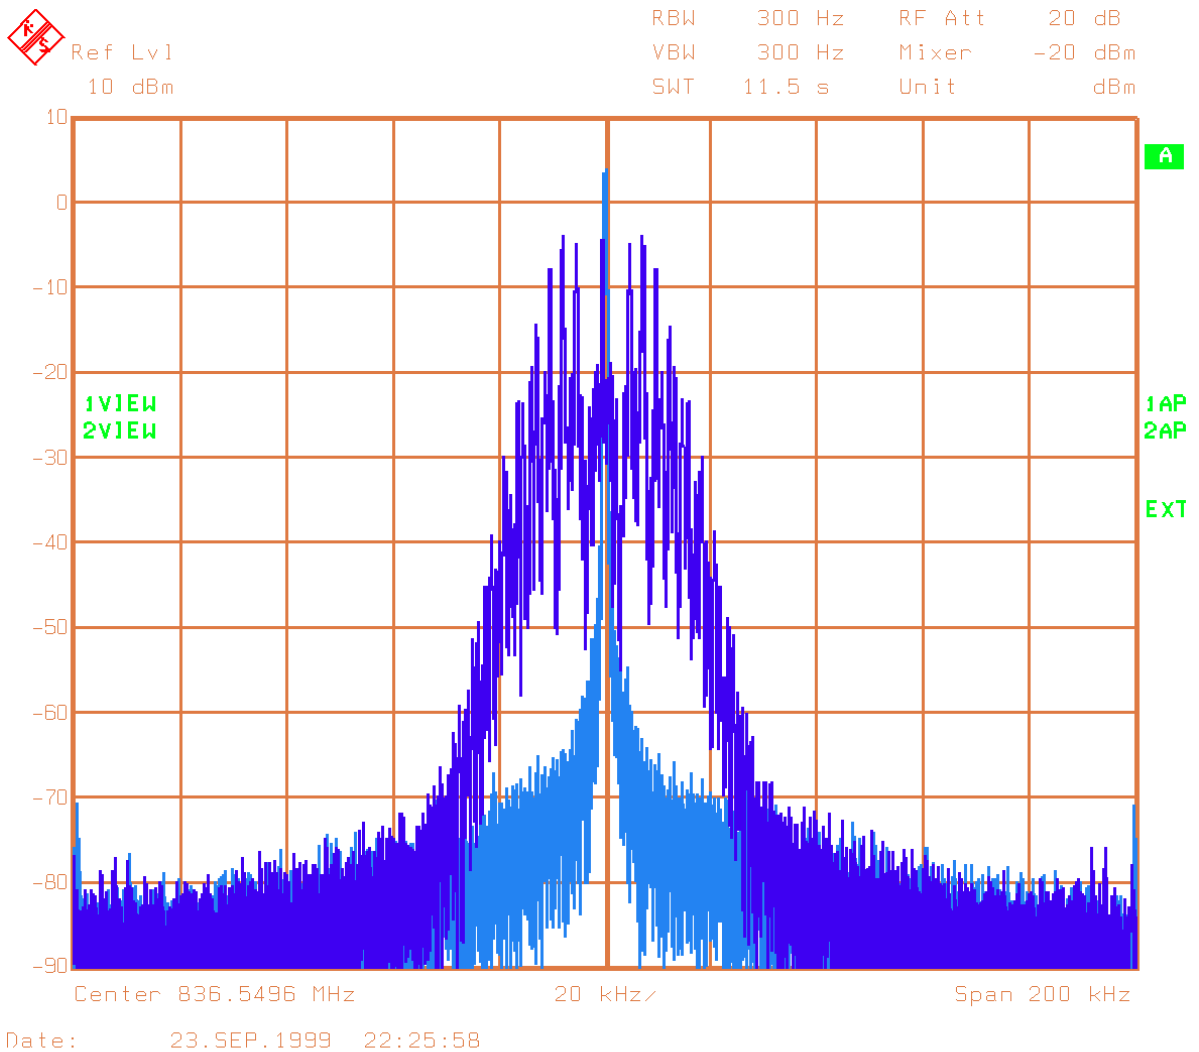

1. Instantaneous Deviation Control set for a maximum of ± 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.
3. Modulate the transmitter with a 2.5 kHz tone, 16 dB greater than that required to produce ± 6 kHz deviation and add a 6 kHz SAT with ± 2 kHz deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:


- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, the sideband is at least $63 + 10\log_{10}$ (mean power output in Watts) dB below the carrier.

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F1D

DEVIATION OF THE CARRIER WITH WIDE BAND DATA

HORIZONTAL SCALE = 20 kHz/DIVISION
 VERTICAL SCALE = 10 dB/DIVISION (ATTENUATION)
 RESOLUTION BANDWIDTH = 300 Hz
 POWER LEVEL = 3 W

MEASURED DATA:

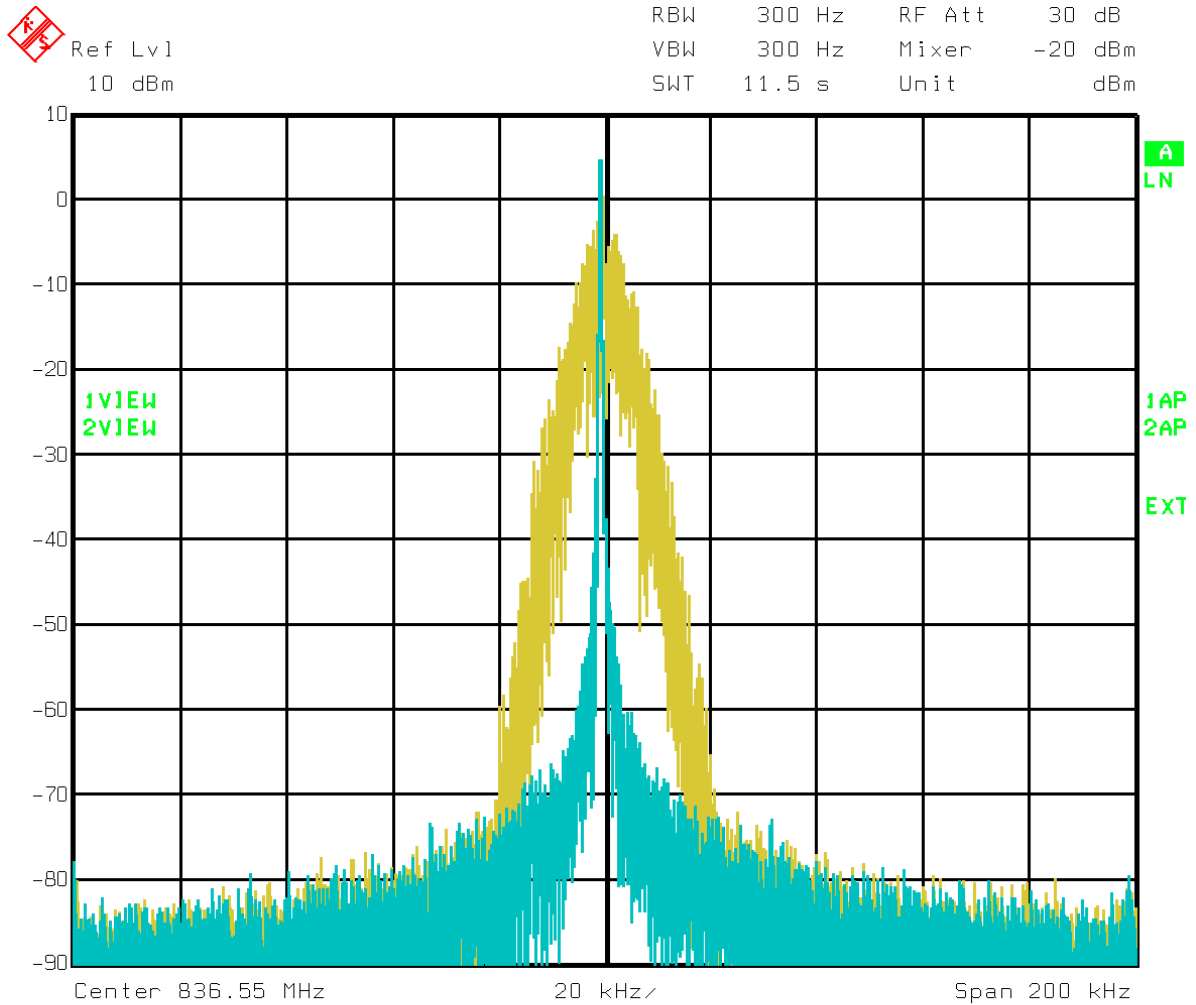

Date: 23.SEP.1999 21:55:27

1. Instantaneous Deviation Control set for a maximum of ± 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.

3. Modulate the transmitter with quasi-random 10 kilobit/second wide band data with ± 8 kHz peak deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:


- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 60 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 60 kHz, up to and including 90 kHz, the sideband is at least 65 dB below the carrier.
- d. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at $63 + 10\log_{10}$ (mean power output in Watts) dB below the carrier.

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F1D

DEVIATION OF THE CARRIER WITH 10kHz SIGNALING TONE AND SUPERVISORY AUDIO TONE

HORIZONTAL SCALE = 20 kHz/DIVISION
 VERTICAL SCALE = 10 dB/DIVISION (ATTENUATION)
 RESOLUTION BANDWIDTH = 300 Hz
 POWER LEVEL = 3 W

MEASURED DATA:

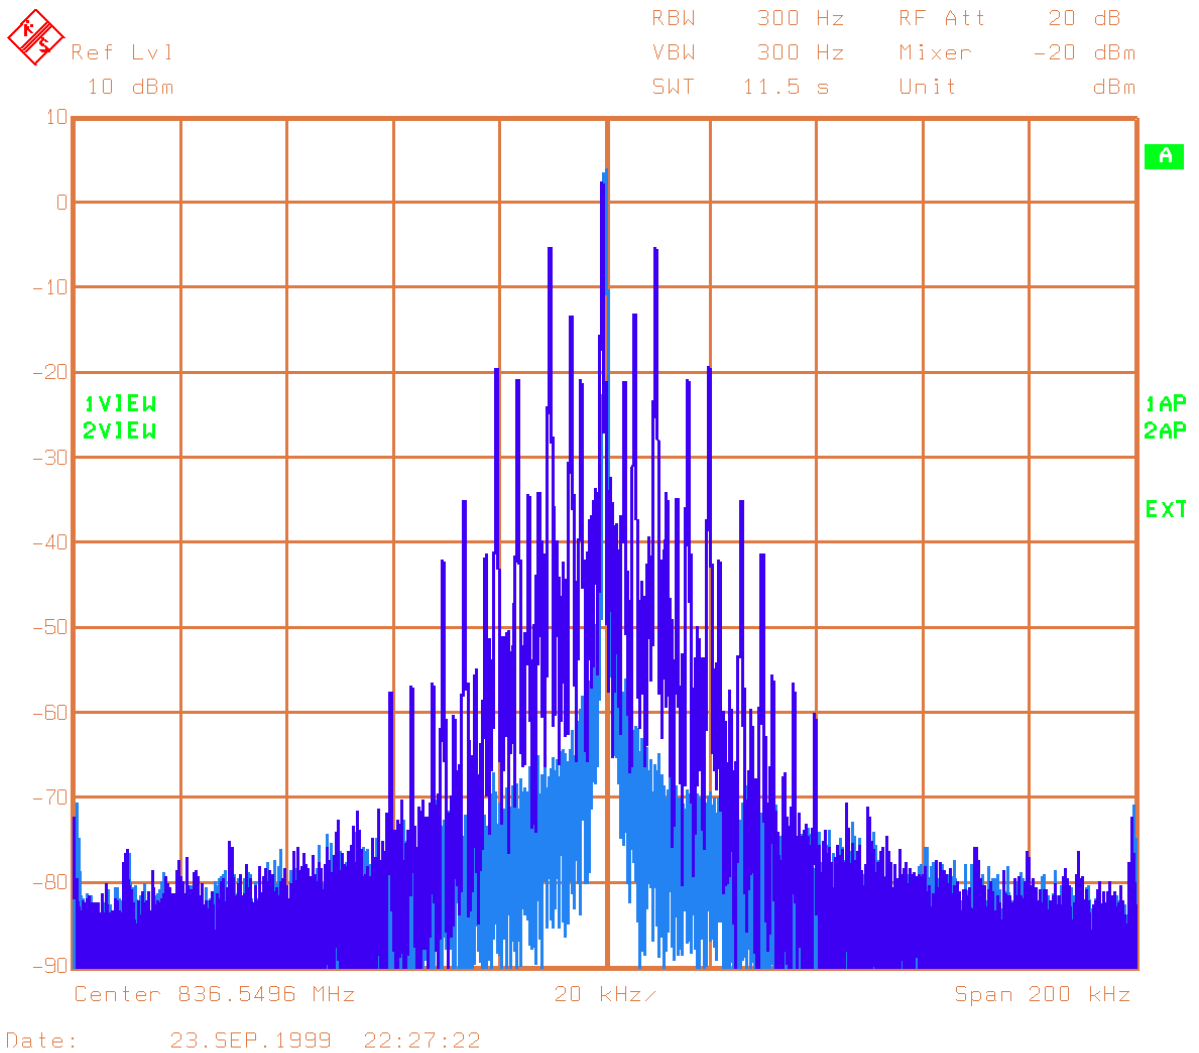


1. Instantaneous Deviation Control set for a maximum of ± 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.

3. Modulate the transmitter with a 10 kHz signaling tone with ± 8 kHz deviation and add a 6 kHz SAT with ± 2 kHz deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 60 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 60 kHz, up to and including 90 kHz, the sideband is at least 65 dB below the carrier.
- d. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at $63 + 10\log_{10}(\text{mean power output in Watts})$ dB below the carrier.

TRANSMITTER CONDUCTED SPURIOUS AND HARMONIC EMISSIONS

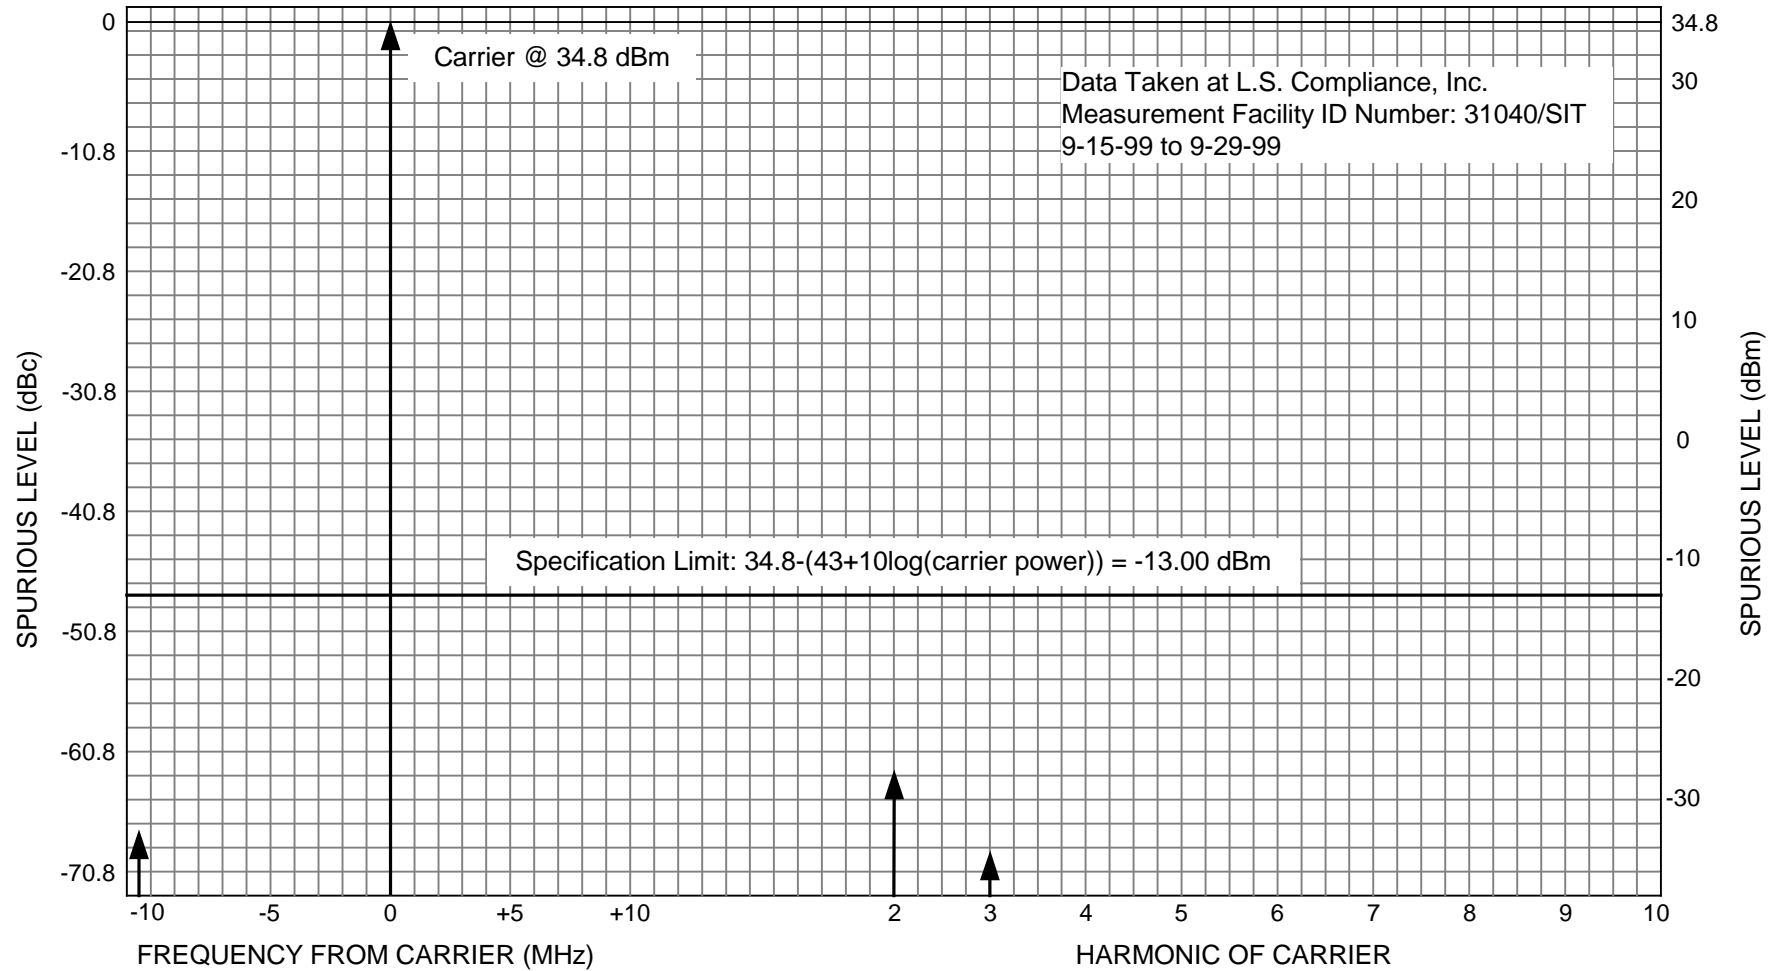

Carrier Power: 3W to 4.8mW in 4dB steps.

Carrier Frequency: 824.04 to 848.97 MHz in 30kHz steps.


Each reported emission reflects the highest absolute level found among all power levels and channels

All emissions not reported were greater than 25 dB below the FCC specification.

No signals greater than -80dBm were found in the 869 to 894 MHz band.

Spectrum was searched from 1MHz to the 10th harmonic of the transmitter.

TRANSMITTER RADIATED SPURIOUS AND HARMONIC EMISSIONS

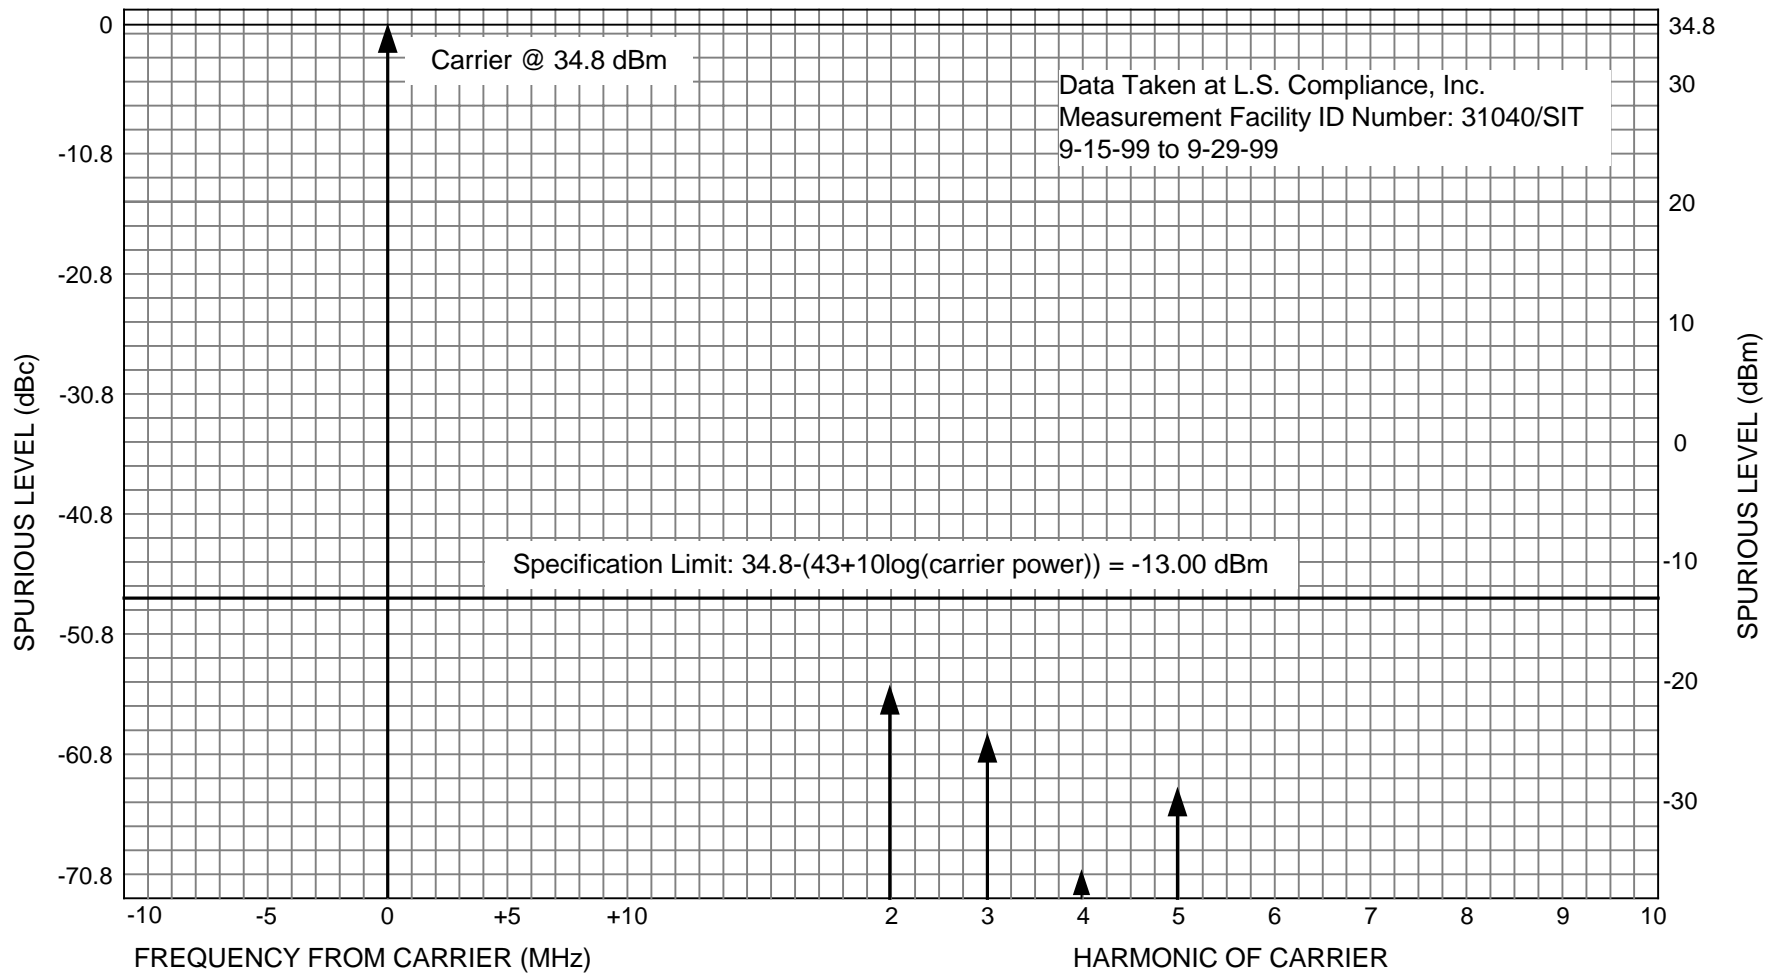

Carrier Power: 3W to 4.8mW in 4dB steps.

Carrier Frequency: 824.04 to 848.97 MHz in 30kHz steps.

Each reported emission reflects the highest absolute level found among all power levels and channels.

All emissions not reported were greater than 25 dB below the FCC specification.

No signals greater than -80dBm were found in the 869 to 894 MHz band.

Spectrum was searched from 30 MHz to the 10th harmonic of the transmitter.

