



**Exhibit 11 FCC ID: IHDT6AF1**

Motorola Personal Communications Sector Product Safety Laboratory  
2001 N. Division  
Room: AS228  
Harvard, Illinois 60033

November 8, 2000

Federal Communications Commission  
Authorization & Evaluation Division  
7435 Oakland Mills Rd  
Columbia MD 21046

Attention: Equipment Authorization Branch

We hereby certify that the testing procedures contained within are used for determination of compliance for a Motorola portable cellular with respect to ANSI/IEEE C951-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz and the Federal Communications Commission rule §2.1093(d)(2).

Prepared by:

Steven Hauswirth

Motorola© This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of the individuals involved may be mentioned only in connection with the statements or results from this report.

<b>Contents</b>	<b>Page</b>
1) Introduction	3
2) Description of the Device Under Test	3
3) Test Equipment Used	
3.1 Dosimetric system	3
3.2 Additional equipment used	4
4) Simulated Tissue Electrical Parameters	4
5) System Accuracy Verification	4
6) Body Worn Configuration Measurement Results	4
 <b>References</b>	
Appendix A: Photographs of Motorola Portable Cellular Phone FCC ID IHDT5YD1	6
Appendix B: Included data for Body Worn Configuration	9
Appendix C: Printout from the Dasy™ measurement system validation test	13

**1. Introduction**

The Motorola Personal Communications Sector Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone FCC ID IHDT6AF1. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with the latest available test guidelines. The SAR values found for the portable cellular phone (FCC ID IHDT6AF1) are below the maximum recommended levels of 1.6 W/kg. Detailed procedures of the test are described in the *Motorola Exhibit 11 Reference SAR Test Procedures*.

**2. Description of the Device Under Test**

<b>FCC ID Number</b>	IHDT6AF1
<b>Serial Number</b>	072800A/A
<b>Modes of Operation</b>	GSM1900
<b>Modulation Mode(s)</b>	GSM
<b>Duty Cycle</b>	1/8
<b>Transmitting Frequency Range(s)</b>	1850.2-1909.8MHz

**3. Test Equipment Used**

**3.1 Dosimetric System**

The Motorola Personal Communications Sector Product Safety Laboratory utilizes a Dosimetric Assessment System (Dasy3™) SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The overall RSS uncertainty of the measurement system is ±12.0% (K=1).

<b>Description</b>	<b>Serial Number</b>	<b>Cal Due Date</b>
<b>DASY3 DAE V1</b>	SN383	2/01
<b>E-Field Probe ETDV6</b>	SN1515	2/01
<b>Dipole Validation Kit, DV1800V2</b>	SN250	9/01

### 3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04845	2/8/01
Power Meter E4419B	GB39511082	3/13/01
Power Sensor E9301A	US39211011	3/20/01

### 4. Simulated Tissue Electrical Parameters

Before performing SAR measurements, the relative permittivity and the conductivity of the simulated tissue was measured with the dielectric probe kit. The results are shown below. The recommended limits for maximum permittivity and minimum conductivity are also shown. These come from the Federal Communication Commission, "Tissue Dielectric Properties" web site at <http://www.fcc.gov/fcc-bin/dielec.sh>.

F (MHz)	Description	Dielectric Parameters	
		$\epsilon_r$	$\sigma$ (S/m)
1900	<b>Measured</b>	50.42	1.66
	<b>Recommended Limits</b>	54.33	1.43

### 5. System Accuracy Verification

A system accuracy verification of the DASY3 was performed using the dipole validation kits listed in Section 3.1. The system verification test was conducted on the same day as the measurement of the portable cellular phone FCC ID IHDT6AF1. The results are shown in the table below. See appendix D for printout of the validation test from the Dasy™ measurement system

F (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Temp (°C)
			$\epsilon_r$	$\sigma$ (S/m)	
1900	<b>Measured</b>	44.00	41.00	1.73	19
	<b>Recommended Limits</b>	38.89	43.40	1.68	N/A

### 6. Body Worn Configuration Measurement Results

The measured SAR values and conducted output powers are shown in the following table. For the purposes of these tests the transmitter was operated at the highest transmitter output. The SAR results shown are maximum SAR values averaged over 1 gram of phantom tissue. A full data set output of the test condition with the highest SAR values from the Dasy™ measurement system is included as appendix B. The test condition included is indicated as a bold number in the following table. All other test conditions measured lower SAR values than those included.

The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The phone was then placed in the SAR measurement system with a fully charged battery.

F (MHz)	Description	Conducted Output Power (dBm)	SAR, 1g (W/kg)
			Body Worn Ant Fixed
GSM 1900MHz	Channel 512	29.2	0.203
	Channel 661	29.3	0.120
	Channel 810	29.2	0.072

Appendix A

Photographs of Motorola Portable Cellular Phone FCC ID IHDT5YD1



Figure 1. Face of Motorola portable cellular phone FCC ID IHDT6AF1



Figure 2. Motorola portable cellular phone FCC ID IHDT6AF1 in Belt-clip

Appendix B

Included data for Body Worn Configuration

09/18/00

s/n 072800A/A

Ch# 512 / Pwr Step:00

Amy Twin Optics OFF Phantom; Section2 Section; Position: (0°,0°); Frequency: 1850 MHz

Probe: ET3DV6 - SN1515 - Muscle ( Glycol ); ConvF(4.98,4.98,4.98); Crest factor: 8.0; Muscle Glycol 1900 MHz:  $\sigma = 1.66$  mho/m  $\epsilon_r = 50.4$   $\rho = 1.00$  g/cm<sup>3</sup>

Cube 5x5x7: SAR (1g): 0.203 mW/g, SAR (10g): 0.123 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 10.1 (9.5, 11.0) [mm]

Powerdrift: 0.03 dB

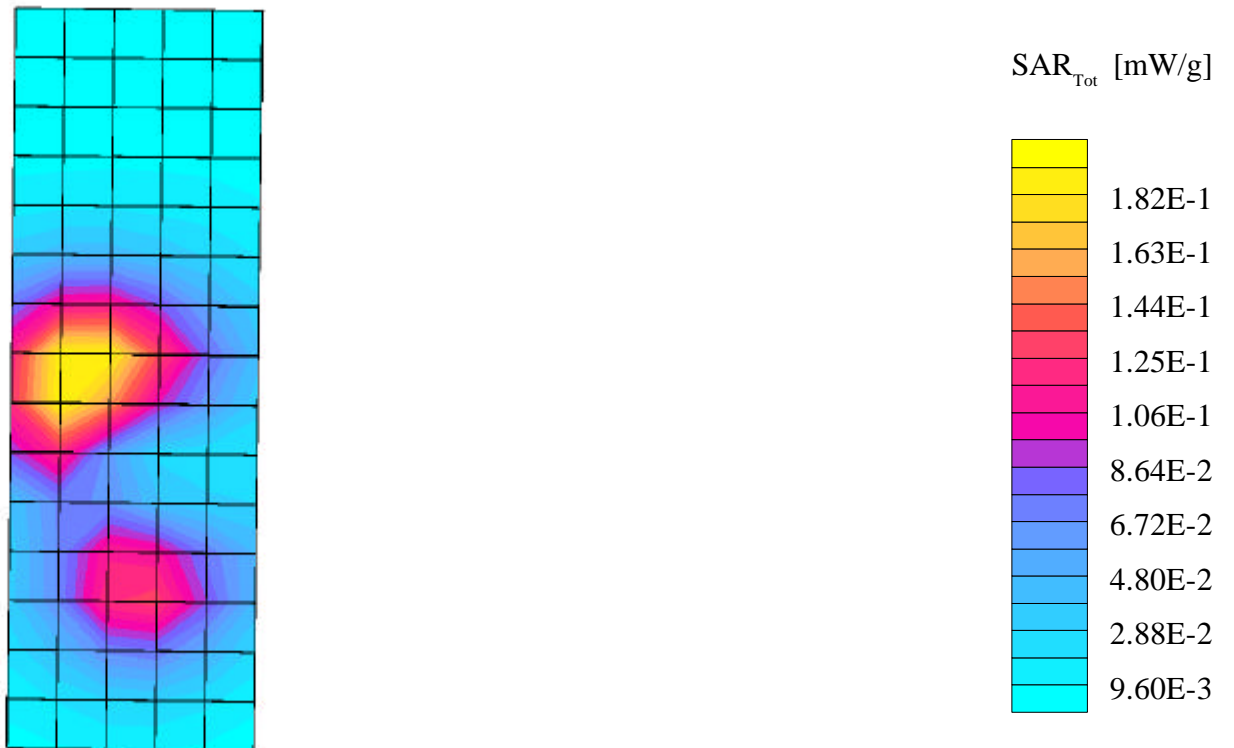




Figure 3. Contour Plot overlaid on Phone and Belt-clip

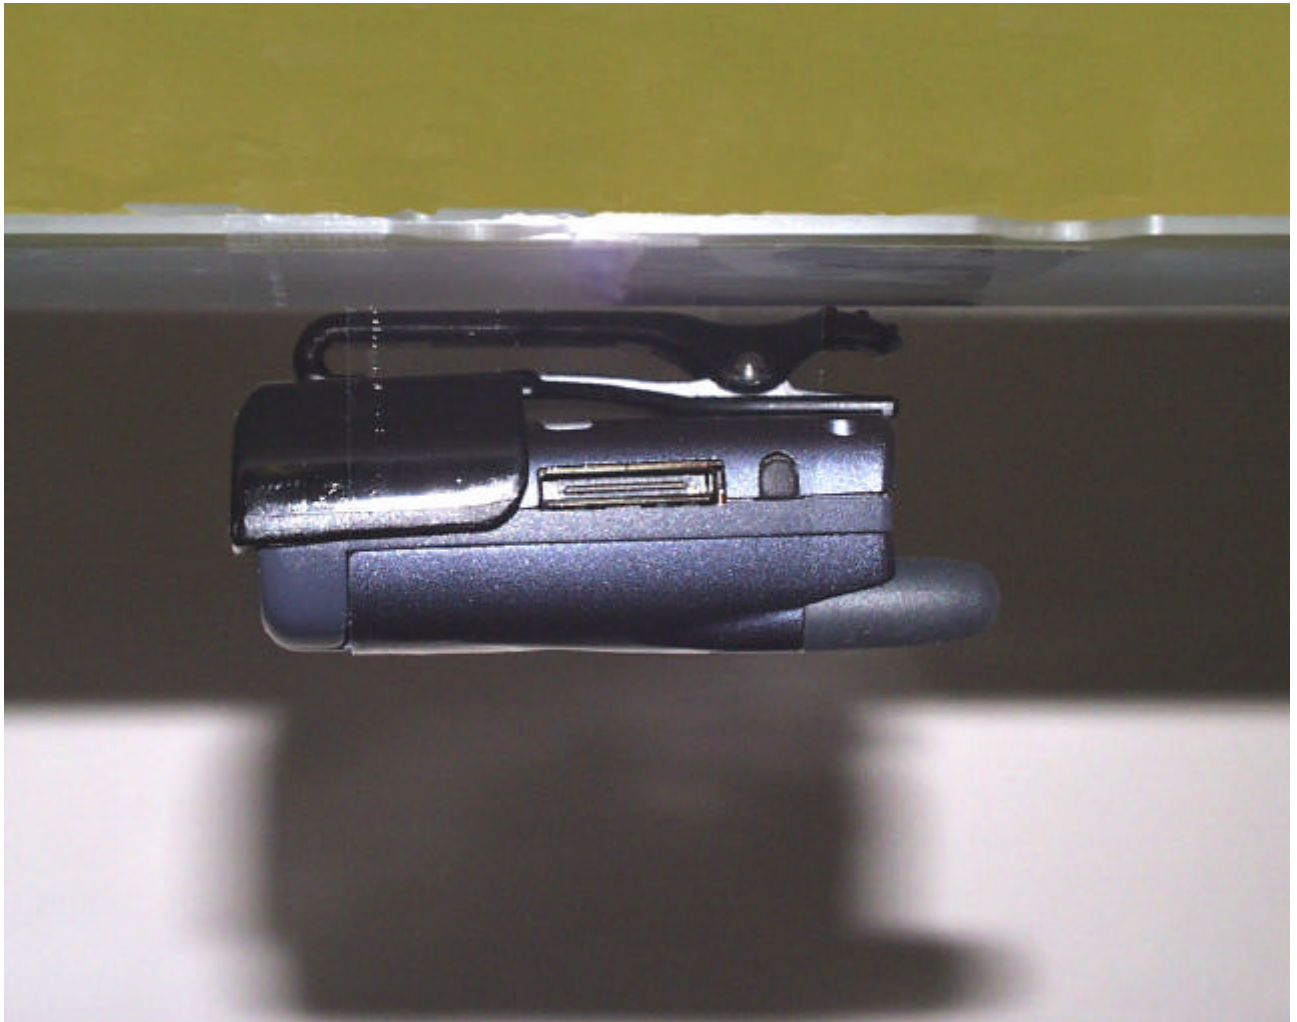


Figure 4. Picture of Phone in Body Worn configuration

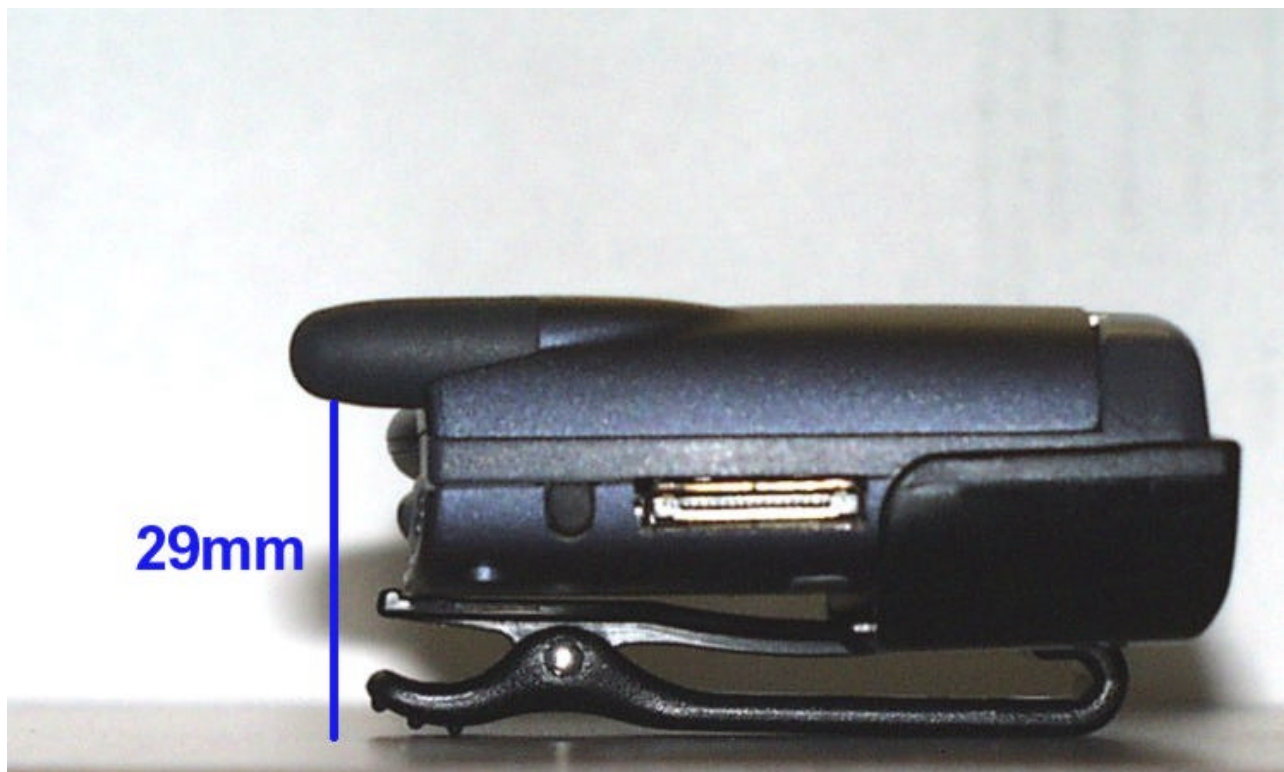


Figure 5. Picture of Phone showing Distance Provided by Belt-clip

Appendix C

Printout from the Dasy™ measurement system validation test

## Dipole 1800 MHz

1800 MHz Dipole Validation / Dipole Sn# 250 / Forward Power = 254mW

Temp at time of measurement = 19 C

Amy Twin Optics OFF; Section 1

Probe: ET3DV6 - SN1515 Validation; ConvF(5.51,5.51,5.51); Crest factor: 1.0; Validation 1800MHz:  $\sigma = 1.73 \text{ mho/m}$   $\epsilon_r = 41.0$   $\rho = 1.00 \text{ g/cm}^3$

Cubes (2): Peak:  $21.5 \text{ mW/g} \pm 0.22 \text{ dB}$ , SAR (1g):  $11.0 \text{ mW/g} \pm 0.18 \text{ dB}$ , SAR (10g):  $5.47 \text{ mW/g} \pm 0.16 \text{ dB}$ , (Worst-case extrapolation)

