



July 25, 2000

SAR Test Report for Motorola portable cellular phone (FCC ID IHDT6AW1).

Prepared by:

Paul Moller, Principal Staff Engineer

Motorola Personal Communications Sector Product Safety Laboratory

Libertyville, Illinois

Contents

- 1) Introduction
- 2) Applicable Regulations
- 3) Description of Test Sample
- 4) Description of Motorola SAR Test Facility
- 5) Test Sample Conditions
- 6) Method of Measurement
- 7) Measurement Uncertainty
- 8) SAR Test Results
- 9) Battery options
- 10) Summary

Appendix A: Included Body Worn Data

Appendix B: Printout from the Dasy™ measurement system validation test

1. Introduction

The Motorola Personal Communications Sector Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone FCC ID IHDT6AW1. The Specific Absorption Rate (SAR) of this product was measured. This report details the test setup and equipment as well as the results of those tests.

2. Applicable Regulations

Federal Communications Commission rule §2.1093(d)(2), the ANSI/IEEE C95.1 1992 and the NCRP Report Number 86 specify the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20cm of the user in the uncontrolled environment.

3. Description of Test Sample

A prototype unit serial number 062000B was measured. This unit is identical in physical construction, maximum radiated power levels and antenna structure to units that will be in production. It transmits in the frequency range of 1850 to 1910 MHz using GSM mode. The unit was tested at its maximum transmitter power. The unit is equipped with a fixed antenna that serves as both a receive and transmit antenna. The antenna has a single operating position as shown in figure 1.



Figure 1. Front of Phone.

4. SAR Test Facility

The Motorola test facility utilized for the SAR testing of this product is the Personal Communications Sector Product Safety Laboratory, in Libertyville Illinois. The laboratory utilizes a Dosimetric Assessment System (Dasy™) SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. This system utilizes a computer controlled six axis robot to move a measurement probe to measure the SAR. A photo of the Dasy™ system with the Motorola phantom is shown in figure 2. Probe serial number 1513 was used for the measurements. It was calibrated at SPEAG™, and has a calibration date November 25, 1999. Dipole Validation Kit type D1800V2, serial number 258 was used to validate the system accuracy. The validation SAR value is 40.52 mW/g normalized to 1 Watt, and the Dasy™ system used for the test phone measured 39.88 mW/g normalized to 1 Watt. This is within the required accuracy, and thus the measured SAR values are considered correct. See appendix B for printout of the validation test from the Dasy™ measurement system.

The measurement methodology is described in IEEE Transactions on Vehicular Technology, vol. 44, no. 3, August 1995, titled Electromagnetic Energy Exposure of Simulated users of Portable Cellular Telephones. The Dasy™ system is operated per the instructions in the Dasy™ Users Manual. The entire manual is available directly from SPEAG™.



Figure 2. DASY™ Measurement System

5. Test Sample Conditions

For the purposes of these tests the subject phone was positioned on the measurement phantom per the instructions in the Motorola users manual for the subject phone. The test sample is capable of operation in a test mode that allows control of the transmitter without the need to place actual phone calls. This guarantees that the unit does not change its transmitter power, and that the resultant SAR values will not be affected by external connections. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. Since the test sample uses the 1/8 duty cycle of the GSM system, the crest factor (the ratio between peak and average power) is set to 8. The phone is then placed in the SAR measurement system with a fully charged battery. At the end of each test the Dasy™ system measures the drift of the SAR at a fixed point in the phantom so as to ensure that the test sample has not changed in transmitter power. For the purposes of these tests, the transmitter was operated at the highest transmitter output and with the phone on both left and right side talk positions.

6. Method of Measurement

The system is instructed to scan as much of the face of the phone as is in close proximity to the phantom. Using the information gained about the general region of highest SAR, the system then automatically scans a smaller area centered around the location of peak spatial SAR. During this scan the system automatically measures the fall off of electric field strength as the measurement probe is moved away from the inner surface of the phantom in the direction of the local normal to the phantom surface. Using appropriate probe calibration techniques, the SAR in 1 gram of phantom tissue is then calculated. The flat phantom was filled with a liquid having relative dielectric constant equal to 48.67 and conductivity equal to 1.64 S/m. This mixture is a good dielectric equivalent of the human muscle. The composition of the liquid mixture is as follows: 66.1% water; 33.4% Glycol; and 0.5 salt

7. Measurement Uncertainty

The overall RSS uncertainty of the measurement system is ±12.0% (K=1). The breakdown of the individual uncertainties is as follows:

Probe Uncertainty	±%
Isotropy error	7.2
Calibration error	3.3
Spatial resolution	0.5
SAR Evaluation	±%
Conductivity measurement	5.0
Environmental errors	1.0
Peak SAR Evaluation	±%
Probe positioning	1.0
Volumetric averaging	4.2
Device positioning	6.0

8. Body Worn Configuration

The cellular phone (FCC ID IHDT6AW1) can be used in a body-worn configuration using the supplied belt clip. We have performed an evaluation to show RF exposure compliance when used with the belt clip. Figure 3 shows the test unit as it is placed into the body worn holster



Figure 3. Test Unit inside of Body Worn Holster

The following table shows the SAR values for the body worn condition. A full data set output of the test condition with the highest SAR values from the Dasy™ measurement system is included as appendix A. The test condition included is as indicated as a bold number in the following table. All other test conditions measured lower SAR values than those included. Figure 4 shows the contour plot of the highest test condition overlaid onto a picture of the phone.

GSM 1900 Channel	Belt Clip	Conducted Power (Watts)
512	0.039	0.99
661	0.048	0.95
810	0.065	0.89



Figure 4. Typical Contour Plot Overlaid on top of Back of Phone

9. Battery Options

The cellular phone (FCC ID IHDT6AW1) uses only one battery model. This model used for all testing. There are no other battery options for this cellular phone.

10. Summary

The SAR values found for the portable cellular phone (FCC ID IHDT6AW1) are below the maximum recommended levels of 1.6 W/kg.

Appendix A

The following pages are printouts from the Dasy™ measurement system of the data for body-worn configuration as indicated.

s/n 062000B

Ch#810 / Pwr Step:00 / Antenna Position: Fixed

Amy Twin Phantom Phantom; Section 1 Section; Position: (0°,0°); Frequency: 1910 MHz


Probe: ET3DV6 - SN1513 - Muscle; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Muscle Glycol 1900 MHz: $\sigma = 1.64$ mho/m $\epsilon_r = 48.7$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.0646 mW/g, SAR (10g): 0.0396 mW/g, (Worst-case extrapolation)


Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 10.3 (8.9, 12.4) [mm]

Powerdrift: 0.01 dB

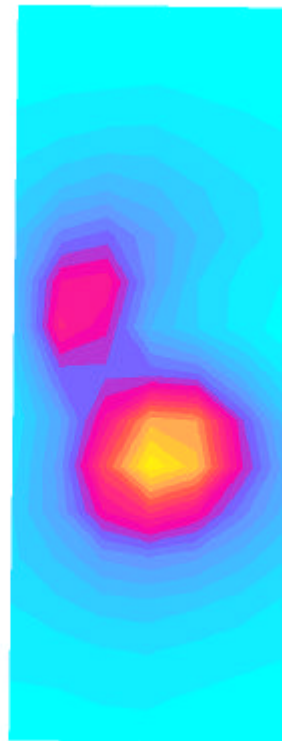

SAR_{Tot} [mW/g]

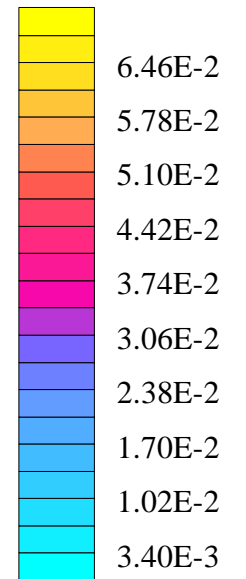

Appendix B

The following page is the printout from the Dasy™ measurement system validation tests.

Dipole 1800 MHz

1800 MHz Dipole Validation / Dipole Sn#258 / Forward Power =250mW

Amy Twin Phantom Phantom; Section2 Section; Position: (93°,157°); Frequency: 1800 MHz

Probe: ET3DV6 - SN1513 - Validation; ConvF(5.78,5.78,5.78); Crest factor: 1.0; Validation 1800 MHz: $\sigma = 1.71$ mho/m $\epsilon_r = 39.9$ $\rho = 1.00$ g/cm³

Cubes (2): SAR (1g): 9.97 mW/g \pm 0.08 dB, SAR (10g): 5.02 mW/g \pm 0.11 dB, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 7.2 (6.9, 8.1) [mm]

Powerdrift: -0.20 dB

