



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 16693-1BT

Report Date – September-8-2005

Revision 2

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Mark Sidlow

Signature:

Name: Mark Sidlow

Title: Senior Electrical Engineer

Date : 2005-08-09

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1651.01



Table of Contents

Test Report Details 5

Applicable Standards 6

Summary of Testing..... 7

General and Special Conditions..... 7

Equipment and Cable Configurations 8

Measuring Equipment and Calibration Information 8

Description of Bluetooth Transmitter 9

Measurement Procedures and Data..... 10

CARRIER FREQUENCY SEPARATION 10

 Measurement Procedure..... 10

 Measurement Results 10

 Carrier Frequency Separation 11

NUMBER OF HOPPING FREQUENCIES 12

 Measurement Procedure..... 12

 Measurement Results 12

 Number of Hopping Frequencies (2402MHz – 2442MHz)..... 13

 Number of Hopping Frequencies (2442MHz – 2480MHz)..... 13

TIME OF OCCUPANCY (DWELL TIME)..... 14

 Measurement Procedure..... 14

 Measurement Results 14

 Dwell Time 15

20dB Bandwidth 16

 Measurement Procedure..... 16

 Measurement Results 16

FIELD STRENGTH OF SPURIOUS EMISSIONS..... 18

 Measurement Procedure..... 18

 Measurement Results 18

 30-1000MHz Low Channel Dual Polarization X 19

 30-1000MHz Low Channel Dual Polarization Y 20

 30-1000MHz Low Channel Dual Polarization Z..... 21

 30-1000MHz Mid Channel Dual Polarization X 22

 30 -1000MHz Mid Channel Dual Polarization Y 23

 30 -1000MHz Mid Channel Dual Polarization Z 24

 30 -1000MHz High Channel Dual Polarization X..... 25

 30 -1000MHz High Channel Dual Polarization Y 26

 30 -1000MHz High Channel Dual Polarization Z 27

 1-25 GHz Low Channel Dual Polarization X 28

 1-25 GHz Low Channel Dual Polarization Y 29

 1-25 GHz Low Channel Dual Polarization Z 30

 1-25 GHz Mid Channel Dual Polarization X..... 31

 1-25 GHz Mid Channel Dual Polarization Y 32

 1-25 GHz Mid Channel Dual Polarization Z 33

 1-25 GHz High Channel Dual Polarization X 34

 1-25 GHz High Channel Dual Polarization Y 35

 1-25 GHz High Channel Dual Polarization Z..... 36

Authorized Band Emissions Low Channel Dual Polarization X 37

Authorized Band Emissions Low Channel Dual Polarization Y 38

Authorized Band Emissions Low Channel Dual Polarization Z 39

Authorized Band Emissions Mid Channel Dual Polarization X..... 40

Authorized Band Emissions Mid Channel Dual Polarization Y..... 41

Authorized Band Emissions Mid Channel Dual Polarization Z..... 42

Authorized Band Emissions High Channel Dual Polarization X 43

Authorized Band Emissions High Channel Dual Polarization Y 44

Authorized Band Emissions High Channel Dual Polarization Z..... 45

PEAK OUTPUT POWER 46

 Measurement Procedure..... 46

 Measurement Results 46

 Peak Output Power 46

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS 47

 Measurement Procedure..... 47

 Measurement Results 47

 Low Band Edge with Hopping Disabled 48

 Low Band Edge with Hopping Enabled 48

 High Band Edge with Hopping Disabled..... 489

 High Band Edge with Hopping Enabled..... 49

SPURIOUS RF CONDUCTED EMISSIONS 50

 Measurement Procedure..... 50

 Measurement Results 50

 Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)..... 51

 Conducted Spurious Emissions 2-10GHz (Low Channel Enabled) 51

 Conducted Spurious Emissions 10-20GHz (Low Channel Enabled) 52

 Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled) 52

 Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled) 53

 Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)..... 523

 Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)..... 524

 Conducted Spurious Emissions 20-26.5GHz (Mid Channel Enabled)..... 524

 Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)..... 55

 Conducted Spurious Emissions 2-10GHz (High Channel Enabled)..... 55

 Conducted Spurious Emissions 10-20GHz (High Channel Enabled)..... 56

 Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled) 56

AC LINE CONDUCTED 507

 Measurement Procedure..... 507

 Measurement Results 507

 Bluetooth 2402MHz TX Mode Neutral Coupling Hopping 58

 Bluetooth 2442MHz TX Mode Line Coupling Nonhopping..... 58

 Bluetooth 2442MHz TX Mode Line Coupling Nonhopping..... 529

 Bluetooth 2480MHz TX Mode Neutral Coupling Hopping 59

 Bluetooth 2480MHz TX Mode Line Coupling Hopping..... 60

 Bluetooth 2442MHz TX Line Neutral Coupling Hopping 60

 Bluetooth 2402MHz TX Mode Line Coupling Hopping..... 61

 Bluetooth 2442MHz TX Mode Neutral Coupling Nonhopping 61

Bluetooth 2442MHz TX Mode Line Coupling Hopping..... 62
Bluetooth 2480MHz TX Mode Neutral Coupling Nonhopping 62
Bluetooth 2480MHz TX Mode Line Coupling Nonhopping..... 63
Bluetooth 2480MHz TX Mode Neutral Coupling Nonhopping 63

Test Report Details

Tests Performed By: Motorola Personal Communications Sector
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola PCS FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Radiated Emissions
Performed By: Motorola Personal Communications Sector
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola PCS FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Tests Requested By: Motorola Inc.
Personal Communications Sector
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 1900, Bluetooth

Model Number: A732

Serial Numbers: 1,2,3 & 4

Testing Complete Date: September 5, 2005

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

Test	Test Name	Pass/Fail
1	Carrier Frequency Separation	Result
2	Number of Hopping Frequencies	Result
3	Time of Occupancy (Dwell Time)	Result
4	20 dB Bandwidth	Result
5	Spurious RF Conducted Emissions	Result
6	Field Strength of Spurious Emissions	Result
7	Max Power	N/A
8	Band Edges	See plots
9	Conducted Spurious Emissions	Result

Test	Test Name	Results
1	Carrier Frequency Separation	1 MHz
2	Number of Hopping	79
3	Time of Occupancy (Dwell Time)	2.9 ms
4	20 dB Bandwidth	1 MHz
5	Spurious RF Conducted Emissions	See plots
6	Field Strength of Spurious Emissions	See plots
7	Max Power	0.19 dBm
8	Band Edges	See plots
9	Conducted Spurious Emissions	See plots

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Paste Equipment List Here

Manufacturer	Equipment Type	Model No.	Serial Number	Cal. Due Date
Rohde & Schwarz	Receiver	ESI26	838786/010	2/7/2006
Hewlett-Packard	EMC Analyzer	8593EM	3536A00118	10/2/2005
Hewlett-Packard	EMC Analyzer	7405	US39440191	11/13/2005
ETS	DRG Horn Antenna	265	2455	5/25/2006
ETS	DRG Horn Antenna	3115	6222	2/9/2006
ETS	Log-Periodic Antenna	3148	1188	6/14/2006
ETS	Biconical Antenna	3110B	3370	2/16/2006
Attenuator	Weinschel	AS-6	6675	10/14/2005
Attenuator	Weinschel	AS-6	6677	11/4/2005
Rohde & Schwarz	Mobile Test Set	CMD 80	DE29008	N/A
Hewlett-Packard	Signal Generator	83623B	3844A01195	5/23/2006
Thermotron	Environmental Chamber	S-4	31580	1/18/2006
Giga-Tronics	Power Meter	8651A	8650508	12/27/2005

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The A732 cell phone offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483 MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by industrial standard. In this application, the device is battery-operated.

The maximum Bluetooth antenna gain is -1.3 dB.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth transmitter of the A768i had its hopping function enabled. The following spectrum analyzer settings were used:


1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

See attached.

Carrier Frequency Separation

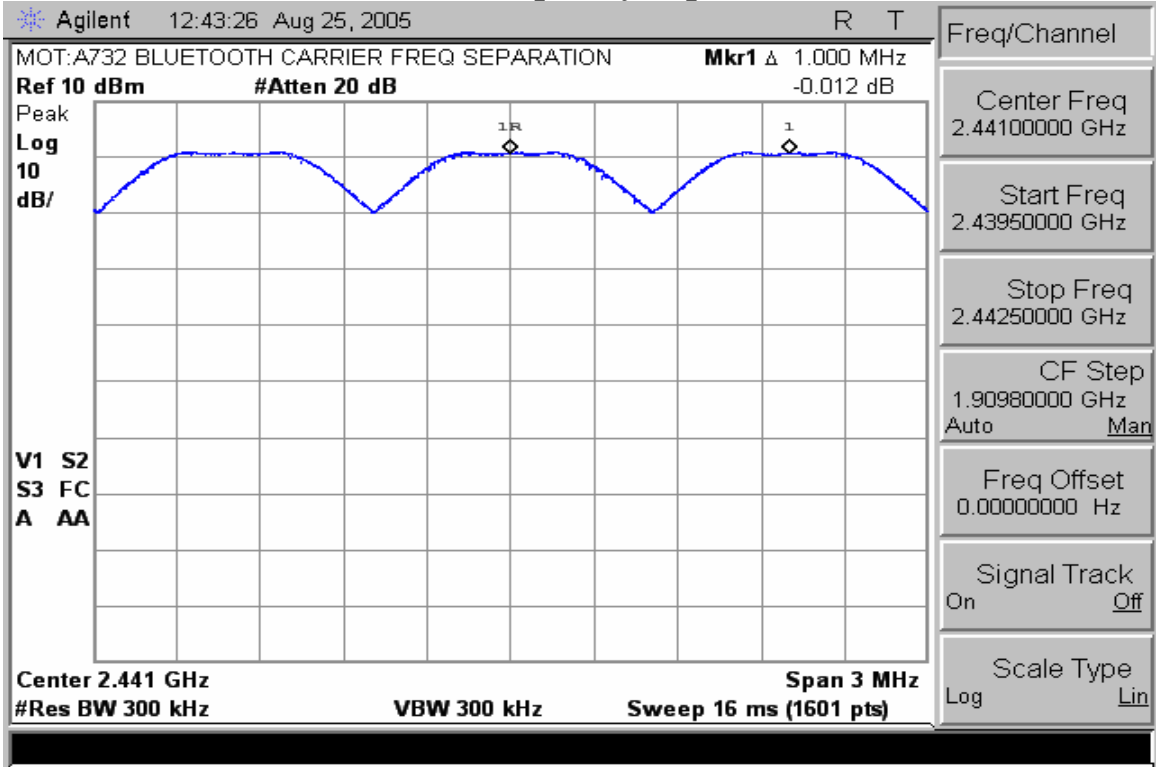

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

Measurement Results

See attached.

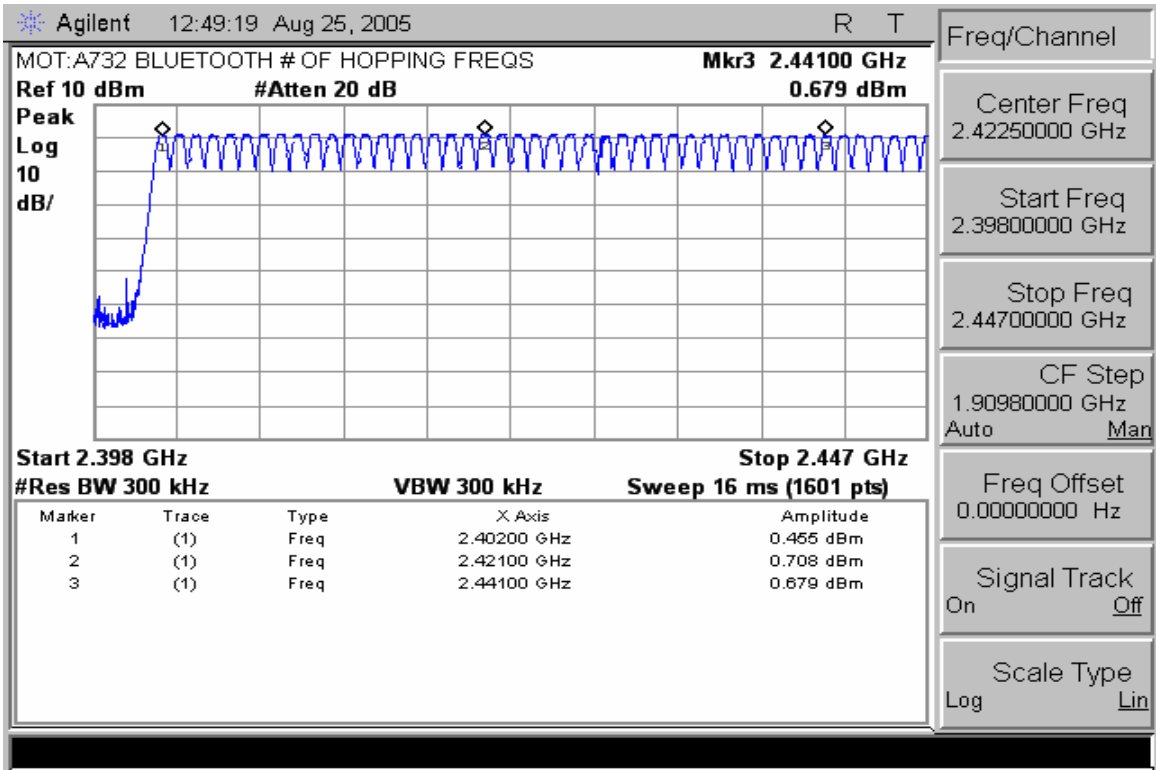

Number of Hopping Frequencies (2402MHz – 2442MHz)

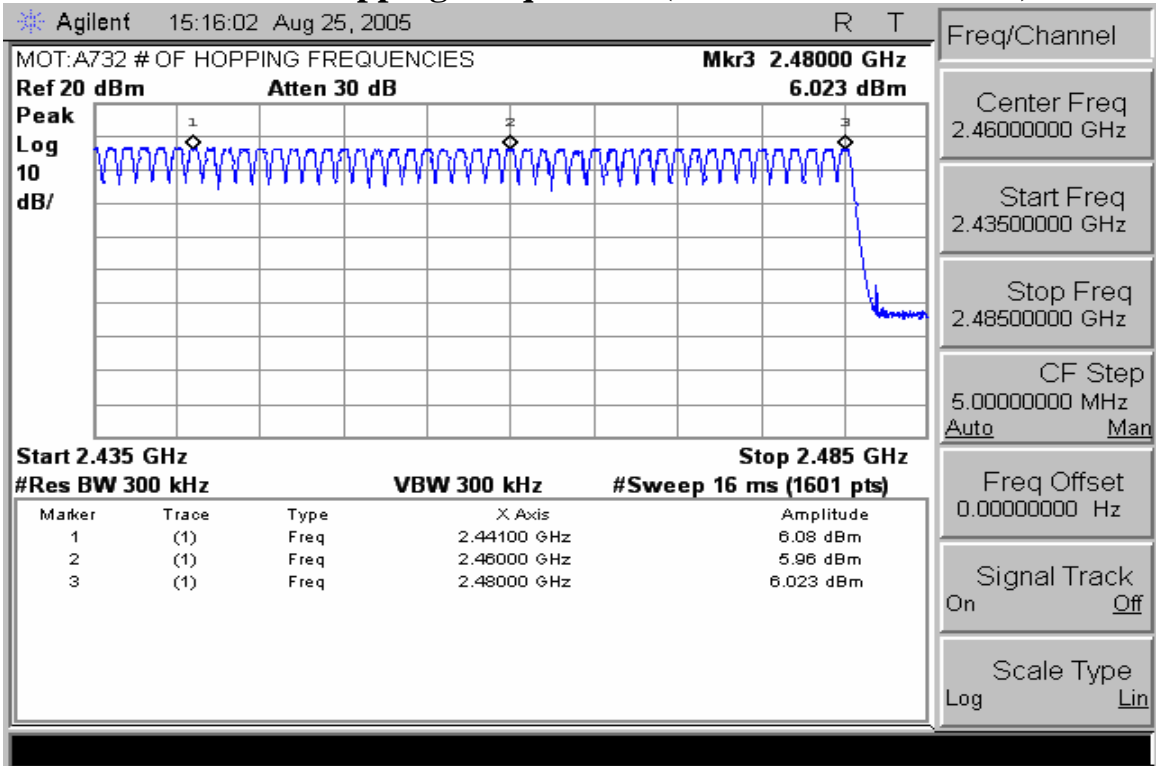

Number of Hopping Frequencies (2442MHz – 2480MHz)

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

Attached

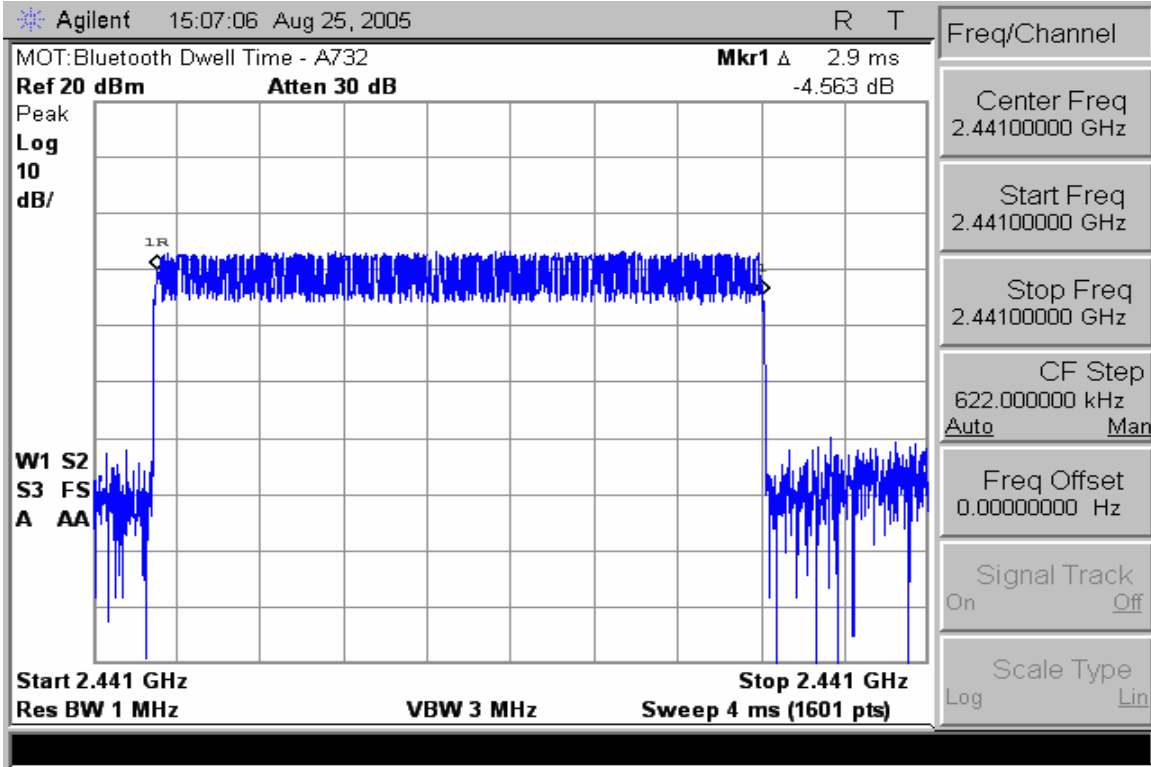

Dwell Time

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

Attached

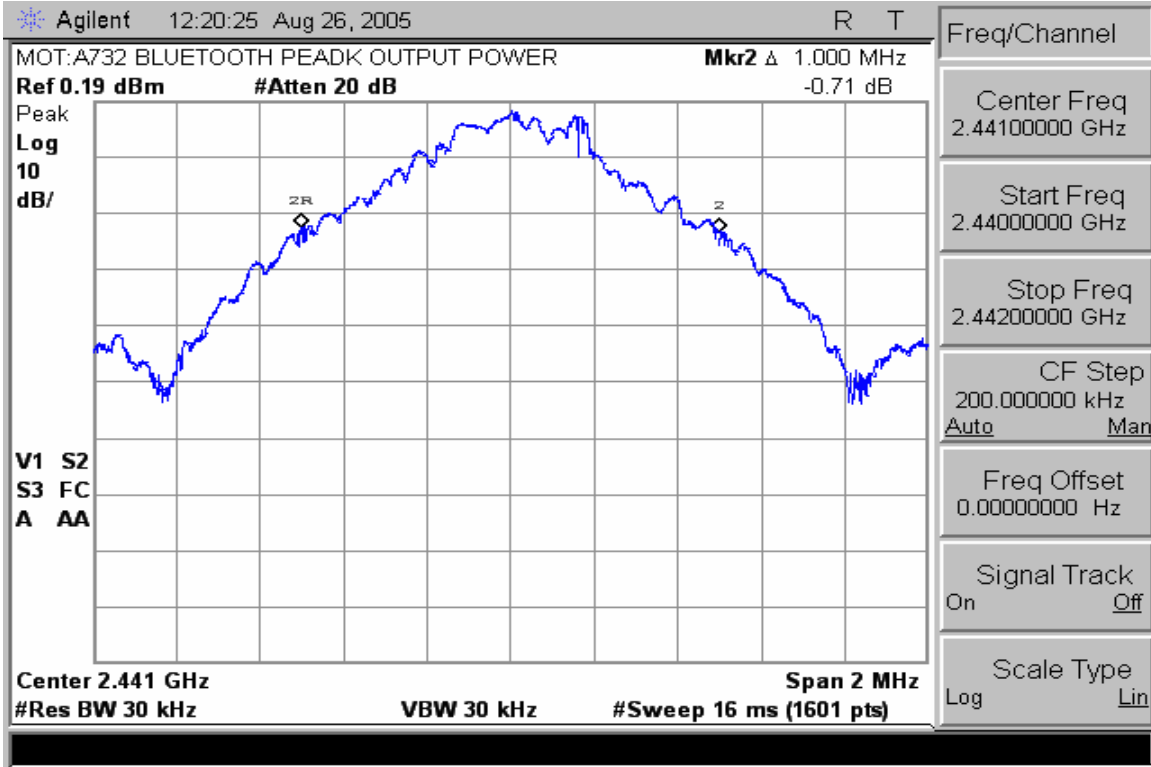

20dB Bandwidth

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.247

Measurement Procedure

The Equipment-Under-Test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -
Amplifier Gain (dB) + Antenna Correction Factor (1/m)

A fully charged battery was used for the supply voltage.

Measurement Results

Attached


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2402MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

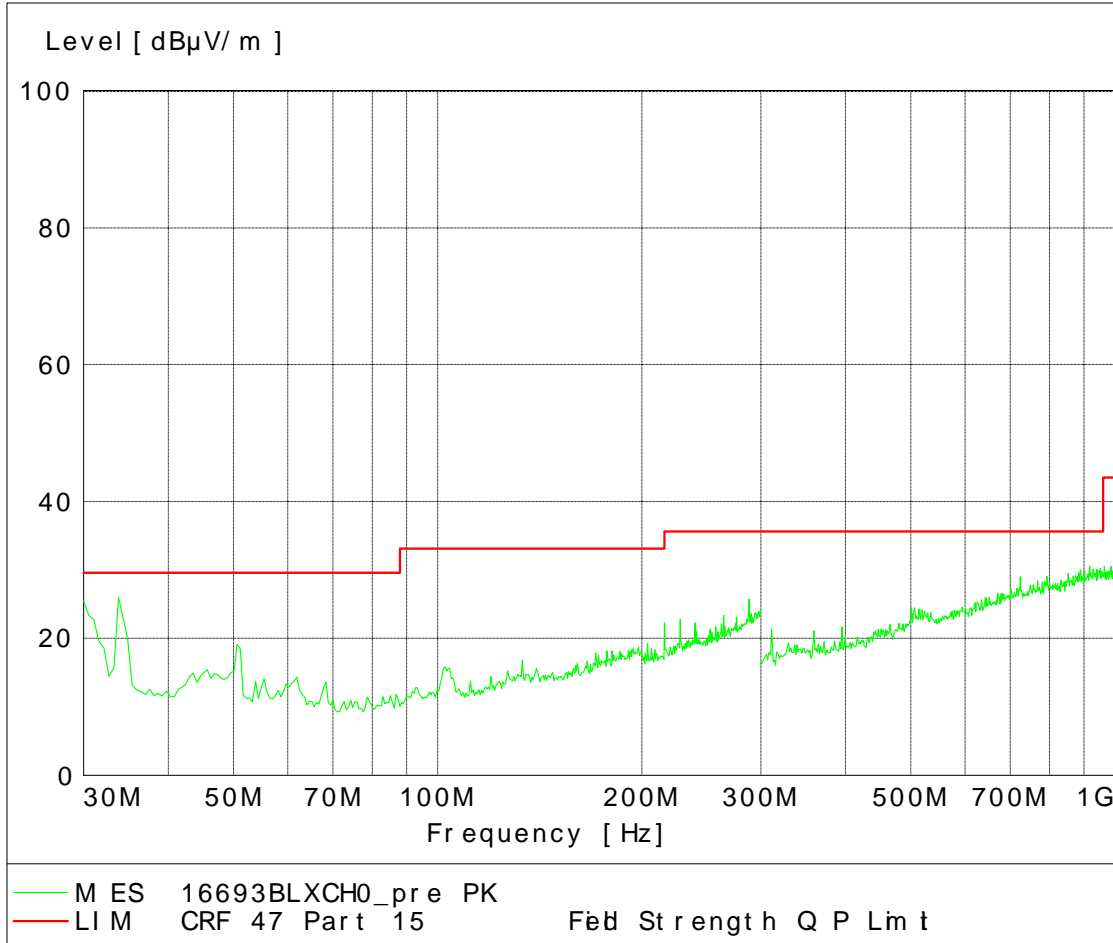

30-1000MHz Low Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	25.99	Peak	29.6
216	22.34	Peak	35.6
228	22.77	Peak	35.6
239	22.29	Peak	35.6
264	23.43	Peak	35.6
288	25.76	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2402MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

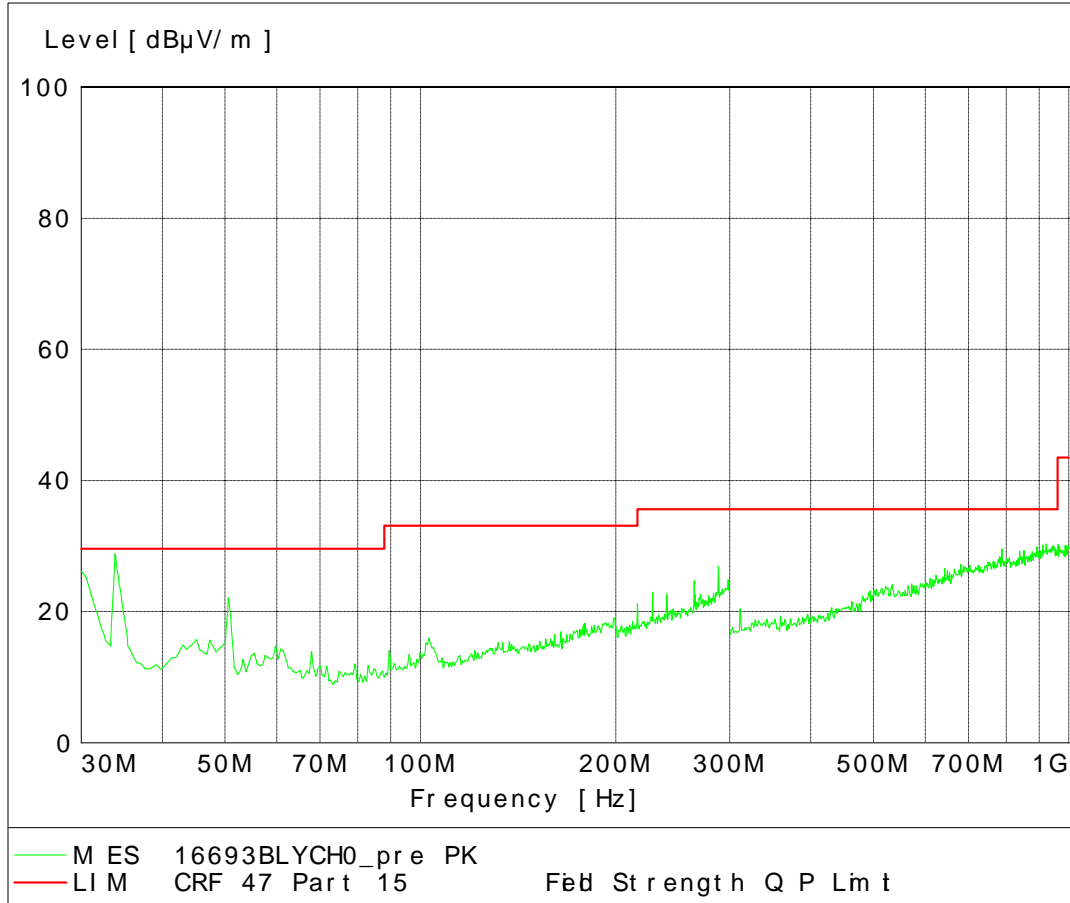

30-1000MHz Low Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	28.83	Peak	29.6
50.56	22.17	Peak	39.6
264	24.70	Peak	35.6
288	26.93	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2402MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

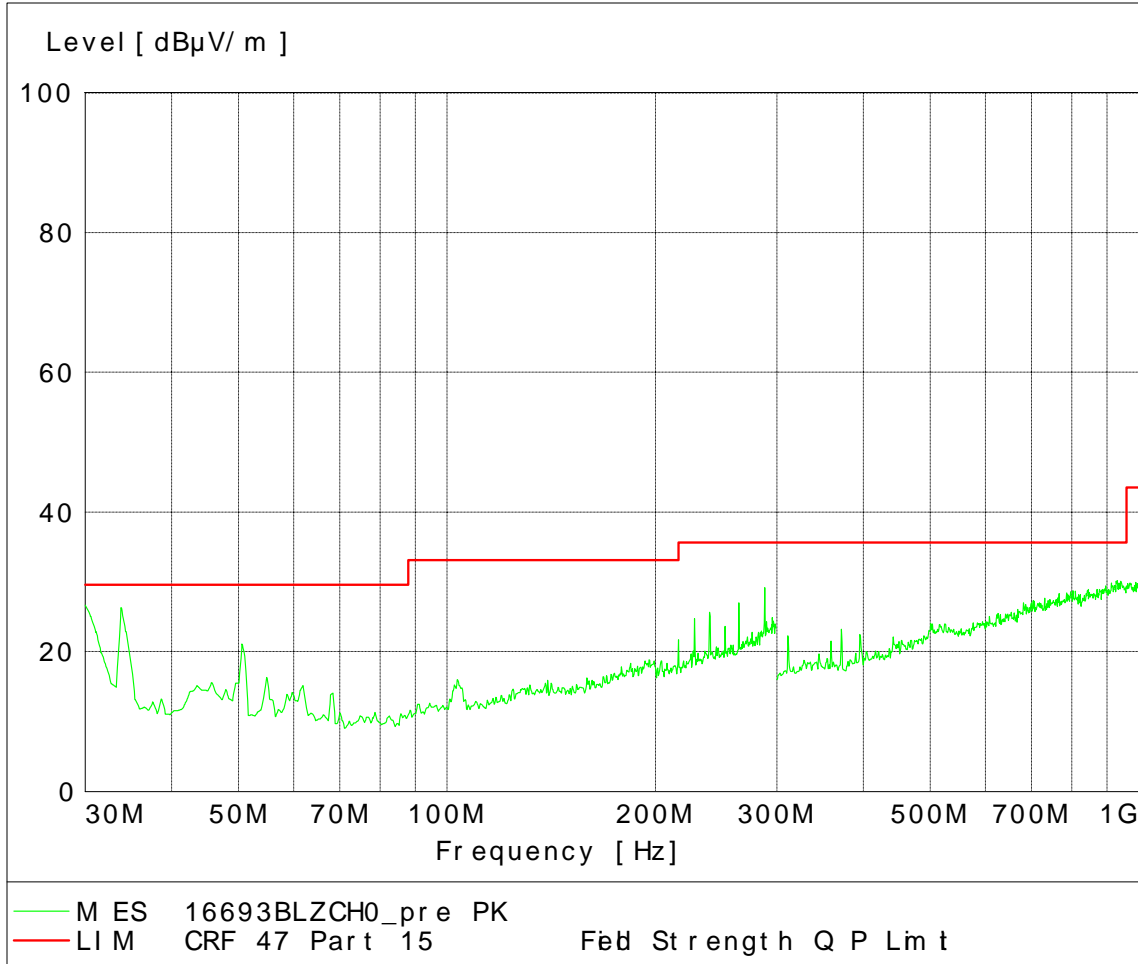

30-1000MHz Low Channel Dual Polarization Z

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	26.31	Peak	29.6
228	24.77	Peak	35.6
239	25.64	Peak	35.6
252	23.64	Peak	35.6
264	26.96	Peak	35.6
288	29.20	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2442MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

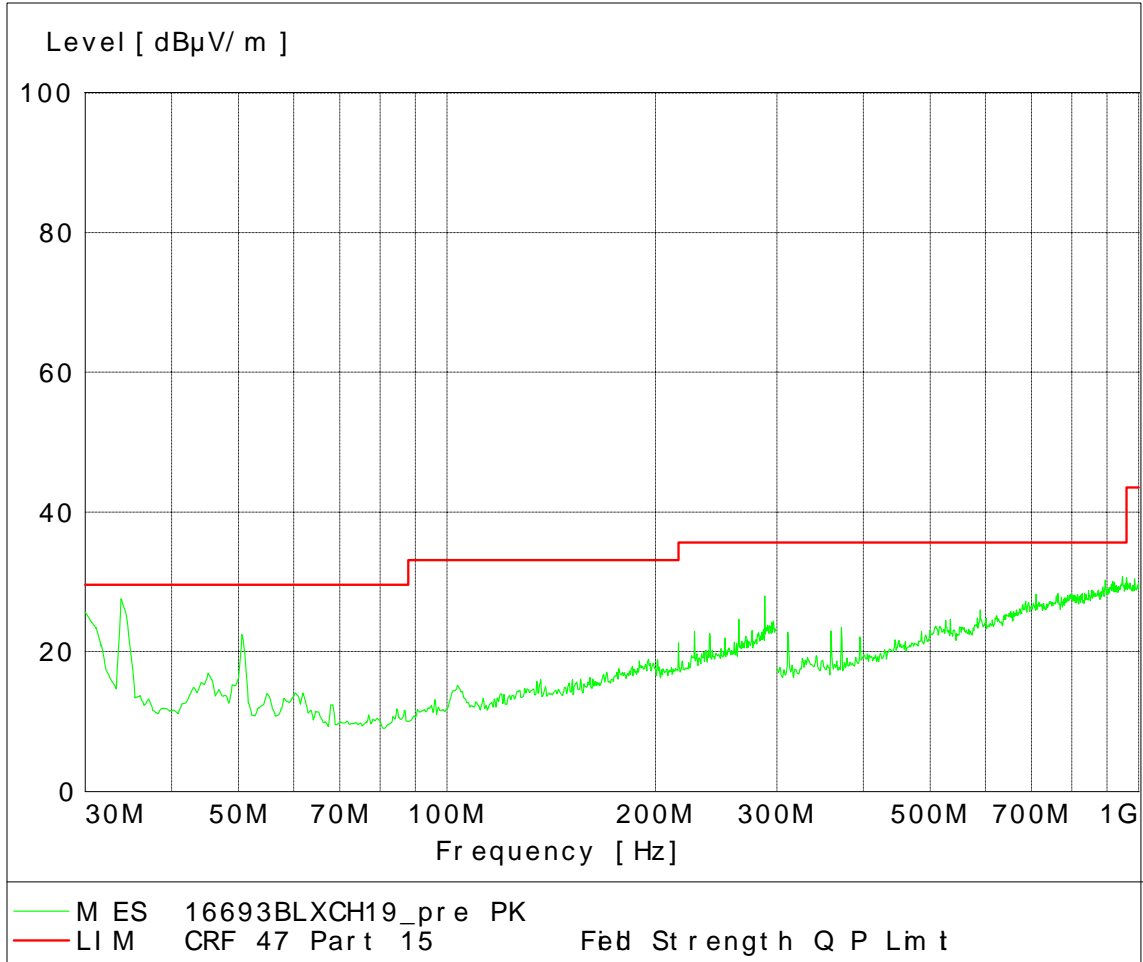

30-1000MHz Mid Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	27.54	Peak	29.6
50.56	22.47	Peak	29.6
228	22.86	Peak	35.6
264	24.62	Peak	35.6
288	28.00	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2442MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

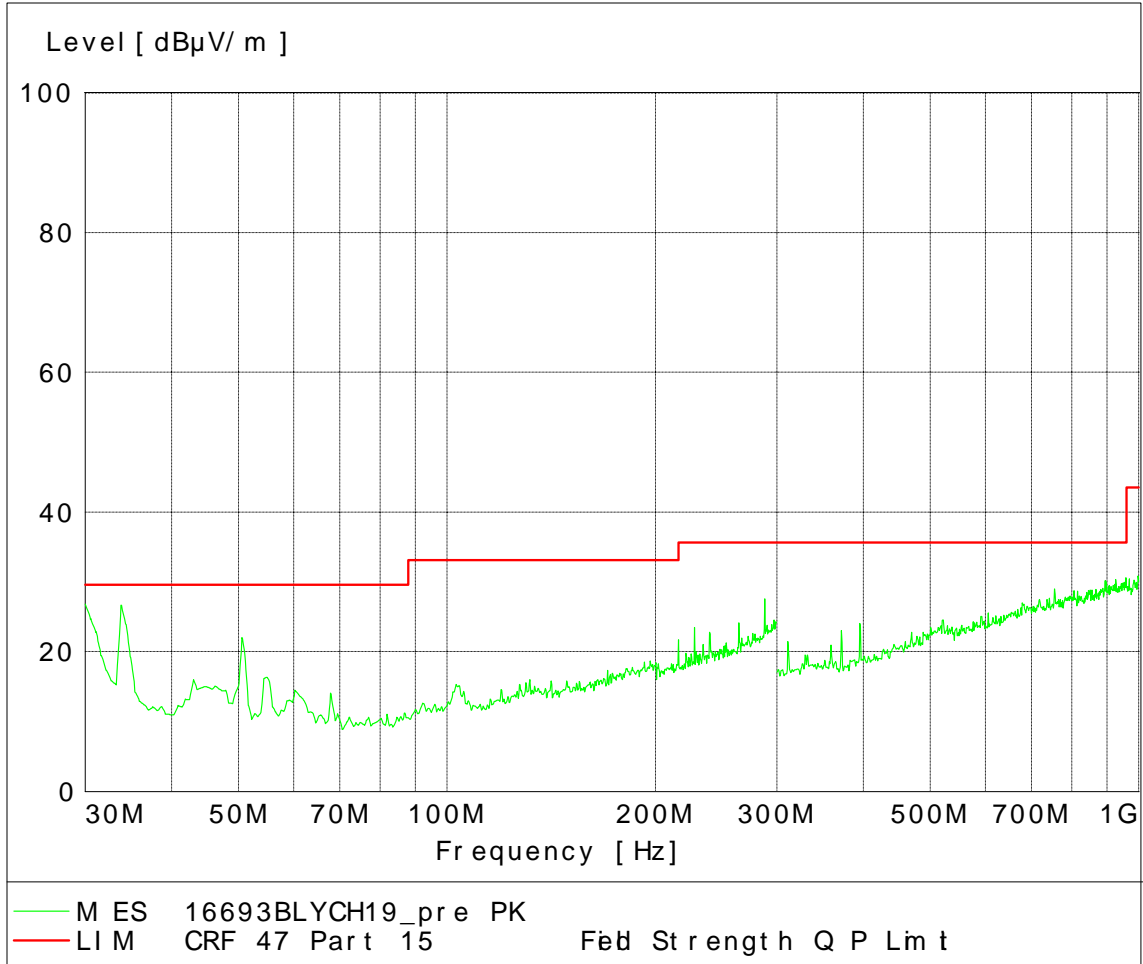

30 -1000MHz Mid Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	26.67	Peak	29.6
50.56	22.06	Peak	29.6
228	23.47	Peak	35.6
264	24.10	Peak	35.6
288	27.61	Peak	35.6

Primary Radiated Emissions


Motorola

Model: A732

Code: 16693-1

BT 2442MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

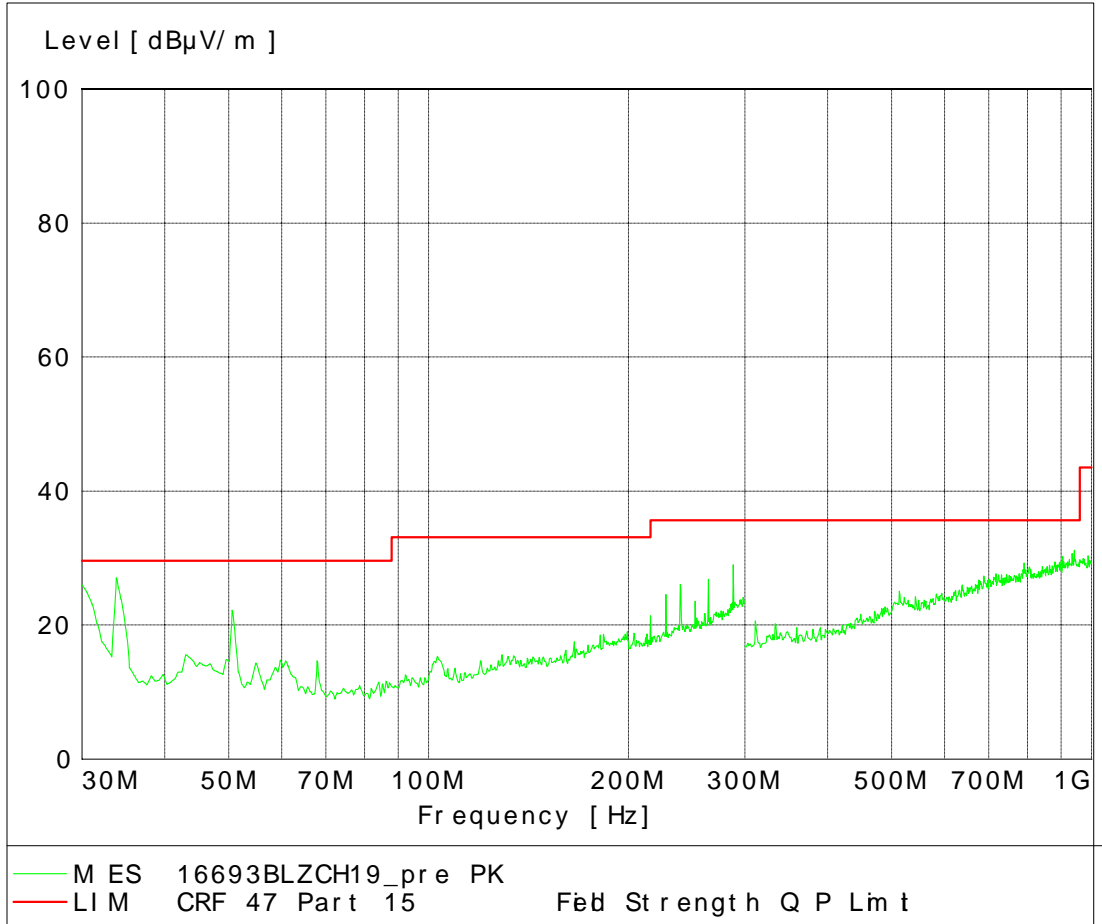

30 -1000MHz Mid Channel Dual Polarization Z

Frequency	Measured	Detector	Limit
33.78	27.08	Peak	29.6
228	24.53	Peak	35.6
239	26.03	Peak	35.6
264	26.08	Peak	35.6
288	29.01	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

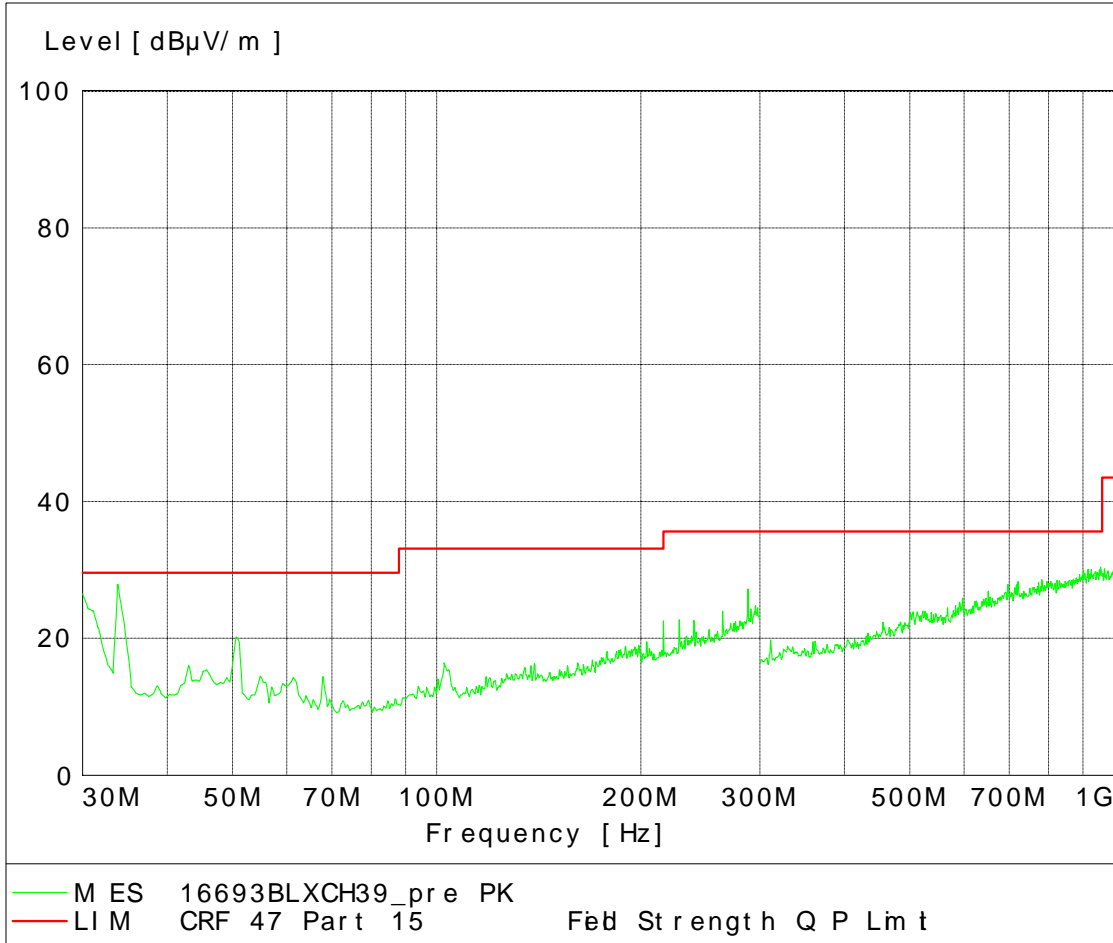

30 -1000MHz High Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	27.95	Peak	29.6
216	22.55	Peak	35.6
228	22.74	Peak	35.6
264	23.98	Peak	35.6
288	27.21	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

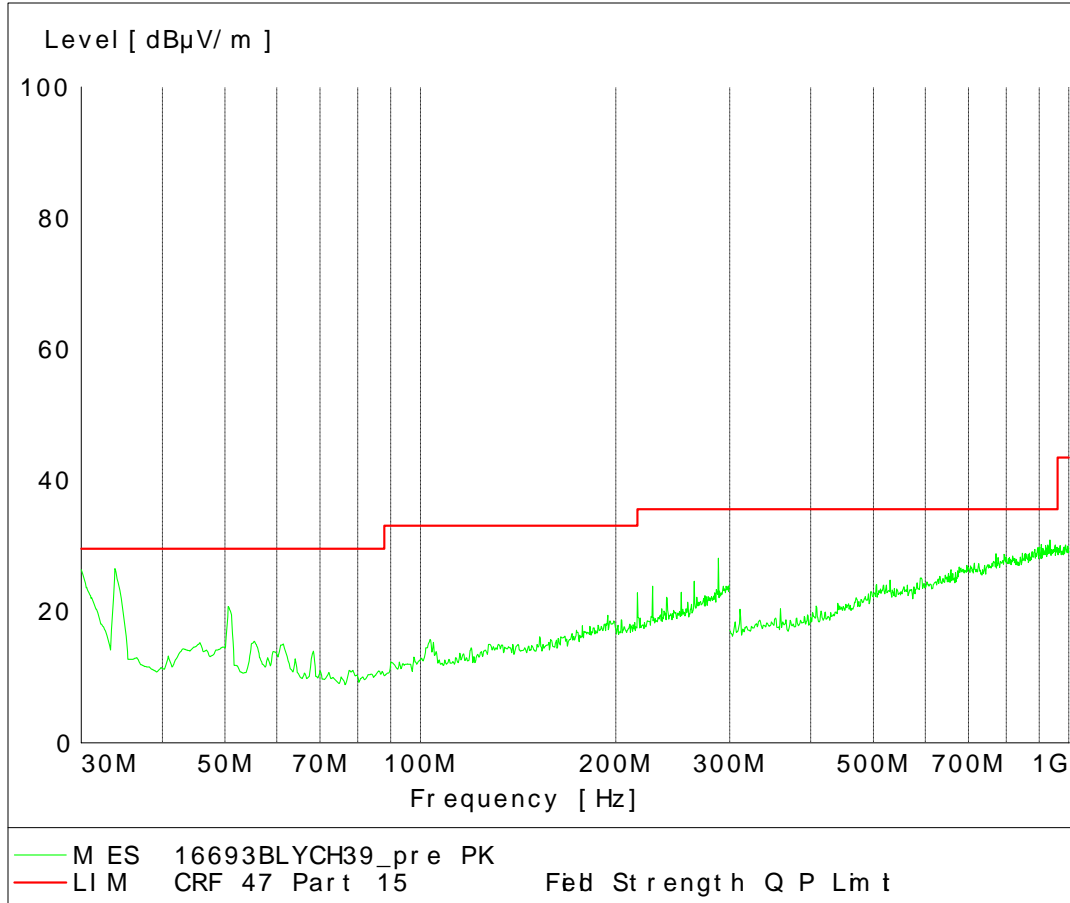

30 -1000MHz High Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	26.55	Peak	29.6
216	22.85	Peak	35.6
228	23.87	Peak	35.6
264	24.68	Peak	35.6
288	28.14	Peak	35.6


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

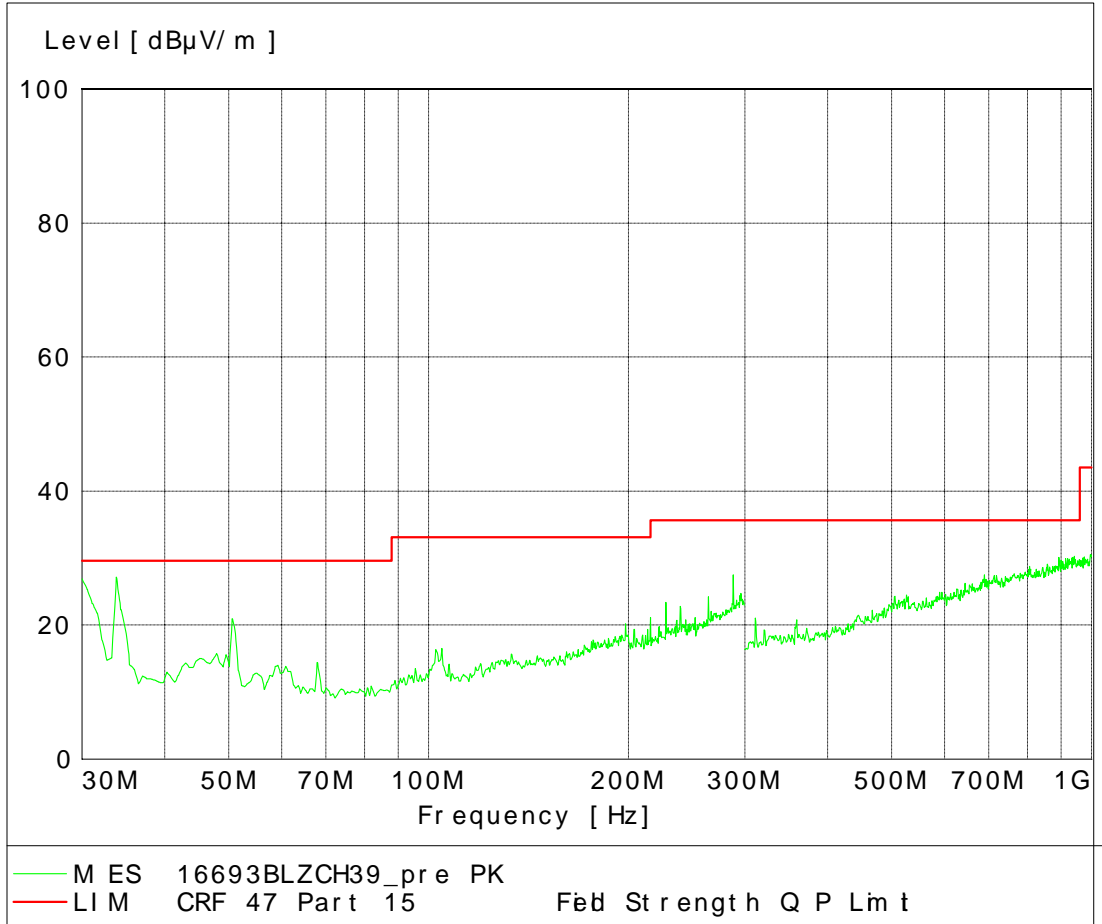

30 -1000MHz High Channel Dual Polarization Z

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
33.78	27.12	Peak	29.6
228	23.42	Peak	35.6
264	24.19	Peak	35.6
288	27.47	Peak	35.6

Primary Radiated Emissions


Motorola

Model: A732

ID Code: 16693-1

BT 2402MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

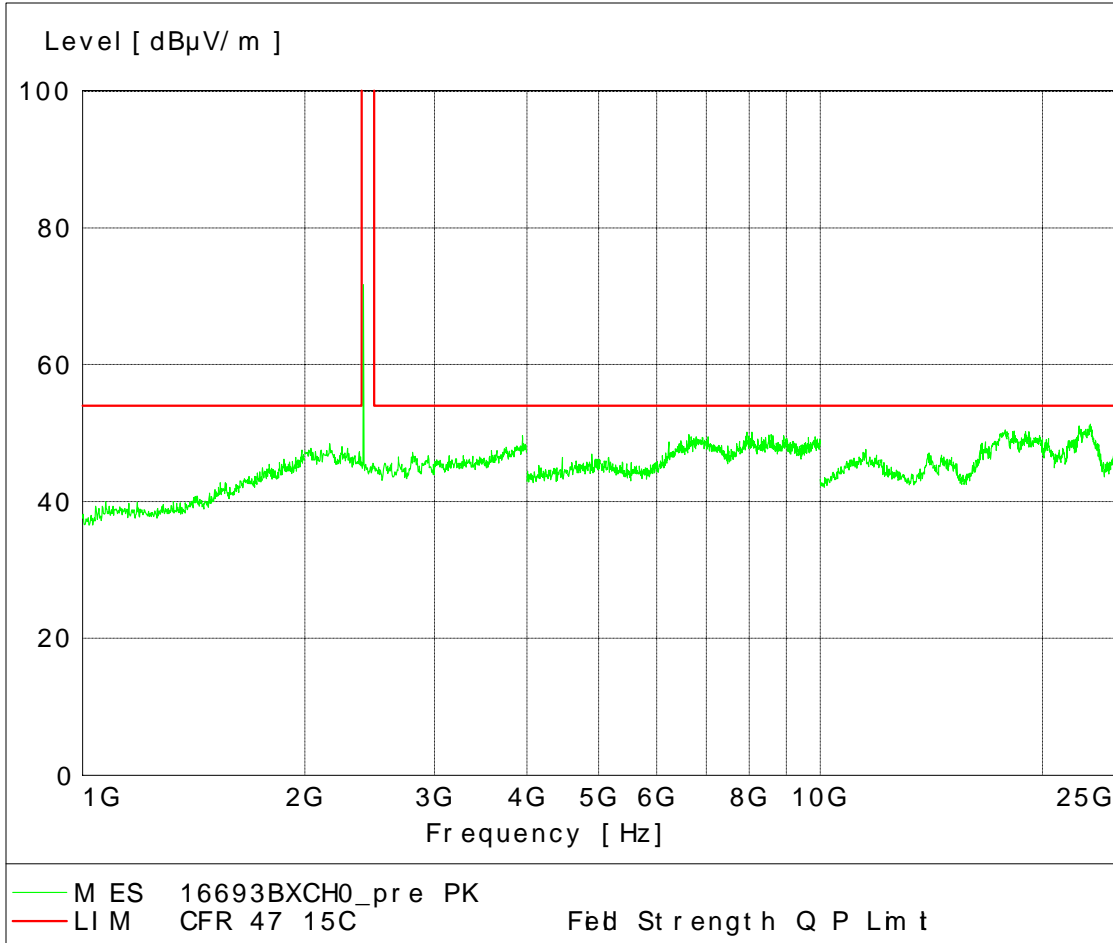

1-25 GHz Low Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2400	71.68	Peak	999
4889	45.55	Peak	54
9627	47.94	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2402MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

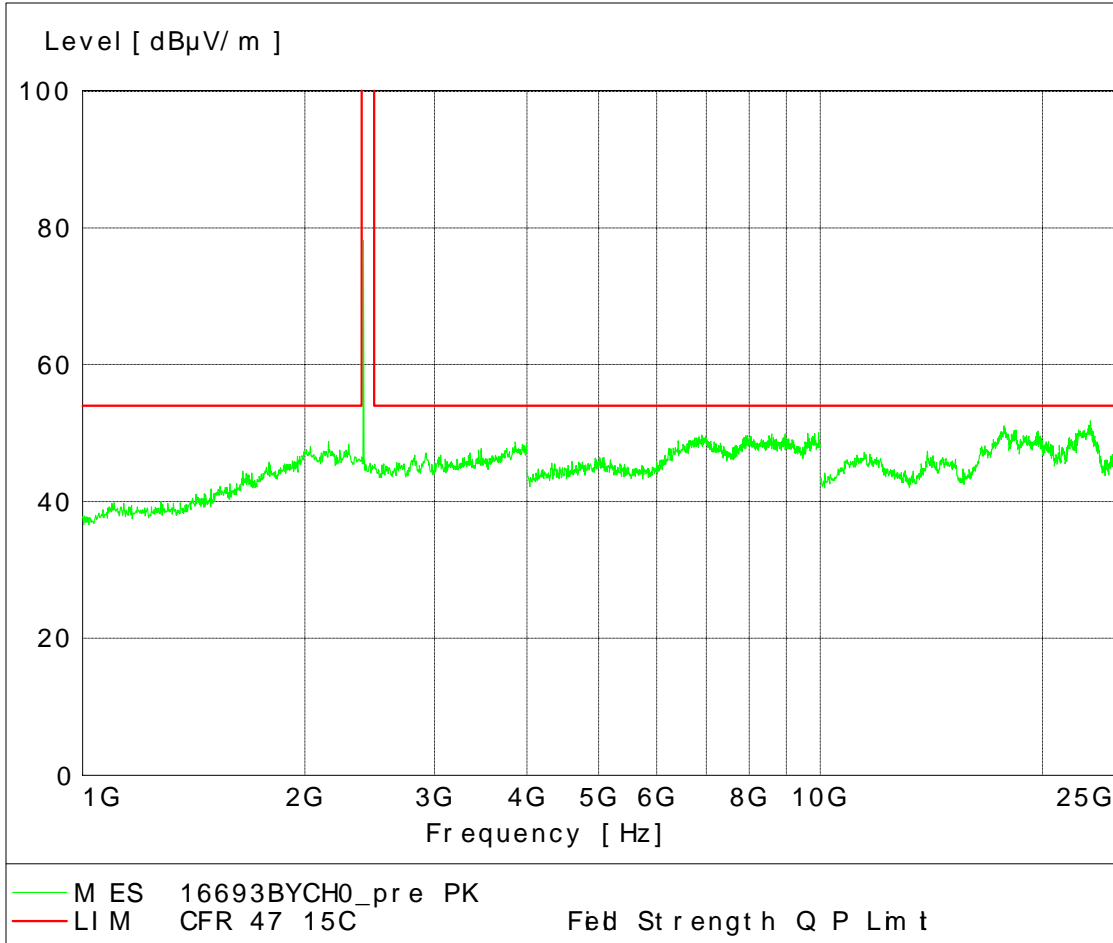

1-25 GHz Low Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2400	78.11	Peak	999
9627	48.49	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2402MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

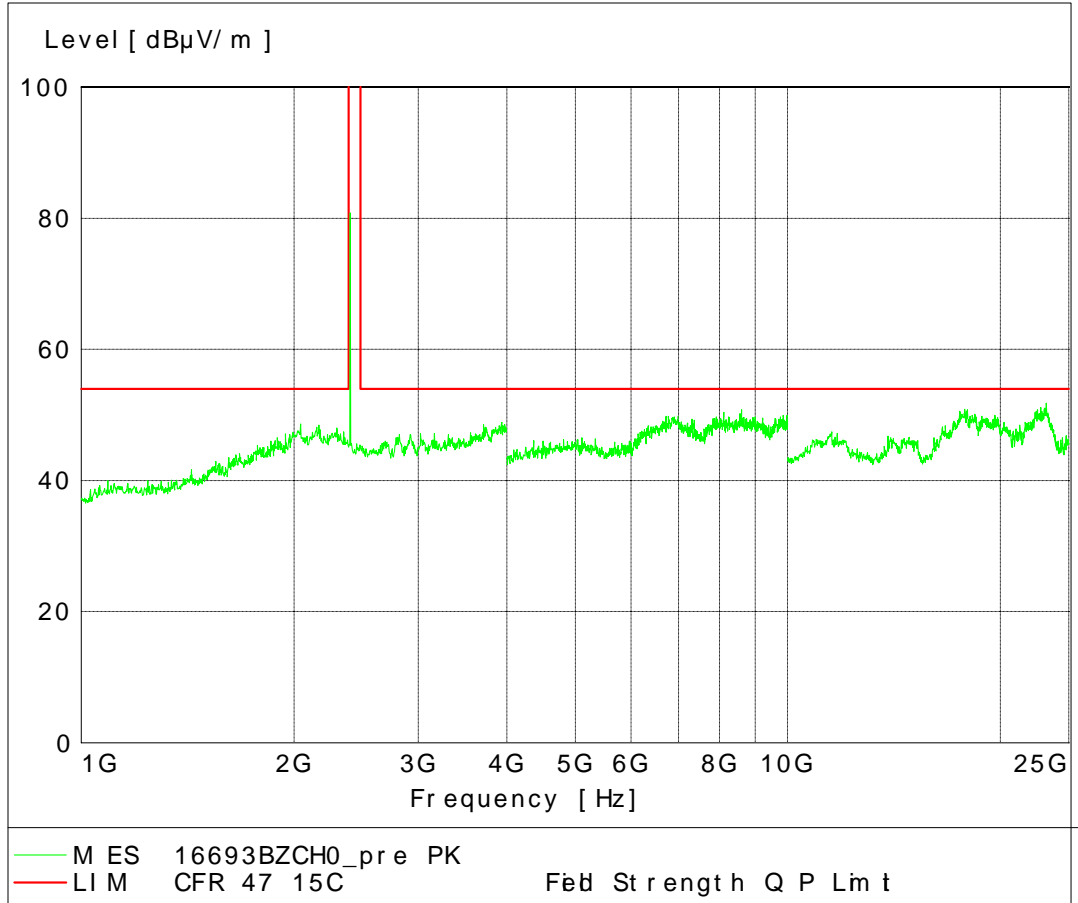

1-25 GHz Low Channel Dual Polarization Z

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2400	80.84	Peak	999
4877	45.95	Peak	54
7204	48.60	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2441MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

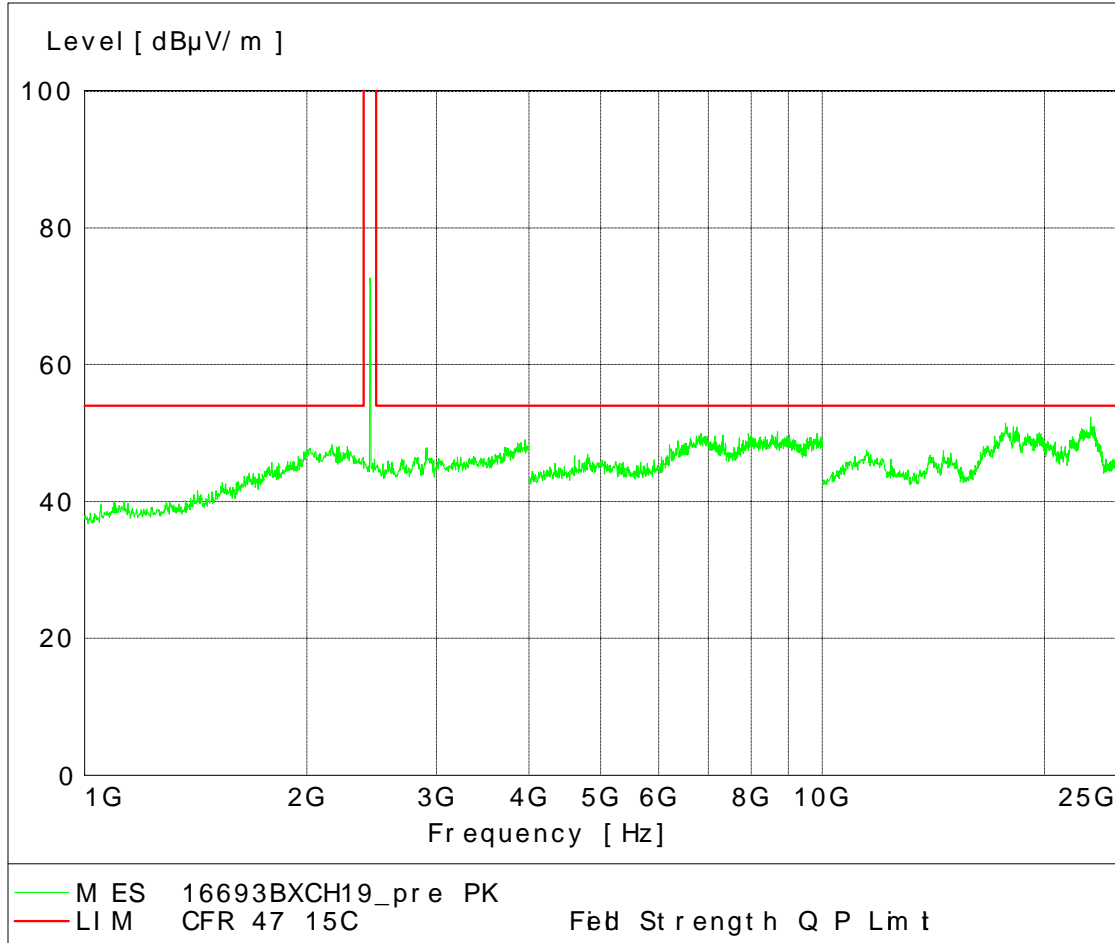

1-25 GHz Mid Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2436	72.71	Peak	999
4779	46.20	Peak	54
7318	48.48	Peak	54
12.388	46.17	Peak	54
14.585	47.45	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2441MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

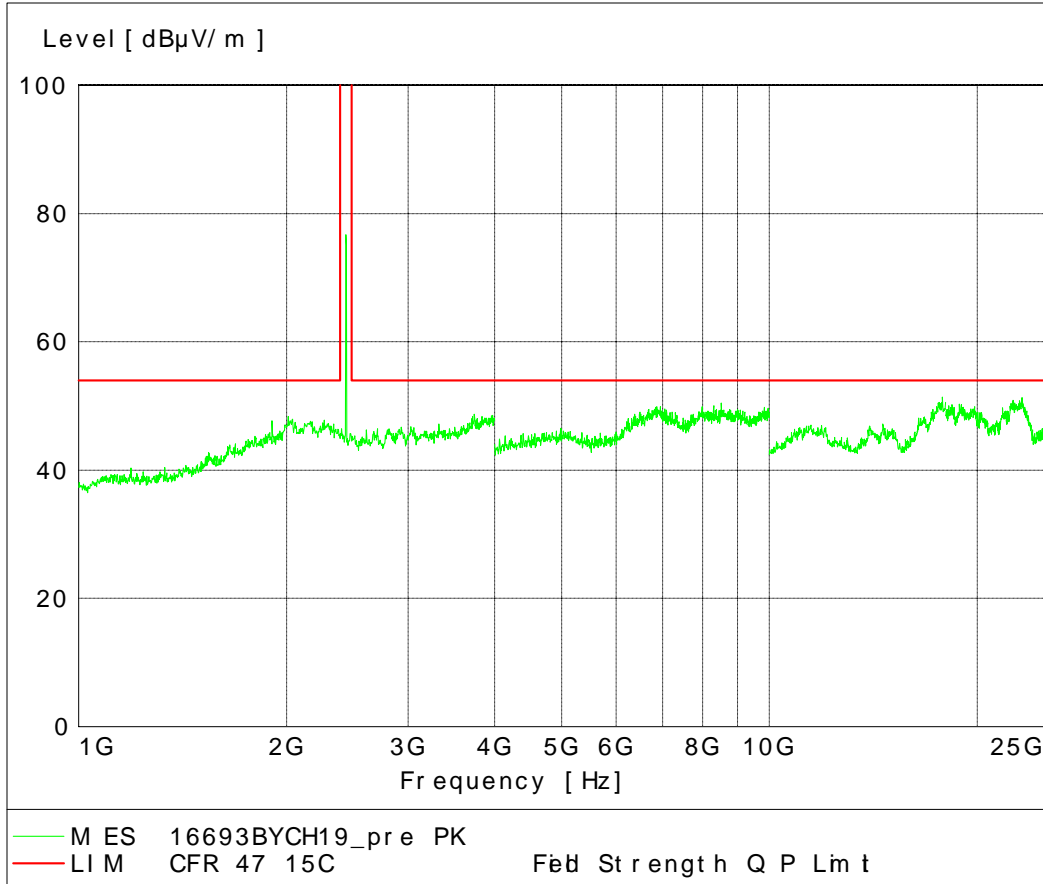

1-25 GHz Mid Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2436	76.71	Peak	999


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2441MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

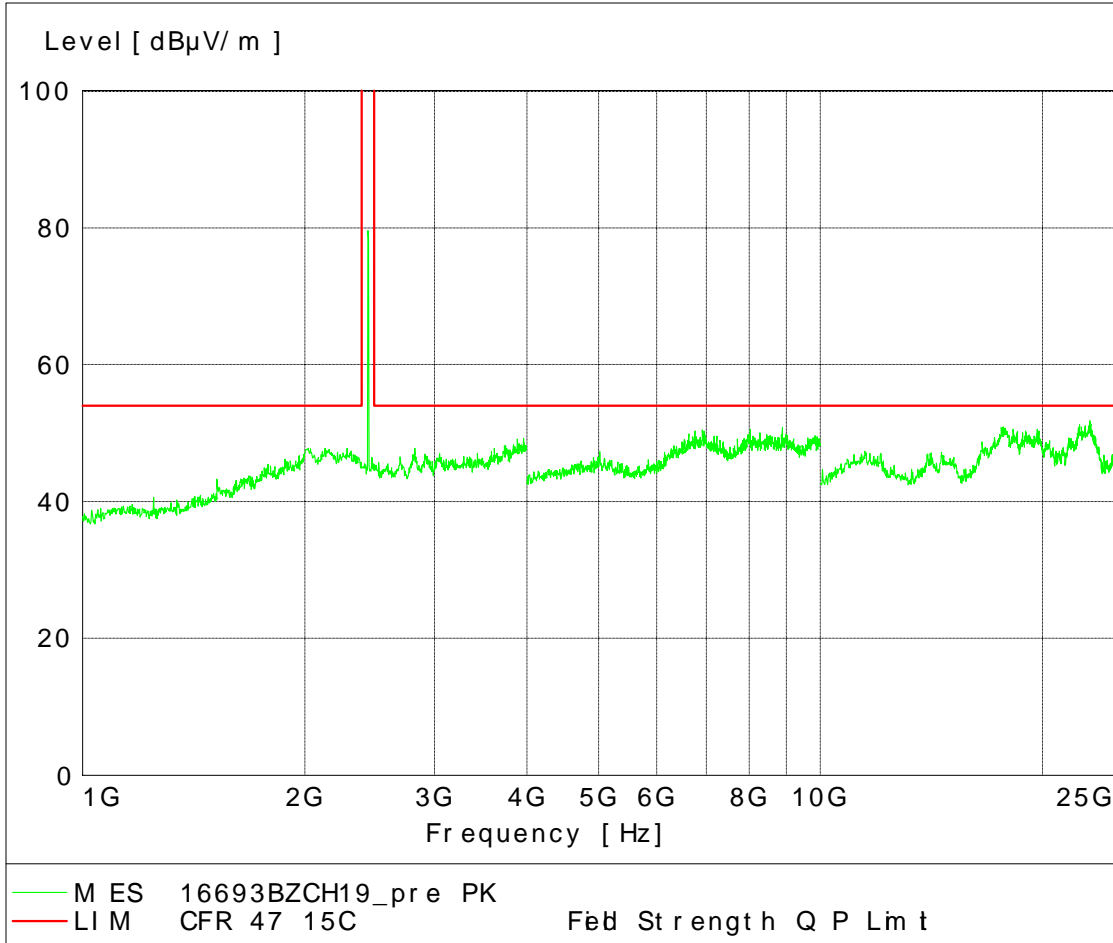

1-25 GHz Mid Channel Dual Polarization Z

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2436	79.55	Peak	999
4889	45.83	Peak	54
14.681	46.70	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz X-Axis

GREEN HORIZONTAL AND VERTICAL

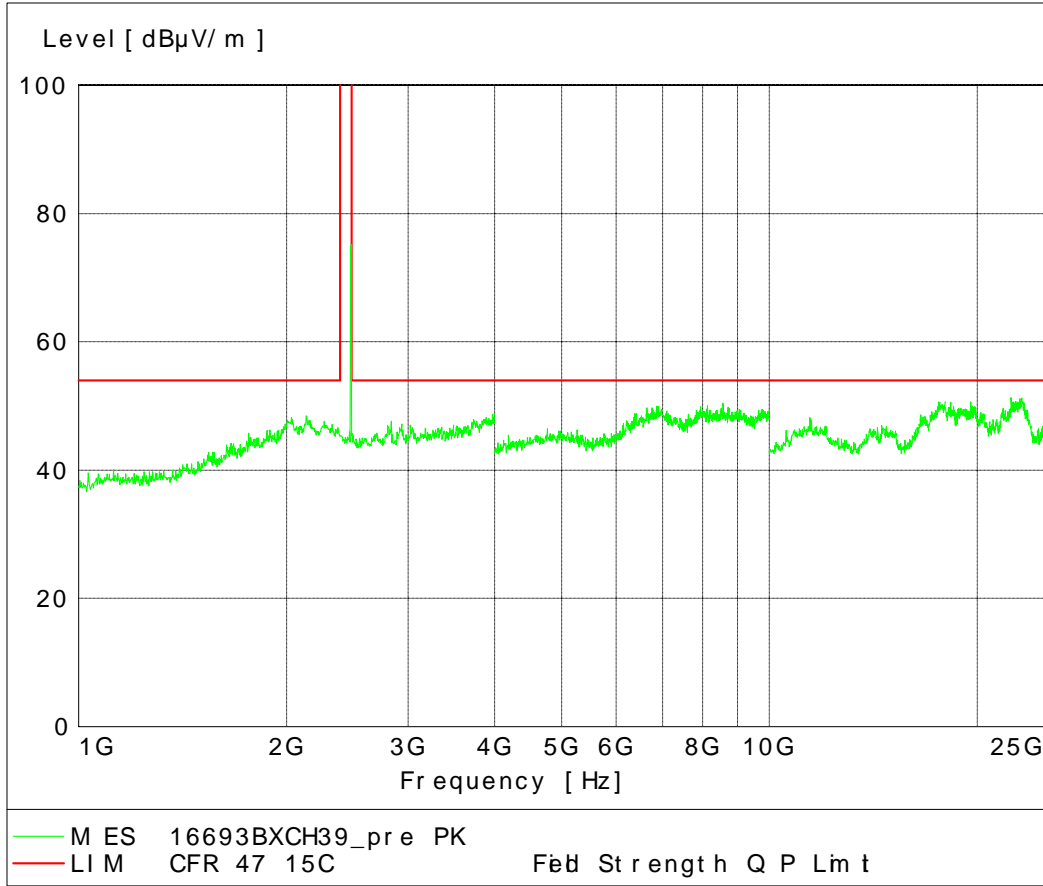

1-25 GHz High Channel Dual Polarization X

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2480	75.22	Peak	999
14.585	46.18	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz Y-Axis

GREEN HORIZONTAL AND VERTICAL

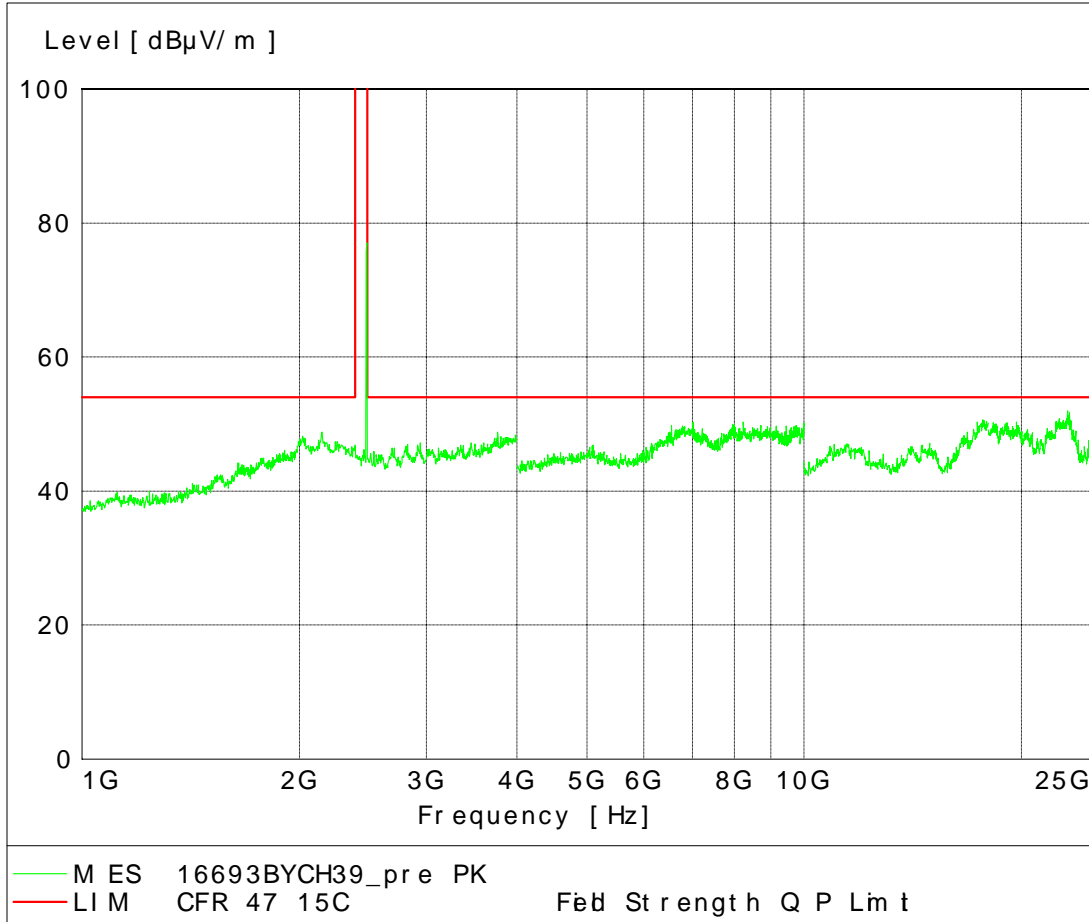

1-25 GHz High Channel Dual Polarization Y

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2480	77.01	Peak	999
14.921	47.11	Peak	54
19.683	50.27	Peak	54
22.390	50.37	Peak	54


Primary Radiated Emissions

Motorola

Model: A732 ID Code: 16693-1

BT 2480MHz Z-Axis

GREEN HORIZONTAL AND VERTICAL

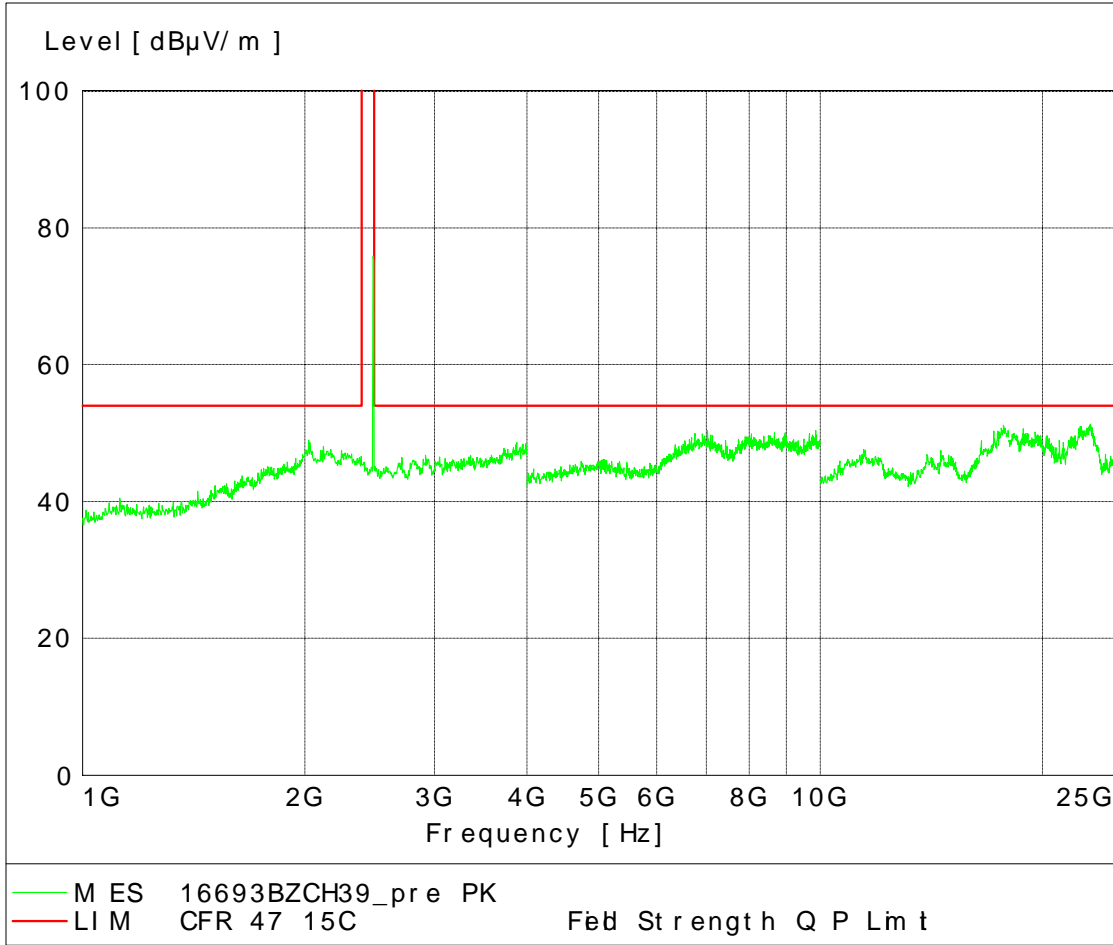

1-25 GHz High Channel Dual Polarization Z

Frequency MHz	Measured dBµV/m	Detector Type	Limit dBµV/m
2481	75.27	Peak	999
14.873	45.24	Peak	54


Radiated Emissions Band Edge

Motorola

Model: A732

ID Code: 16693-1


BT 2402MHz X-Axis

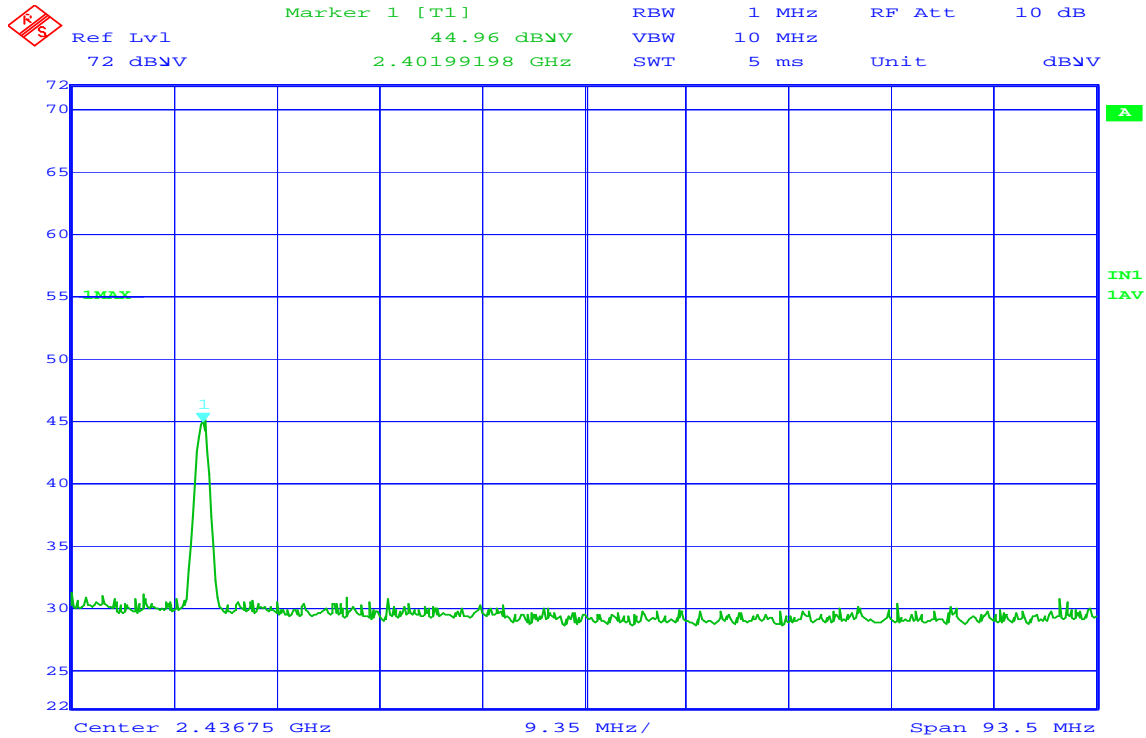

Date: 4.SEP.2005 22:45:46

Authorized Band Emissions Low Channel Dual Polarization X

Radiated Emissions Band Edge
Motorola
Model: A732 ID Code: 16693-1
BT 2402MHz Y-Axis

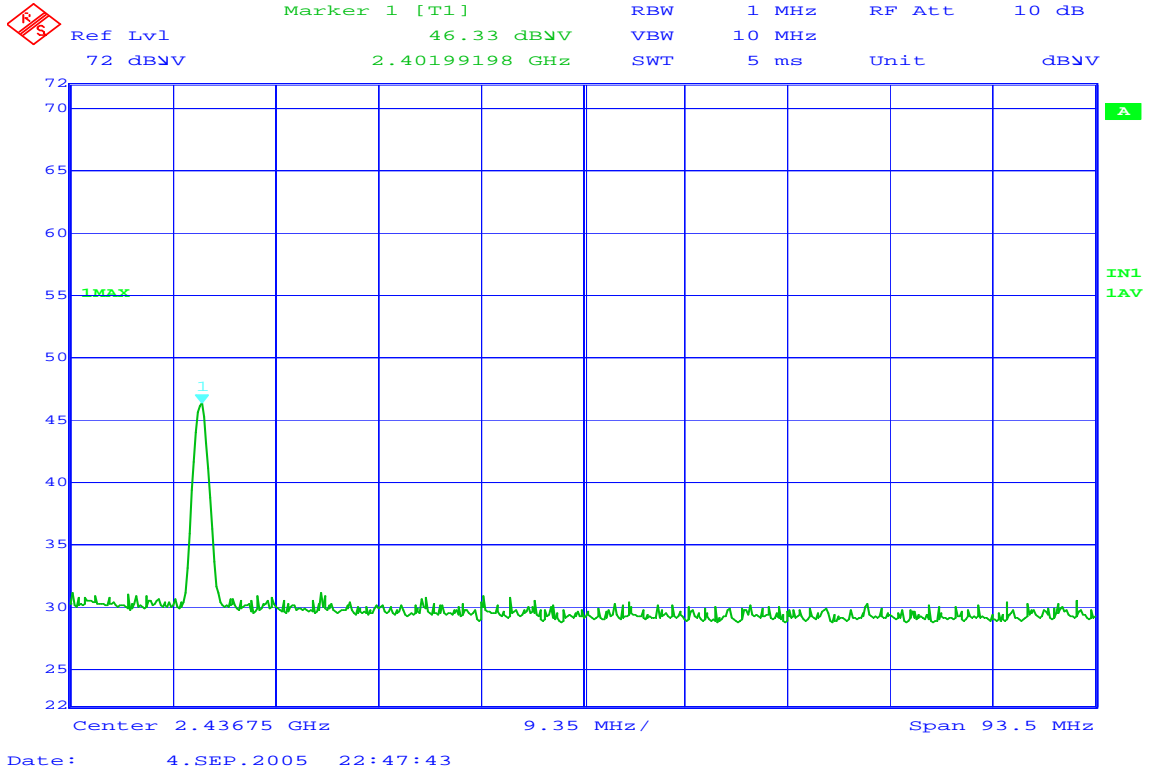

Authorized Band Emissions Low Channel Dual Polarization Y


Radiated Emissions Band Edge

Motorola

Model: A732

ID Code: 16693-1

BT 2402MHz Z-Axis

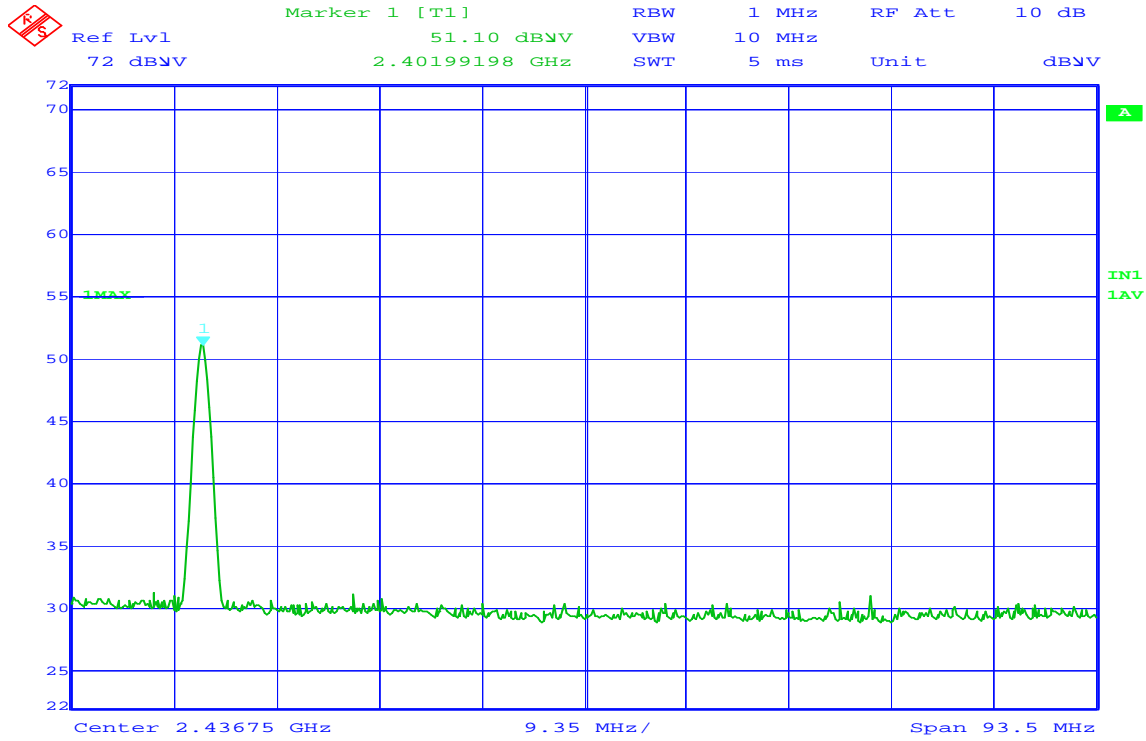

Date: 4.SEP.2005 22:50:09

Authorized Band Emissions Low Channel Dual Polarization Z


Radiated Emissions Band Edge

Motorola

Model: A732


ID Code: 16693-1

BT 2442MHz X-Axis

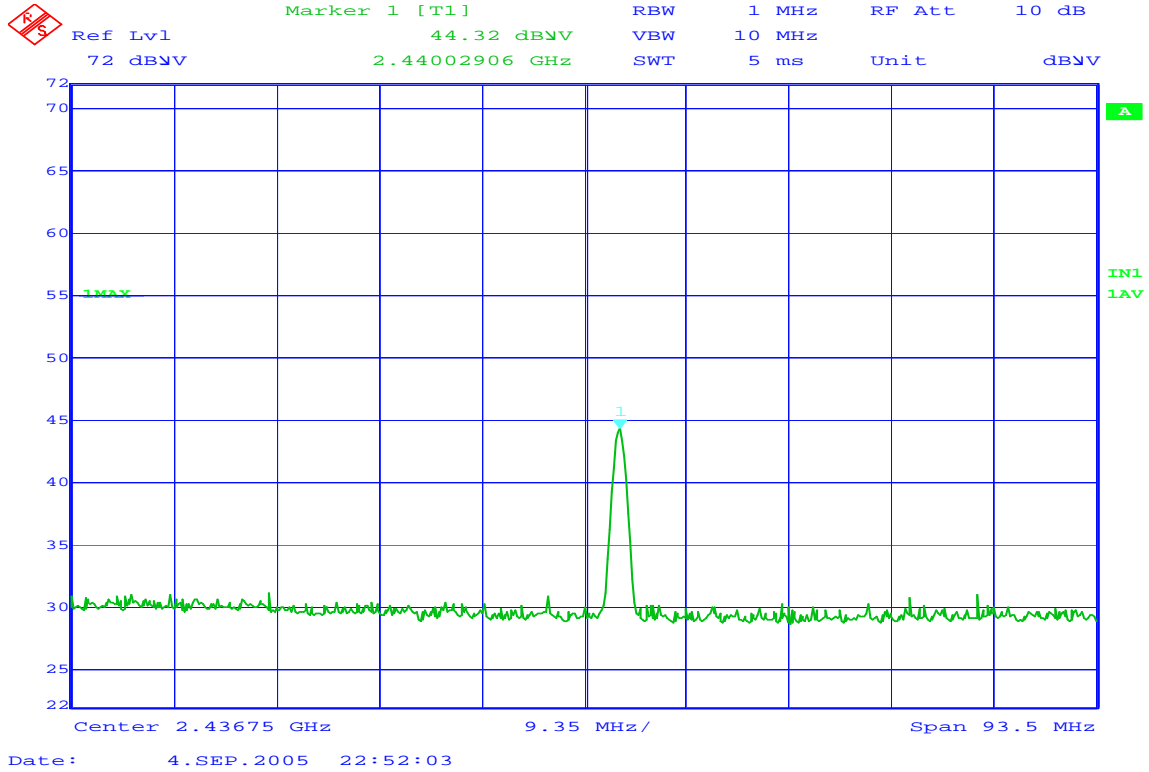

Authorized Band Emissions Mid Channel Dual Polarization X

Radiated Emissions Band Edge
Motorola
Model: A732 ID Code: 16693-1
BT 2442MHz Y-Axis

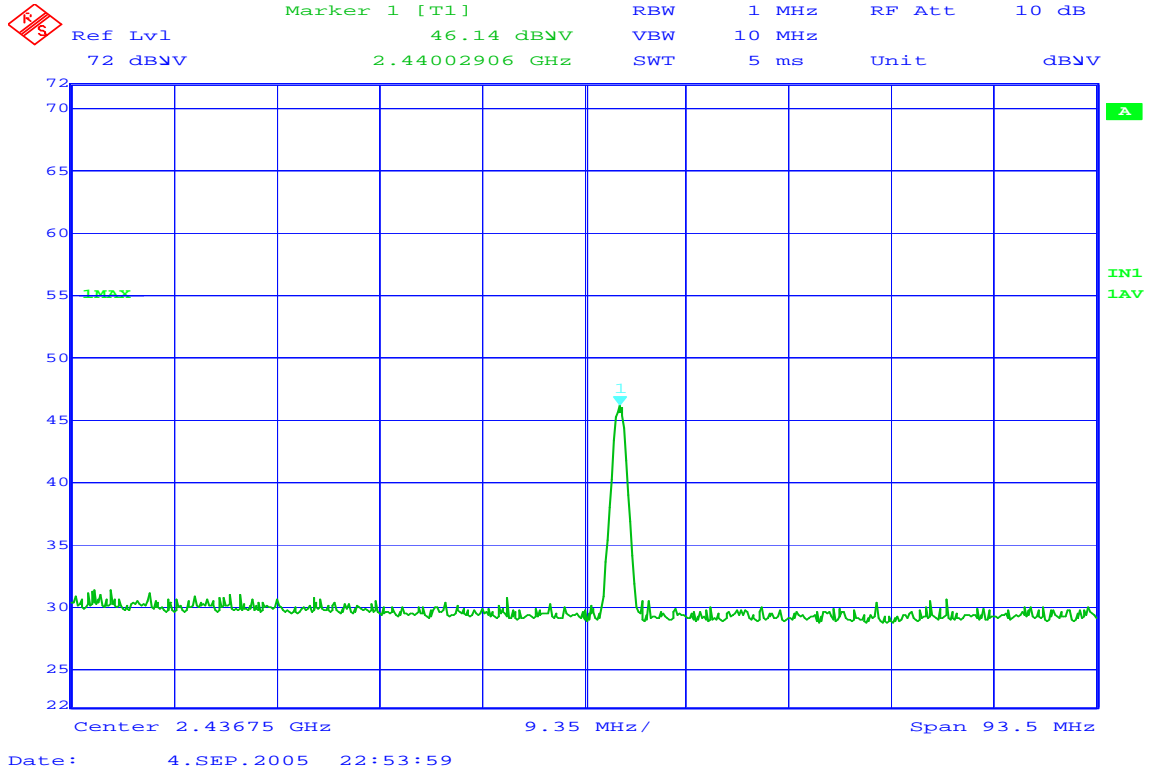

Authorized Band Emissions Mid Channel Dual Polarization Y


Radiated Emissions Band Edge

Motorola

Model: A732

ID Code: 16693-1

BT 2442MHz Z-Axis

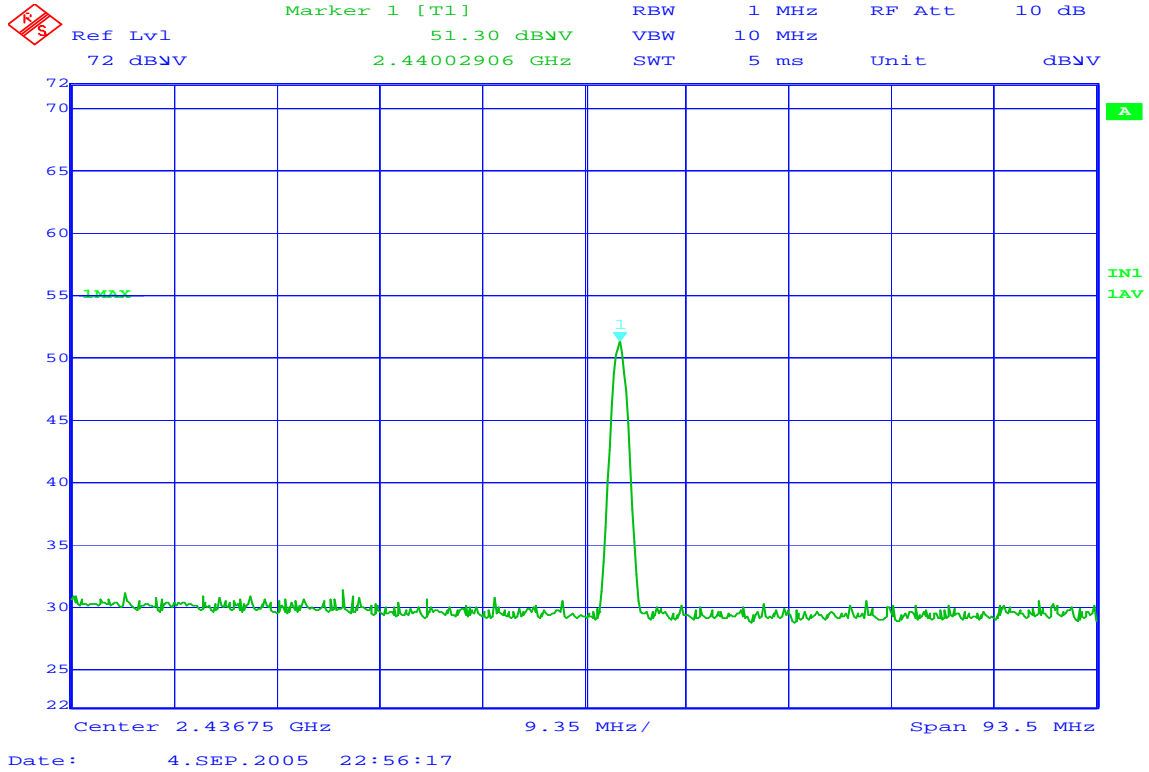

Authorized Band Emissions Mid Channel Dual Polarization Z


Radiated Emissions Band Edge

Motorola

Model: A732

ID Code: 16693-1

BT 2480MHz X-Axis

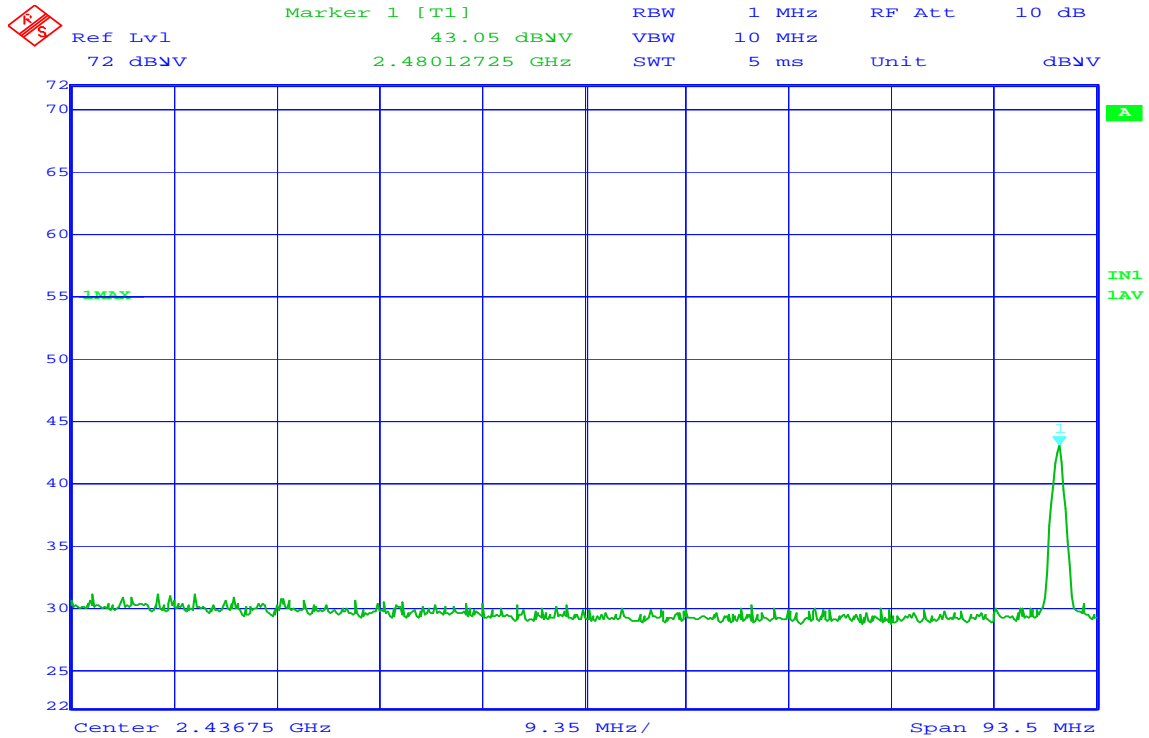

Date: 4.SEP.2005 22:58:07


Authorized Band Emissions High Channel Dual Polarization X

Radiated Emissions Band Edge

Motorola


Model: A732 ID Code: 16693-1

BT 2480MHz Y-Axis

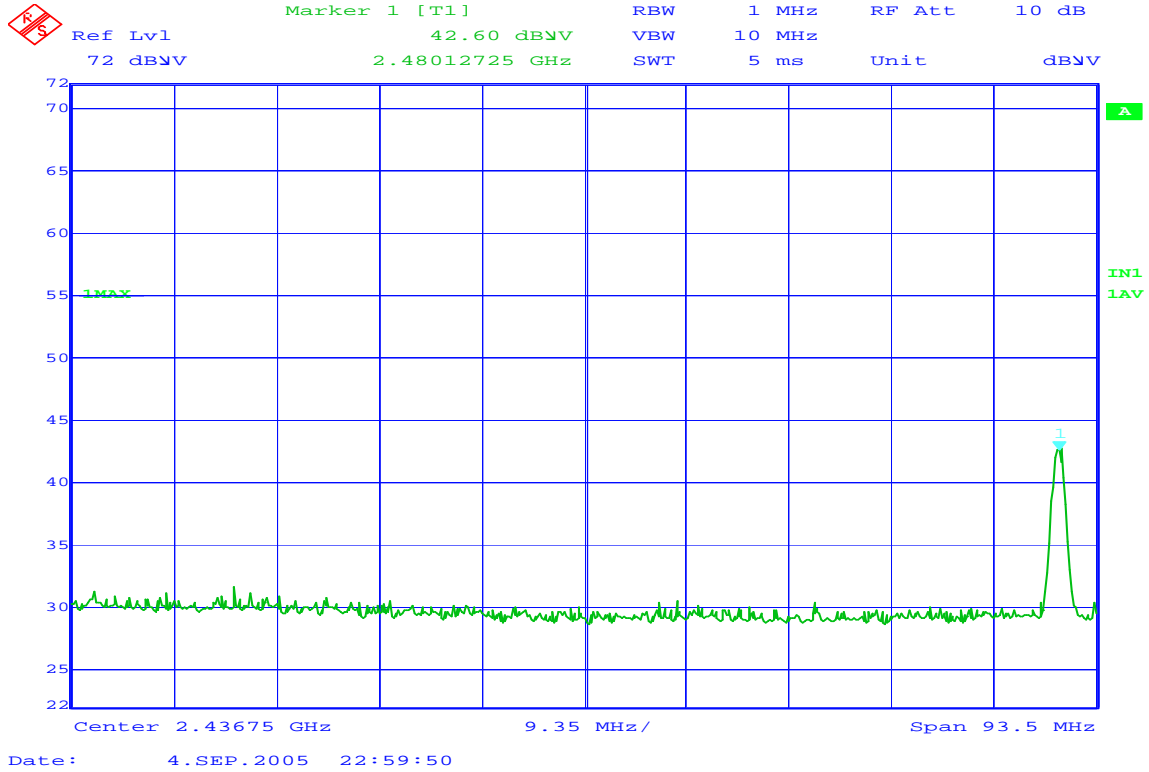

Authorized Band Emissions High Channel Dual Polarization Y

Radiated Emissions Band Edge
Motorola
Model: A732 ID Code: 16693-1
BT 2480MHz Z-Axis

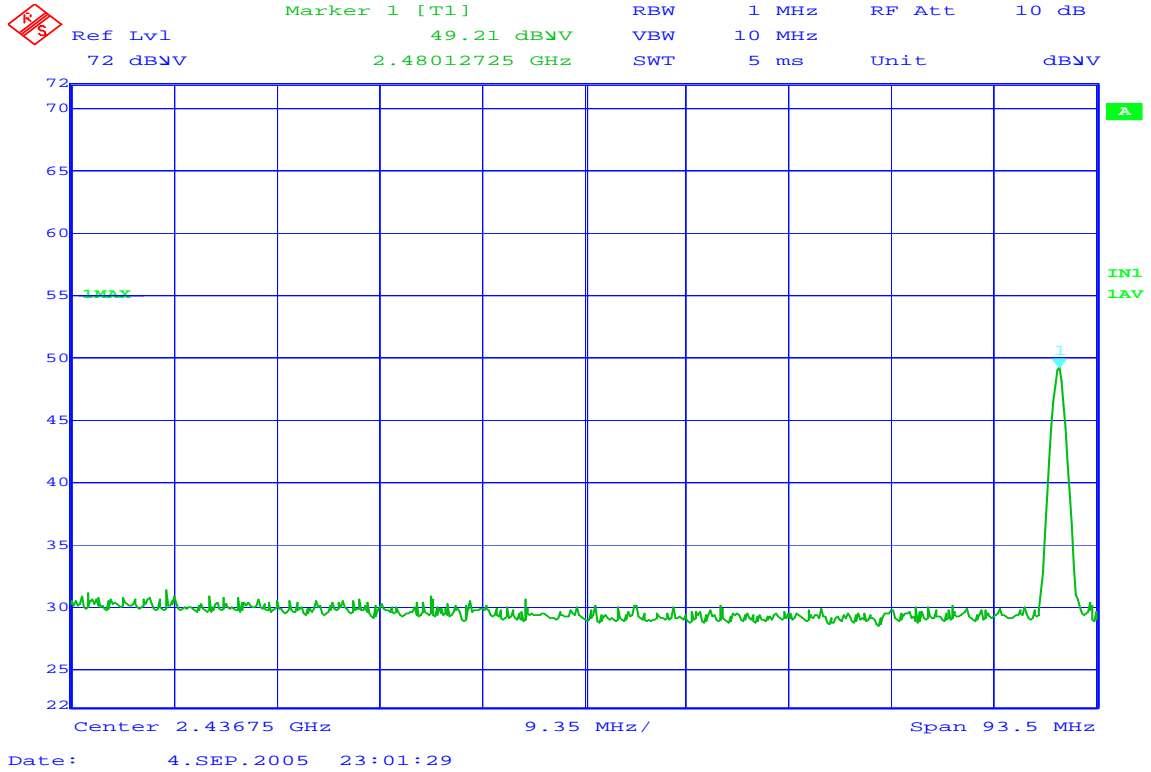

Authorized Band Emissions High Channel Dual Polarization Z


PEAK OUTPUT POWER

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

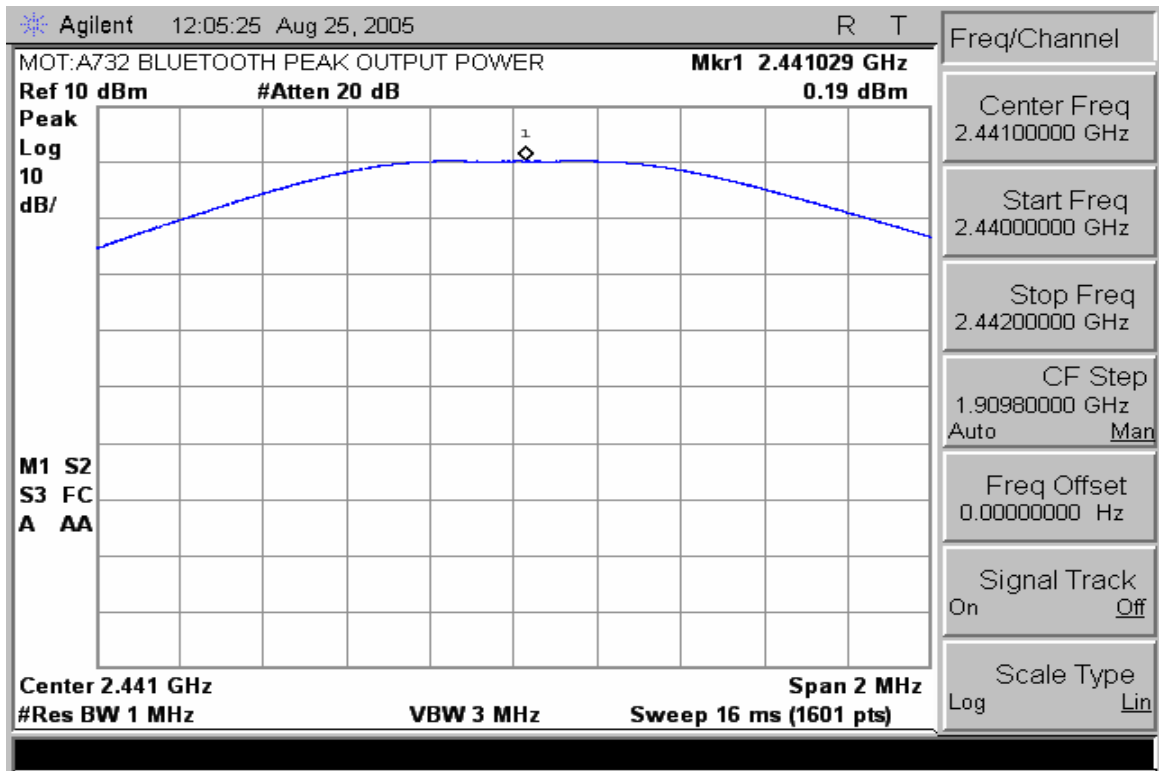

Peak Output Power

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached:

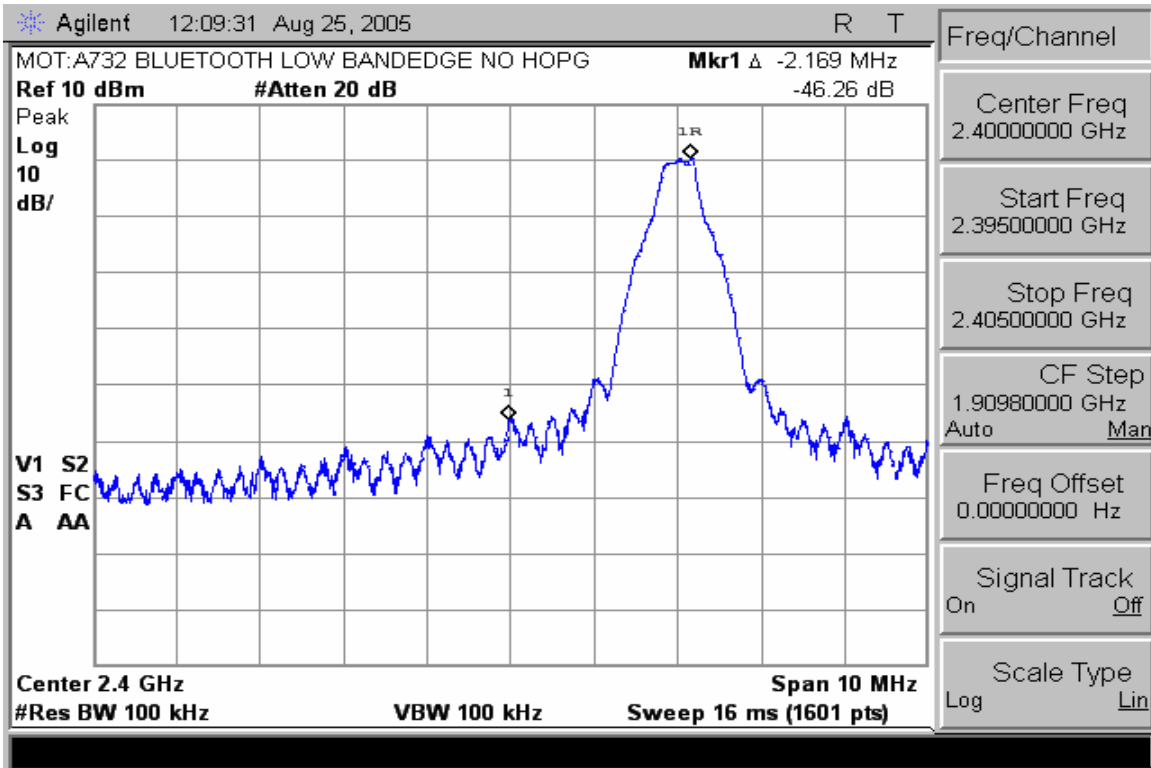


Low Band Edge with Hopping Disabled

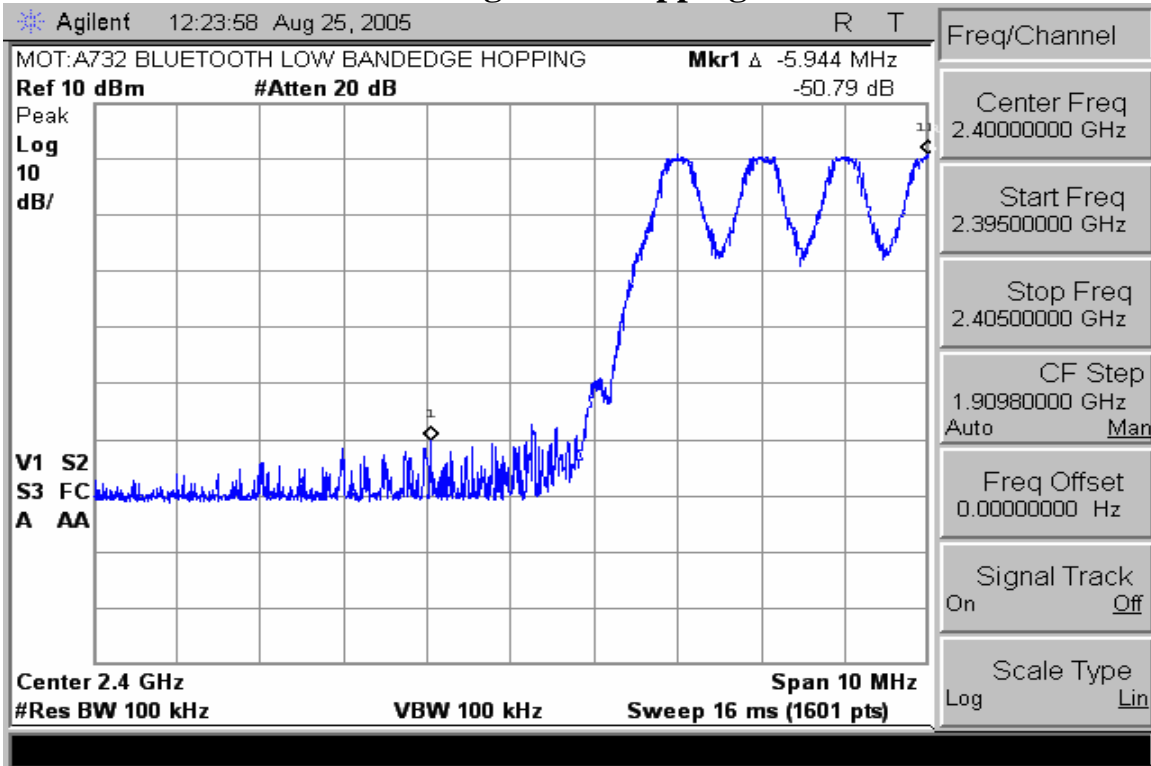

Low Band Edge with Hopping Enabled

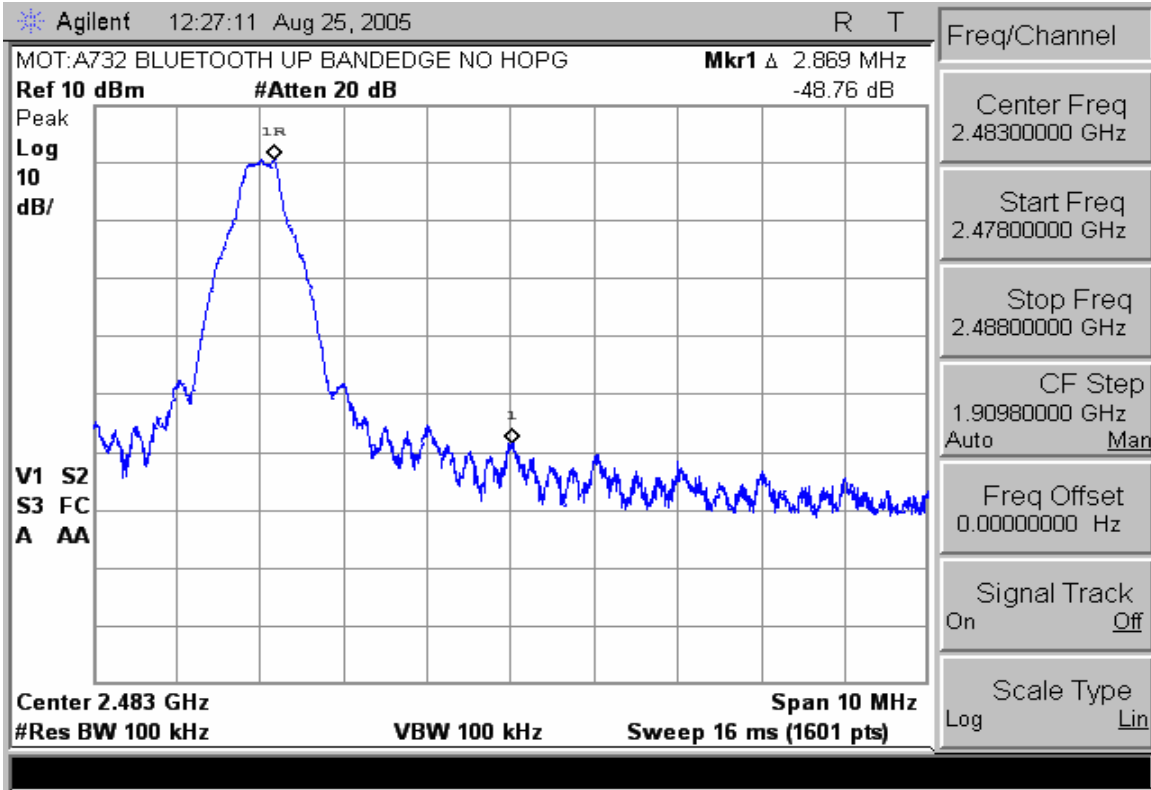

High Band Edge with Hopping Disabled

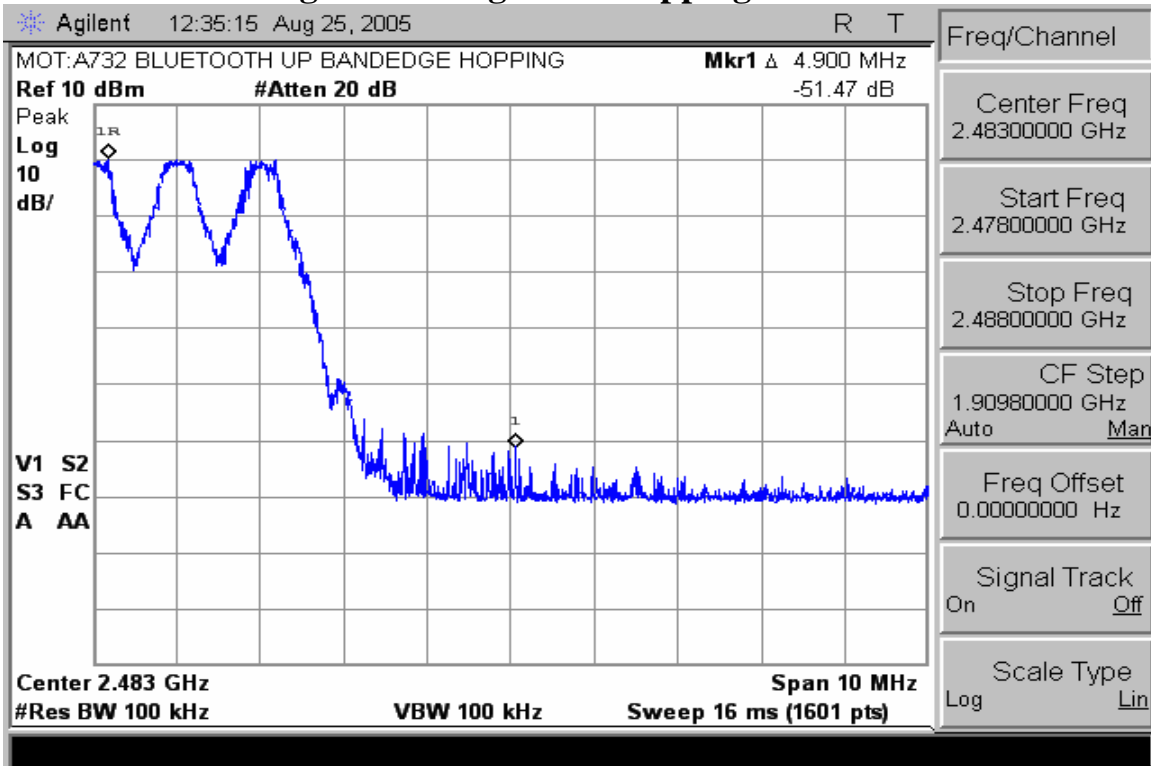

High Band Edge with Hopping Enabled

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

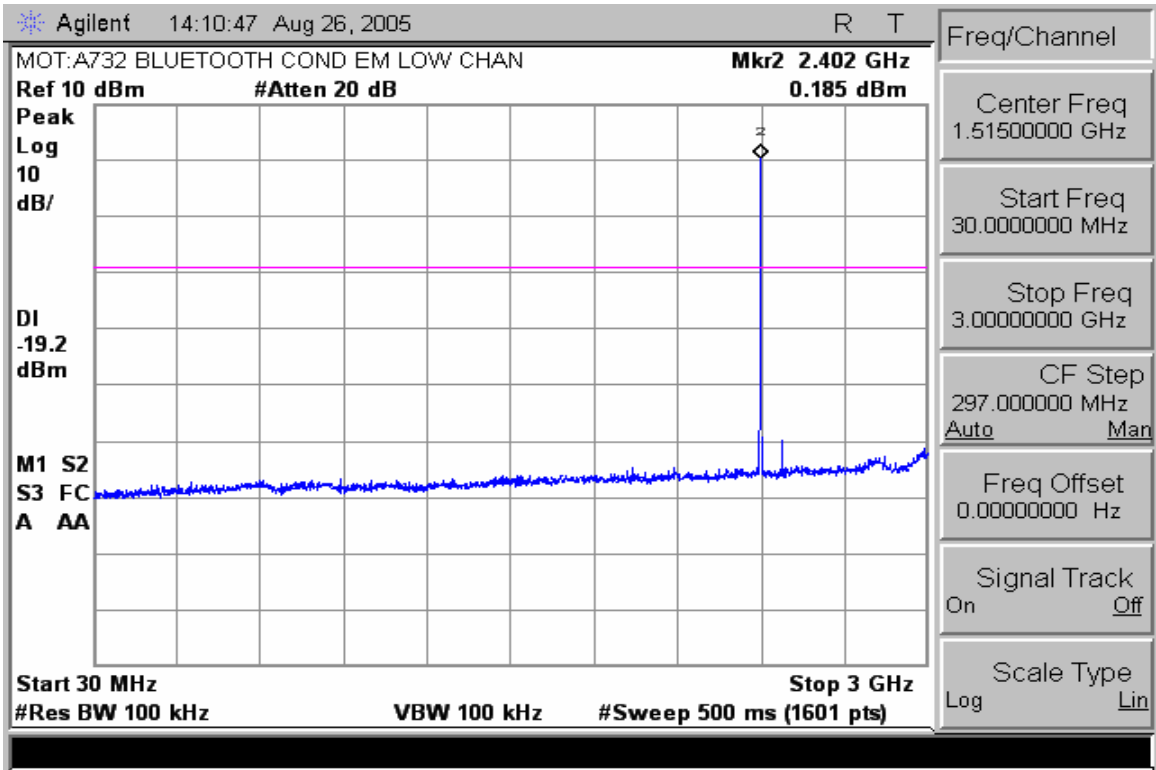


Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

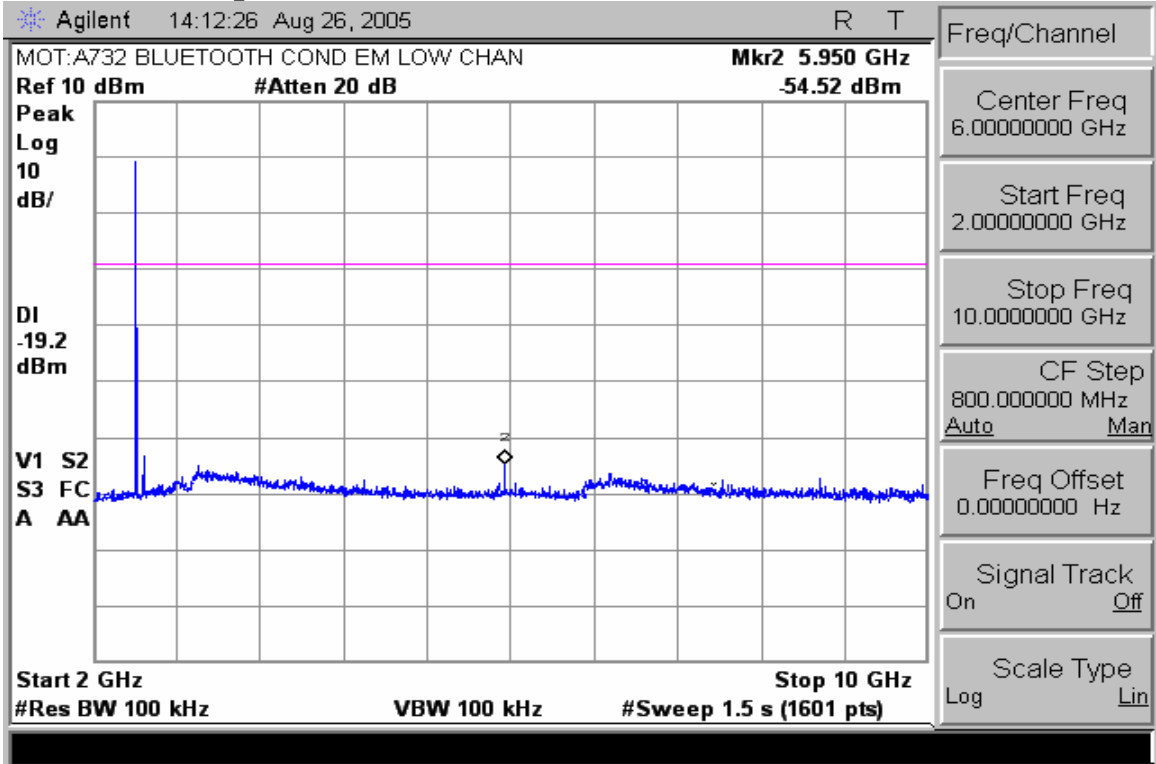


Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

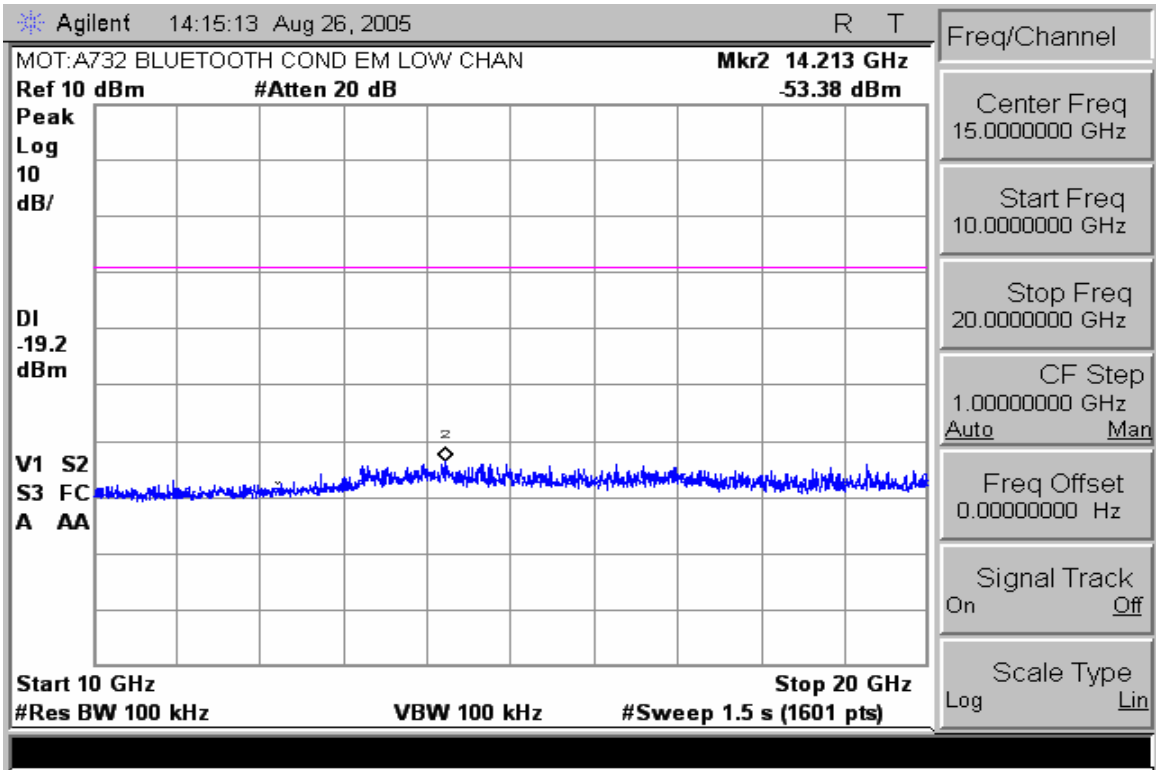


Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

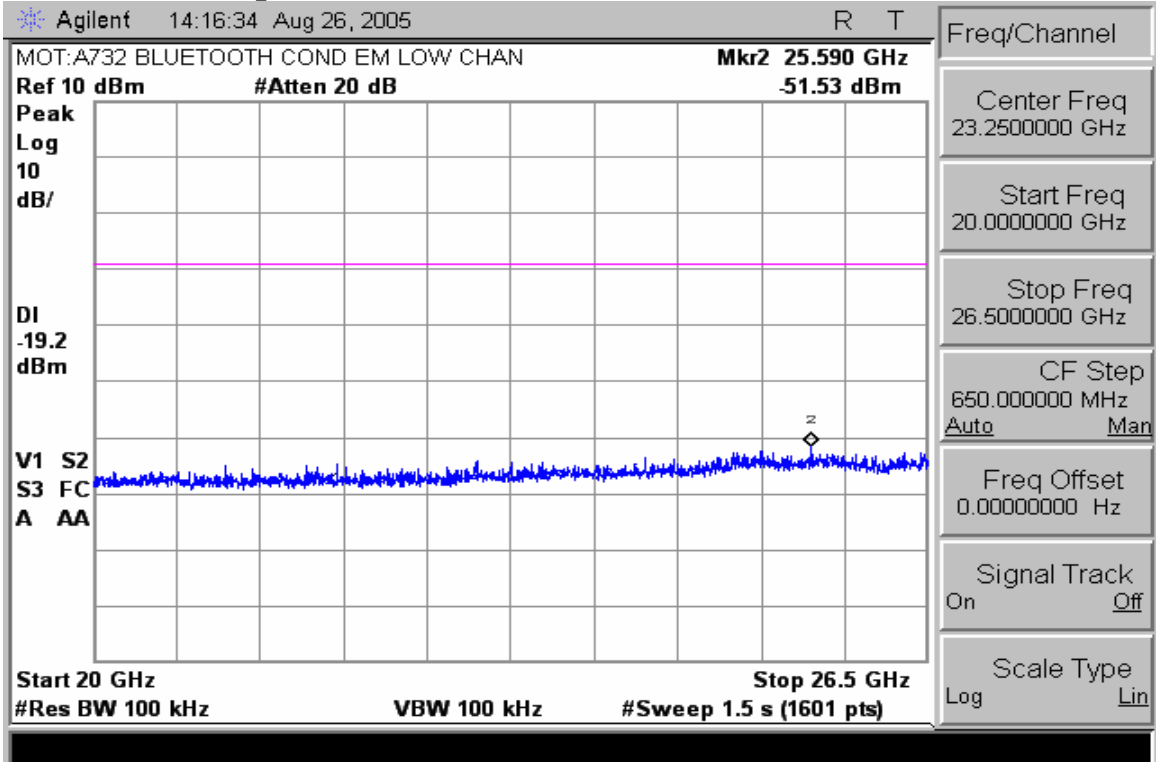


Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

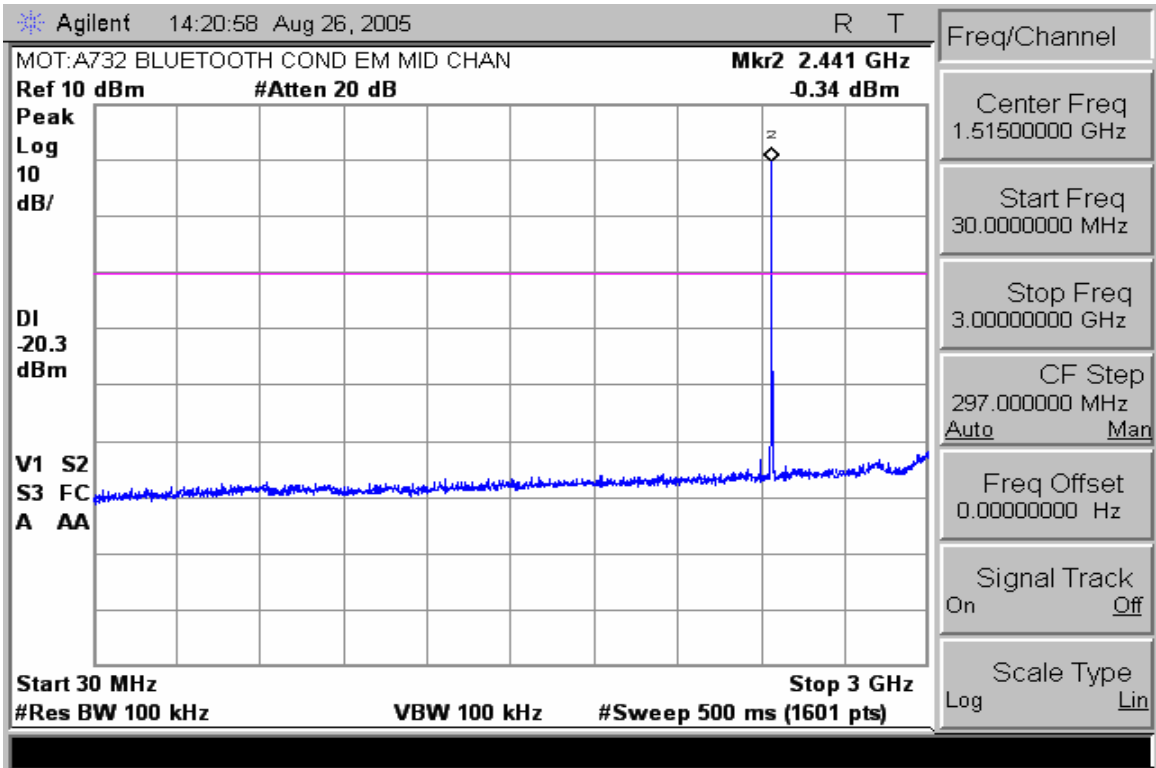


Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

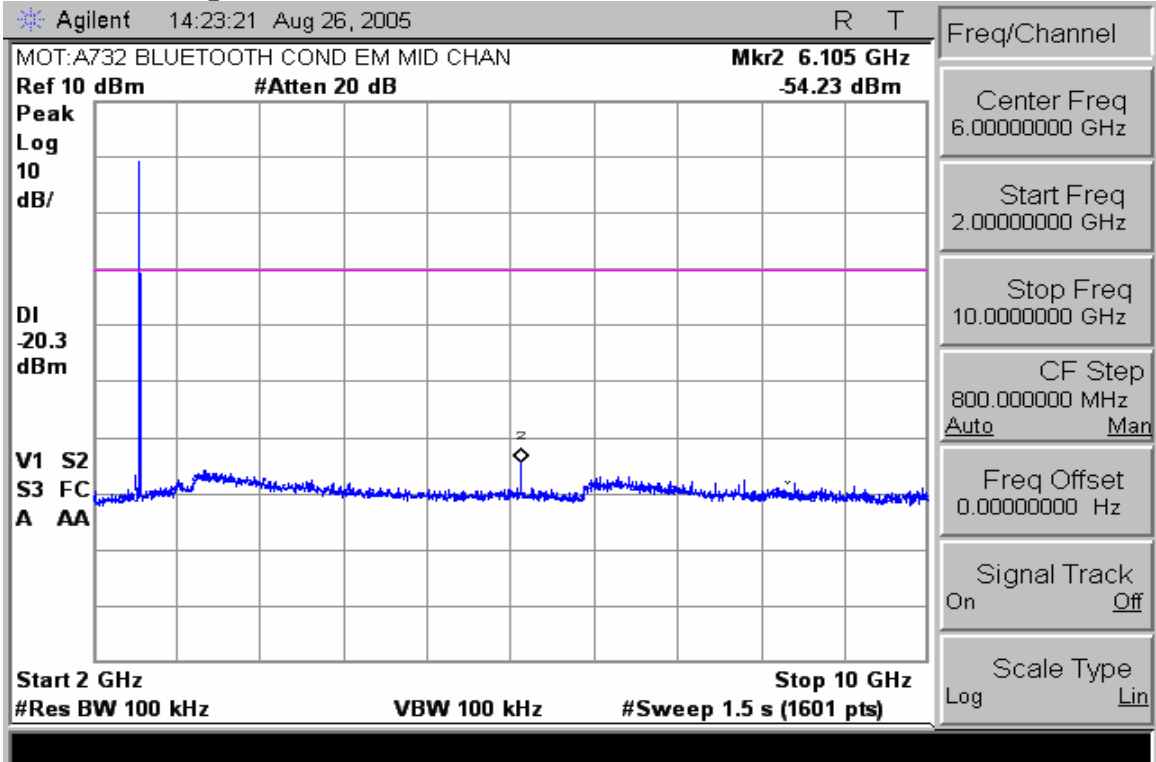


Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

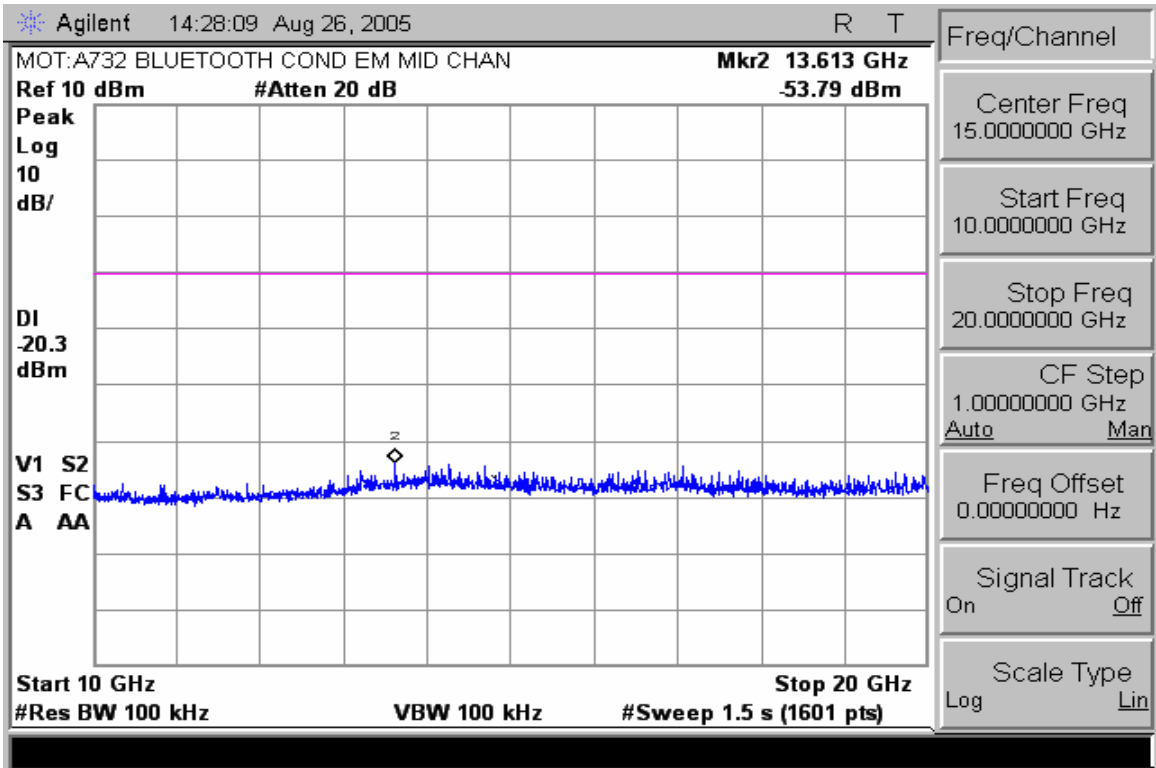


Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

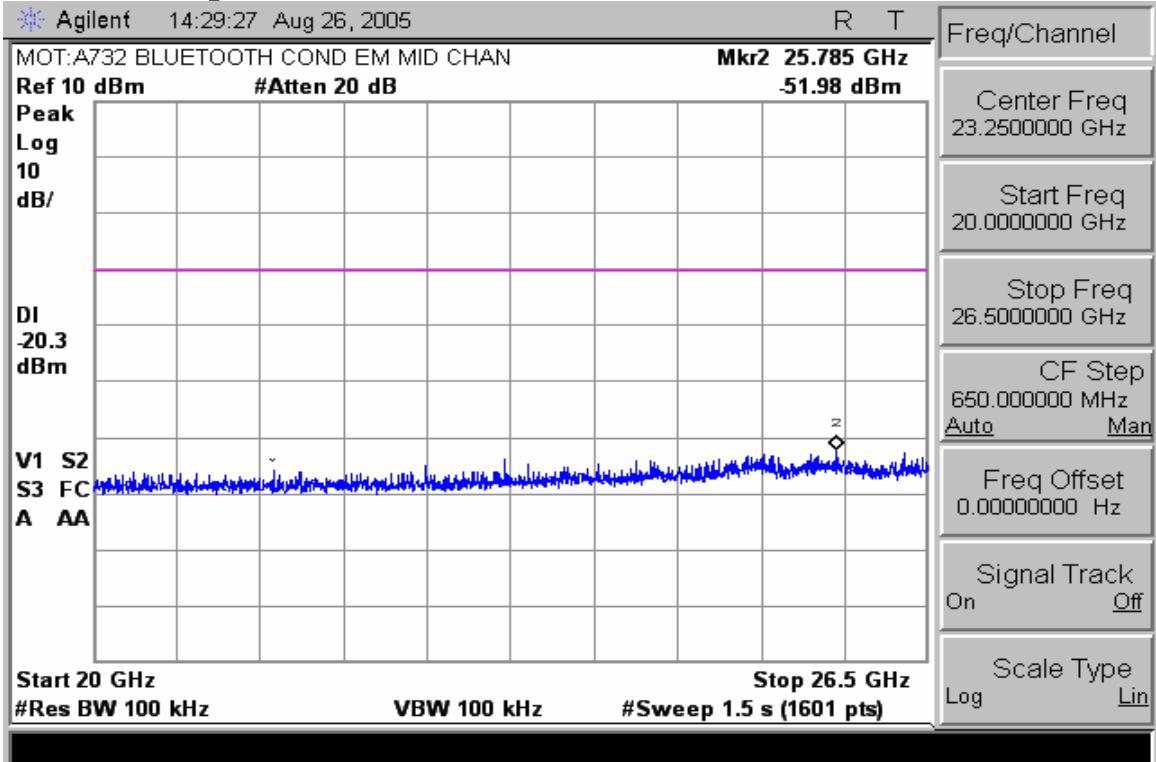


Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

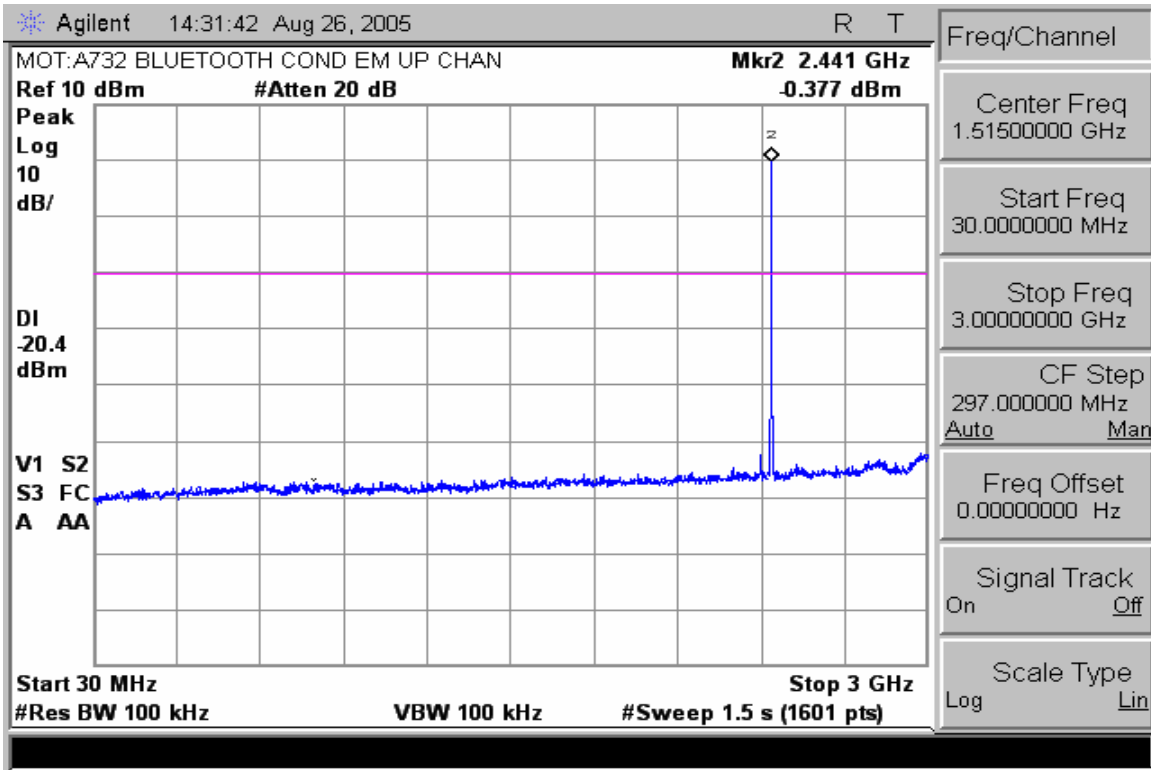


Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

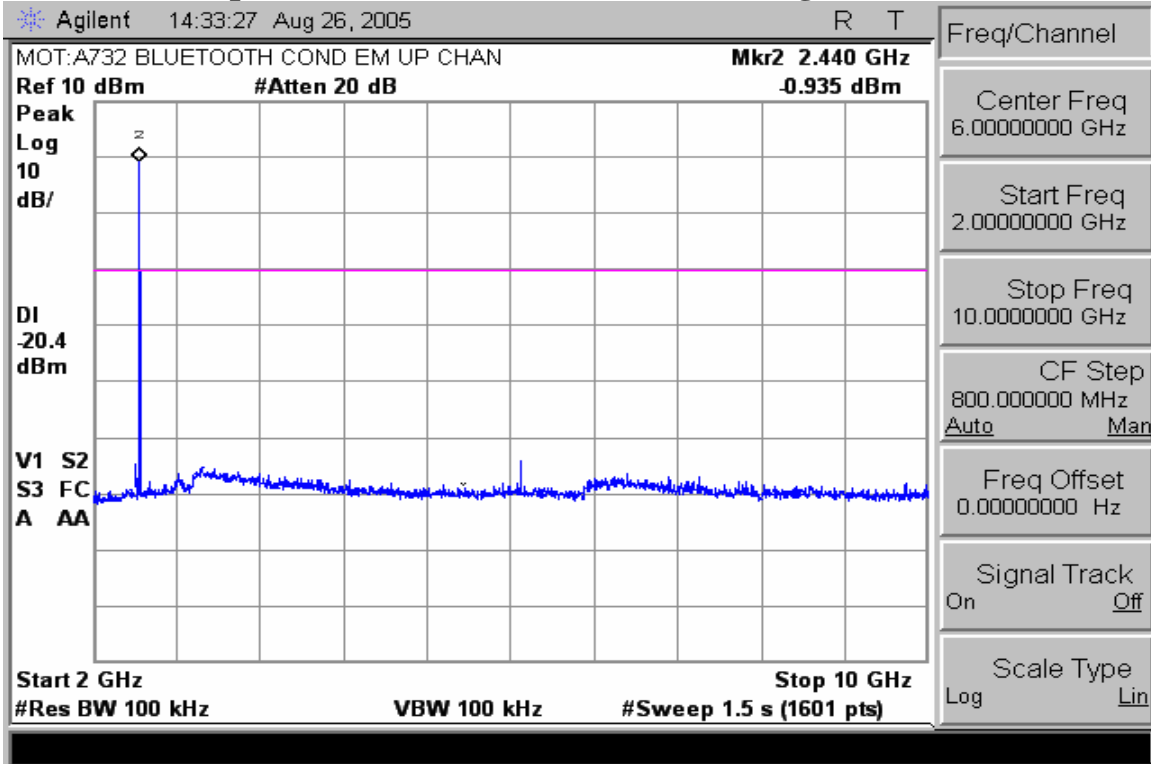

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

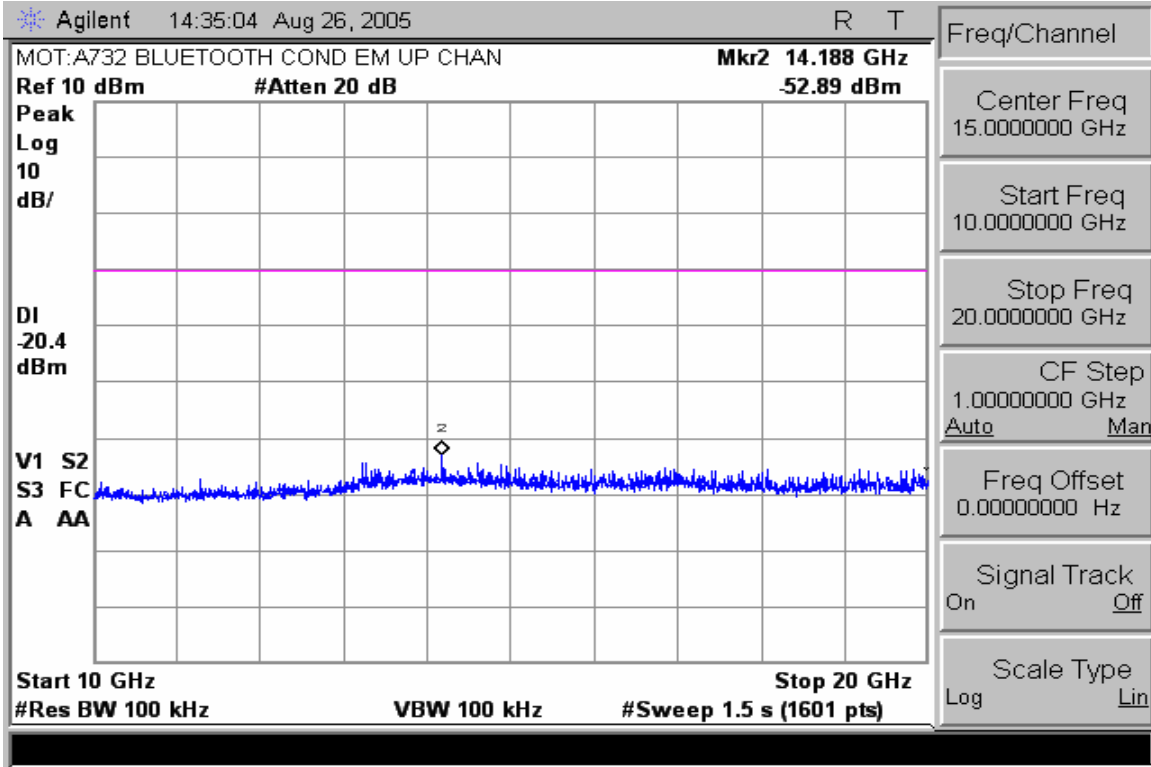

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

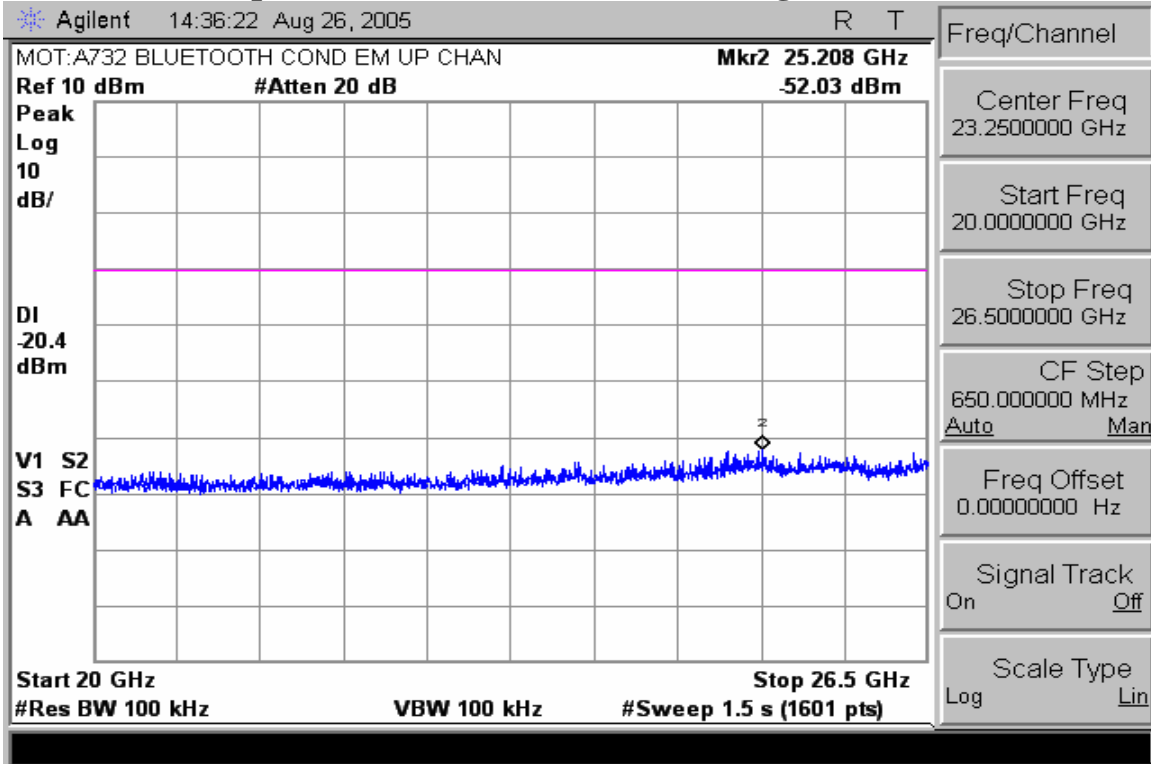

Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)

AC LINE CONDUCTED

CFR 47 Part 15.207


Measurement Procedure

Measured levels of ac powerline conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the powerline sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Measurement Results


See attached:

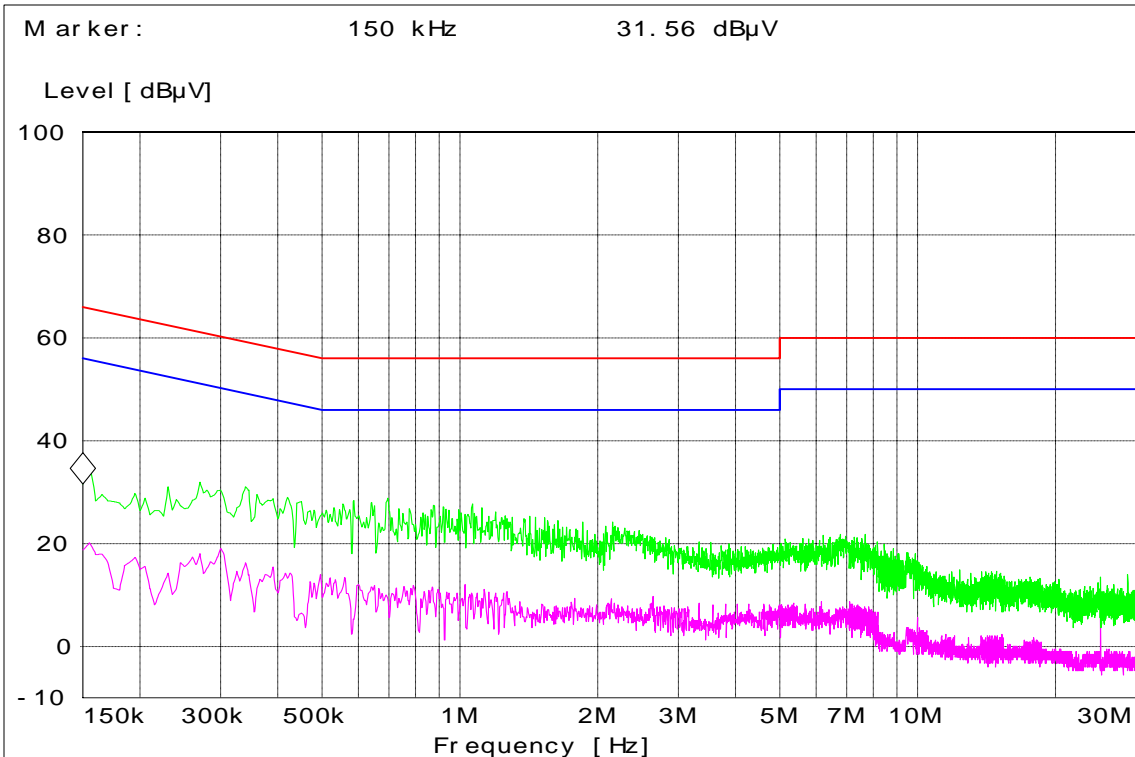


Bluetooth 2402MHz - Tx Mode - Neutral Coupling Hopping

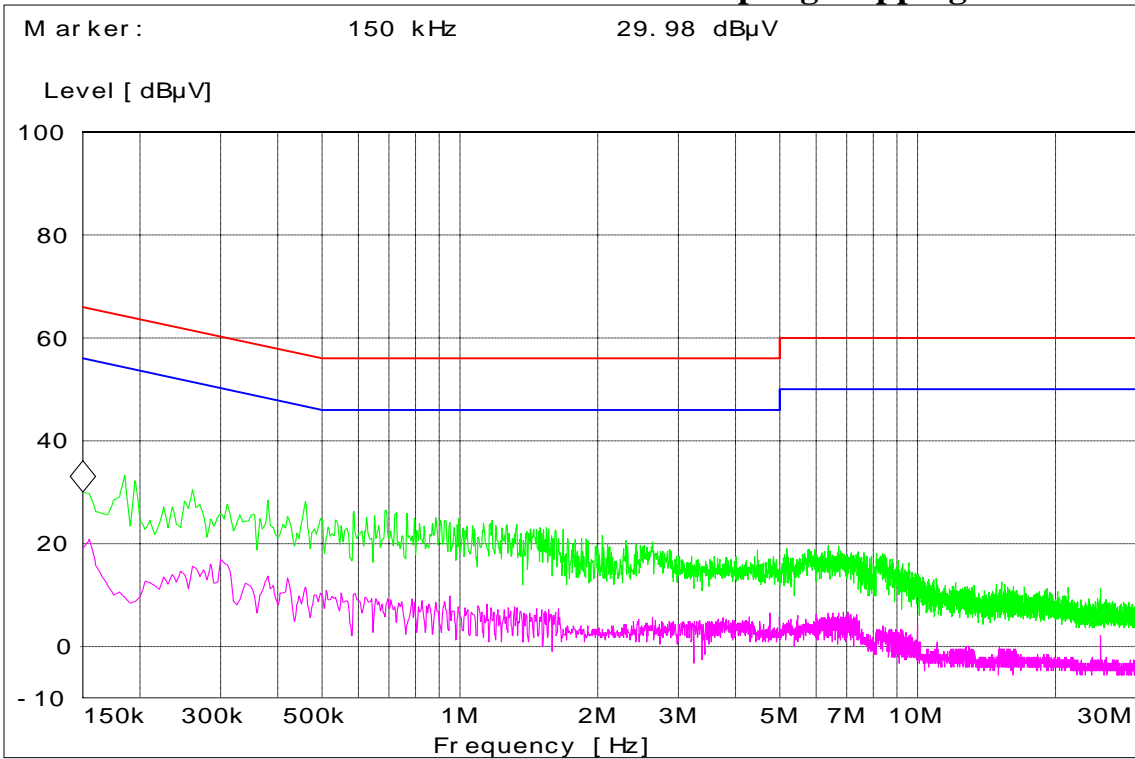


Bluetooth 2402MHz - Tx Mode - Line Coupling Nonhopping

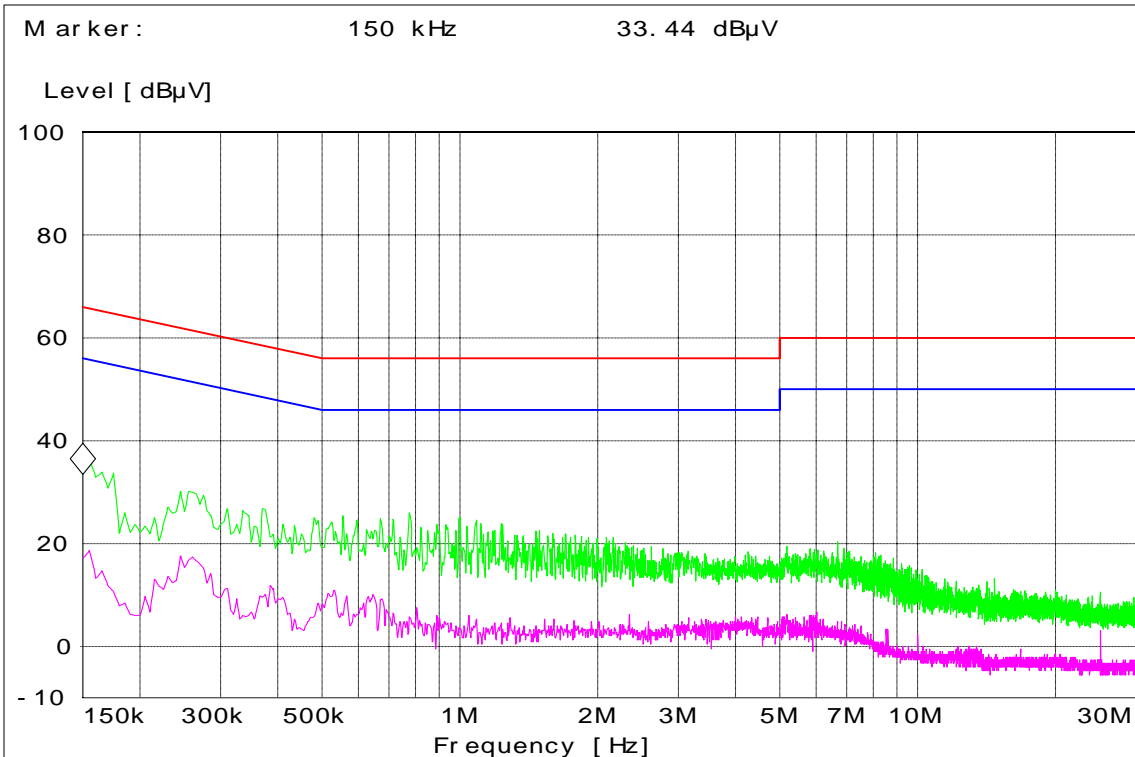


Bluetooth 2442MHz - Tx Mode - Line Coupling Nonhopping

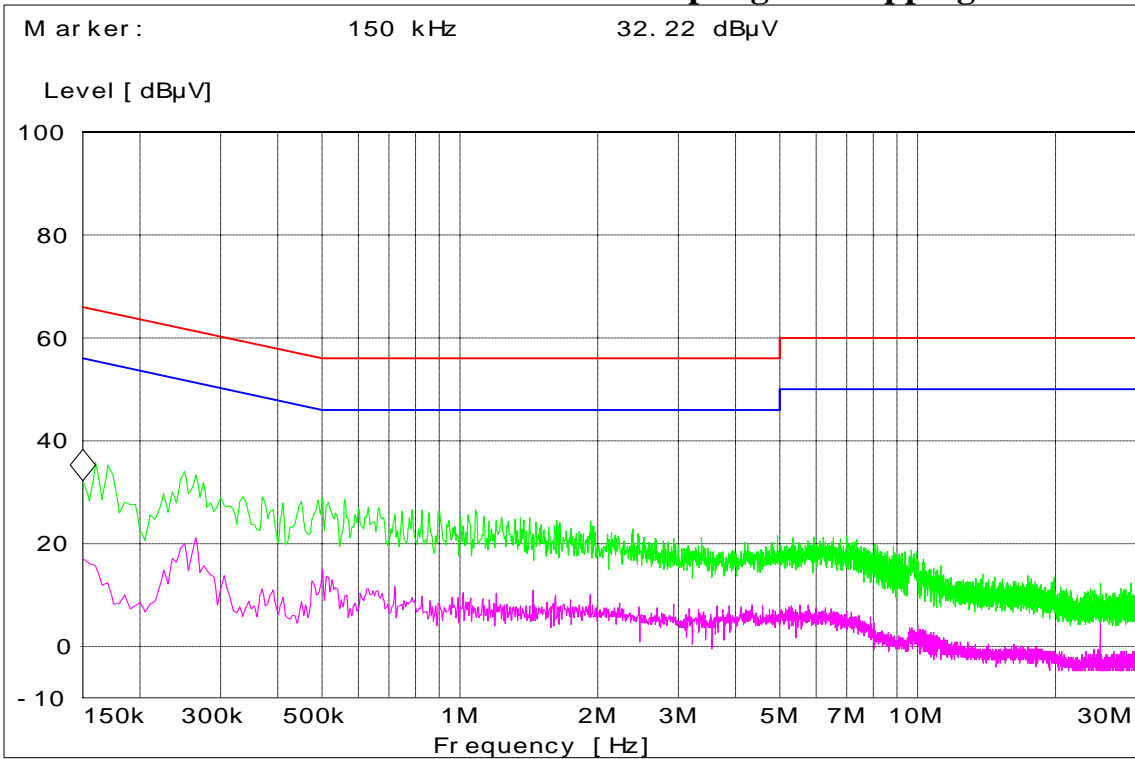


Bluetooth 2442MHz - Tx Mode - Neutral Coupling Hopping

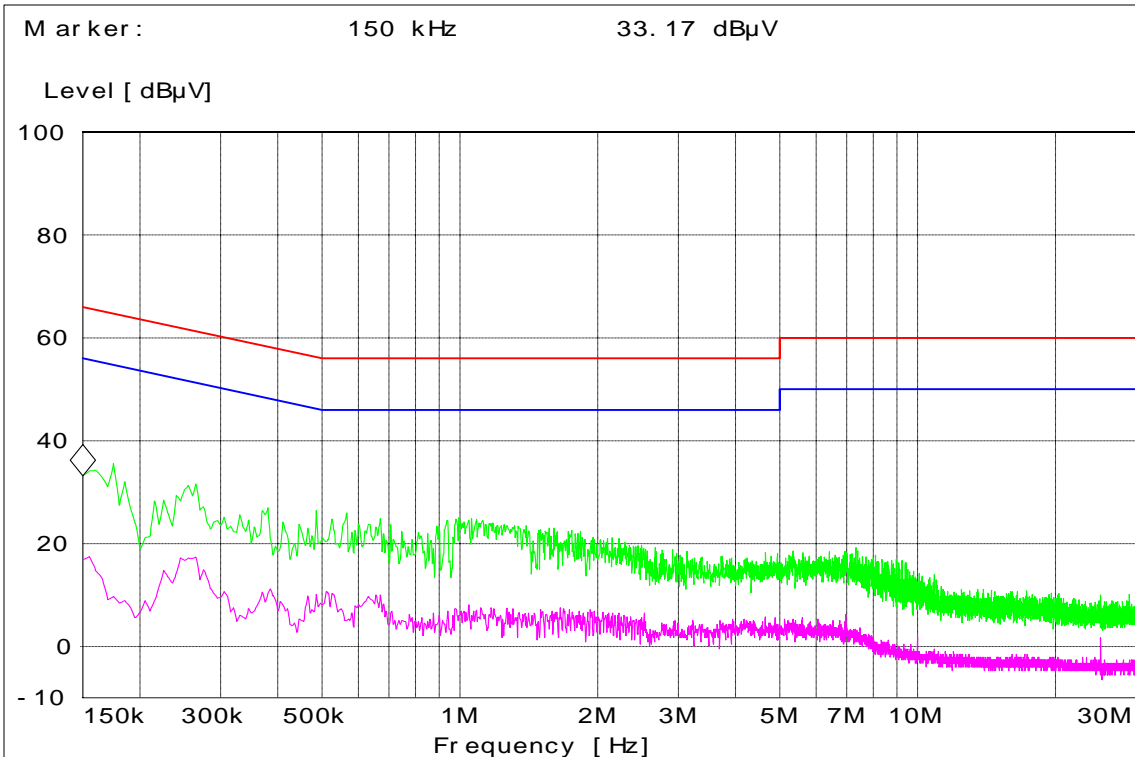


Bluetooth 2480MHz - Tx Mode - Line Coupling Hopping

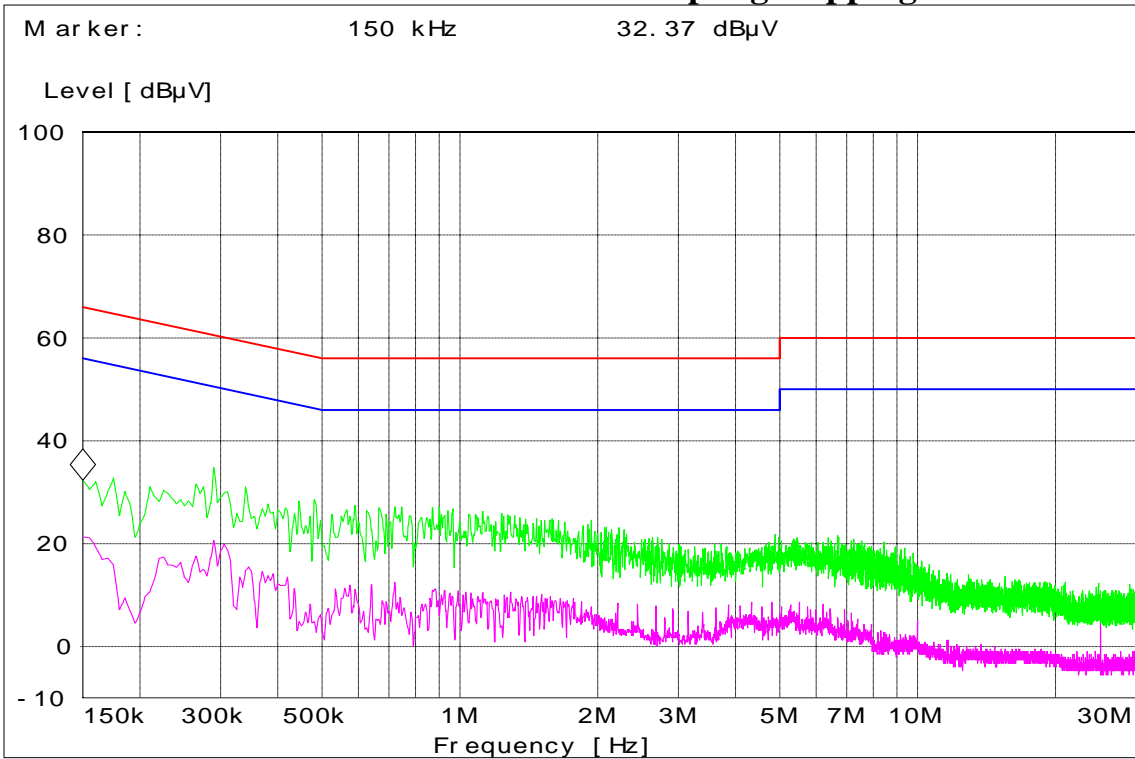


Bluetooth 2480MHz - Tx Mode - Neutral Coupling Hopping

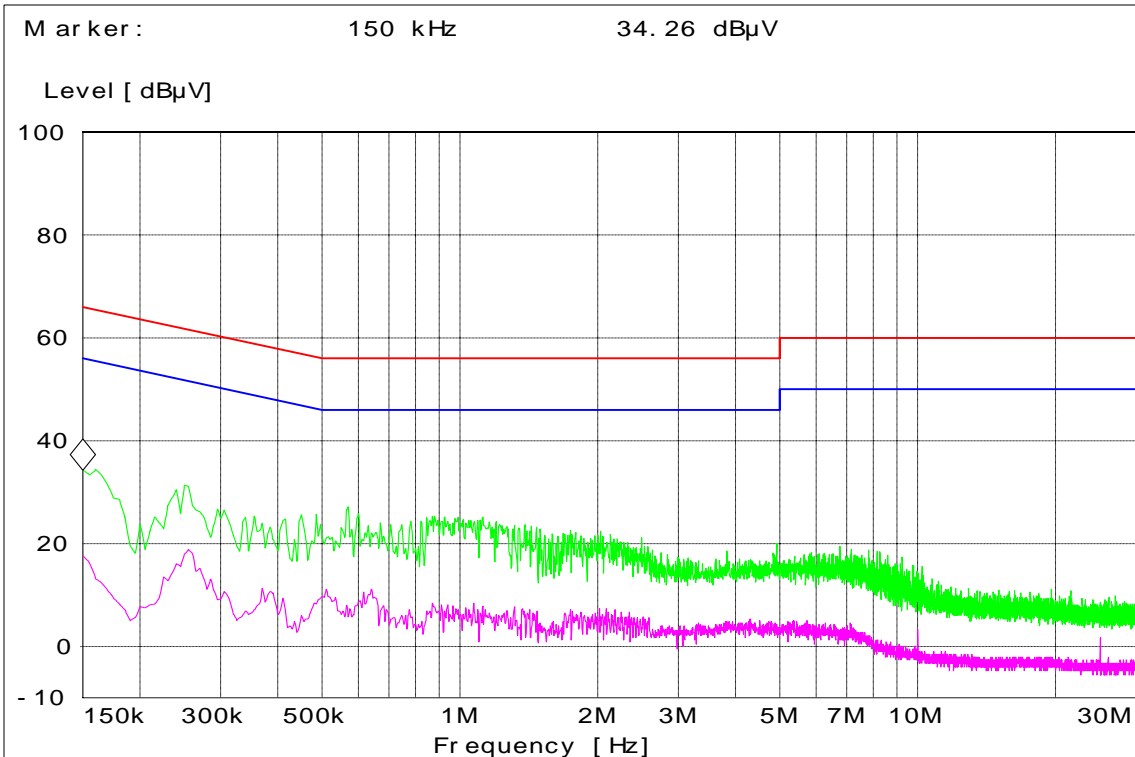


Bluetooth 2402MHz - Tx Mode - Line Coupling Hopping

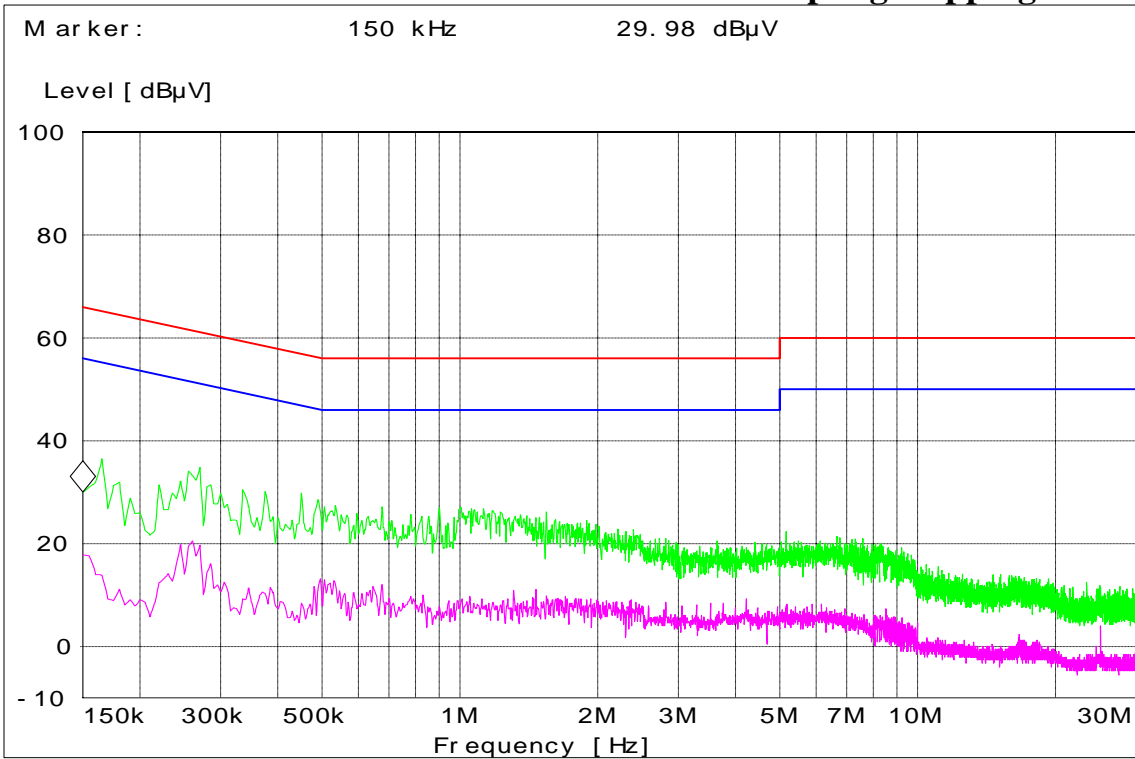


Bluetooth 2402MHz - Tx Mode - Neutral Coupling Nonhopping

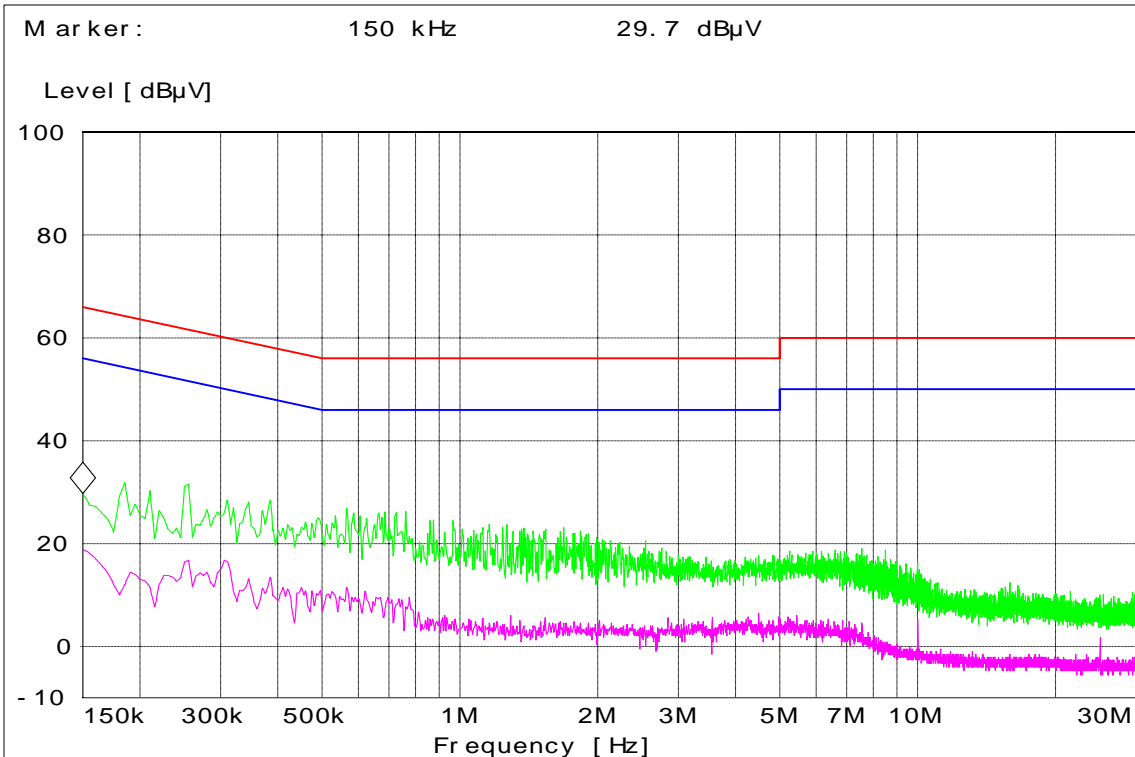


Bluetooth 2442MHz - Tx Mode - Line Coupling Hopping

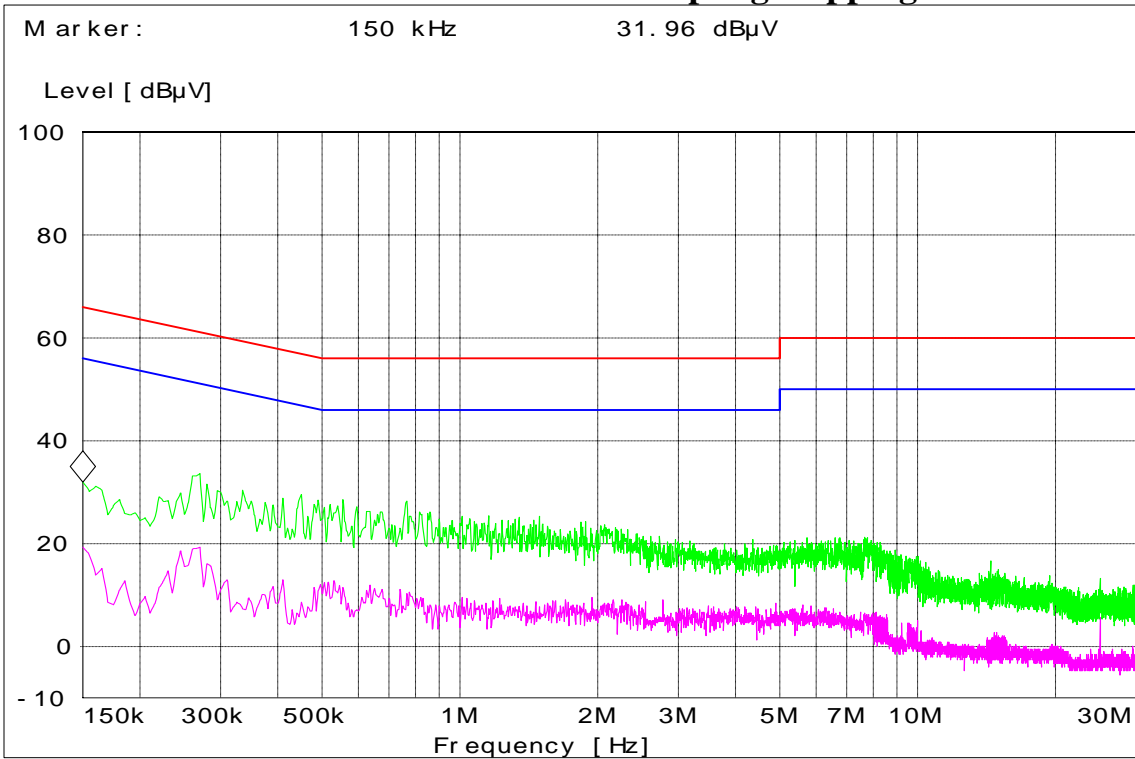

Bluetooth 2442MHz - Tx Mode - Neutral Coupling Nonhopping

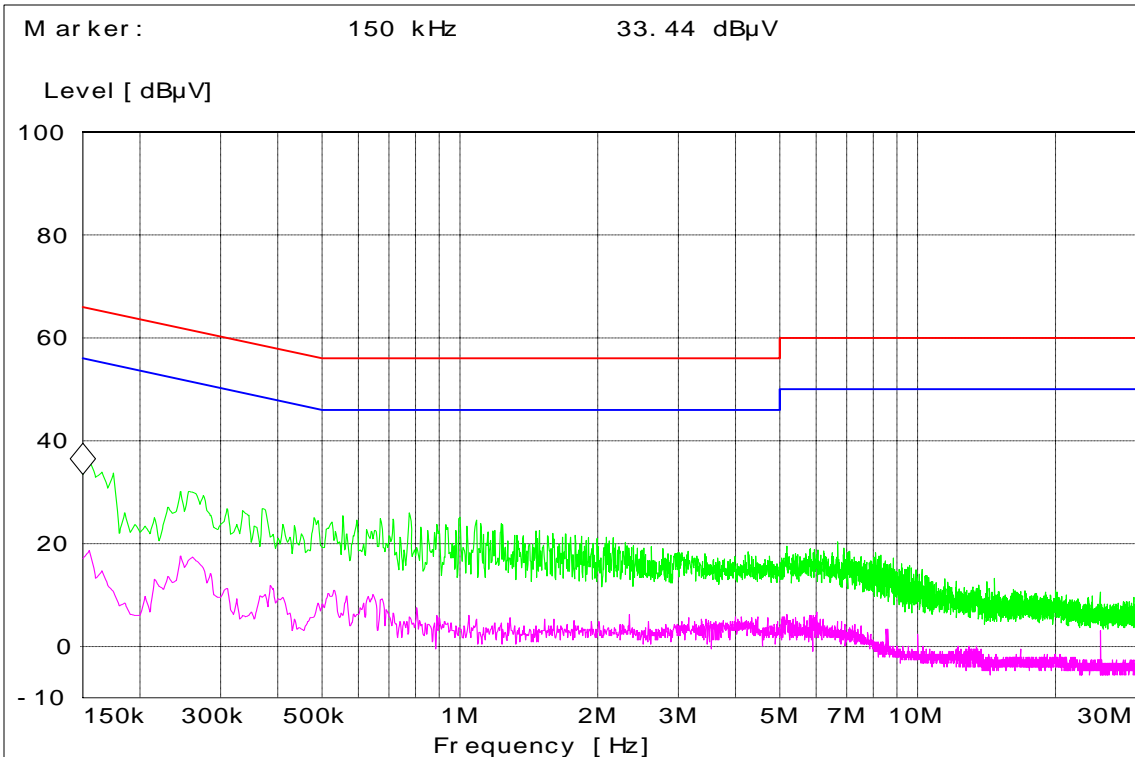

Bluetooth 2480MHz - Tx Mode - Line Coupling Nonhopping

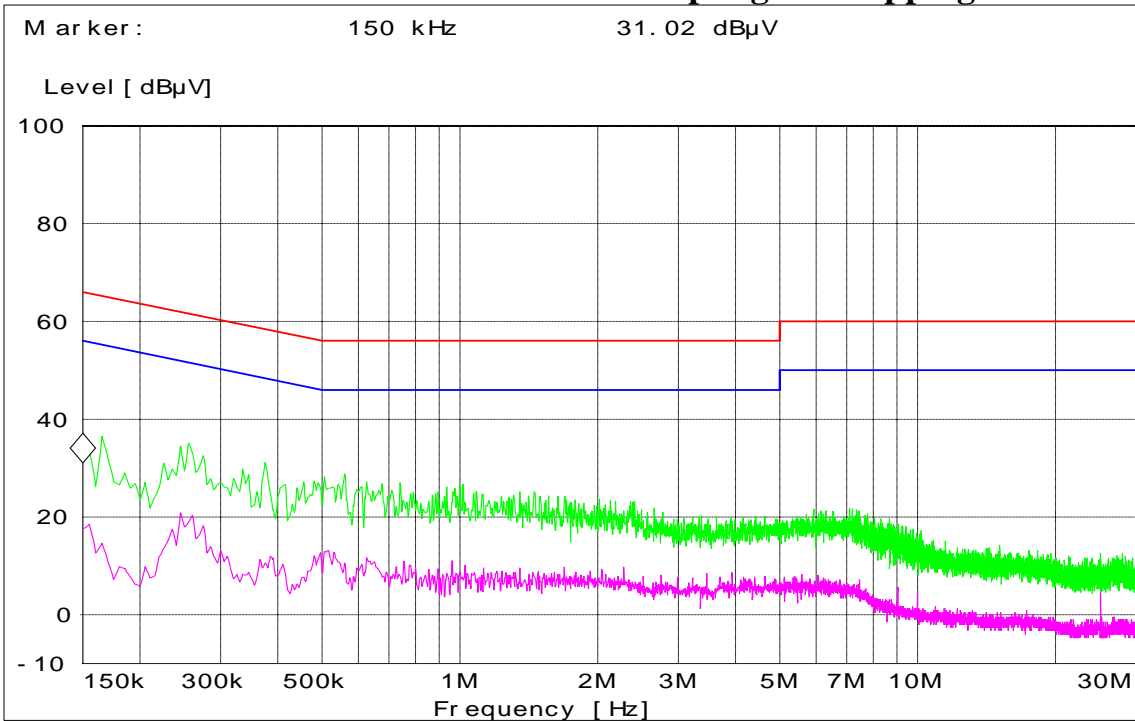

Bluetooth 2480MHz - Tx Mode - Neutral Coupling Nonhopping

End of Test Report