

Date: 2014-06-09 Page 1 of 14

No.: HM169208

Applicant (SUE021): SUPERSONICS ELECTRONICS COMPANY

Phase II, Block C 4th Floor, Gee Chang Industrial Bldg.,

108 Lok Shan Rd, Tokwawan, Kln, Hong Kong

Manufacturer: Supersonics Electronics Toys (Shenzhen) Co., Ltd.

Block 1 & 2, Xin Tian Village, Xin Feng Ind. Area, Guan

Lan, Bao an, Shenzhen, China

**Description of Sample(s):** Submitted samples(s) said to be

Product: WALKIE TALKIE

Brand Name: AT & T Model Number: 15118 FCC ID: II622001

**Date Sample(s) Received:** 2014-05-22

**Date Tested:** 2014-06-03 to 2014-06-04

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2013 and ANSI C63.4: 2009 for FCC

Certification.

**Conclusion(s):** The submitted product <u>COMPLIED</u> with the requirements

of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

**Remark(s):** For additional model(s) details, see page 3.

Dr. LEE Kam Chuen,
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2014-06-09 Page 2 of 14

No.: HM169208

# **CONTENT:**

	Cover	Page 2 of 14
<u>1.0</u>	General Details	
1.1	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 14
1.2	Date of Order	Page 3 of 14
1.3	Submitted Sample(s)	Page 3 of 14
1.4	Test Duration	Page 3 of 14
1.5	Country of Origin	Page 3 of 14
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 4 of 14
2.2	Test Standards and Results Summary	Page 4 of 14
3.0	Test Results	
3.1	Emission	Page 5-11 of 14
3.2	Bandwidth Measurement	Page 12-14 of 14
	Appendix A	
	List of Measurement Equipment	Page 15 of 14
	Appendix B	
	Photographs	Page 16-14 of 14



Date: 2014-06-09 Page 3 of 14

No.: HM169208

# 1.0 General Details

# 1.1 Equipment Under Test [EUT] Description of Sample(s)

Product: WALKIE TALKIE

Manufacturer: Supersonics Electronics Toys (Shenzhen) Co., Ltd.

Block 1 & 2, Xin Tian Village, Xin Feng Ind. Area, Guan

Lan, Bao an, Shenzhen, China

Brand Name: AT & T
Additional Brand Name(s): KAWASAKI

Model Number: 15118 Additional Model 22218

Nubmer(s):

Input Voltage: 9Vd.c("6F22" size battery x 1)

# 1.1.1 Description of EUT Operation

The Equipment Under Test (EUT) is a SUPERSONICS ELECTRONICS COMPANY., WALKIE TALKIE. The EUT is a transmitter of radio control toy. The transmitter was operating with 1 button; the EUT continues to transmit while the button is pressed, It is audio transmitter, Modulation by IC, and type is AM modulation.

#### 1.2 Date of Order

2014-05-22

### 1.3 Submitted Sample(s):

1 Sample

#### 1.4 Test Duration

2014-06-03 to 2014-06-04

#### 1.5 Country of Origin

China



Date: 2014-06-09 Page 4 of 14

No.: HM169208

# **2.0** Technical Details

# 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2013 and ANSI C63.4:2009 for FCC Certification.

# 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Test	Result			
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2009	N/A					
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2009	N/A					

Note: N/A - Not Applicable



Date: 2014-06-09 Page 5 of 14

No.: HM169208

# 3.0 Test Results

#### 3.1 Emission

## 3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2009
Test Date: 2014-06-03


Mode of Operation: Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of semi-anechoic chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the G/F of "The Hong Kong Standards and Testing Centre Ltd." with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

# **Test Setup:**

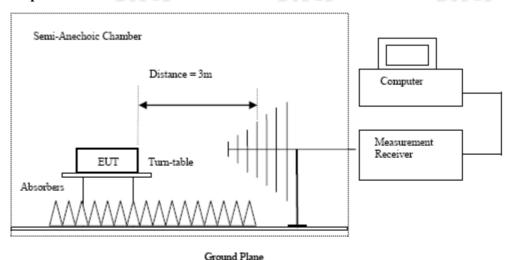

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antenna, above 1000MHz horn antenna is used.

# The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Korg Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2014-06-09 Page 6 of 14

No.: HM169208

# Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15,235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	$[\mu V/m]$	$[\mu V/m]$
49.82-49.90	100,000	10,000

Results of Tx mode: PASS

Field Strength of Fundamental Emissions									
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m Factor Strength Strength Polarity								
MHz	dΒμV	dB/m	$dB\mu V/m$	$\mu V/m$	$\mu V/m$				
49.86	48.2	9.8	58.0	794.3	100,000	Vertical			

Field Strength of Fundamental Emissions								
Average Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field							
	Level @3m Factor Strength Strength Polarity							
MHz	MHz $dB\mu V$ $dB/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$							
49.86	49.86 47.6 9.8 57.4 741.3 10,000 Vertical							

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.



Date: 2014-06-09 Page 7 of 14

No.: HM169208

# Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Tx mode (9kHz-30MHz): PASS

Emissions detected are more than 20 dB below the limit line(s).

#### Results of Tx mode (30MHz - 1GHz): PASS

Radiated Emissions							
			Quasi-Peak				
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$\mu V/m$	$\mu V/m$		
99.72	14.6	8.9	23.5	15.0	150	Vertical	
149.58	12.7	9.5	22.2	12.9	150	Vertical	
199.44	20.1	11.7	31.8	38.9	150	Horizontal	
249.30	16.8	14.0	30.8	34.7	200	Horizontal	
498.61	17.6	21.2	38.8	87.1	200	Vertical	
548.46	14.1	21.7	35.8	61.7	200	Vertical	



Date: 2014-06-09 Page 8 of 14

No.: HM169208

# Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Rx mode (9kHz-30MHz): PASS

Emissions detected are more than 20 dB below the limit line(s).

#### Results of Rx mode (30MHz - 1GHz): PASS

Radiated Emissions										
	Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field				
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	dΒμV	dB/m	dBμV/m	$\mu V/m$	$\mu V/m$					
39.34	8.6	12.9	21.5	11.9	100	Vertical				
46.63	21.7	10.7	32.4	41.7	100	Vertical				
49.84	23.8	9.8	33.6	47.9	100	Vertical				
52.00	16.9	9.3	26.2	20.4	100	Vertical				
54.81	9.7	9.2	18.9	8.8	100	Vertical				
60.98	8.8	8.8	17.6	7.6	100	Vertical				

# Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Emissions in the vertical and horizontal polarizations have been investigated and the worst -case test results are recorded in this report.

Calculated measurement uncertainty : 30MHz to 1GHz 4.9dB

1GHz to 6GHz 4.02dB 6GHz to 18GHz 4.03dB



Date: 2014-06-09 Page 9 of 14

No.: HM169208

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2009 (Section 13.1.7)

Test Date: 2014-06-04 Mode of Operation: Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2014-06-09 Page 10 of 14

No.: HM169208

### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
49.86	9.81	within 49.82-49.90

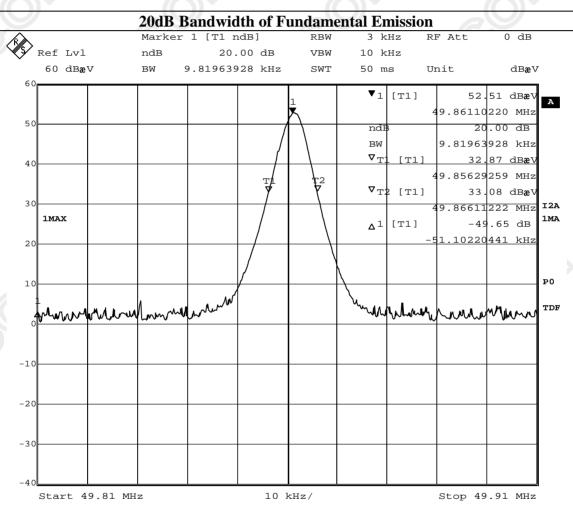


Date: 4.JUN.2014 09:38:07



Date: 2014-06-09 Page 11 of 14

No.: HM169208

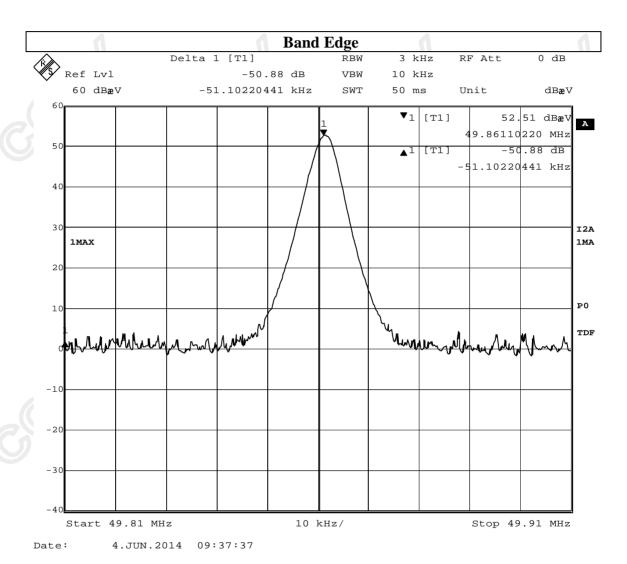

# The Hong Kong Standards and Testing Centre Ltd.



Date: 2014-06-09 Page 12 of 14

No.: HM169208

# Appendix A

# List of Measurement Equipment

#### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2014/01/15	2016/01/25
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3		2013/10/02	2014/10/02
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2013/04/25	2015/04/25
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2014/05/26	2015/05/26
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2014/01/15	2016/01/15

#### Remarks:-

Corrective Maintenance CM

N/A Not Applicable **TBD** To Be Determined



Date: 2014-06-09 Page 13 of 14

No.: HM169208

# Appendix B

# Photographs of EUT











Date: 2014-06-09 Page 14 of 14

No.: HM169208

# Photographs of EUT

Measurement of Radiated Emission Test Set Up



\*\*\*\*\* End of Test Report \*\*\*\*\*

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Korg
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage:www.hkstc.org E-mail: hkstc@hkstc.org