
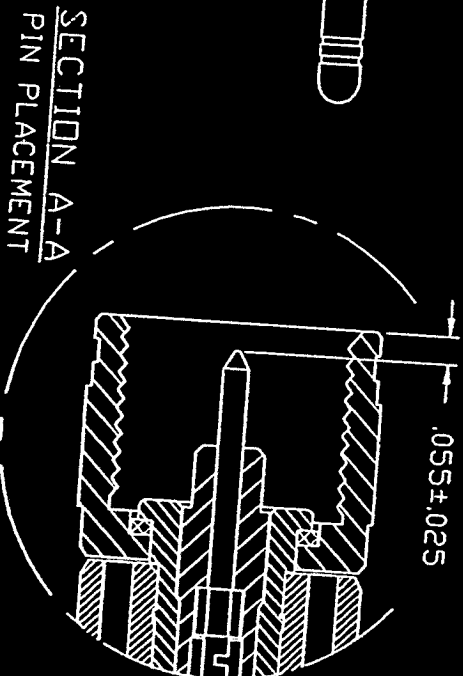
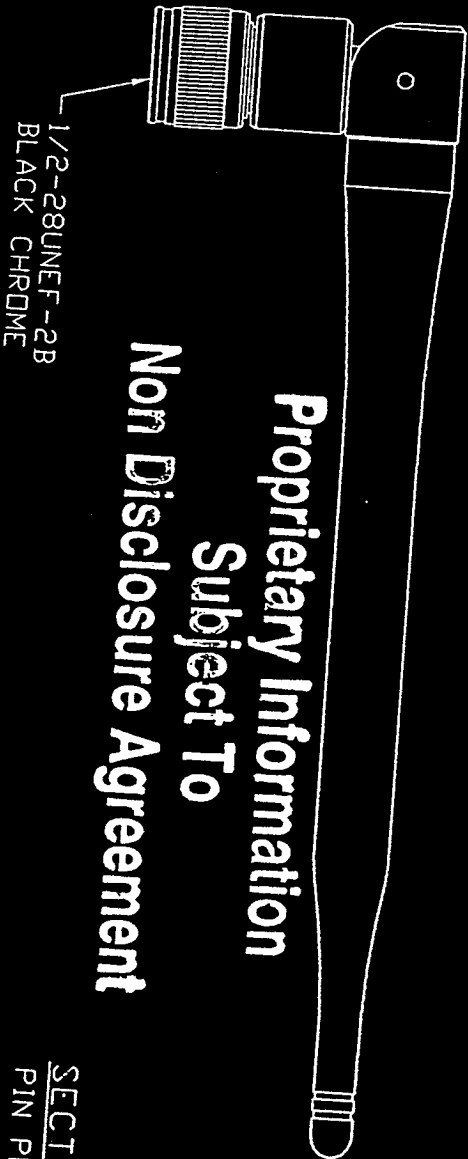


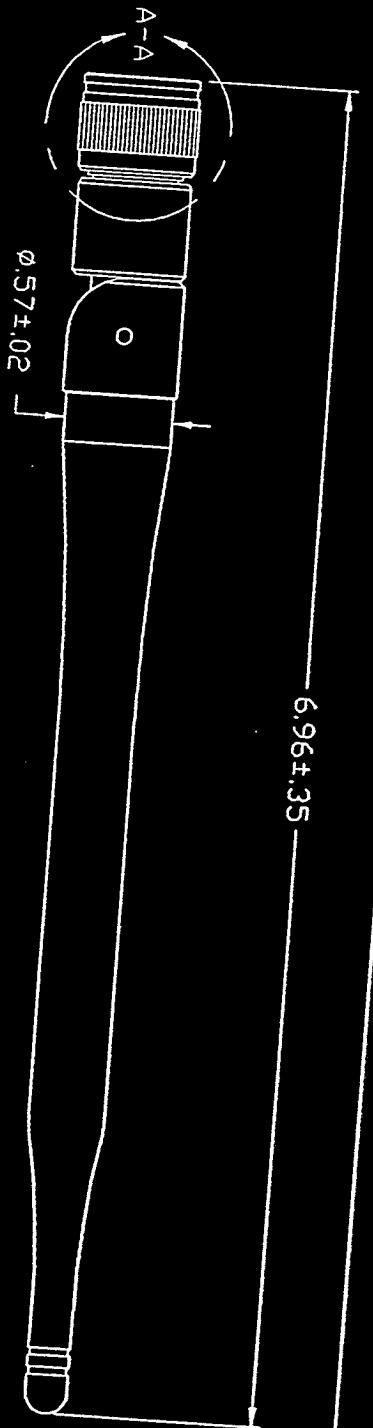

NOTES:

1 SPECIFICATIONS:

GAIN: 1.0 dB;
 OPERATING TEMPERATURE: -40°C TO +85°C
 FLEX TEST: PER QEA0014
 PULL TEST: 20 lbs. LINEAR PULL
 TORQUE TEST: 20 in-lbs.
 POWER RATING: 50 WATTS
 VSWR 1.5:1 MAX. AT RESONANCE

2 CENTURION

PART NO.	CUSTOMER	MODEL NO.	FREQUENCY CODE	FREQUENCY RANGE
CAF28771	805-486-001	2.4 GHZ	2.4-2.5GHZ	

ALL DIMENSIONS ARE IN INCHES

LET	REVISION	DATE	CK	APP	SCALE:	TOL. UNLESS NOTED:
X1	PROT6032	10/95			1:1	.XX = ± .010
A	ECD951263	10/95			DR: JB CK:	.XXX = ± .005
B	ECD9653	01/96				ANGULAR ± 30°

CENTURION INT. INC.

P.O. BOX 88946
 LINCOLN, NE 68501

ANT, CCR-2.4GHZ-TNSP

MATERIAL:

N/A

DATE: 10/13/95 DWG NO.: CAF28771 PG: REV

CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE
 IT MAY NOT BE REPRODUCED OR USED WITHOUT EXPRESS WRITTEN PERMISSION

ATTACHMENT 1

RECEIVED